
SSS-FAA-120-01-0

120" FAA Airport "0" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

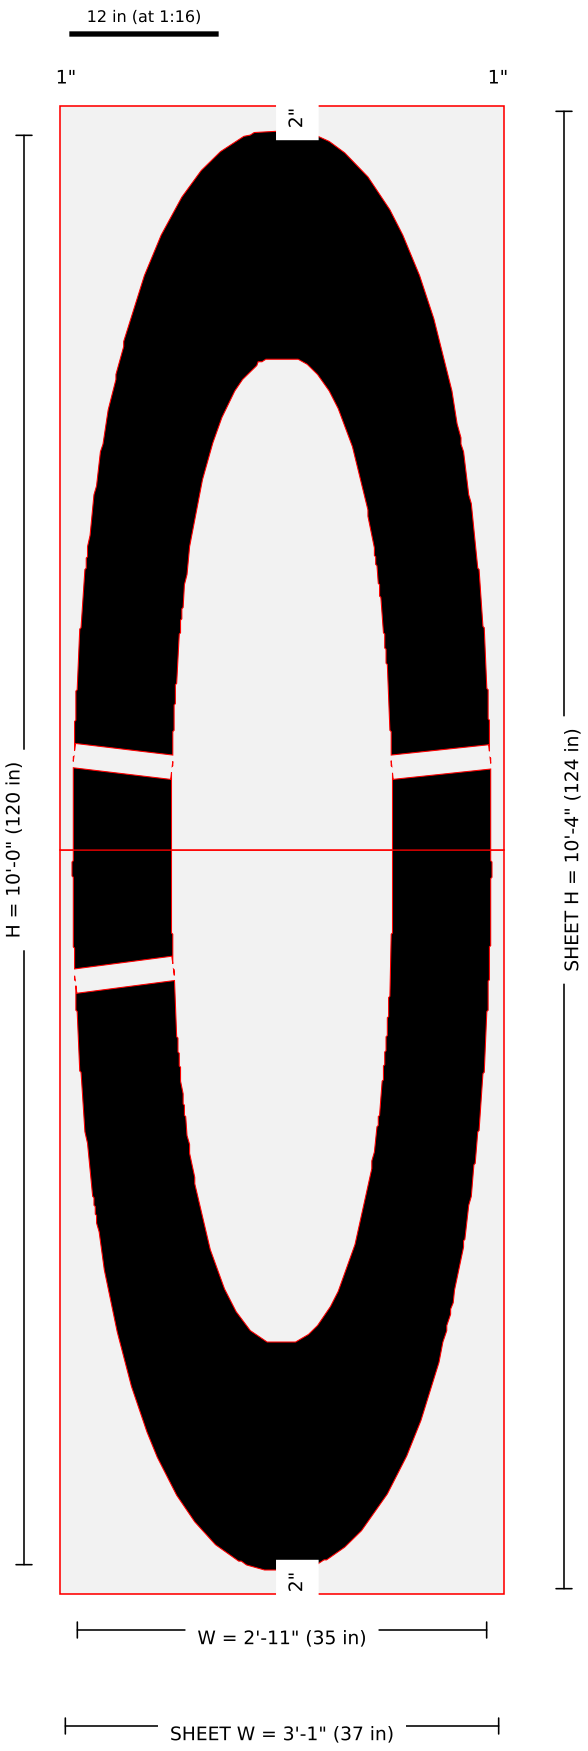

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1200-120in-FAA-Airport-Letter-0-134x48-2.jpg: width = kit listing 35 (image-scale 34.30); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (30.75,67.33) stroke 8.122" w=2.031"; (4.25,67.38) stroke 8.134" w=2.034" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-0 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

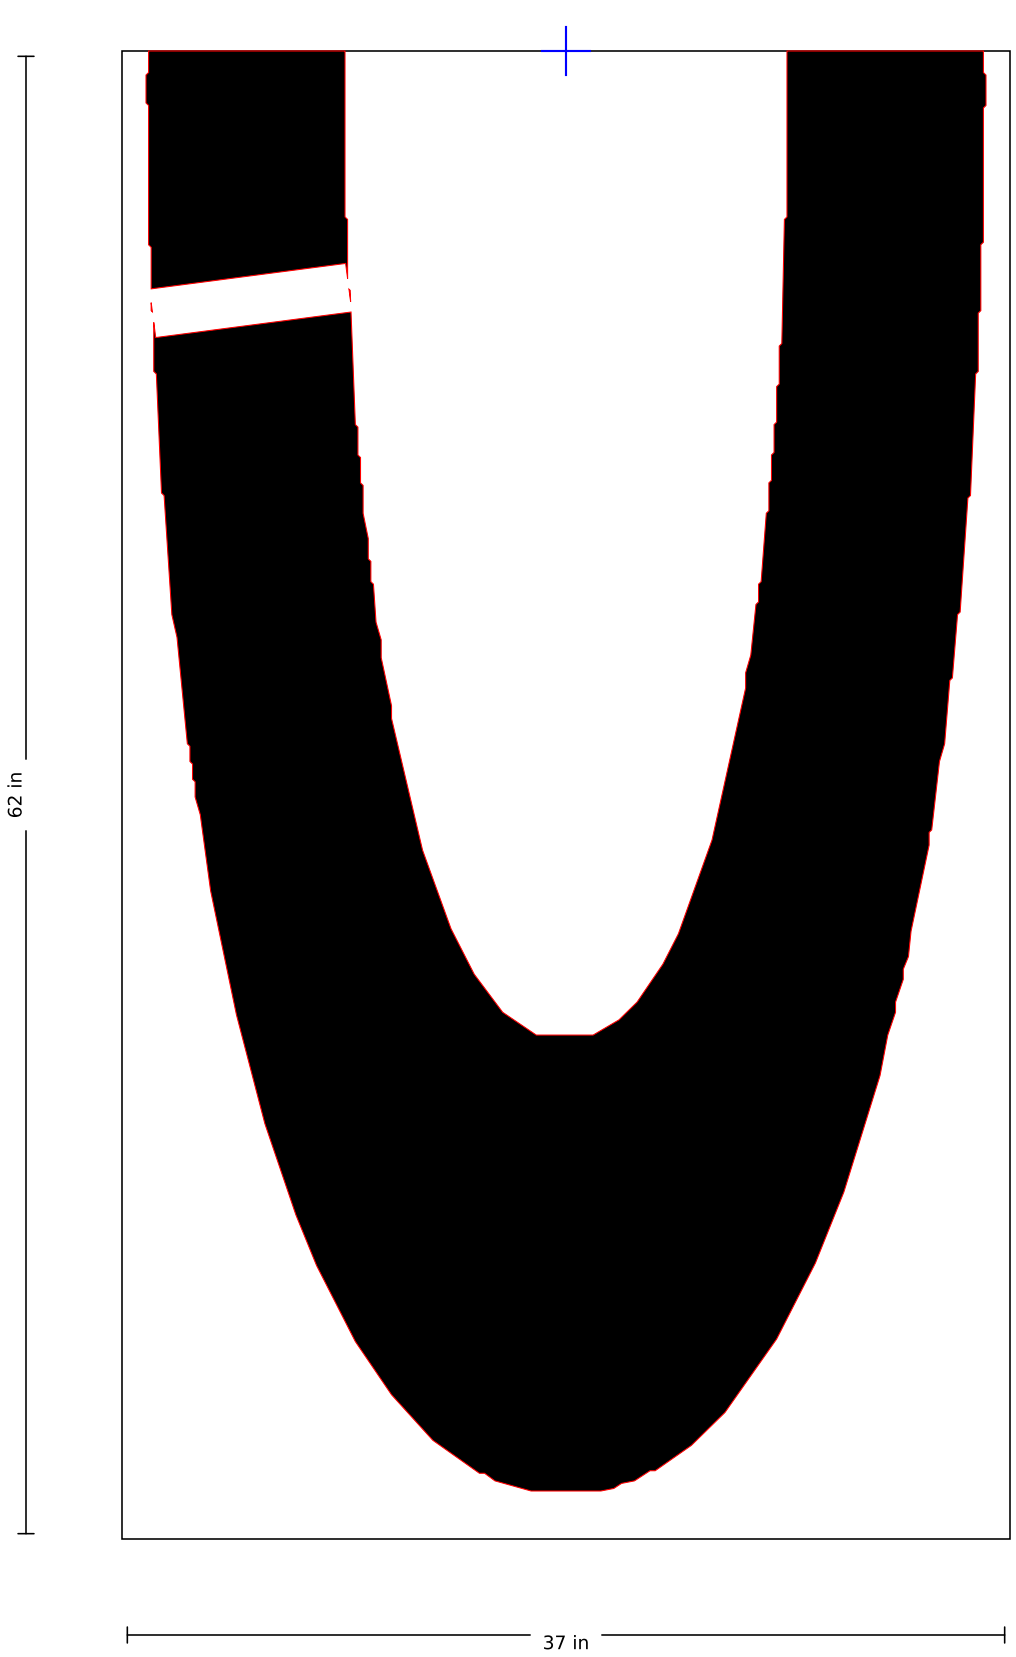

SSS-FAA-120-01-0 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

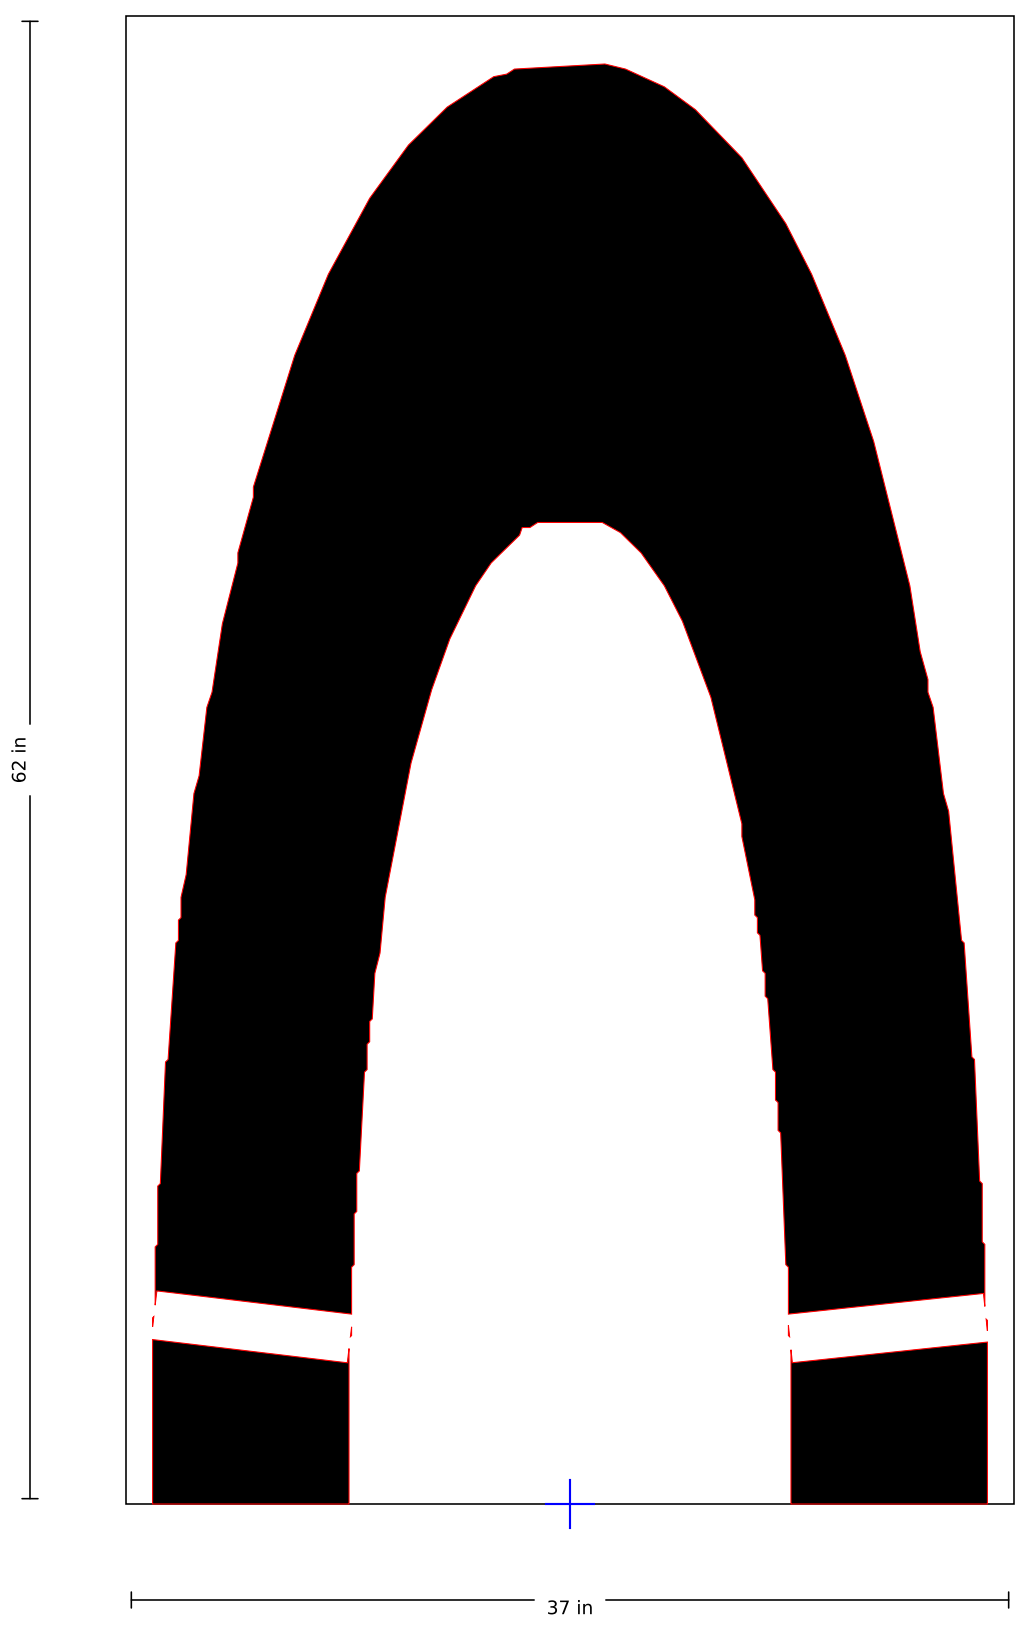

SSS-FAA-120-01-1

120" FAA Airport "1" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 12 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

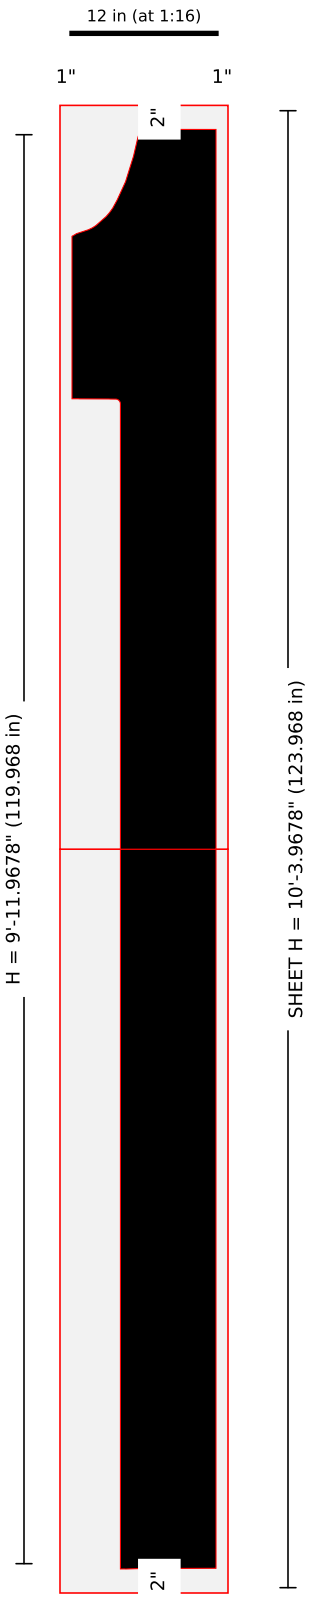

Pieces: 2 (1 x 2); blanks (in): 14 x 61.984, 14 x 61.984 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1201-120in-FAA-Airport-Letter-1-134x48-2.jpg: width 12 from image scale (11.92); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-1 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

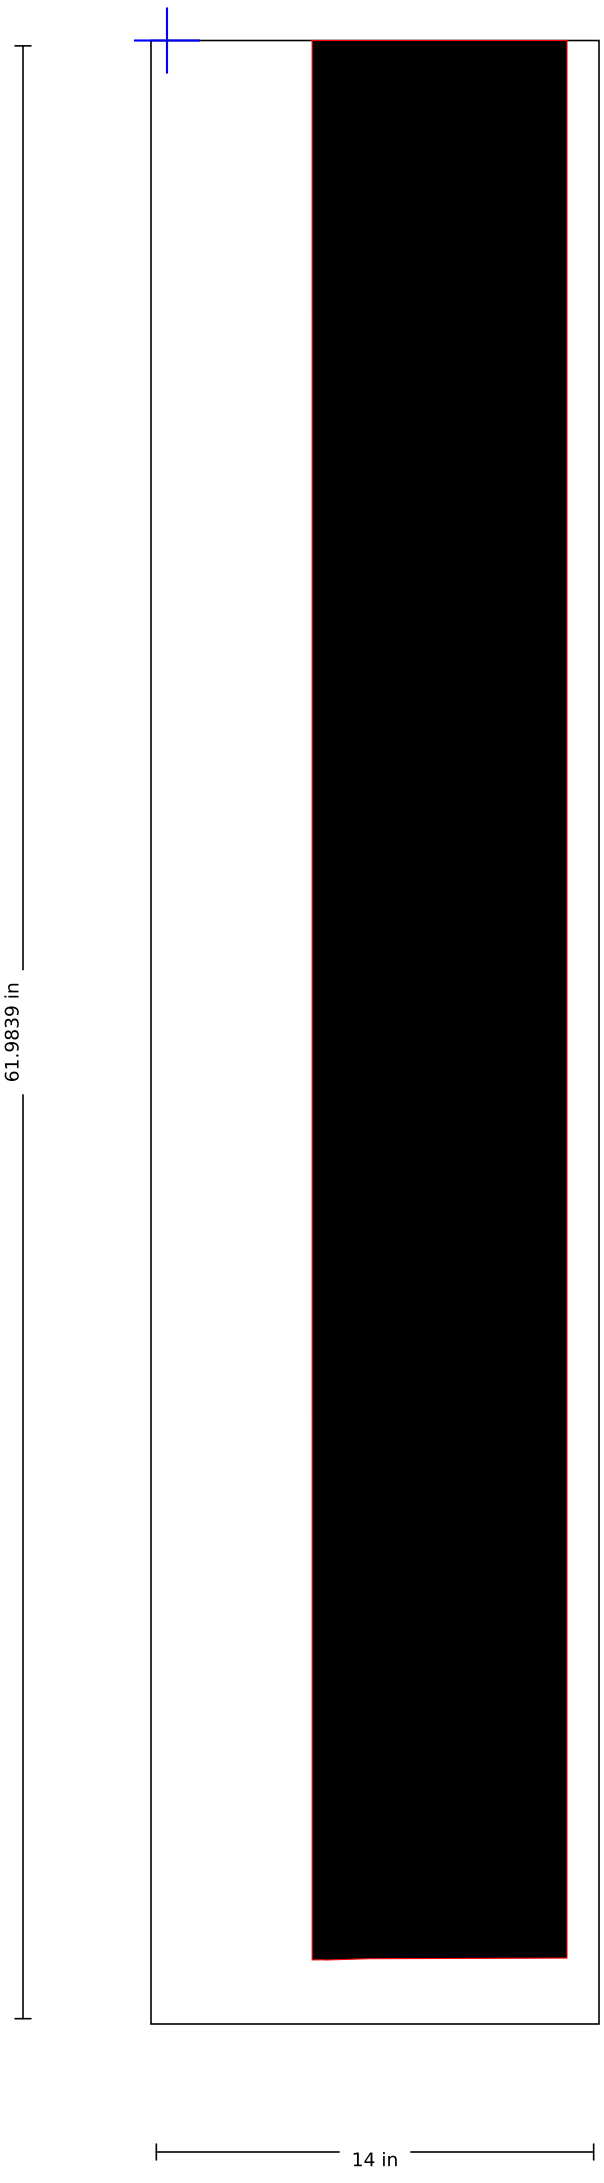

SSS-FAA-120-01-1 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

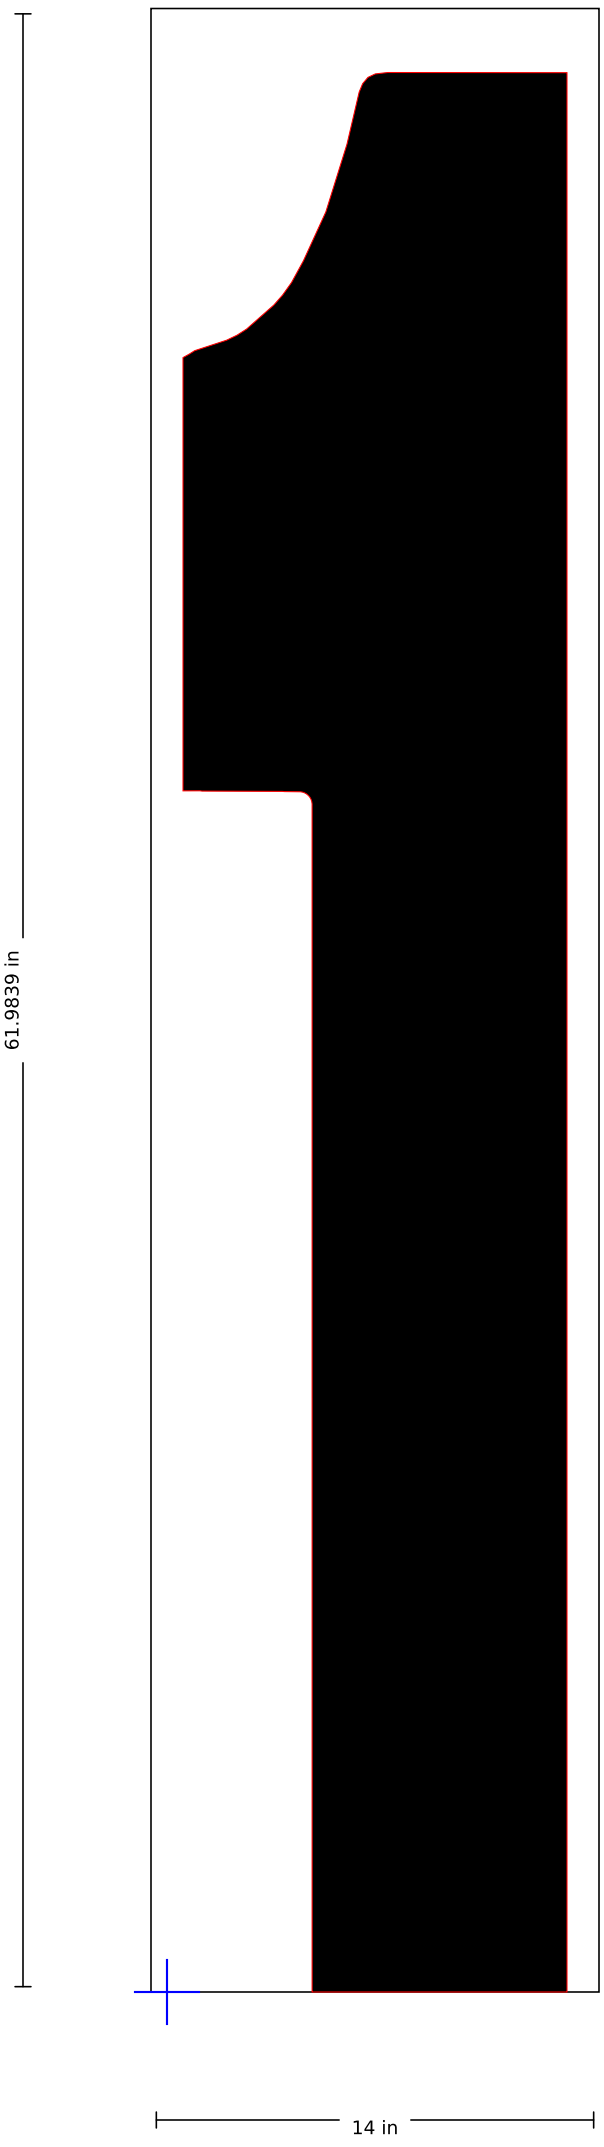

SSS-FAA-120-01-2

120" FAA Airport "2" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

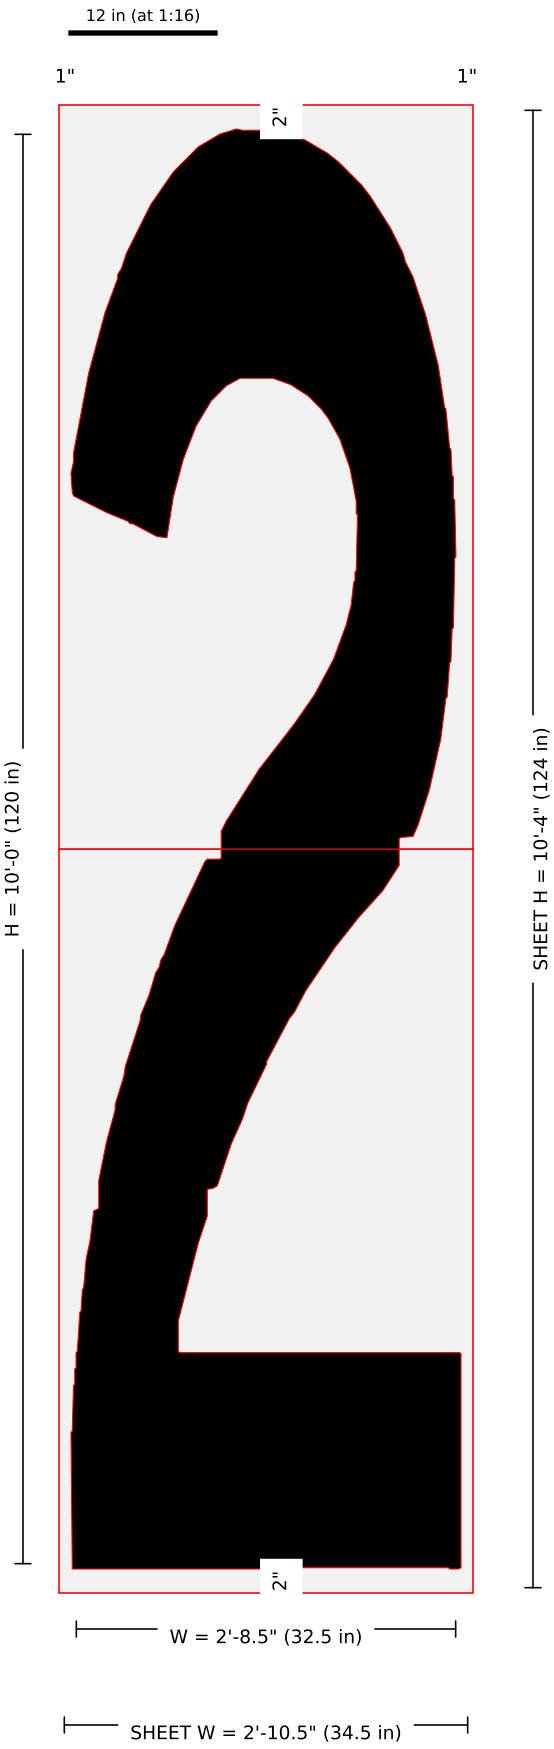

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1202-120in-FAA-Airport-Letter-2-134x48-2.jpg: width 32.5 from image scale (32.58); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-2 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

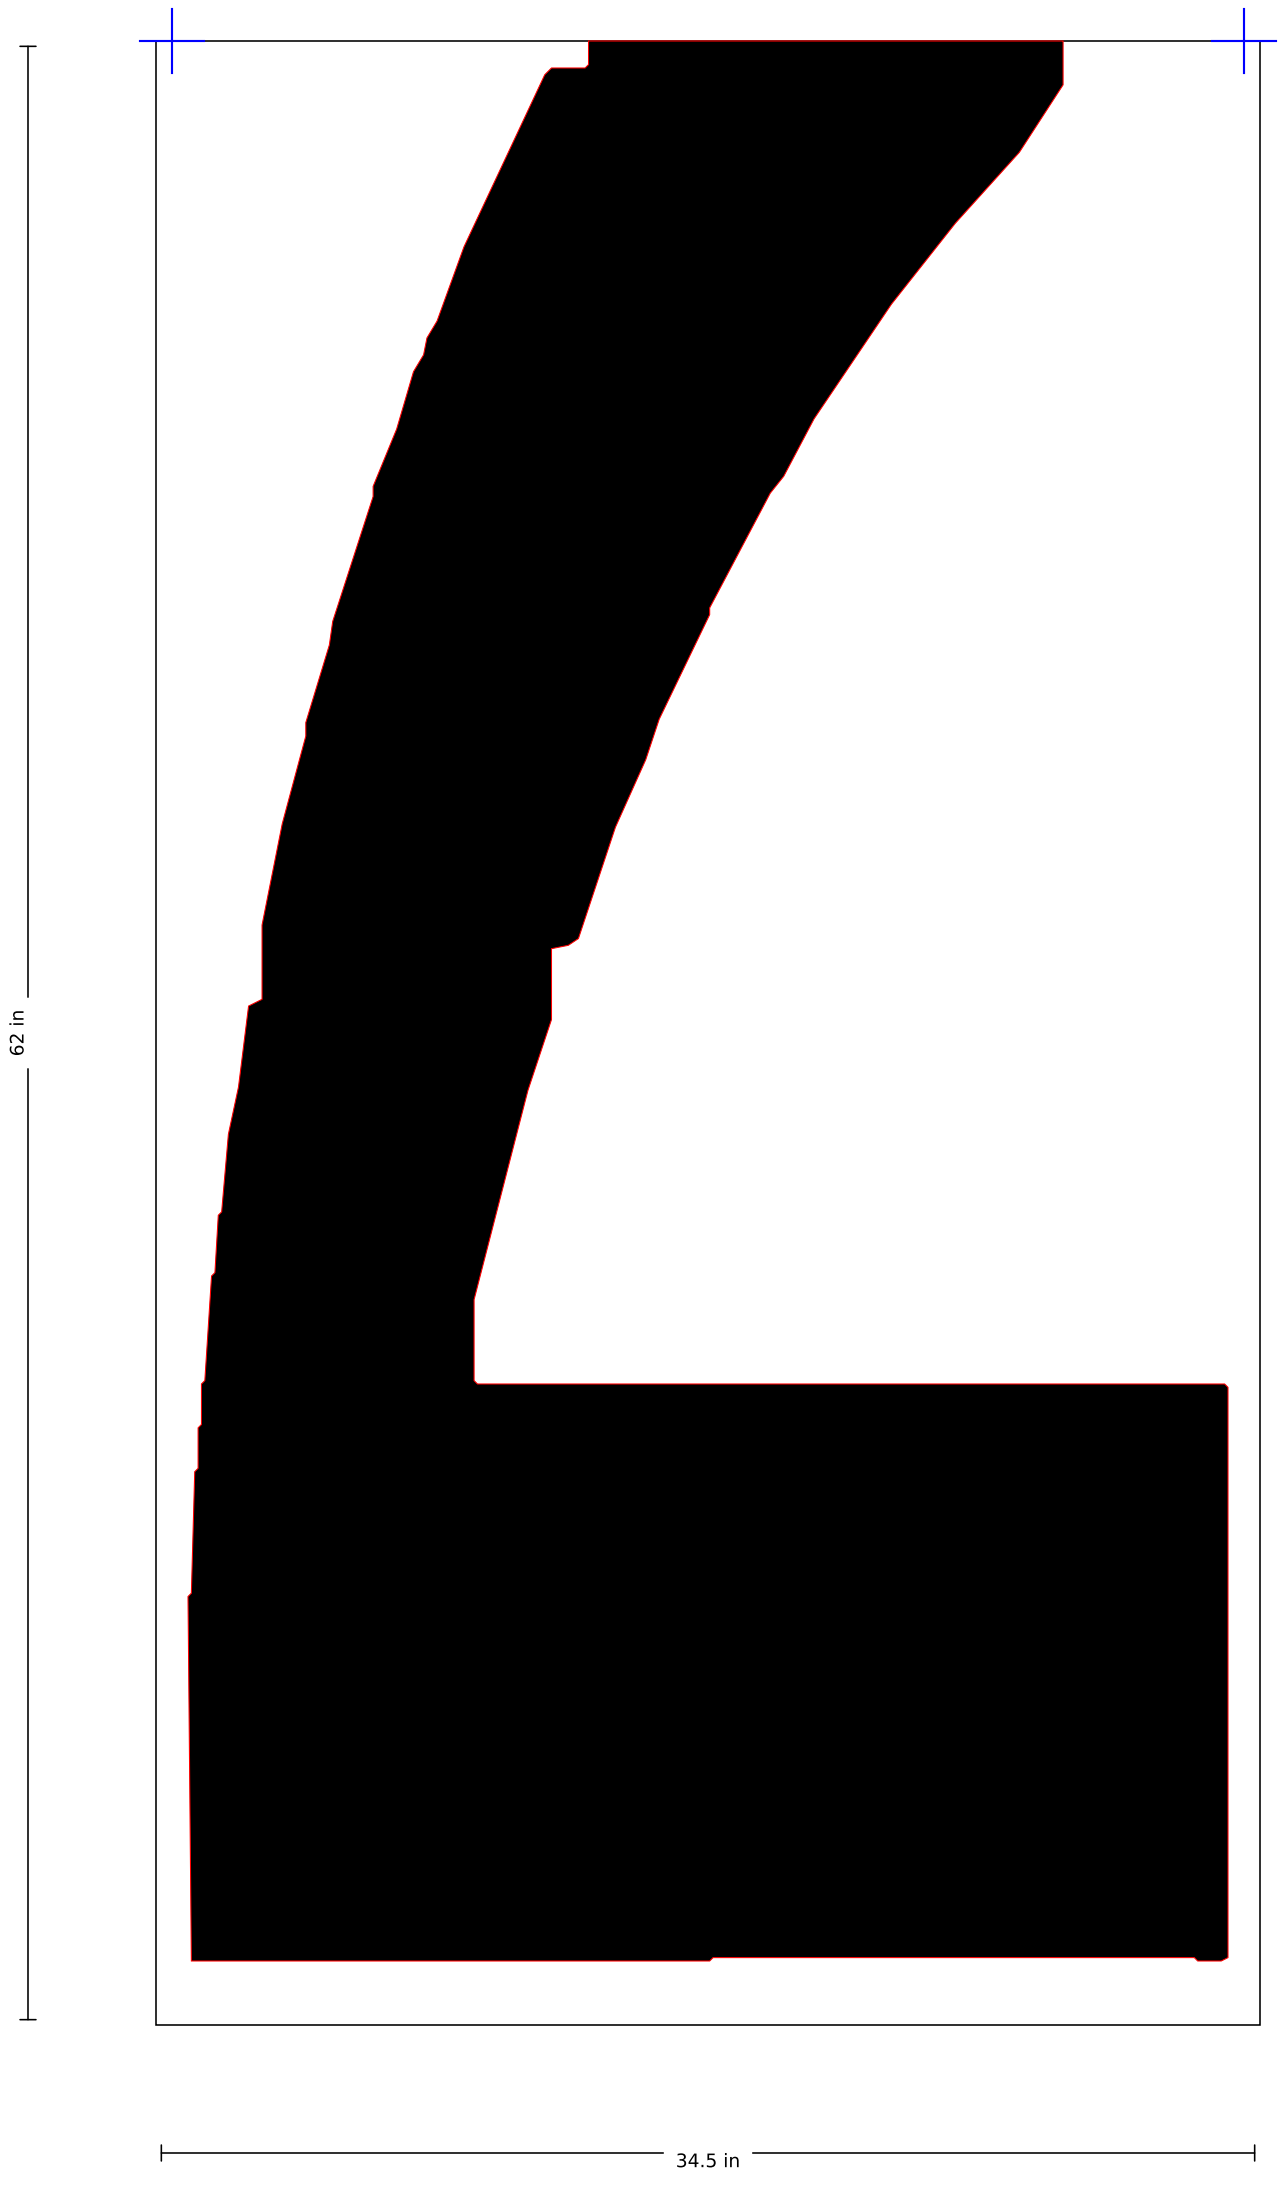

SSS-FAA-120-01-2 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

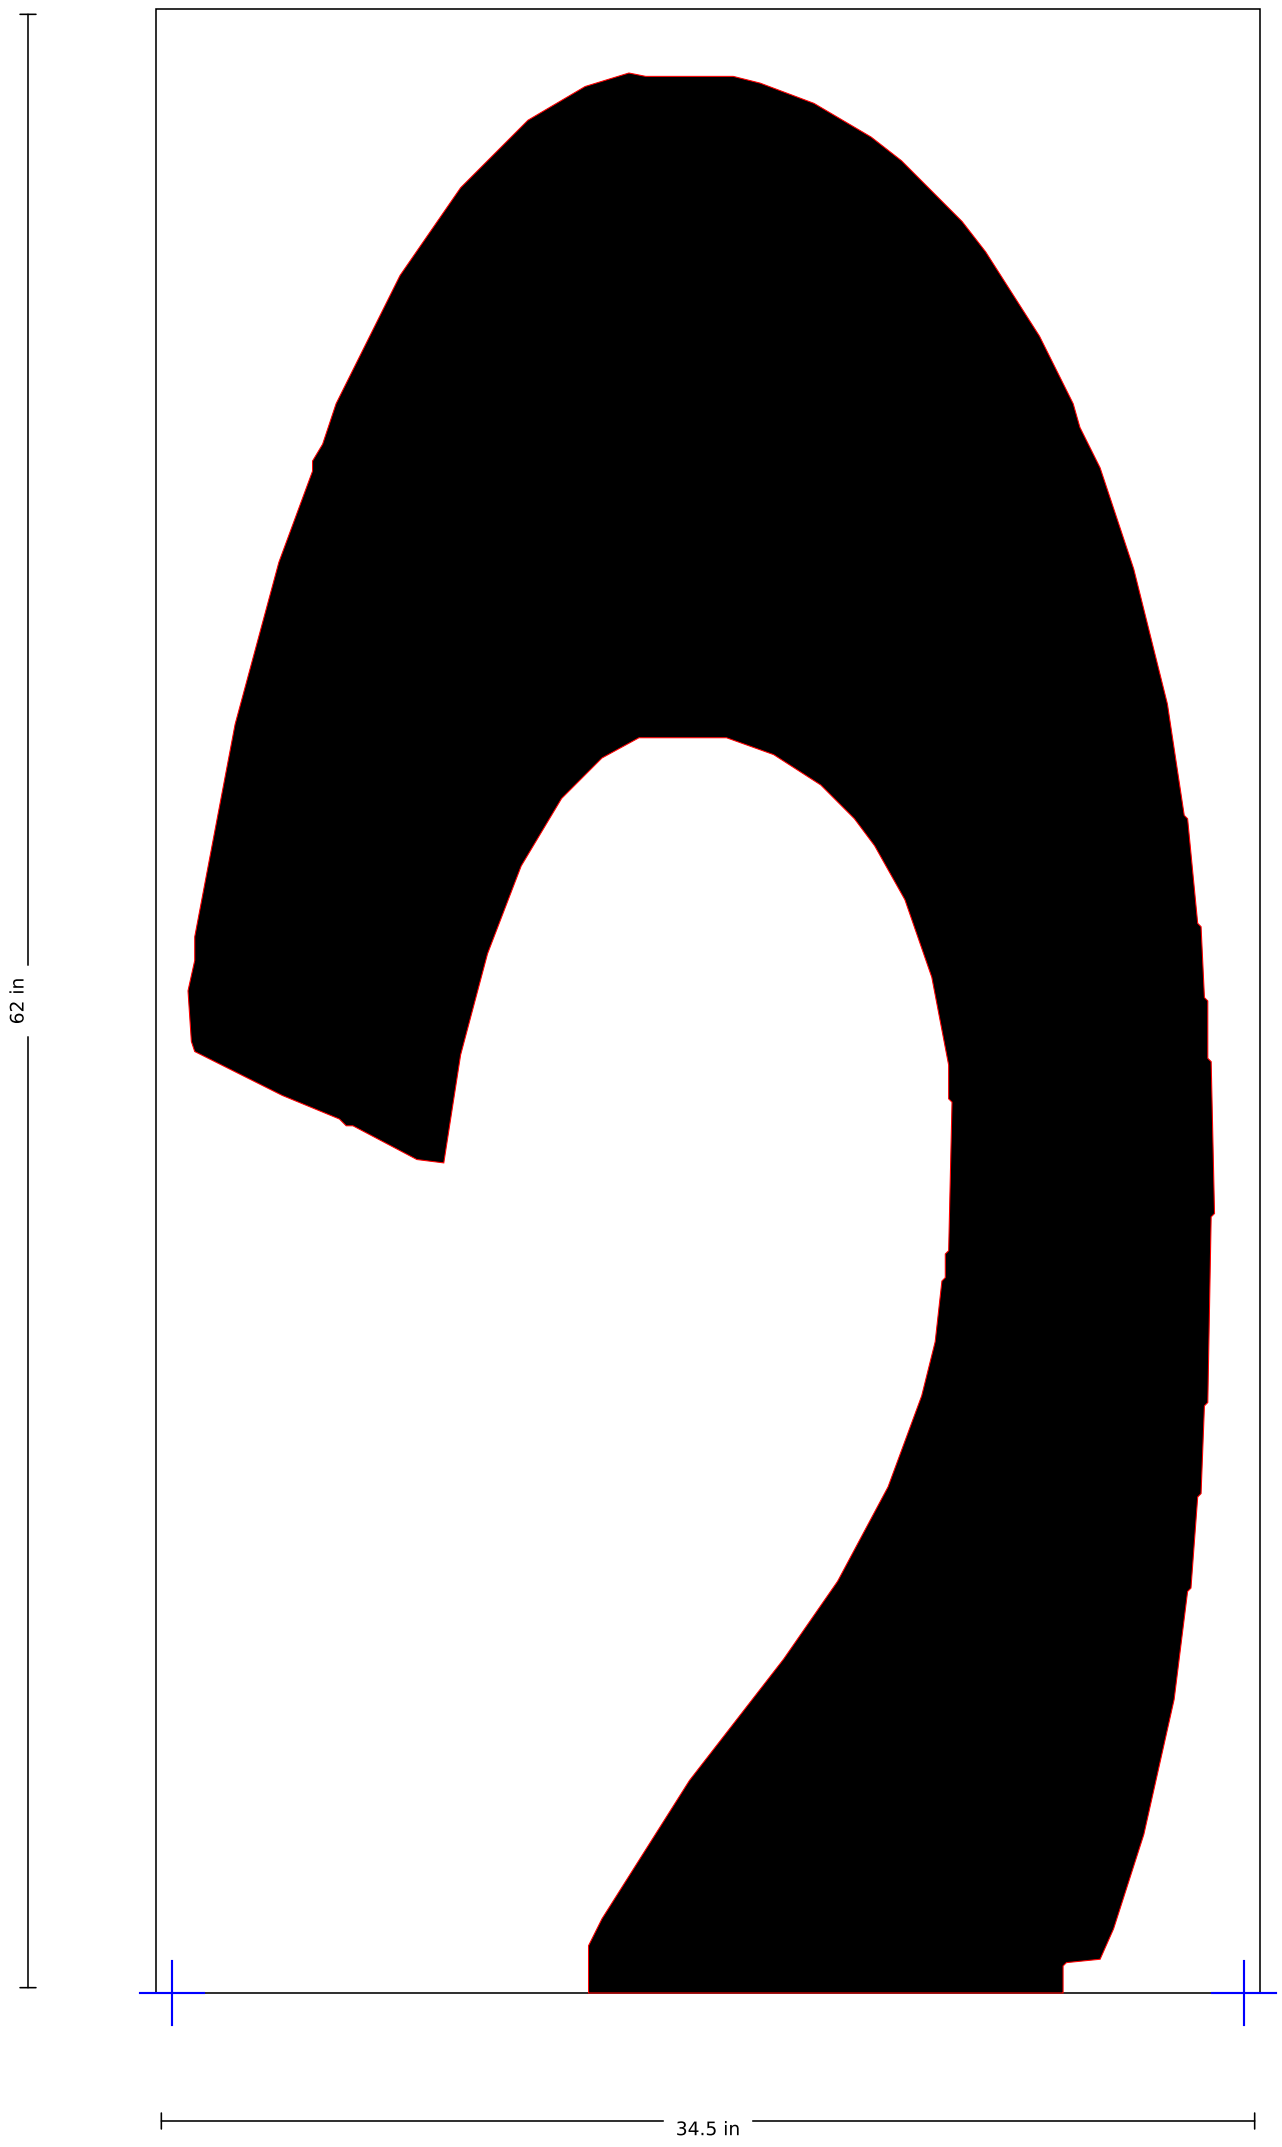

SSS-FAA-120-01-3

120" FAA Airport "3" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

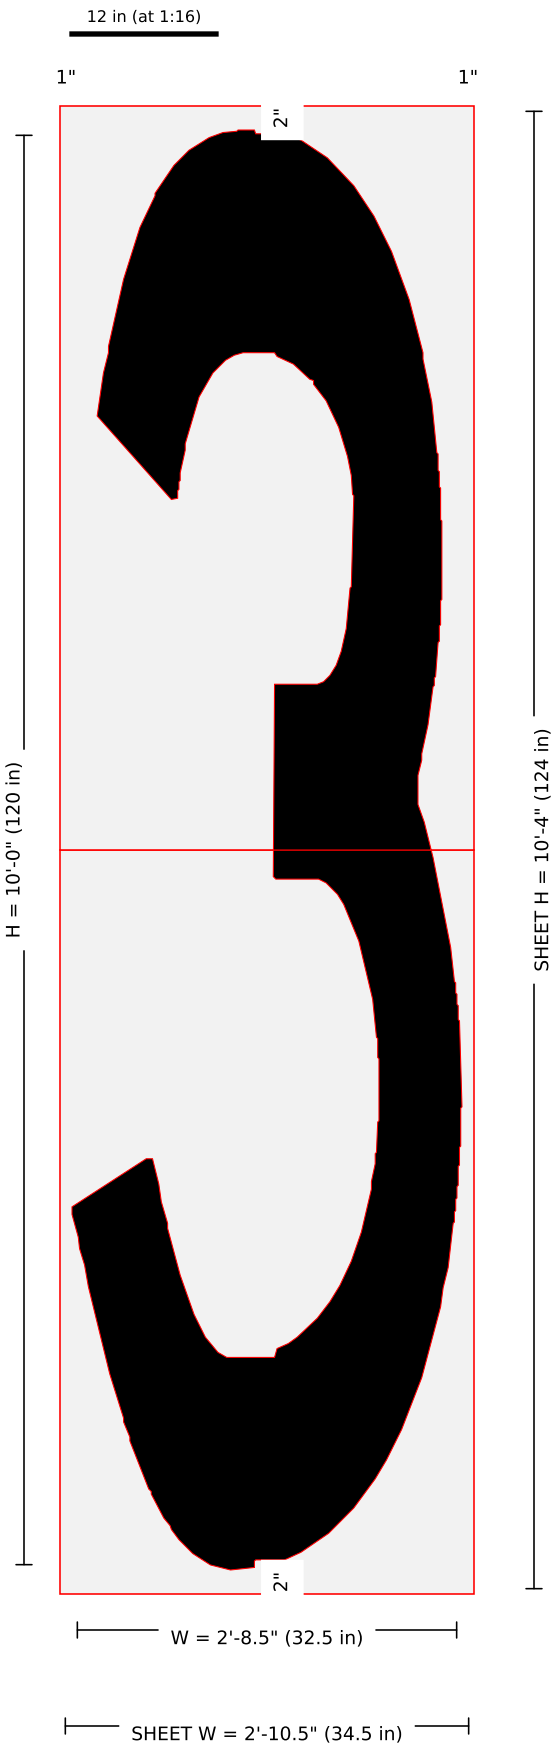

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1203-120in-FAA-Airport-Letter-3-134x48-2.jpg: width 32.5 from image scale (32.69); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-3 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

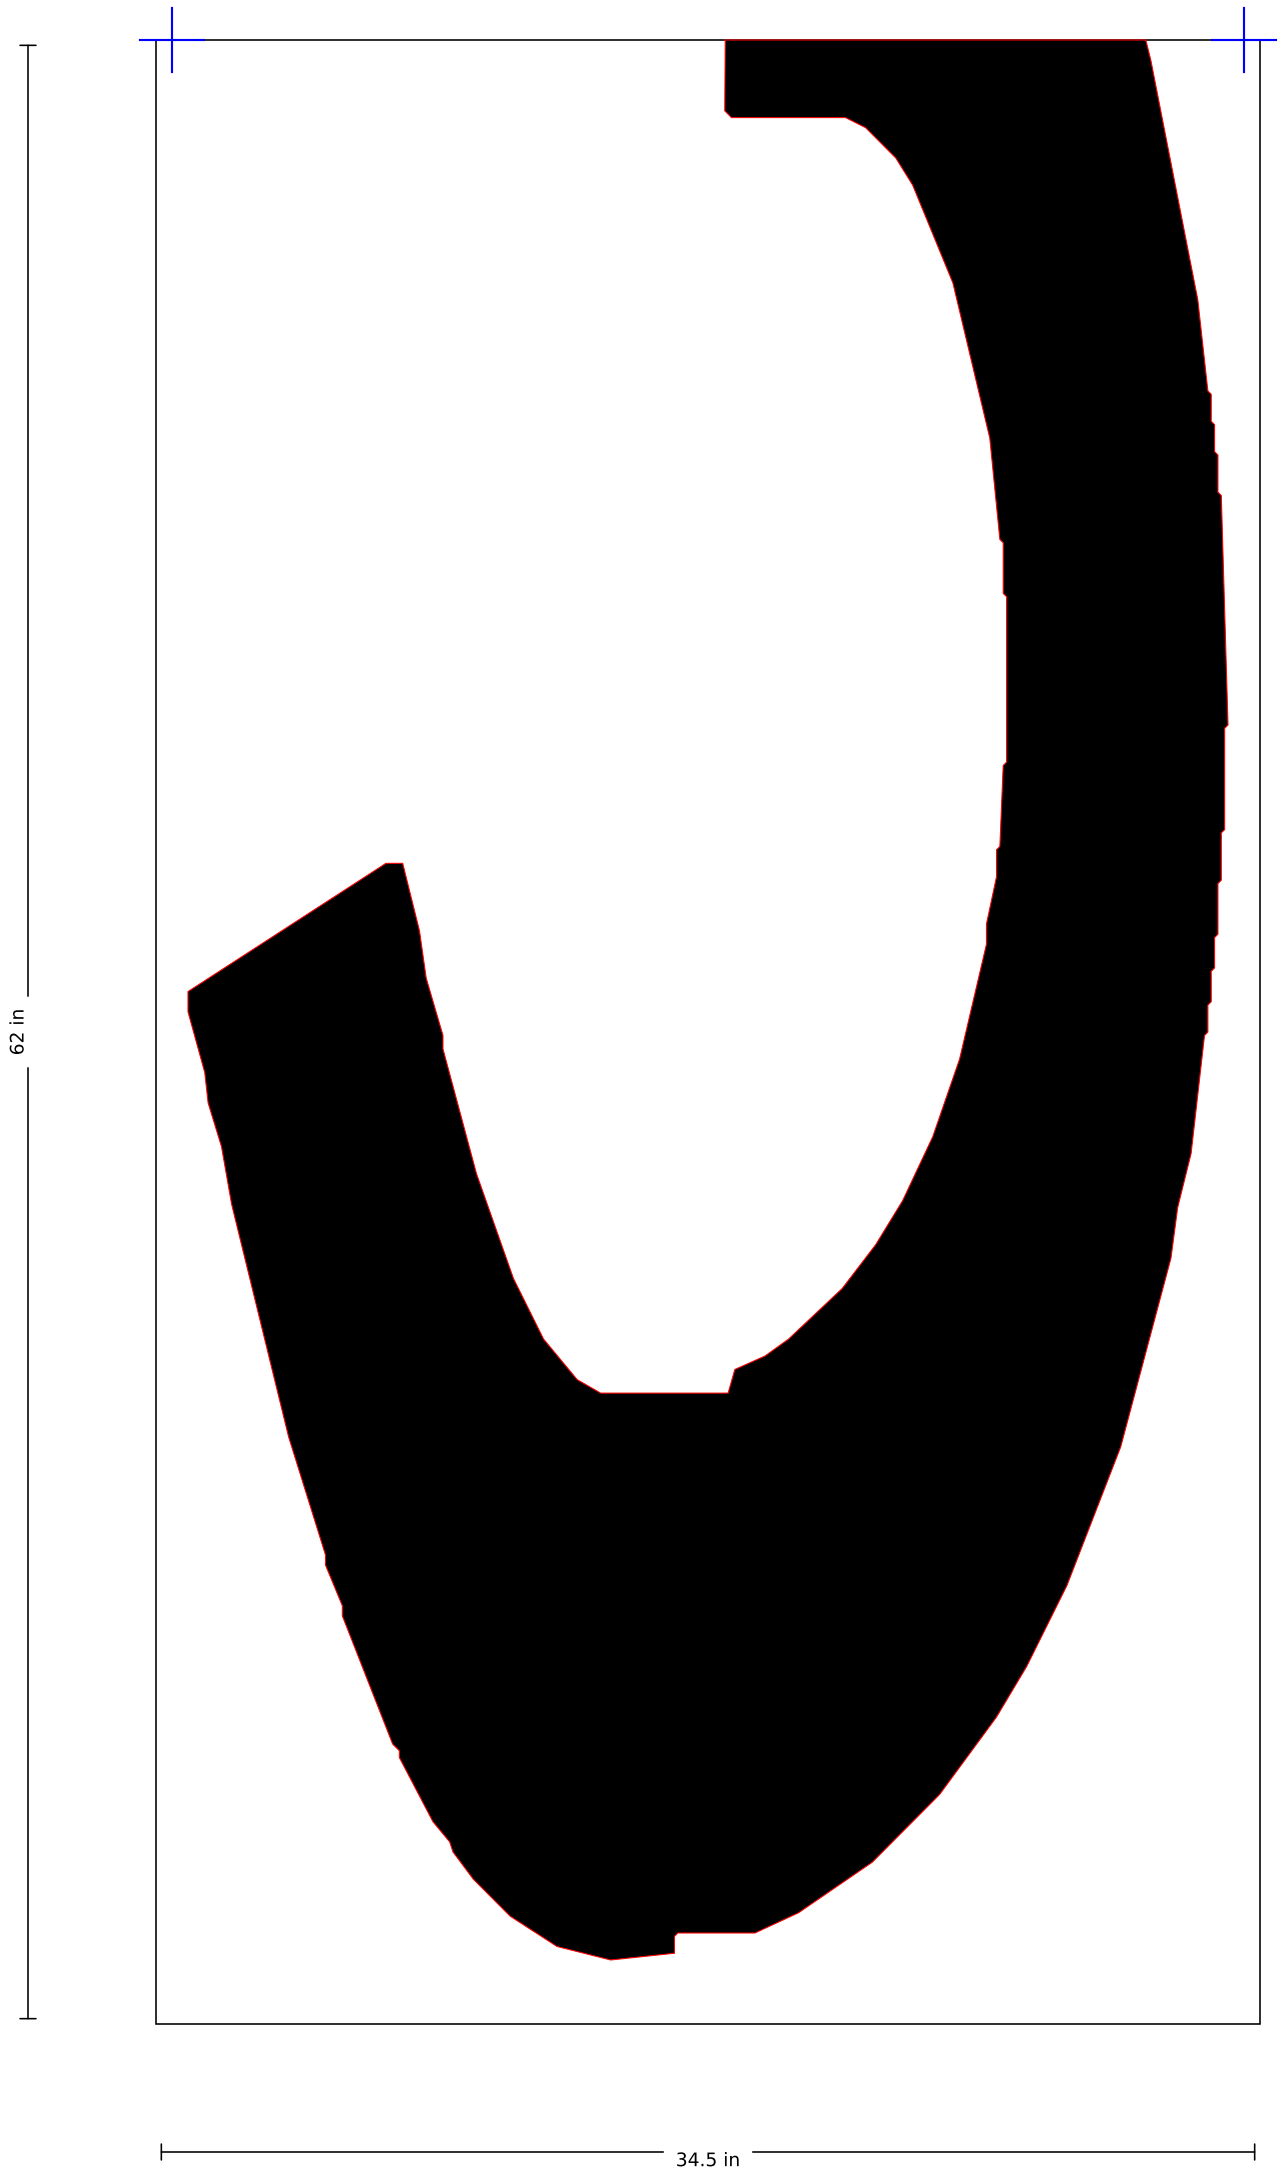

SSS-FAA-120-01-3 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

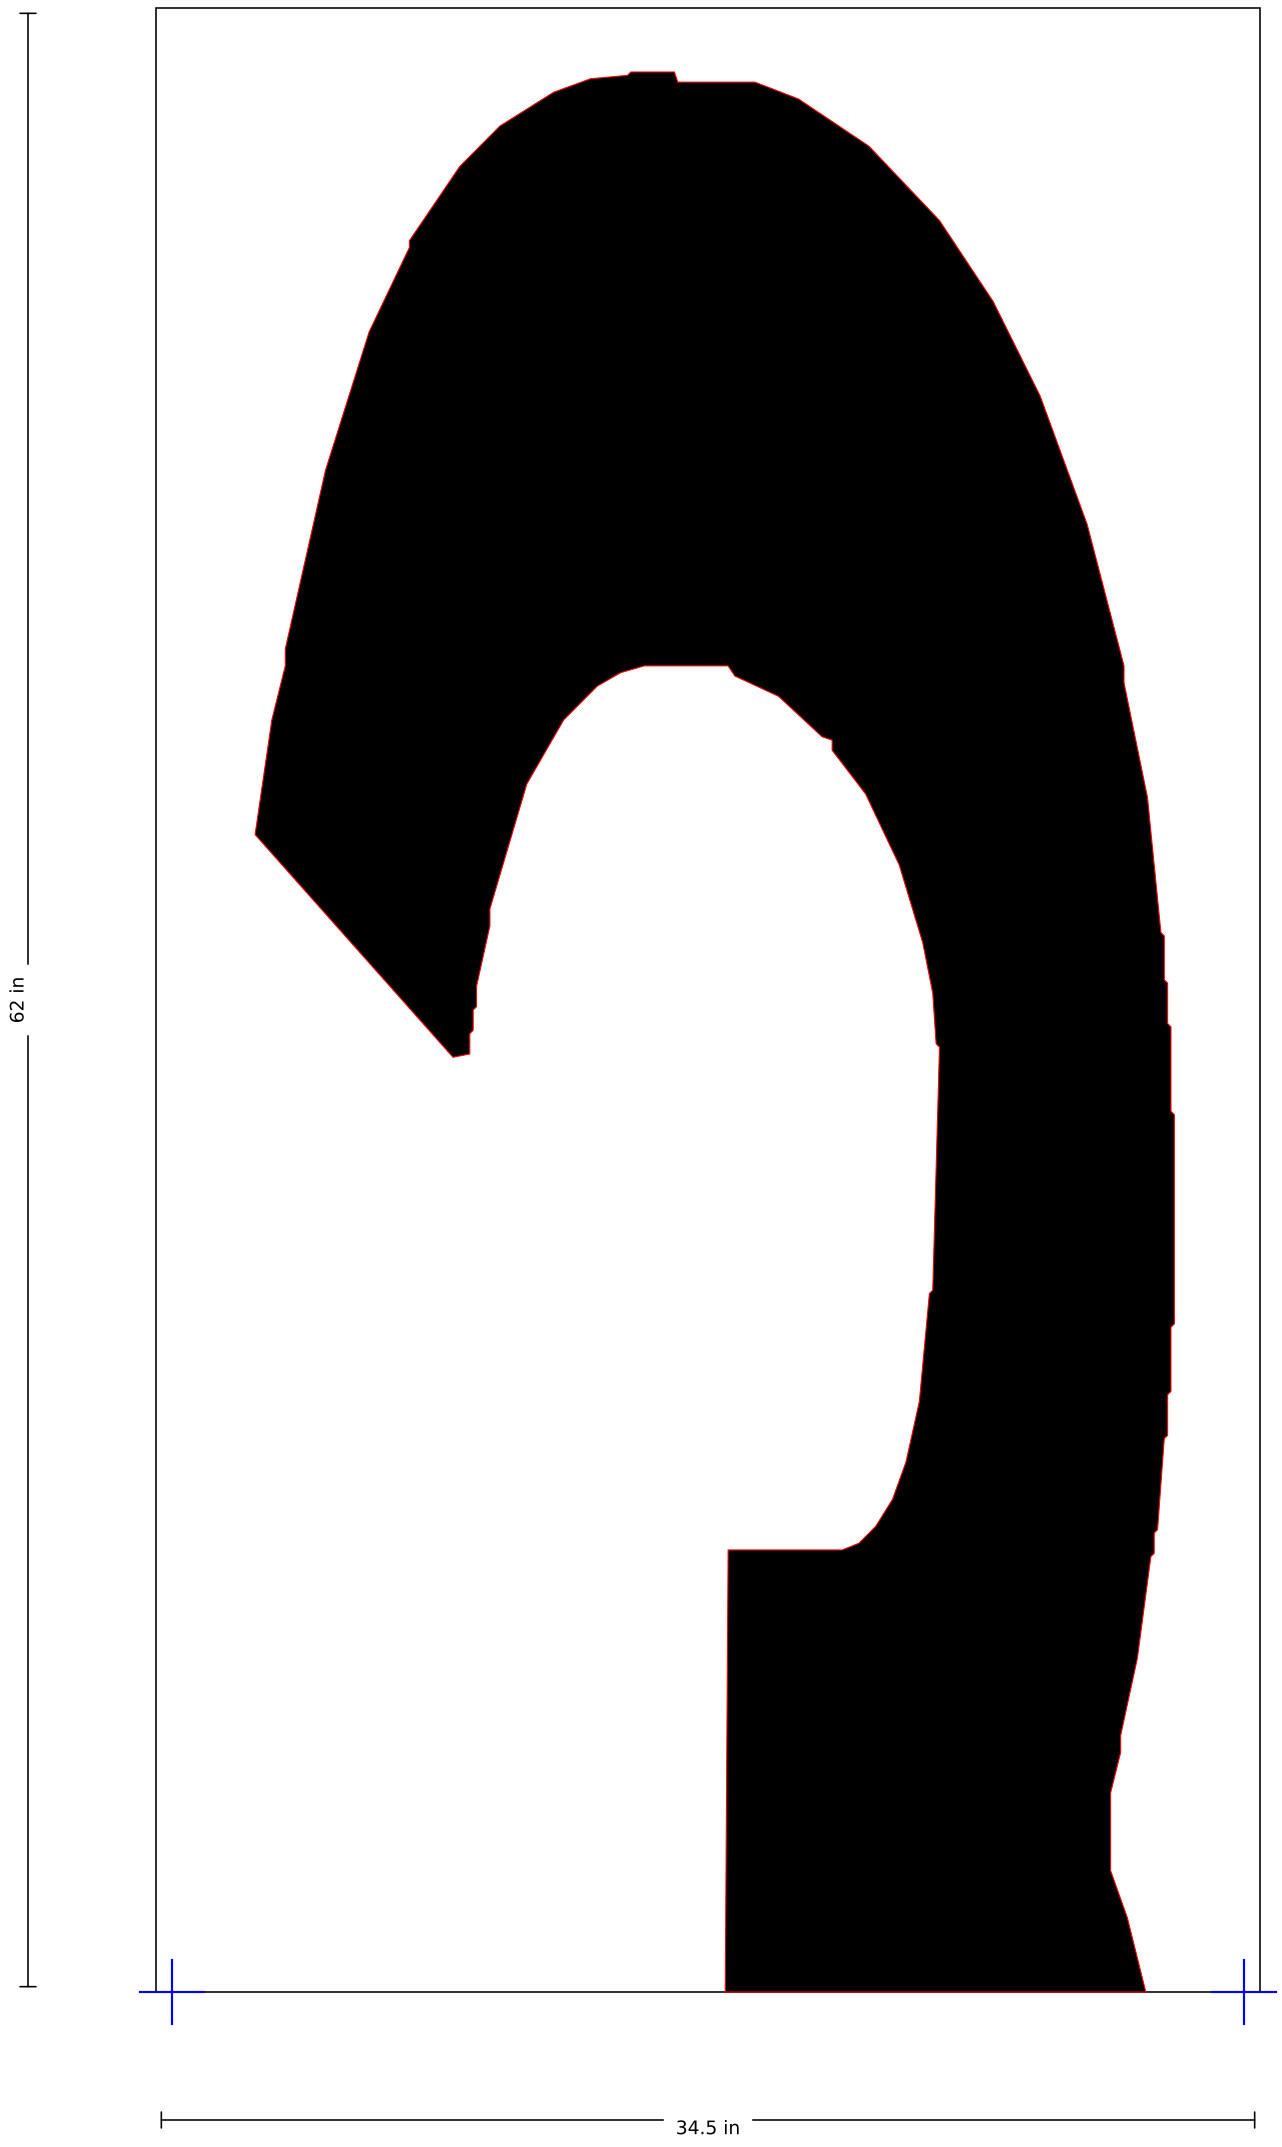

SSS-FAA-120-01-4

120" FAA Airport "4" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

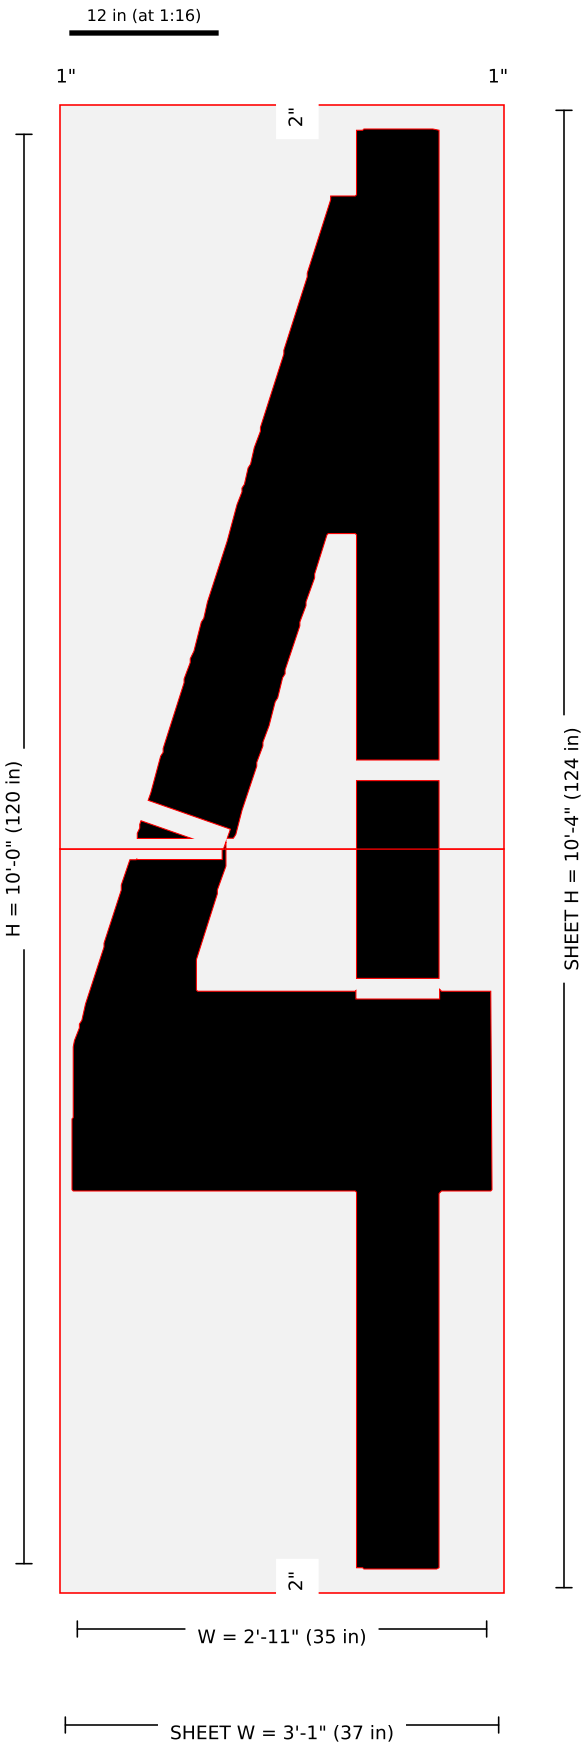

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1204-120in-FAA-Airport-Letter-4-134x48-2.jpg: width = kit listing 35 (image-scale 35.93); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (27.15,66.56) stroke 6.877" w=1.719"; (9.45,62.01) stroke 7.214" w=1.804" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 2 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-4 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

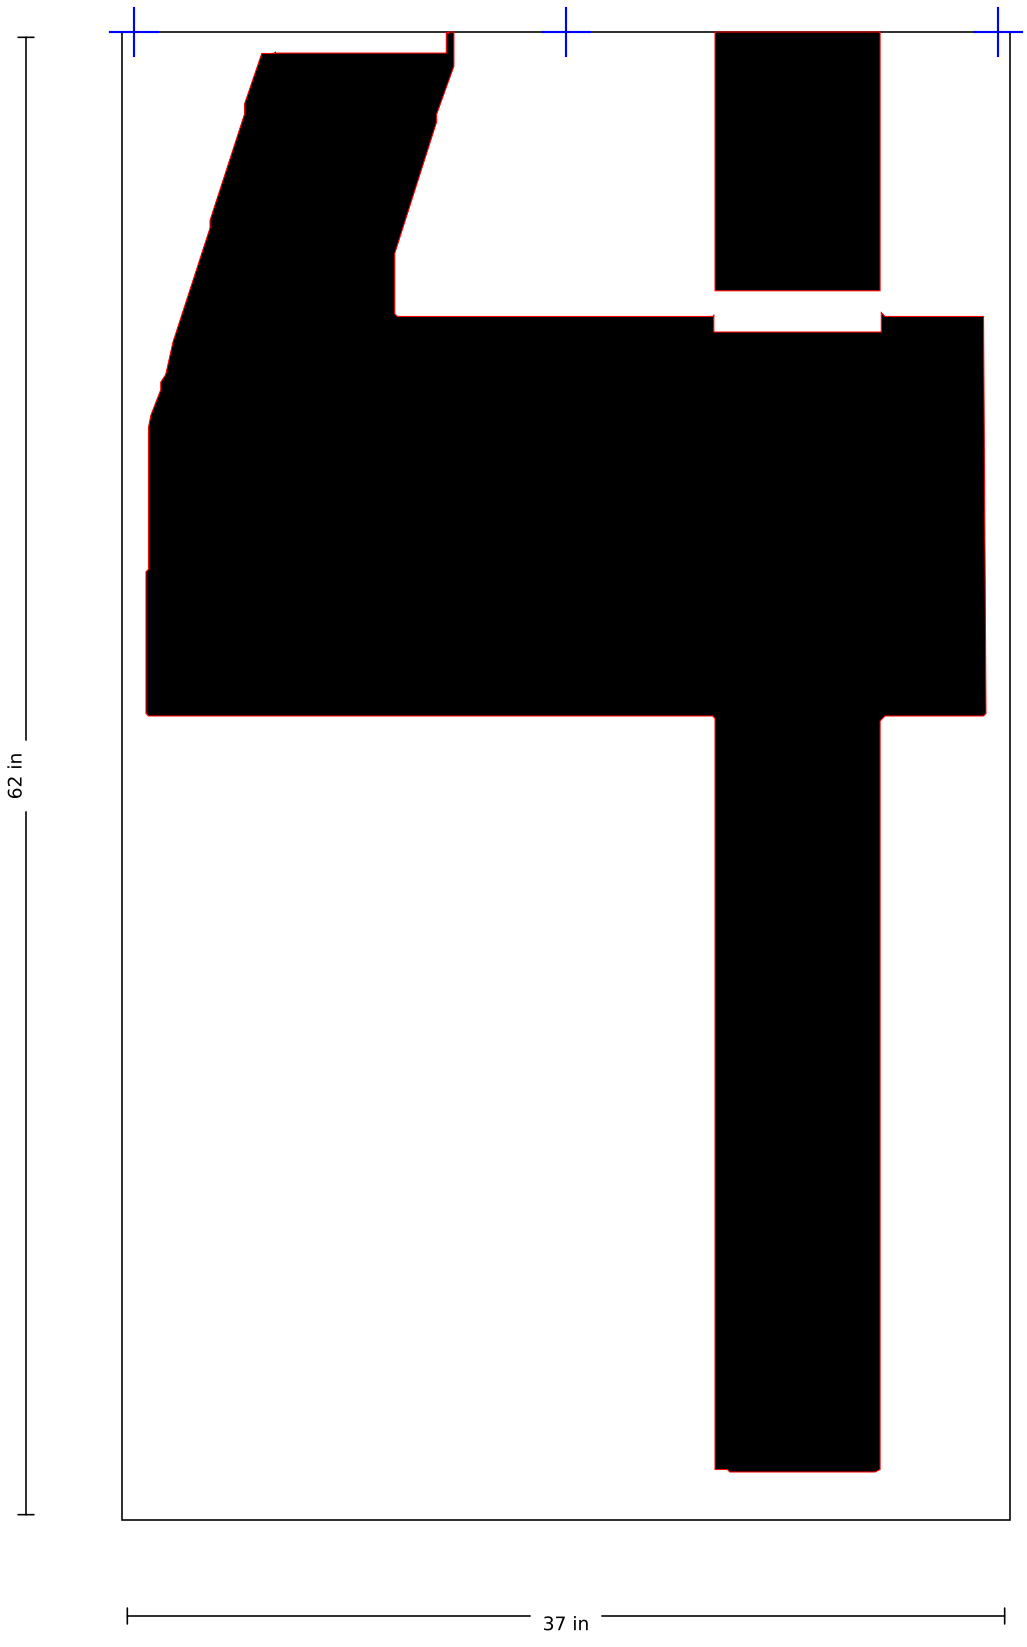

SSS-FAA-120-01-4 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

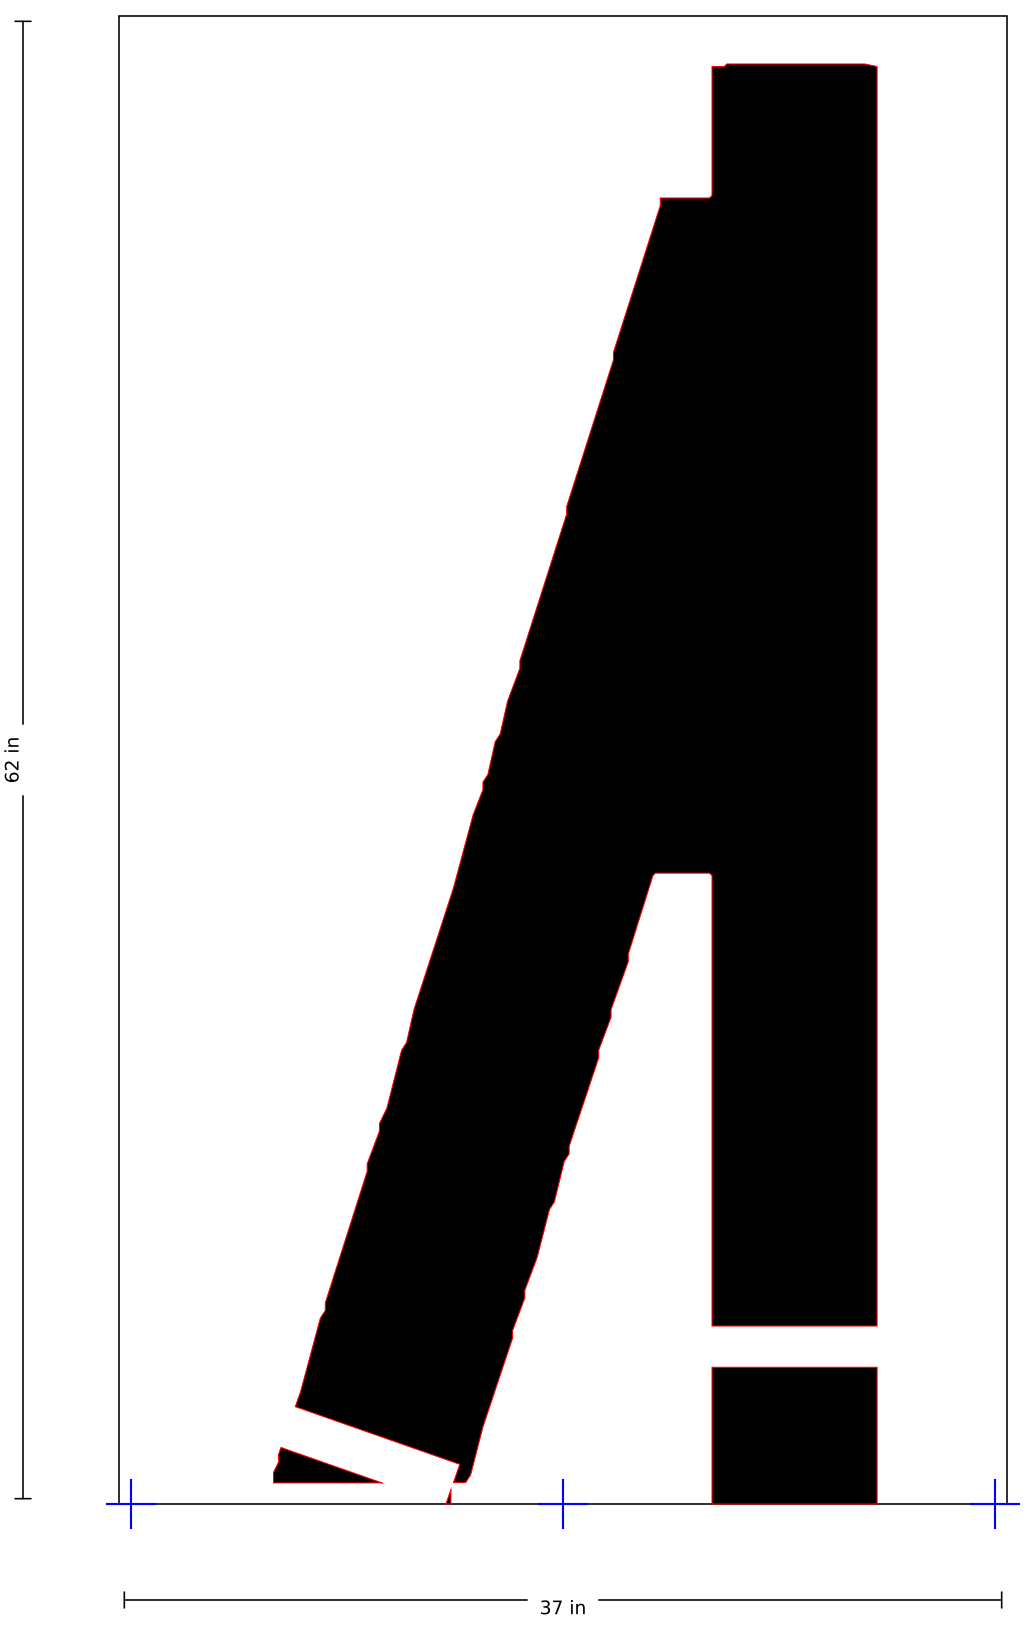

SSS-FAA-120-01-5

120" FAA Airport "5" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

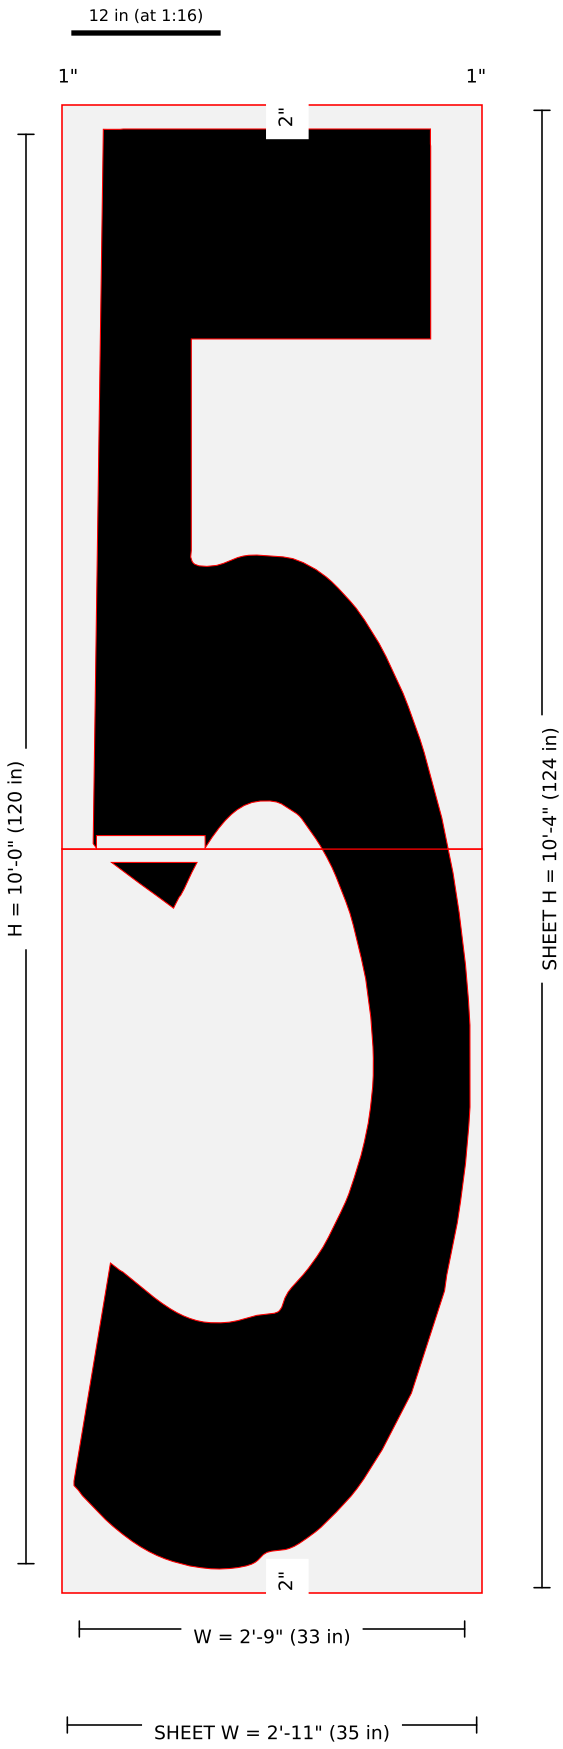

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1205-120in-FAA-Airport-Letter-5-134x48-2.jpg: width 33 from image scale (32.77); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-5 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

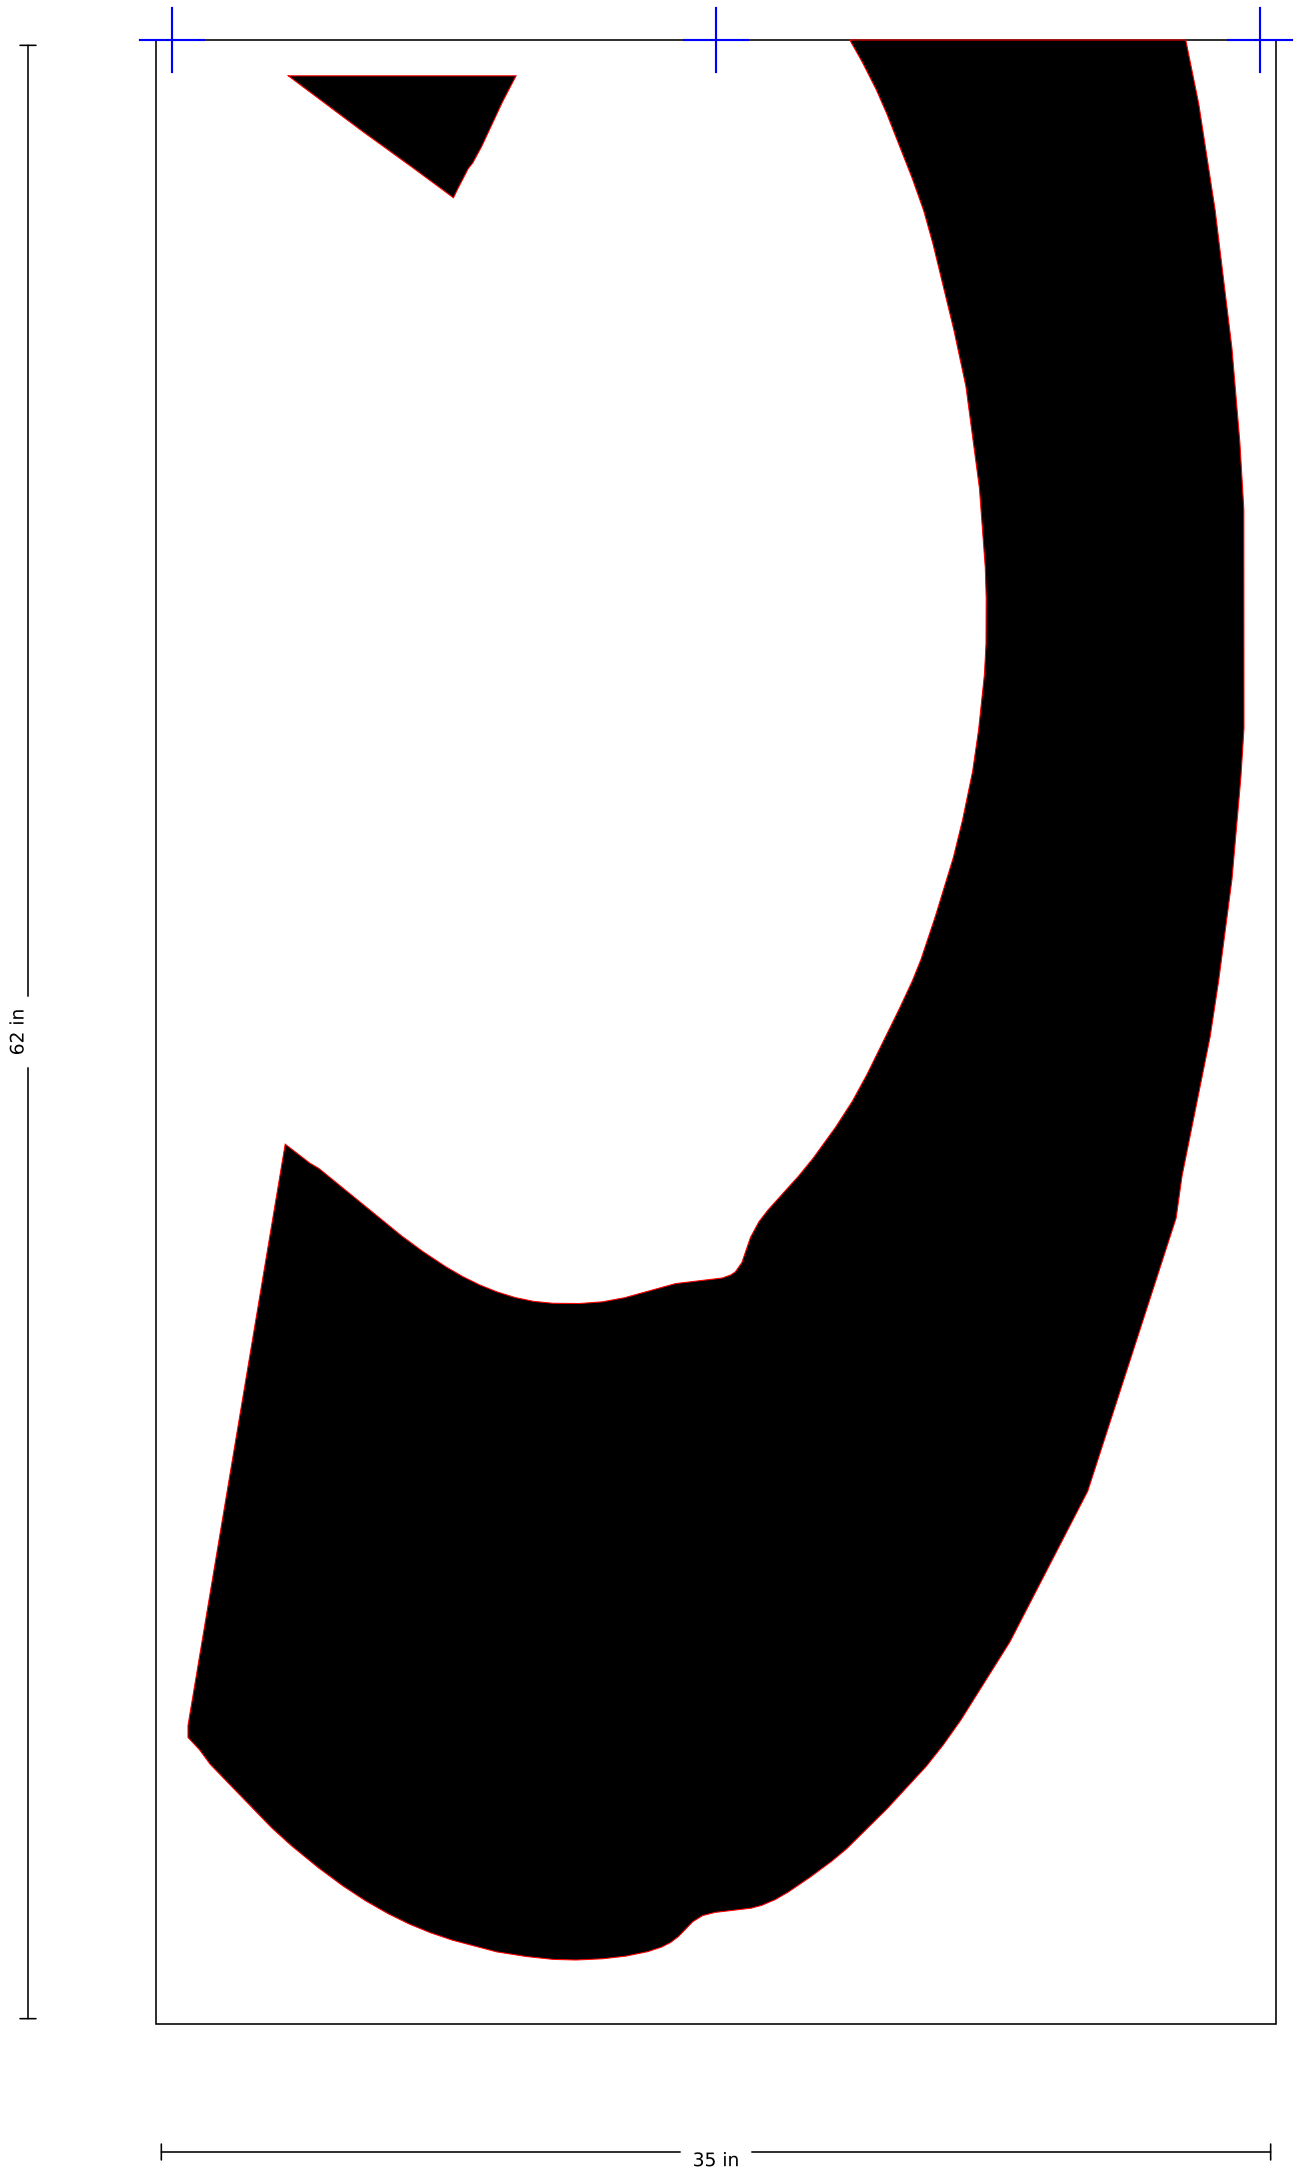

SSS-FAA-120-01-5 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

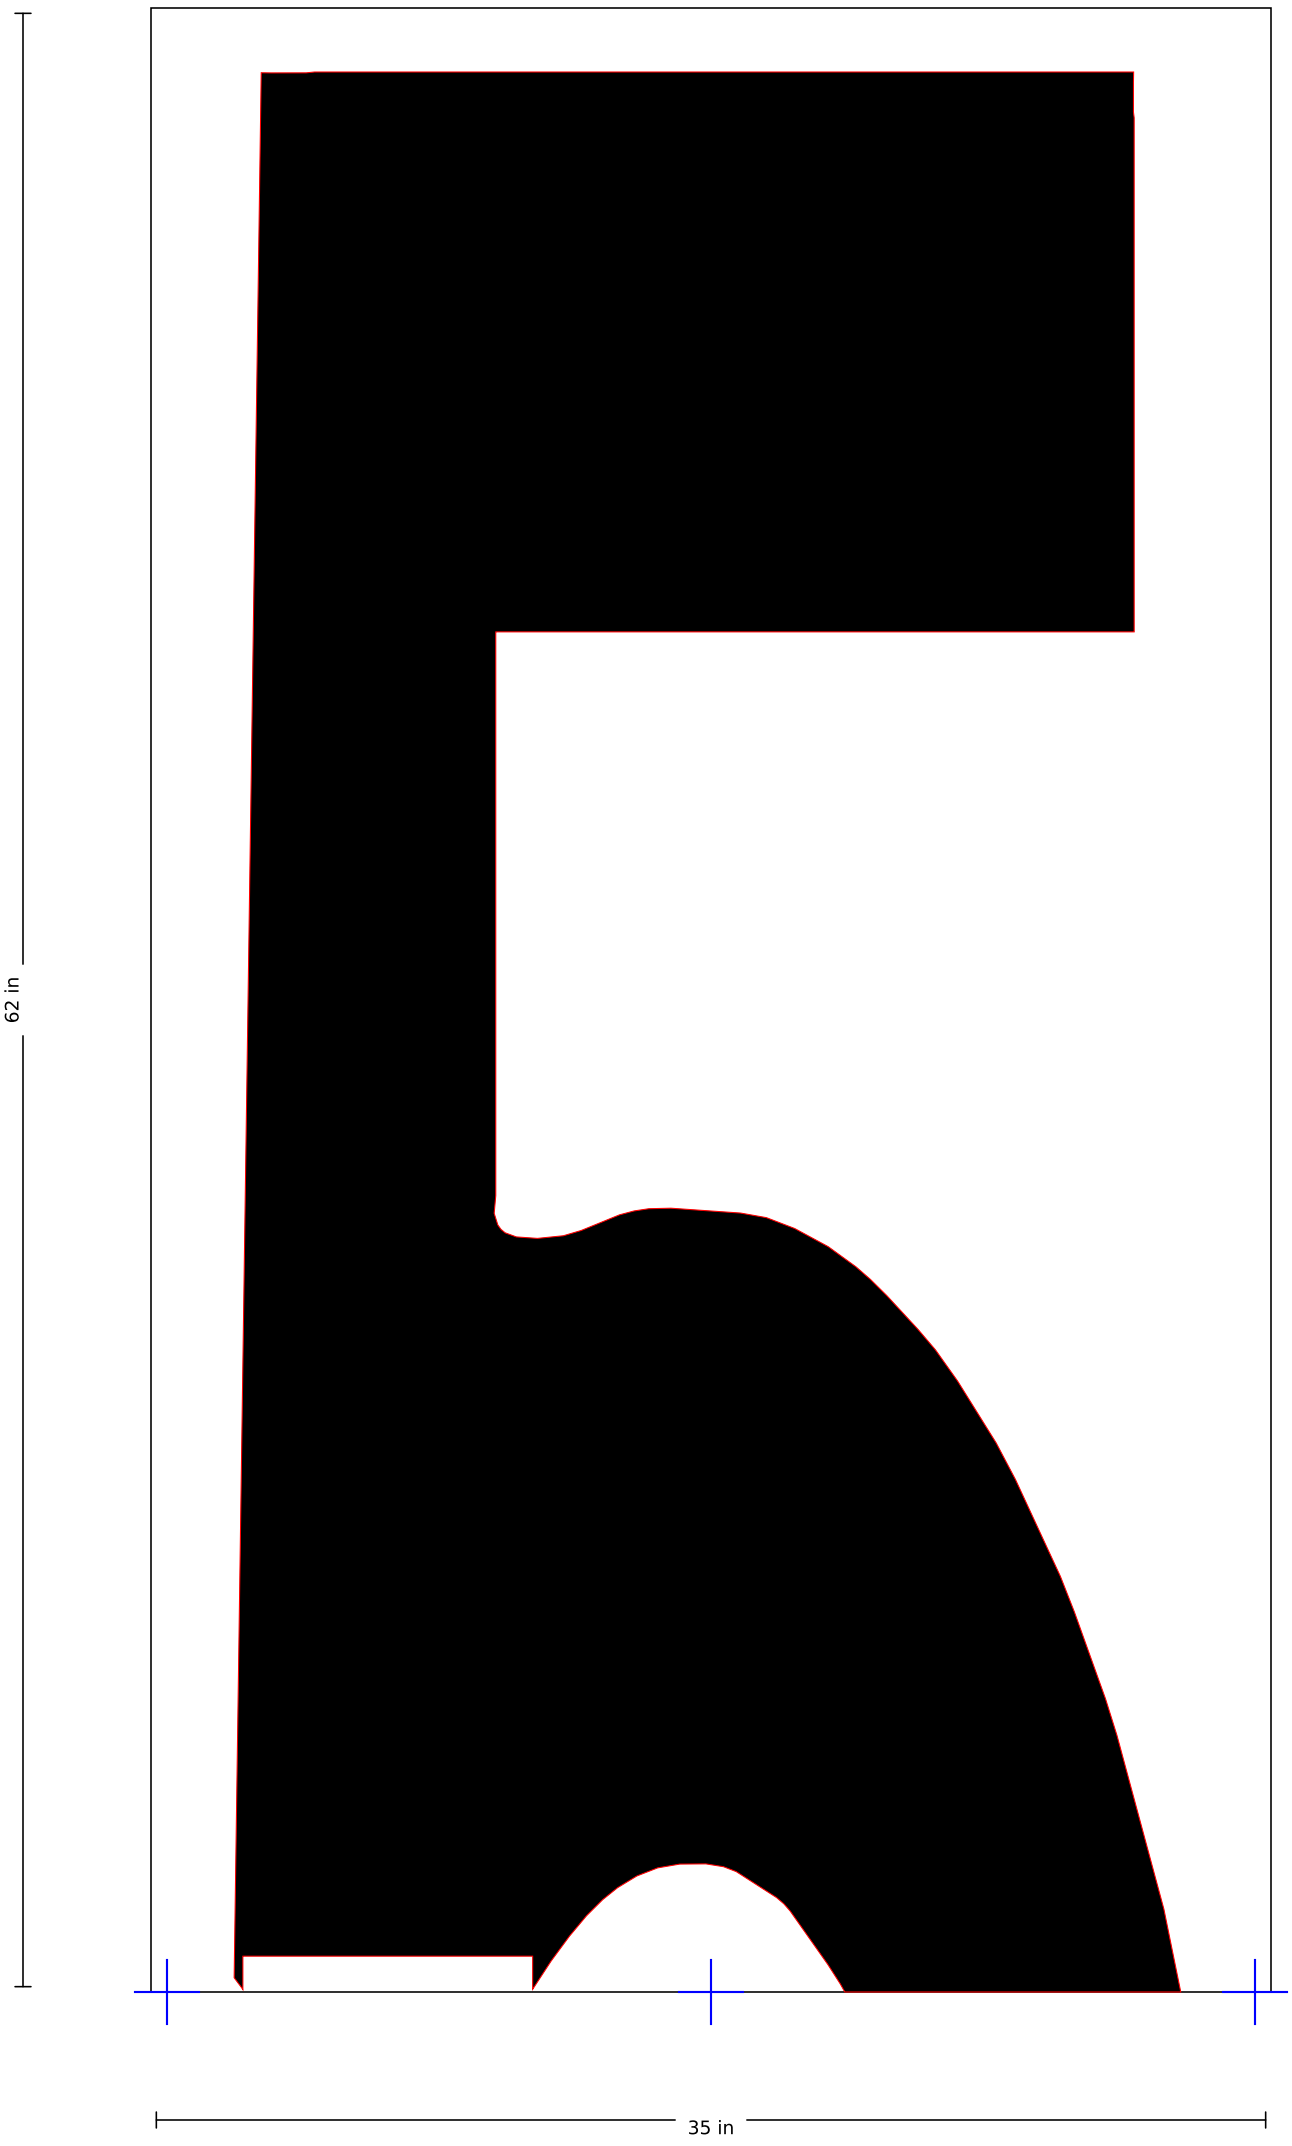

SSS-FAA-120-01-6

120" FAA Airport "6" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

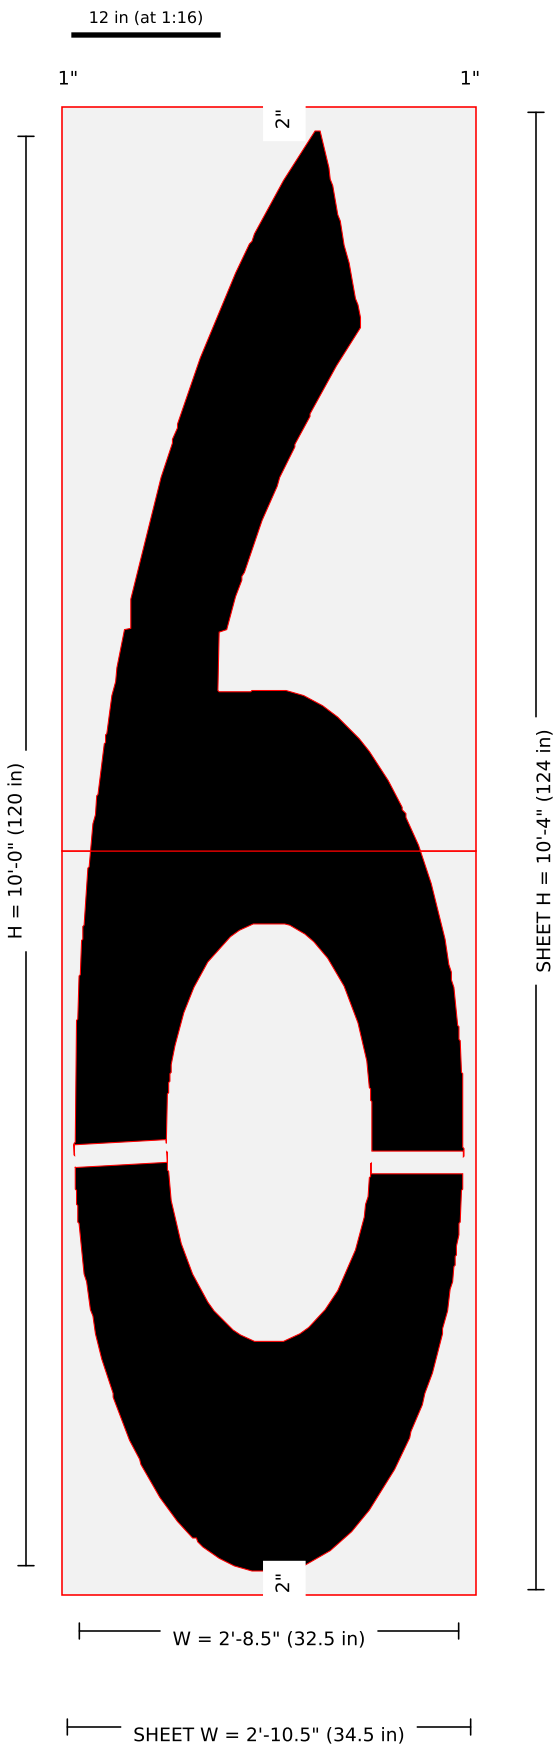

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1206-120in-FAA-Airport-Letter-6-134x48-2.jpg: width 32.5 from image scale (32.67); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (28.61,34.05) stroke 7.573" w=1.893"; (3.89,34.79) stroke 7.585" w=1.896" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-6 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

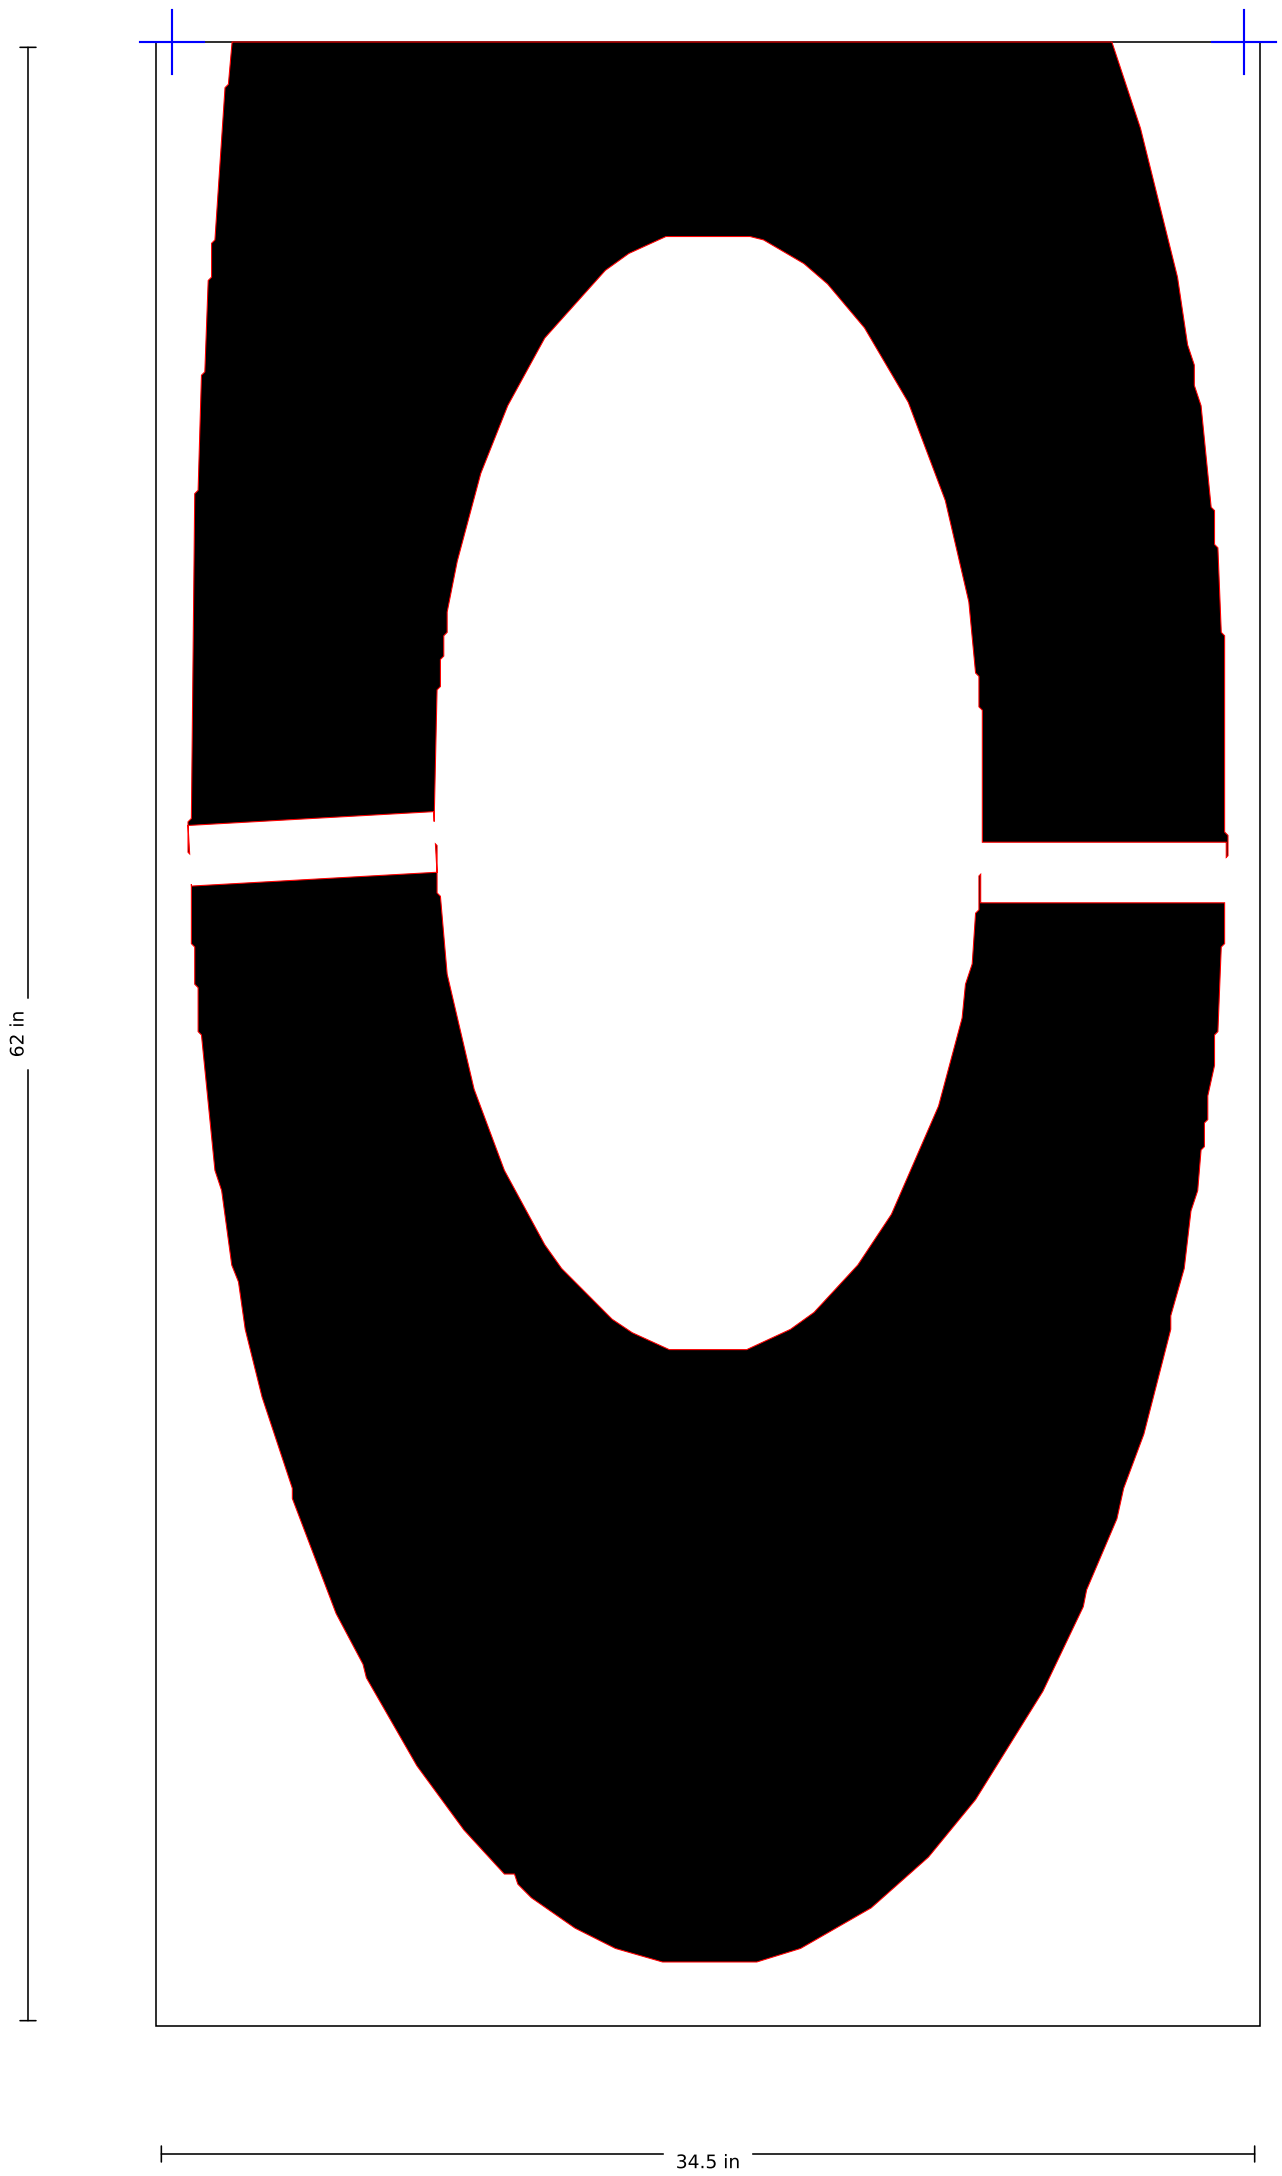

SSS-FAA-120-01-6 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

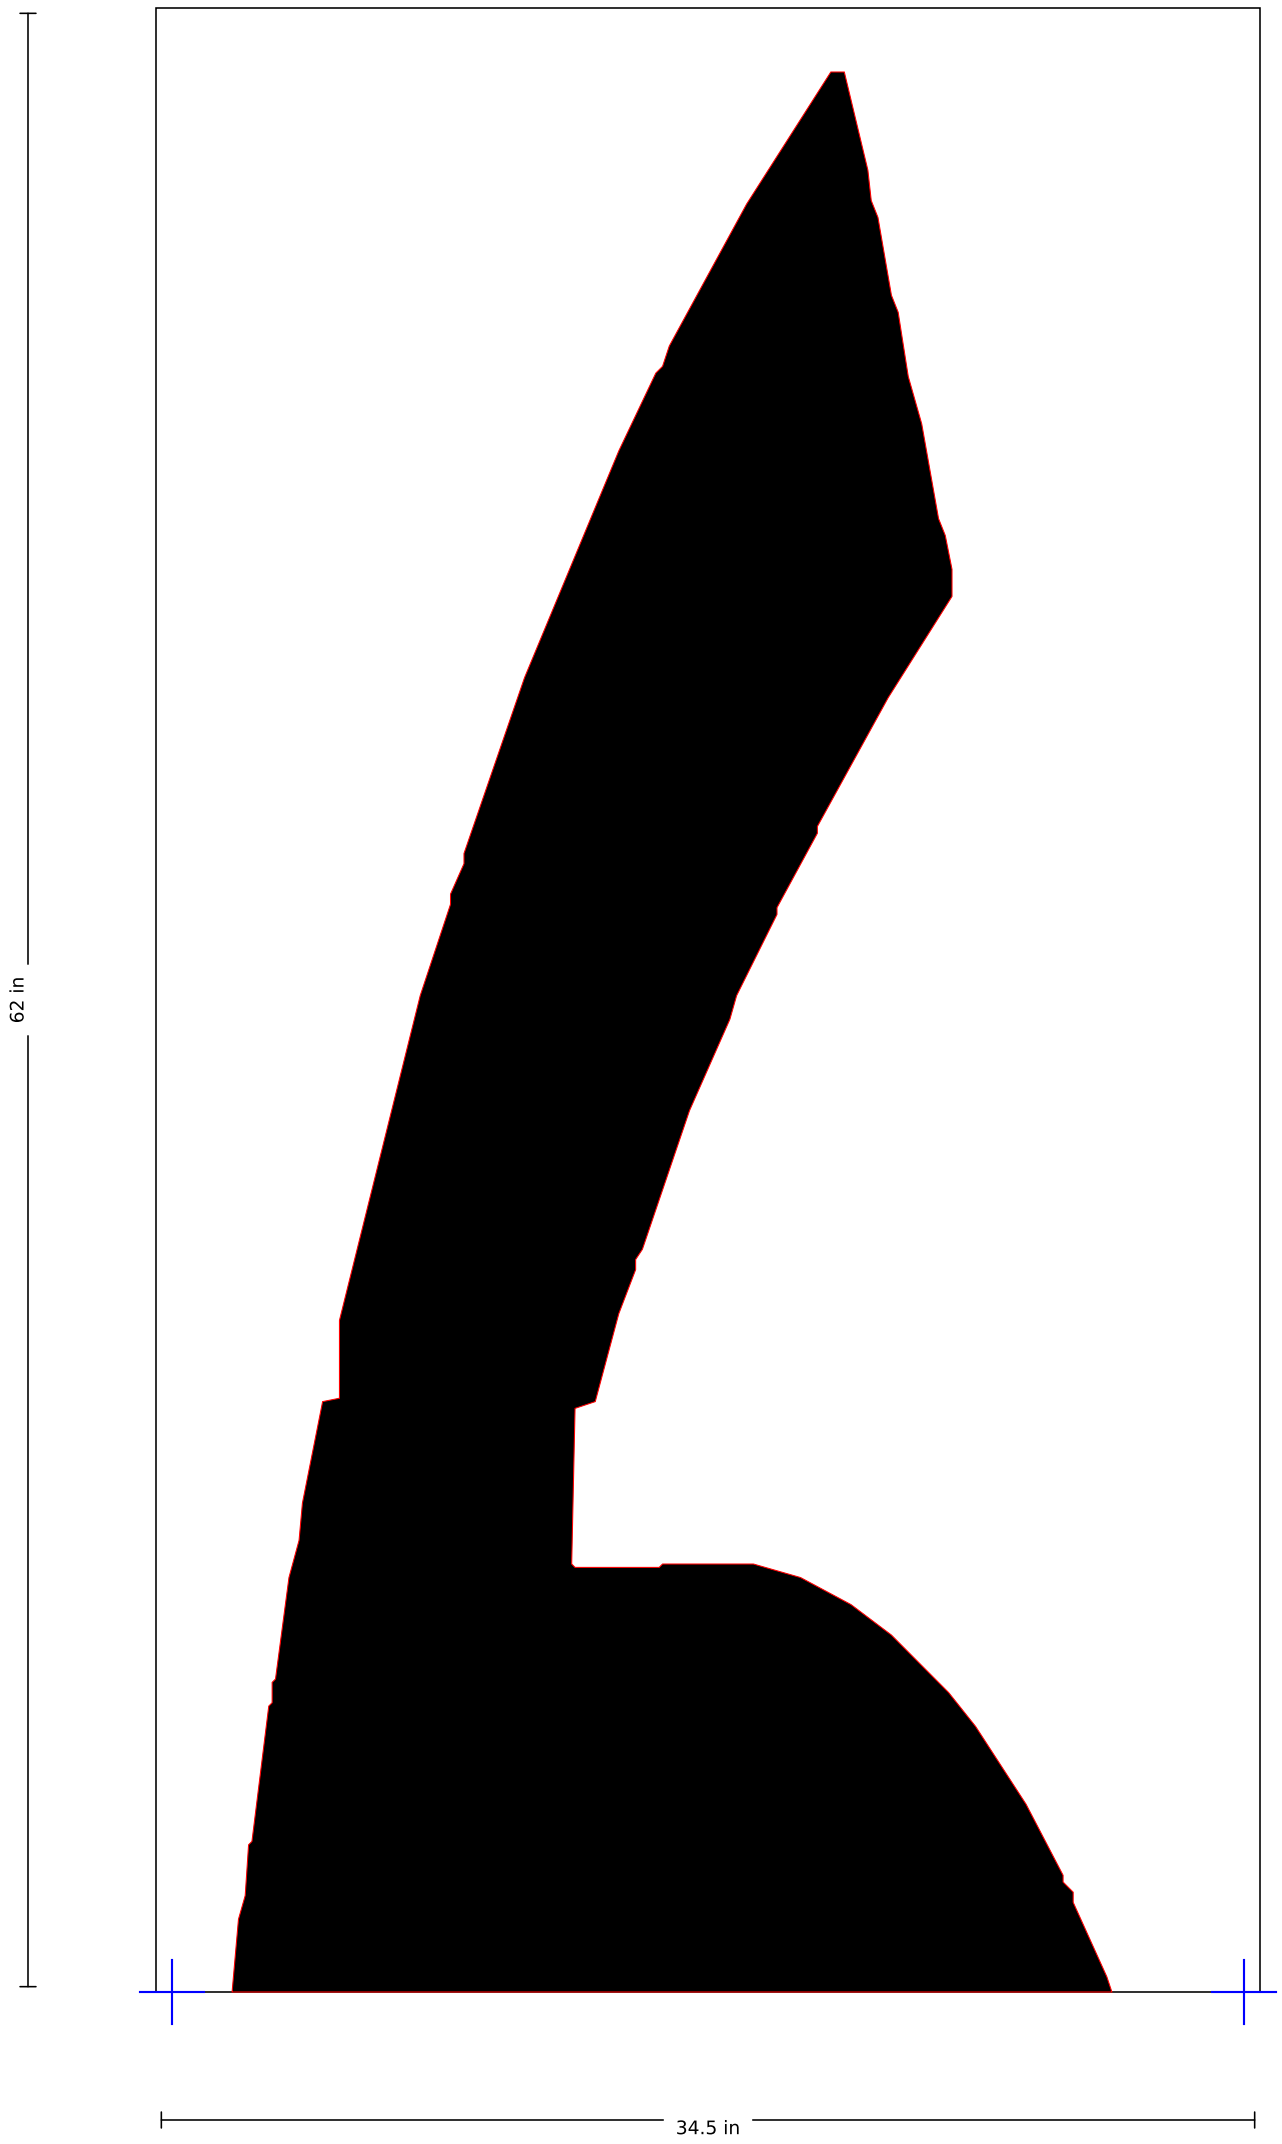

SSS-FAA-120-01-7

120" FAA Airport "7" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

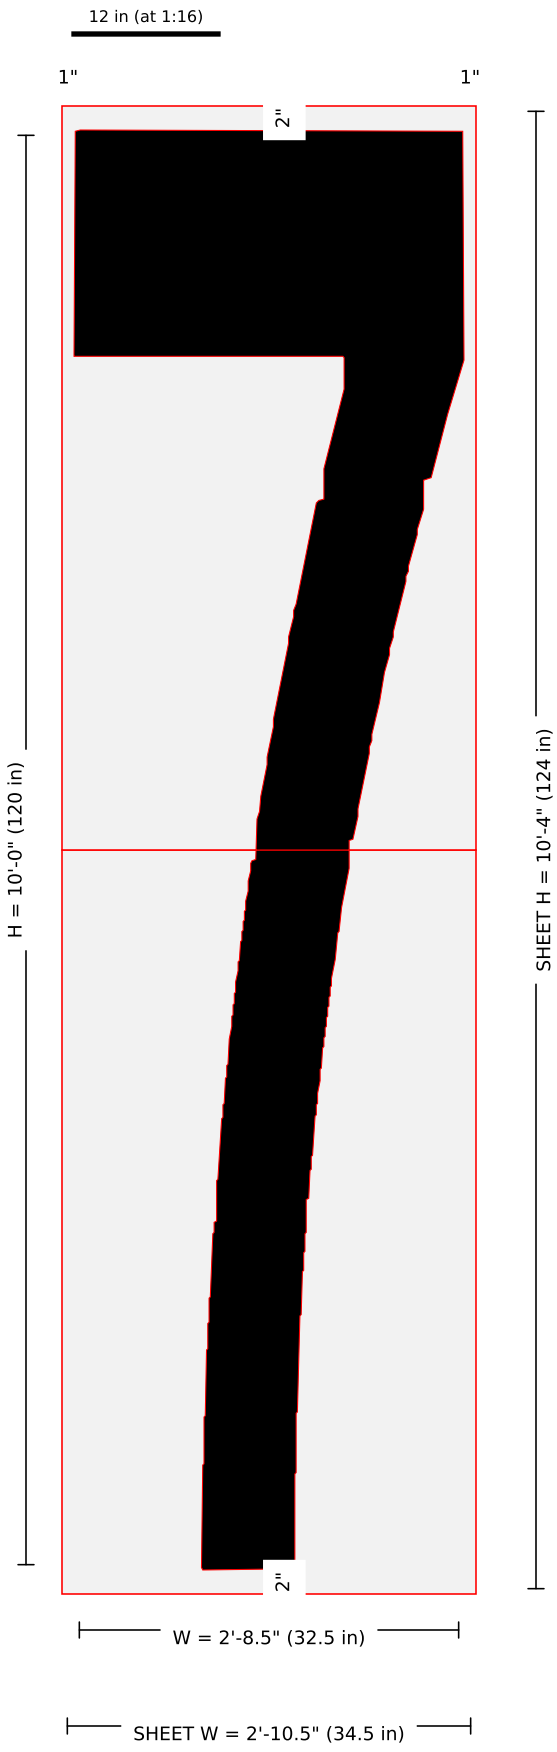

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1207-120in-FAA-Airport-Letter-7-134x48-2.jpg: width 32.5 from image scale (32.55); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-7 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams



SSS-FAA-120-01-7 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

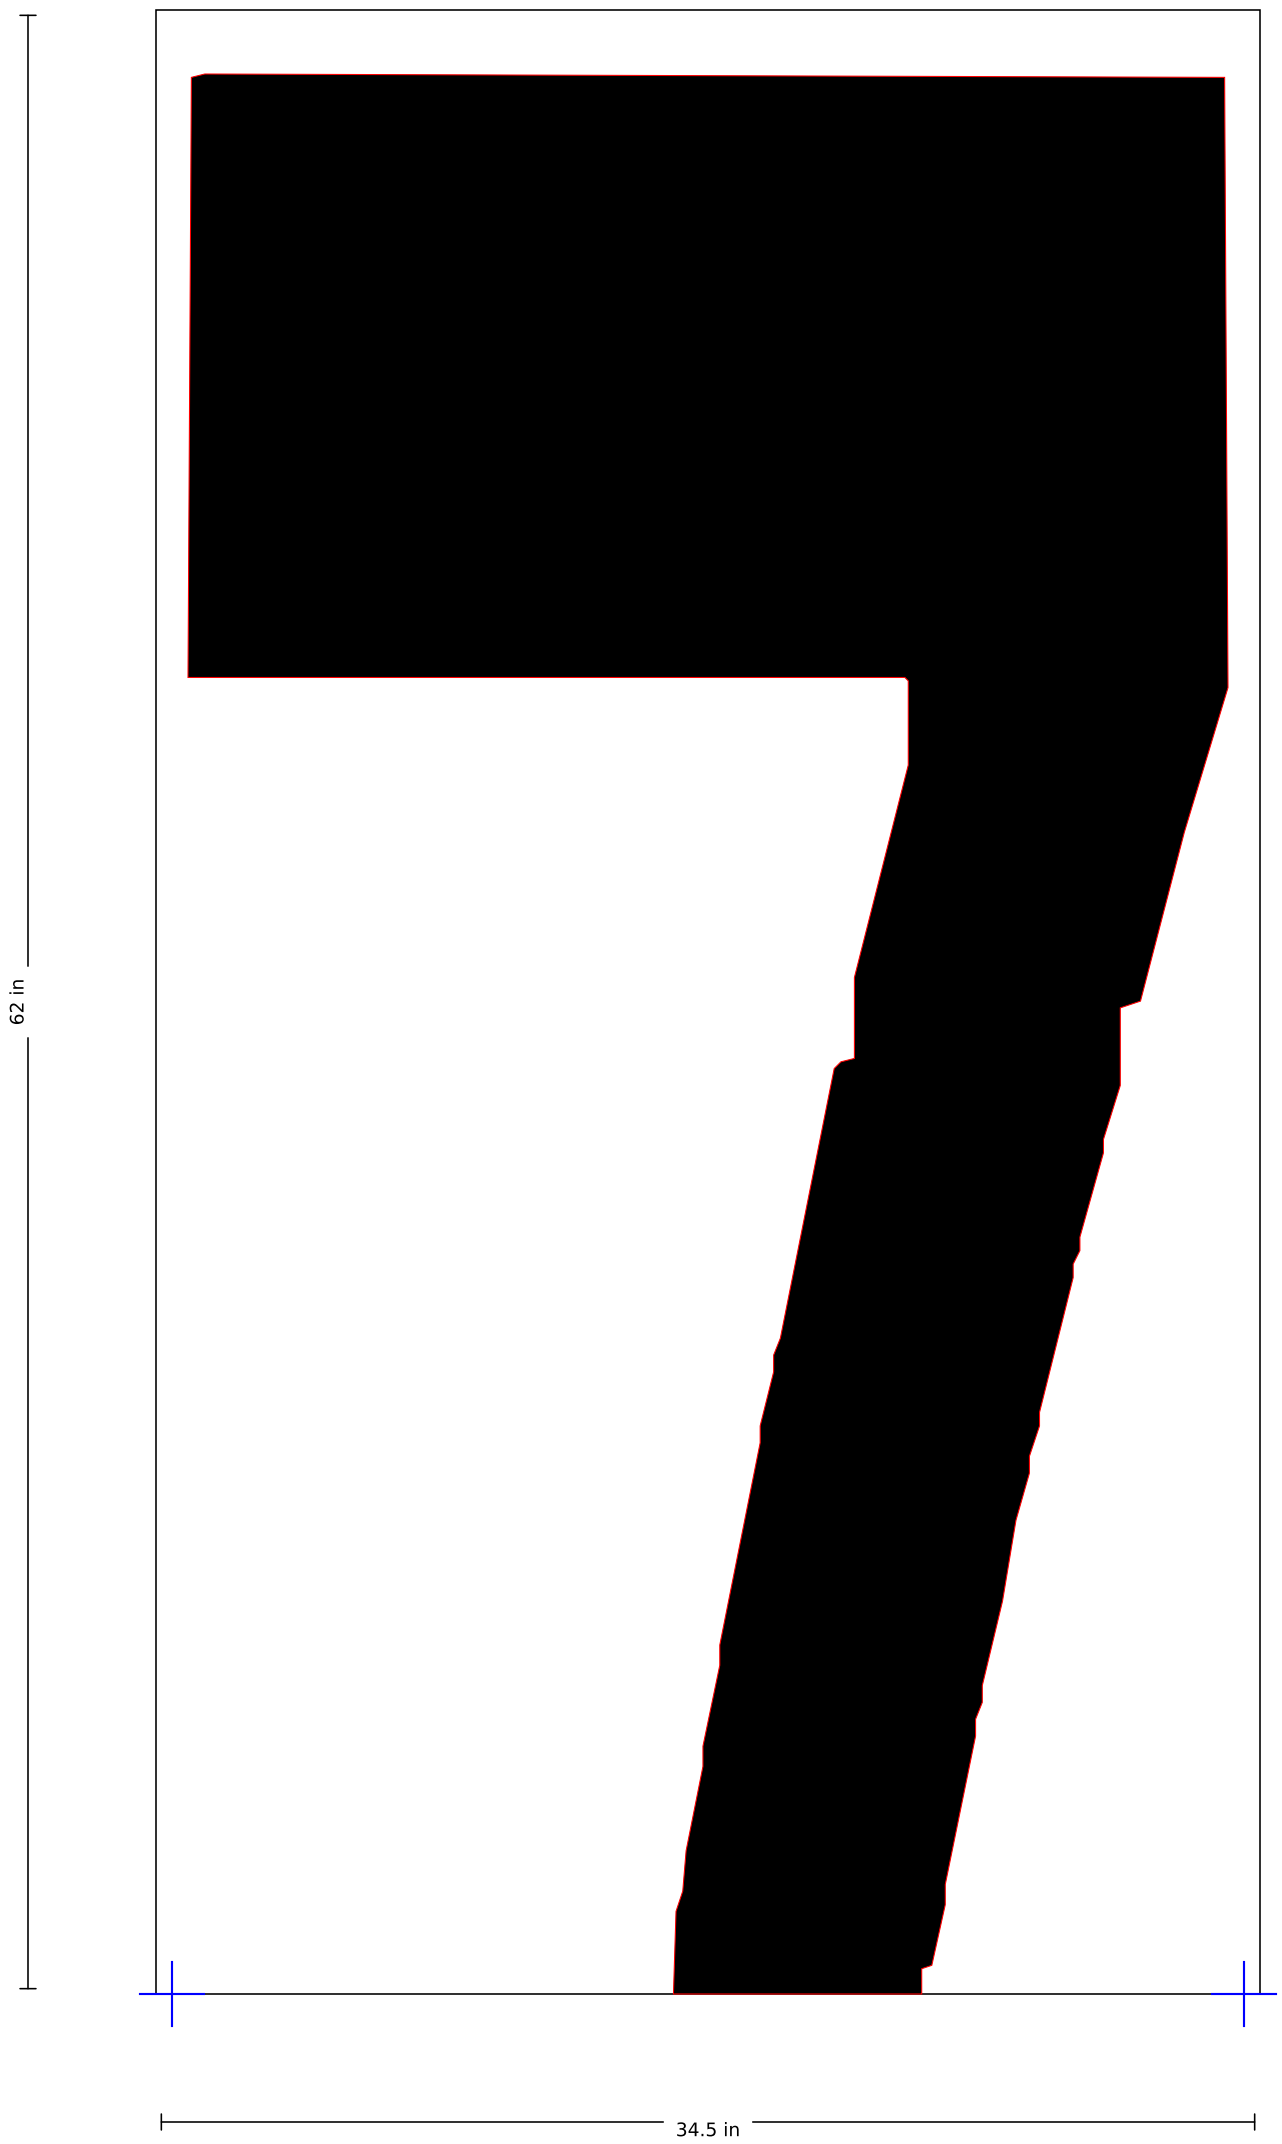

SSS-FAA-120-01-8

120" FAA Airport "8" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

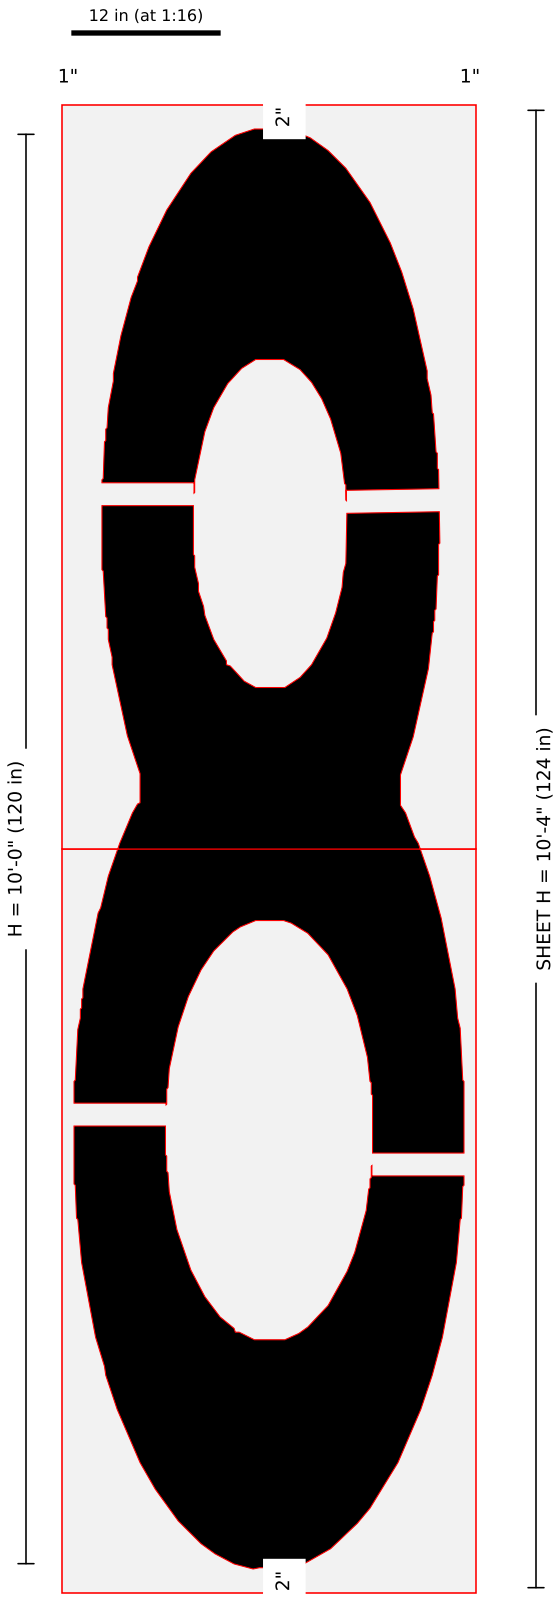

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1208-120in-FAA-Airport-Letter-8-134x48-2.jpg: width 32.5 from image scale (32.40); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (28.69,33.71) stroke 7.622" w=1.906"; (3.81,37.87) stroke 7.622" w=1.906"; (6.14,89.56) stroke 7.622" w=1.906"; (26.59,89.0) stroke 7.668" w=1.917" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-8 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

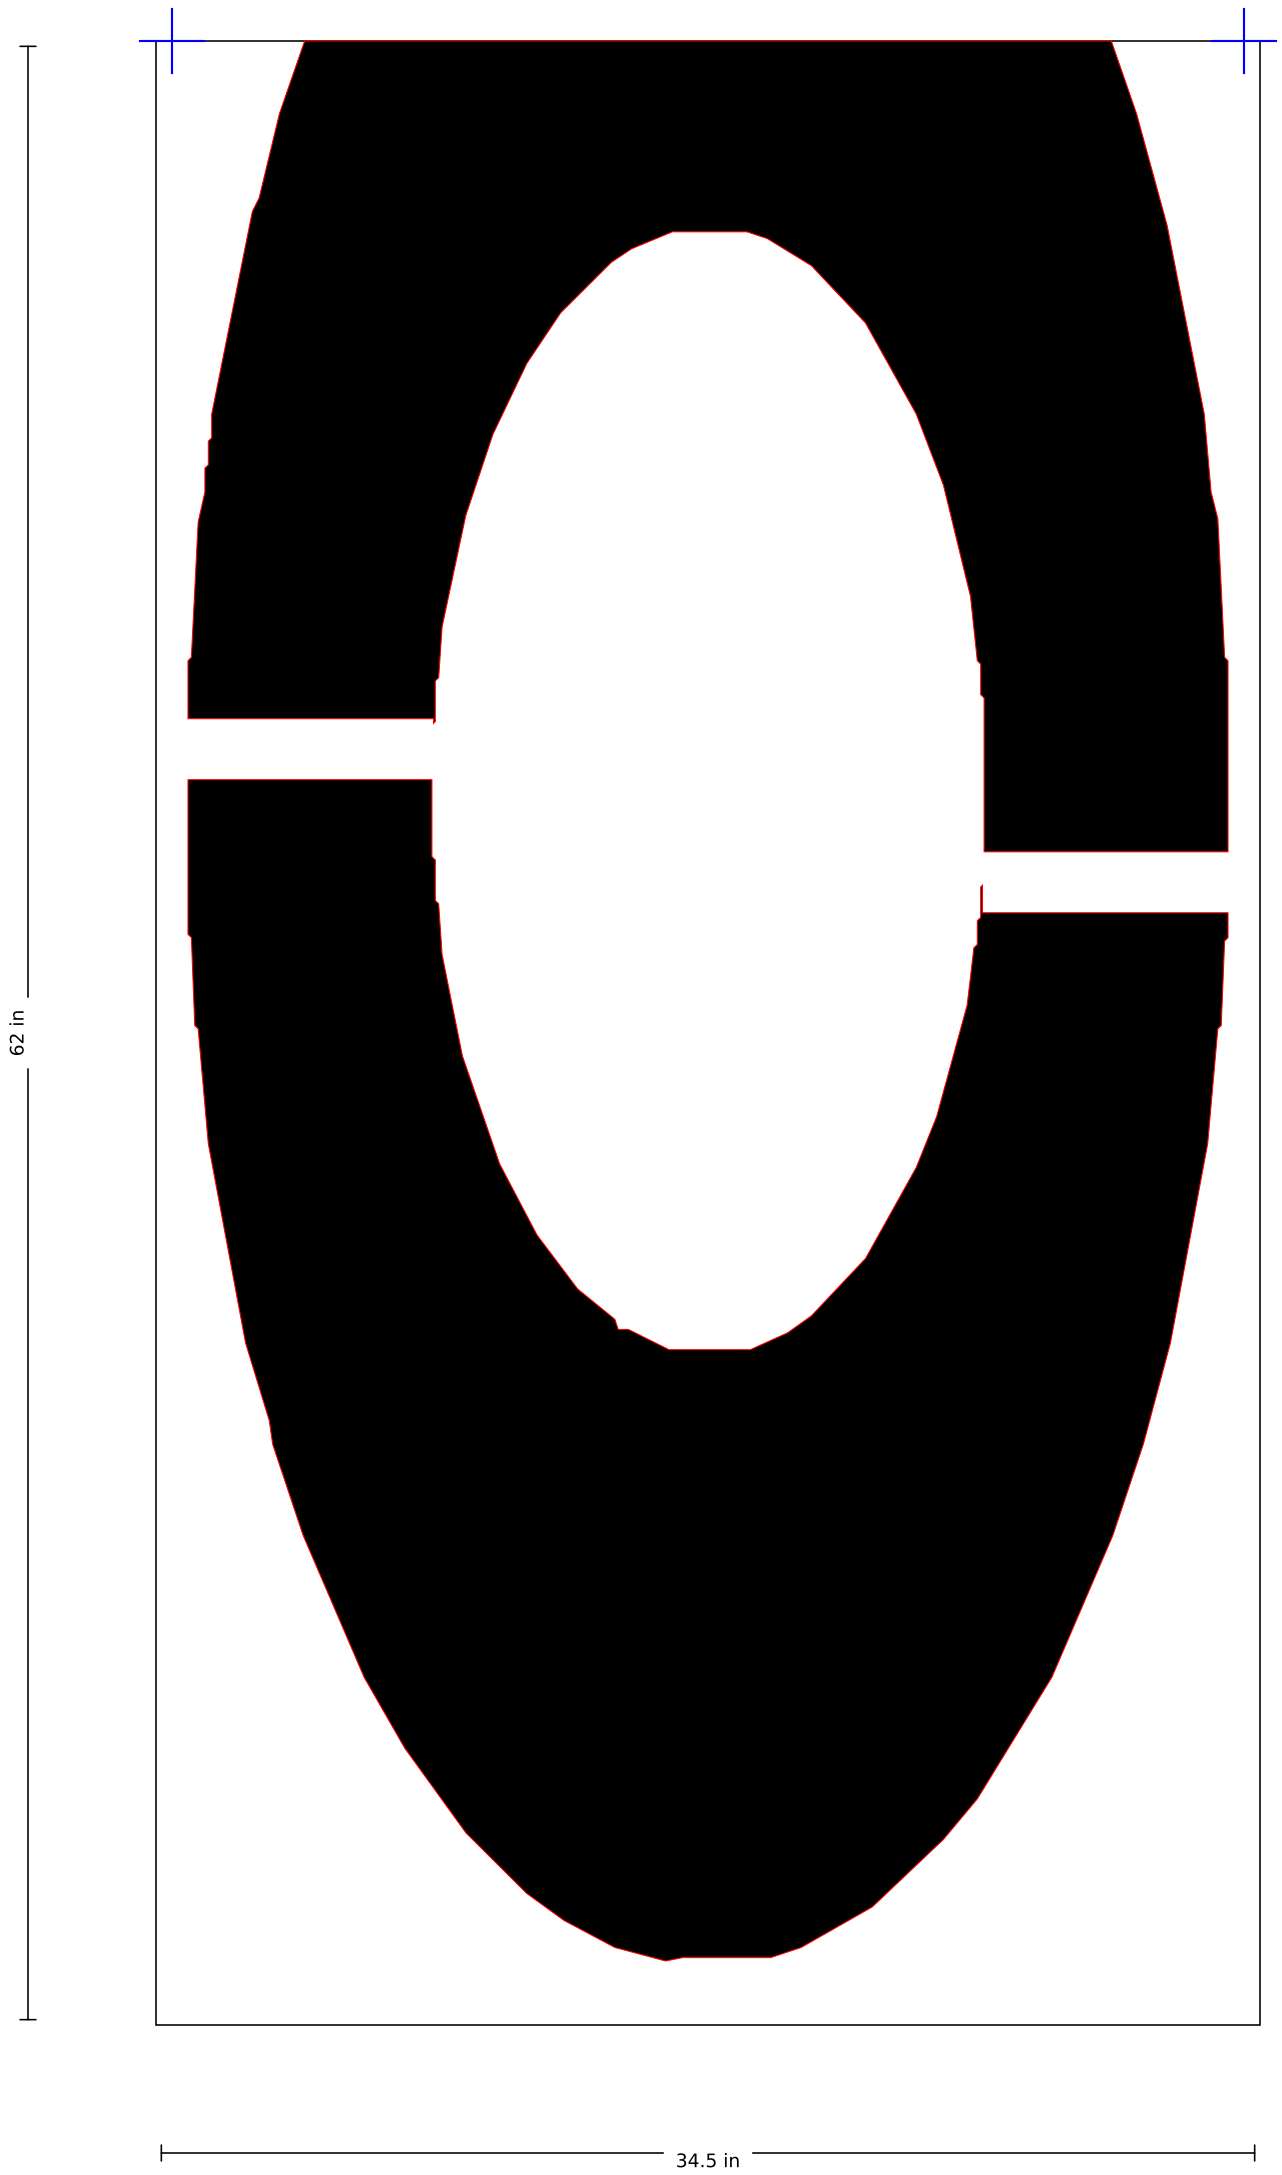

SSS-FAA-120-01-8 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

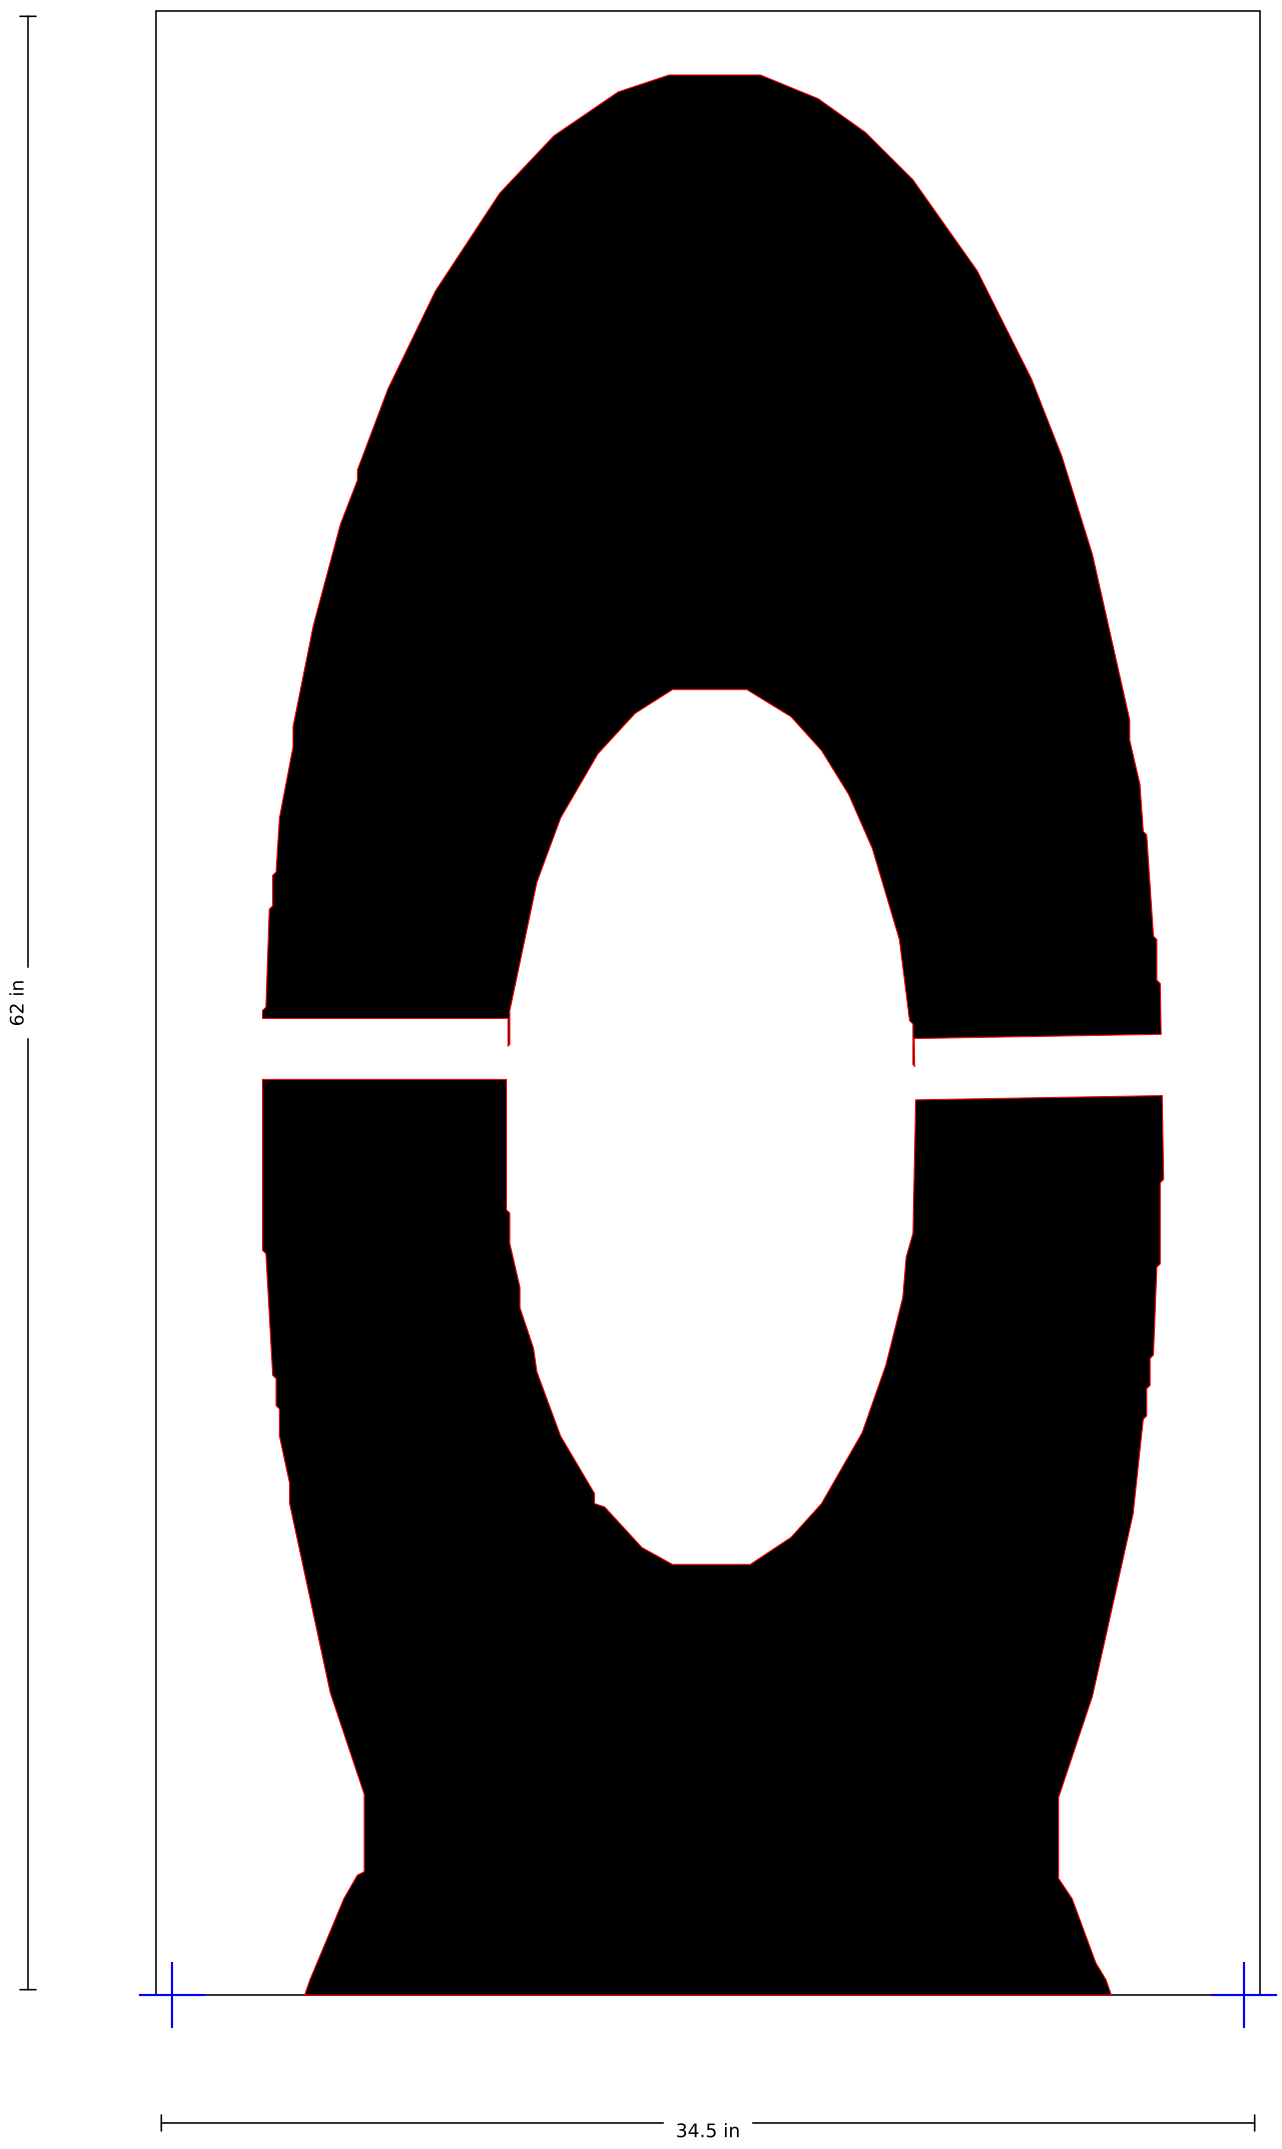

SSS-FAA-120-01-9

120" FAA Airport "9" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

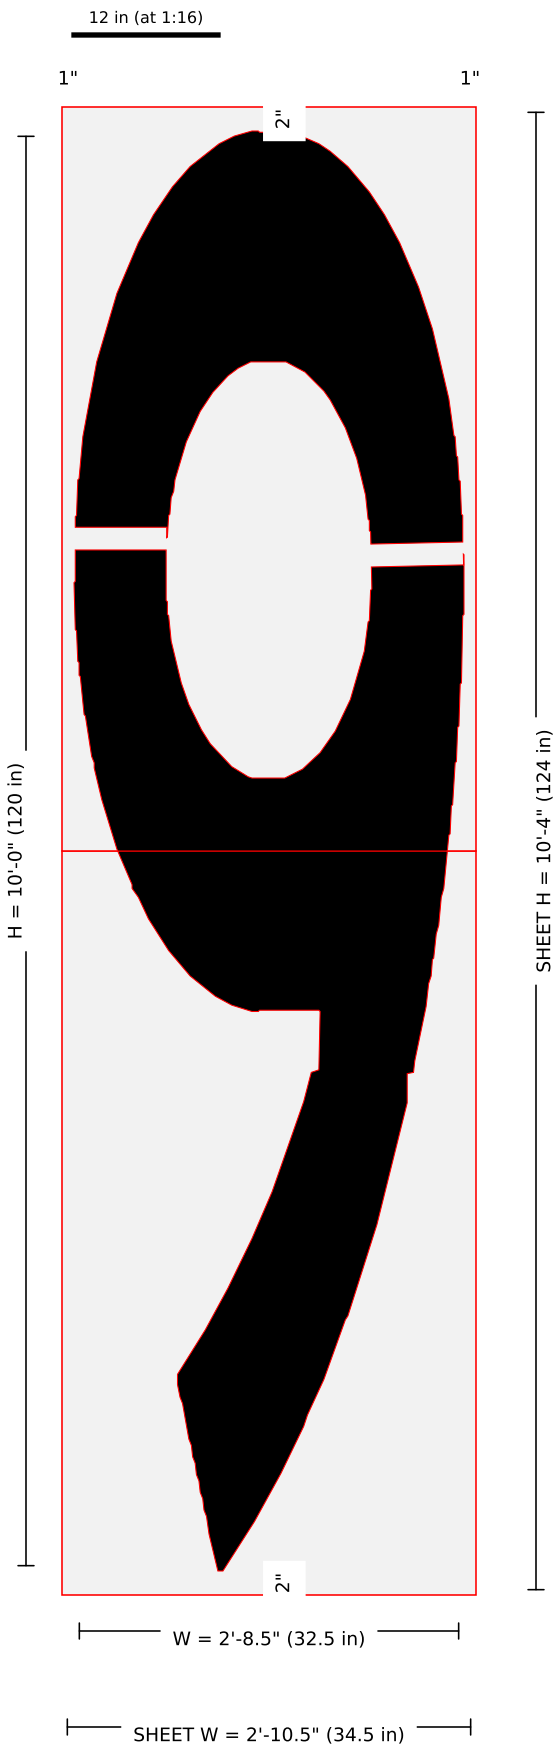

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1209-120in-FAA-Airport-Letter-9-134x48-2.jpg: width 32.5 from image scale (32.67); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (3.89,86.03) stroke 7.573" w=1.893"; (28.58,84.71) stroke 7.636" w=1.909" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-9 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

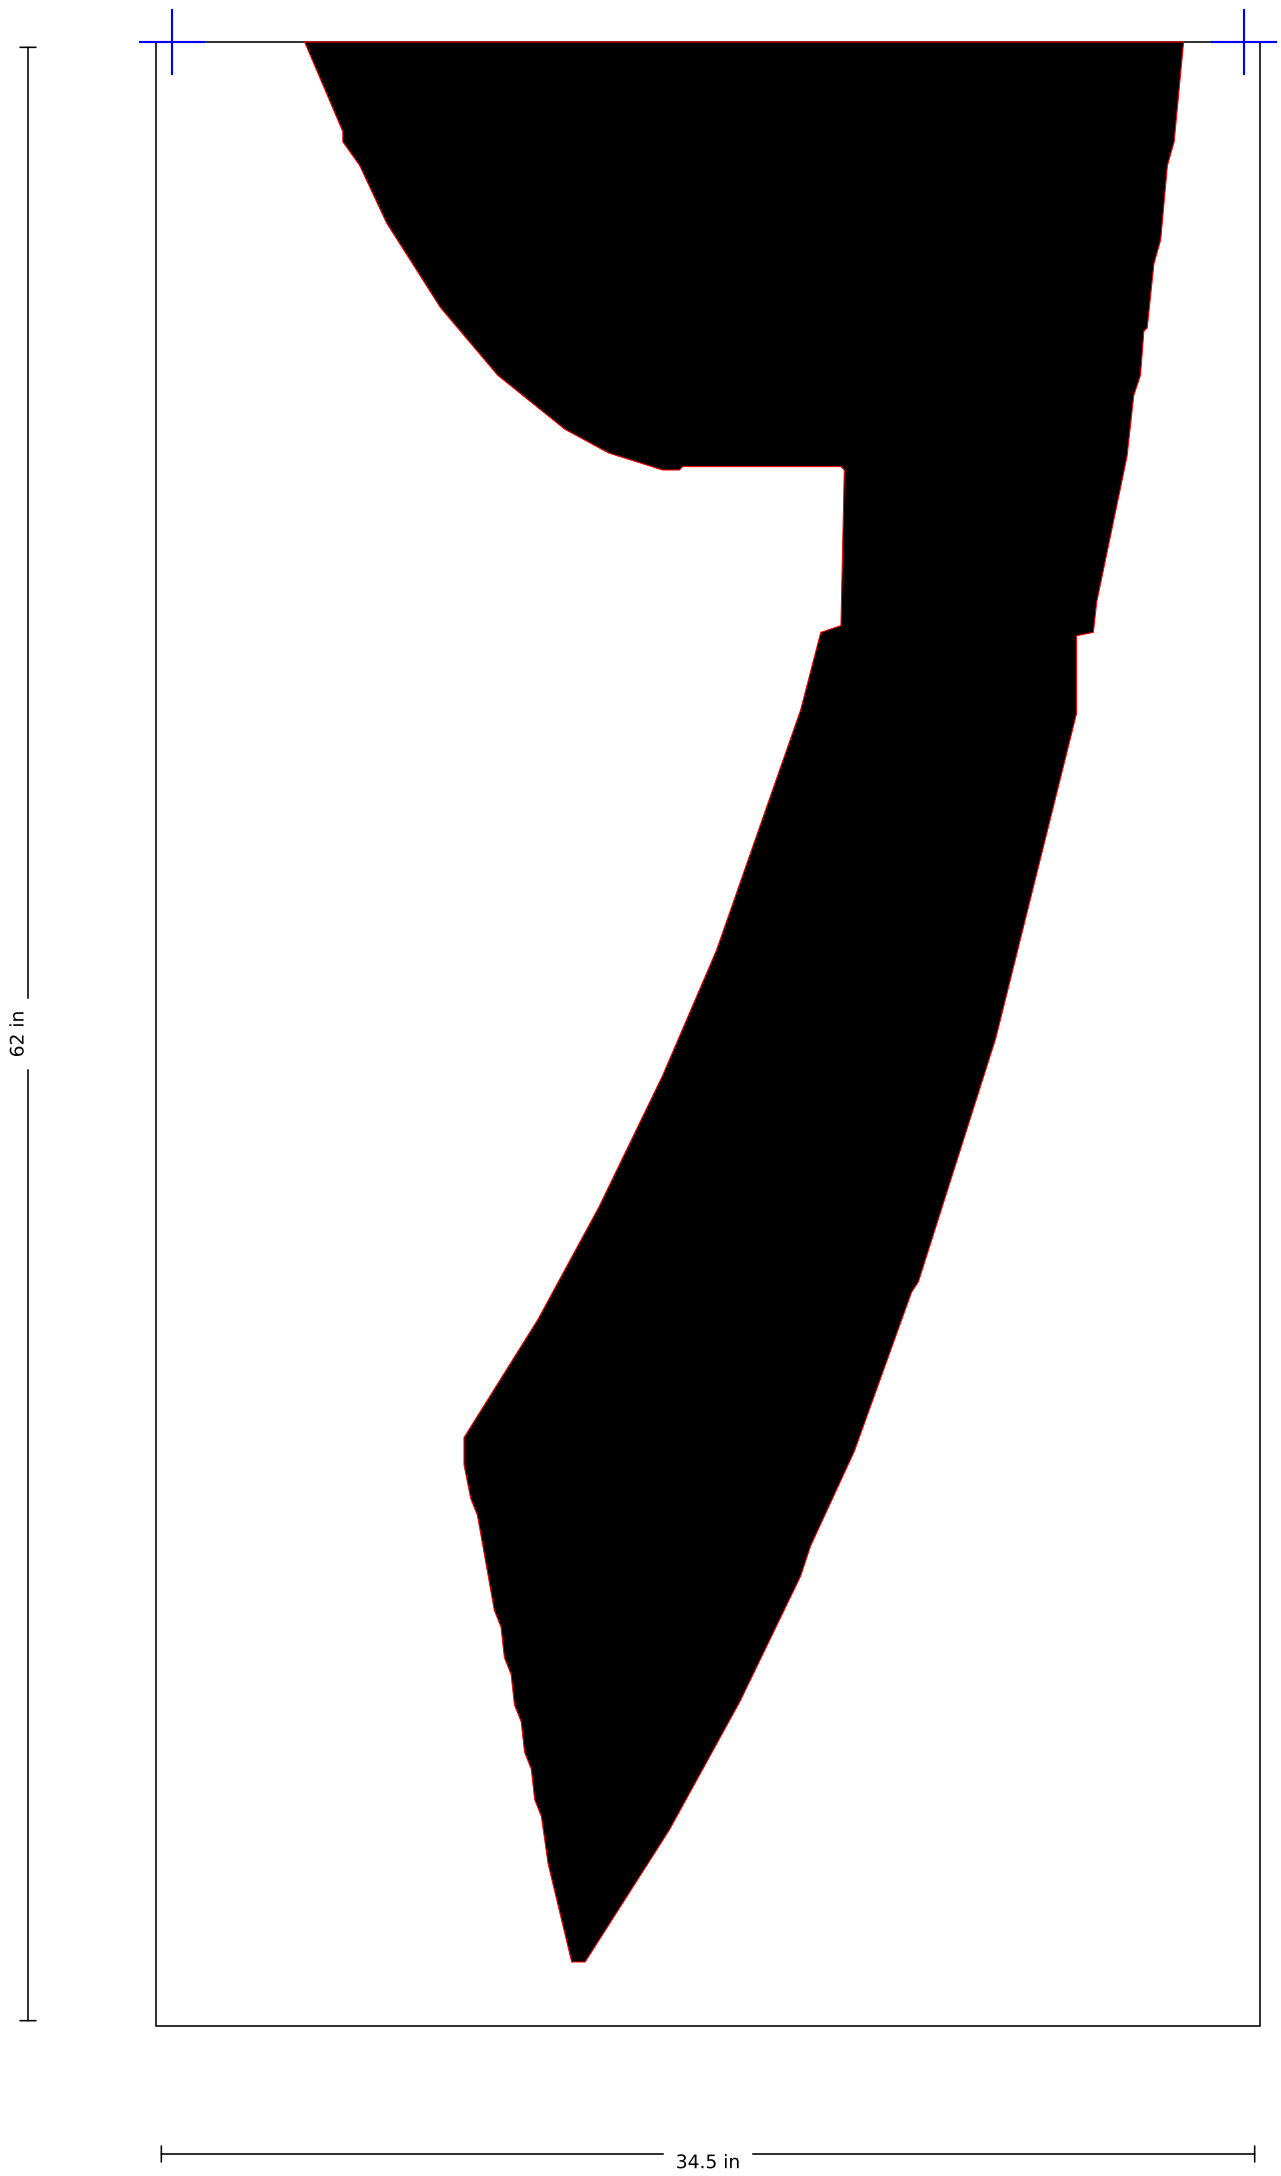

SSS-FAA-120-01-9 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

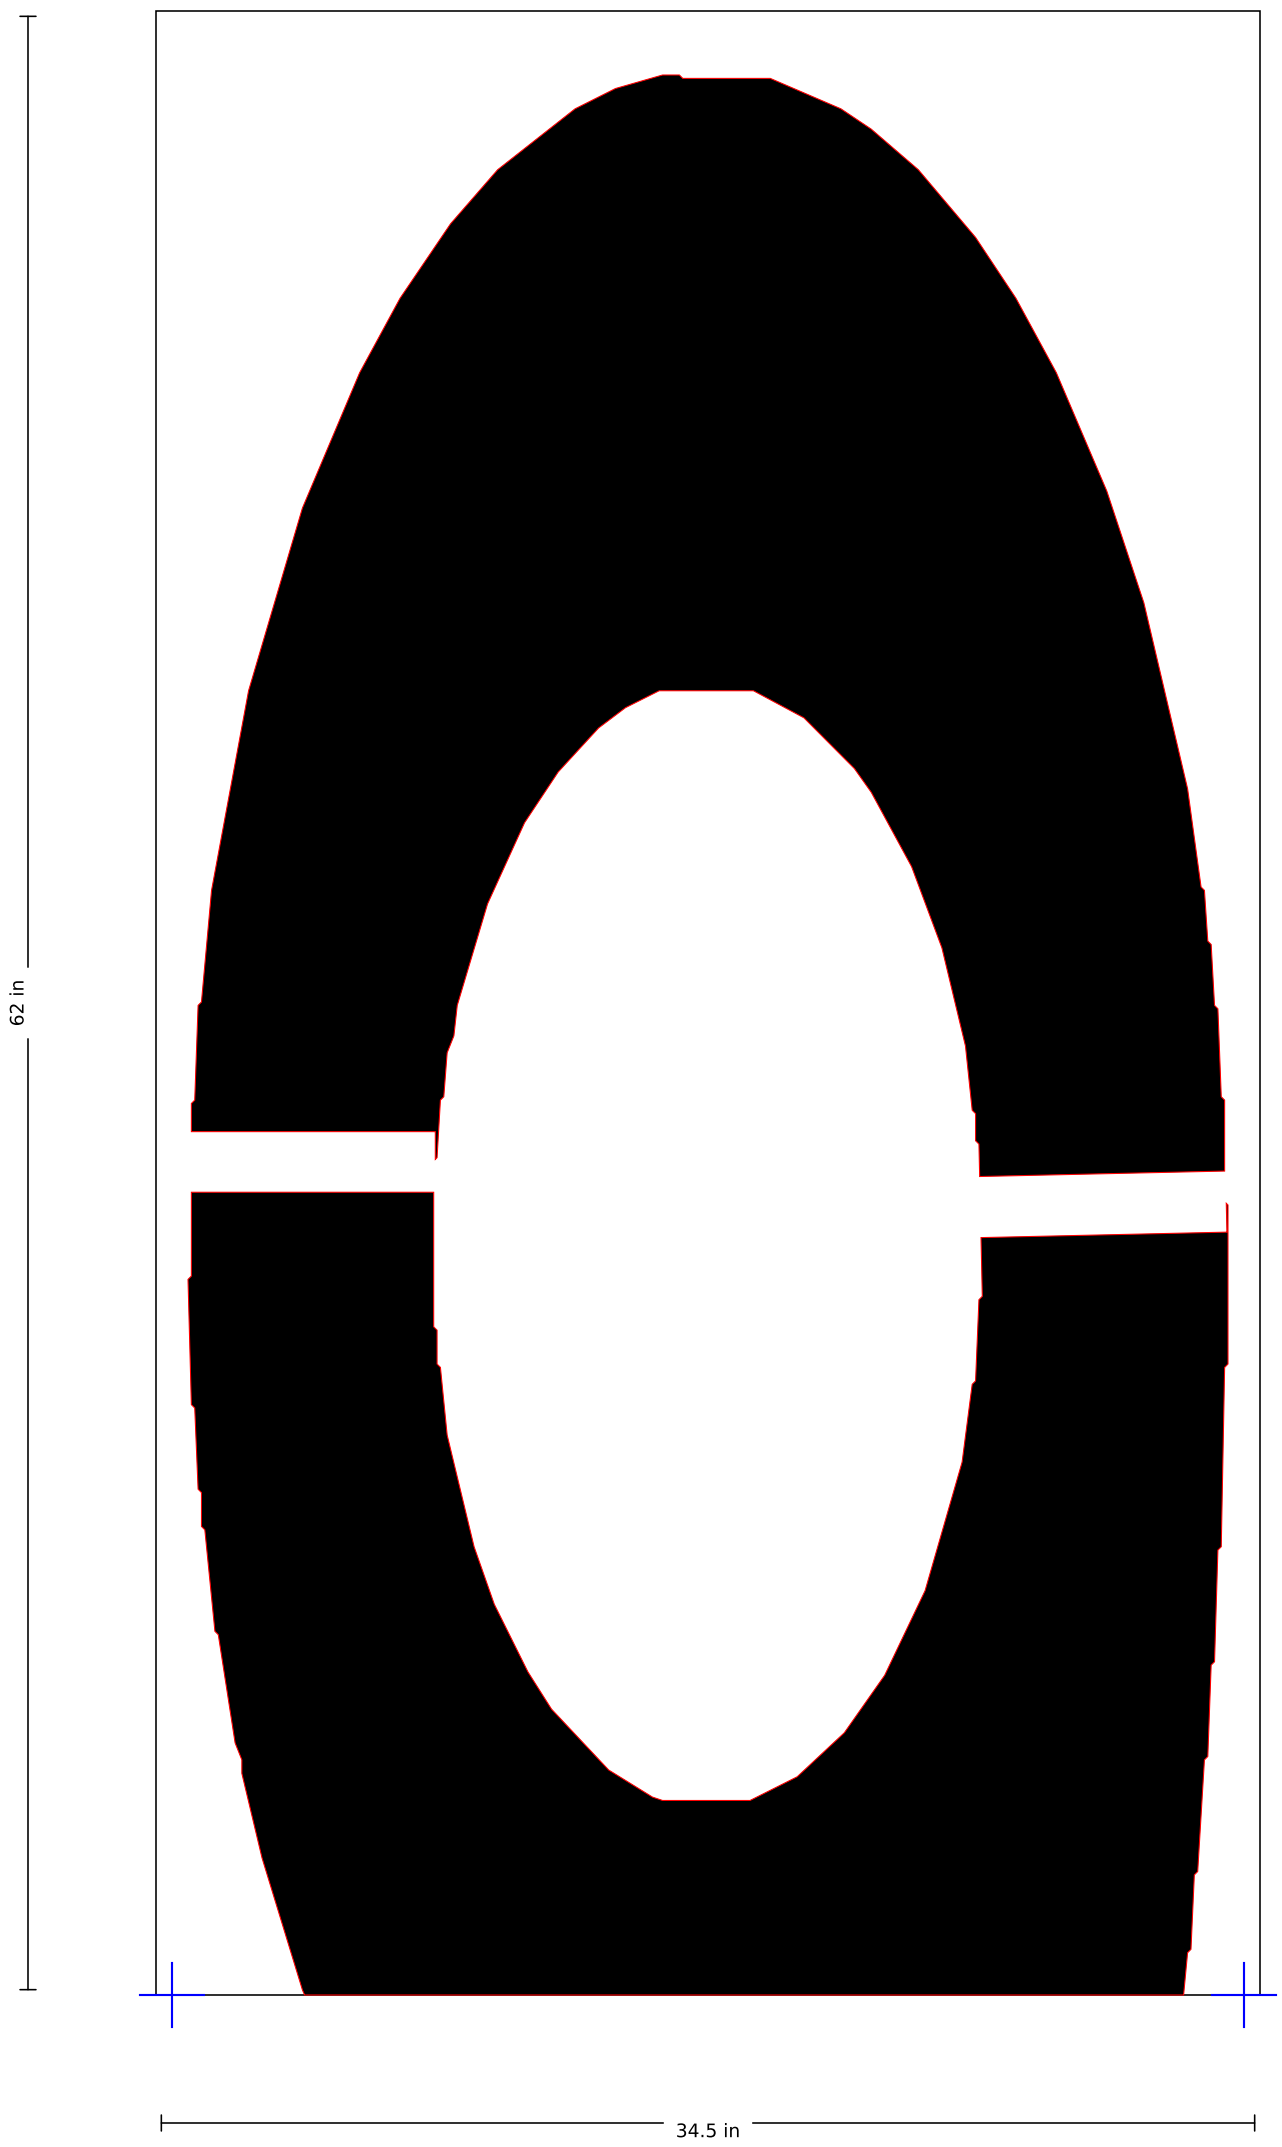

SSS-FAA-120-01-A

120" FAA Airport "A" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

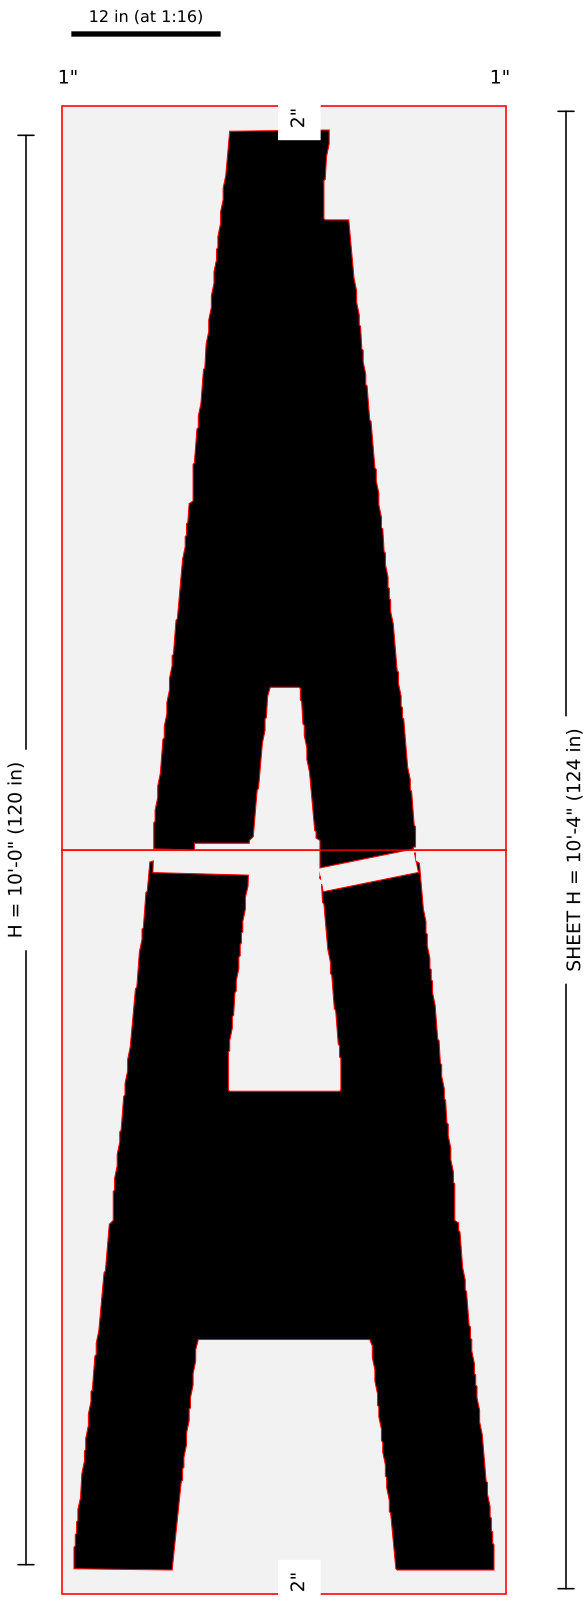

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120A-120in-FAA-Airport-Letter-A-134x48-2.jpg: width = kit listing 35 (image-scale 33.88); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (24.53,58.31) stroke 8.01" w=2.003"; (10.6,59.0) stroke 7.908" w=1.977" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 2 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-A · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

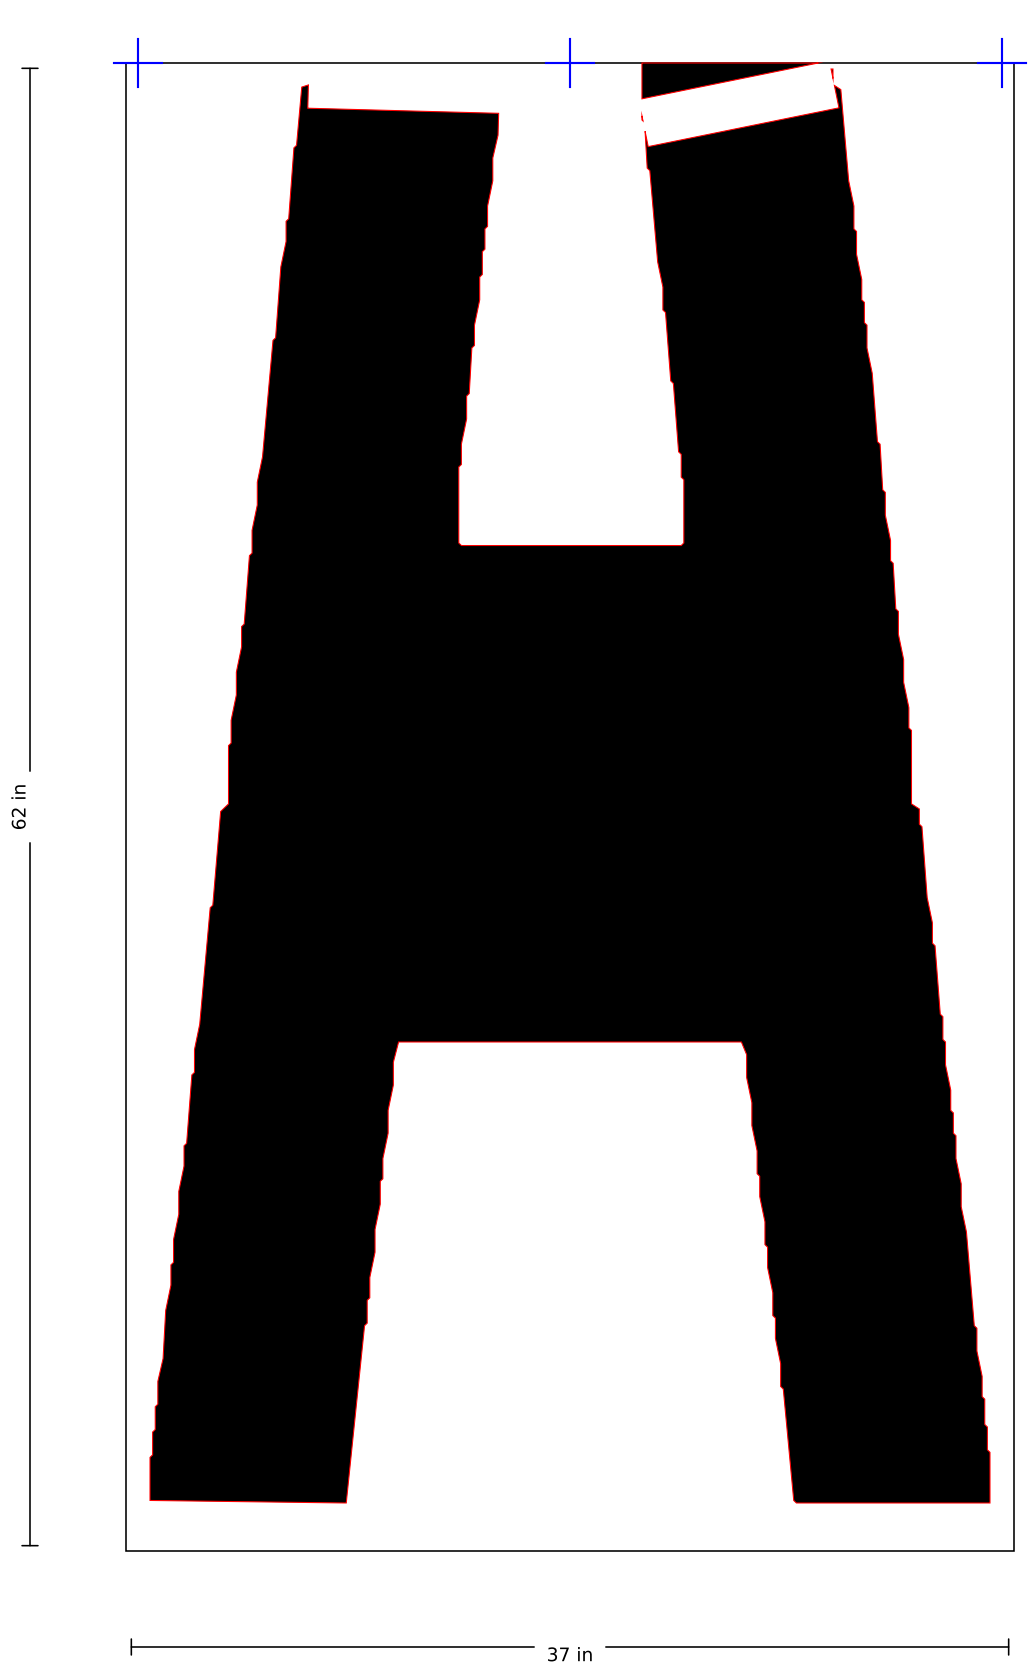

SSS-FAA-120-01-A · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

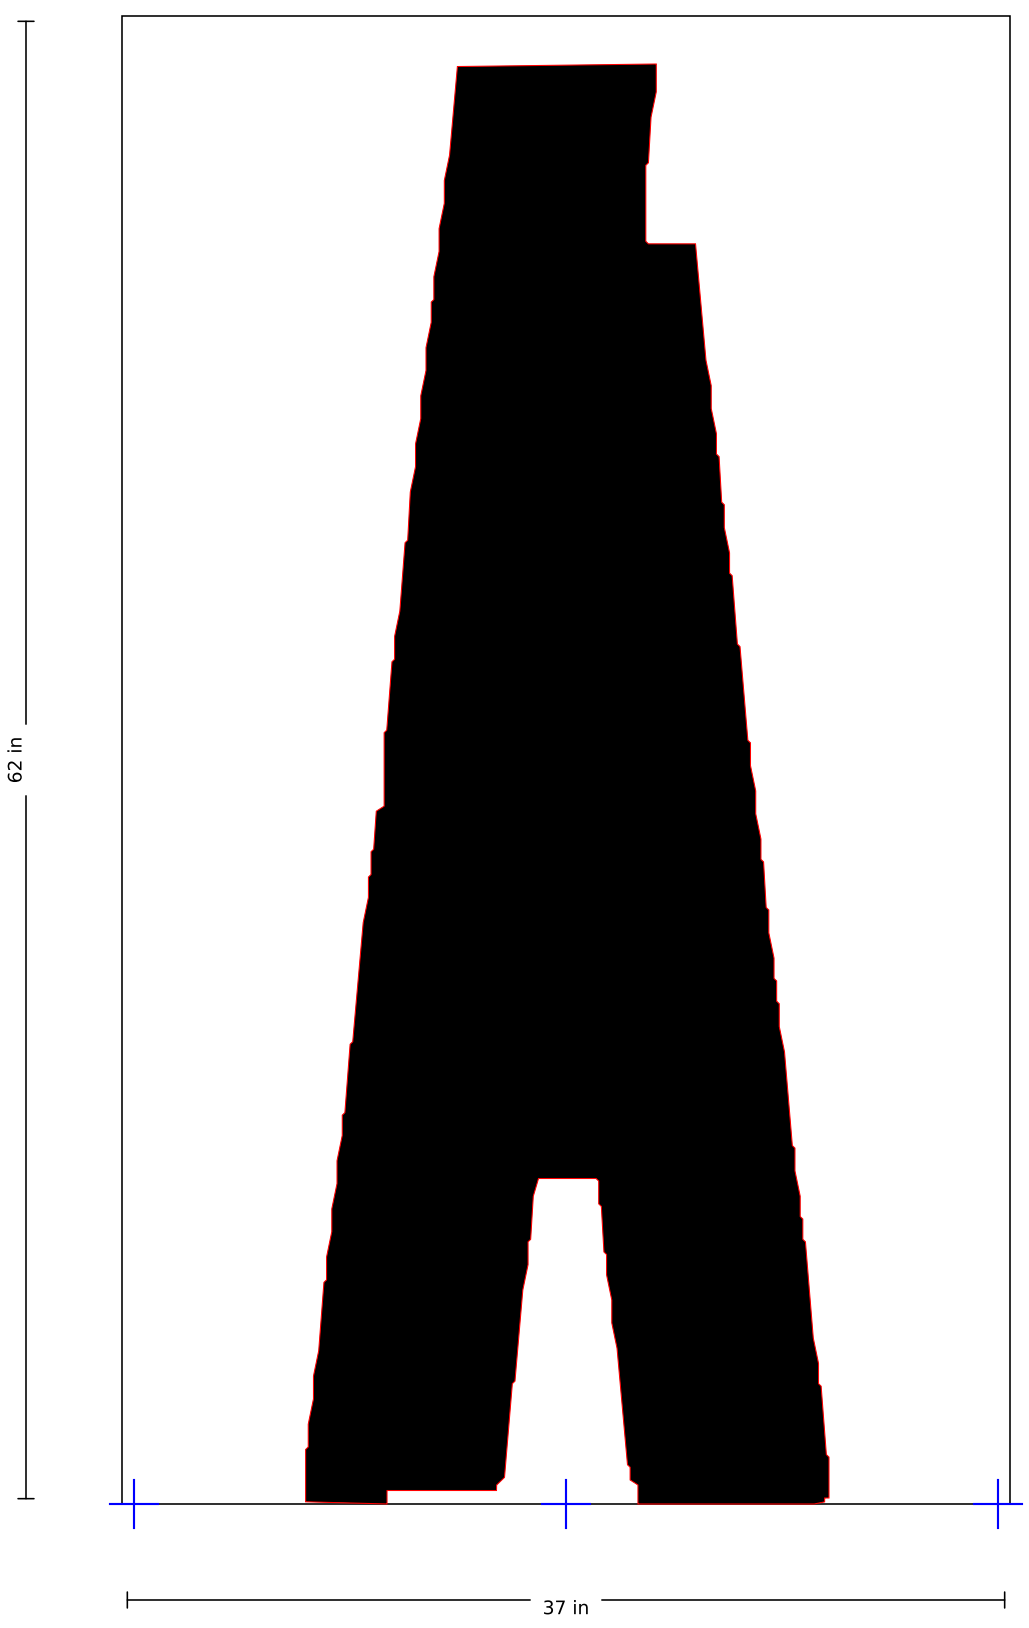

SSS-FAA-120-01-B

120" FAA Airport "B" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

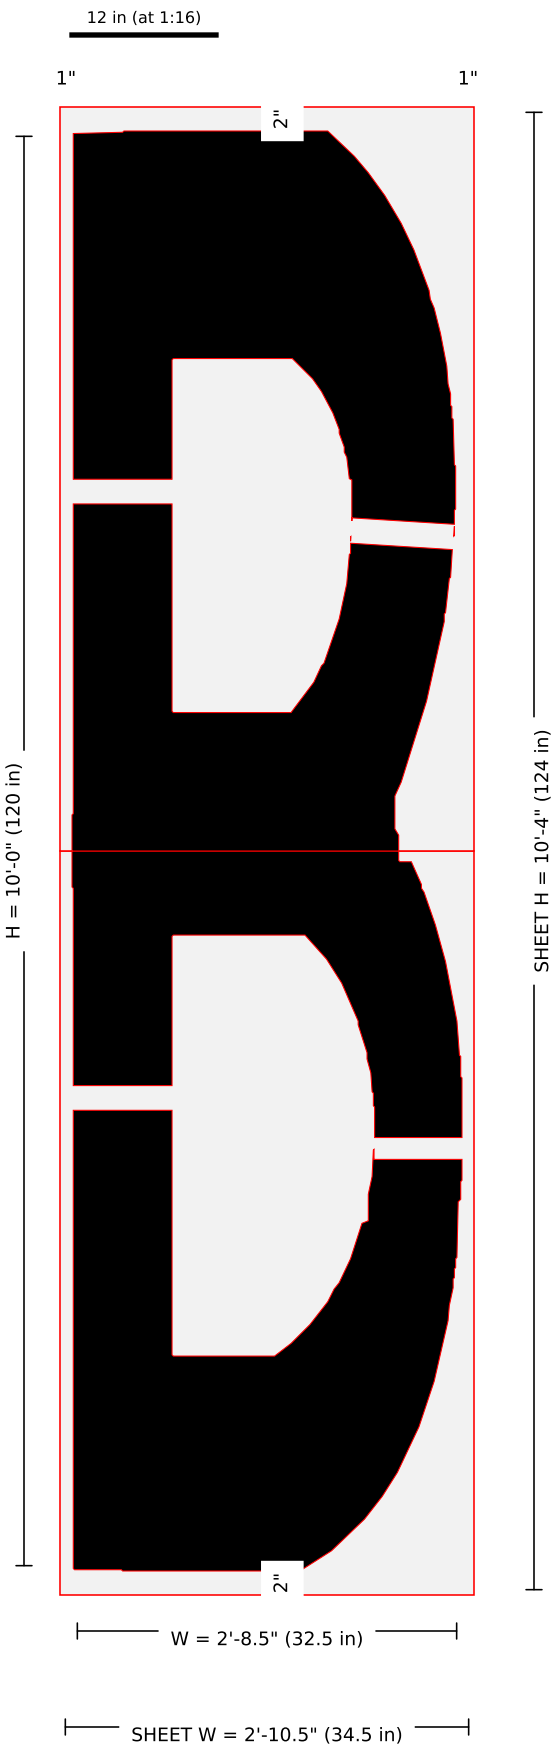

Pieces: 2 (1 x 2); blanks (in): 34.5 x 62, 34.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120B-120in-FAA-Airport-Letter-B-134x48-2.jpg: width 32.5 from image scale (32.45); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (28.86,35.21) stroke 7.281" w=1.82"; (4.22,39.42) stroke 8.231" w=2.058"; (4.22,89.95) stroke 8.231" w=2.058"; (27.54,86.44) stroke 8.458" w=2.114" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-B · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

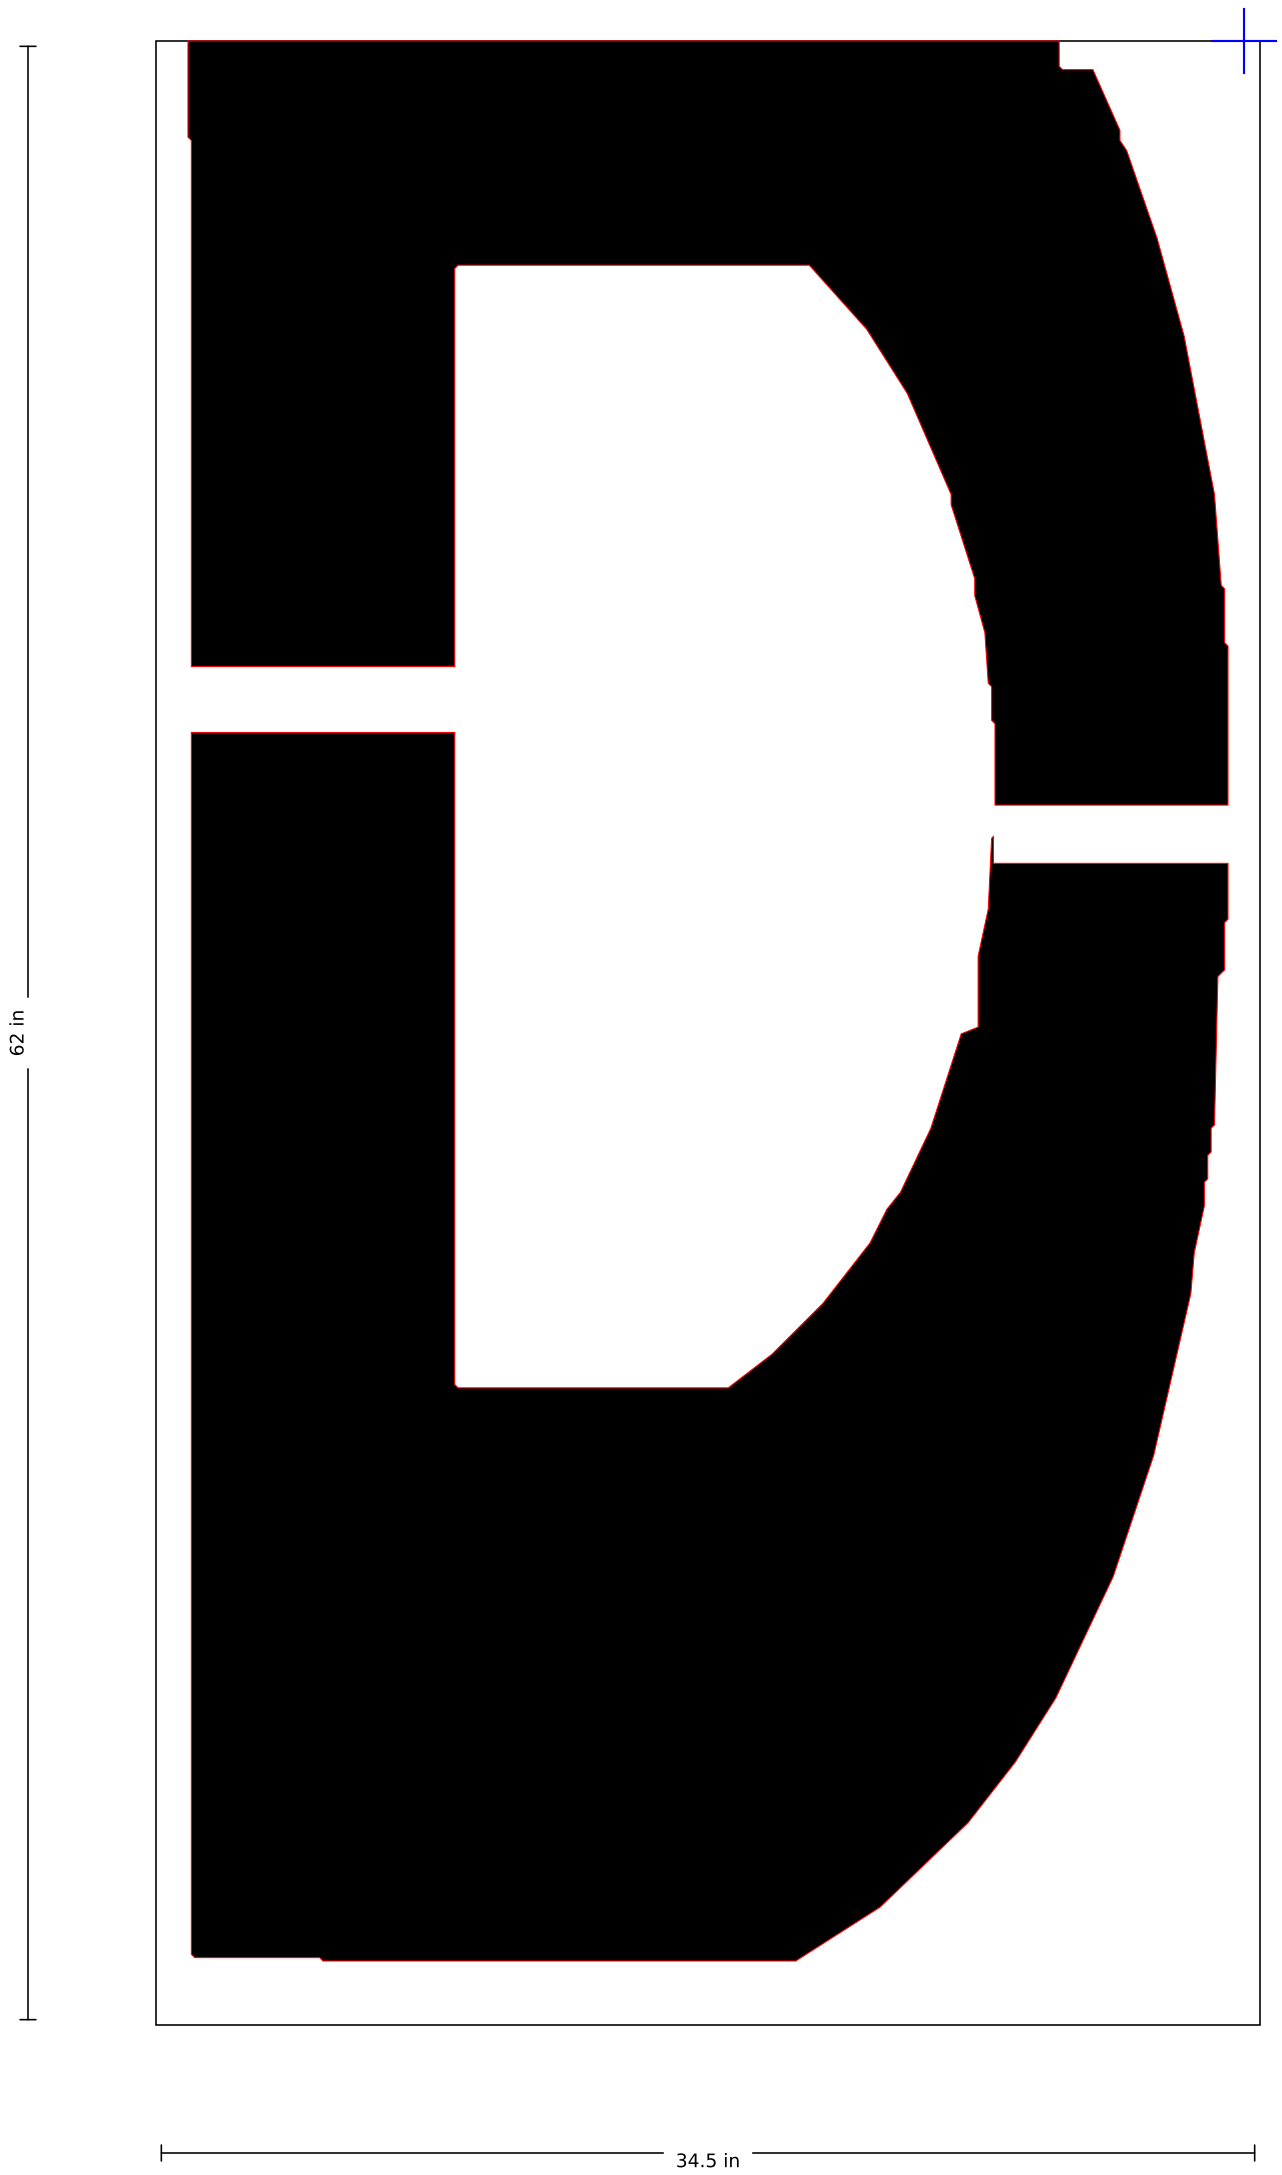

SSS-FAA-120-01-B · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

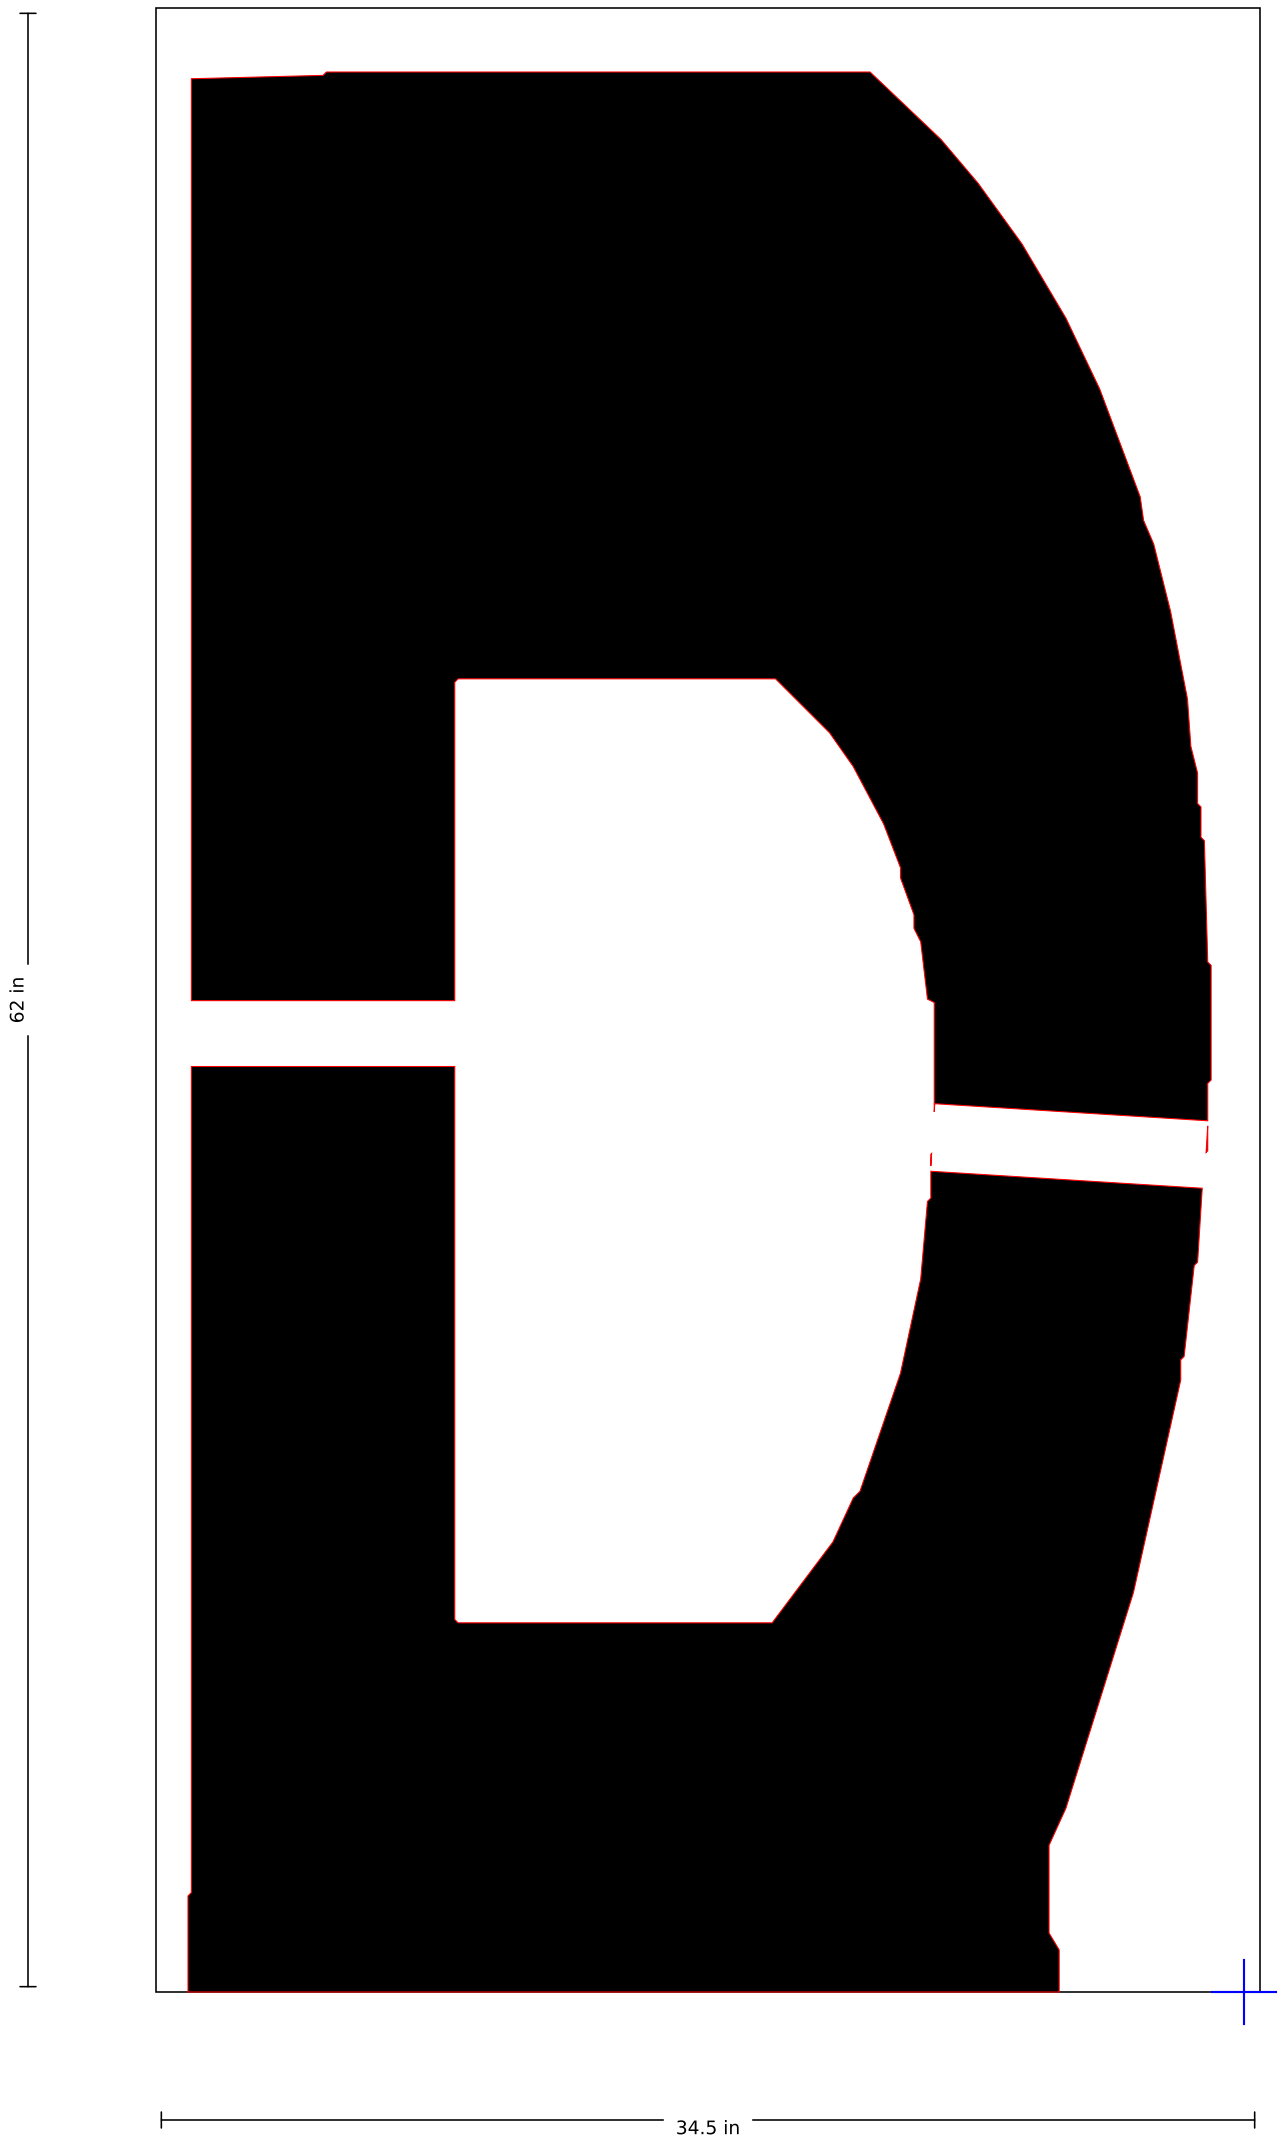

SSS-FAA-120-01-C

120" FAA Airport "C" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

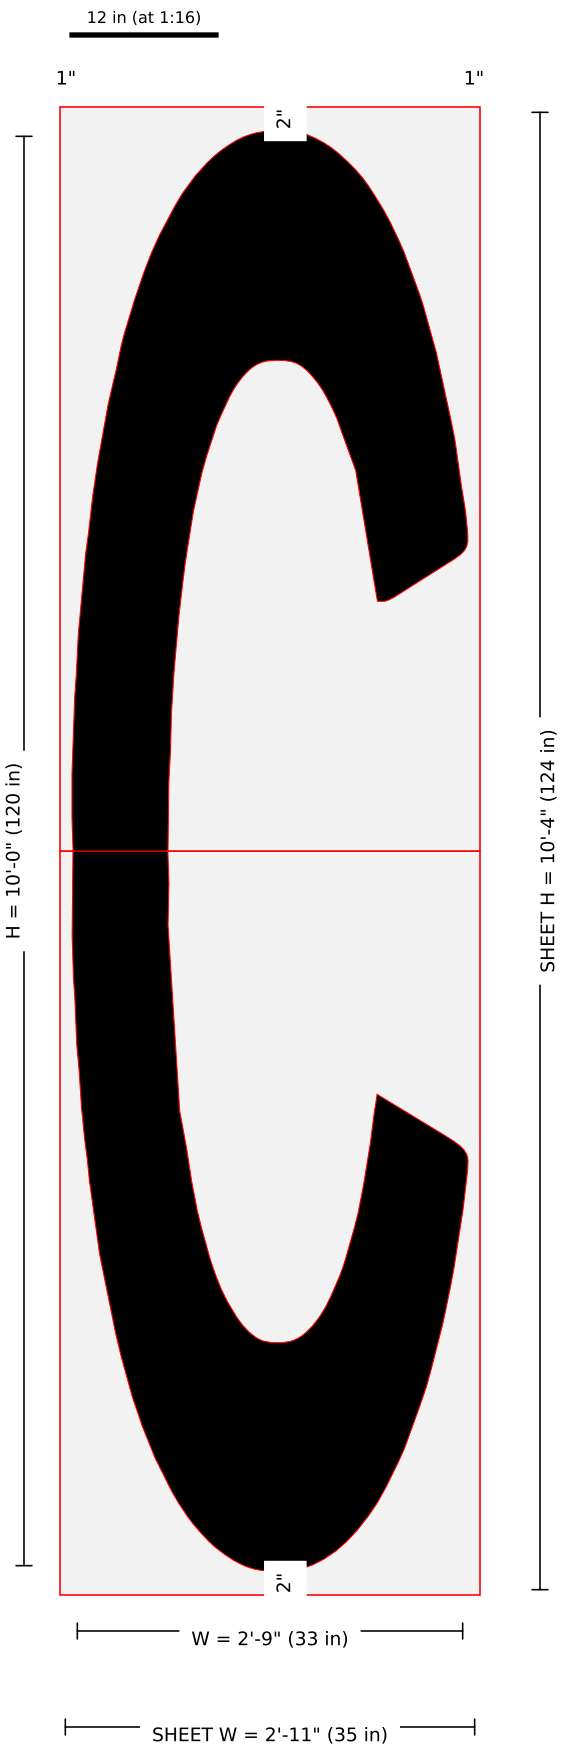

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120C-120in-FAA-Airport-Letter-C-134x48-2.jpg: width 33 from image scale (32.82); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-C · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

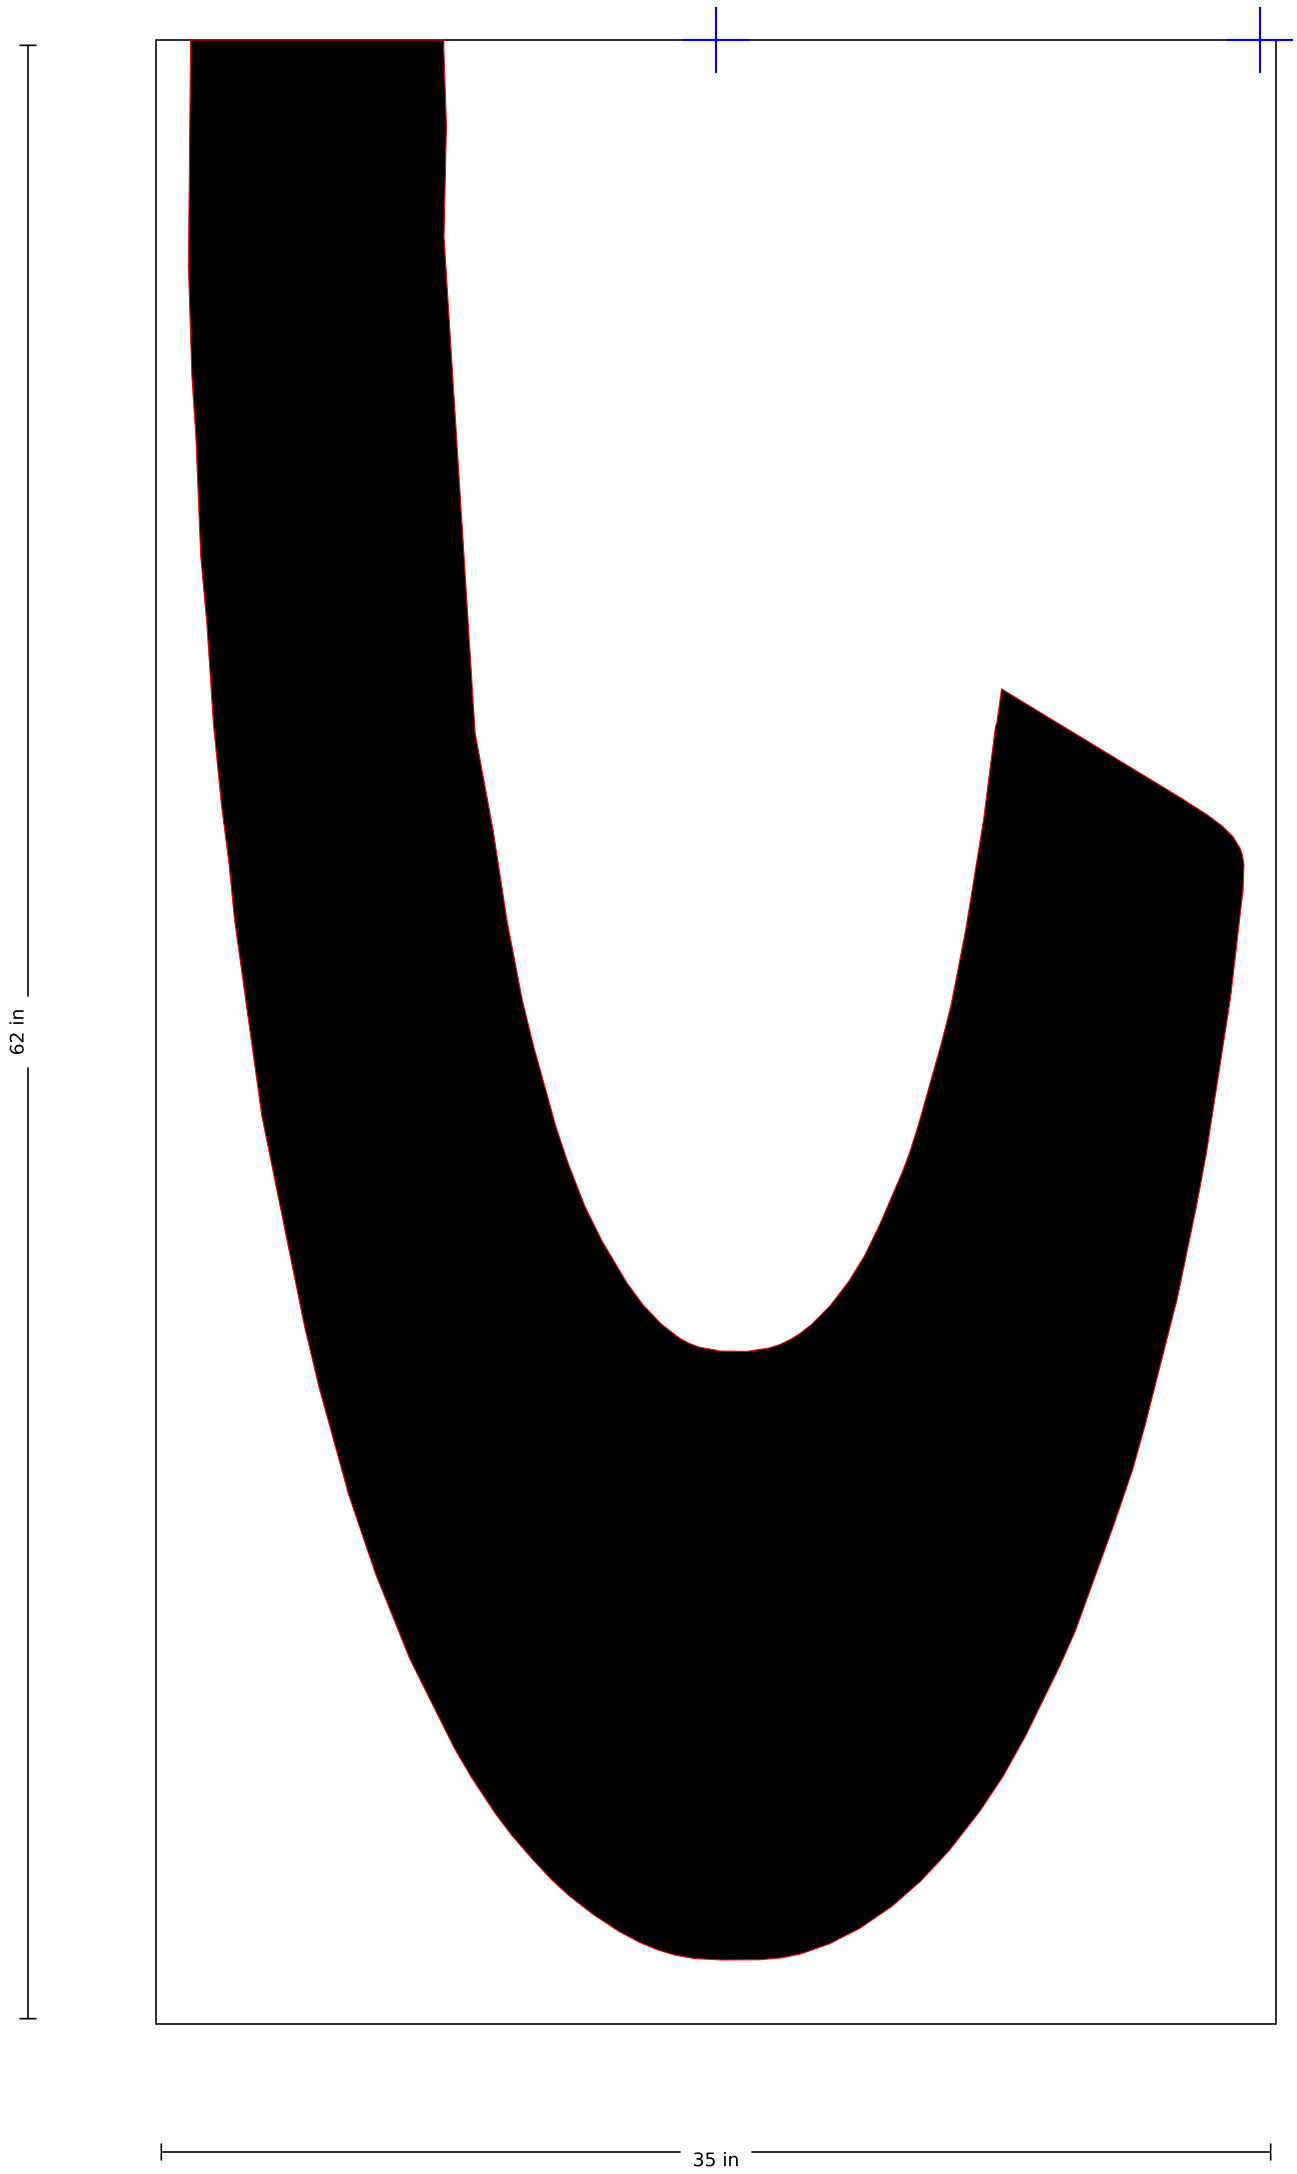

SSS-FAA-120-01-C · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

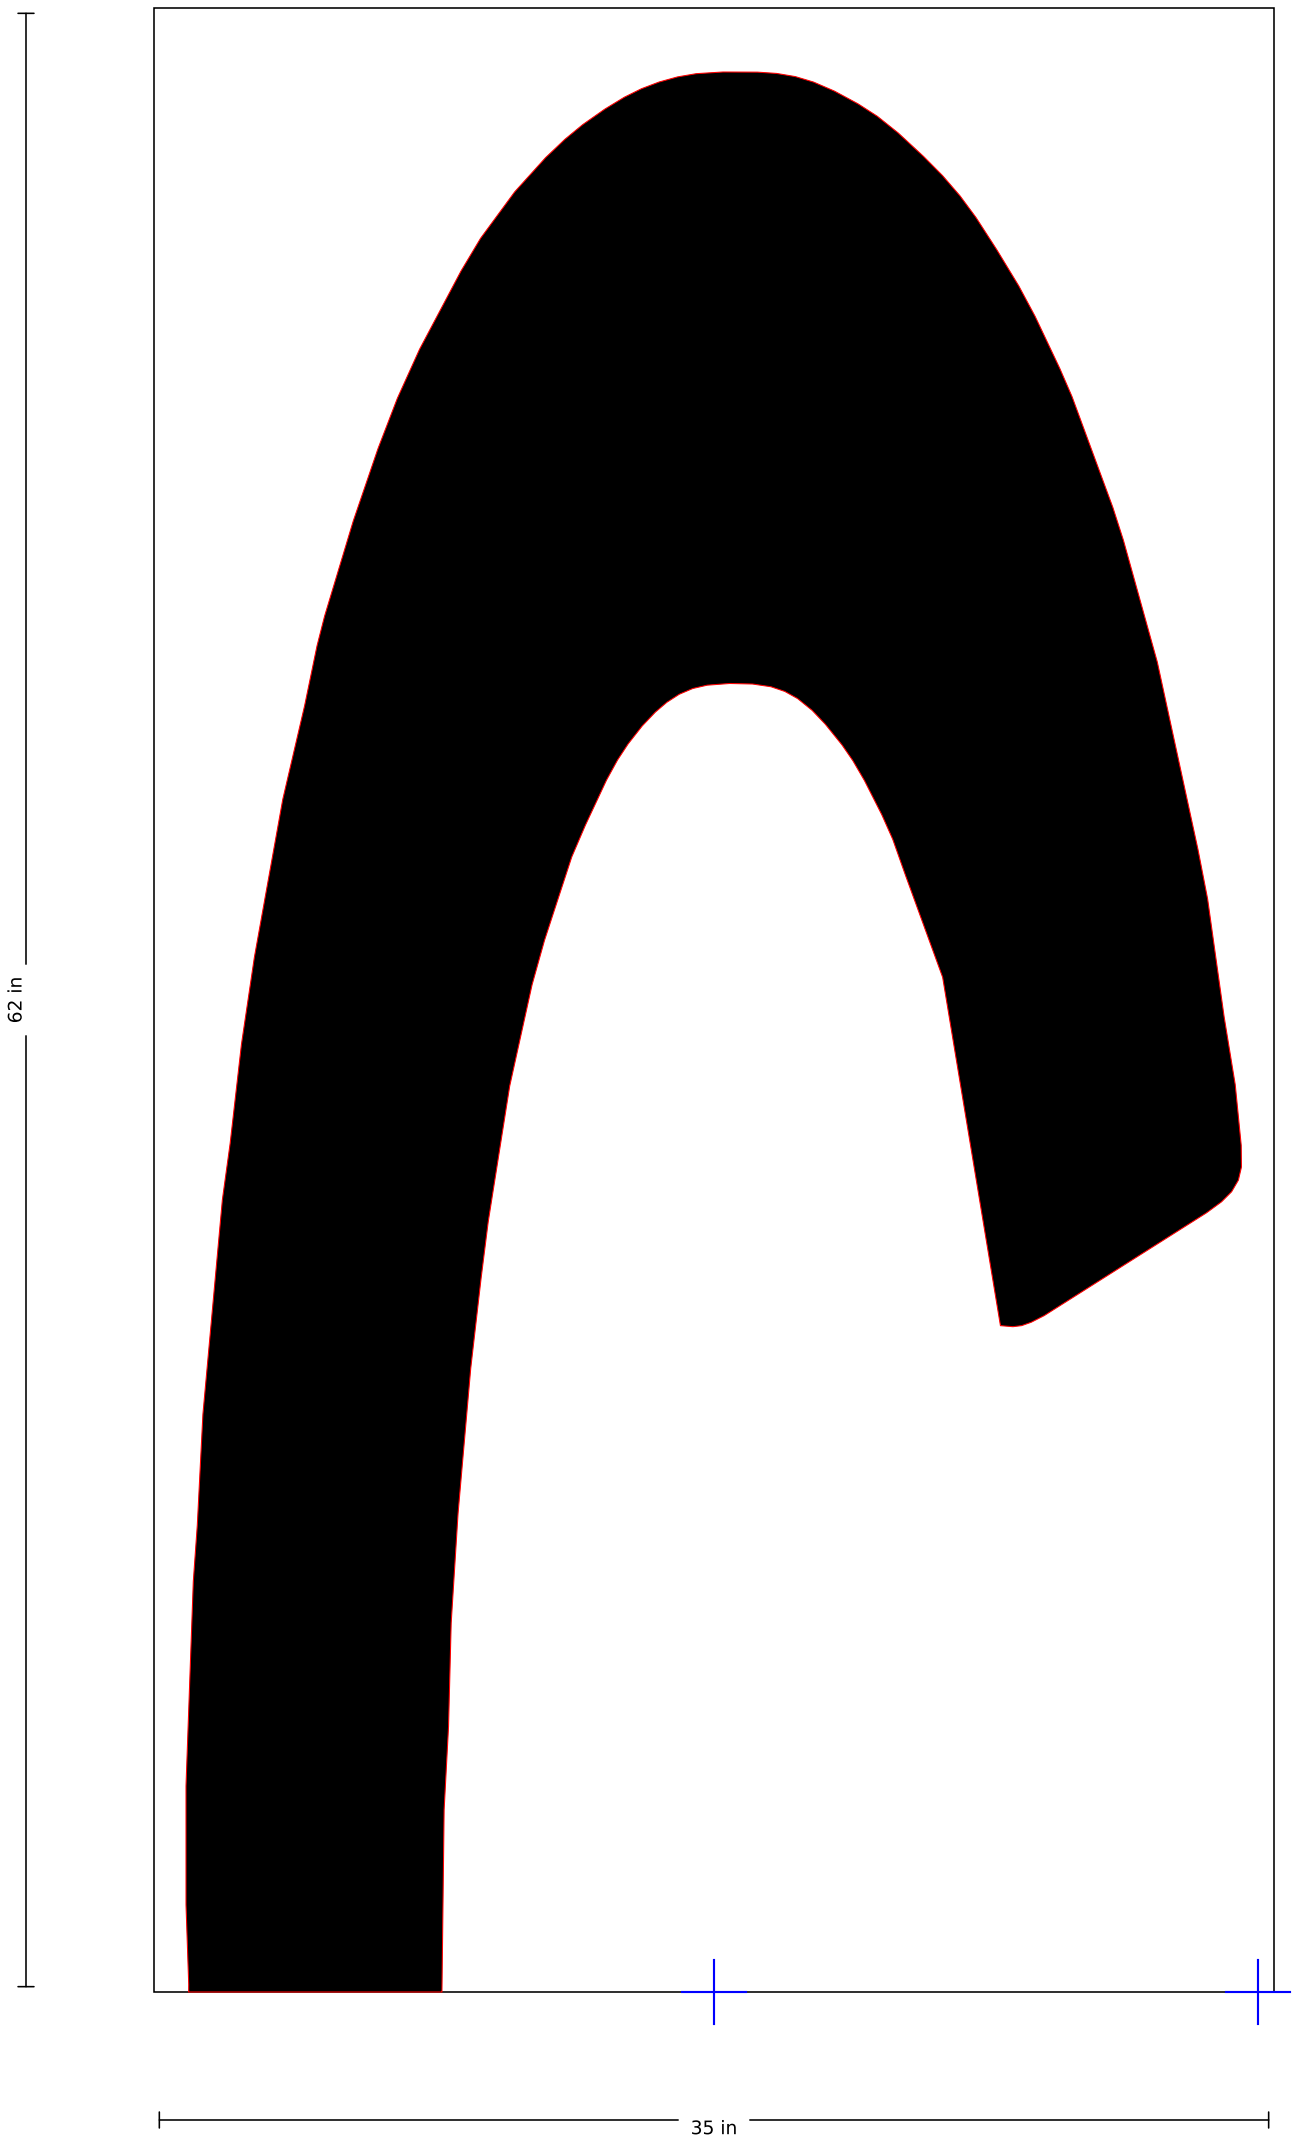

SSS-FAA-120-01-D

120" FAA Airport "D" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

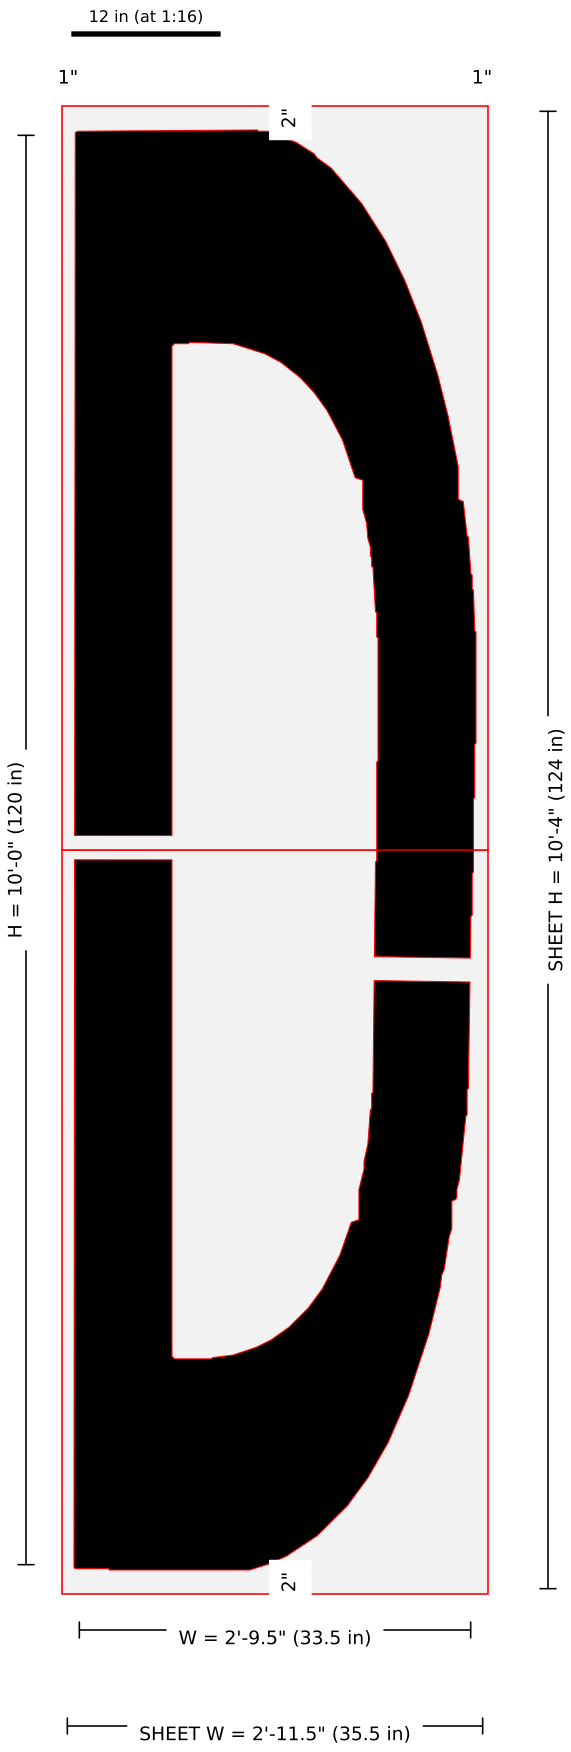

Pieces: 2 (1 x 2); blanks (in): 35.5 x 62, 35.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120D-120in-FAA-Airport-Letter-D-134x48-2.jpg: width 33.5 from image scale (33.29); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (29.02,50.05) stroke 7.984" w=1.996"; (4.11,60.19) stroke 8.11" w=2.027" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-D · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

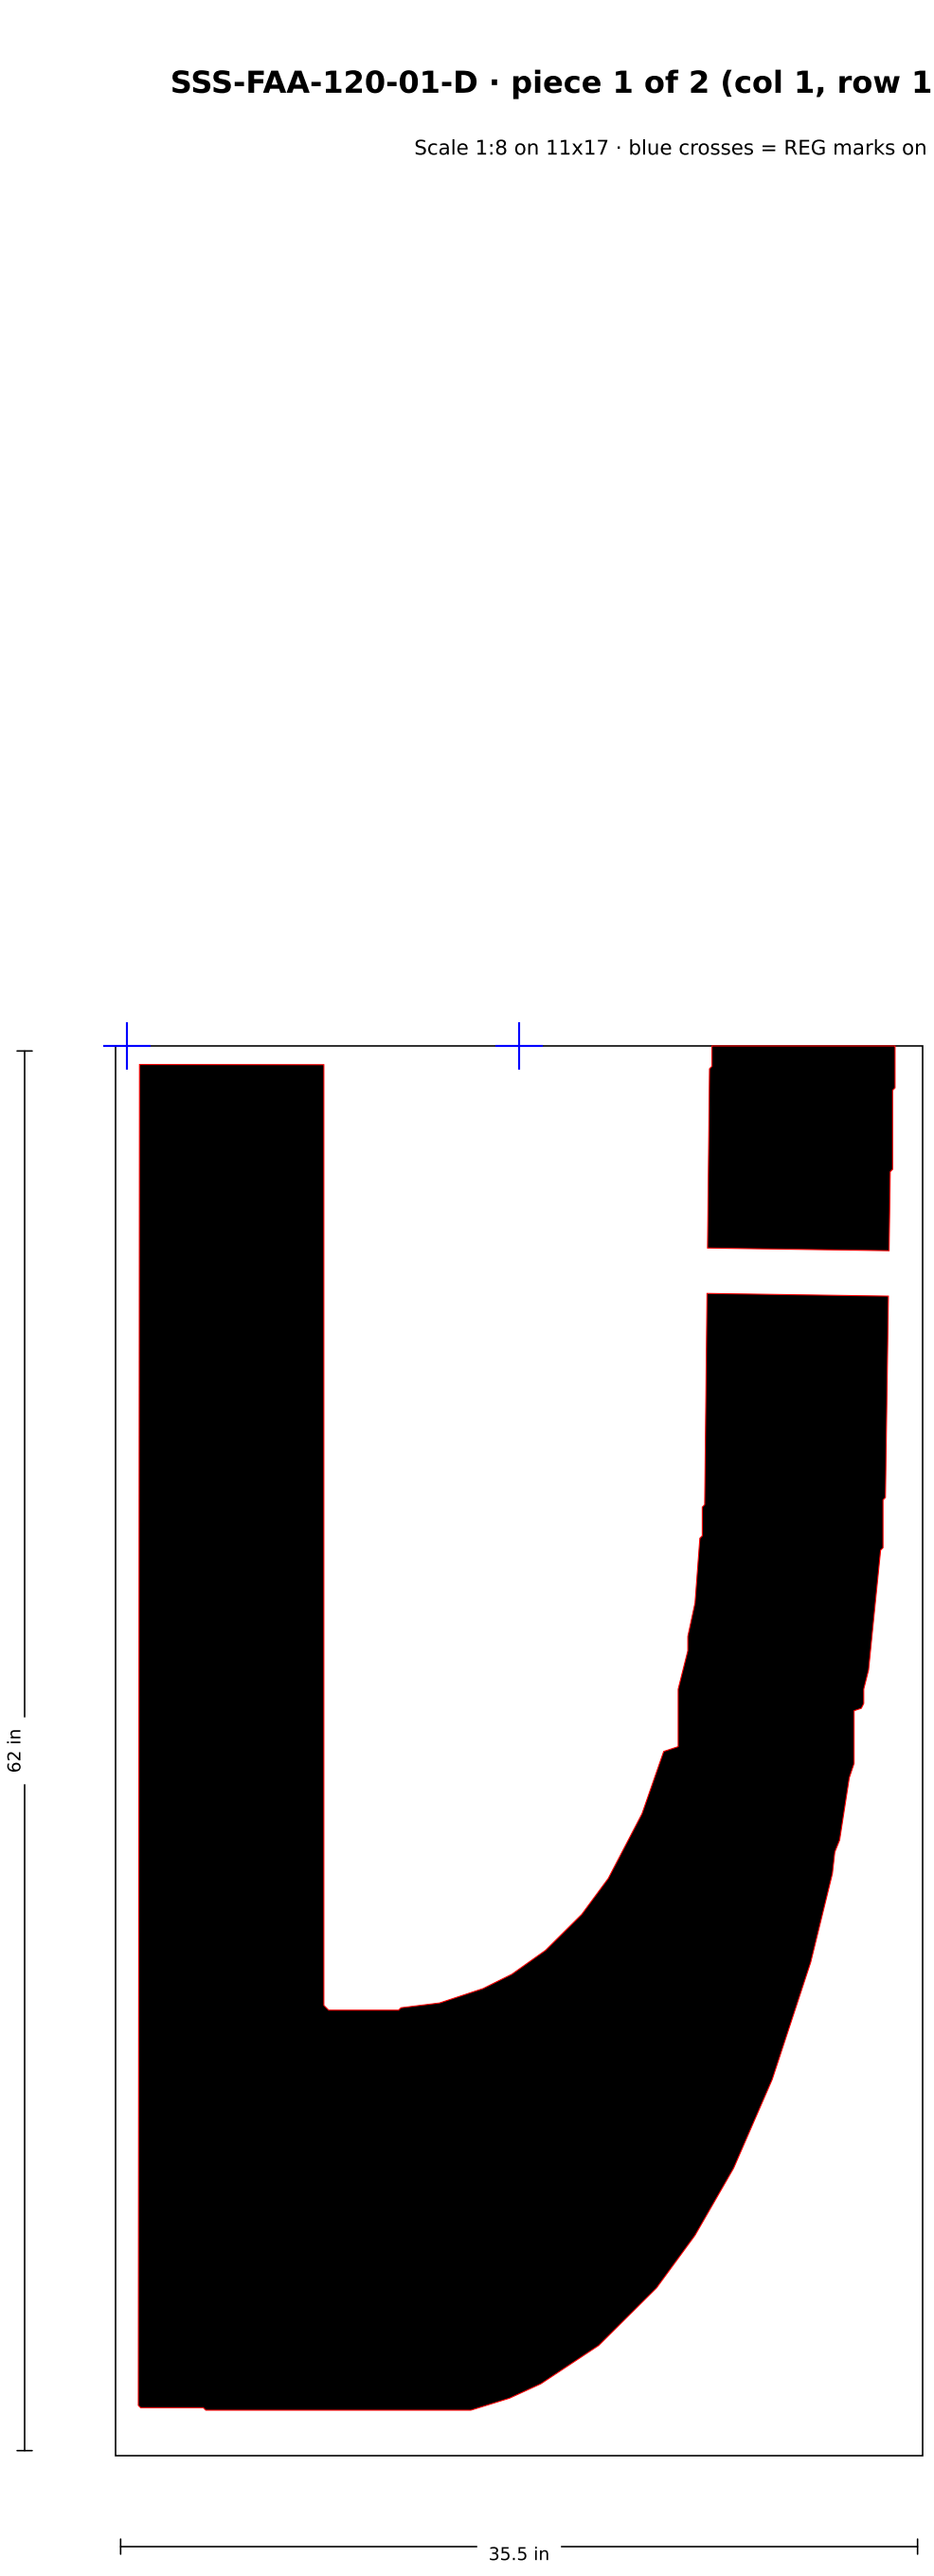

SSS-FAA-120-01-D · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

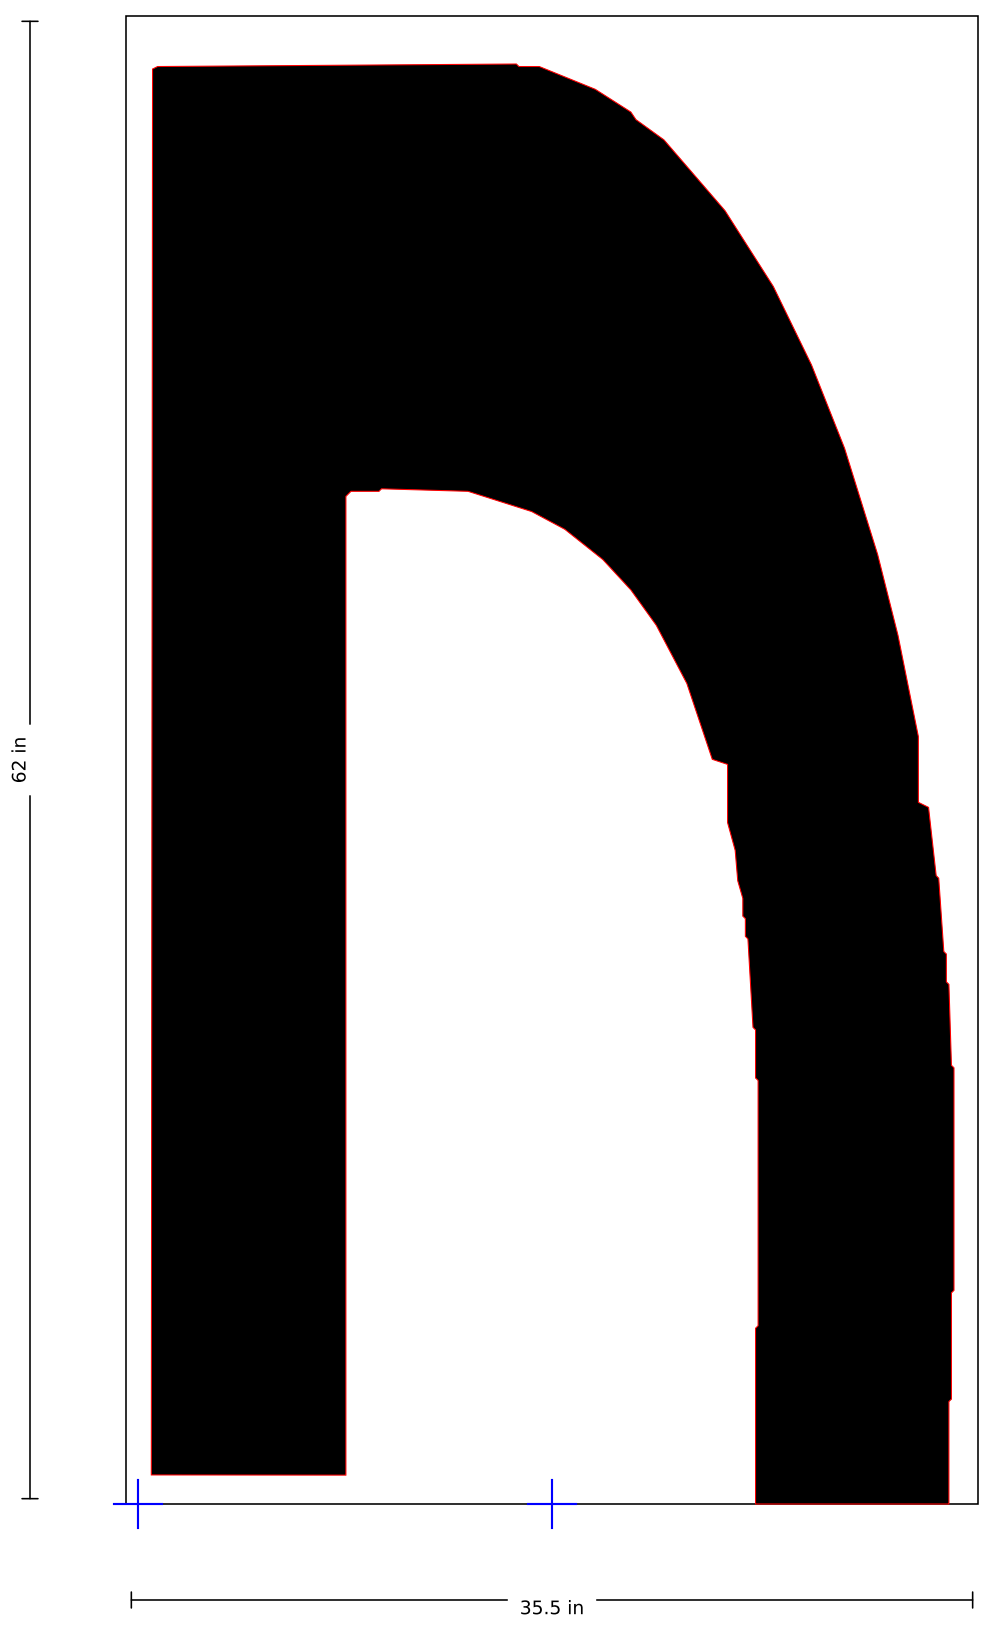

SSS-FAA-120-01-E

120" FAA Airport "E" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

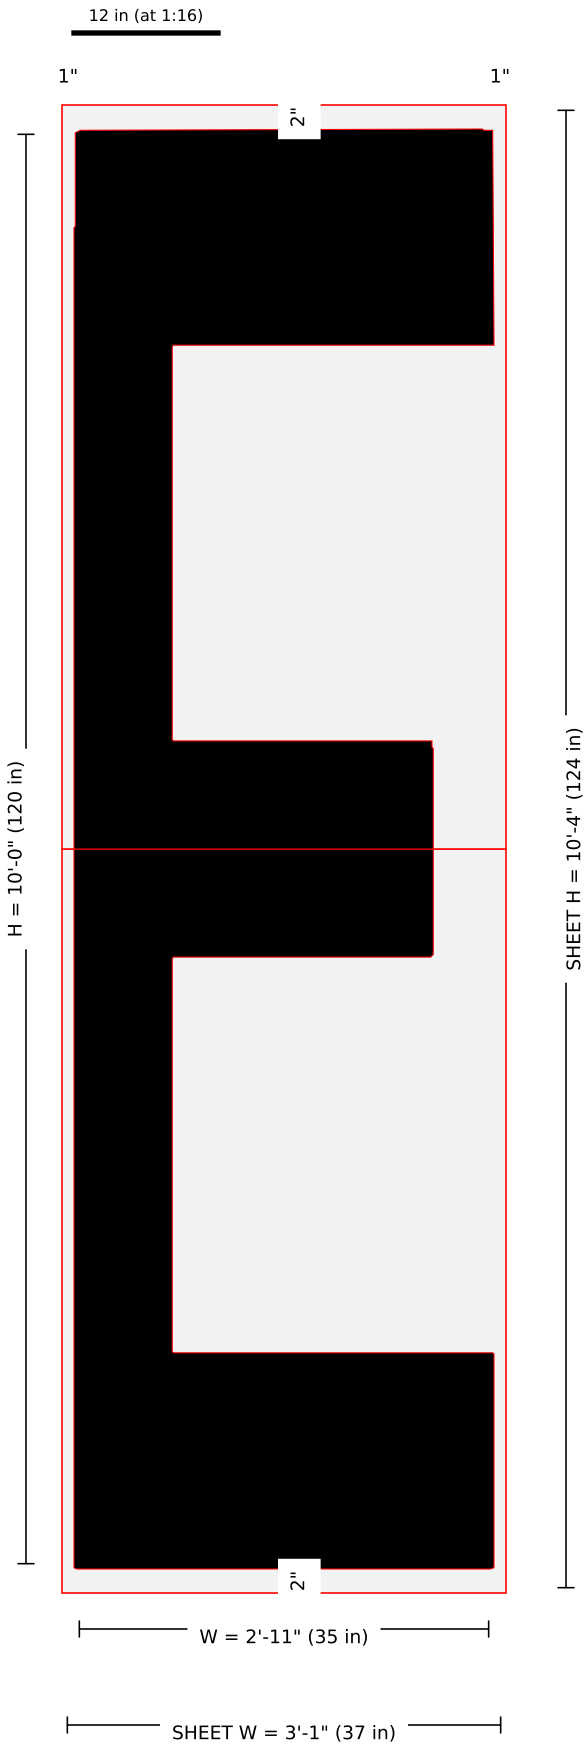

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120E-120in-FAA-Airport-Letter-E-134x48-2.jpg: width = kit listing 35 (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-E · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

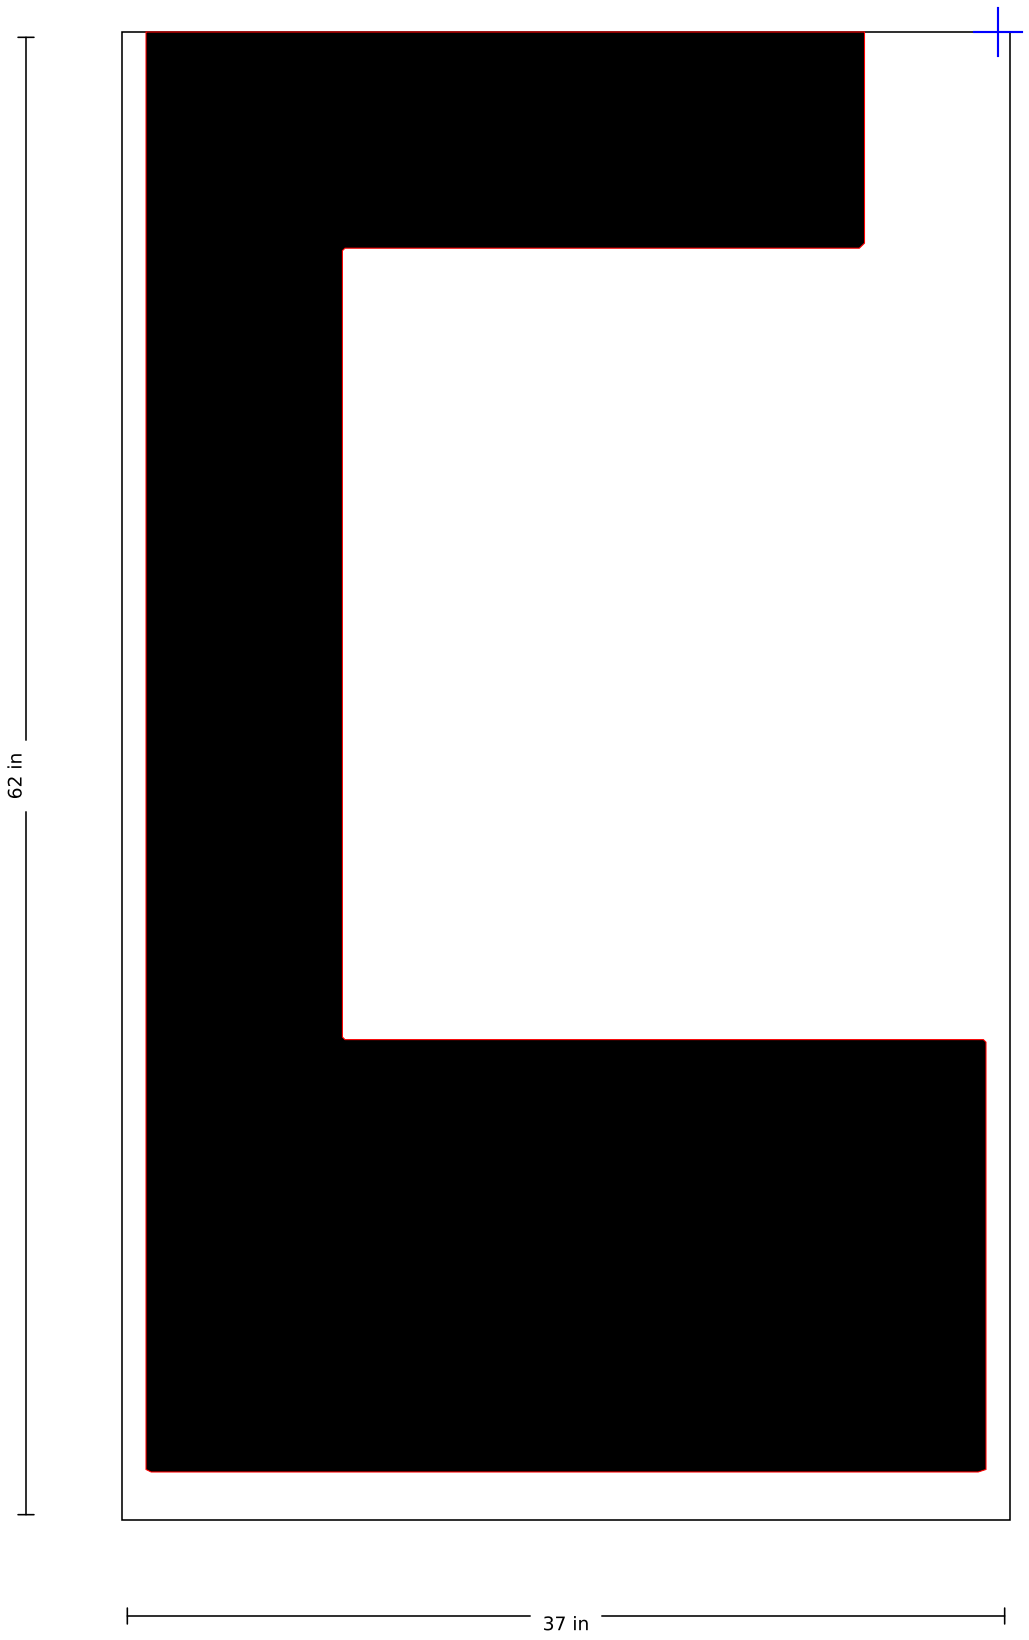

SSS-FAA-120-01-E · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

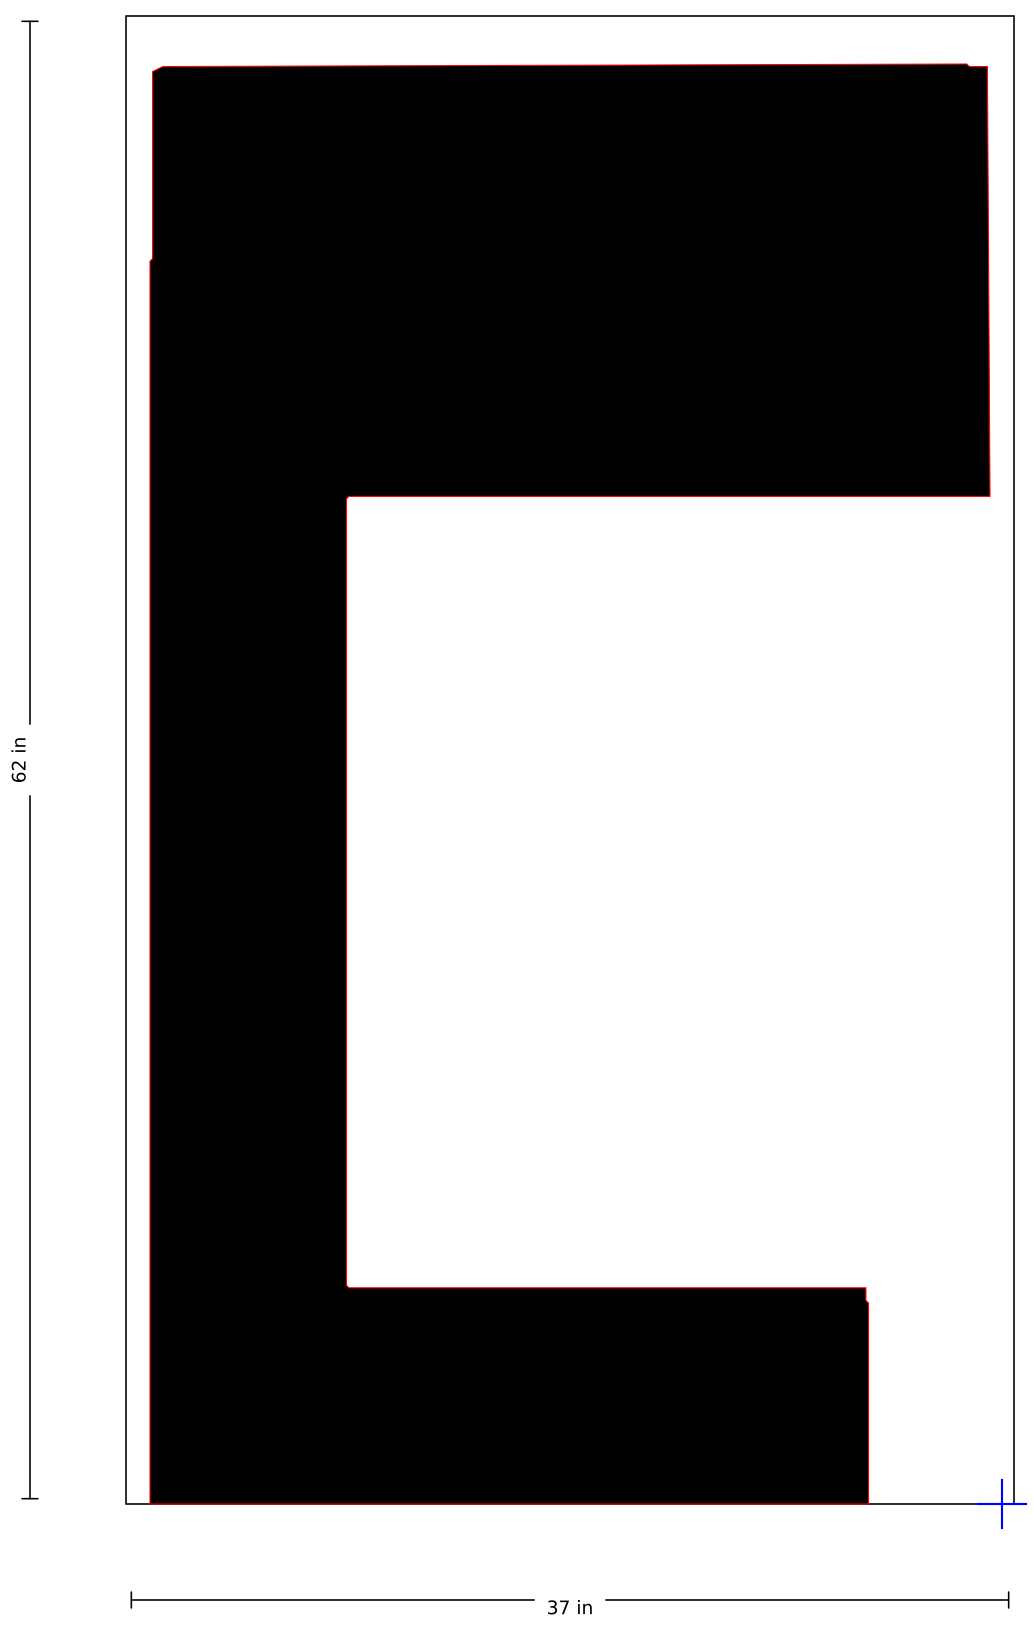

SSS-FAA-120-01-F

120" FAA Airport "F" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

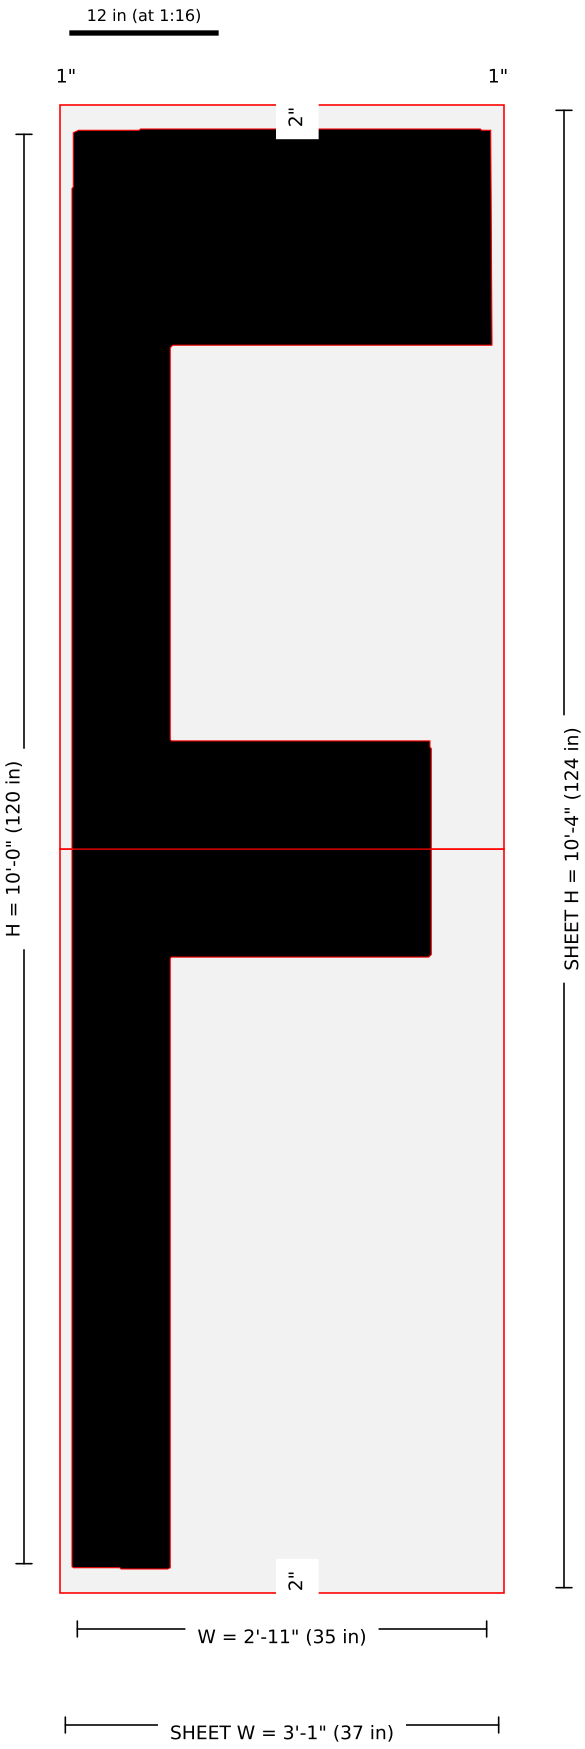

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120F-120in-FAA-Airport-Letter-F-134x48-2.jpg: width = kit listing 35 (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-F · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

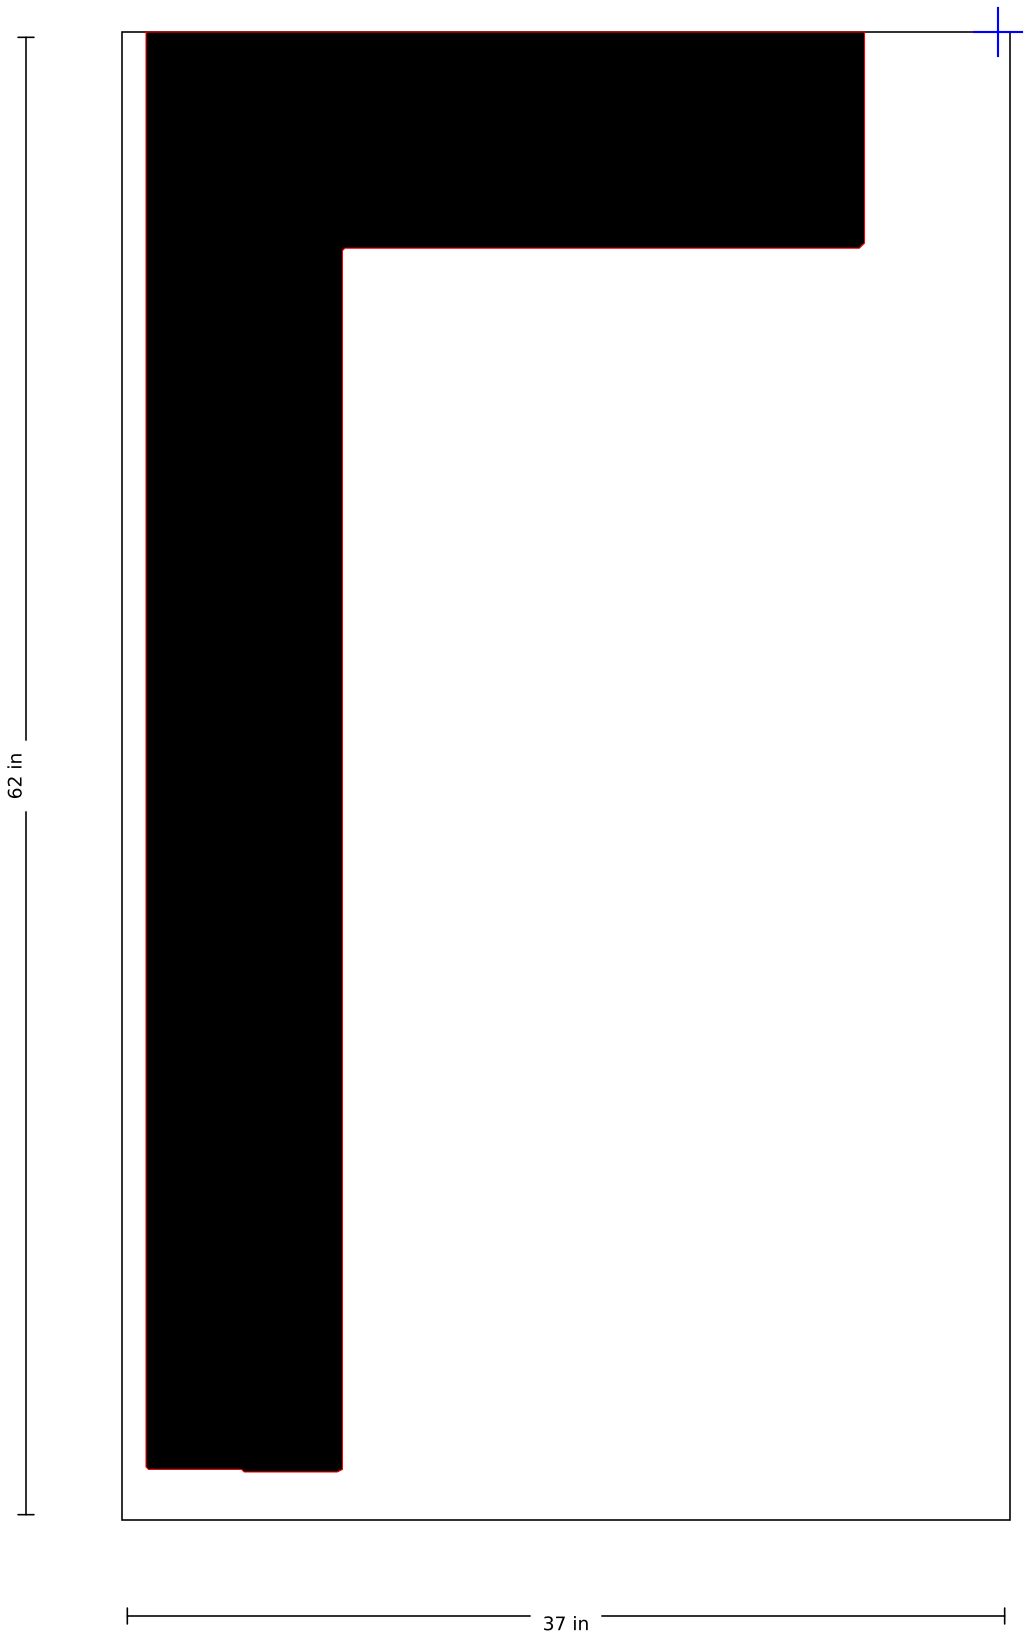

SSS-FAA-120-01-F · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

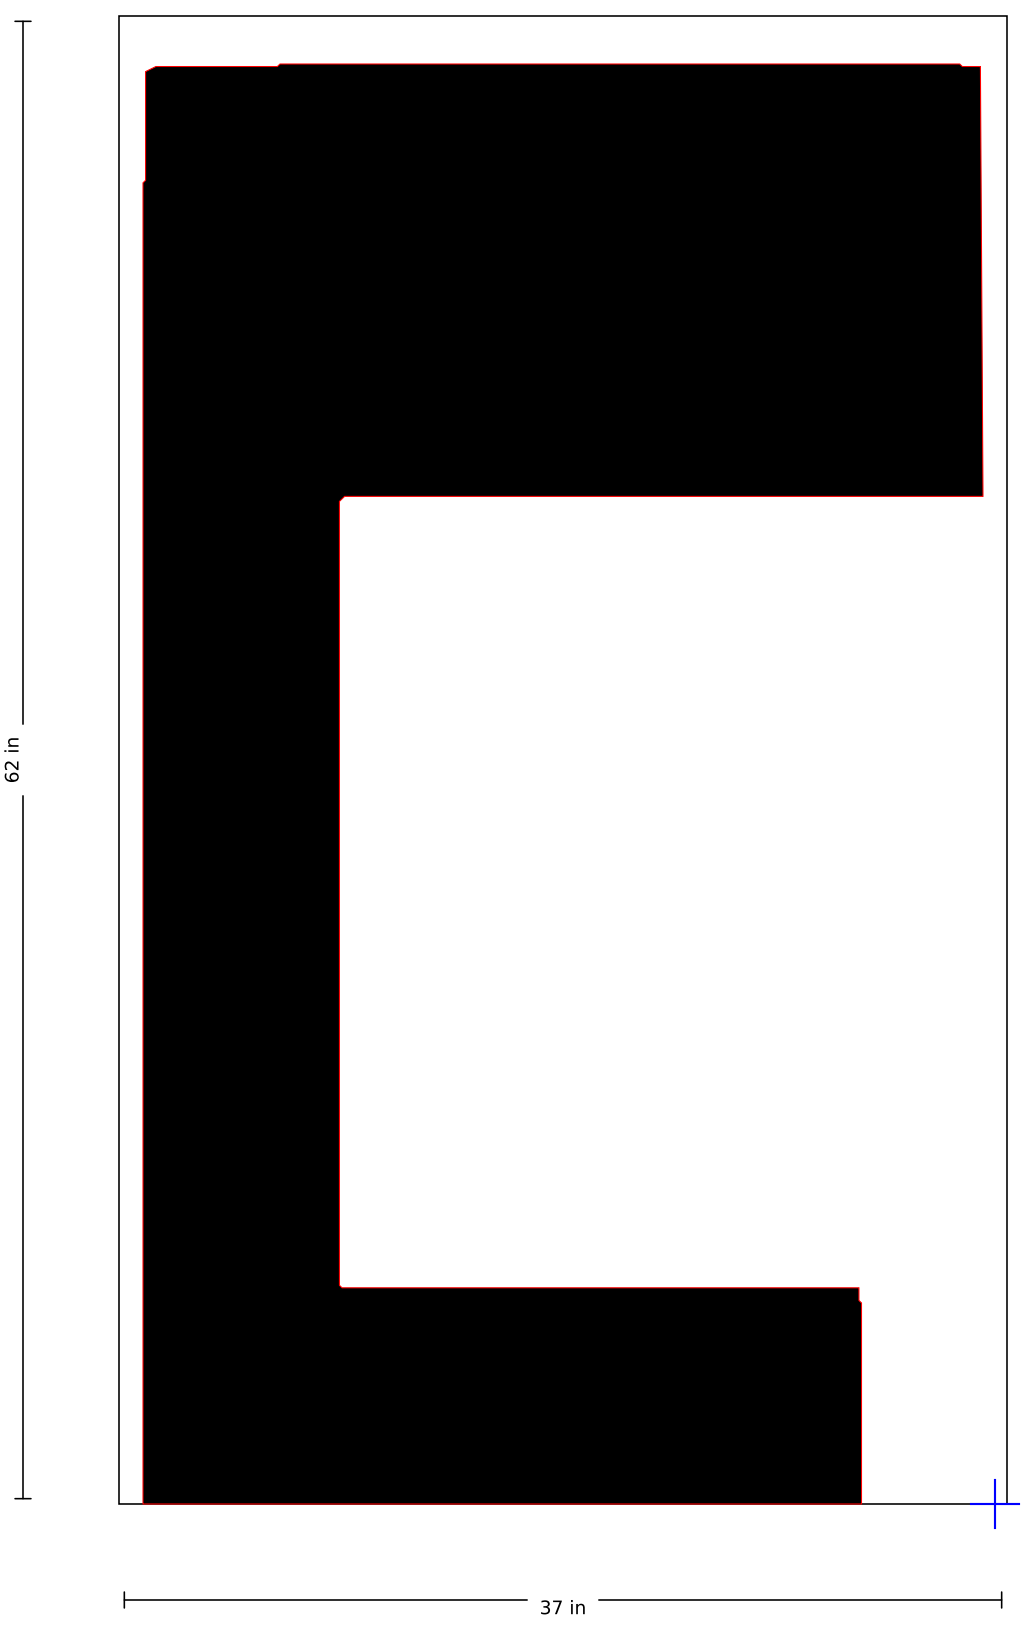

SSS-FAA-120-01-G

120" FAA Airport "G" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

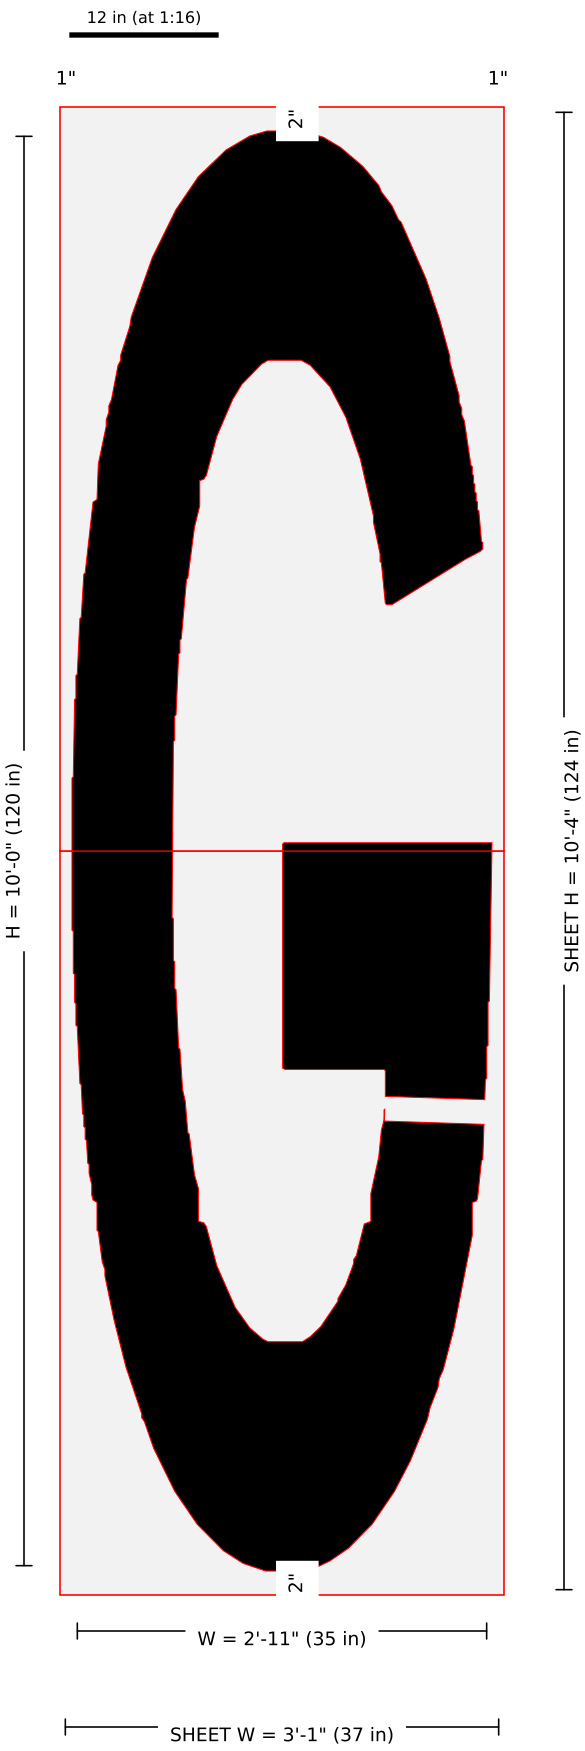

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120G-120in-FAA-Airport-Letter-G-134x48-2.jpg: width = kit listing 35 (image-scale 33.67); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-G · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

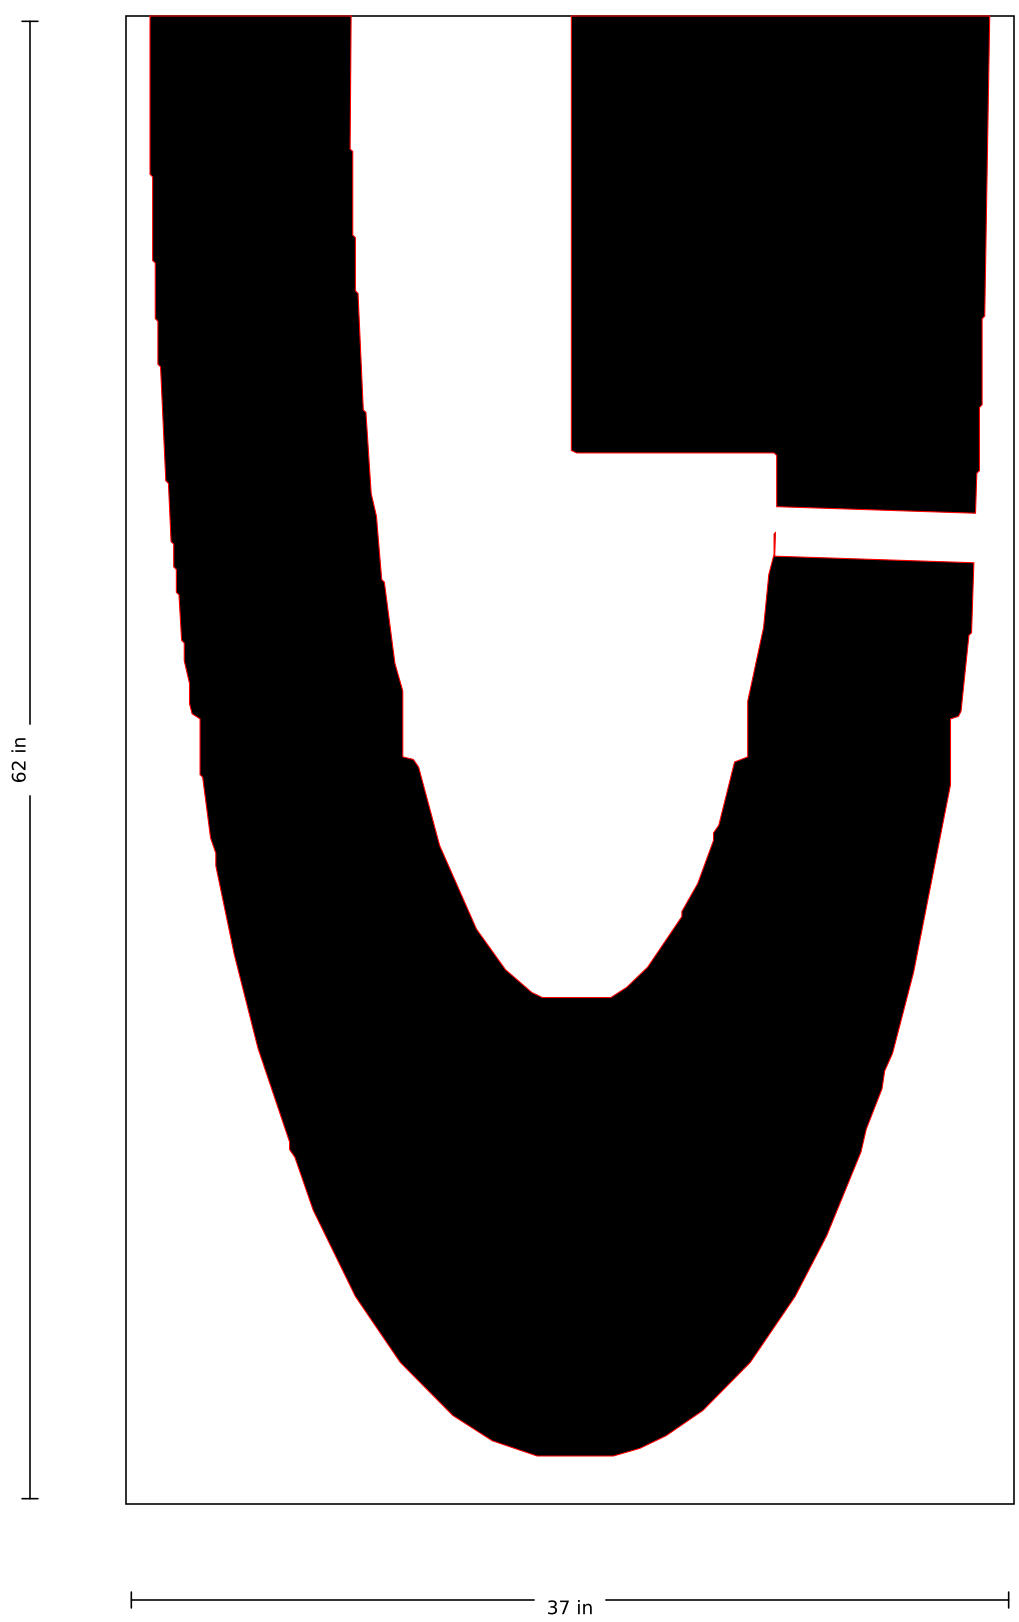

SSS-FAA-120-01-G · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

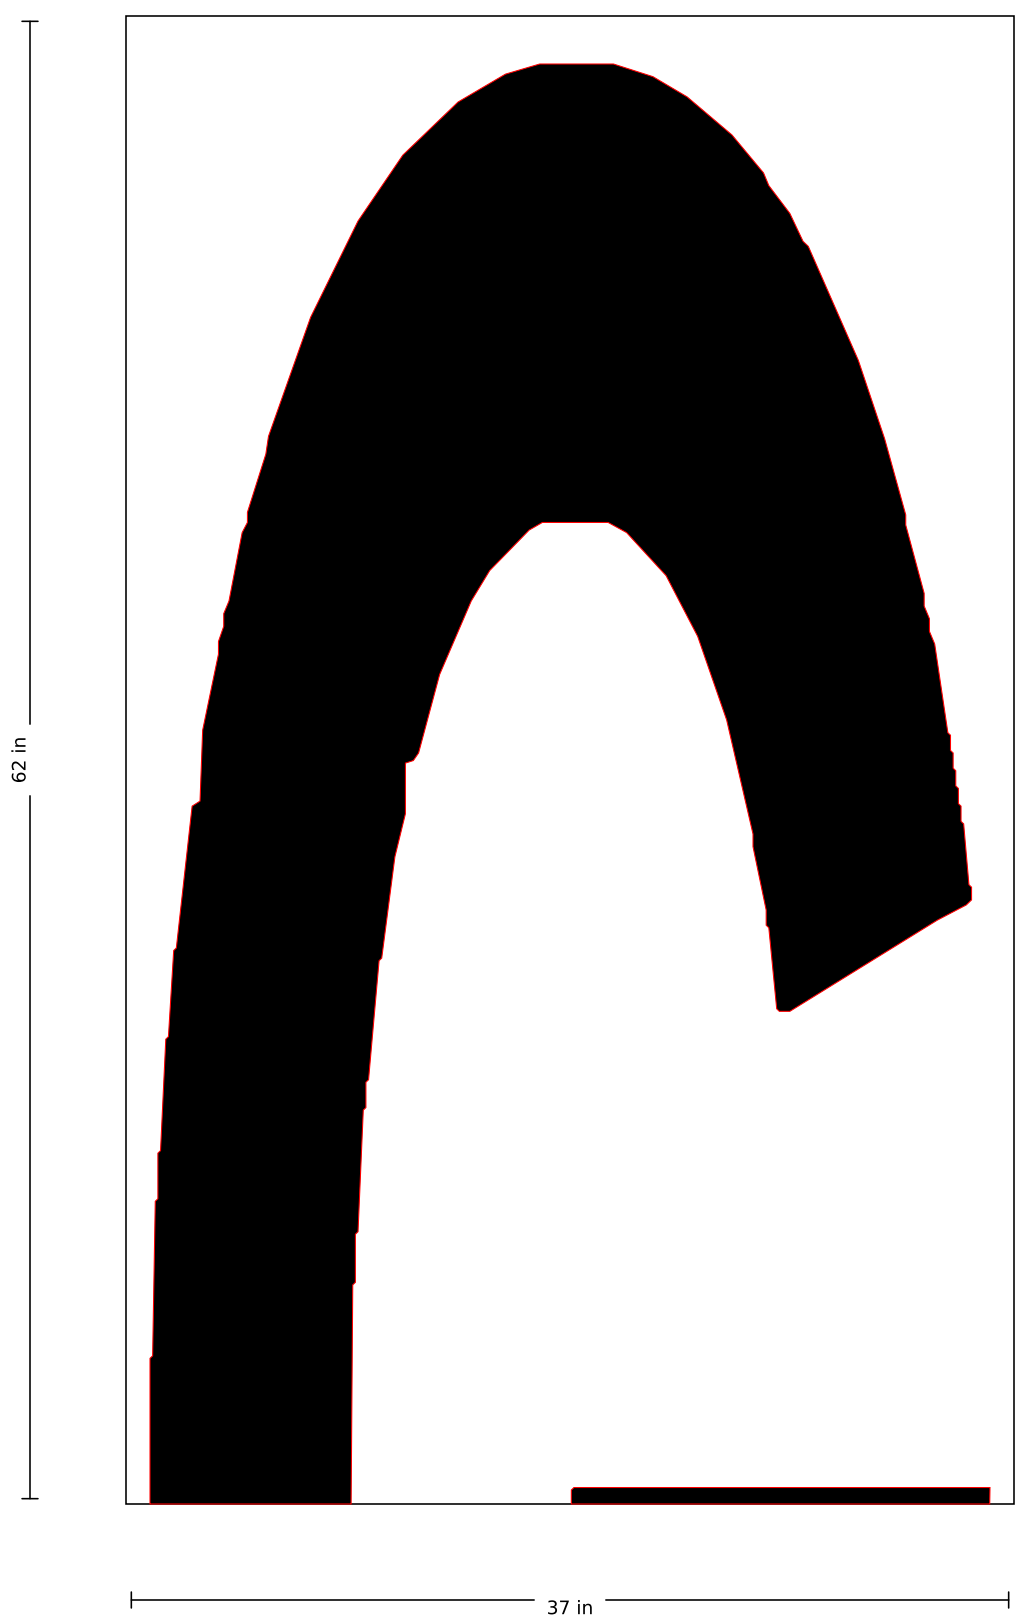

SSS-FAA-120-01-H

120" FAA Airport "H" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

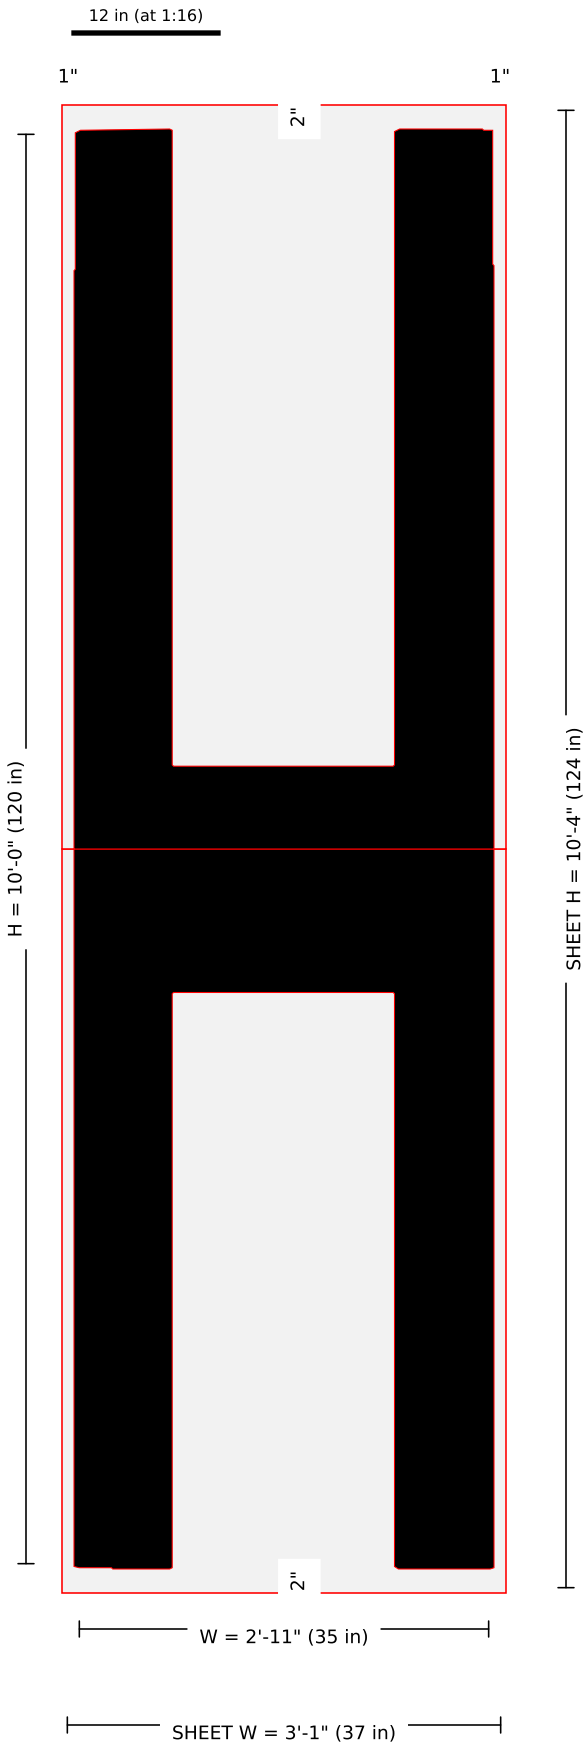

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120H-120in-FAA-Airport-Letter-H-134x48-2.jpg: width = kit listing 35 (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-H · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

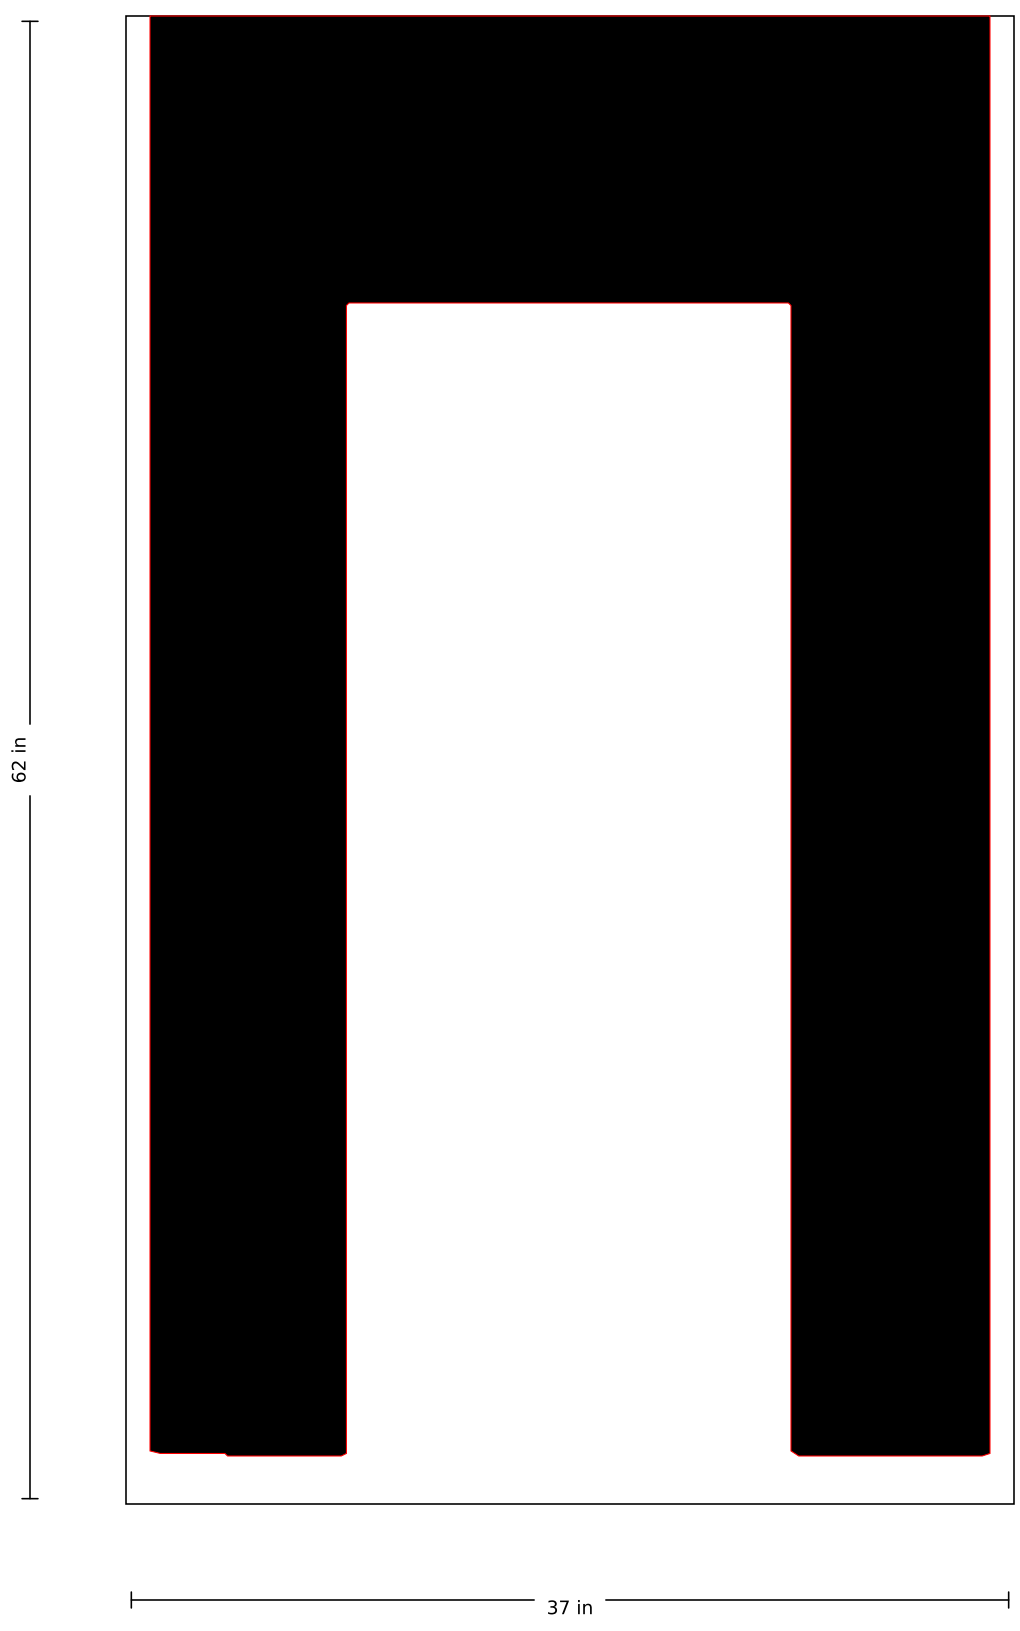

SSS-FAA-120-01-H · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

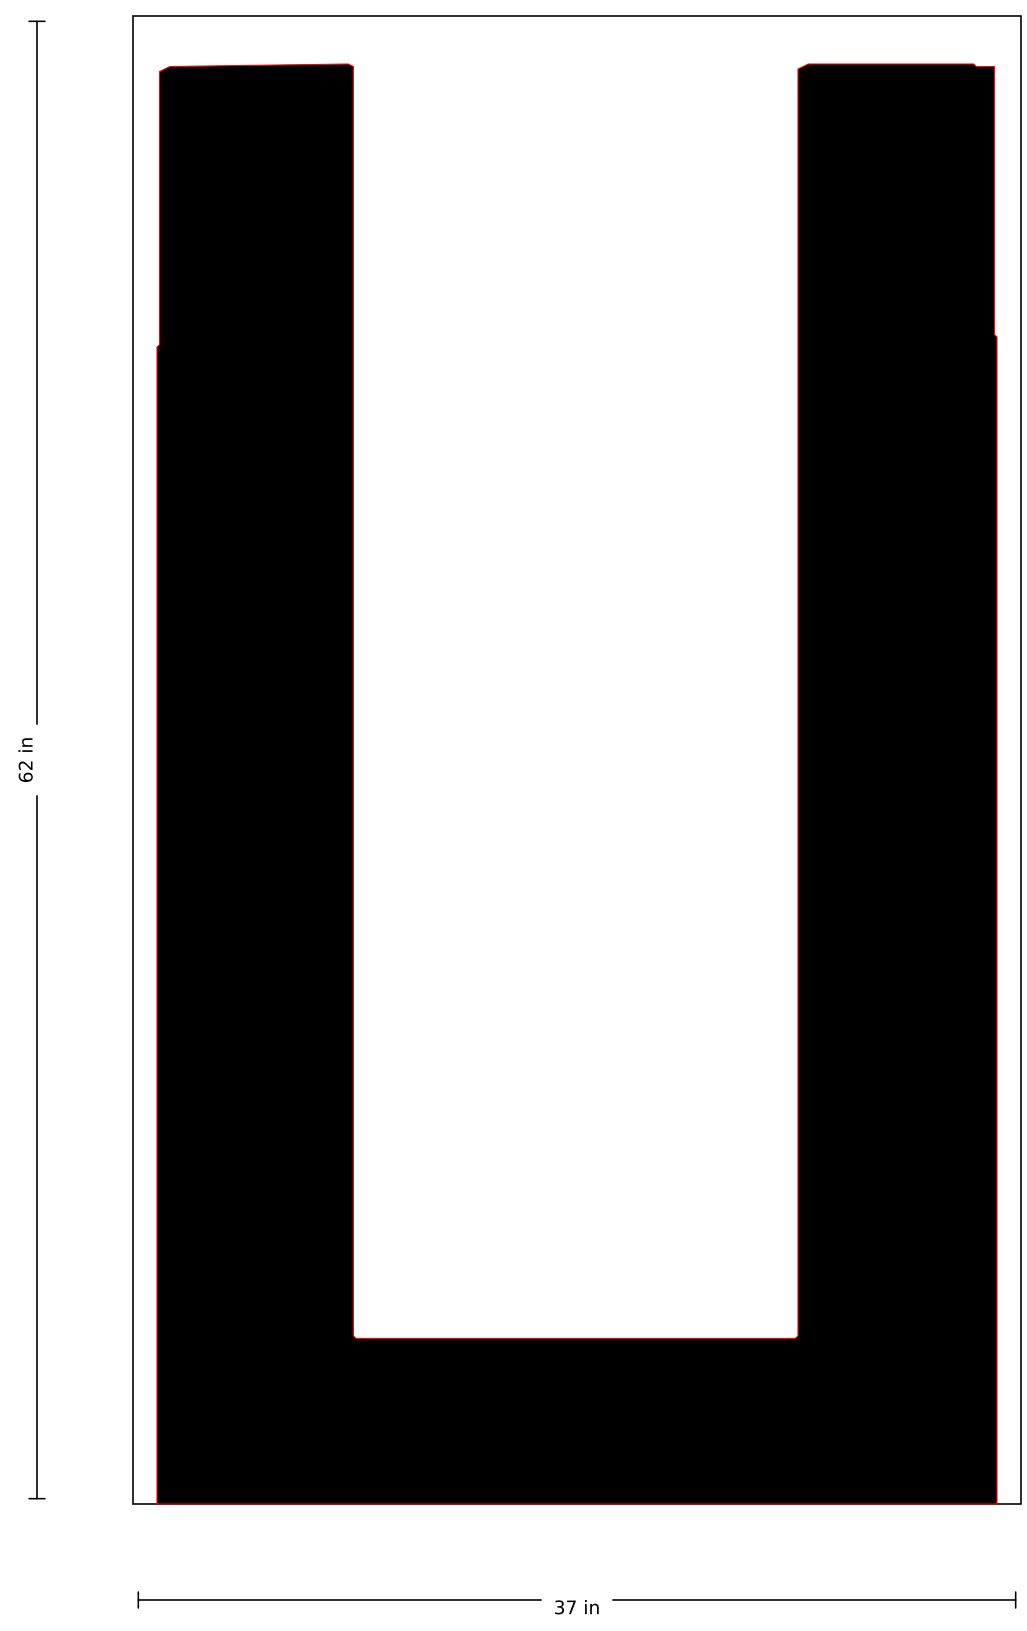

SSS-FAA-120-01-I

120" FAA Airport "I" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 8 W x 120 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

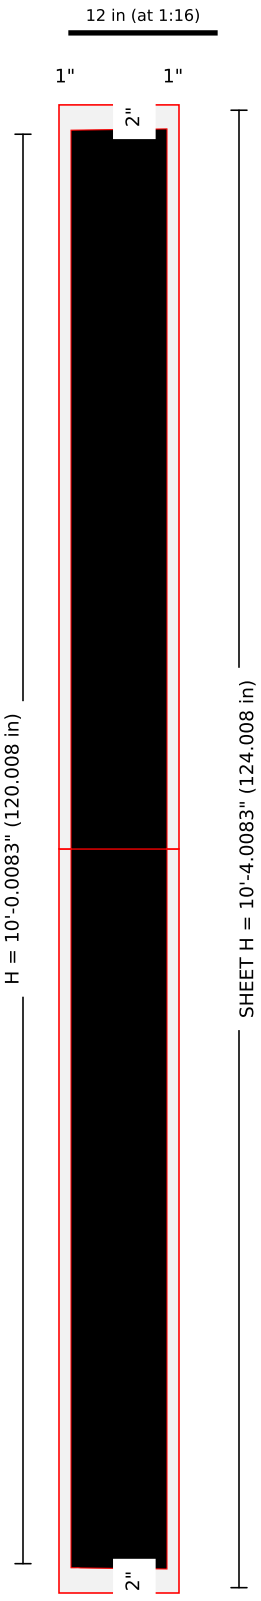


W = 8" (8 in)

SHEET W = 10" (10 in)

Pieces: 2 (1 x 2); blanks (in): 10 x 62.004, 10 x 62.004 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120I-120in-FAA-Airport-Letter-I-134x48-2.jpg: width 8 from image scale (8.11); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-I · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

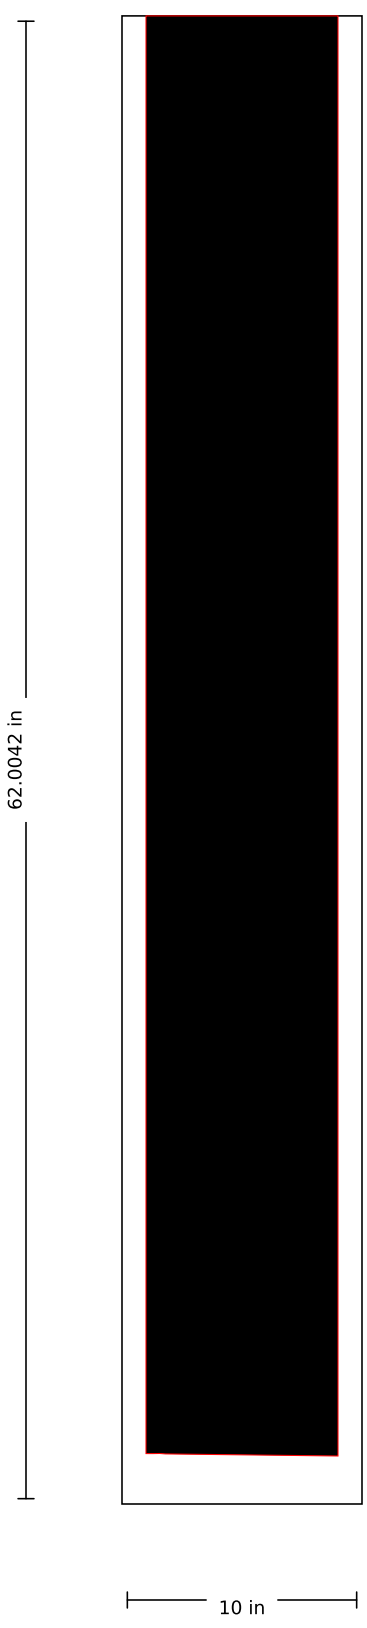

SSS-FAA-120-01-I · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

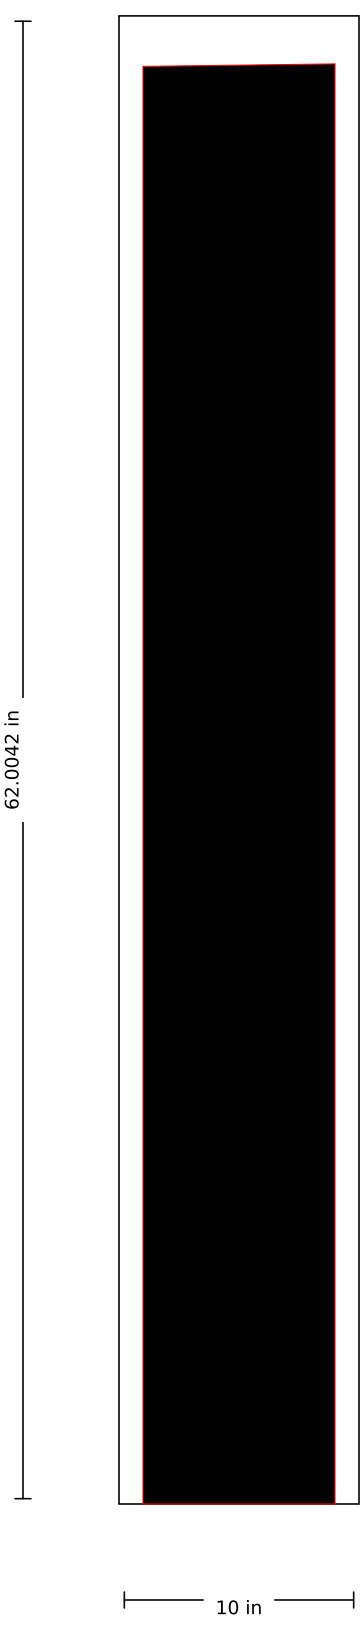

SSS-FAA-120-01-J

120" FAA Airport "J" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 31.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

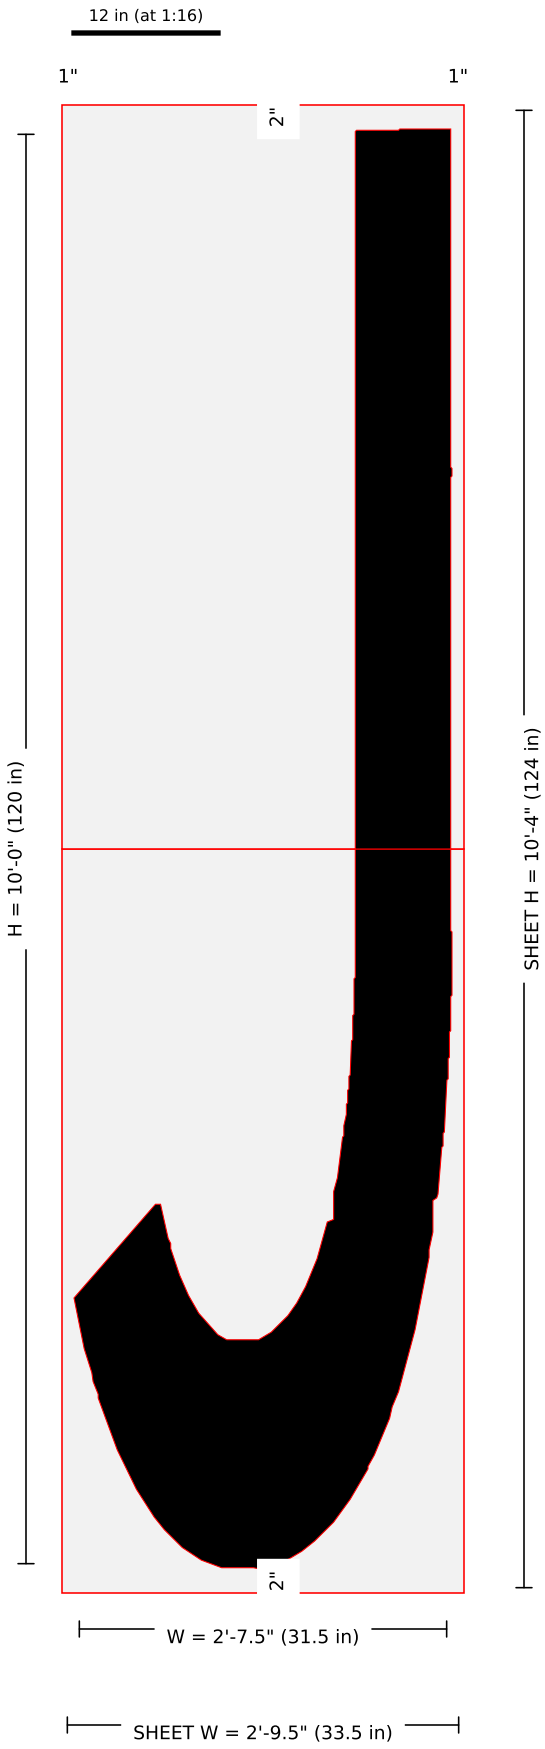

Pieces: 2 (1 x 2); blanks (in): 33.5 x 62, 33.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120J-120in-FAA-Airport-Letter-J-134x48-2.jpg: width 31.5 from image scale (31.35); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-120-01-J · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

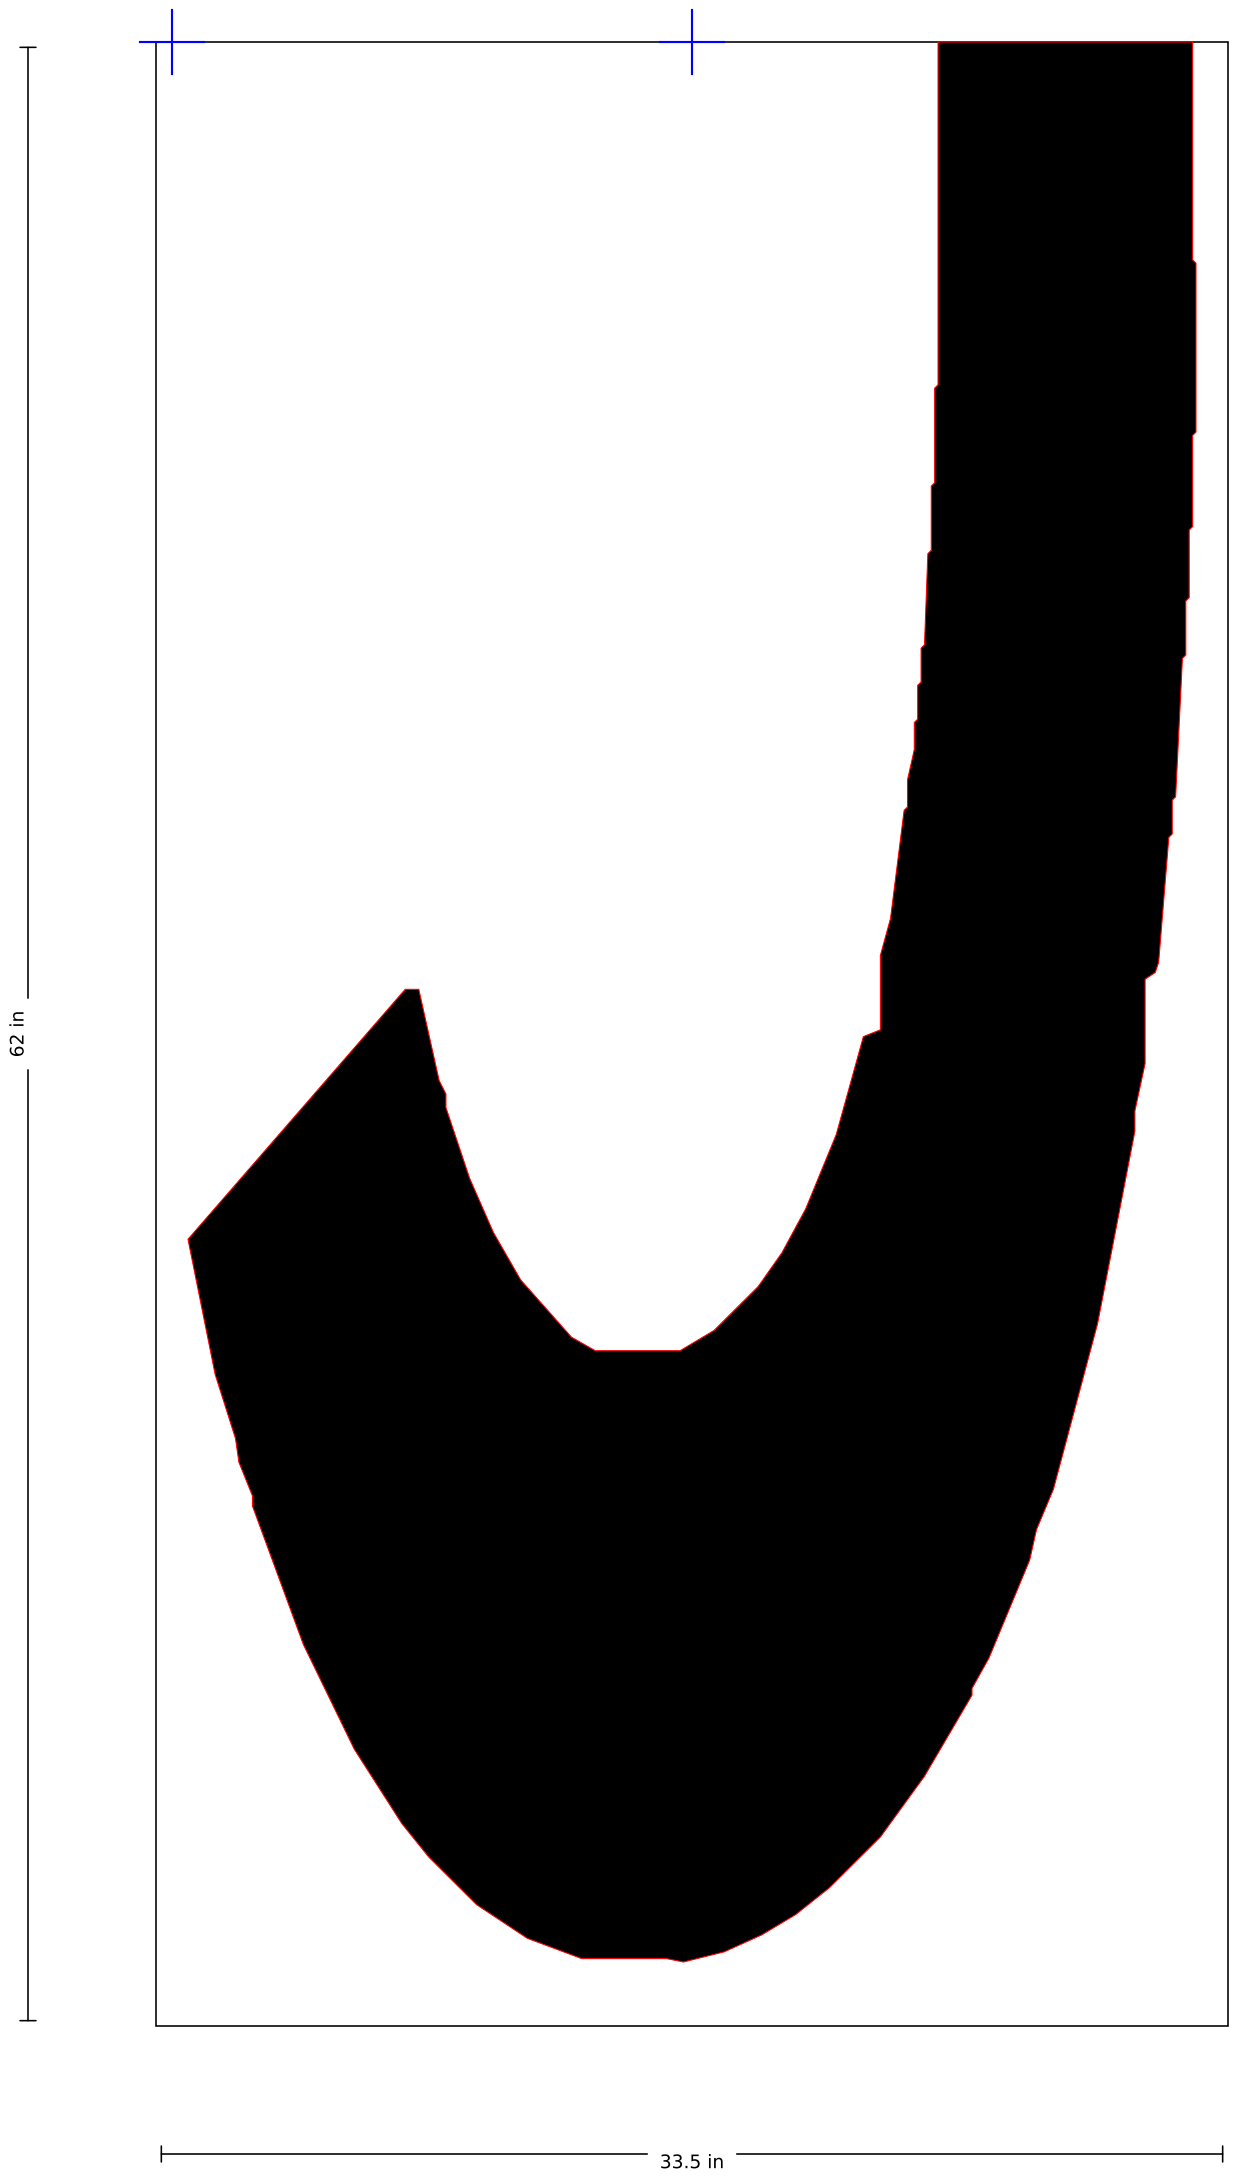

SSS-FAA-120-01-J · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams



SSS-FAA-120-01-K

120" FAA Airport "K" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

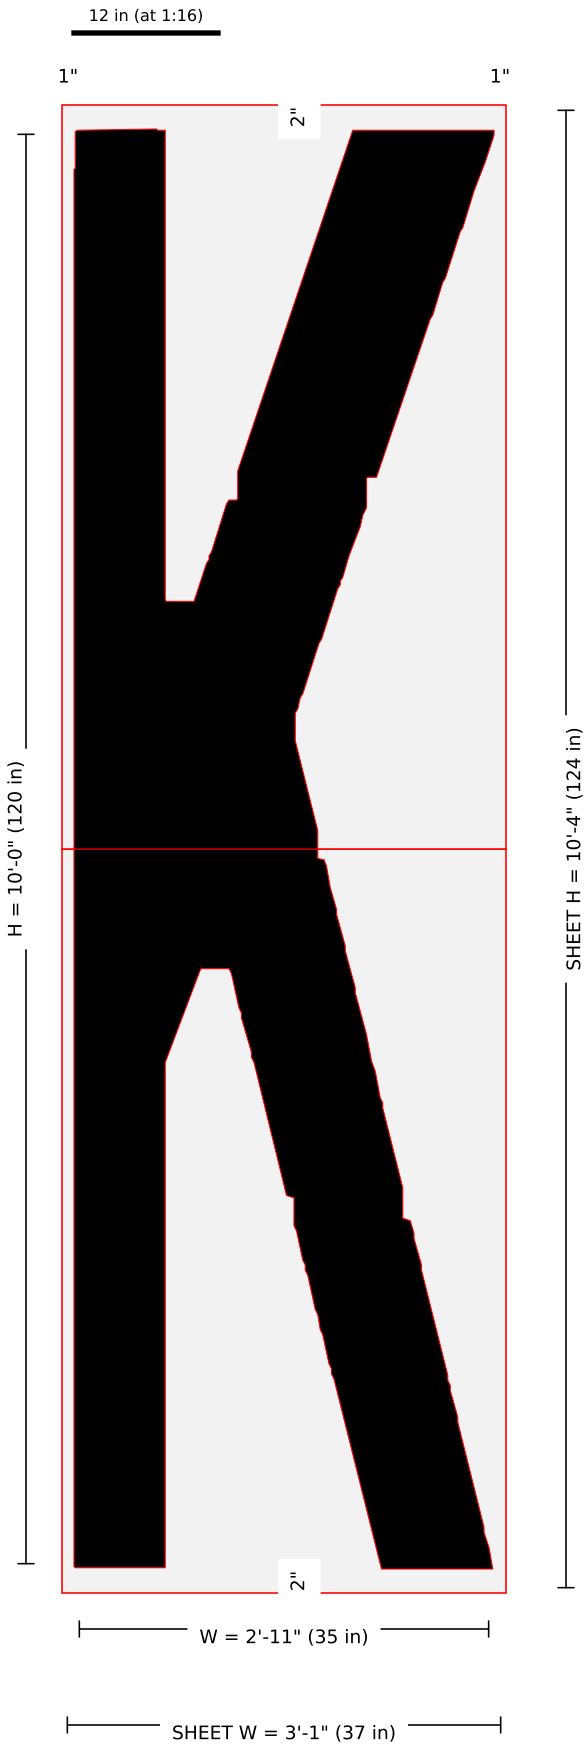

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120K-120in-FAA-Airport-Letter-K-134x48-2.jpg: width = kit listing 35 (image-scale 35.46); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-K · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

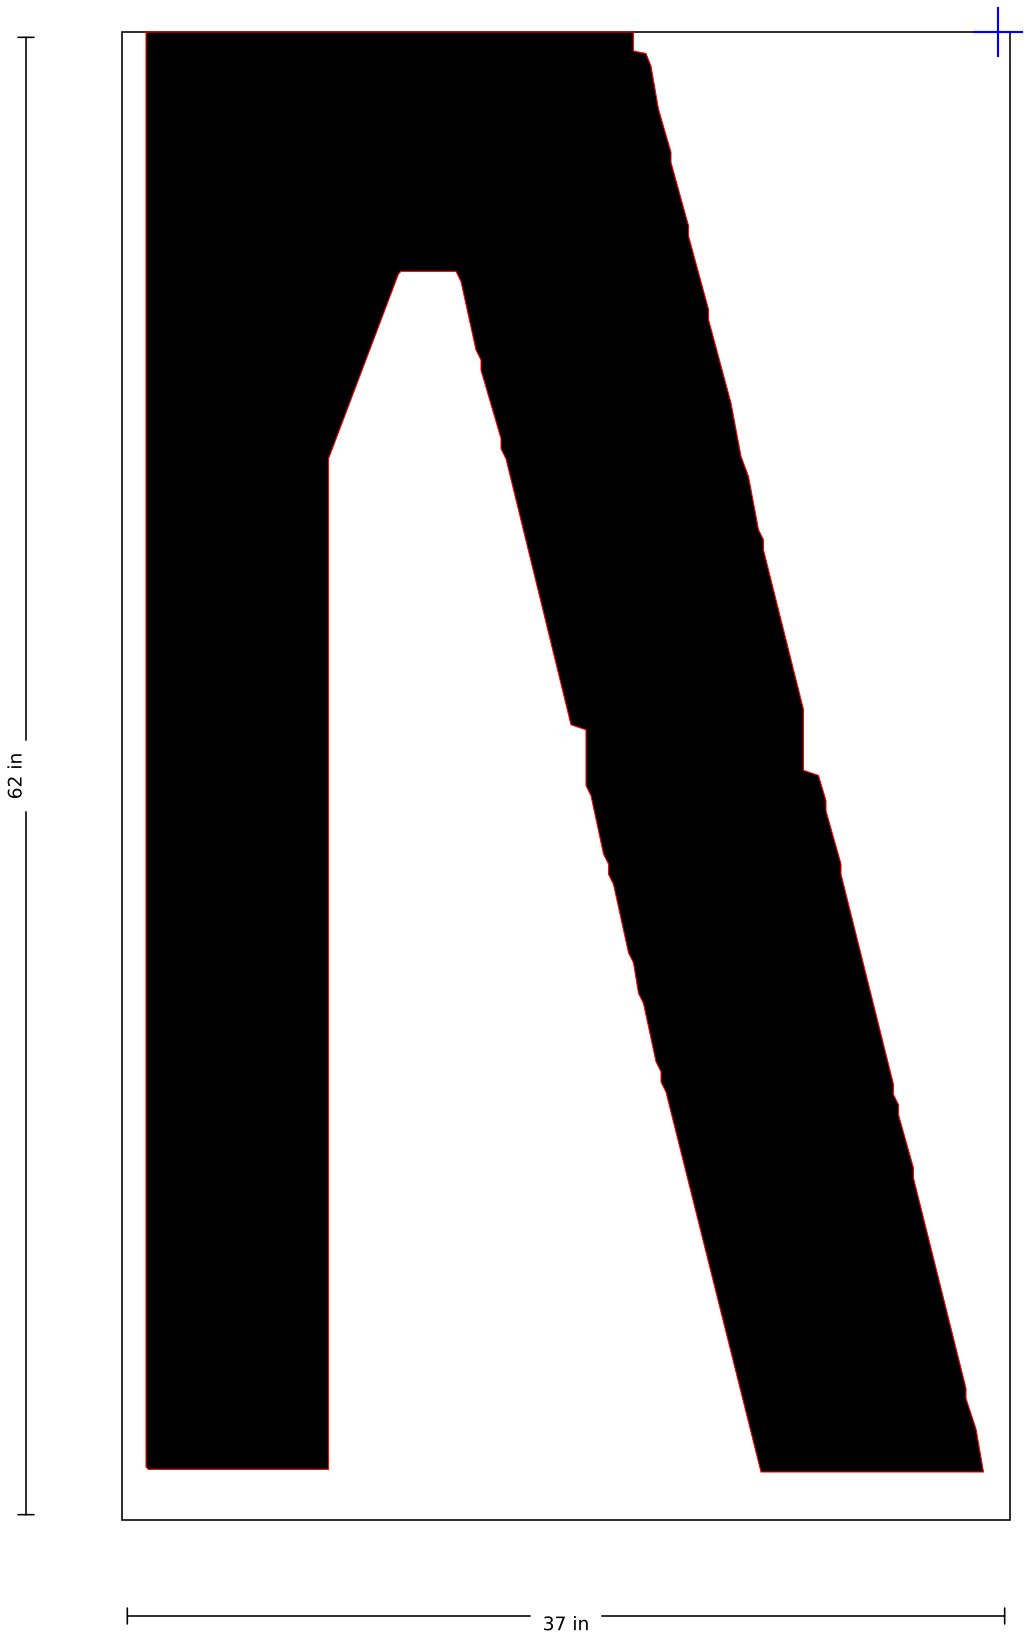

SSS-FAA-120-01-K · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

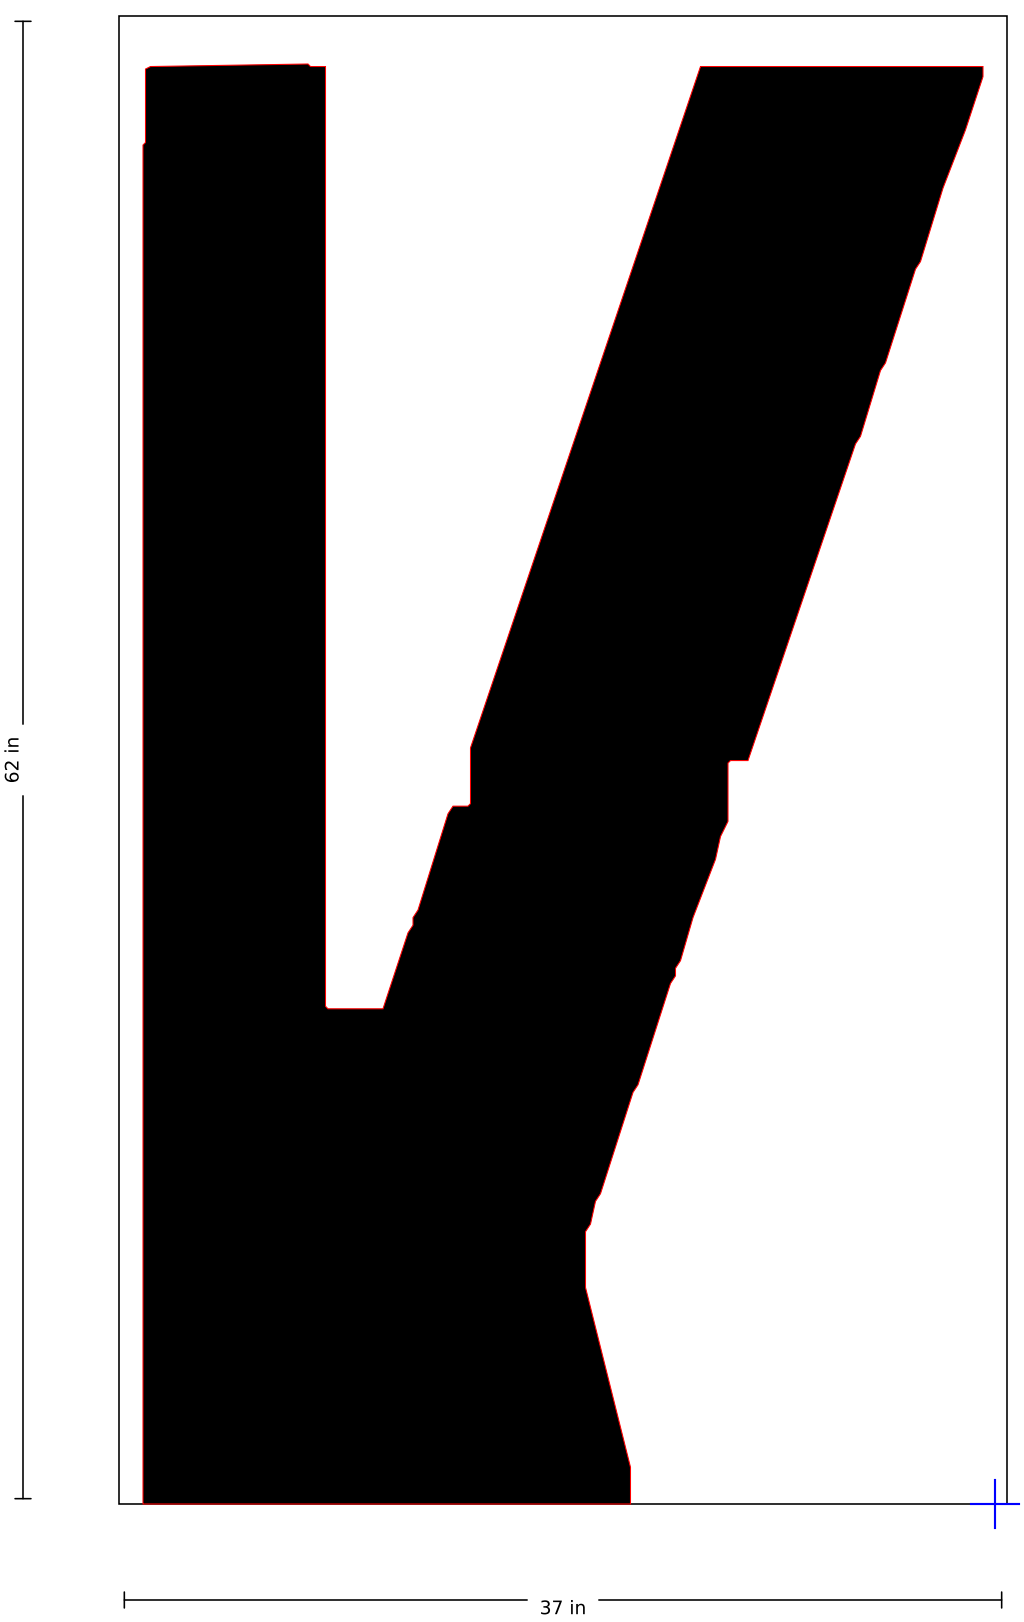

SSS-FAA-120-01-M

120" FAA Airport "M" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 39 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

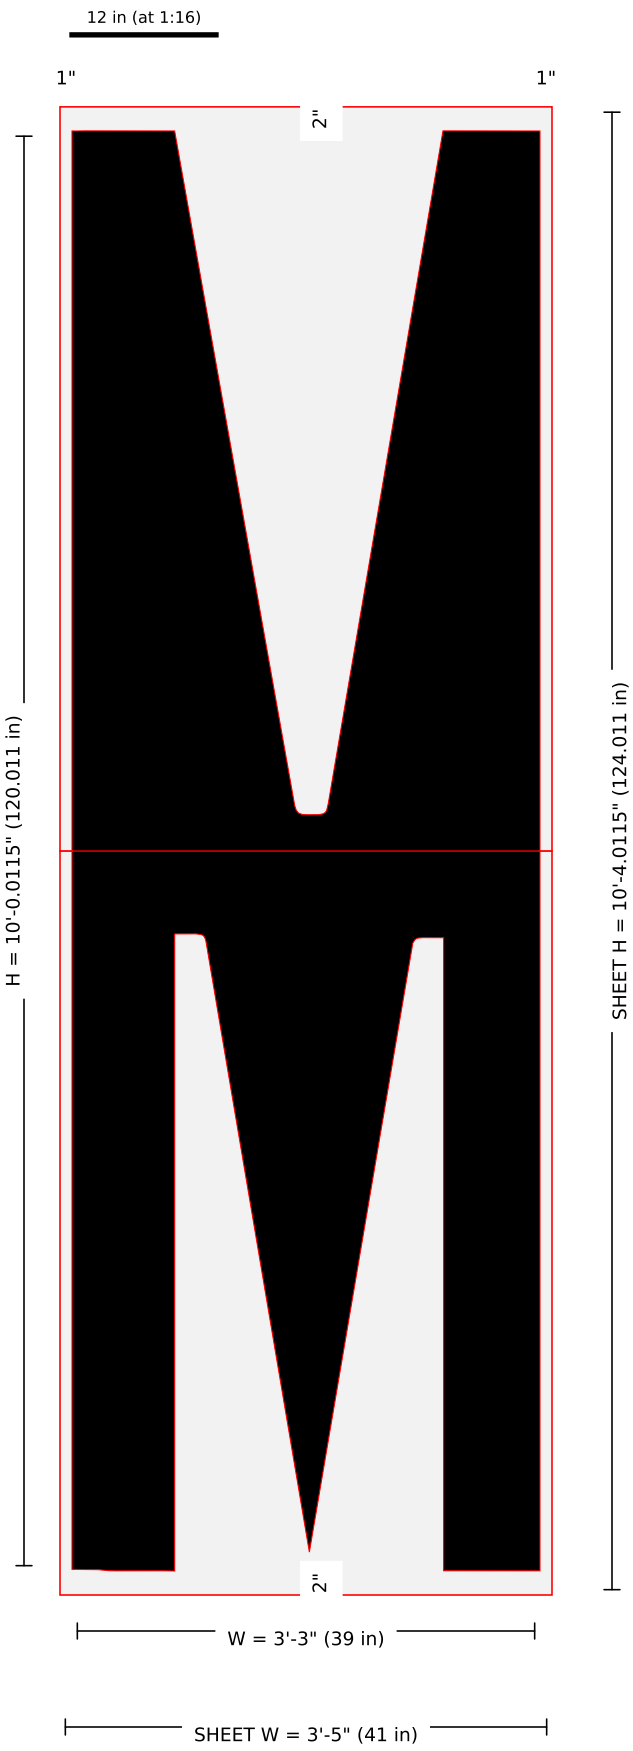

Pieces: 2 (1 x 2); blanks (in): 41 x 62.006, 41 x 62.006 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120M-120in-FAA-Airport-Letter-M-134x48-2.jpg: width 39 from image scale (38.94); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-M · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

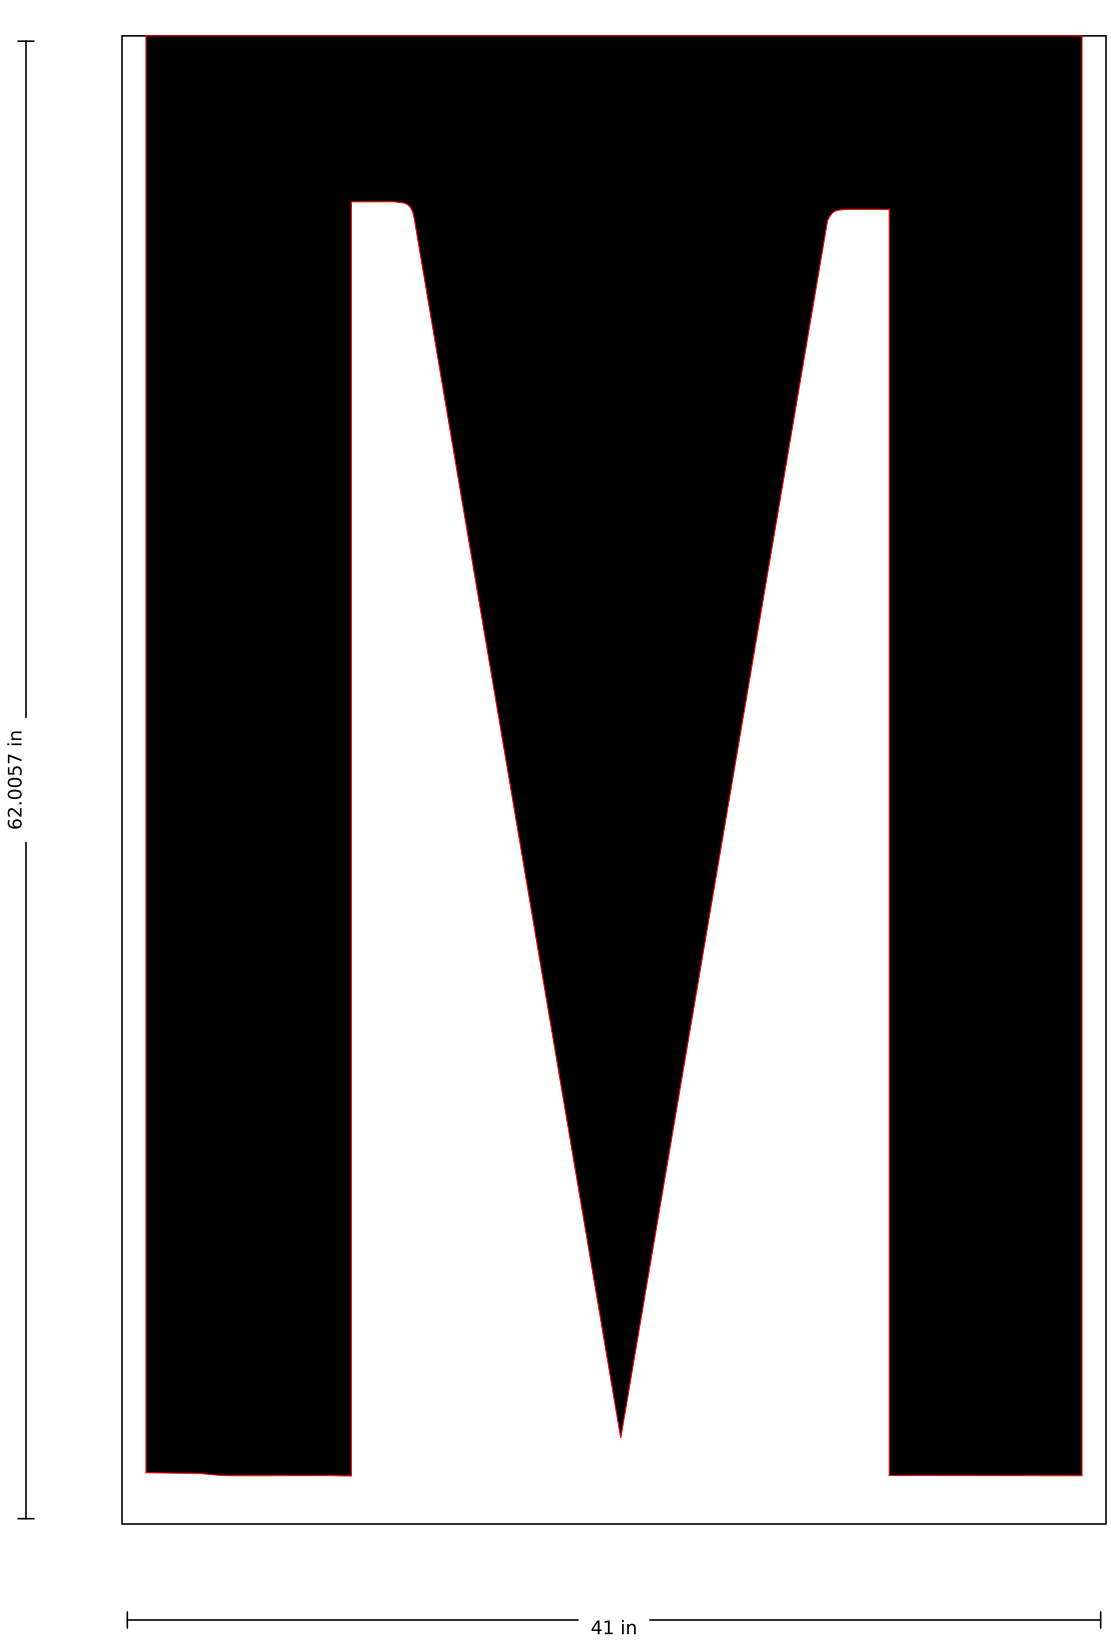

SSS-FAA-120-01-M · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

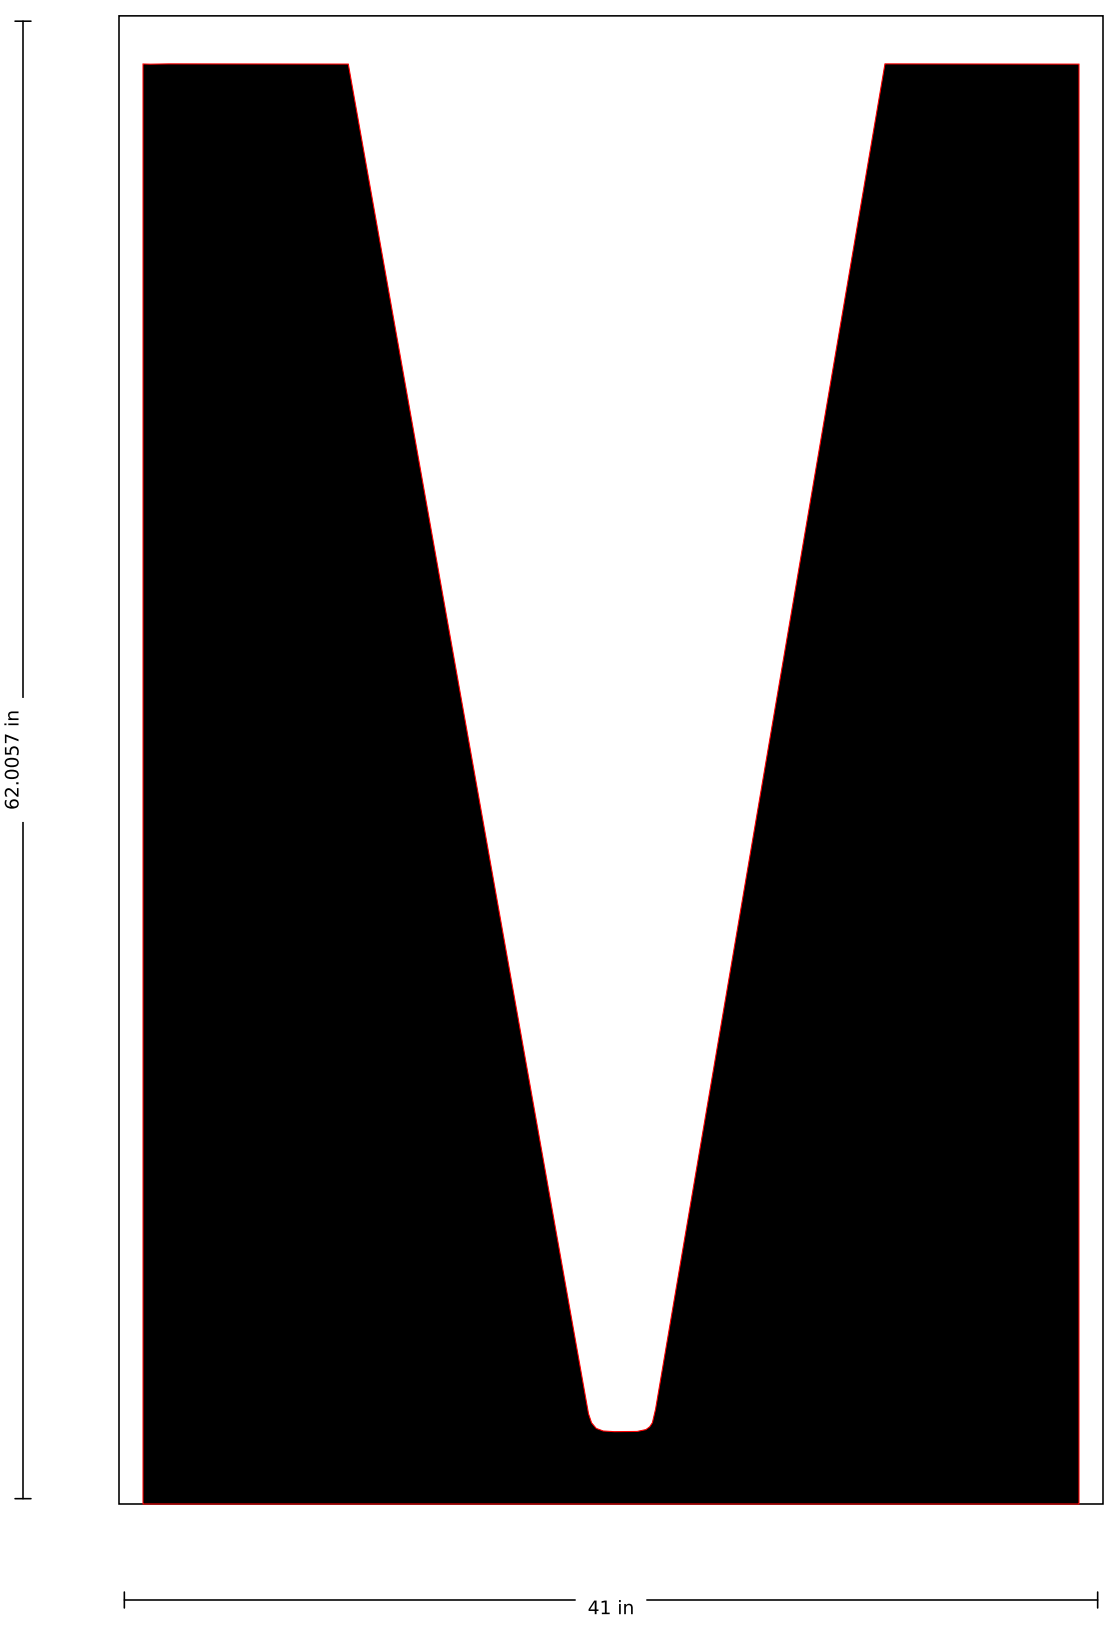

SSS-FAA-120-01-N

120" FAA Airport "N" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

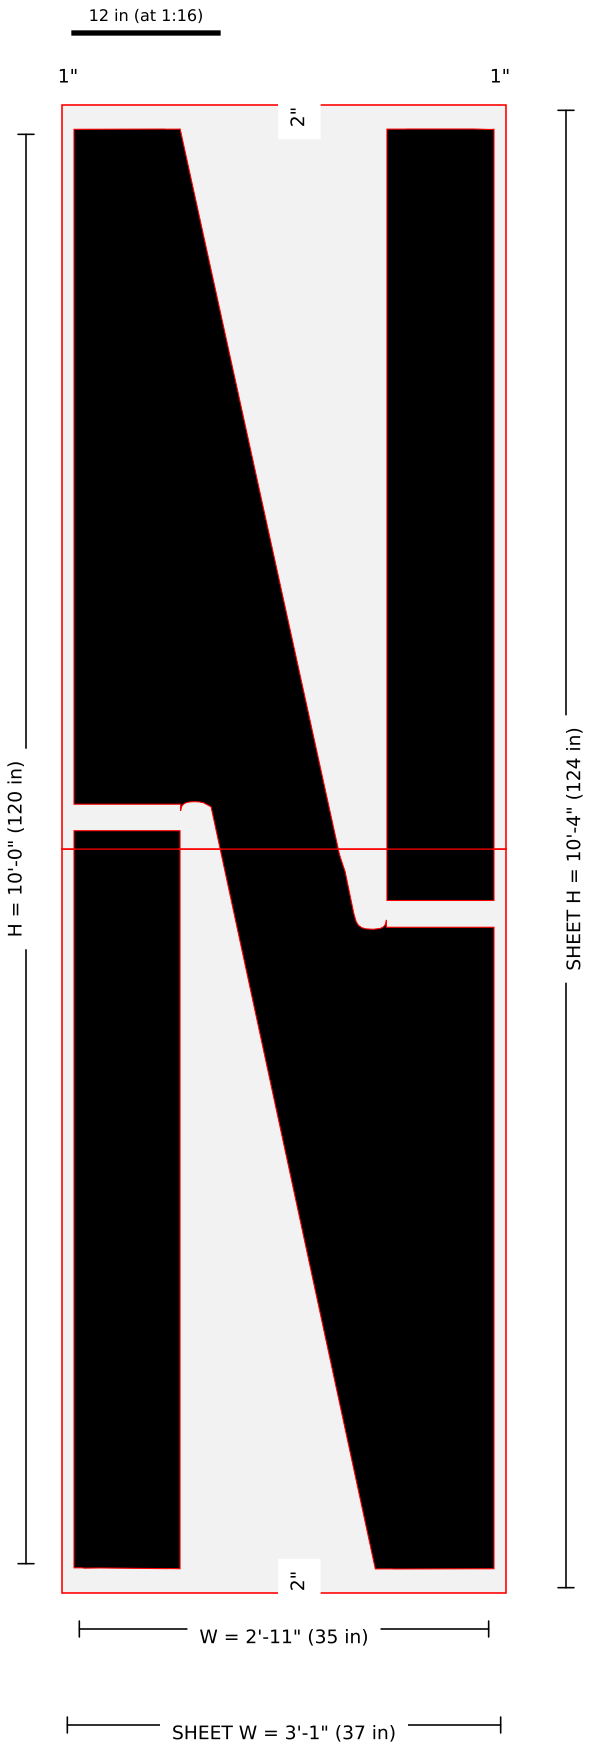

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120N-120in-FAA-Airport-Letter-N-134x48-2.jpg: width = kit listing 35 (image-scale 35.36); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.42 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 2 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-N · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

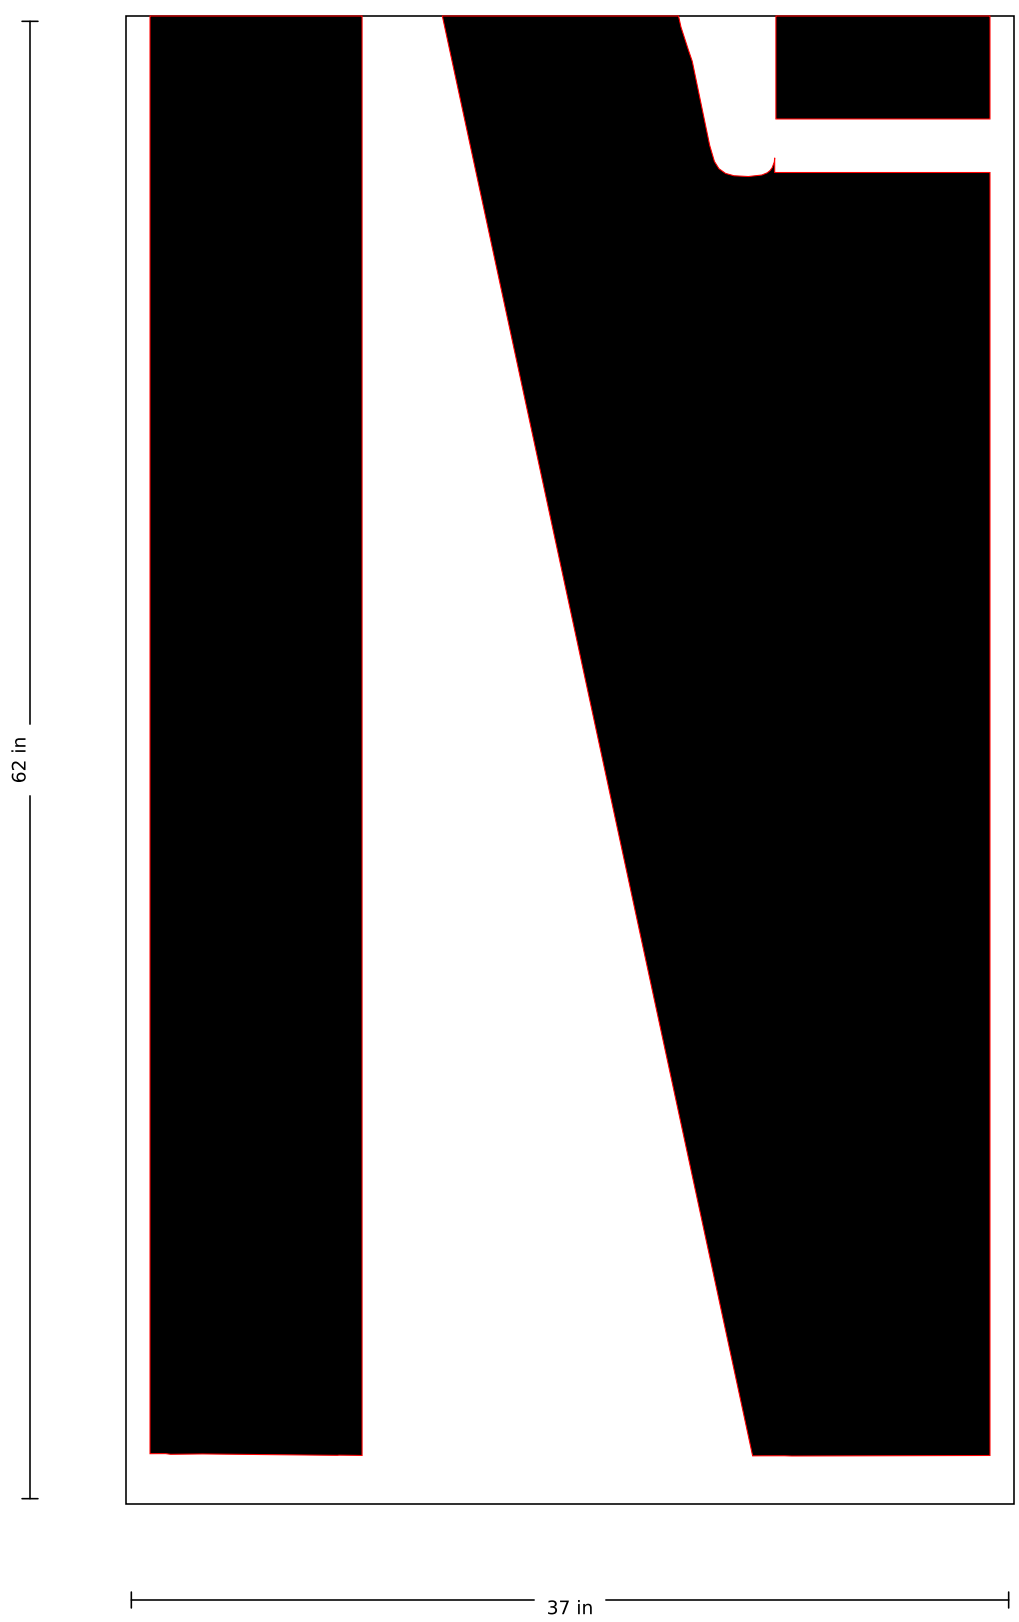

SSS-FAA-120-01-N · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

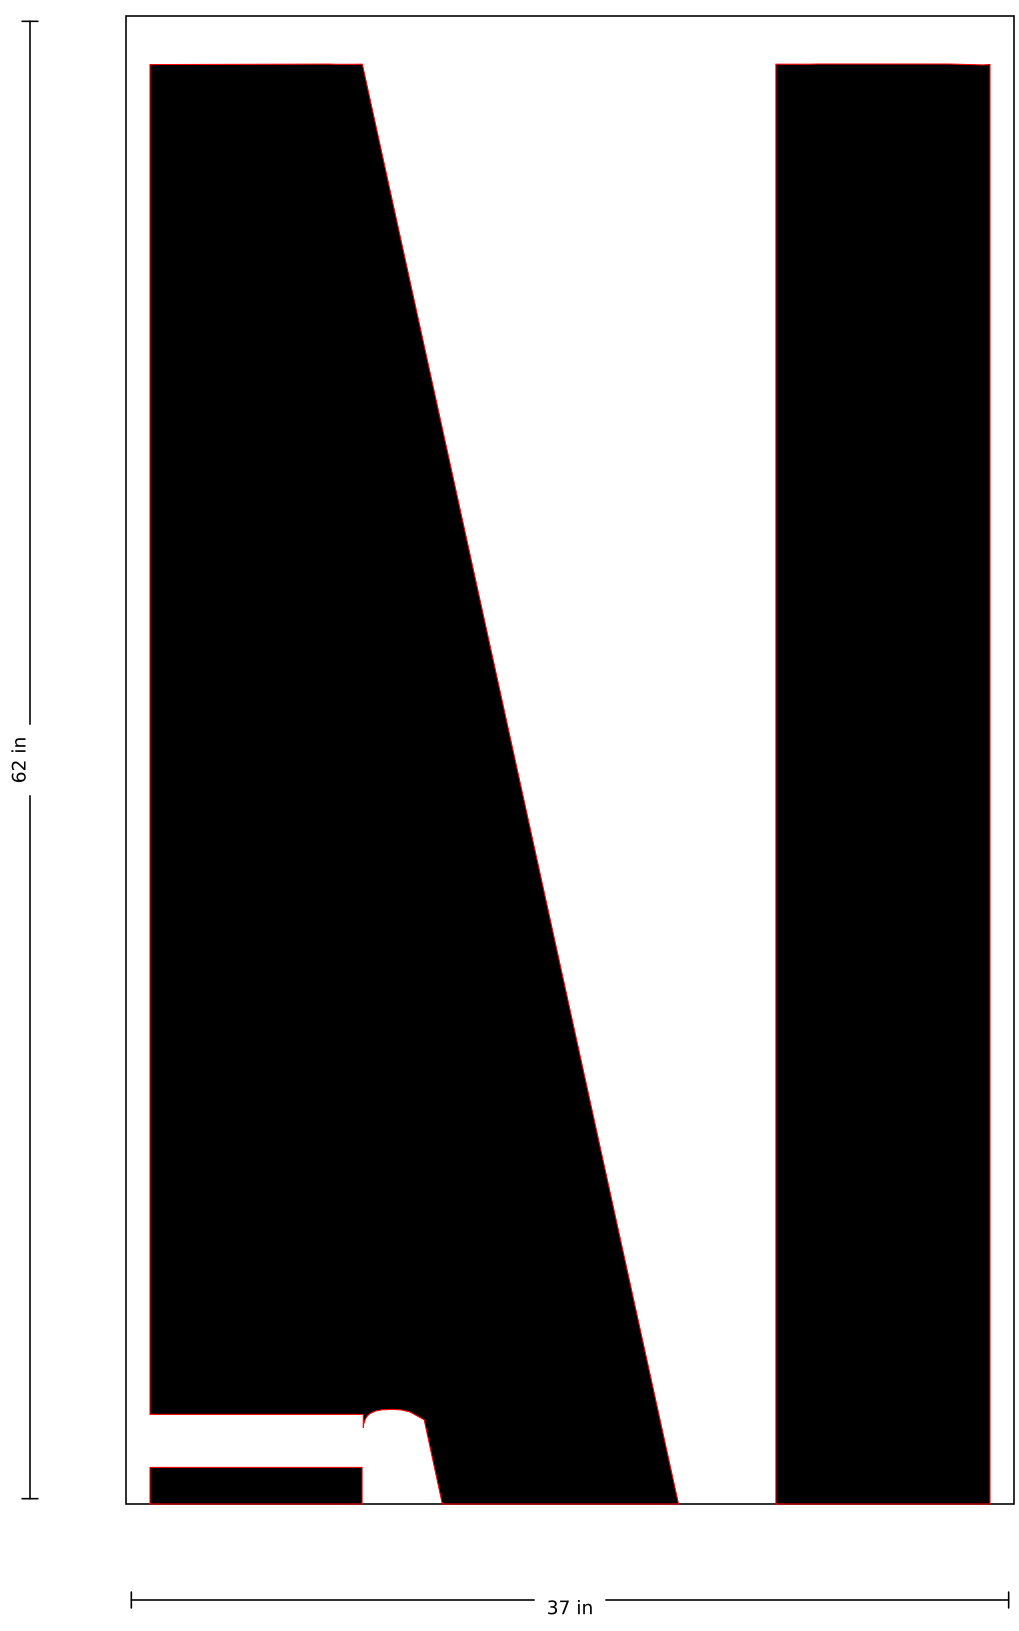

SSS-FAA-120-01-O

120" FAA Airport "O" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

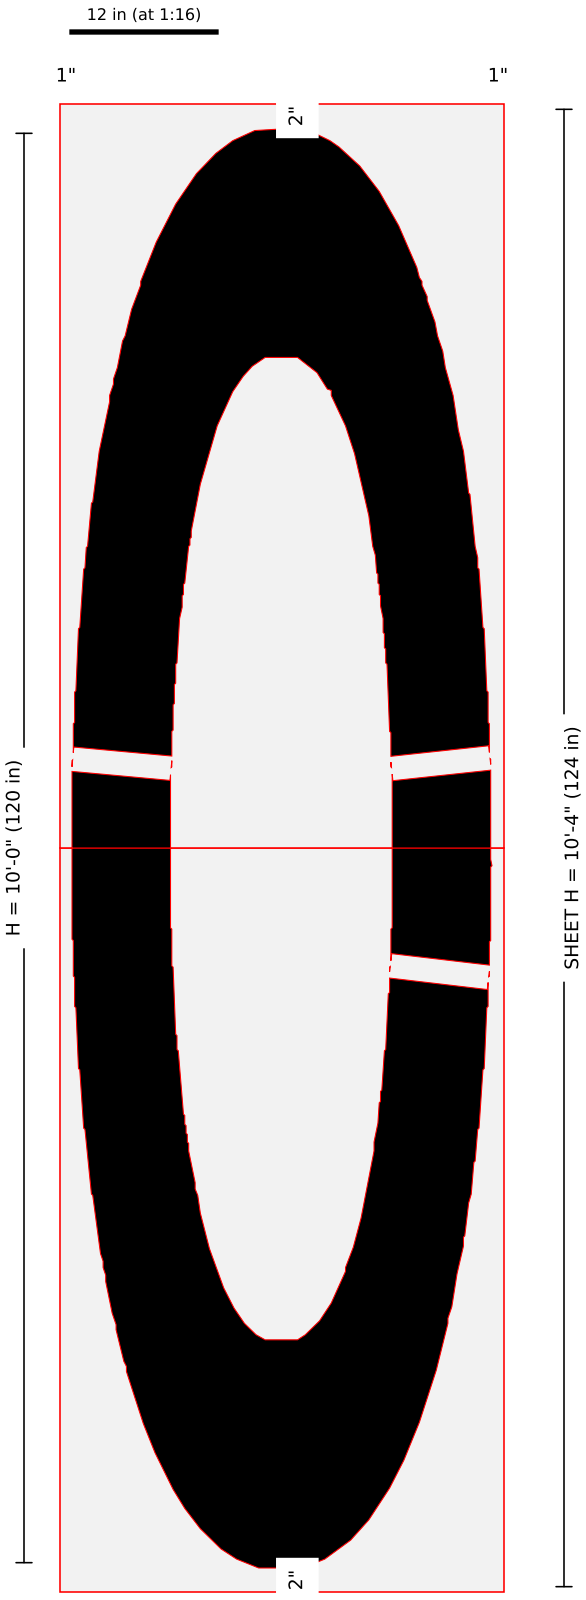

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120O-120in-FAA-Airport-Letter-O-134x48-2.jpg: width = kit listing 35 (image-scale 34.23); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (4.16,67.02) stroke 8.136" w=2.034"; (30.73,67.06) stroke 8.149" w=2.037" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-O · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

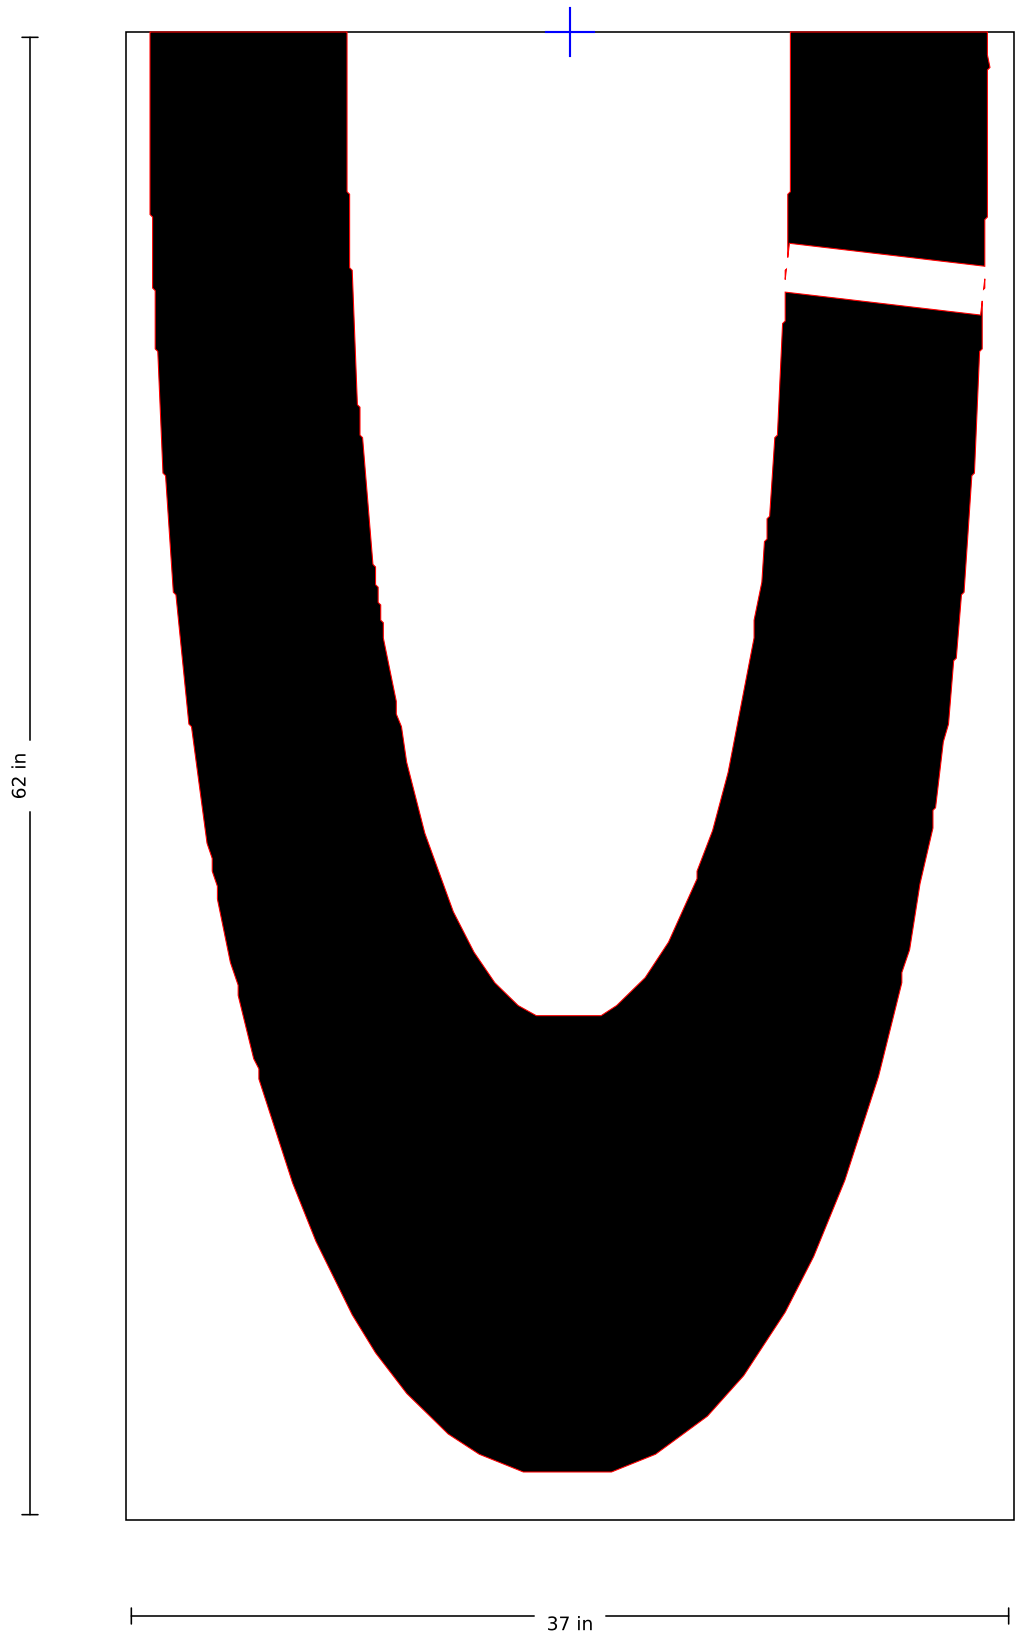

SSS-FAA-120-01-O · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

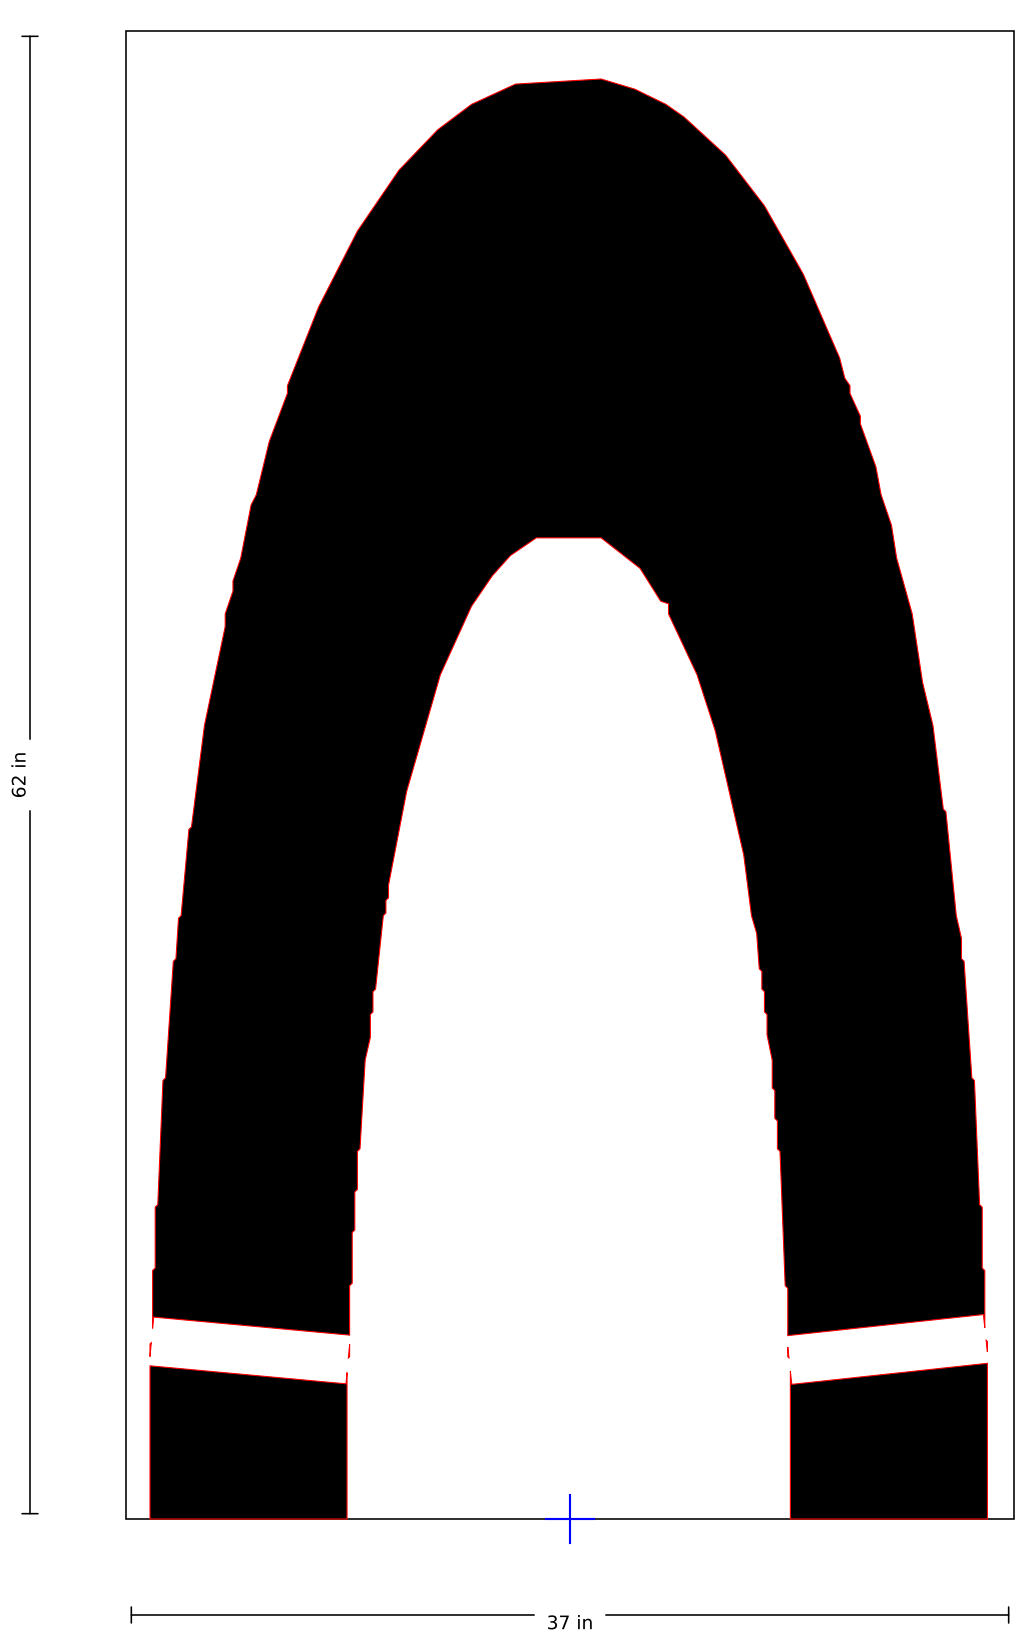

SSS-FAA-120-01-P

120" FAA Airport "P" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

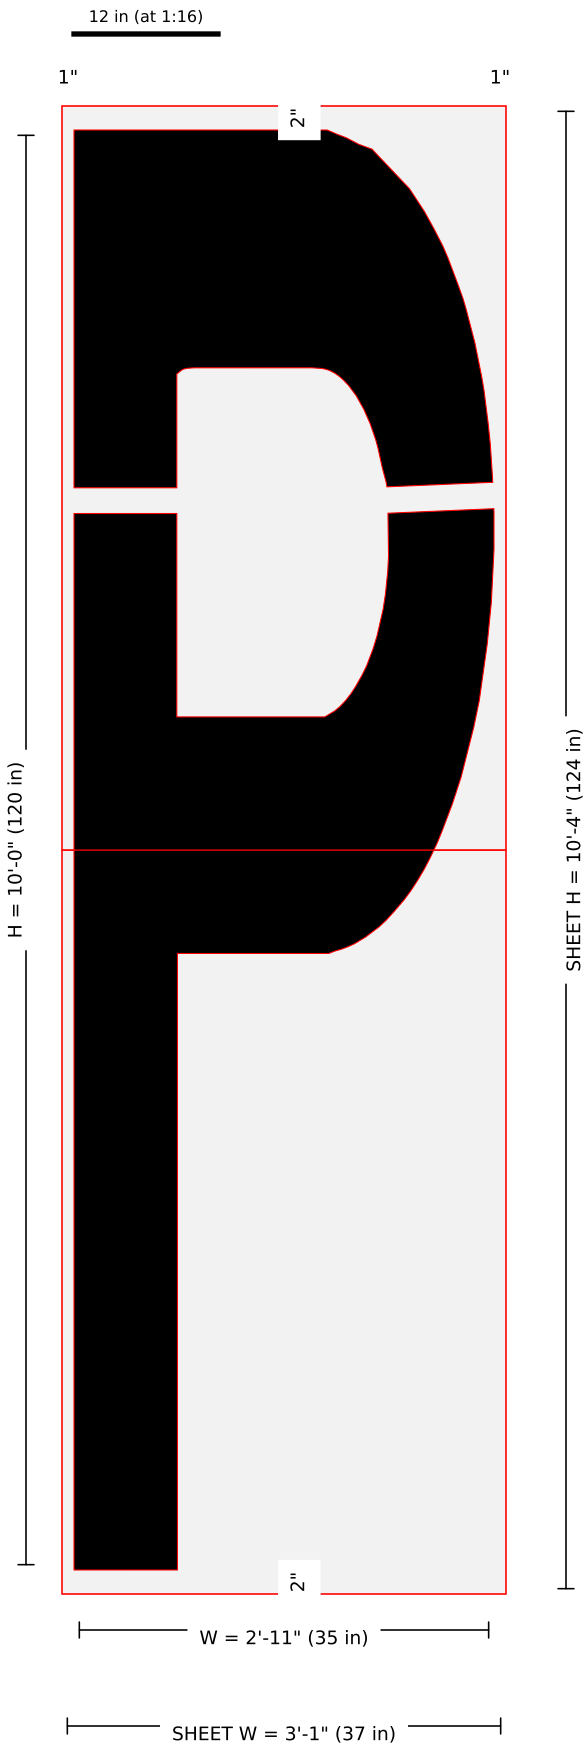

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120P-120in-FAA-Airport-Letter-P-134x48-2.jpg: width = kit listing 35 (image-scale 34.87); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (4.28,89.11) stroke 8.568" w=2.142"; (30.55,89.35) stroke 8.799" w=2.2" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-P · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

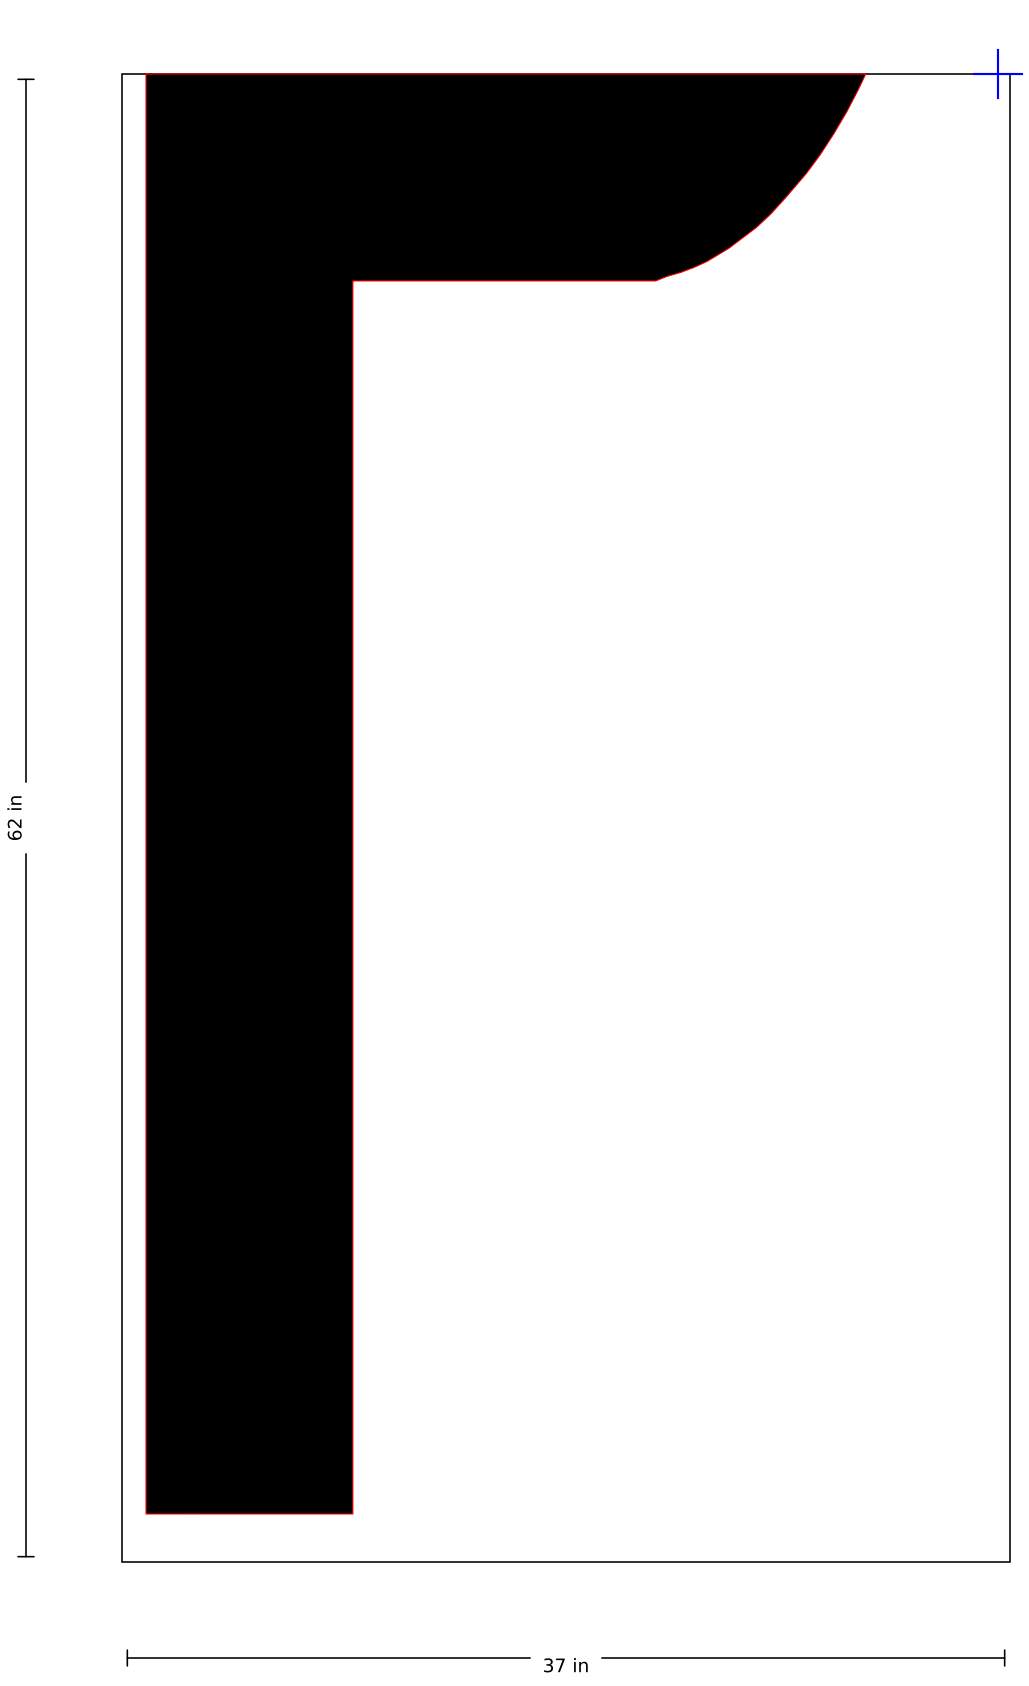

SSS-FAA-120-01-P · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

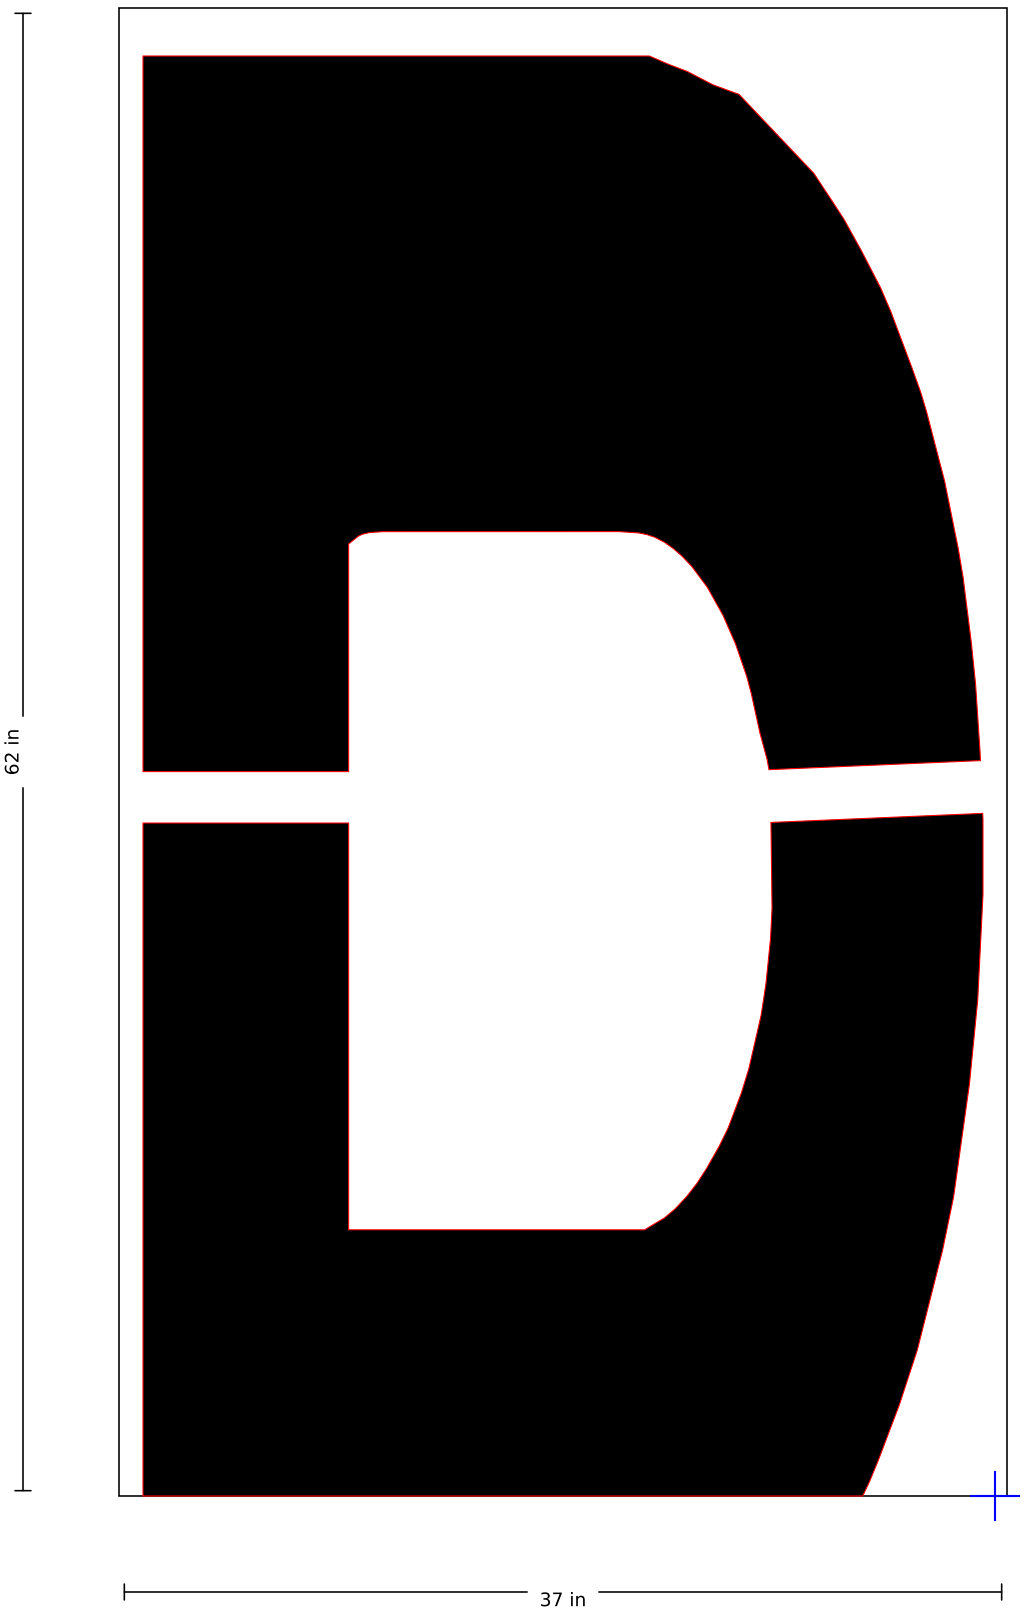

SSS-FAA-120-01-Q

120" FAA Airport "Q" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

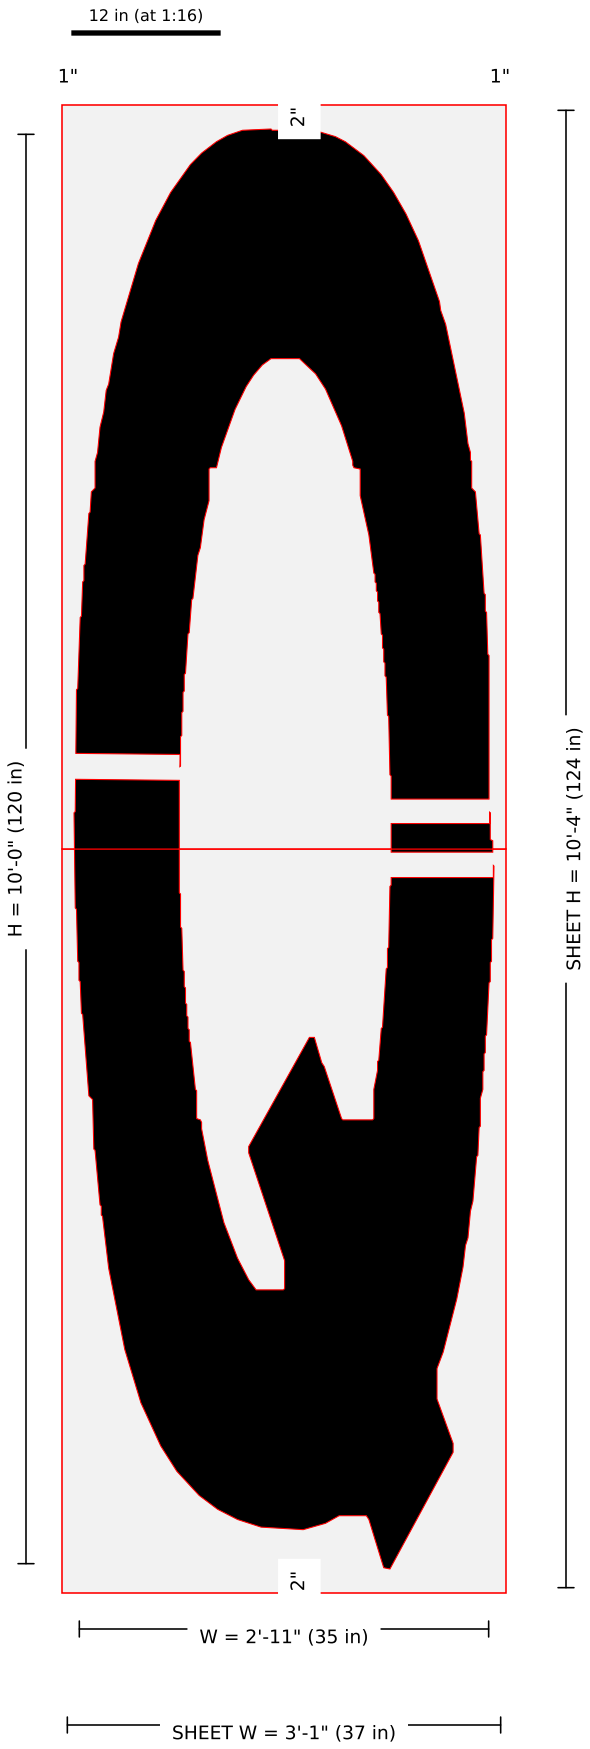

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120Q-120in-FAA-Airport-Letter-Q-134x48-2.jpg: width = kit listing 35 (image-scale 35.84); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (30.51,63.14) stroke 8.156" w=2.039"; (4.46,66.84) stroke 8.635" w=2.159" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-Q · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

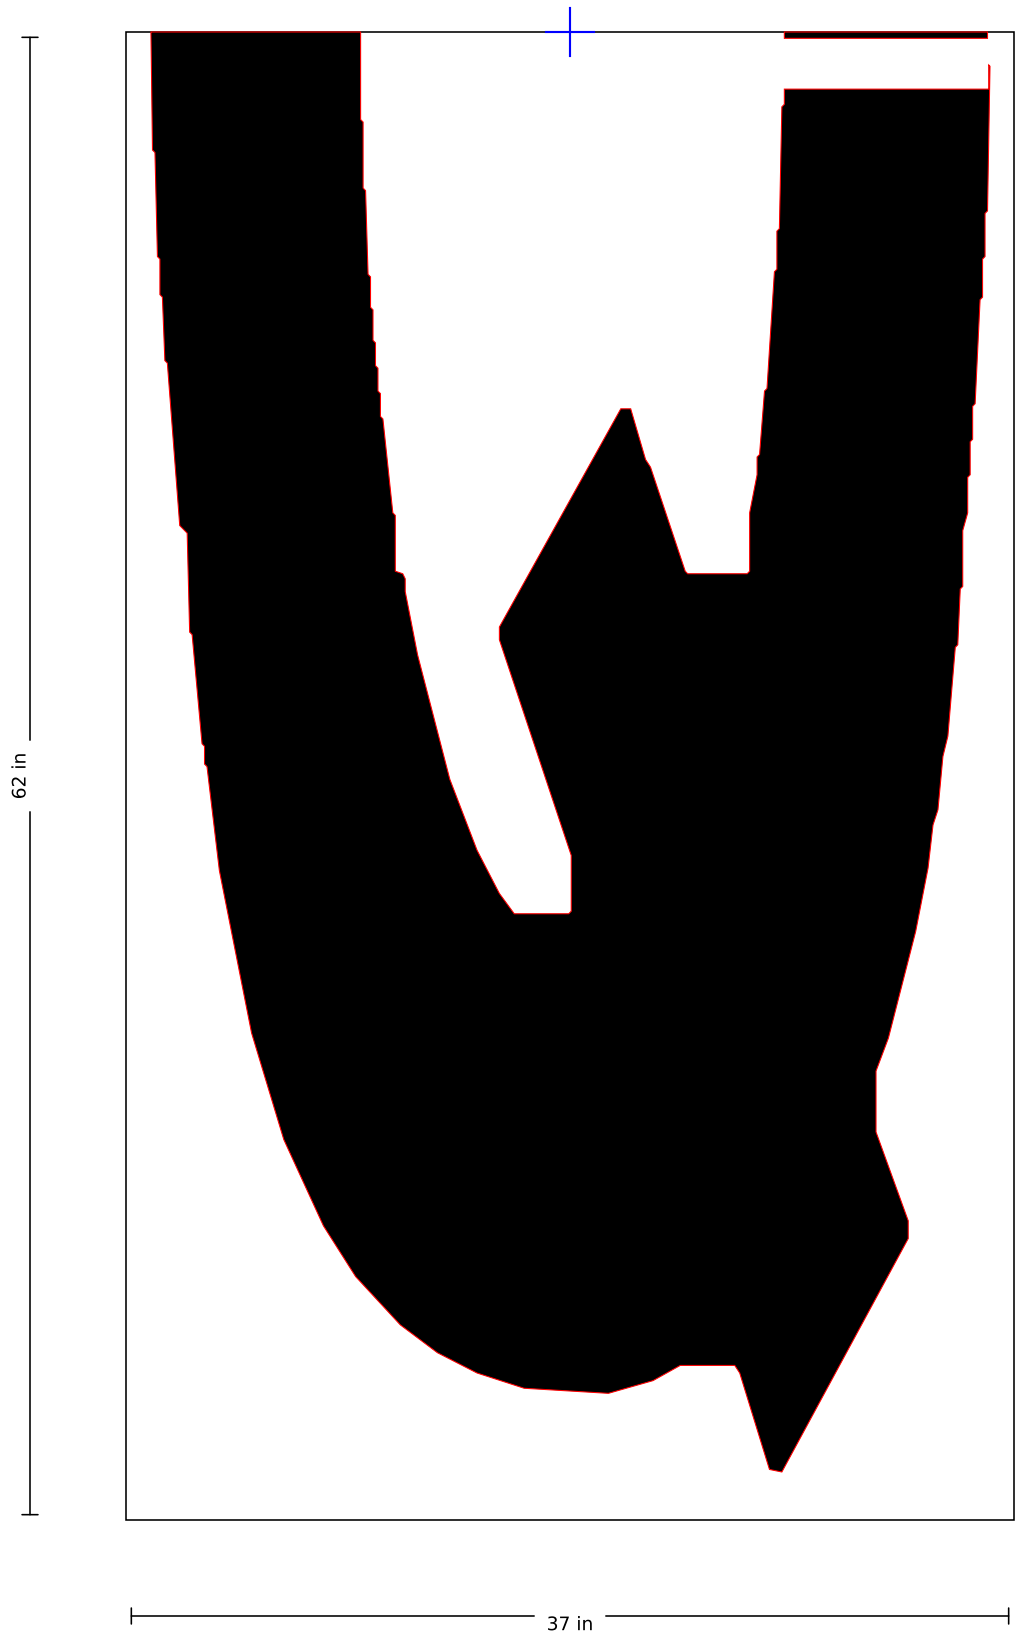

SSS-FAA-120-01-Q · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

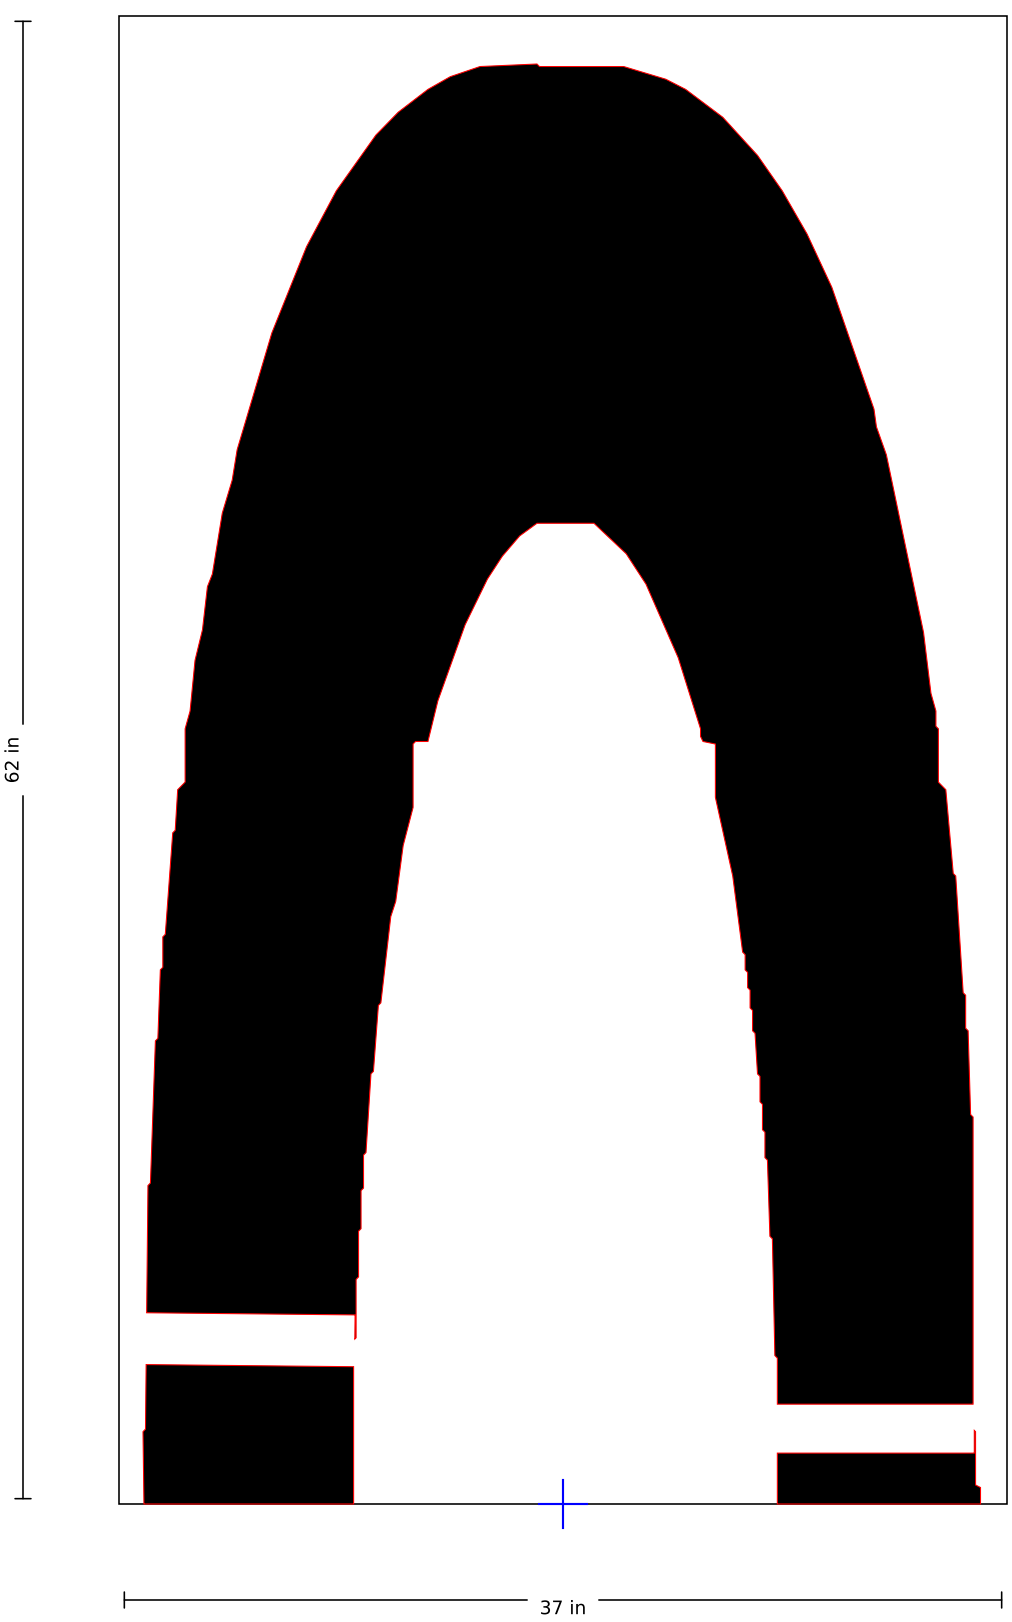

SSS-FAA-120-01-R

120" FAA Airport "R" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

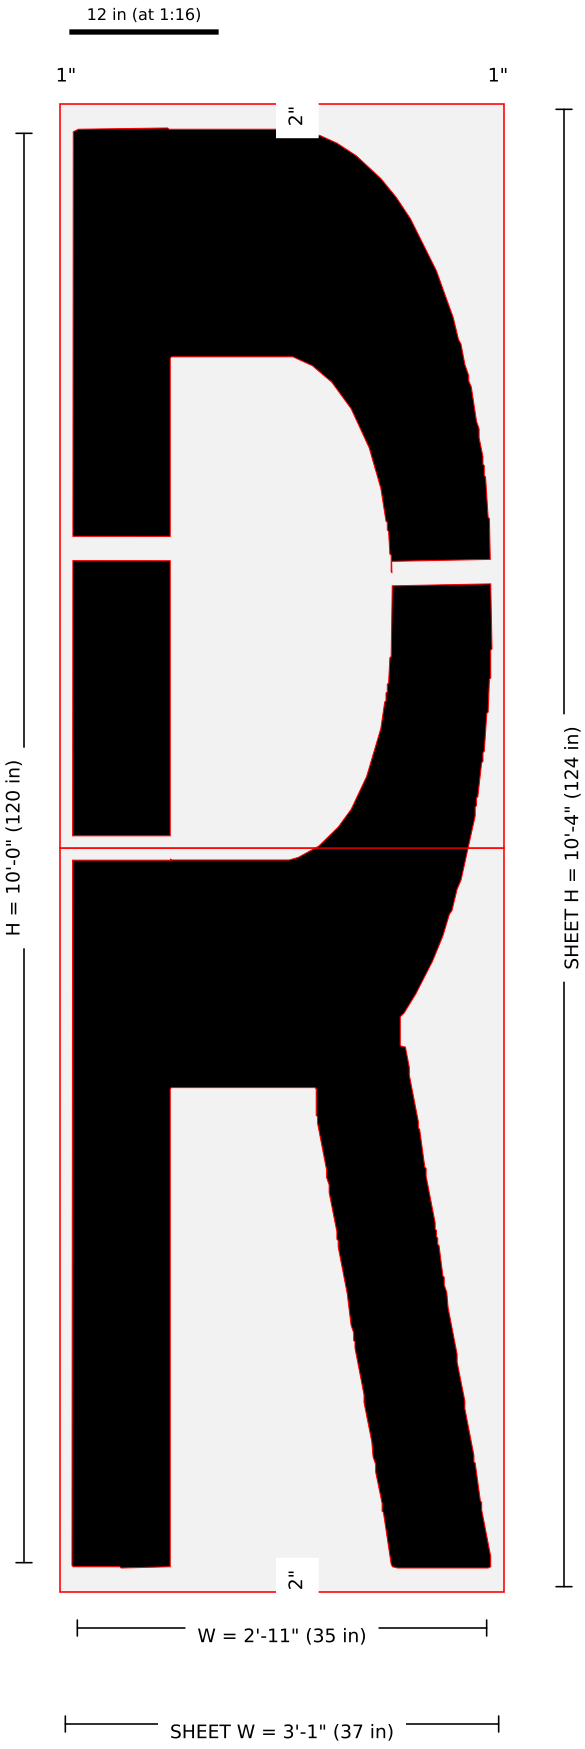

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120R-120in-FAA-Airport-Letter-R-134x48-2.jpg: width = kit listing 35 (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (4.13,84.96) stroke 8.108" w=2.027"; (30.79,82.95) stroke 8.167" w=2.042" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-R · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

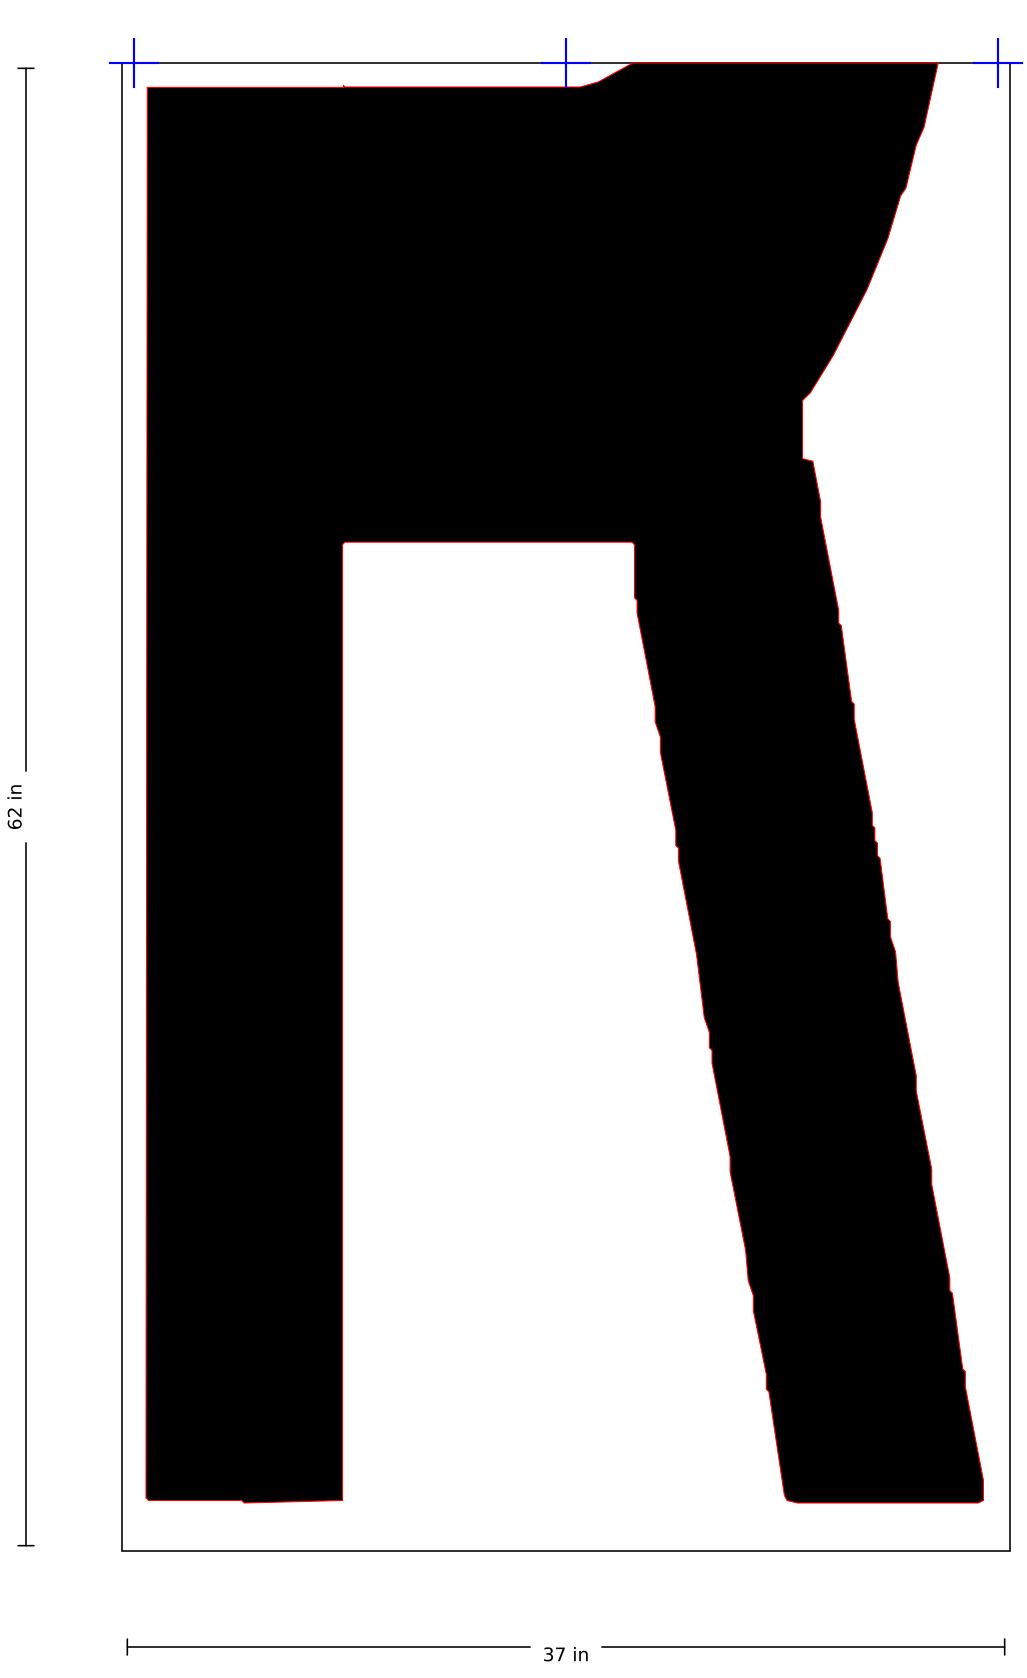

SSS-FAA-120-01-R · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

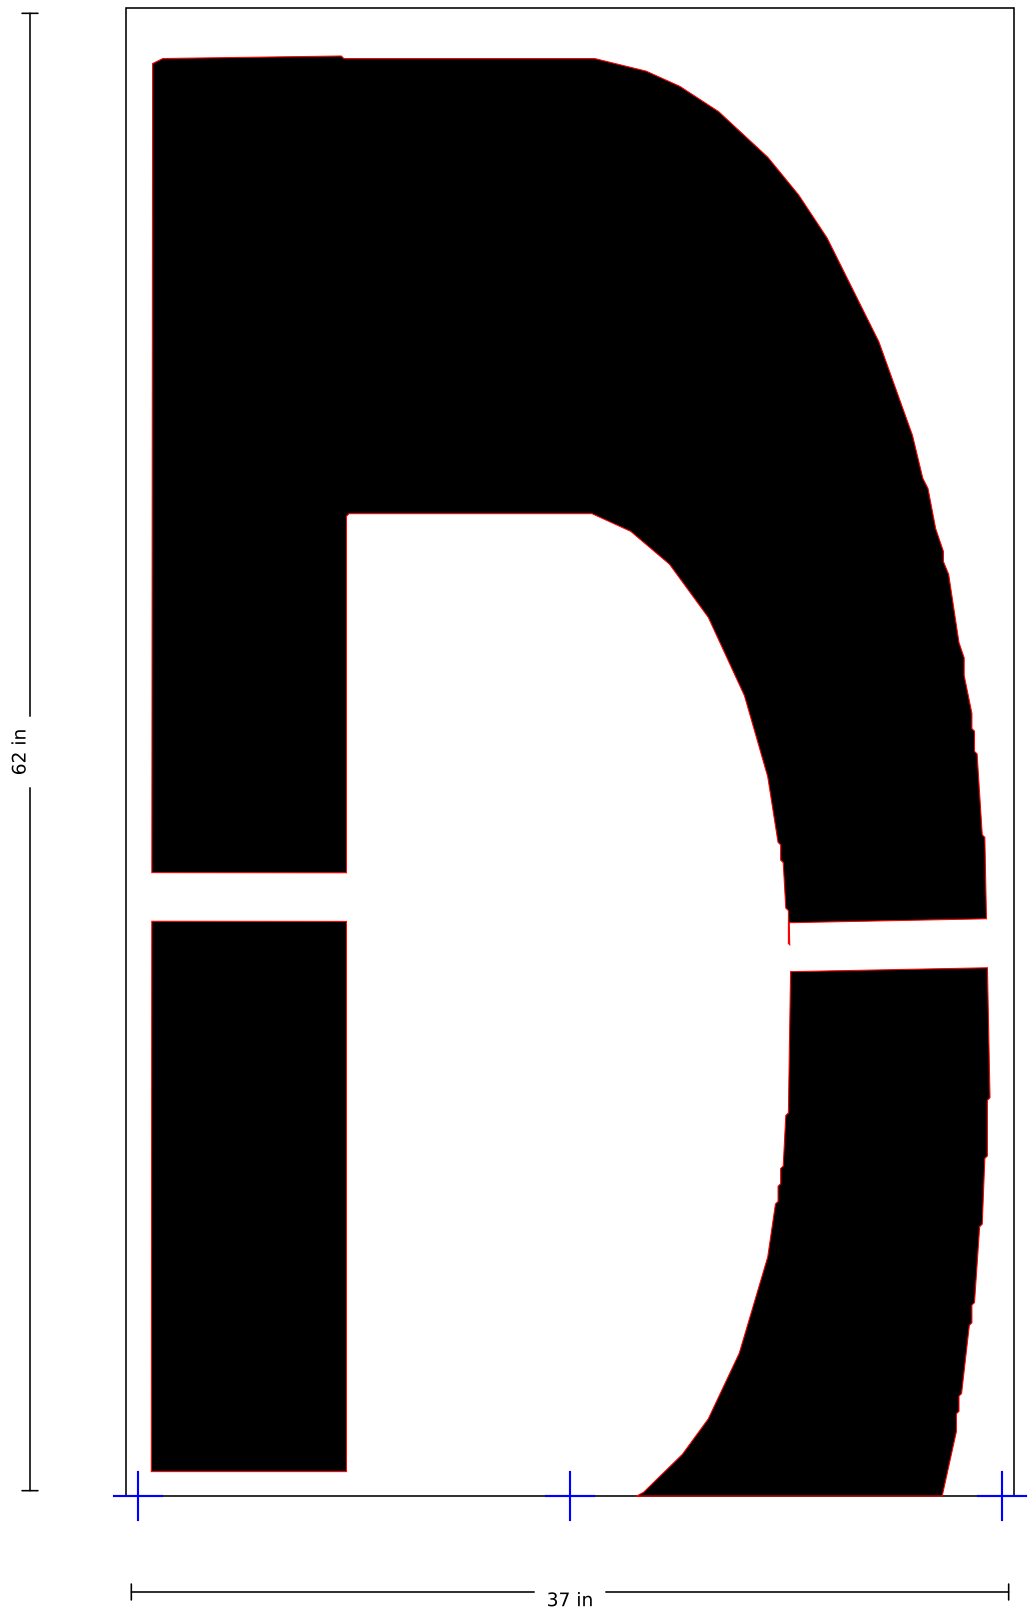

SSS-FAA-120-01-S

120" FAA Airport "S" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

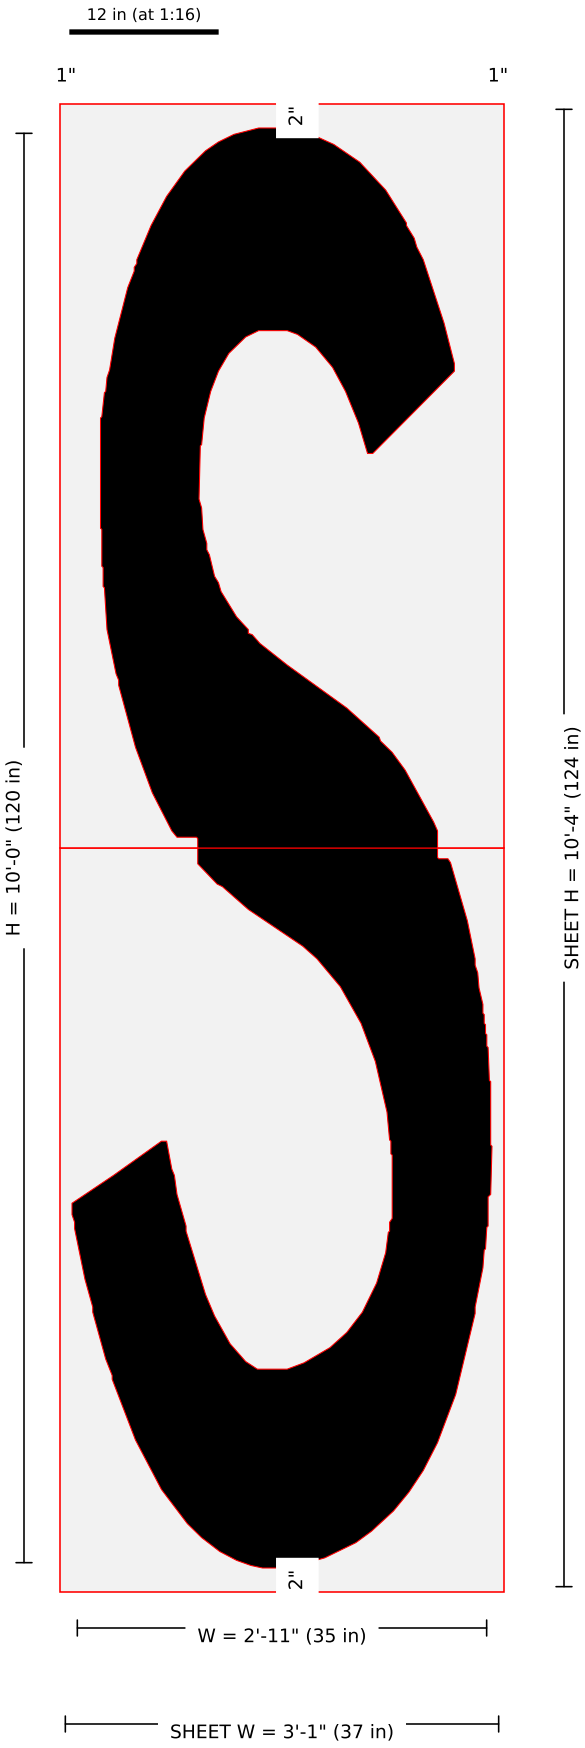

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120S-120in-FAA-Airport-Letter-S-134x48-2.jpg: width = kit listing 35 (image-scale 34.20); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-S · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

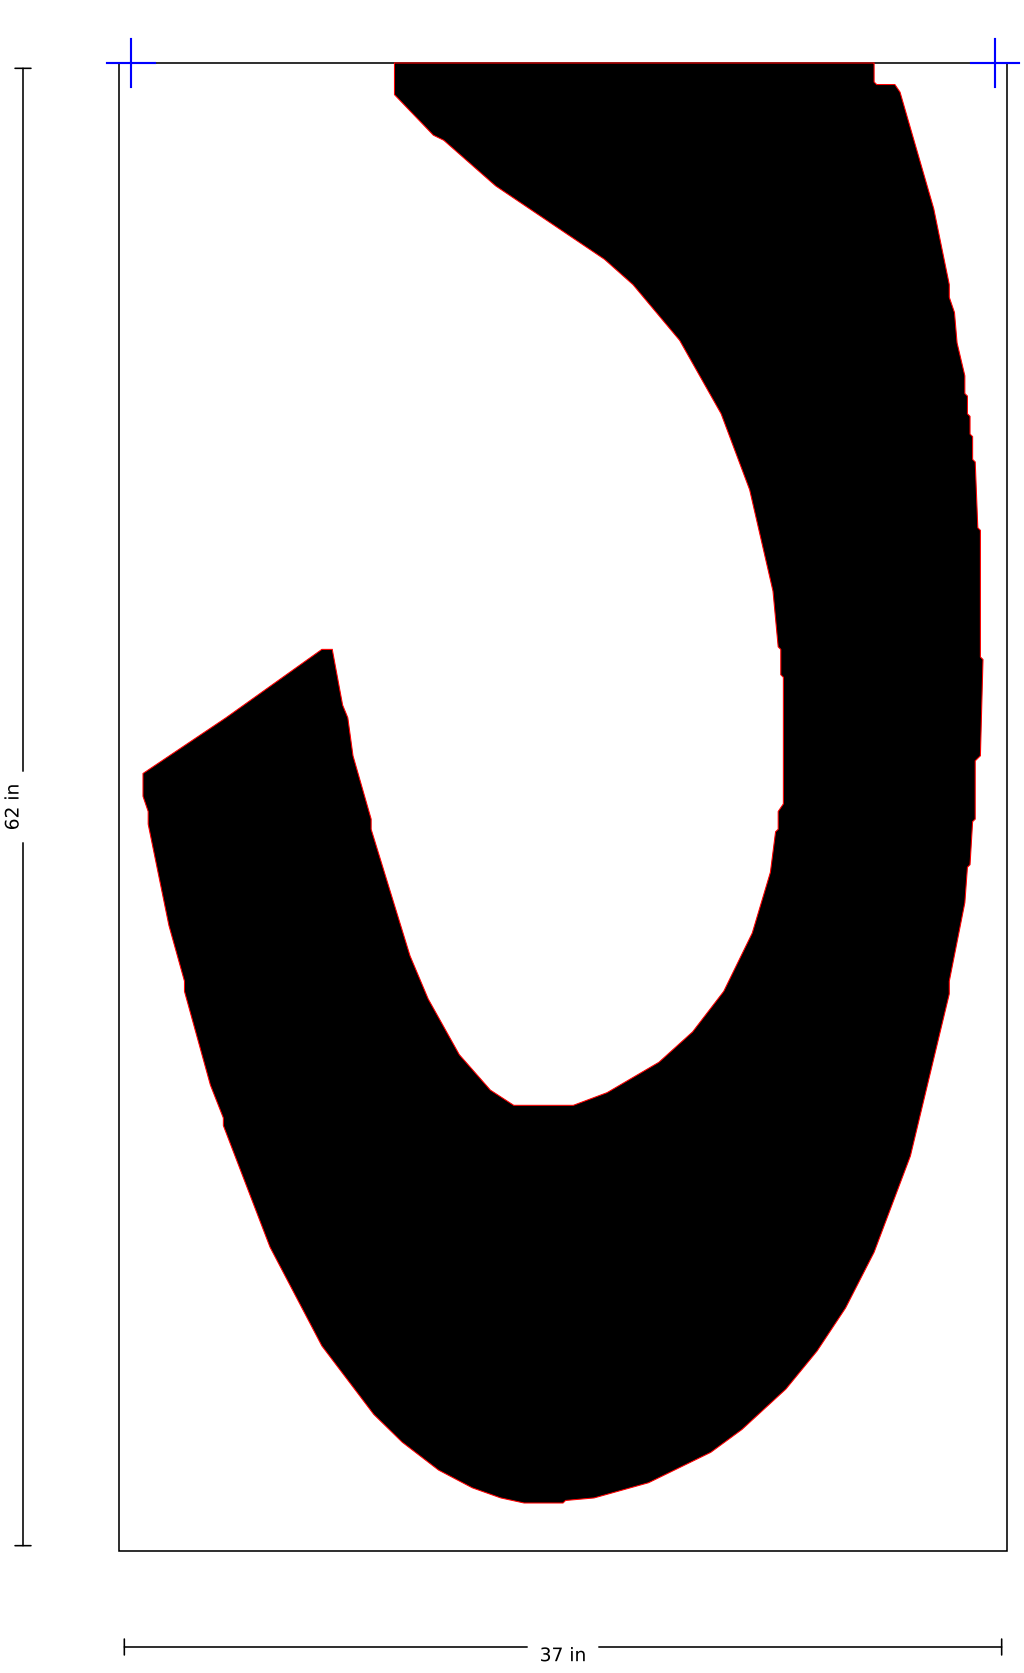

SSS-FAA-120-01-S · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

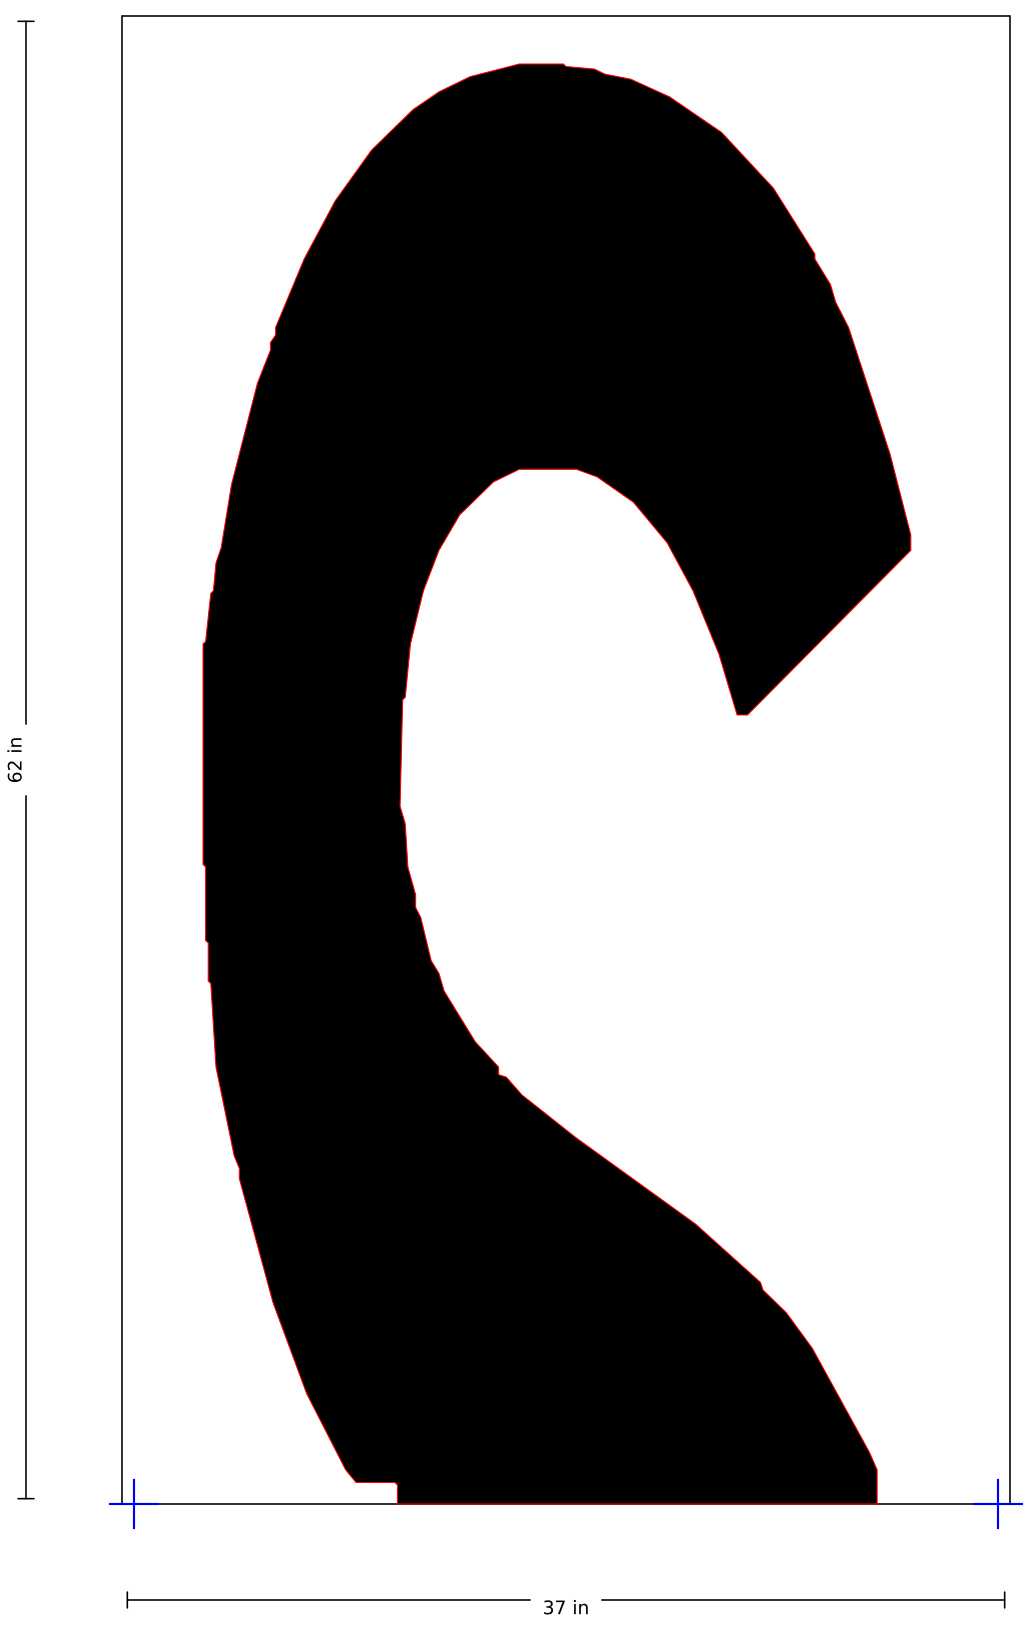

SSS-FAA-120-01-T

120" FAA Airport "T" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

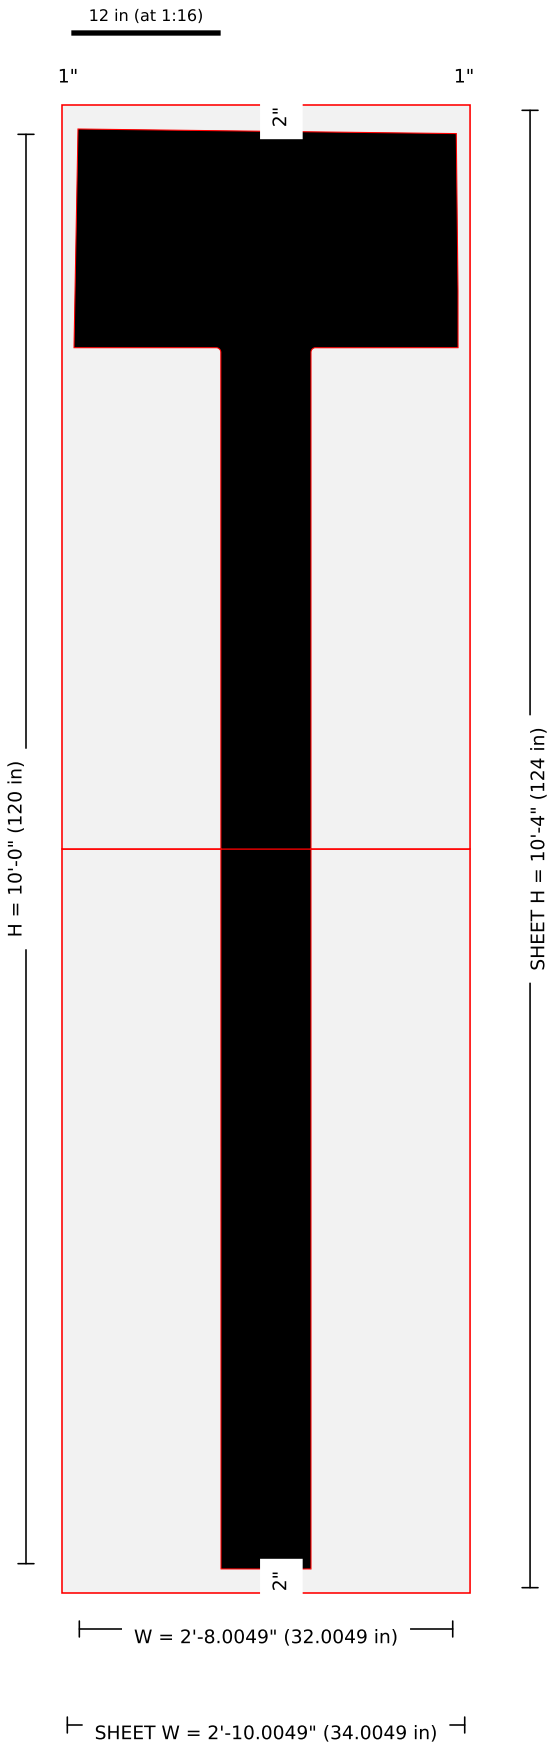

Pieces: 2 (1 x 2); blanks (in): 34.005 x 62, 34.005 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120T-120in-FAA-Airport-Letter-T-134x48-2.jpg: width 32 from image scale (31.92); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-T · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

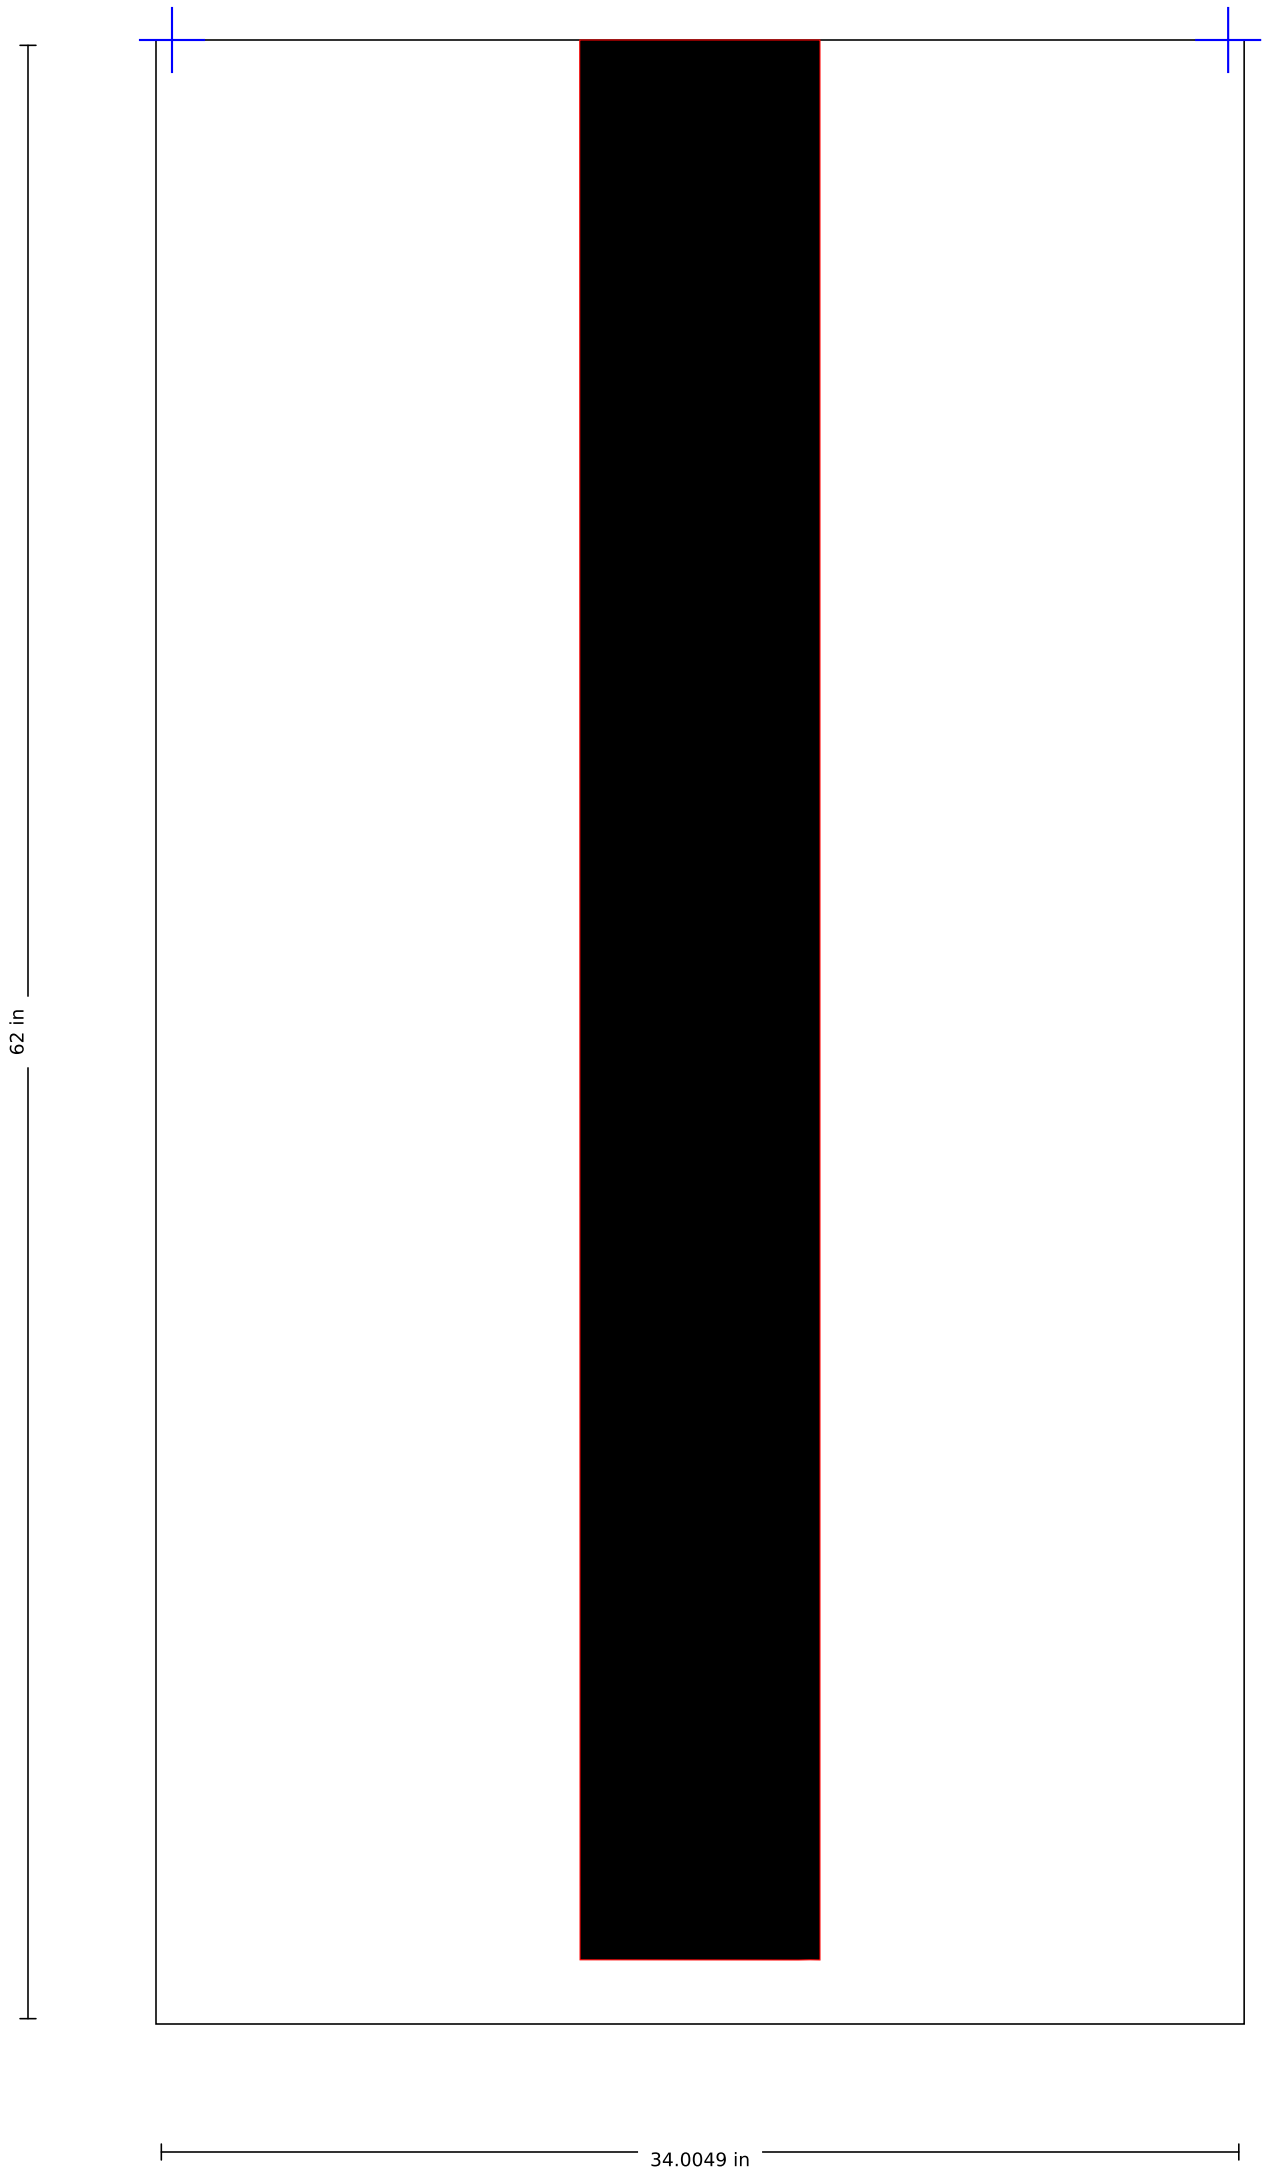

SSS-FAA-120-01-T · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

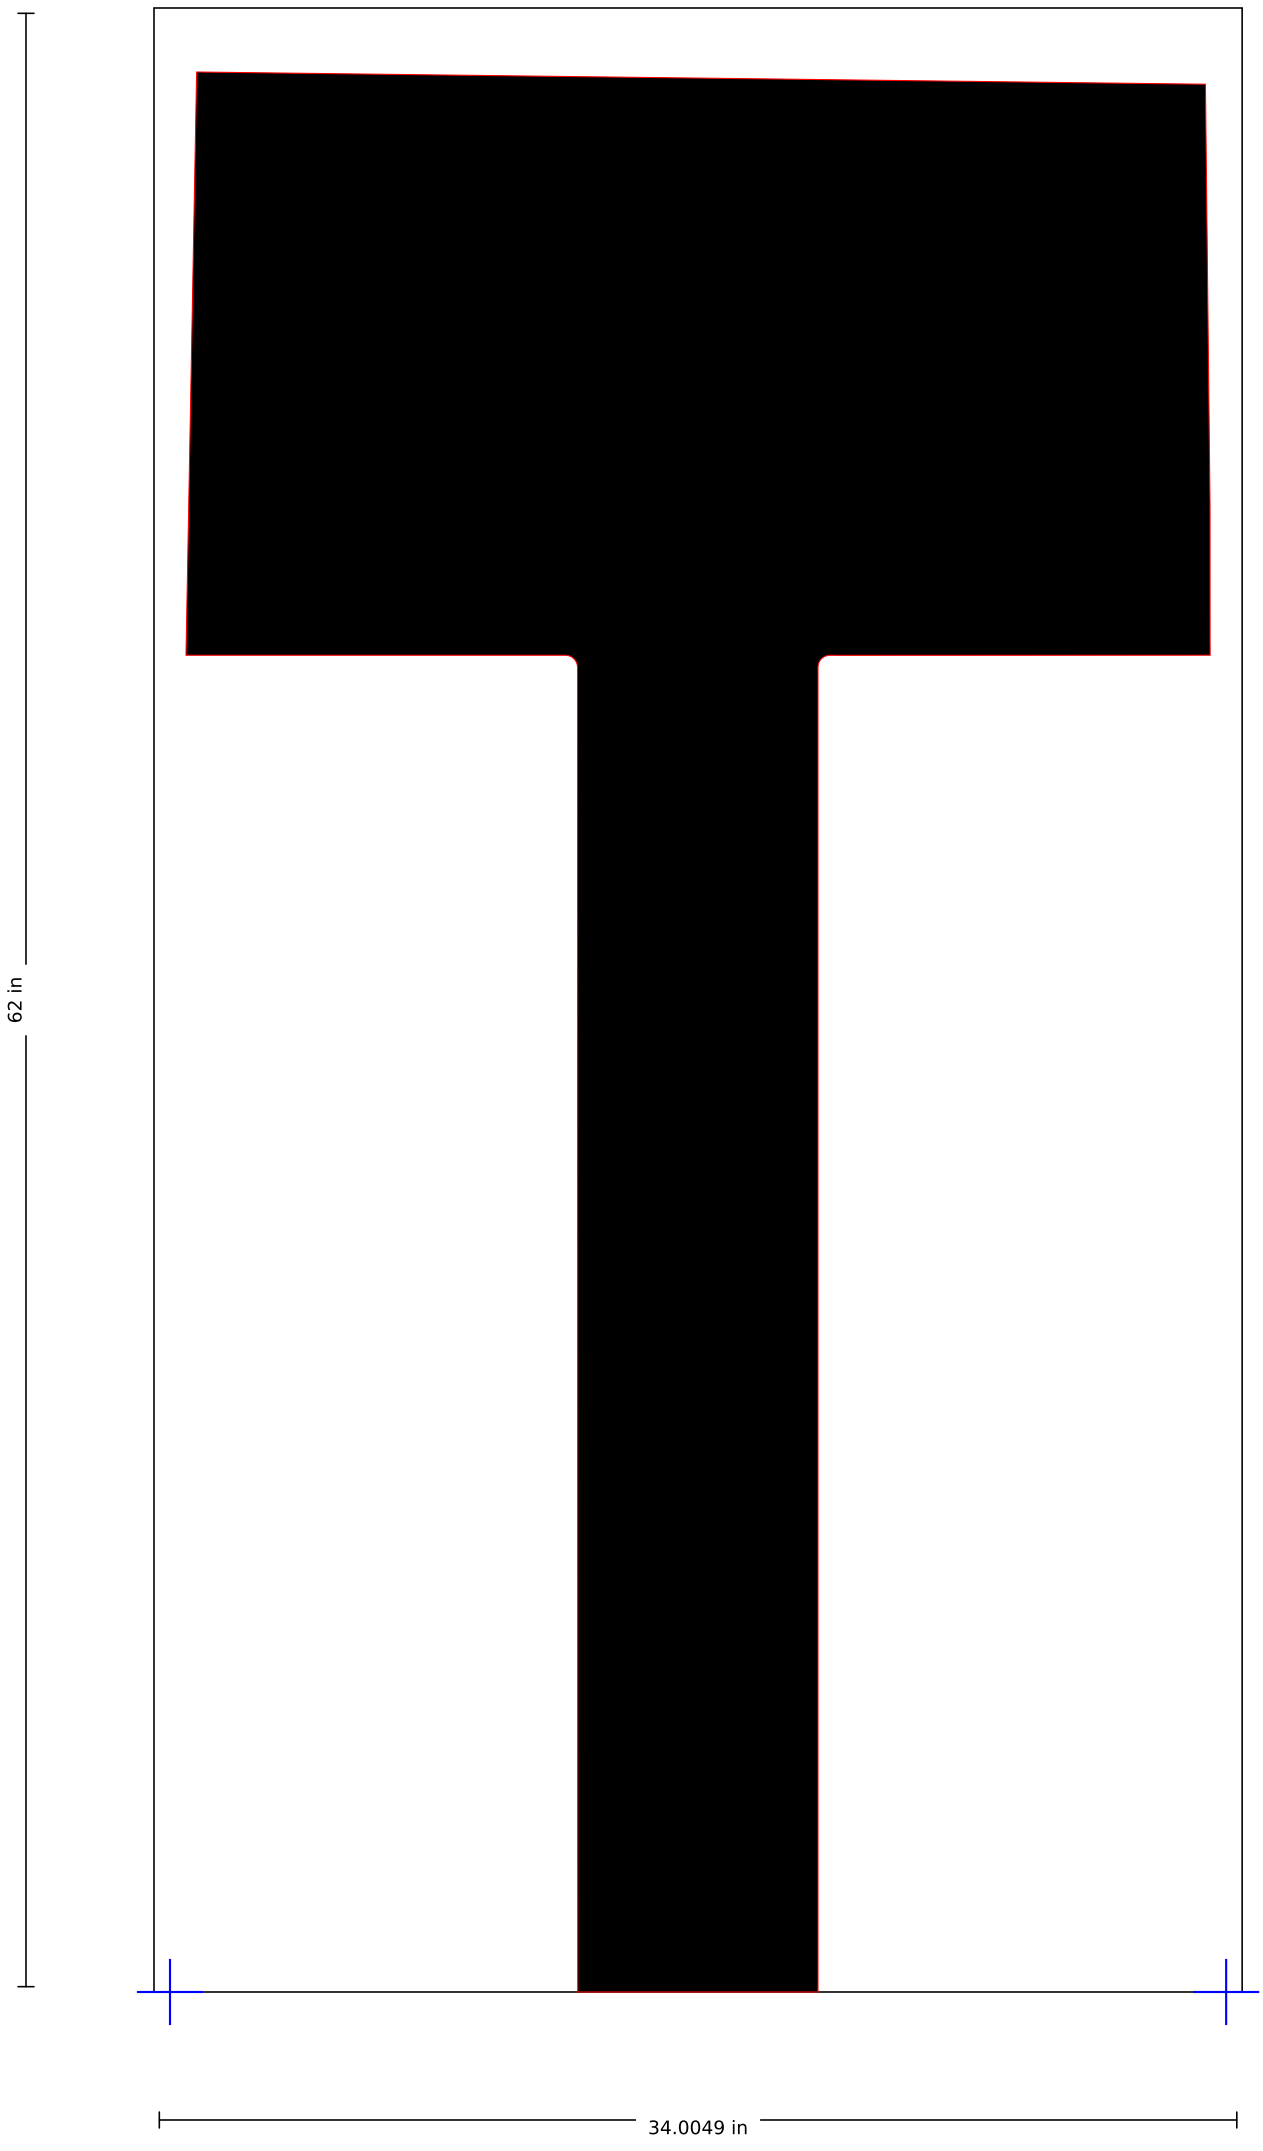

SSS-FAA-120-01-U

120" FAA Airport "U" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 37 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

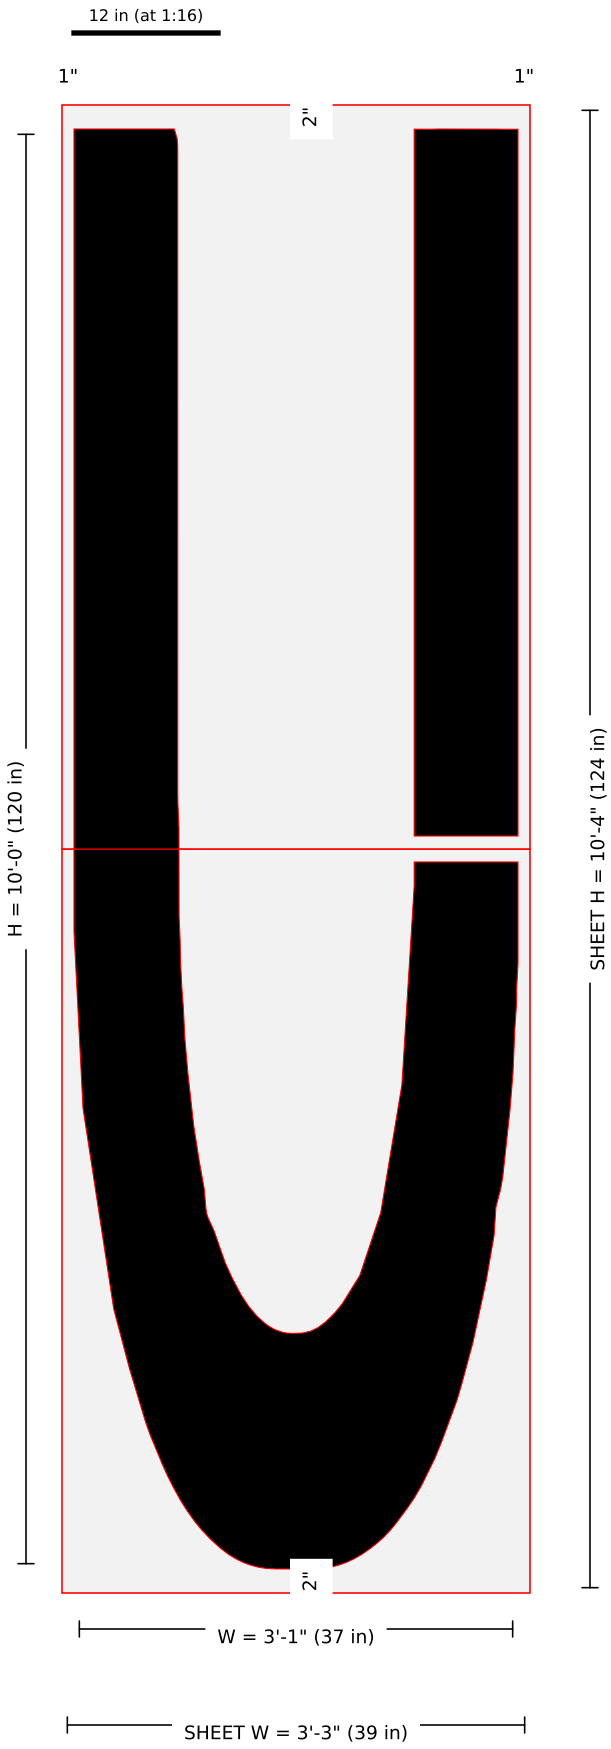

Pieces: 2 (1 x 2); blanks (in): 39 x 62, 39 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120U-120in-FAA-Airport-Letter-U-134x48-2.jpg: width 37 from image scale (37.22); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-U · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

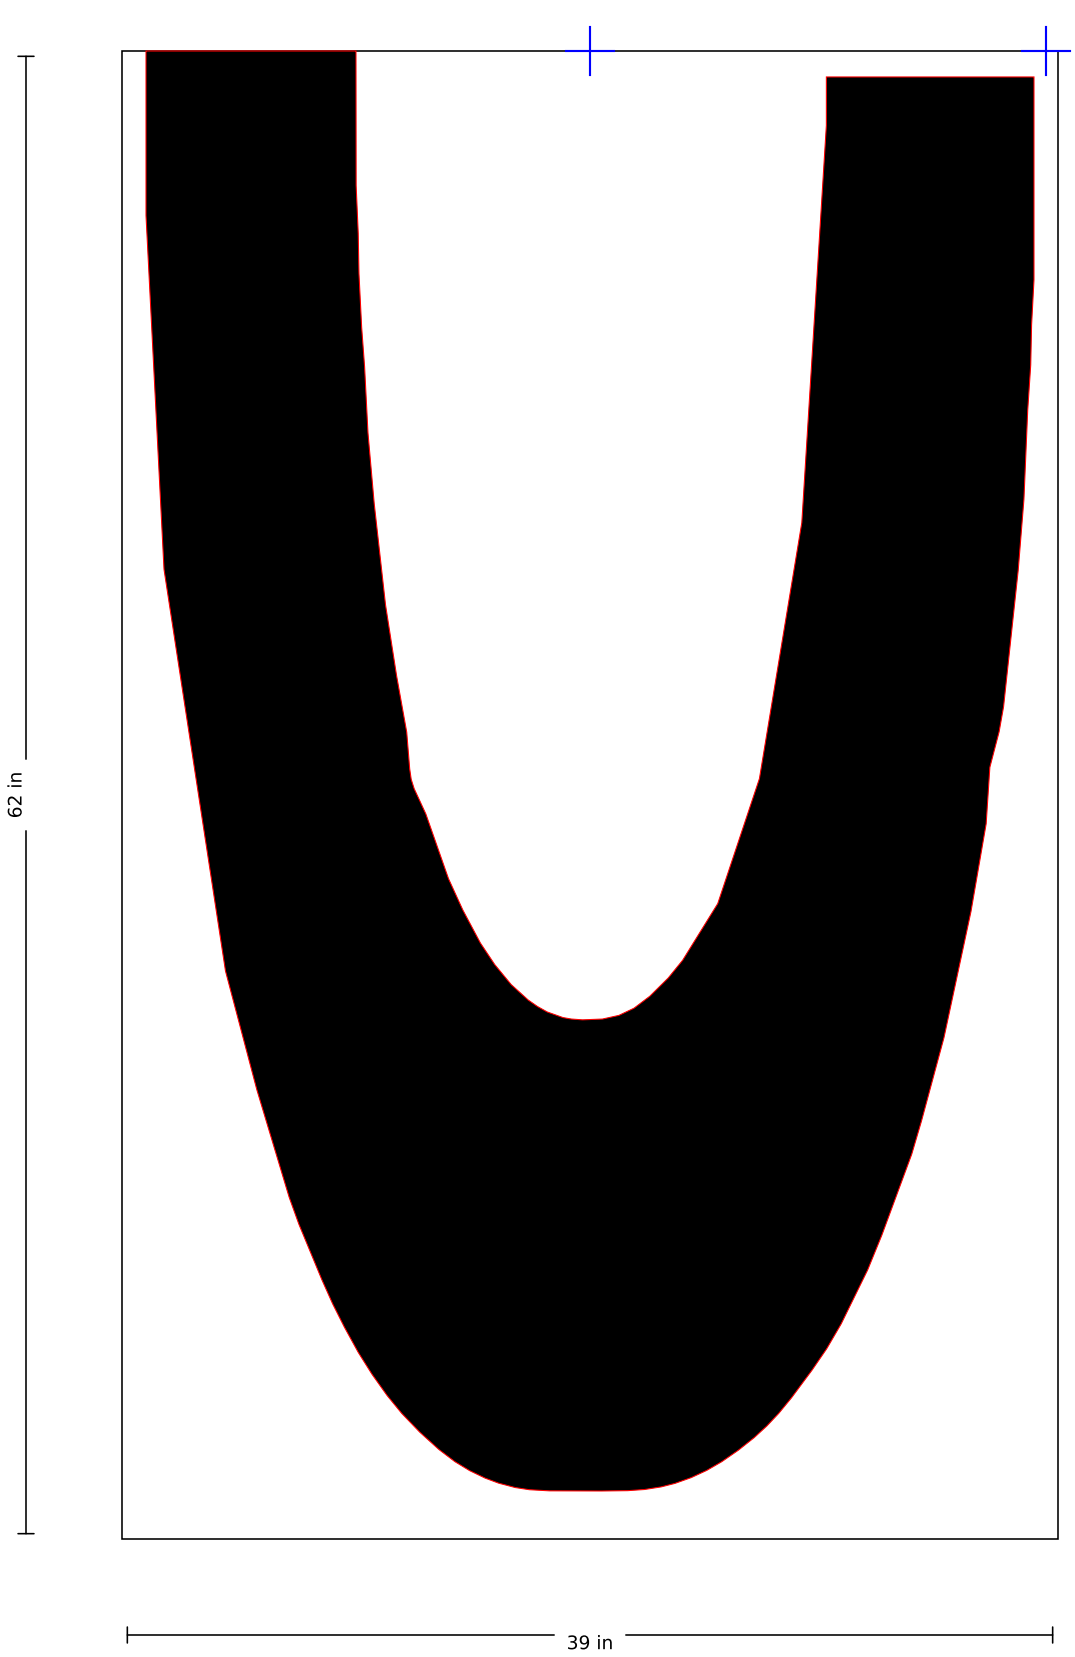

SSS-FAA-120-01-U · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

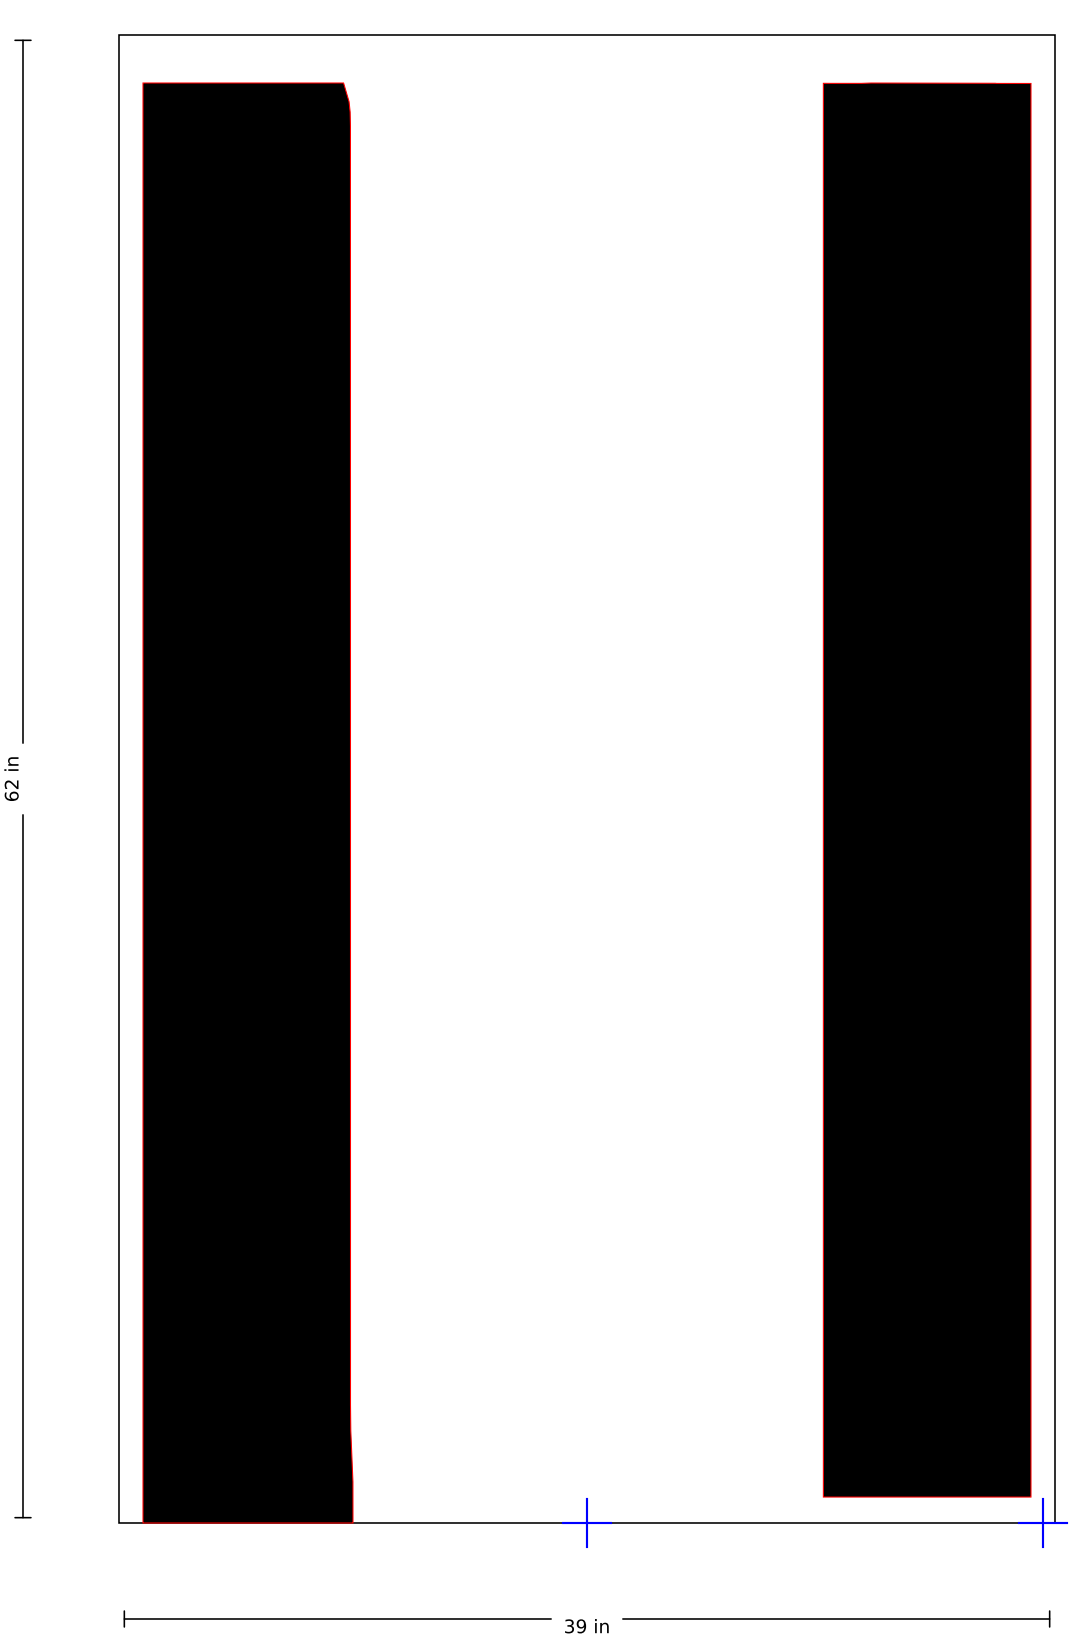

SSS-FAA-120-01-V

120" FAA Airport "V" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 40.5 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

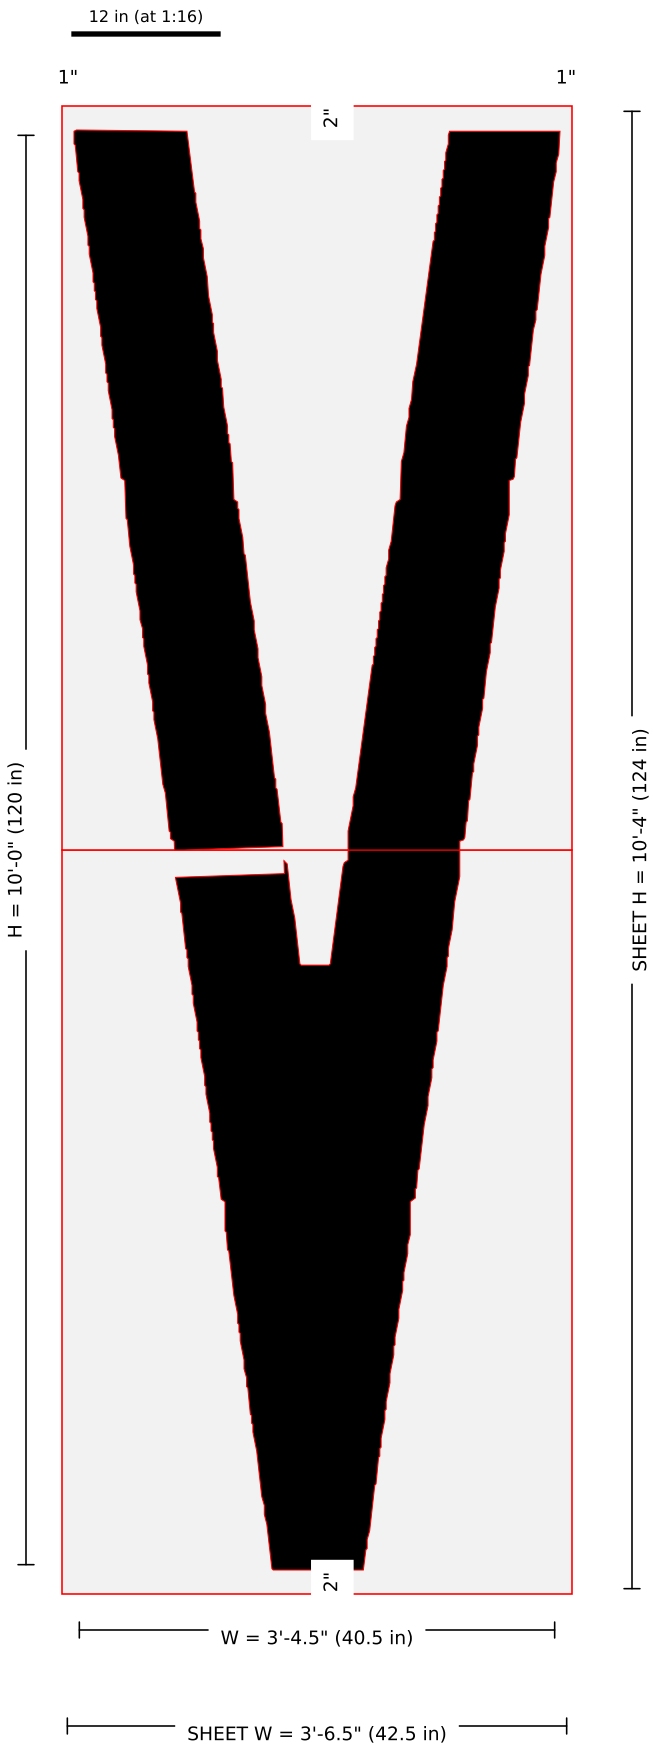

Pieces: 2 (1 x 2); blanks (in): 42.5 x 62, 42.5 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120V-120in-FAA-Airport-Letter-V-134x48-2.jpg: width 40.5 from image scale (40.39); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-V · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

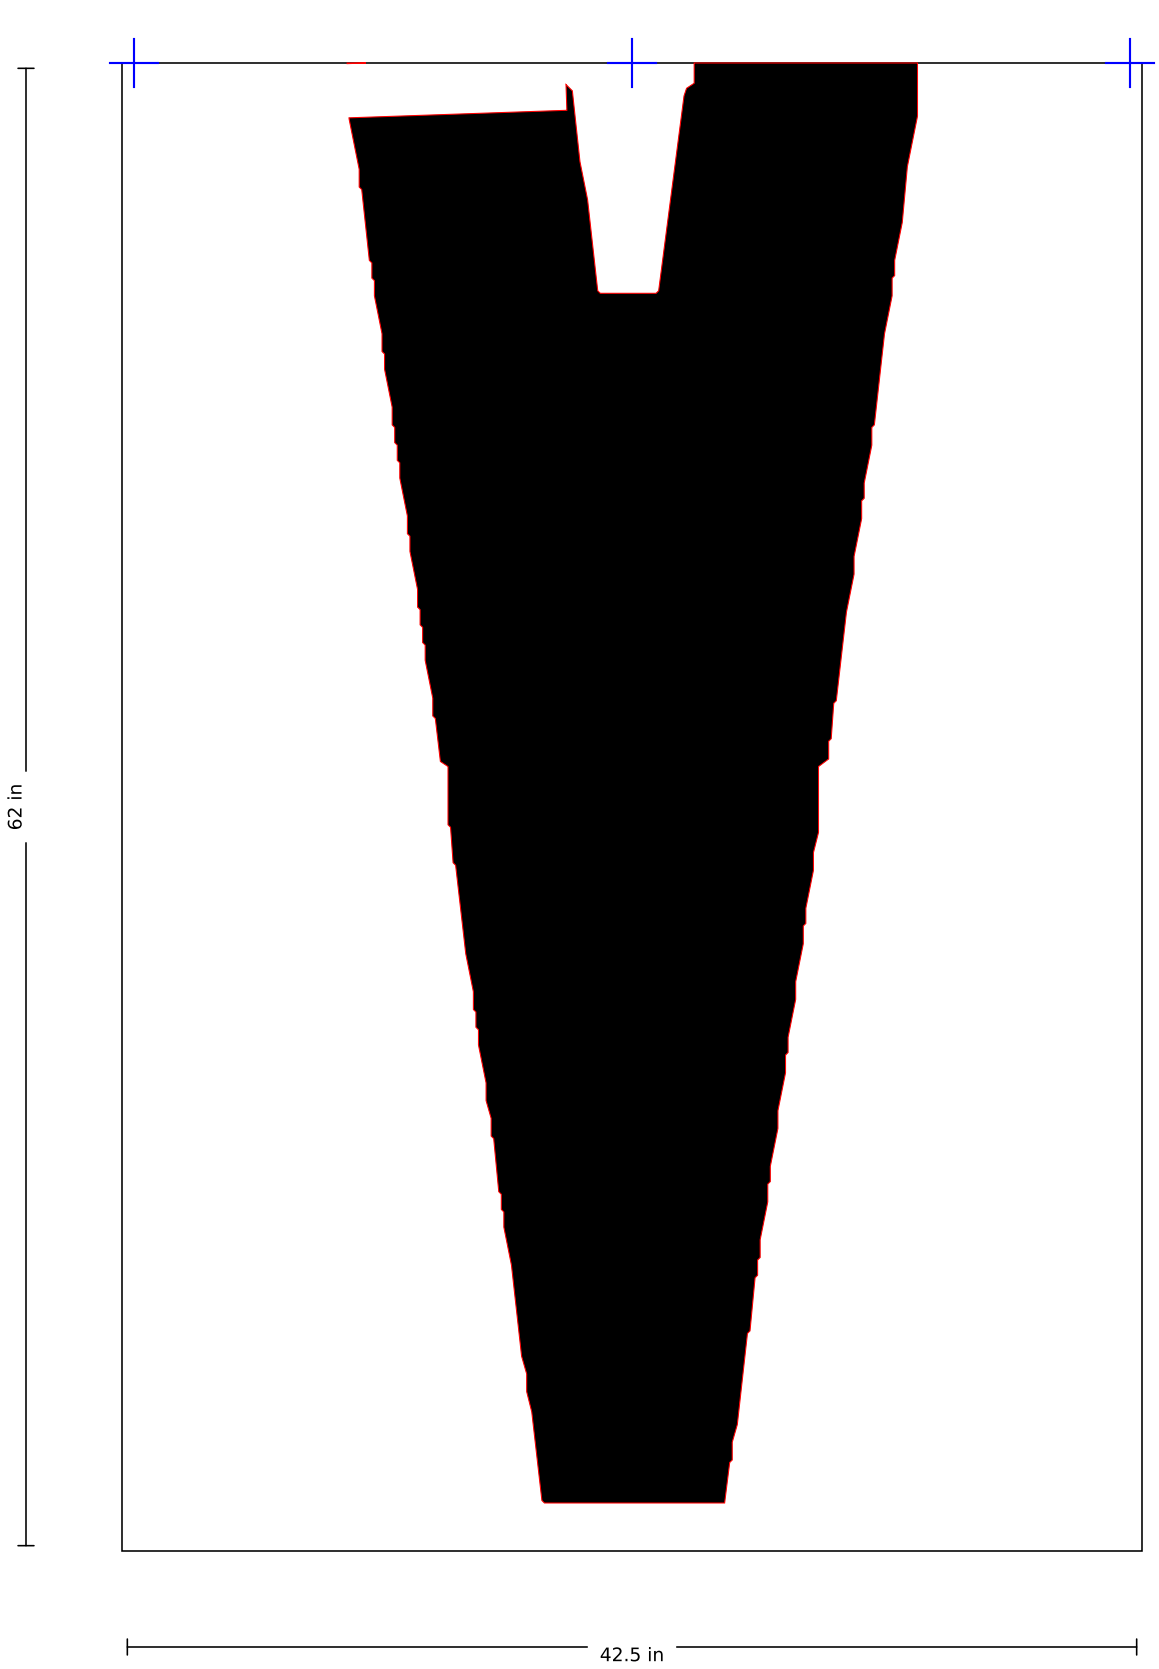

SSS-FAA-120-01-V · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

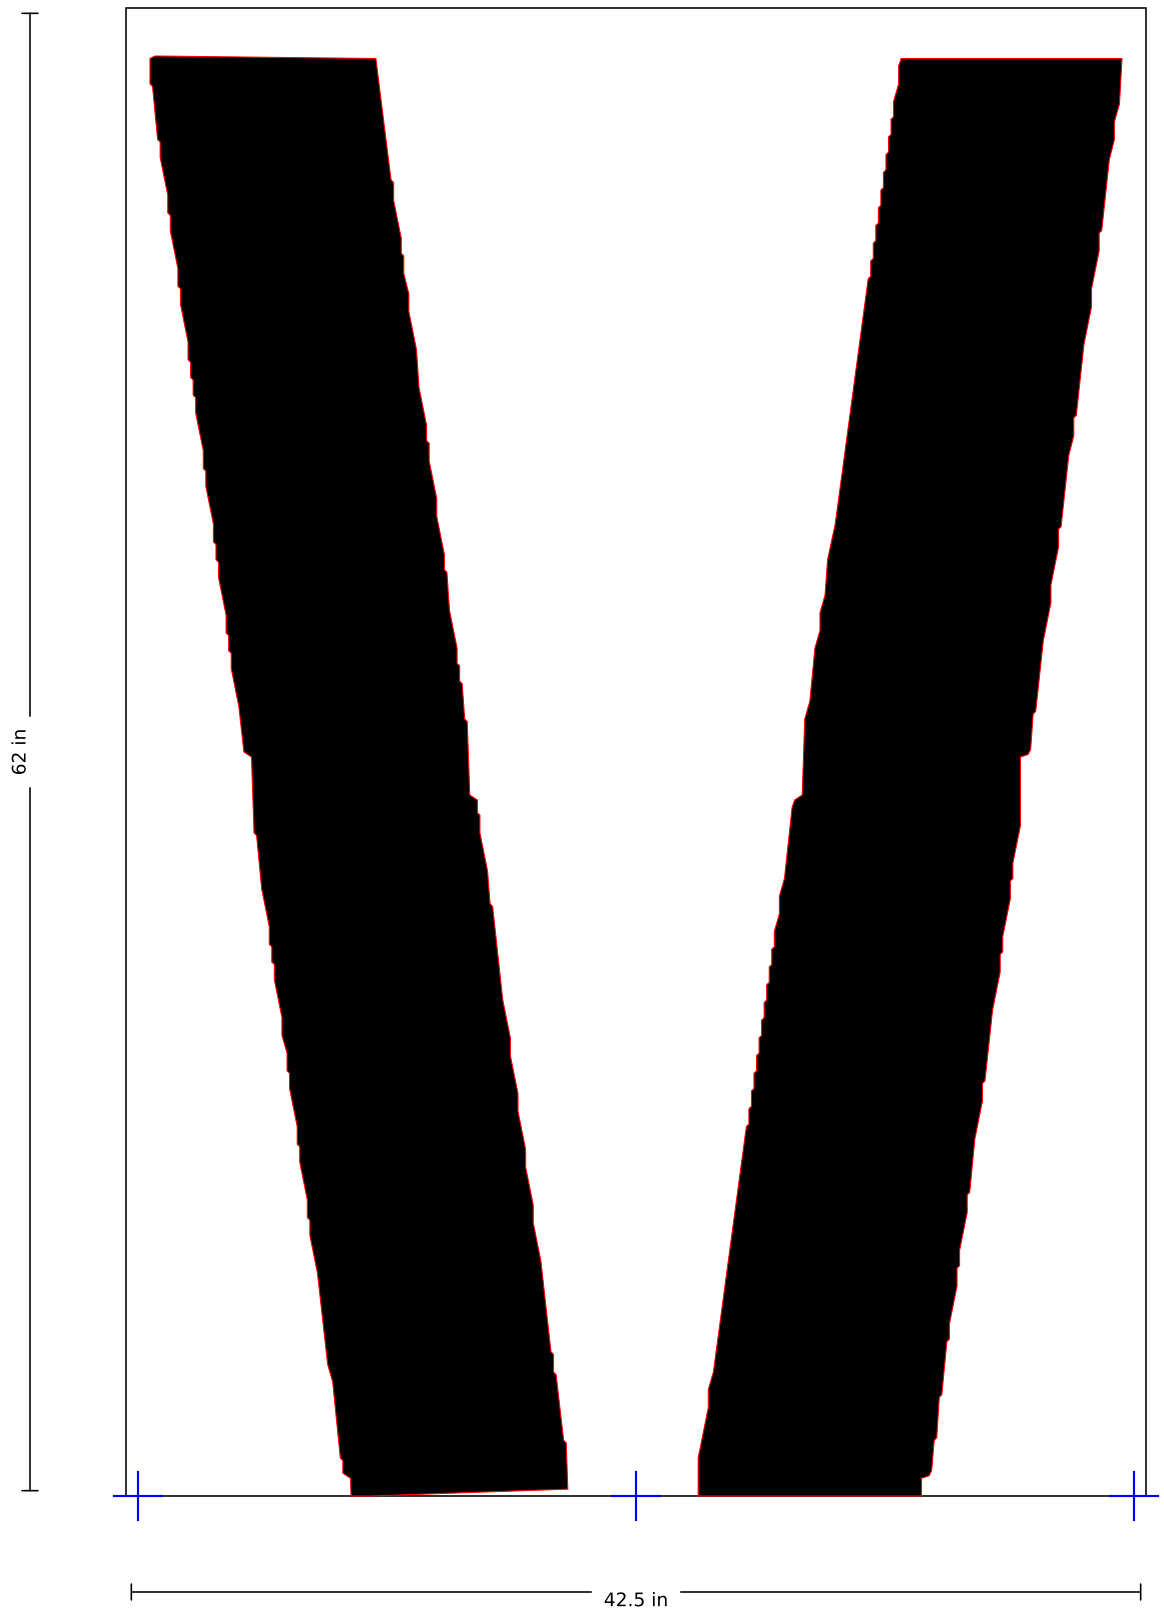


SSS-FAA-120-01-W

120" FAA Airport "W" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 44 W x 120 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

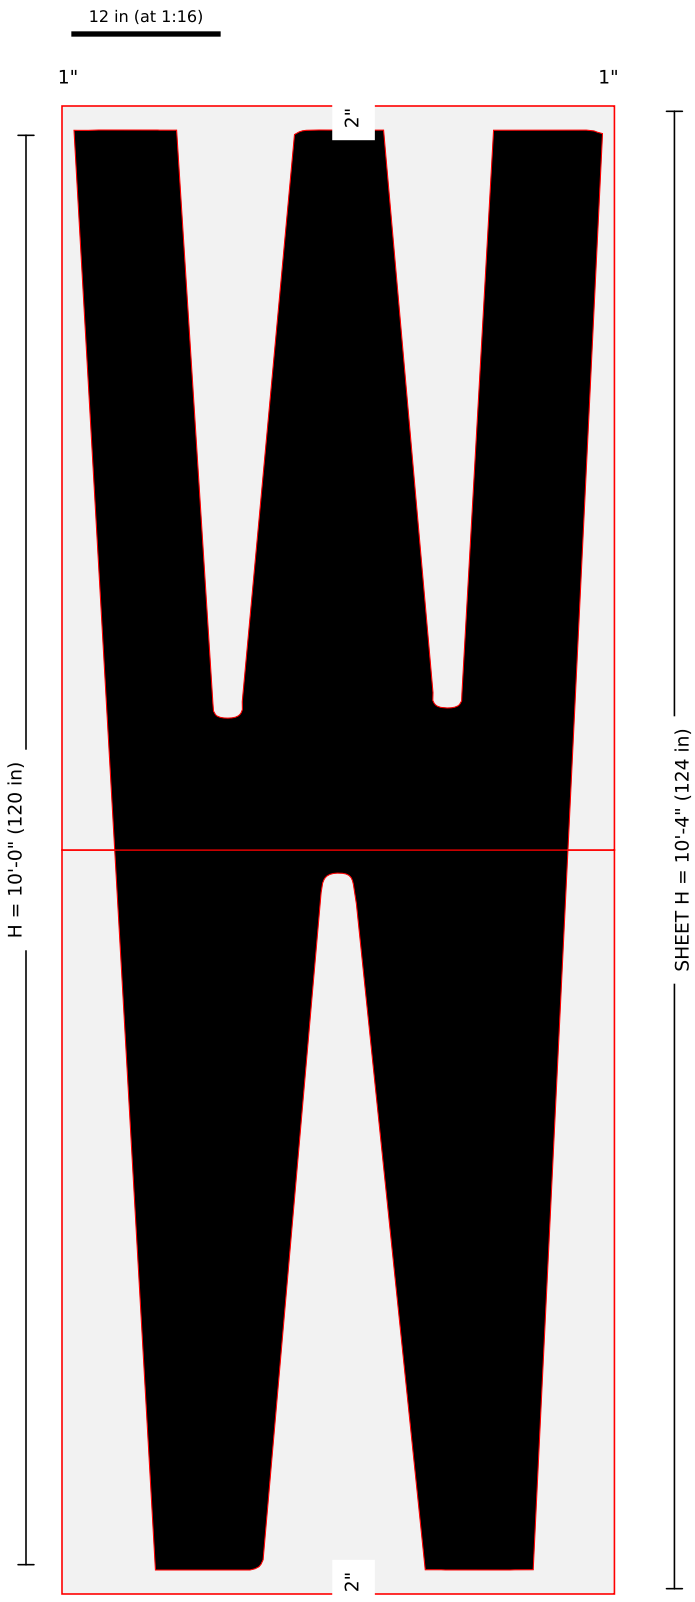


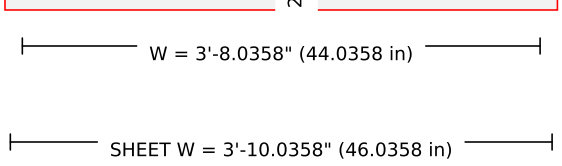

Pieces: 2 (1 x 2); blanks (in): 46.036 x 62, 46.036 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120W-120in-FAA-Airport-Letter-W-134x48-2.jpg: width 44 from image scale (43.87); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-W · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

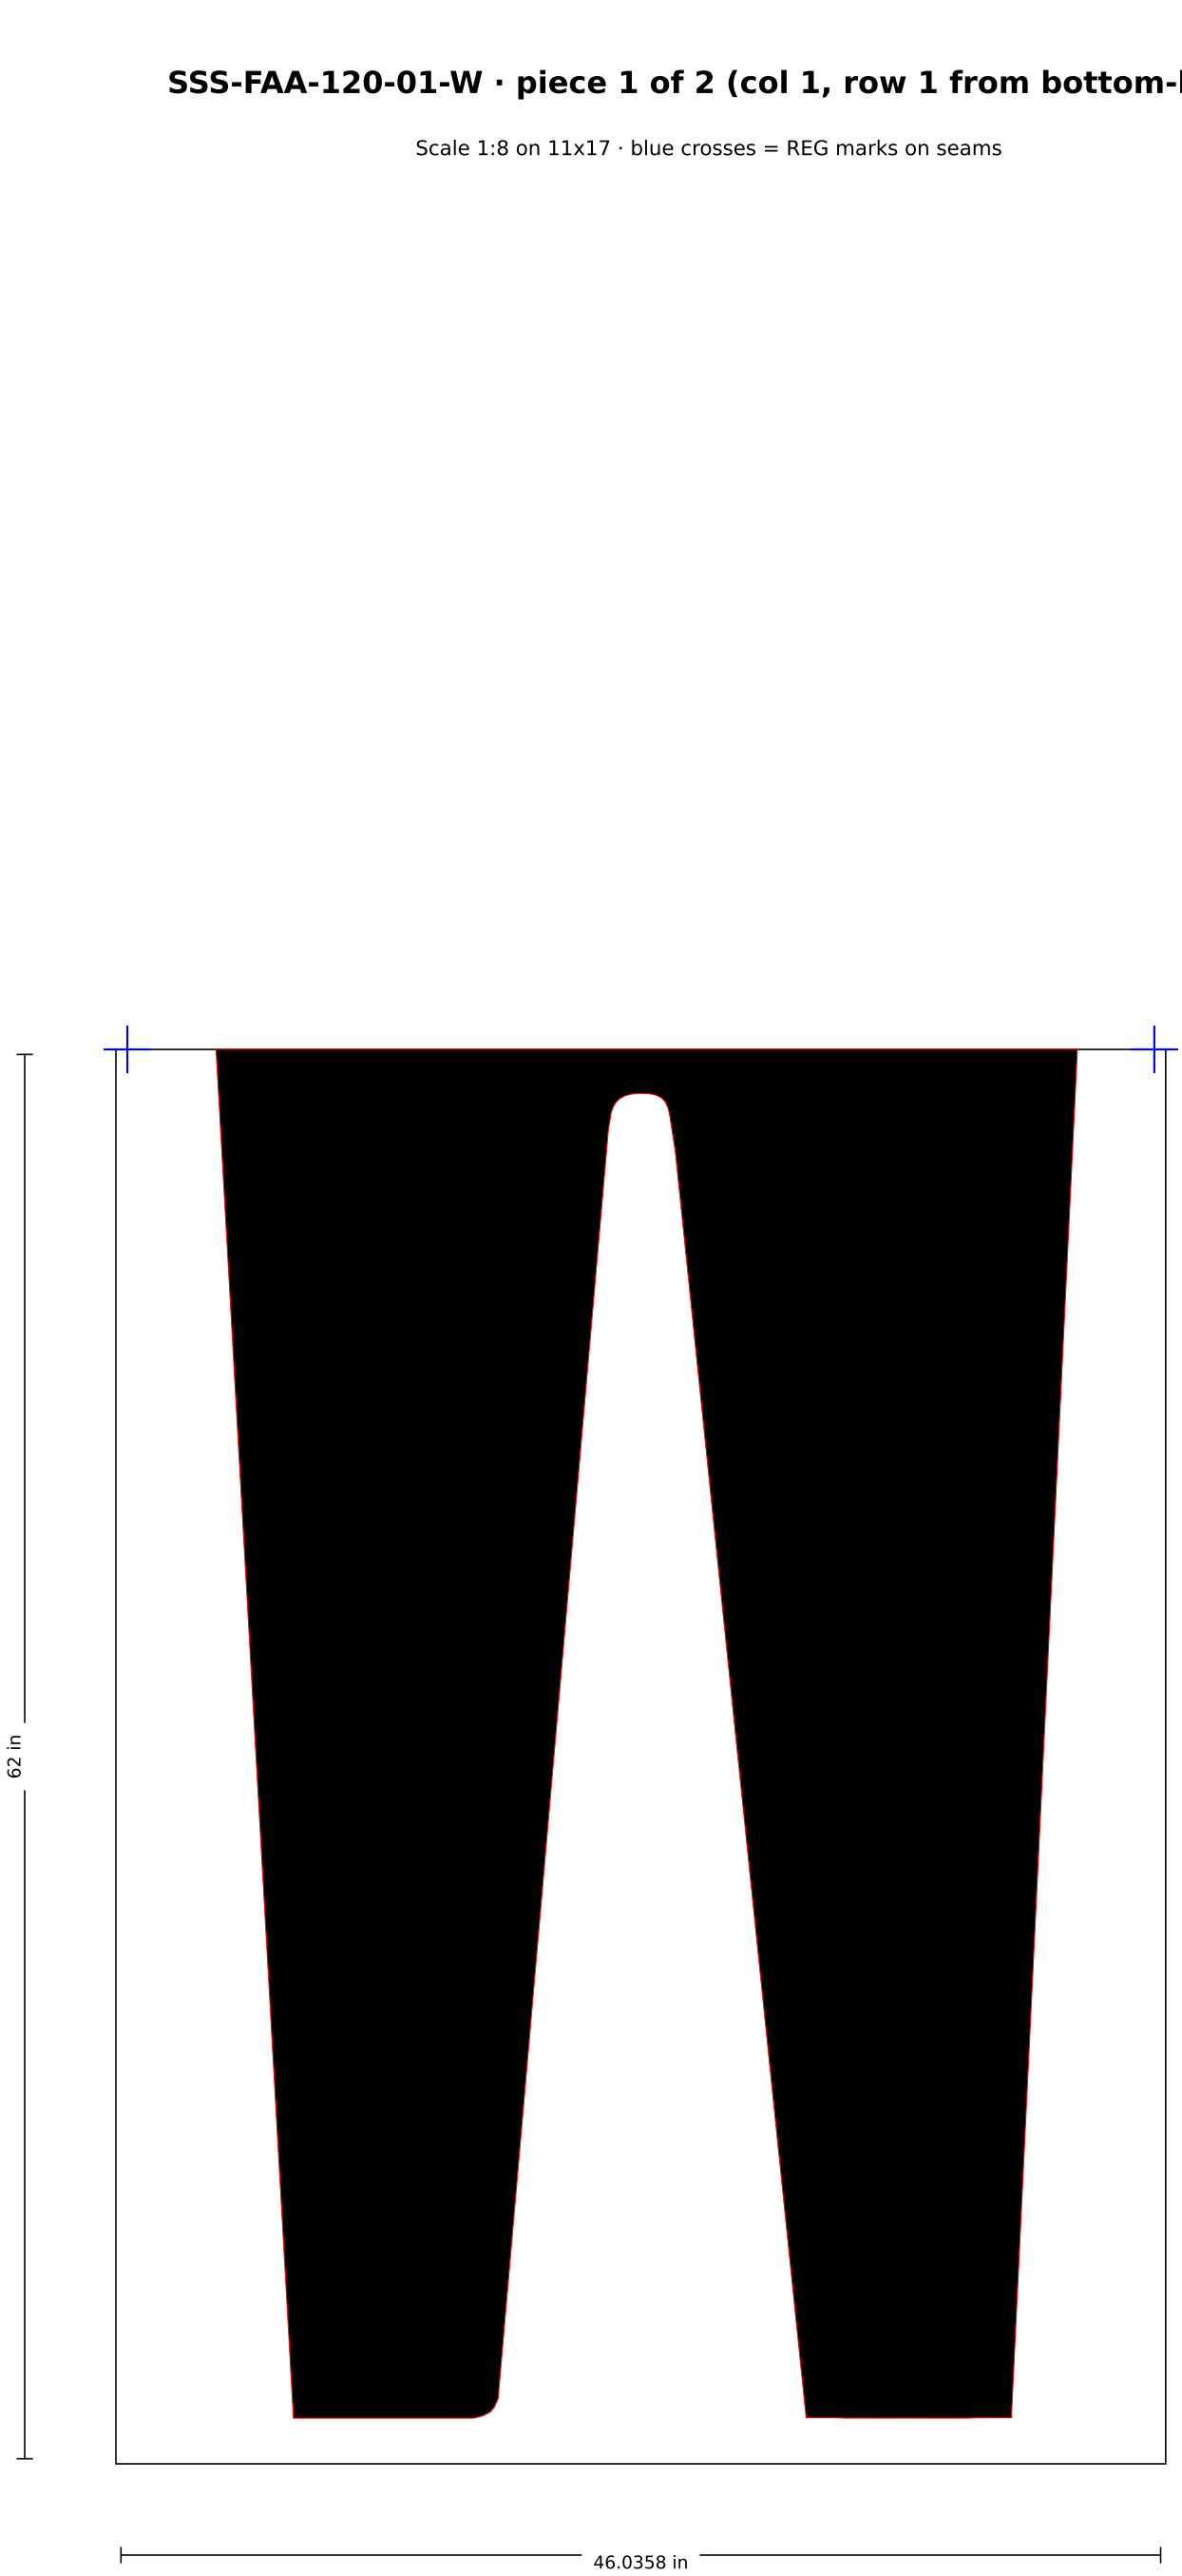

SSS-FAA-120-01-W · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

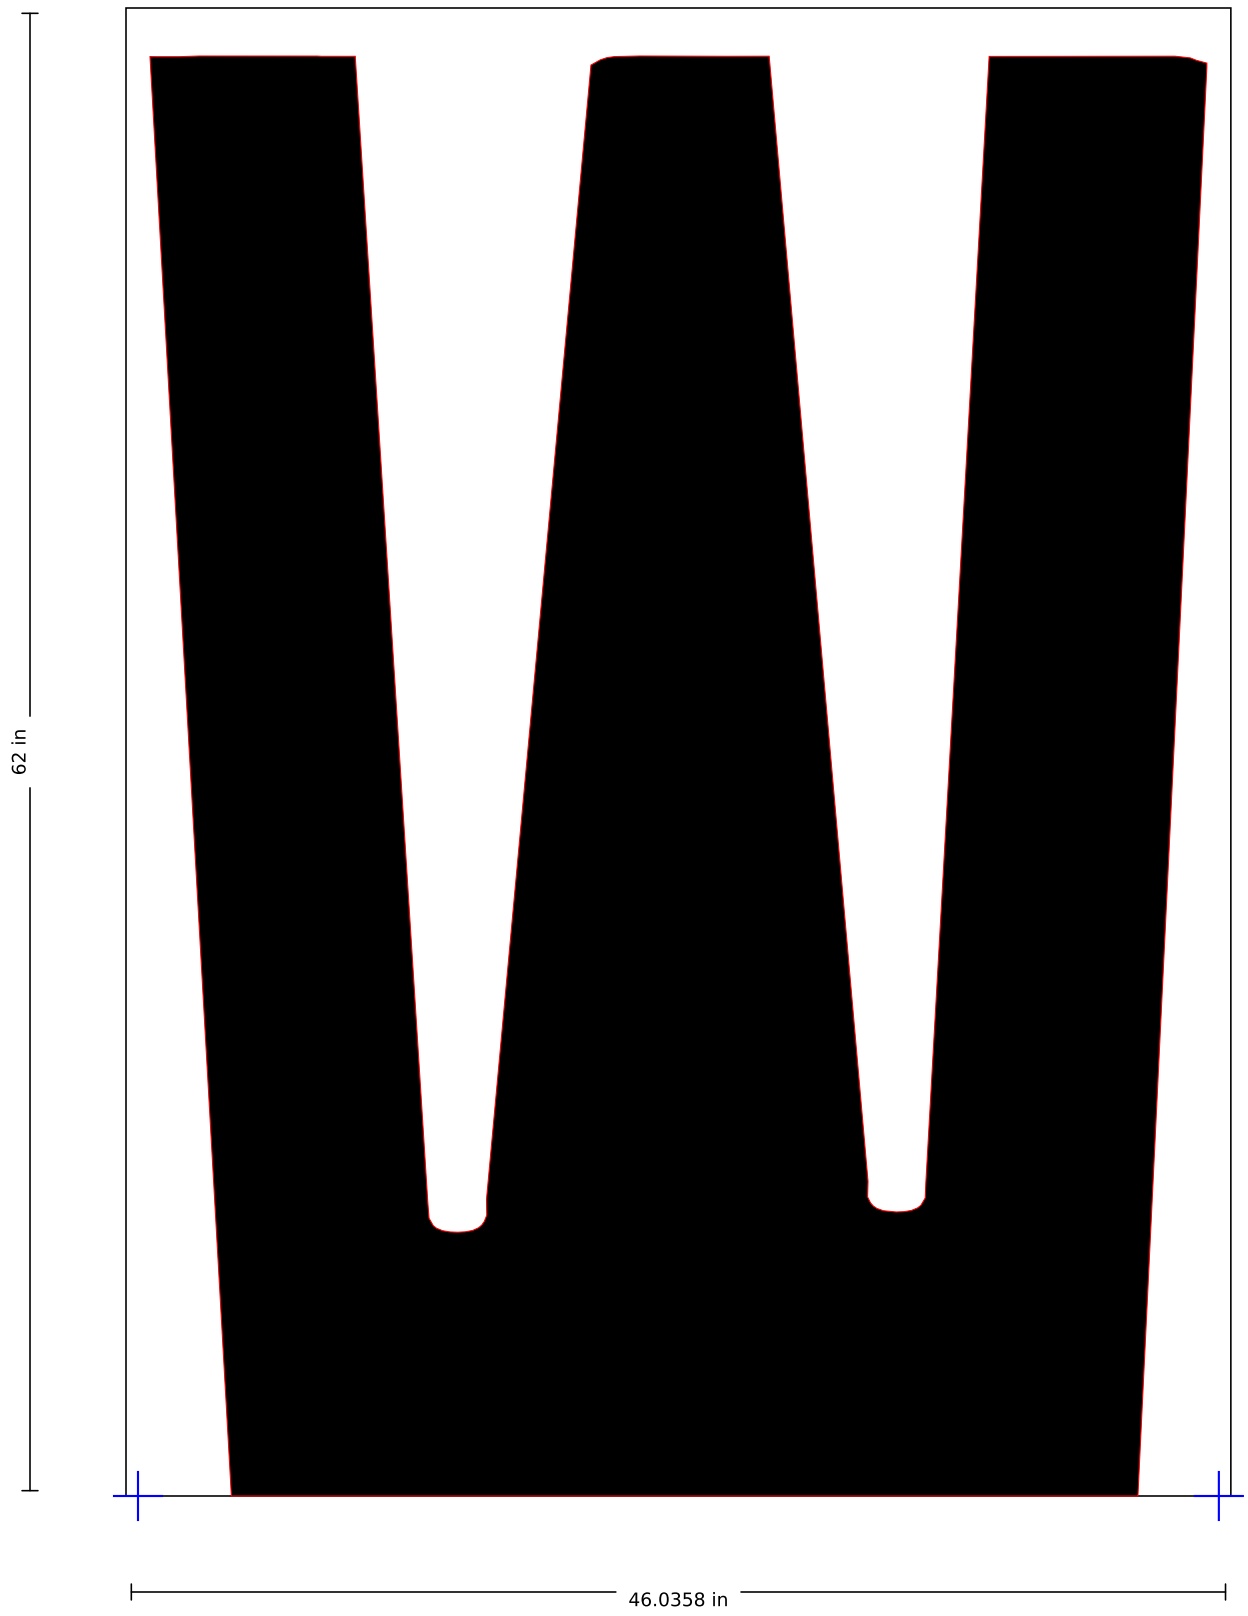

SSS-FAA-120-01-X

120" FAA Airport "X" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 35 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

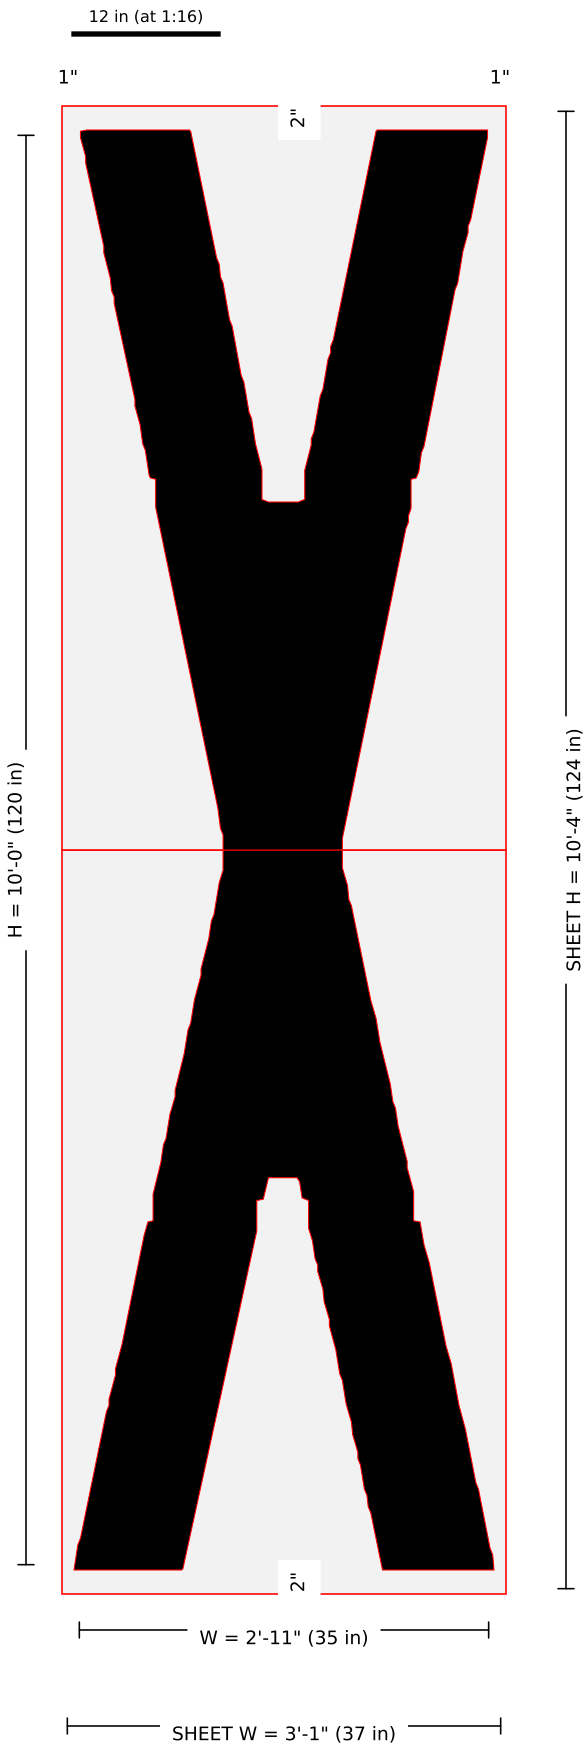

Pieces: 2 (1 x 2); blanks (in): 37 x 62, 37 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120X-120in-FAA-Airport-Letter-X-134x48-2.jpg: width = kit listing 35 (image-scale 34.17); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-X · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

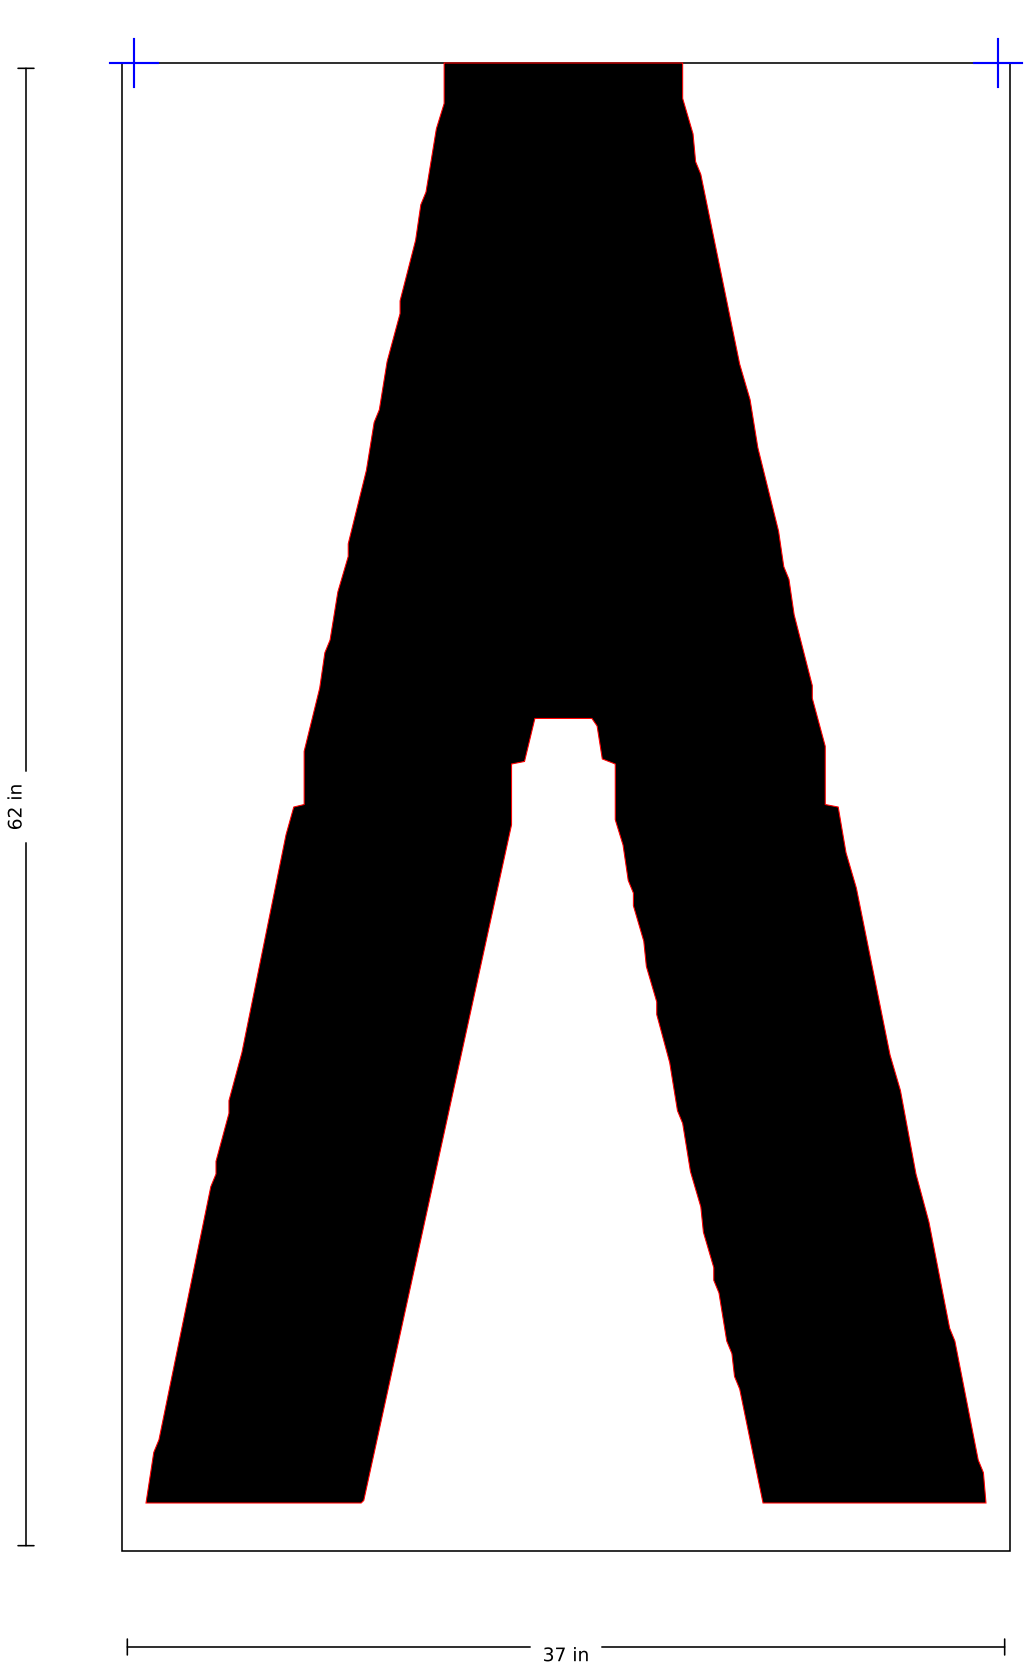

SSS-FAA-120-01-X · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

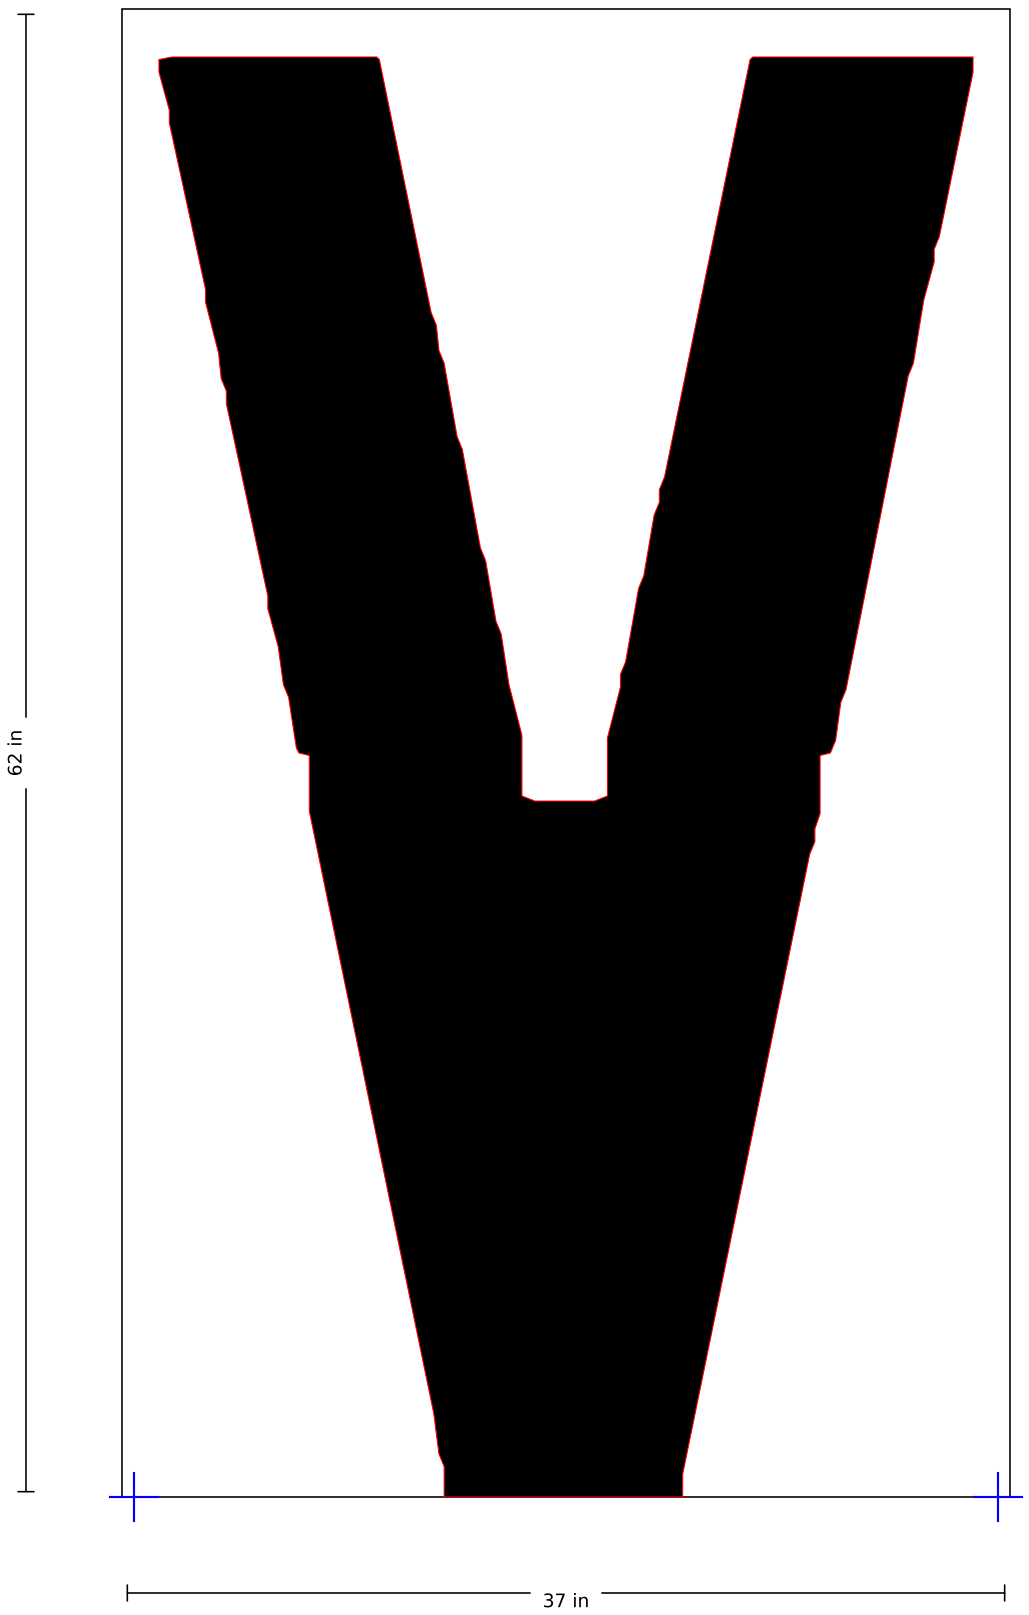

SSS-FAA-120-01-Y

120" FAA Airport "Y" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 42 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

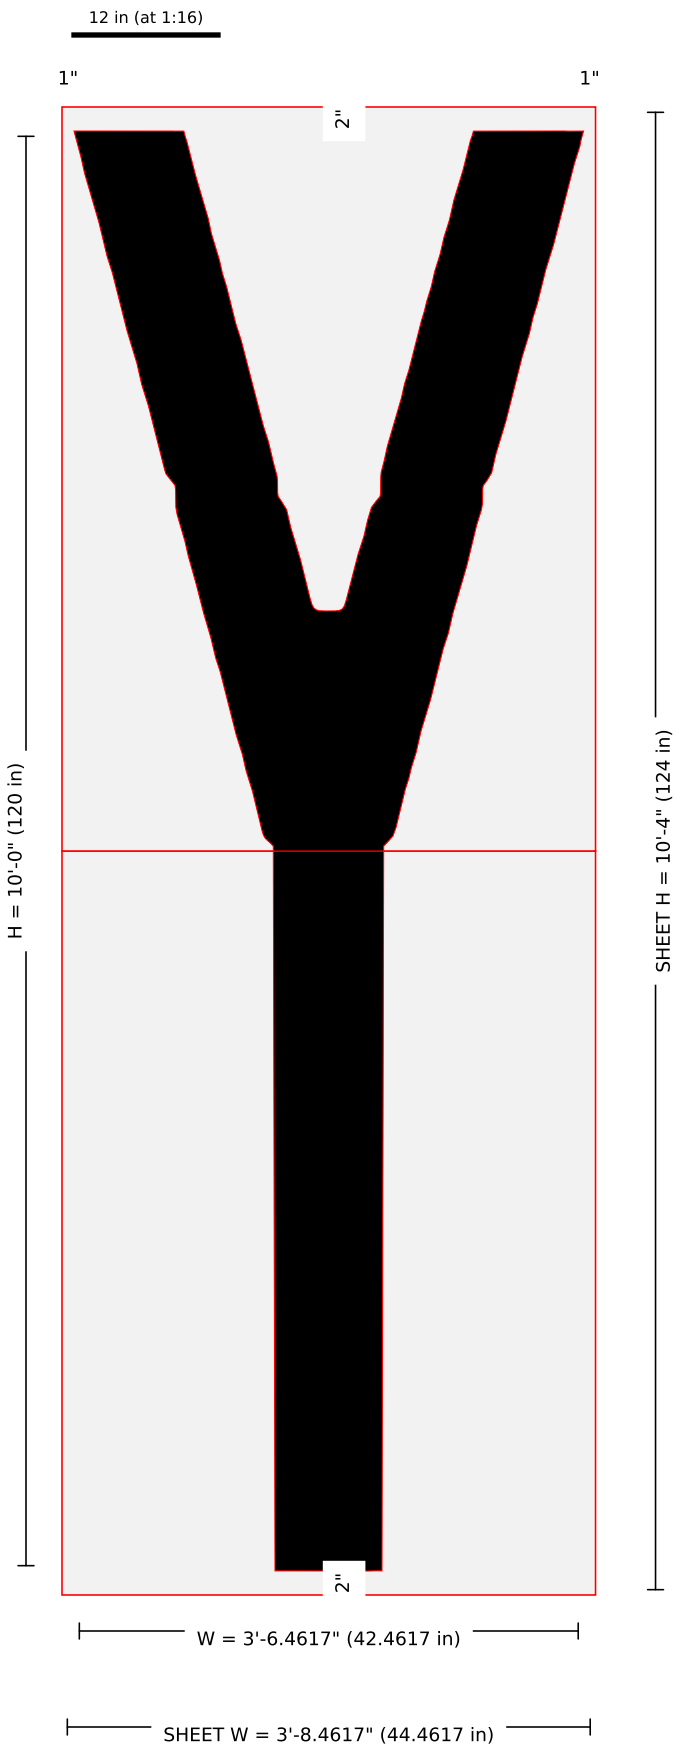

Pieces: 2 (1 x 2); blanks (in): 44.462 x 62, 44.462 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120Y-120in-FAA-Airport-Letter-Y-134x48-2.jpg: width 42 from image scale (41.79); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-Y · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

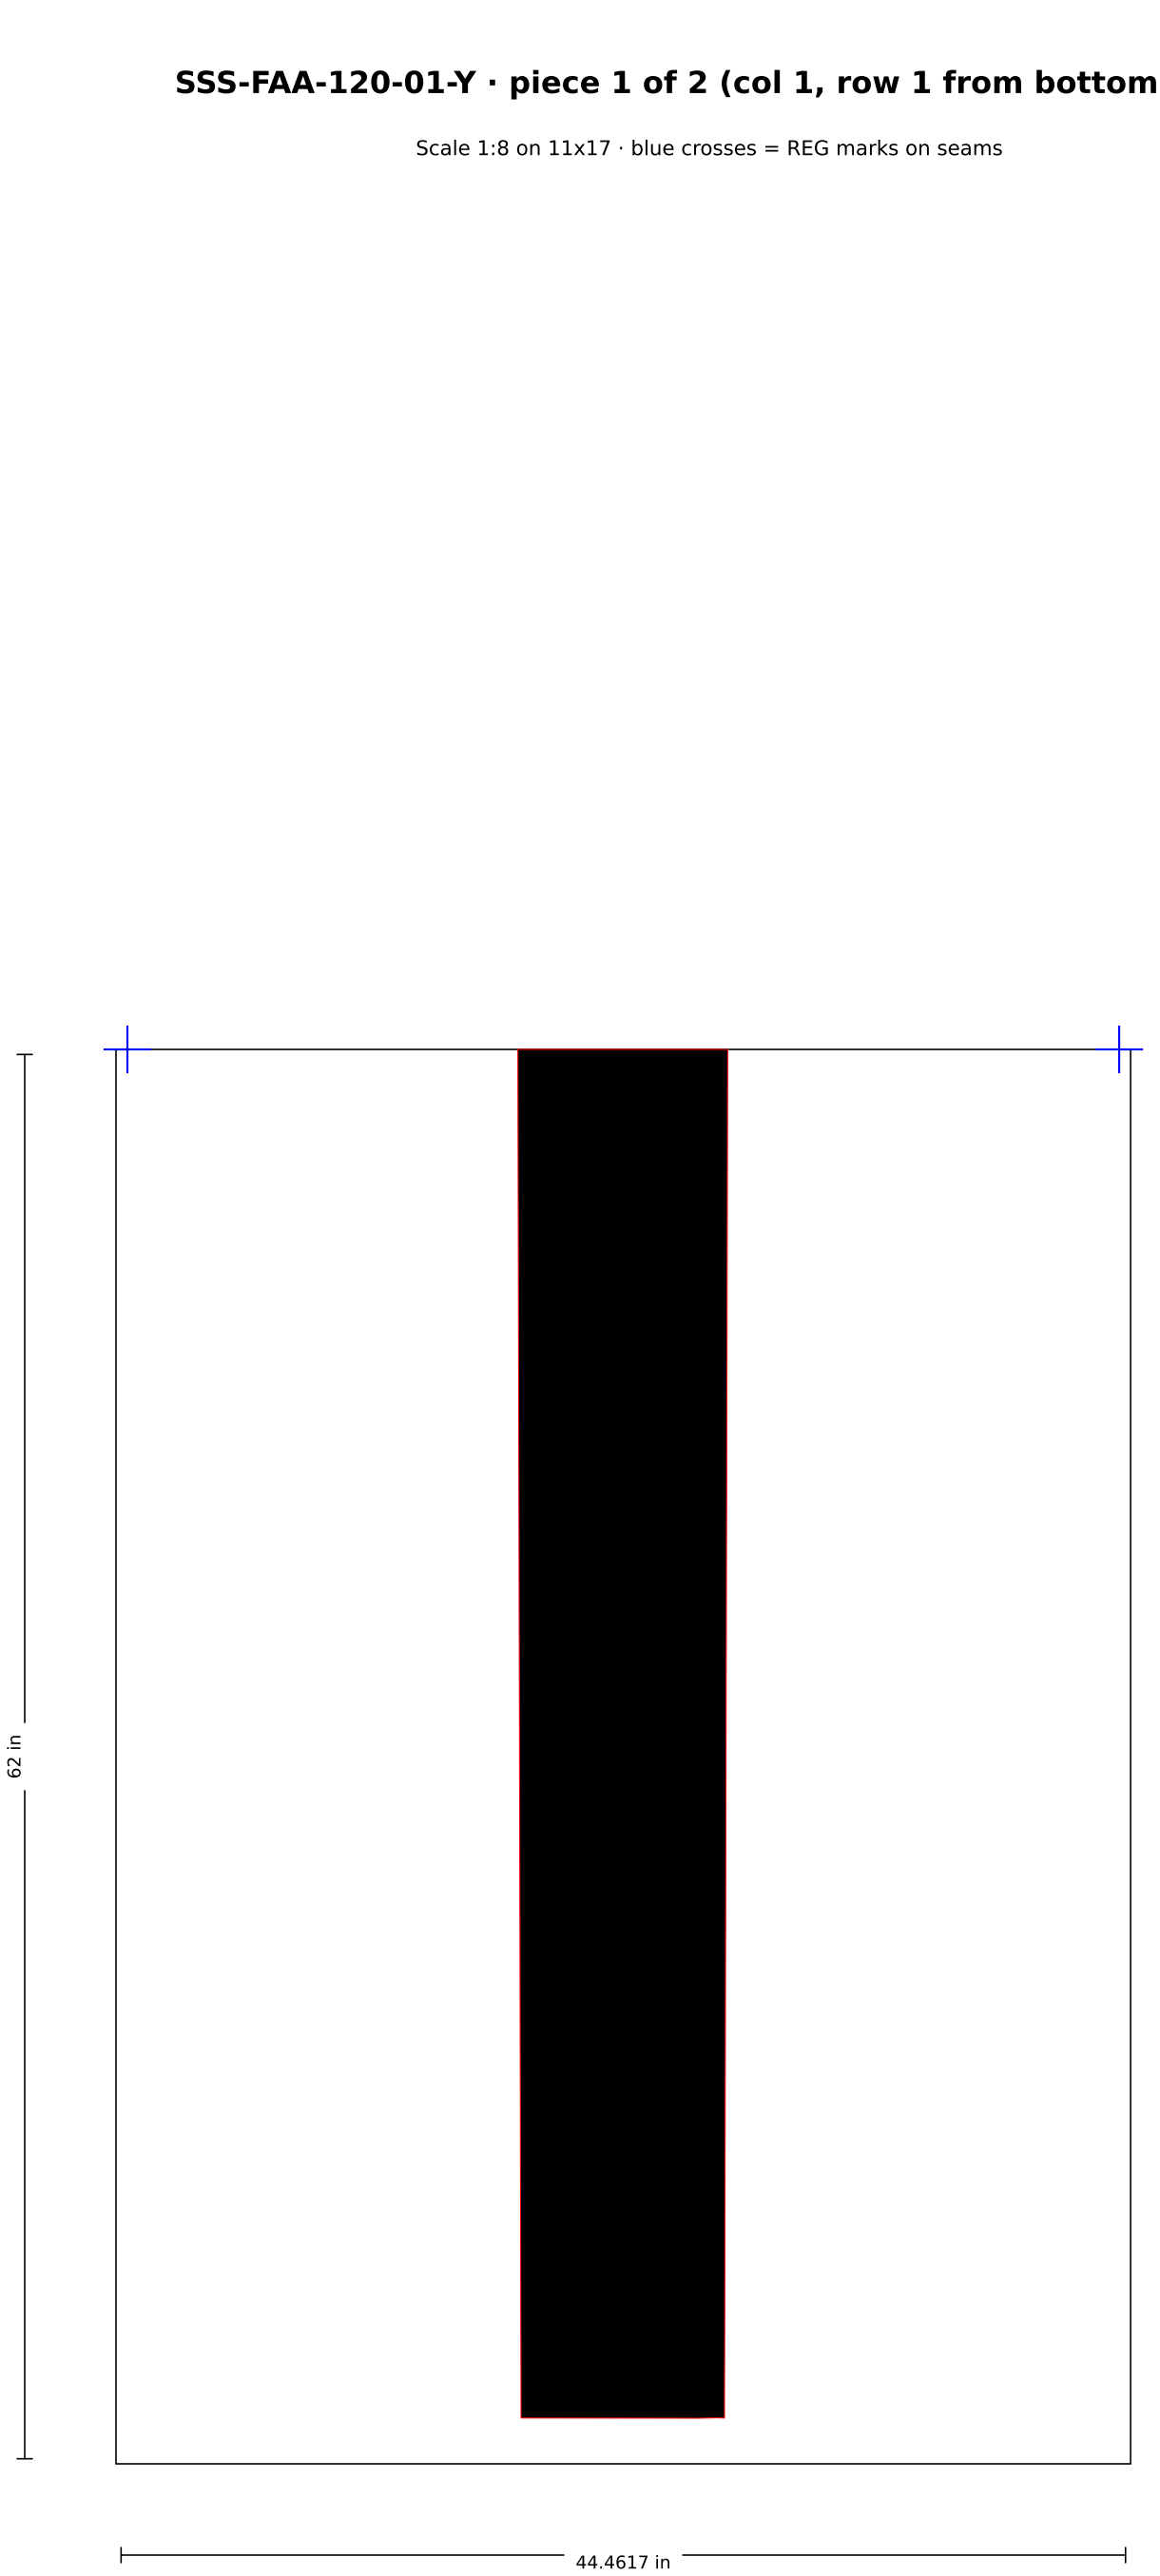

SSS-FAA-120-01-Y · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

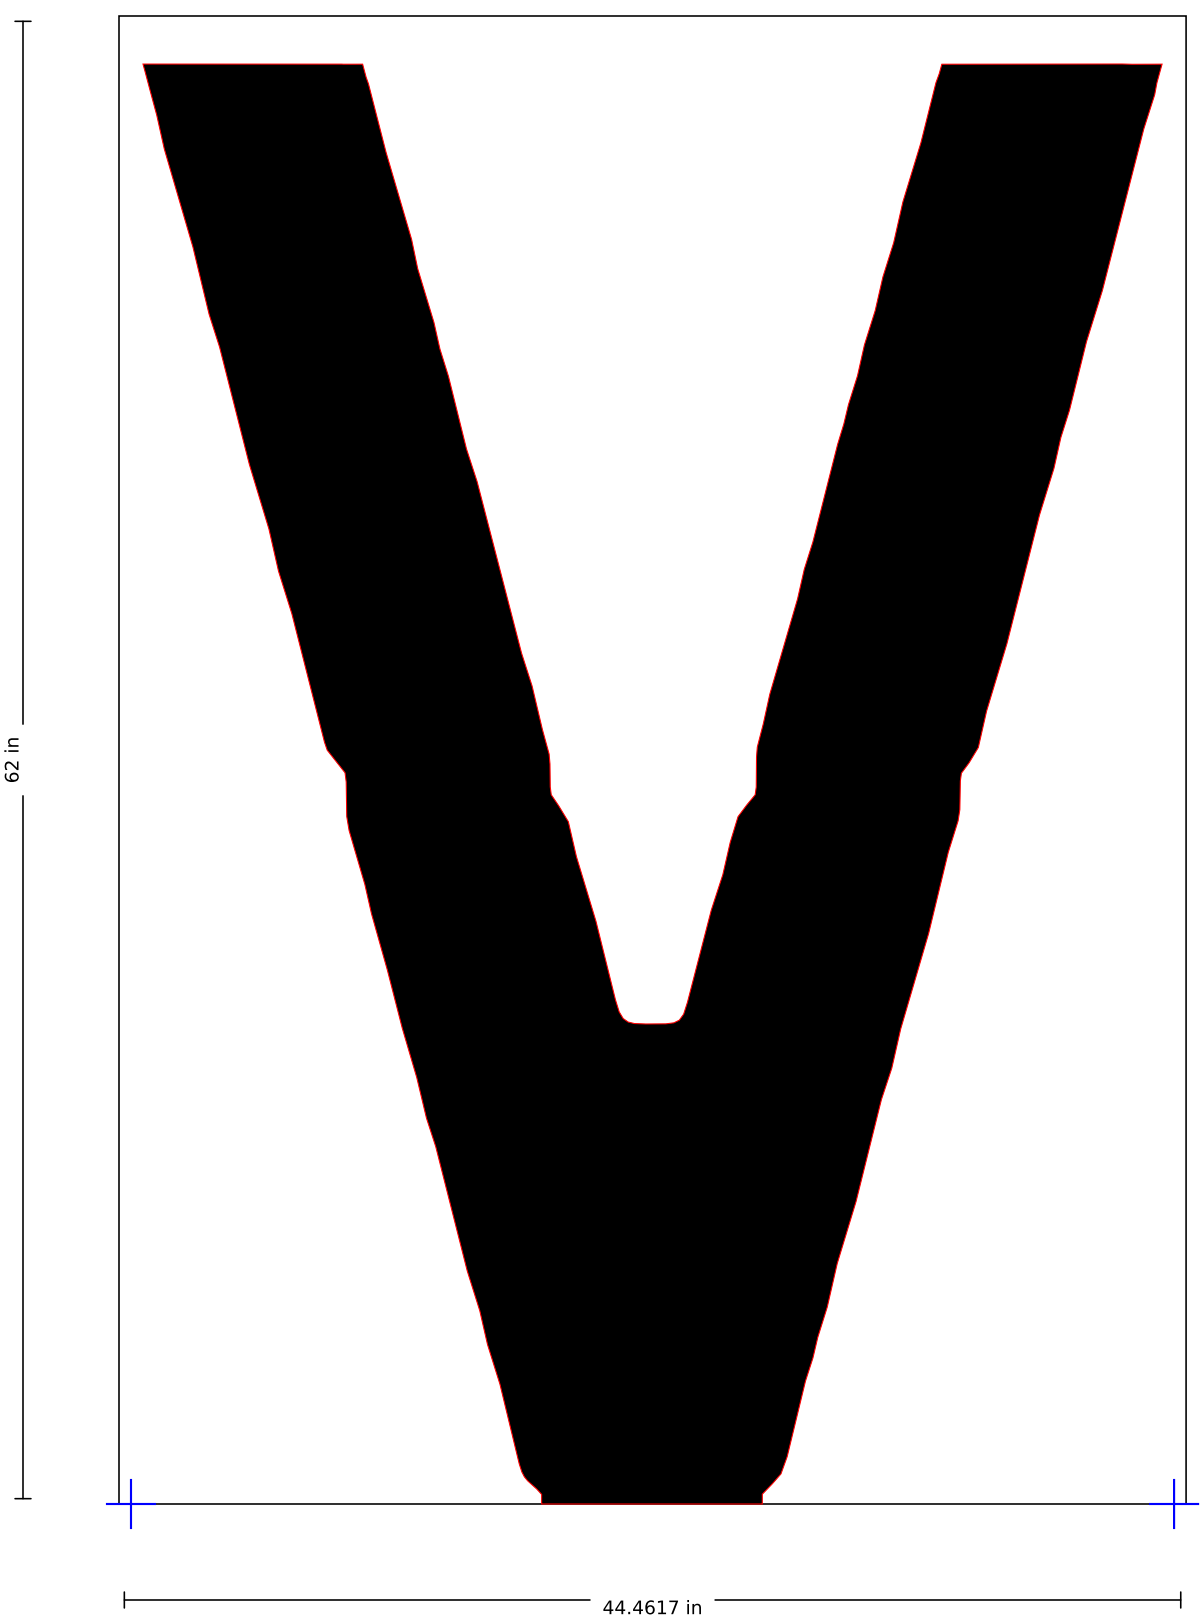

SSS-FAA-120-01-Z

120" FAA Airport "Z" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

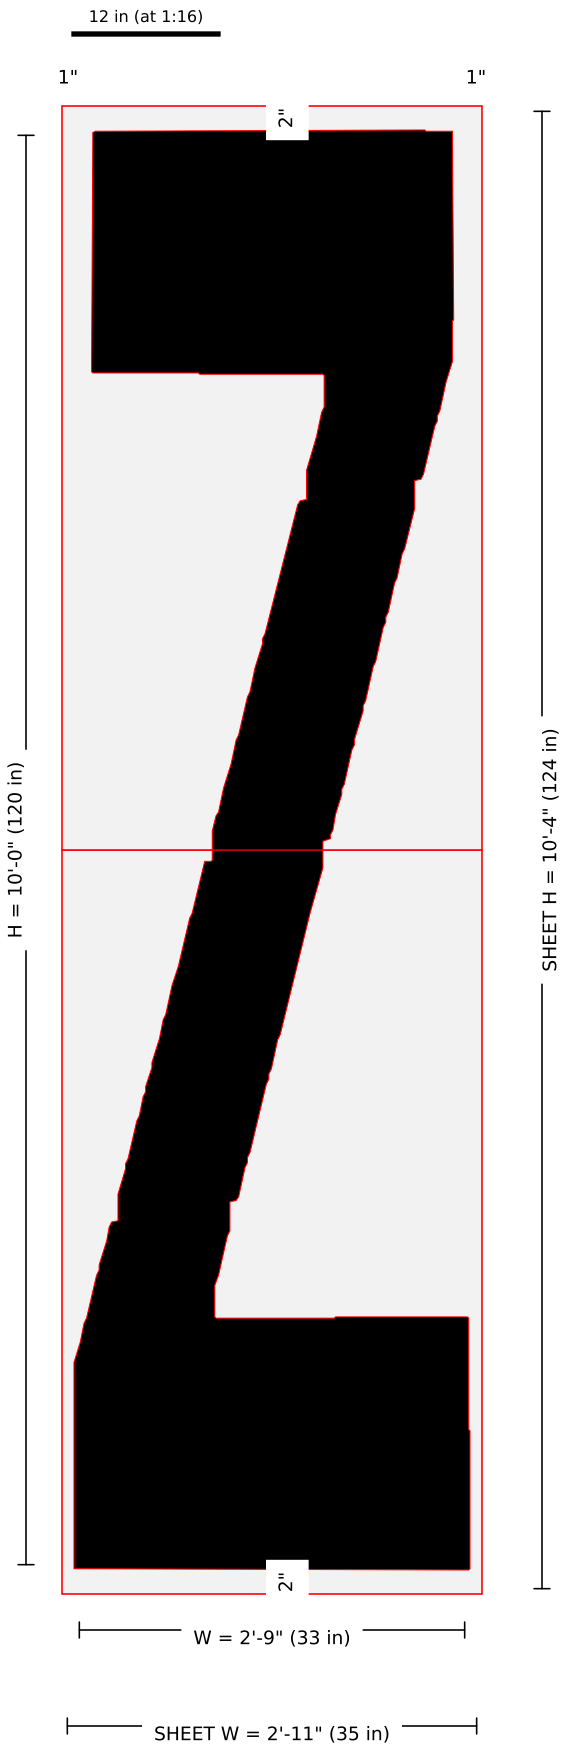

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120Z-120in-FAA-Airport-Letter-Z-134x48-2.jpg: width 33 from image scale (33.22); NOT the kit listing width; kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-Z · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

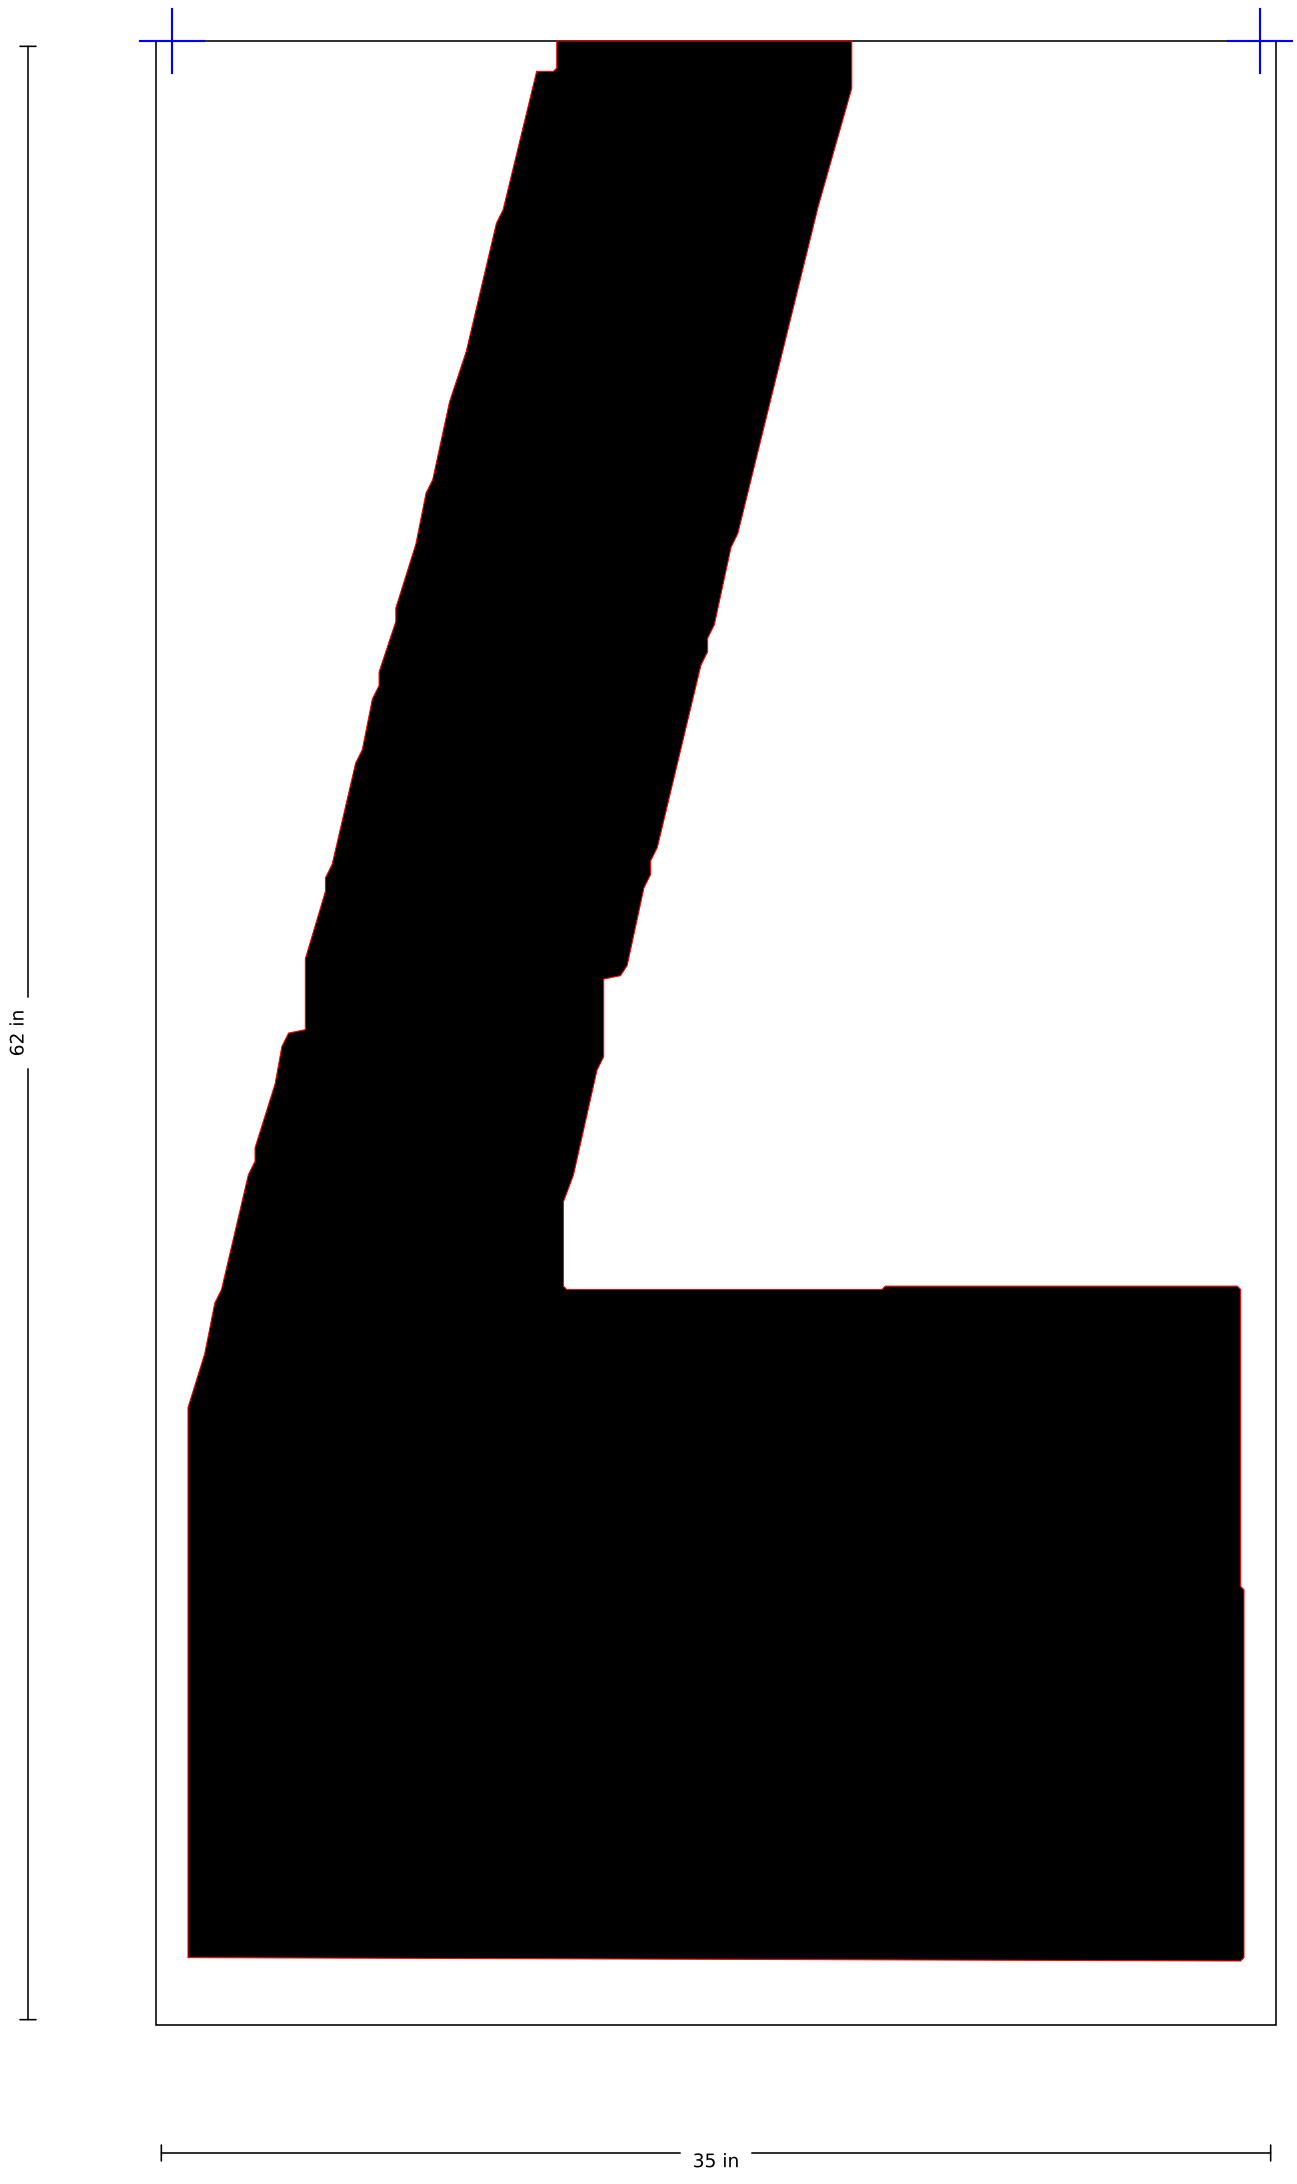

SSS-FAA-120-01-Z · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

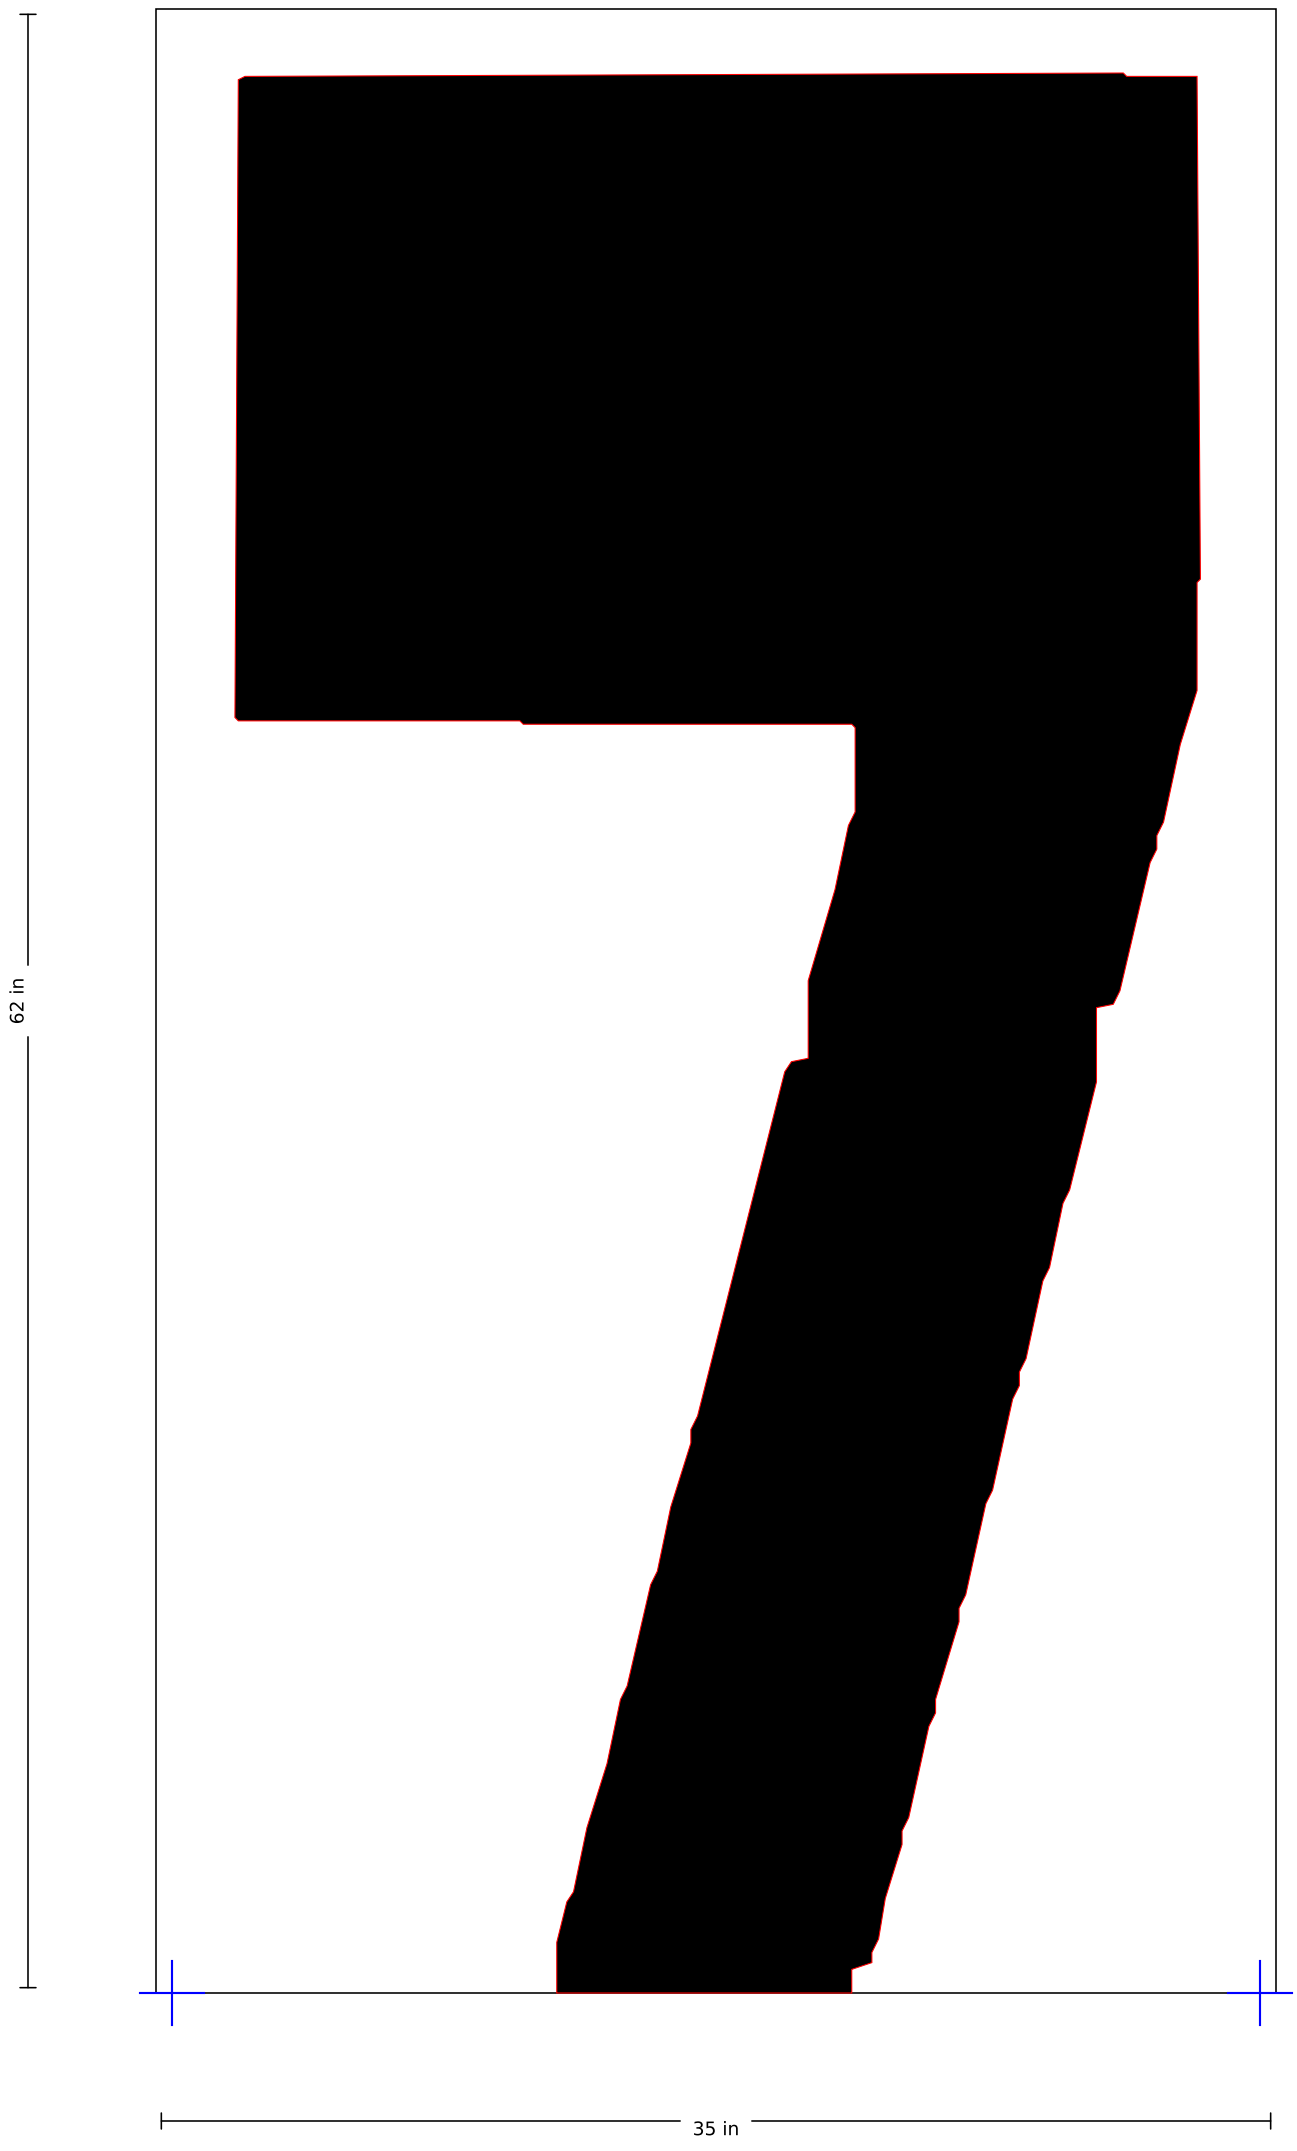

SSS-FAA-120-01-0

120" FAA Airport "0" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

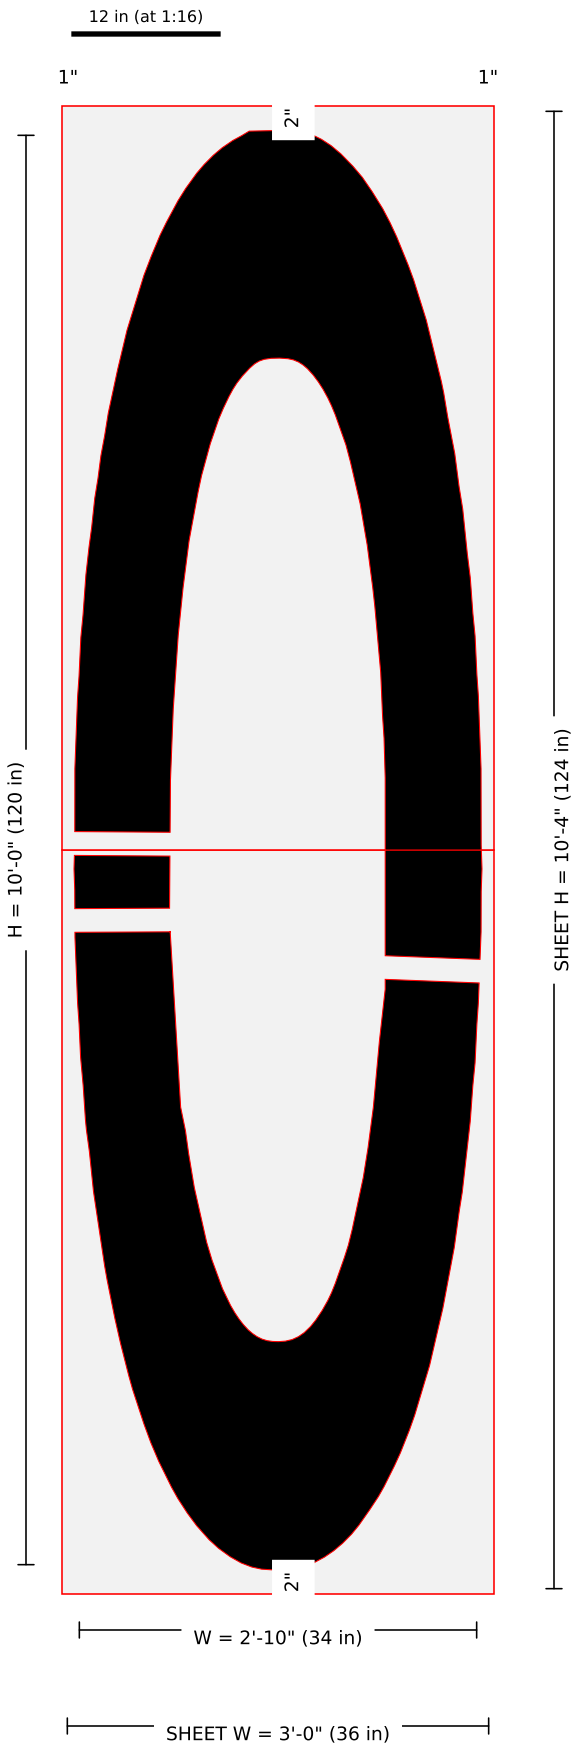

Pieces: 2 (1 x 2); blanks (in): 36 x 62, 36 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1200-120in-FAA-Airport-Letter-0-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.30); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (29.87,50.05) stroke 7.871" w=1.968"; (4.02,54.15) stroke 7.884" w=1.971" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-0 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

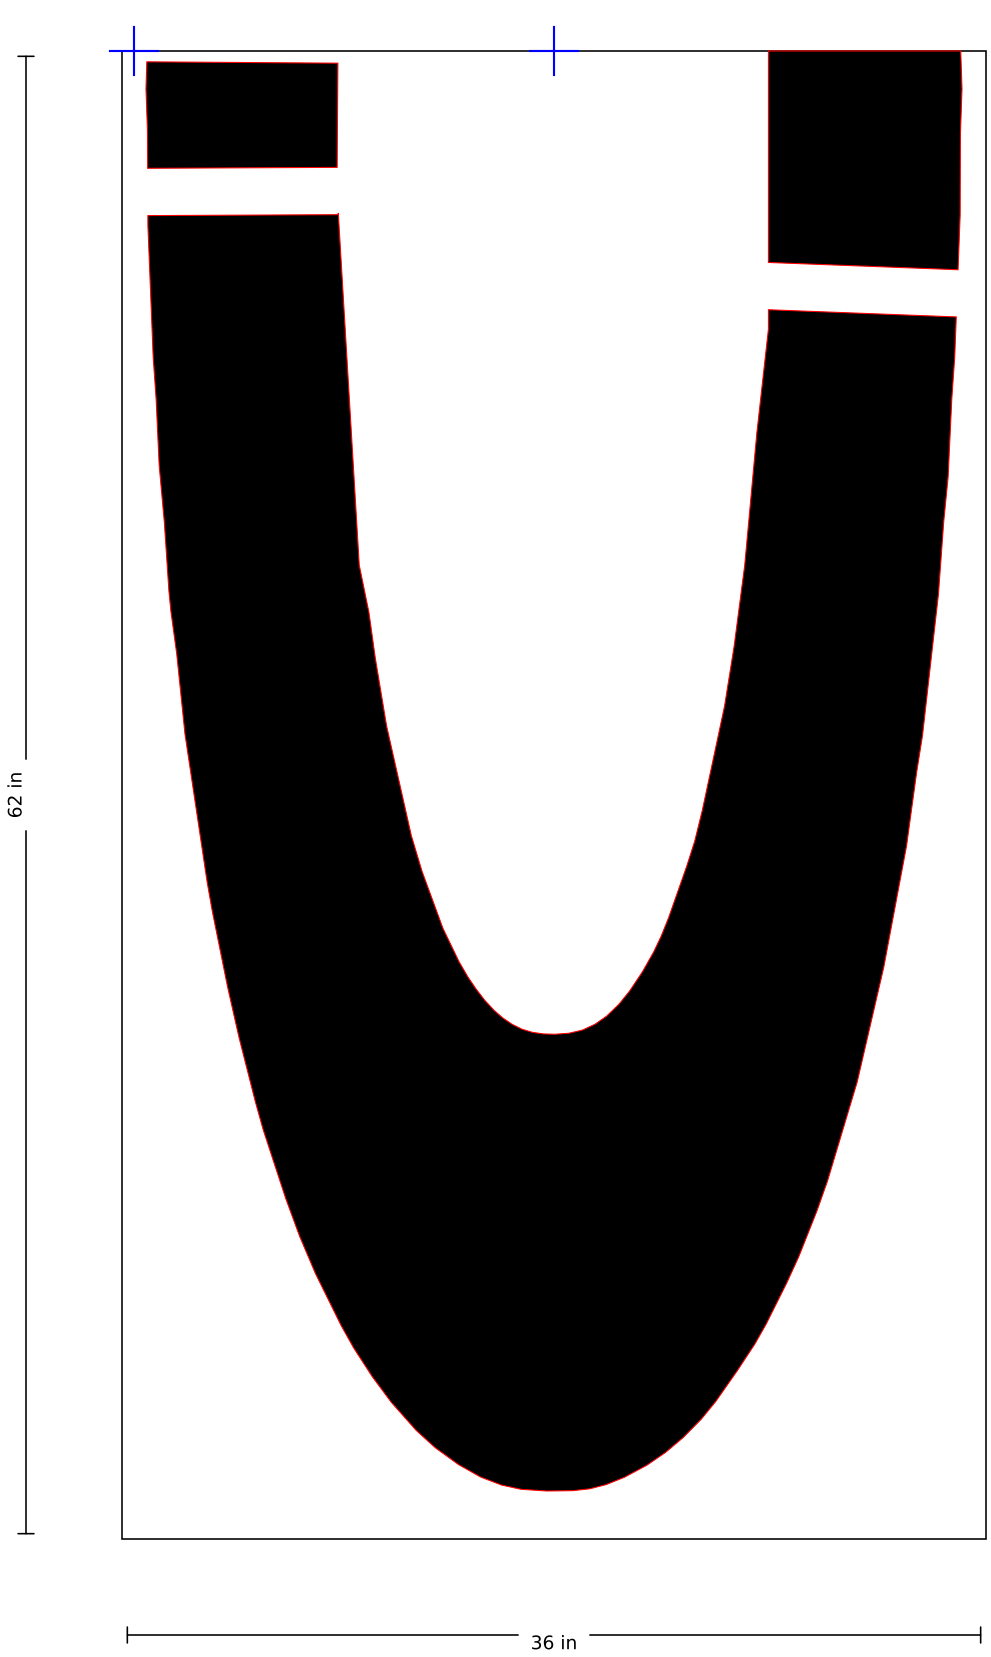

SSS-FAA-120-01-0 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

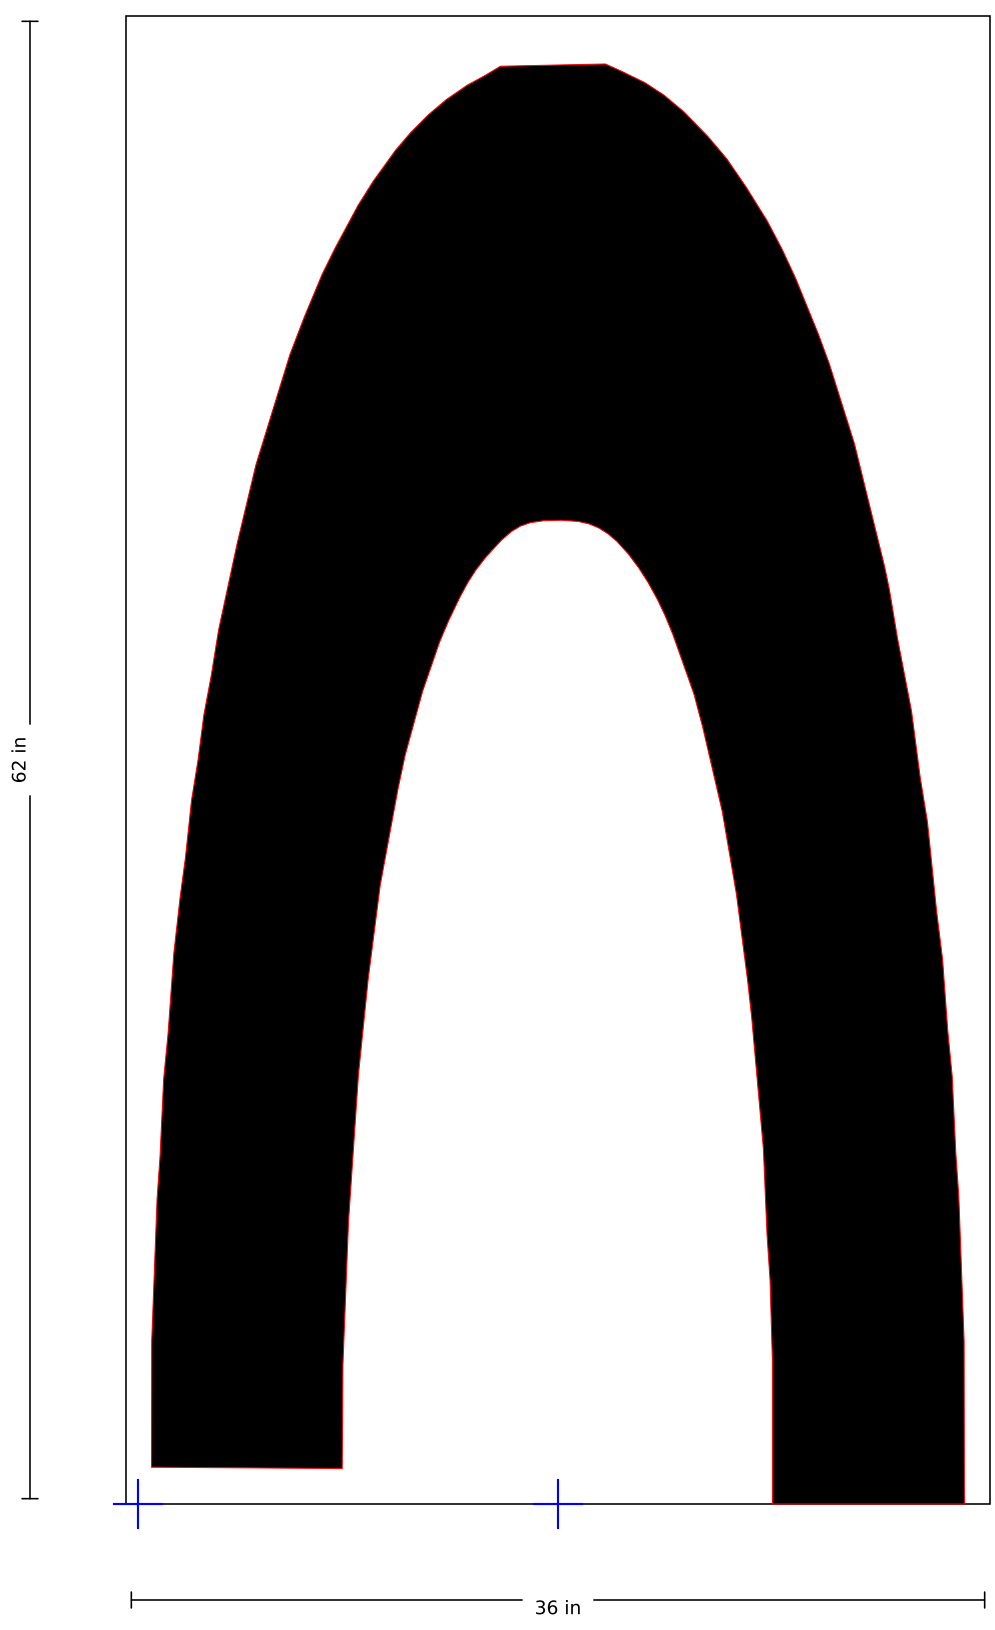

SSS-FAA-120-01-2

120" FAA Airport "2" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

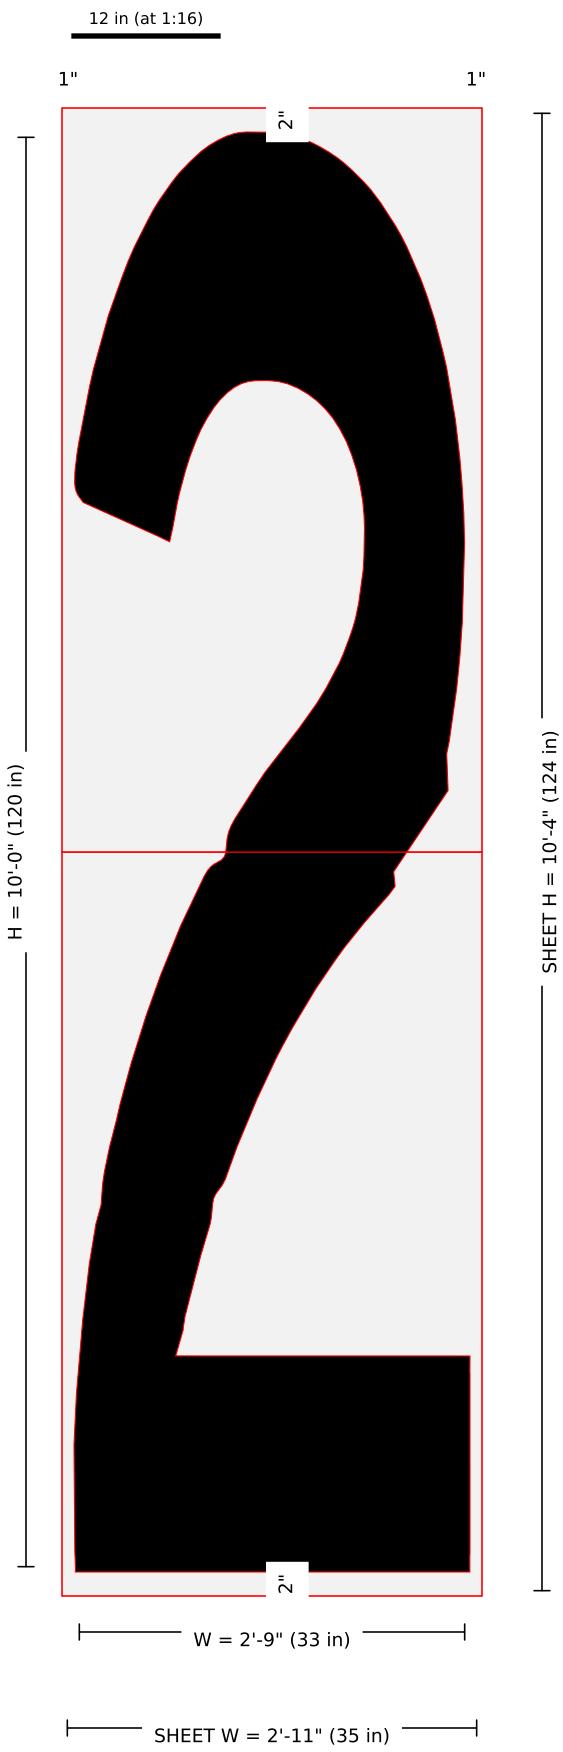

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1202-120in-FAA-Airport-Letter-2-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.58); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 3 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-2 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

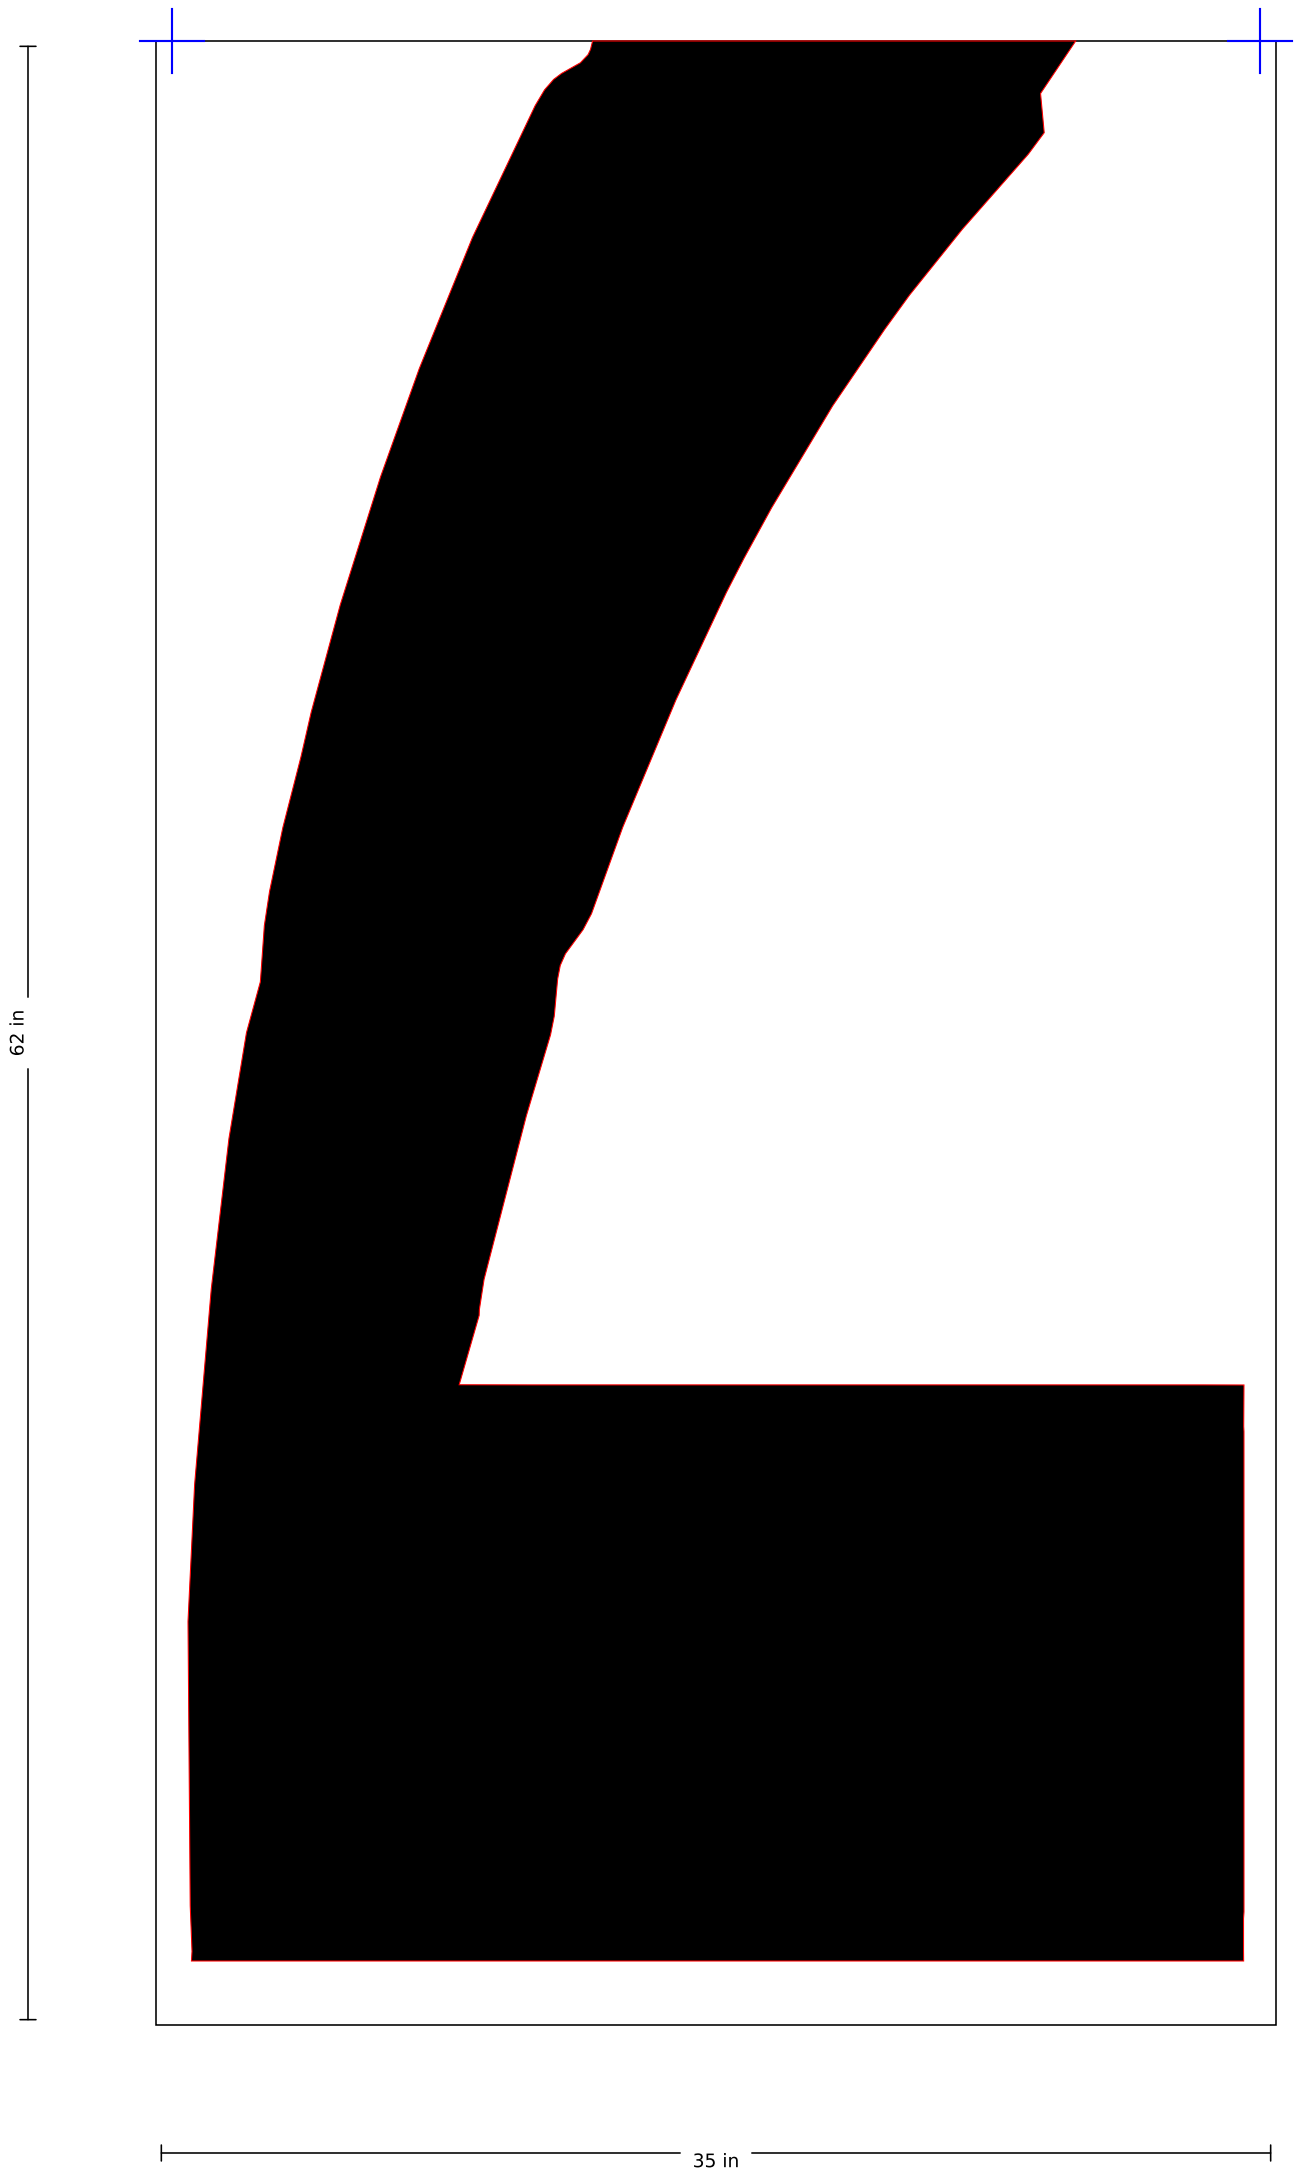

SSS-FAA-120-01-2 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

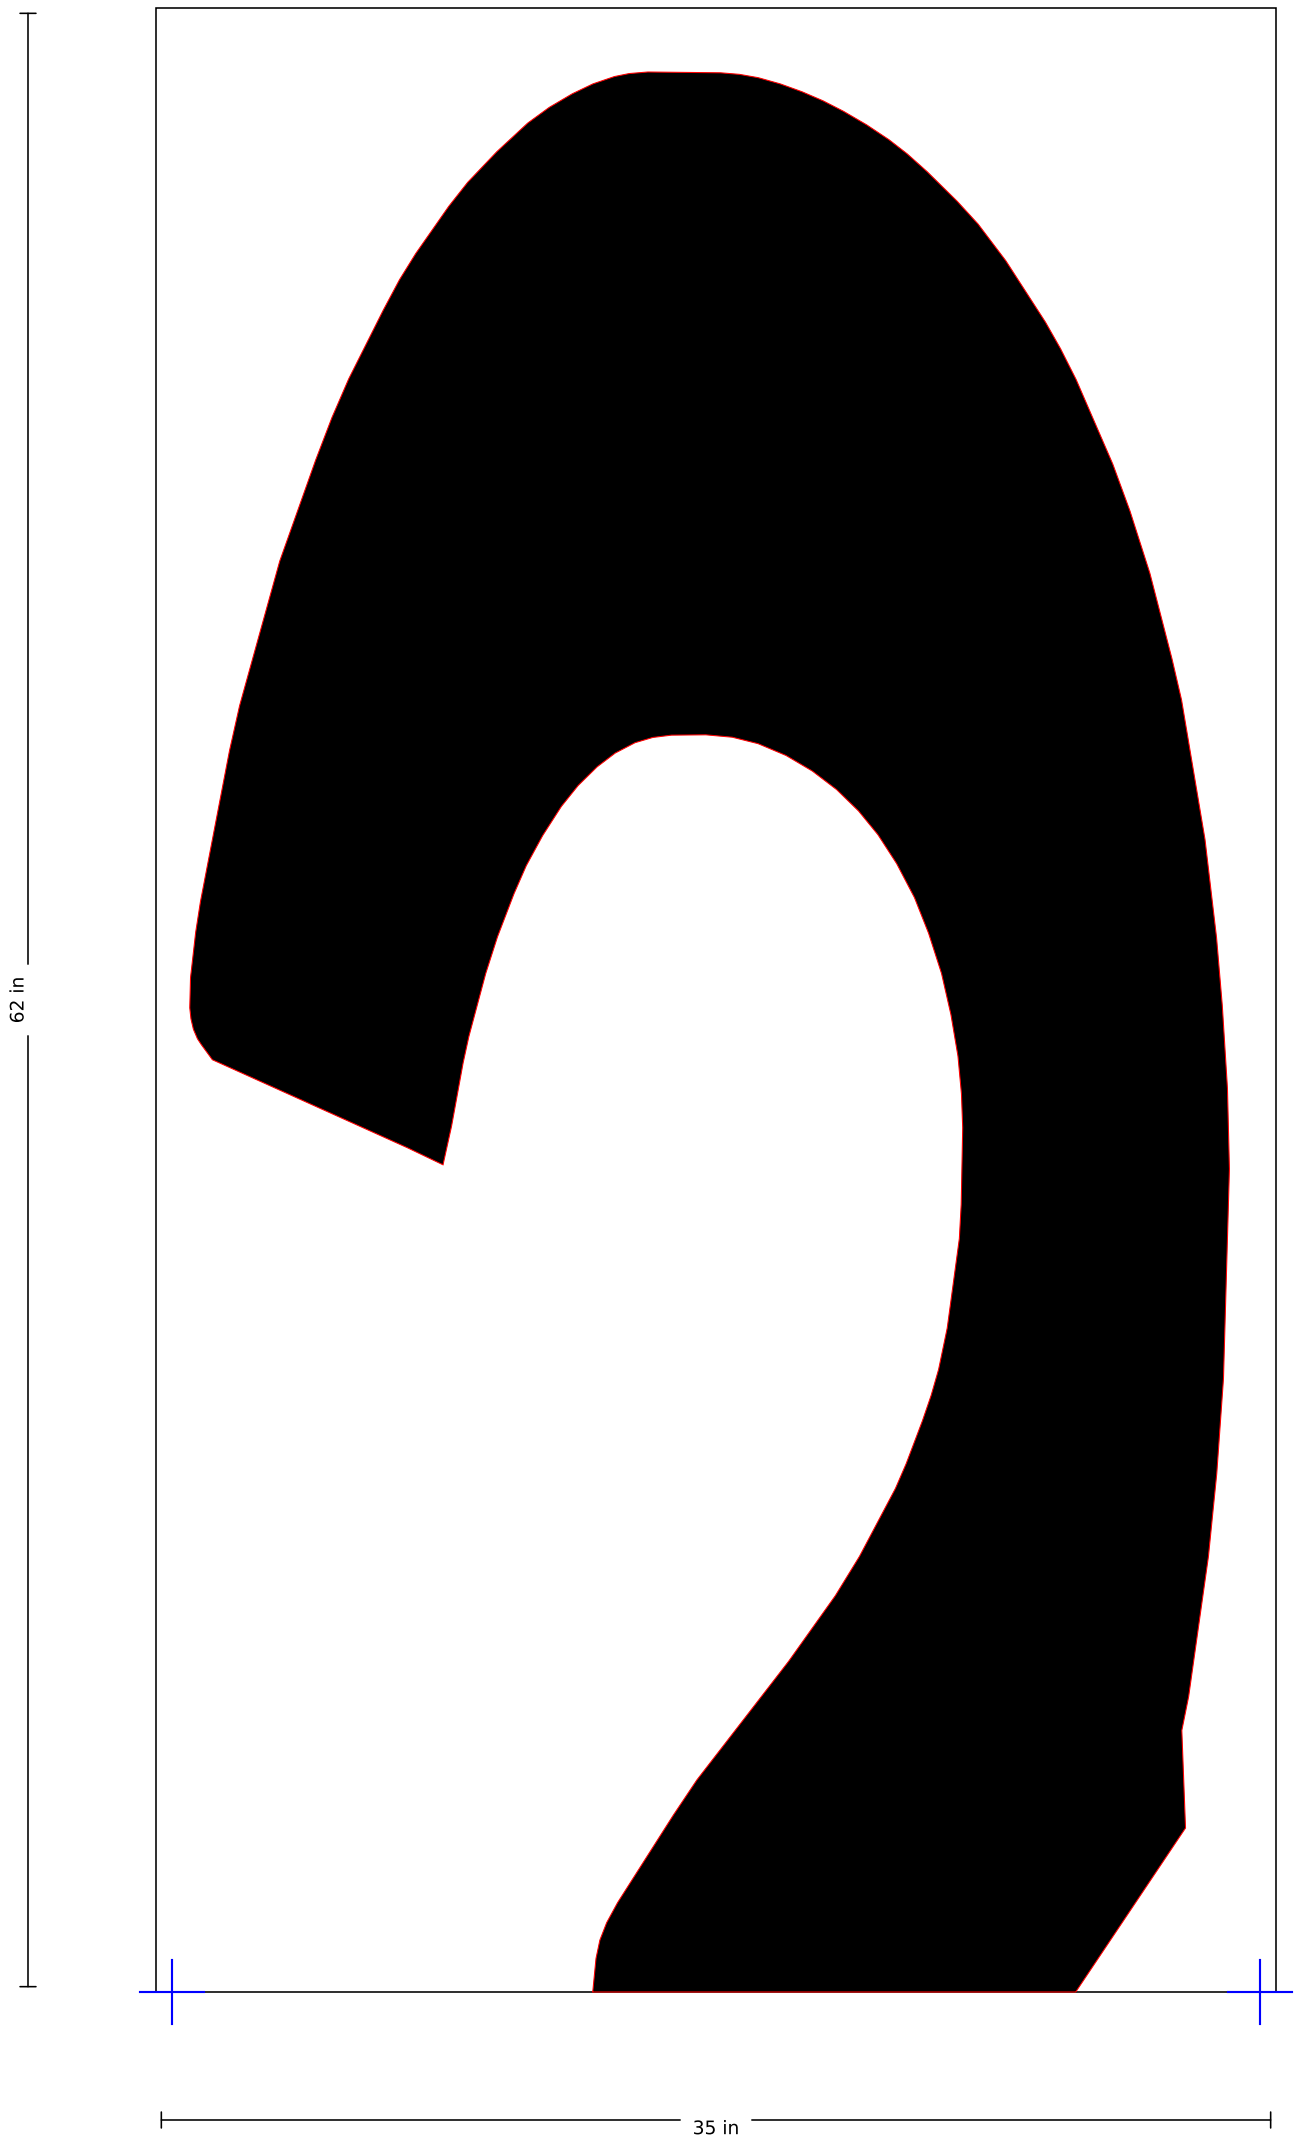

SSS-FAA-120-01-3

120" FAA Airport "3" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

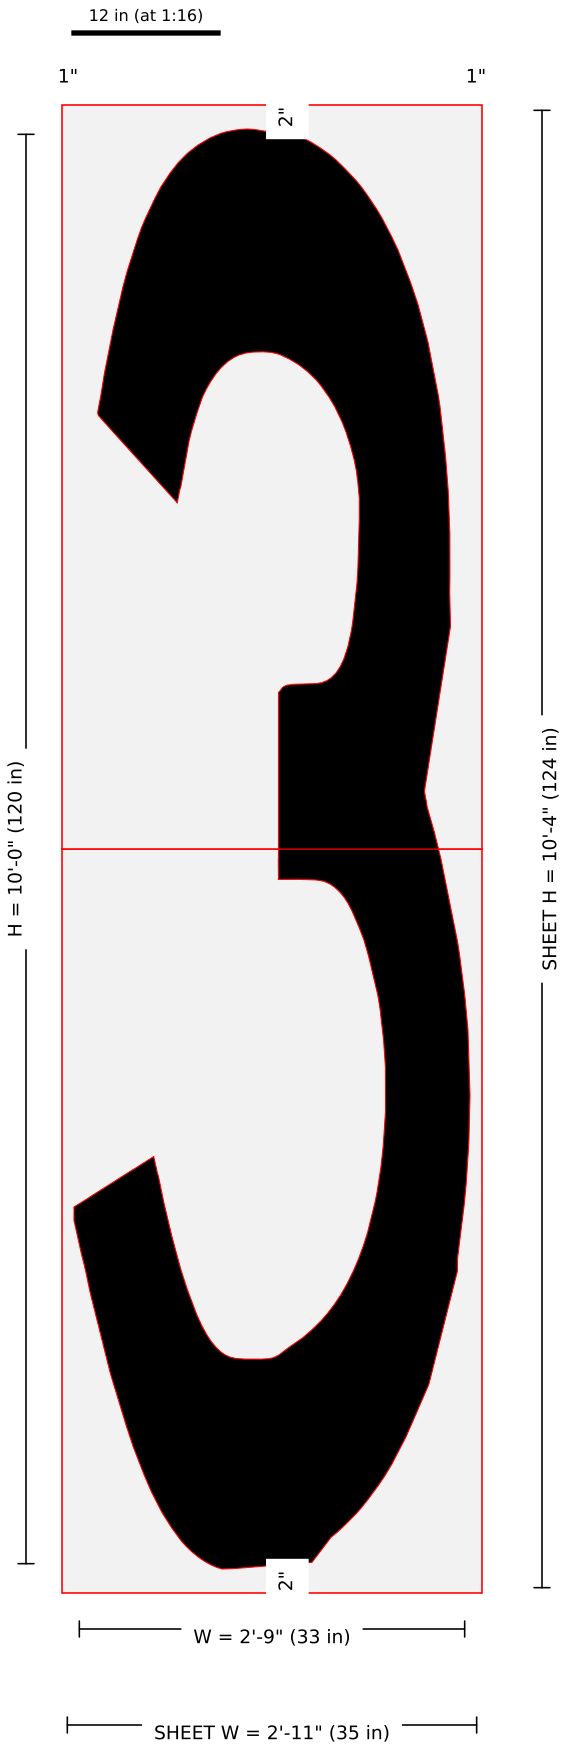

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1203-120in-FAA-Airport-Letter-3-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.69); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 5 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-3 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

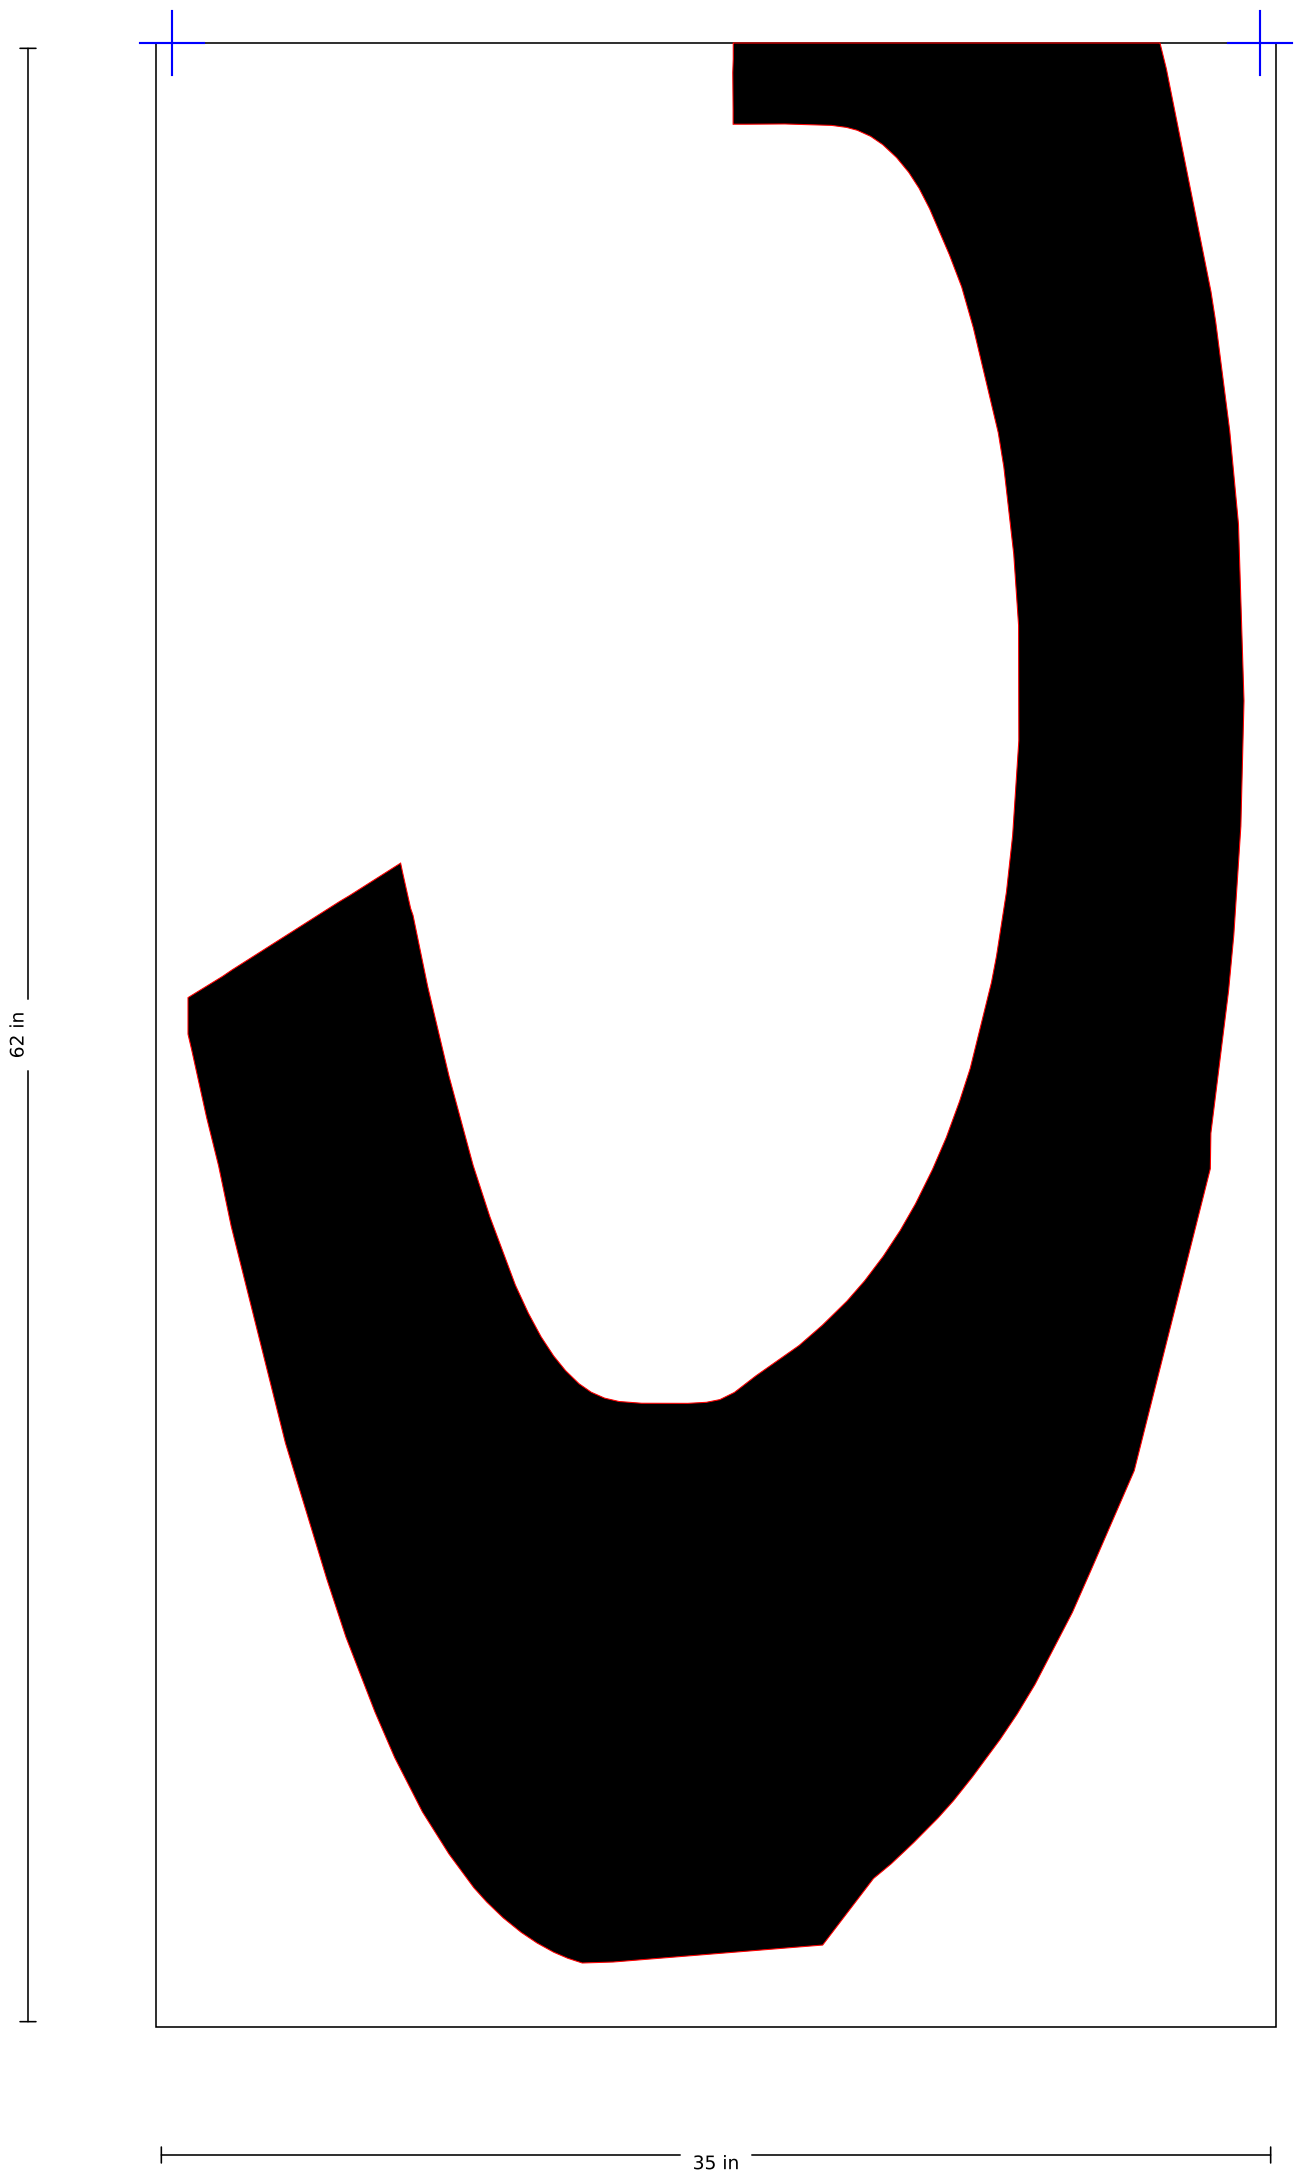

SSS-FAA-120-01-3 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

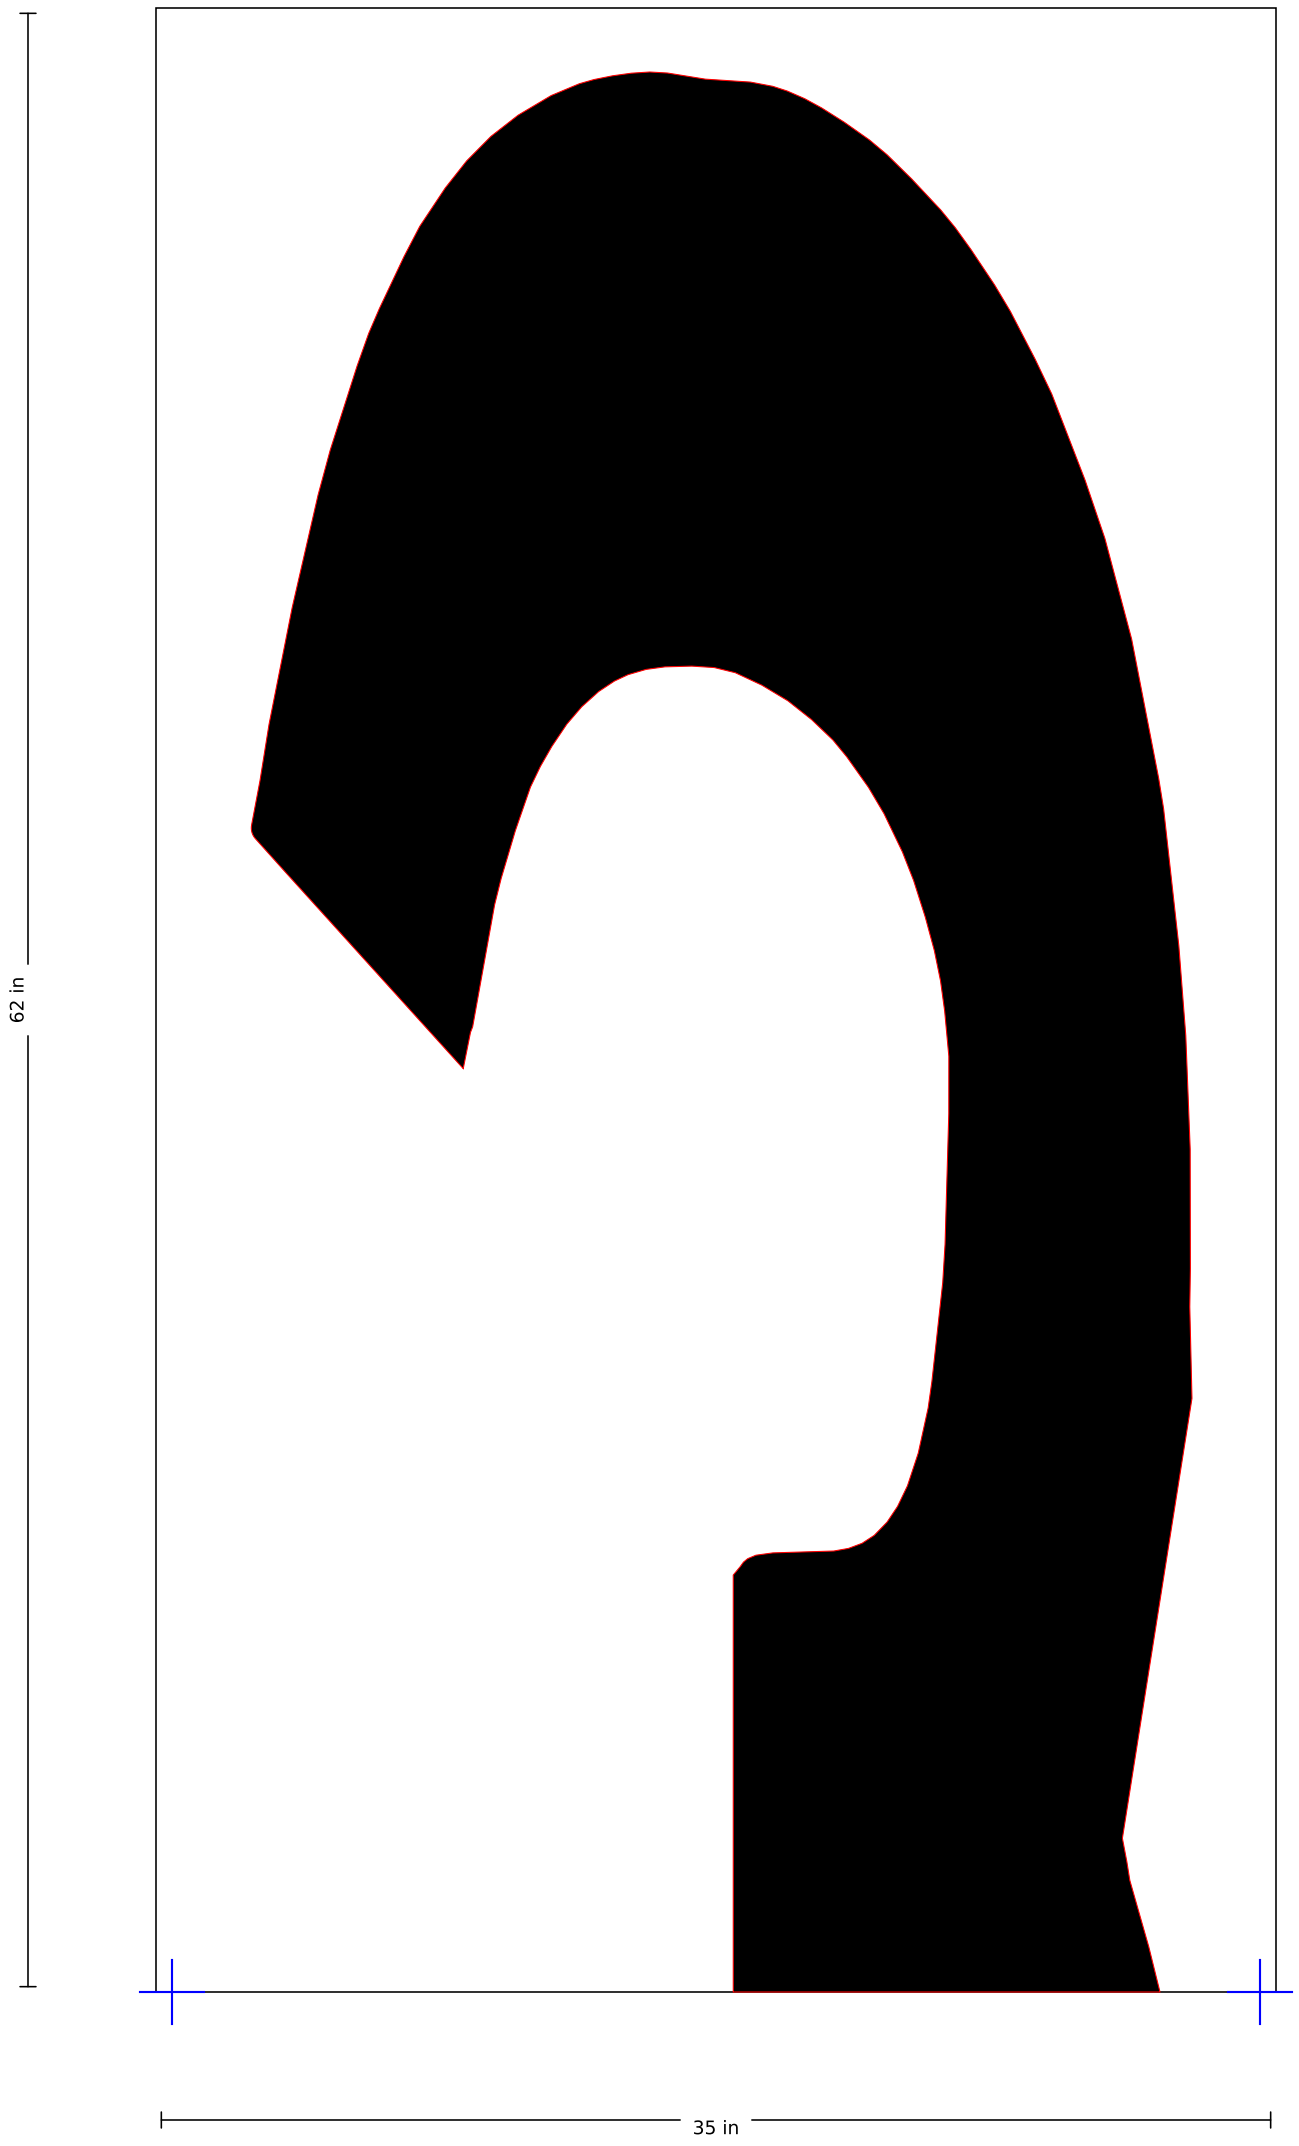

SSS-FAA-120-01-4

120" FAA Airport "4" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 36 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

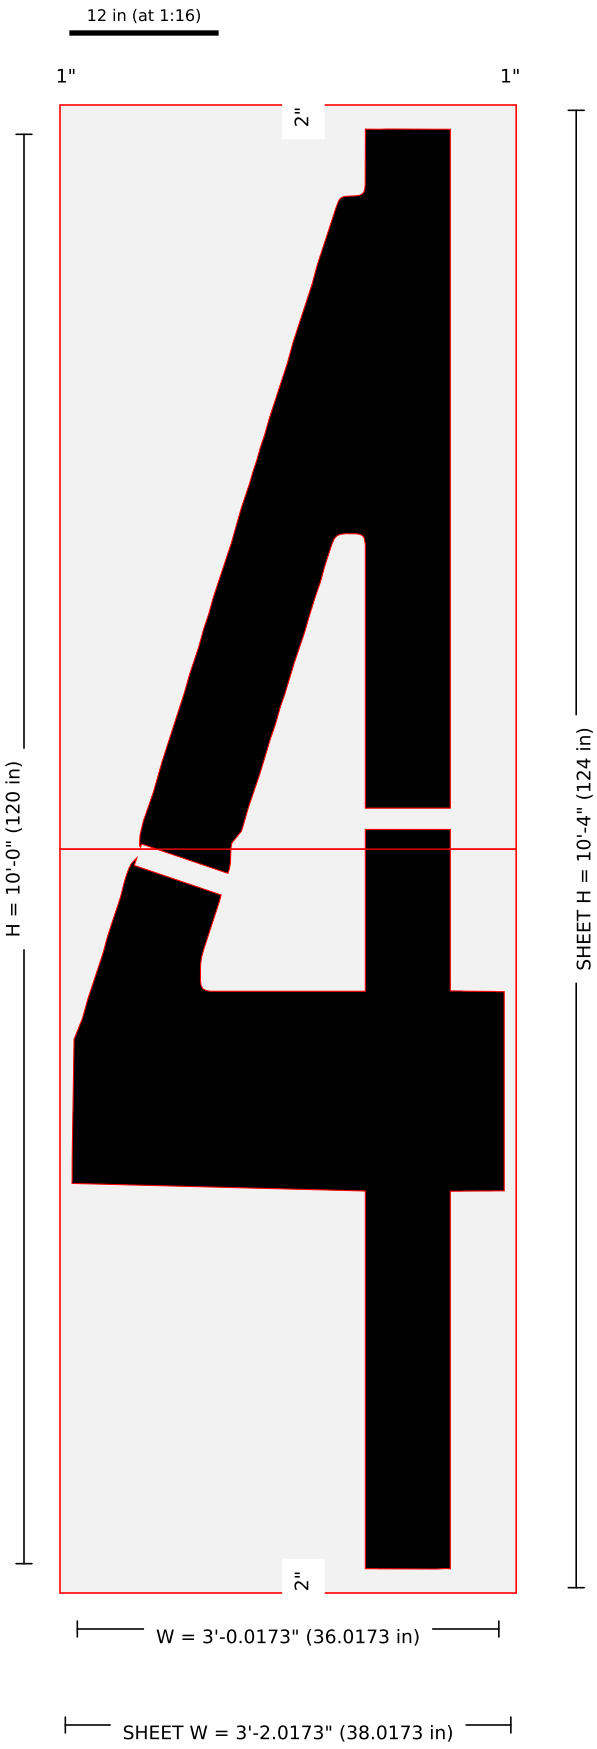

Pieces: 2 (1 x 2); blanks (in): 38.017 x 62, 38.017 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1204-120in-FAA-Airport-Letter-4-134x48-2.jpg: width = 1-800 image width label 36 in (image-scale 35.93); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.32 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (27.97,62.52) stroke 7.084" w=1.771"; (9.1,58.29) stroke 7.55" w=1.887" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-4 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

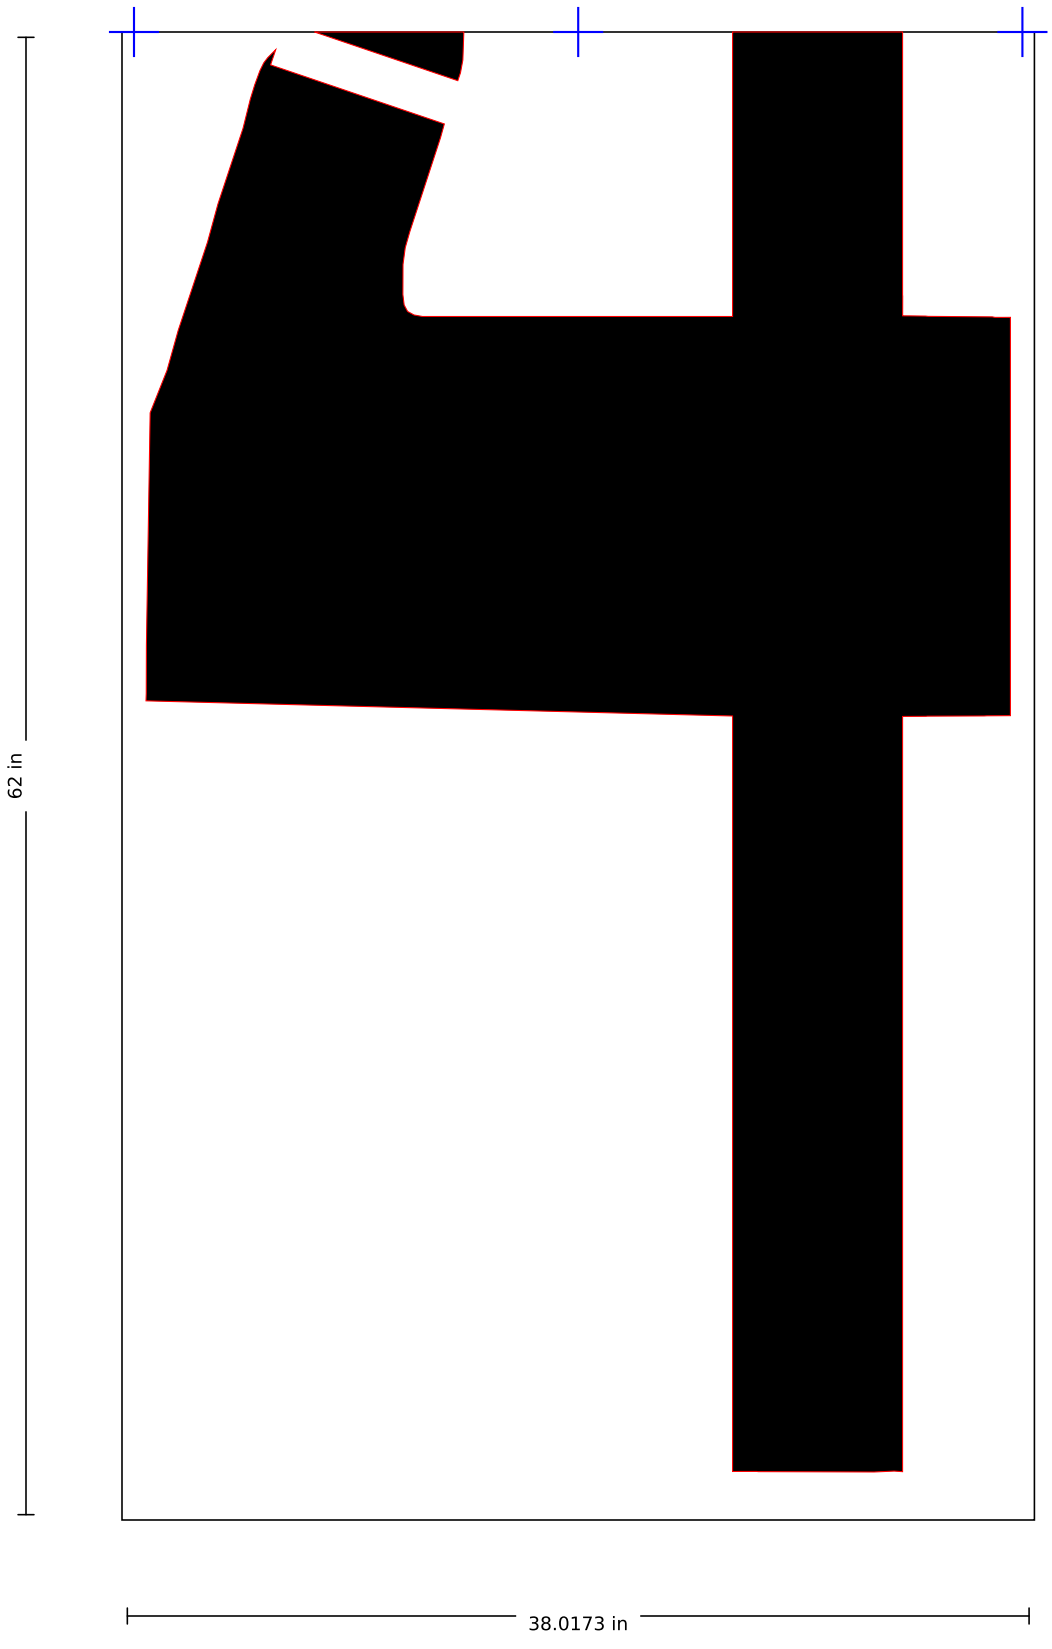

SSS-FAA-120-01-4 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

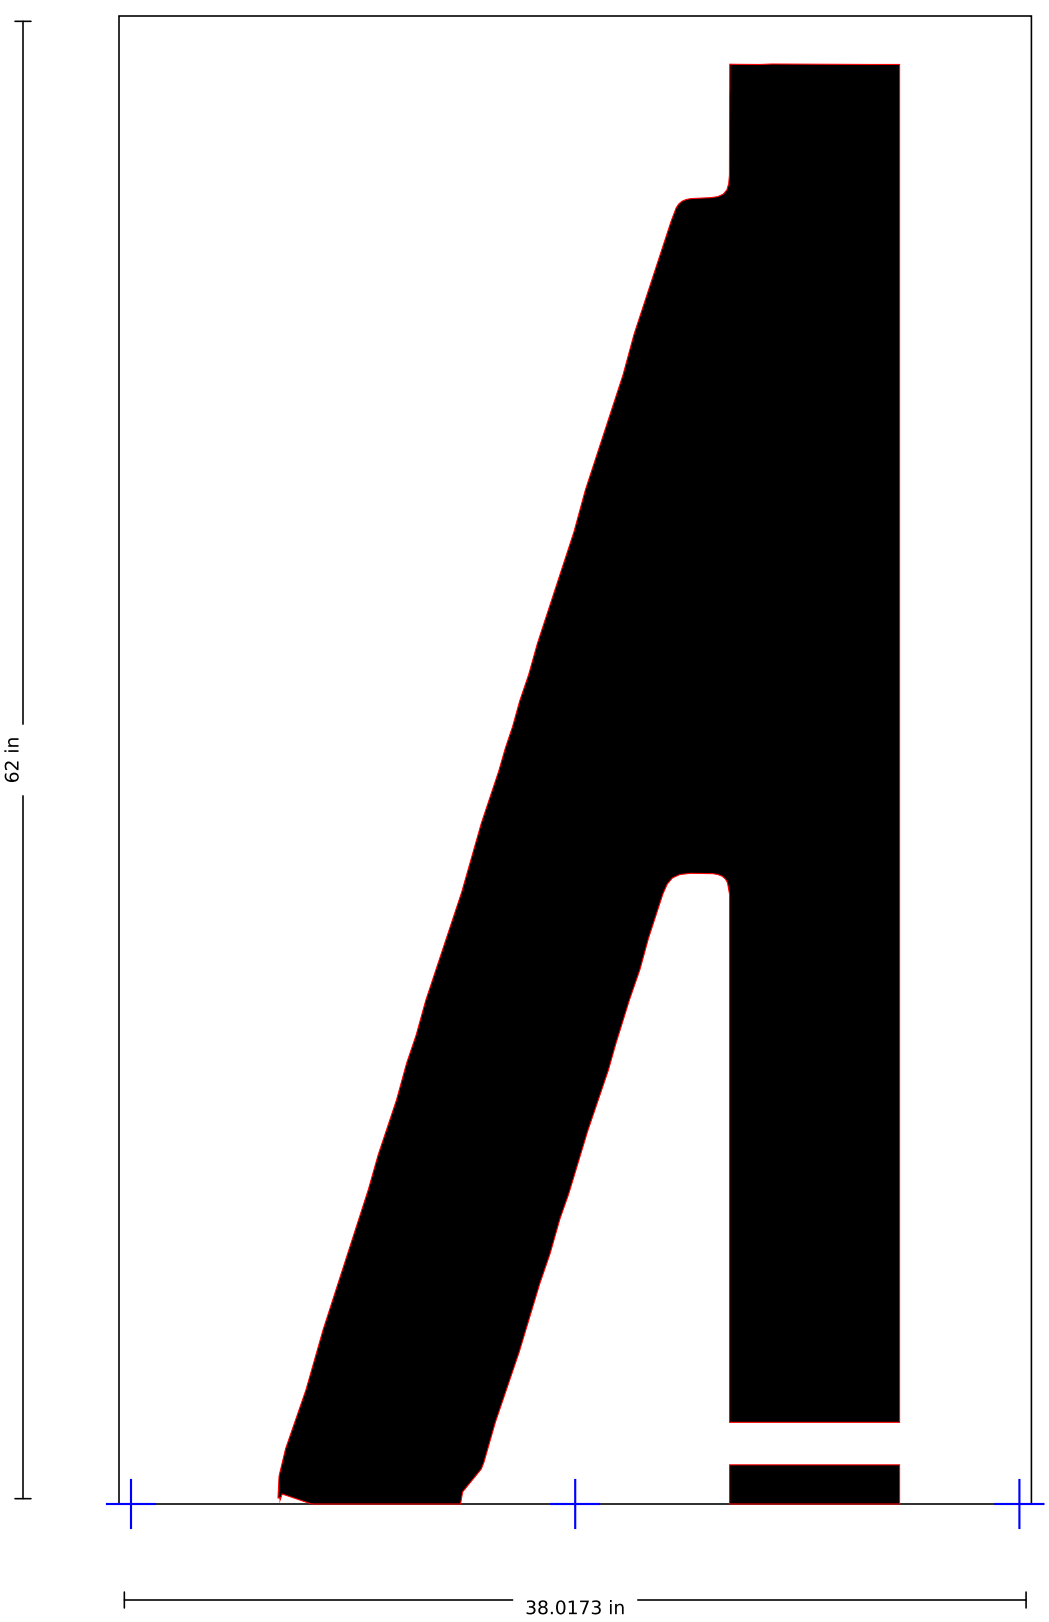

SSS-FAA-120-01-6

120" FAA Airport "6" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

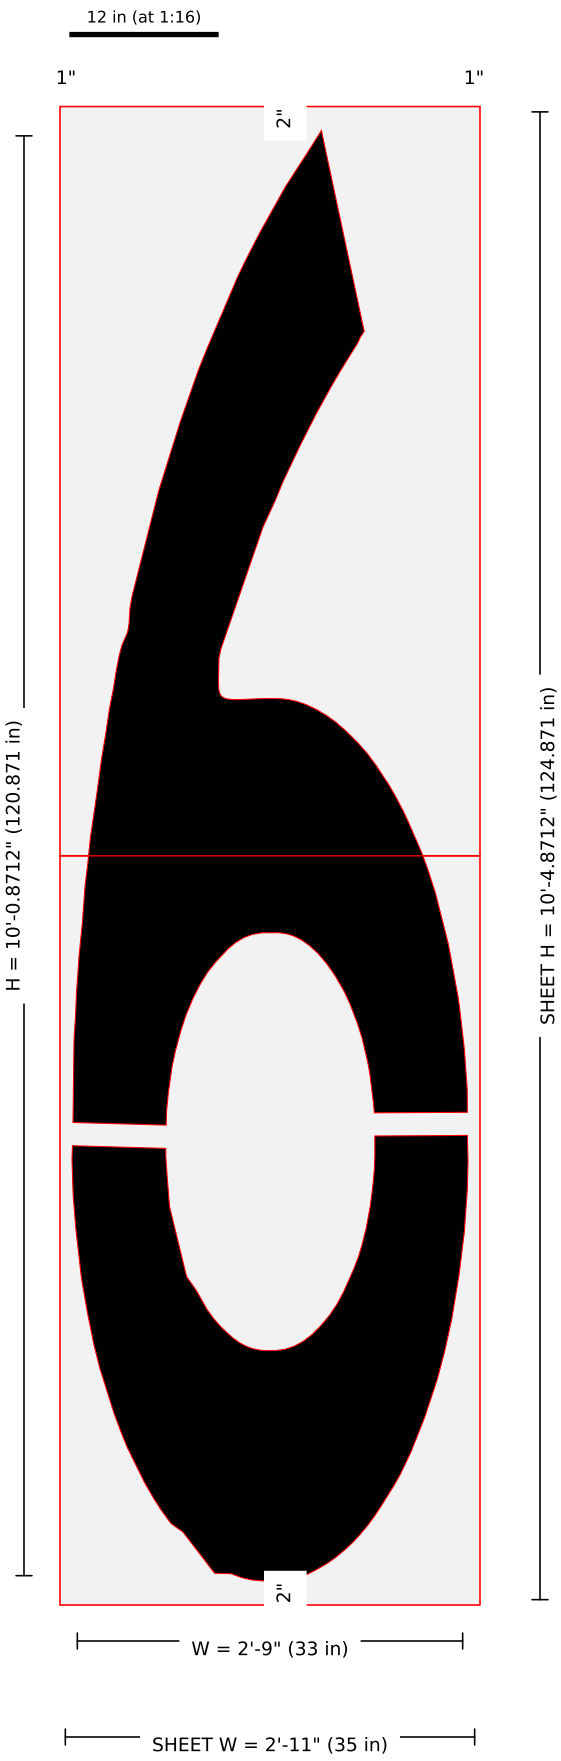

Pieces: 2 (1 x 2); blanks (in): 35 x 62.436, 35 x 62.436 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1206-120in-FAA-Airport-Letter-6-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.67); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (29.09,38.07) stroke 7.716" w=1.929"; (3.95,37.13) stroke 7.754" w=1.938" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-6 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

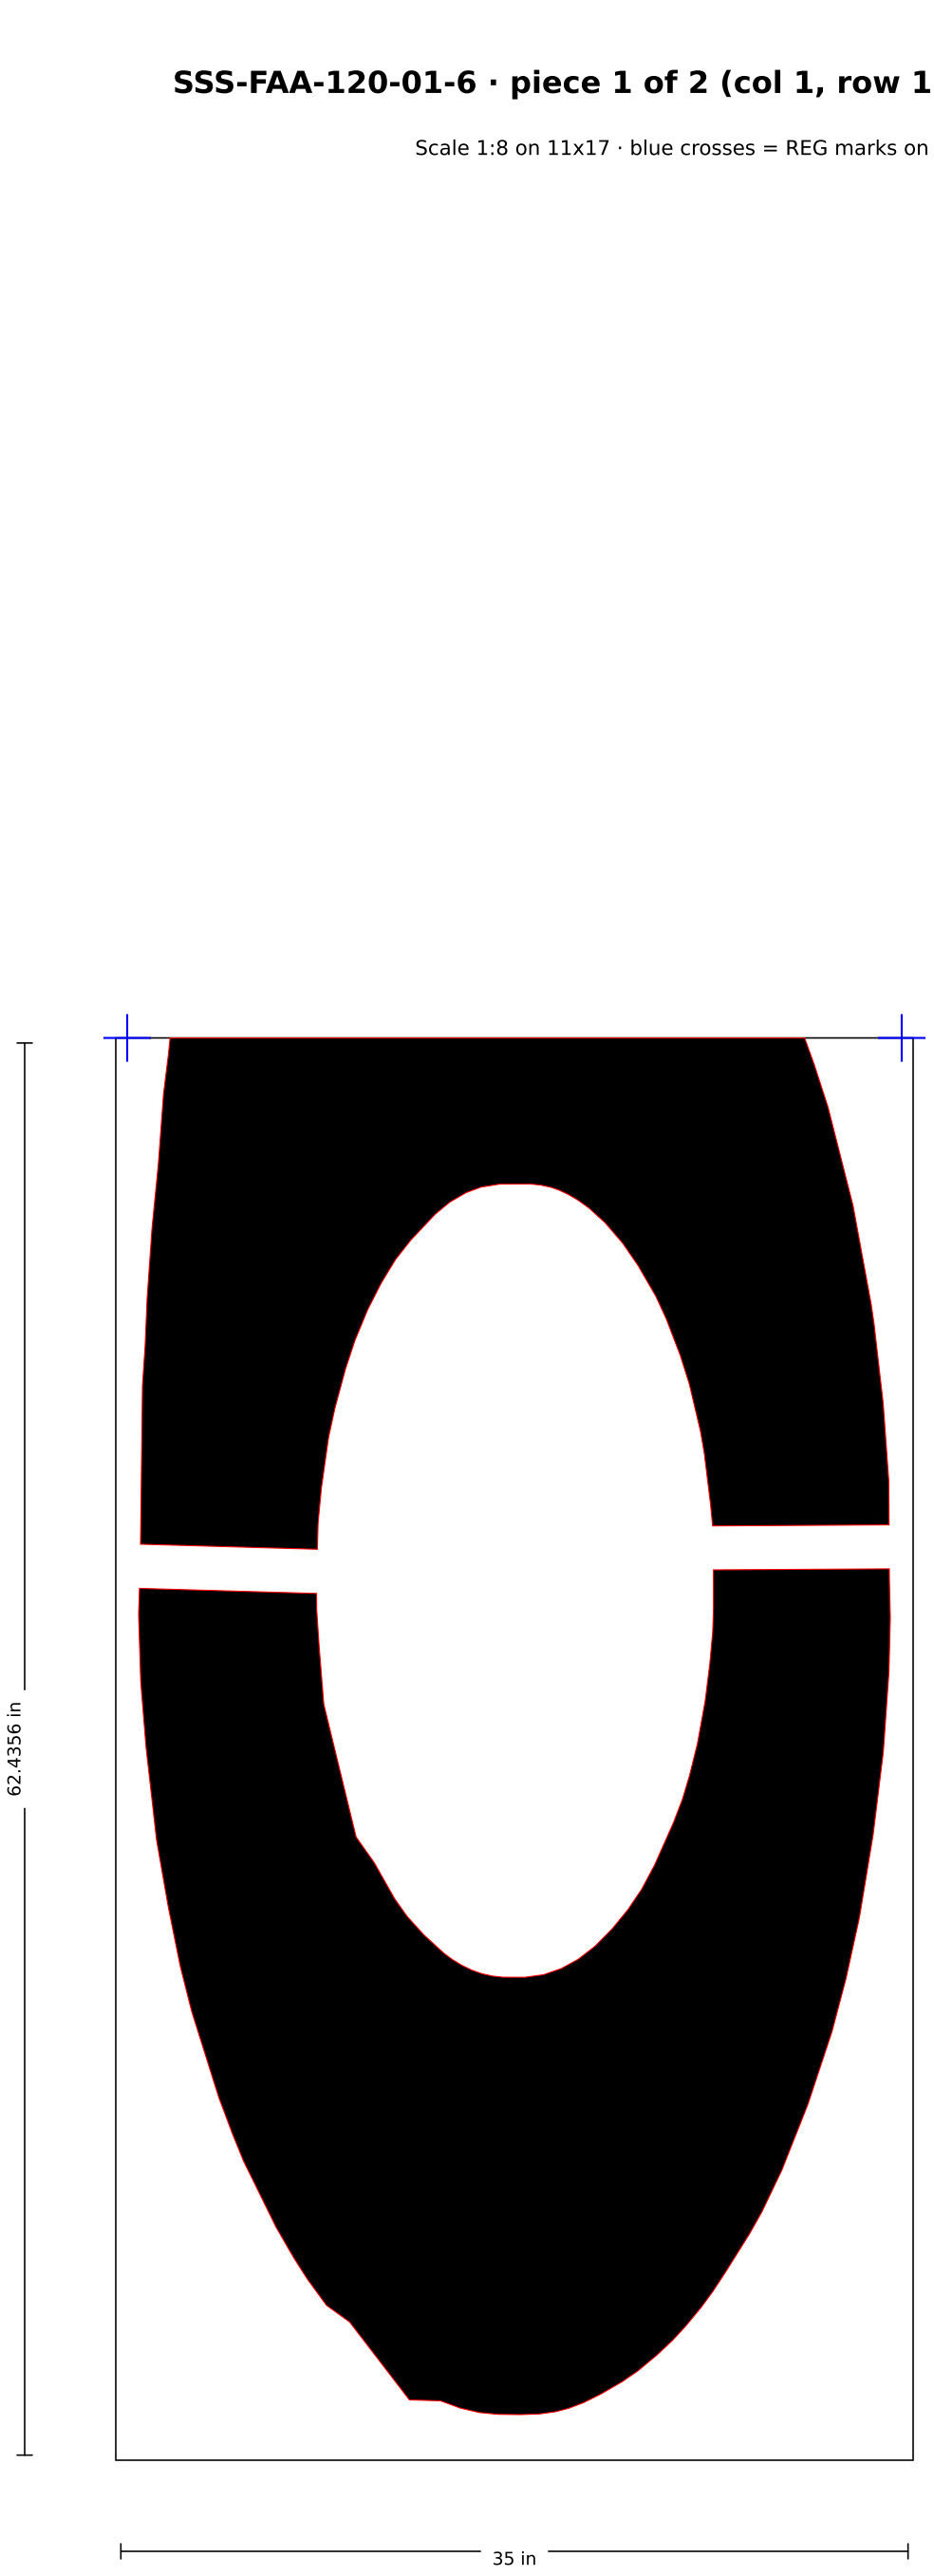

SSS-FAA-120-01-6 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

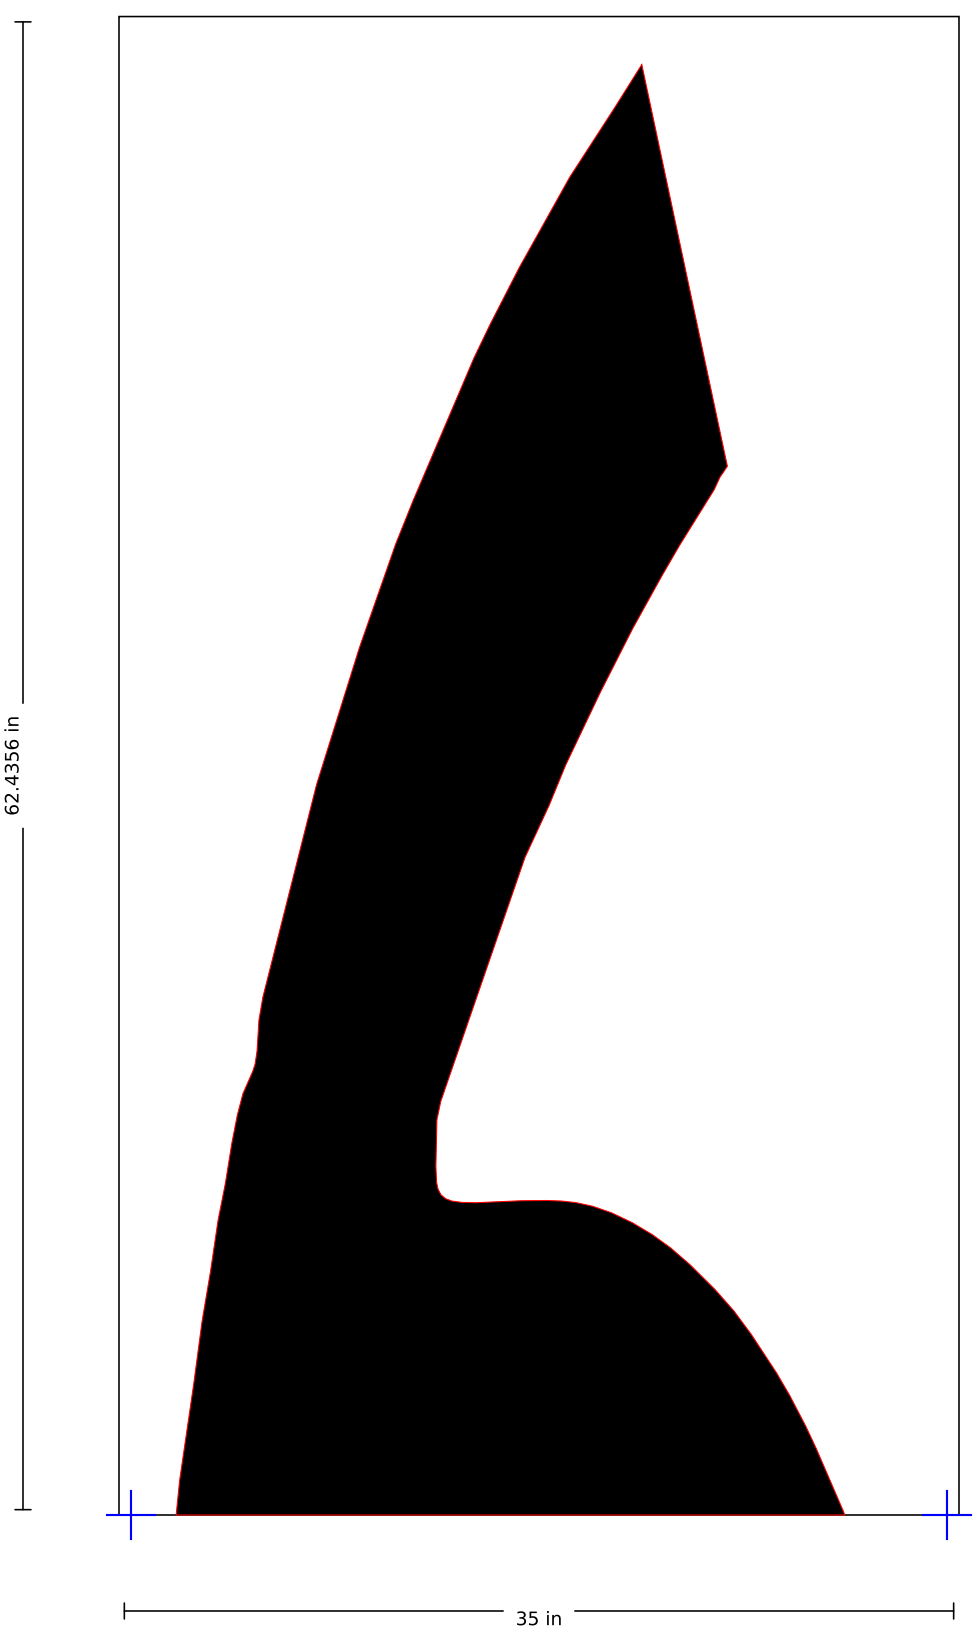

SSS-FAA-120-01-7

120" FAA Airport "7" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

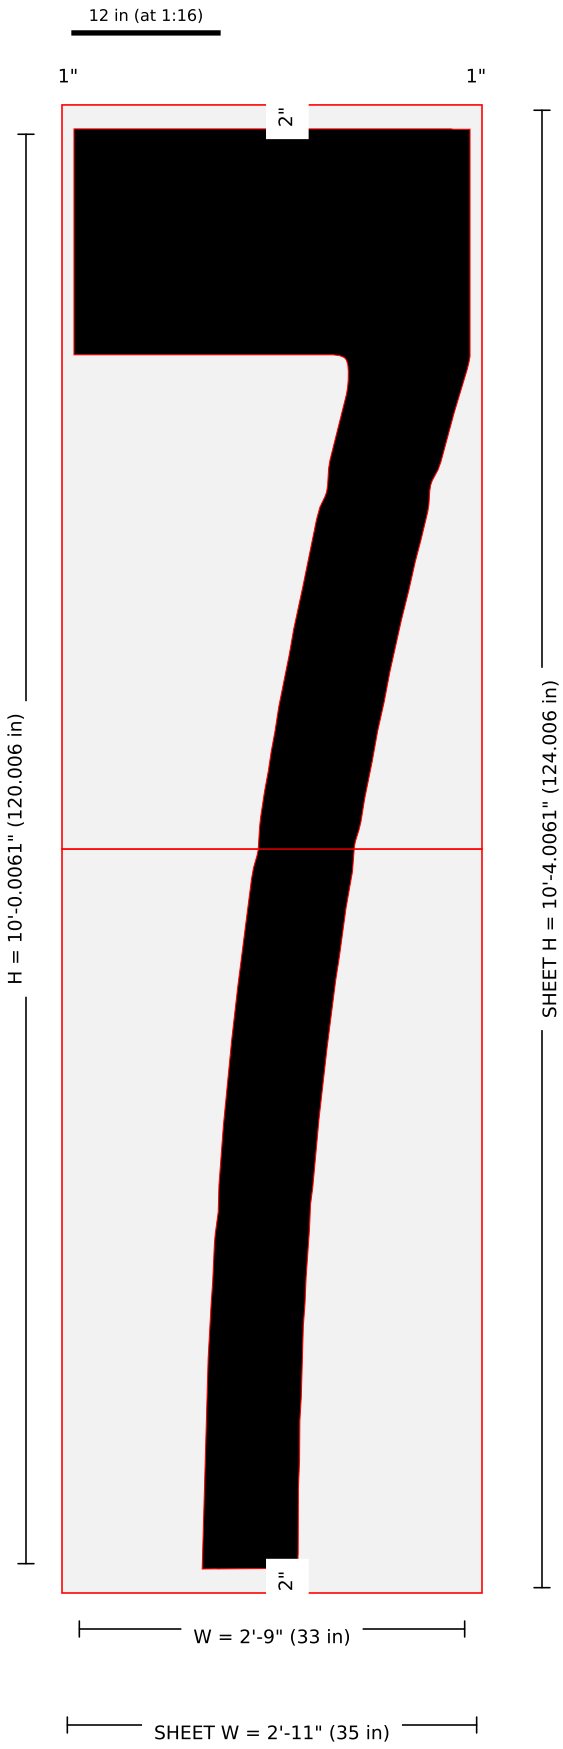

Pieces: 2 (1 x 2); blanks (in): 35 x 62.003, 35 x 62.003 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1207-120in-FAA-Airport-Letter-7-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.55); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-7 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams



SSS-FAA-120-01-7 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

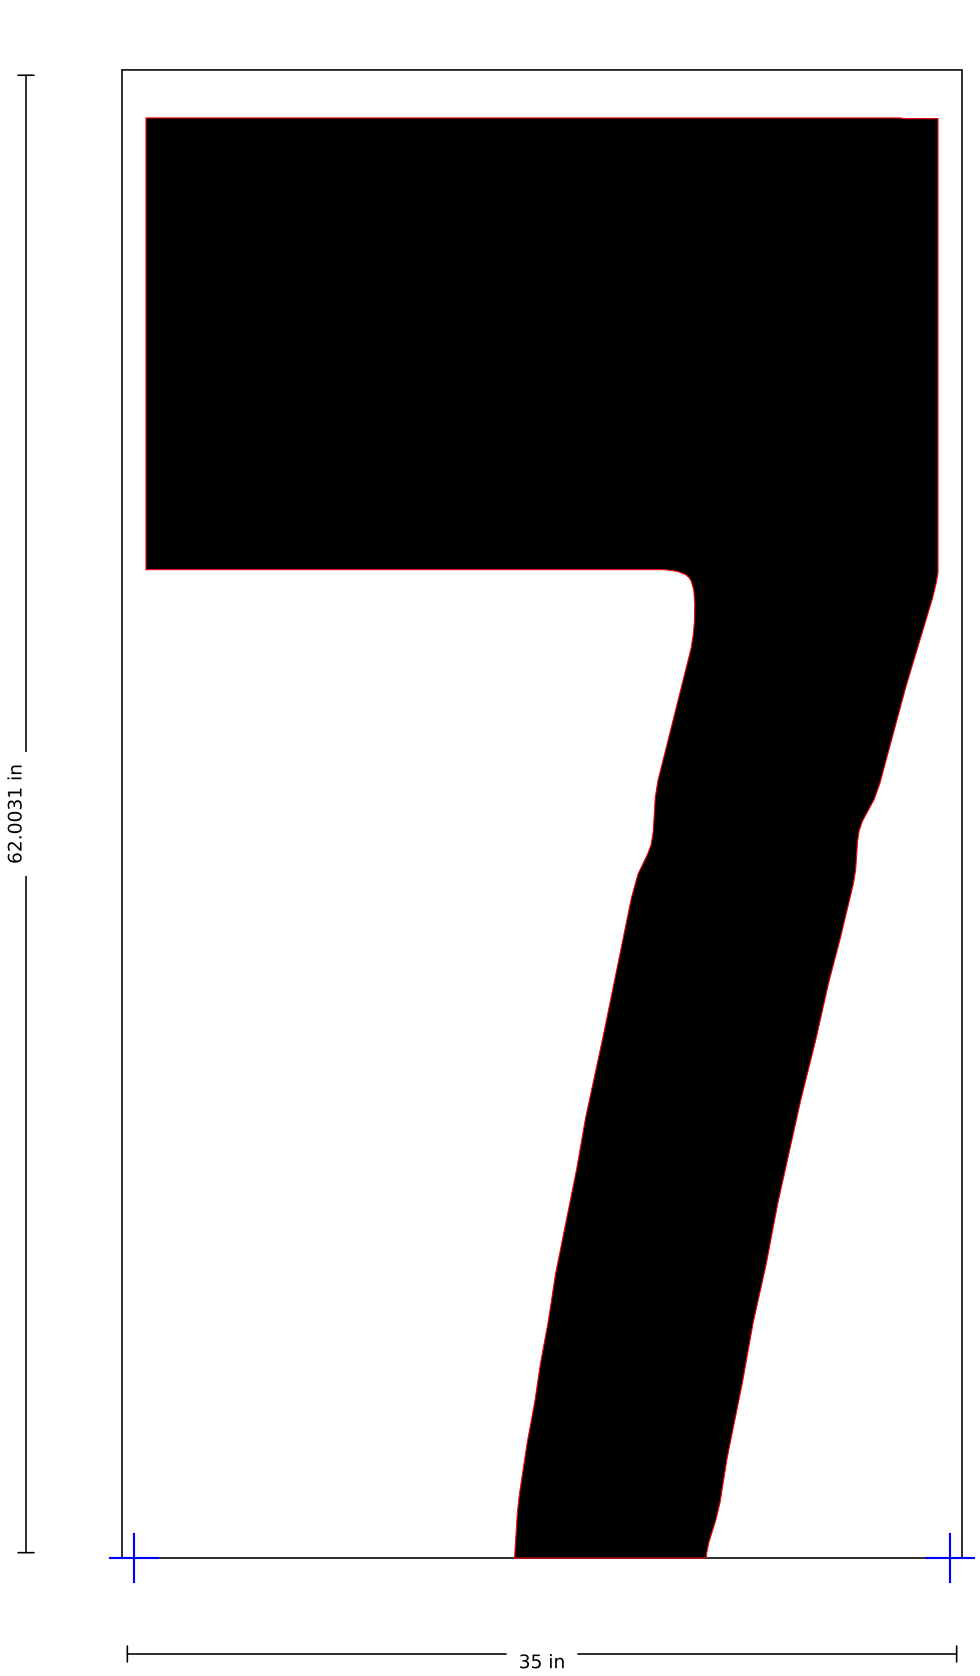

SSS-FAA-120-01-8

120" FAA Airport "8" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

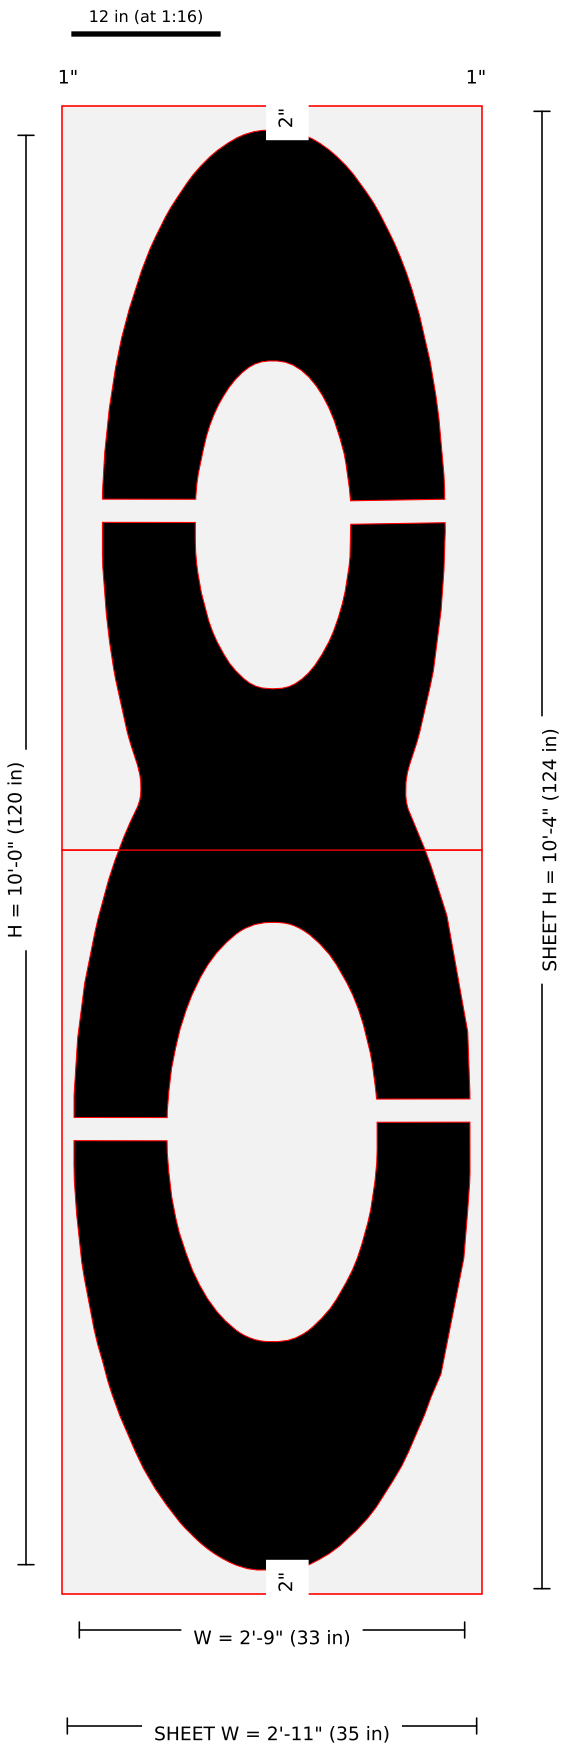

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1208-120in-FAA-Airport-Letter-8-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.40); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (29.13,38.28) stroke 7.736" w=1.934"; (3.87,36.74) stroke 7.737" w=1.934"; (6.24,88.27) stroke 7.737" w=1.934"; (27.0,88.19) stroke 7.826" w=1.957" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-8 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

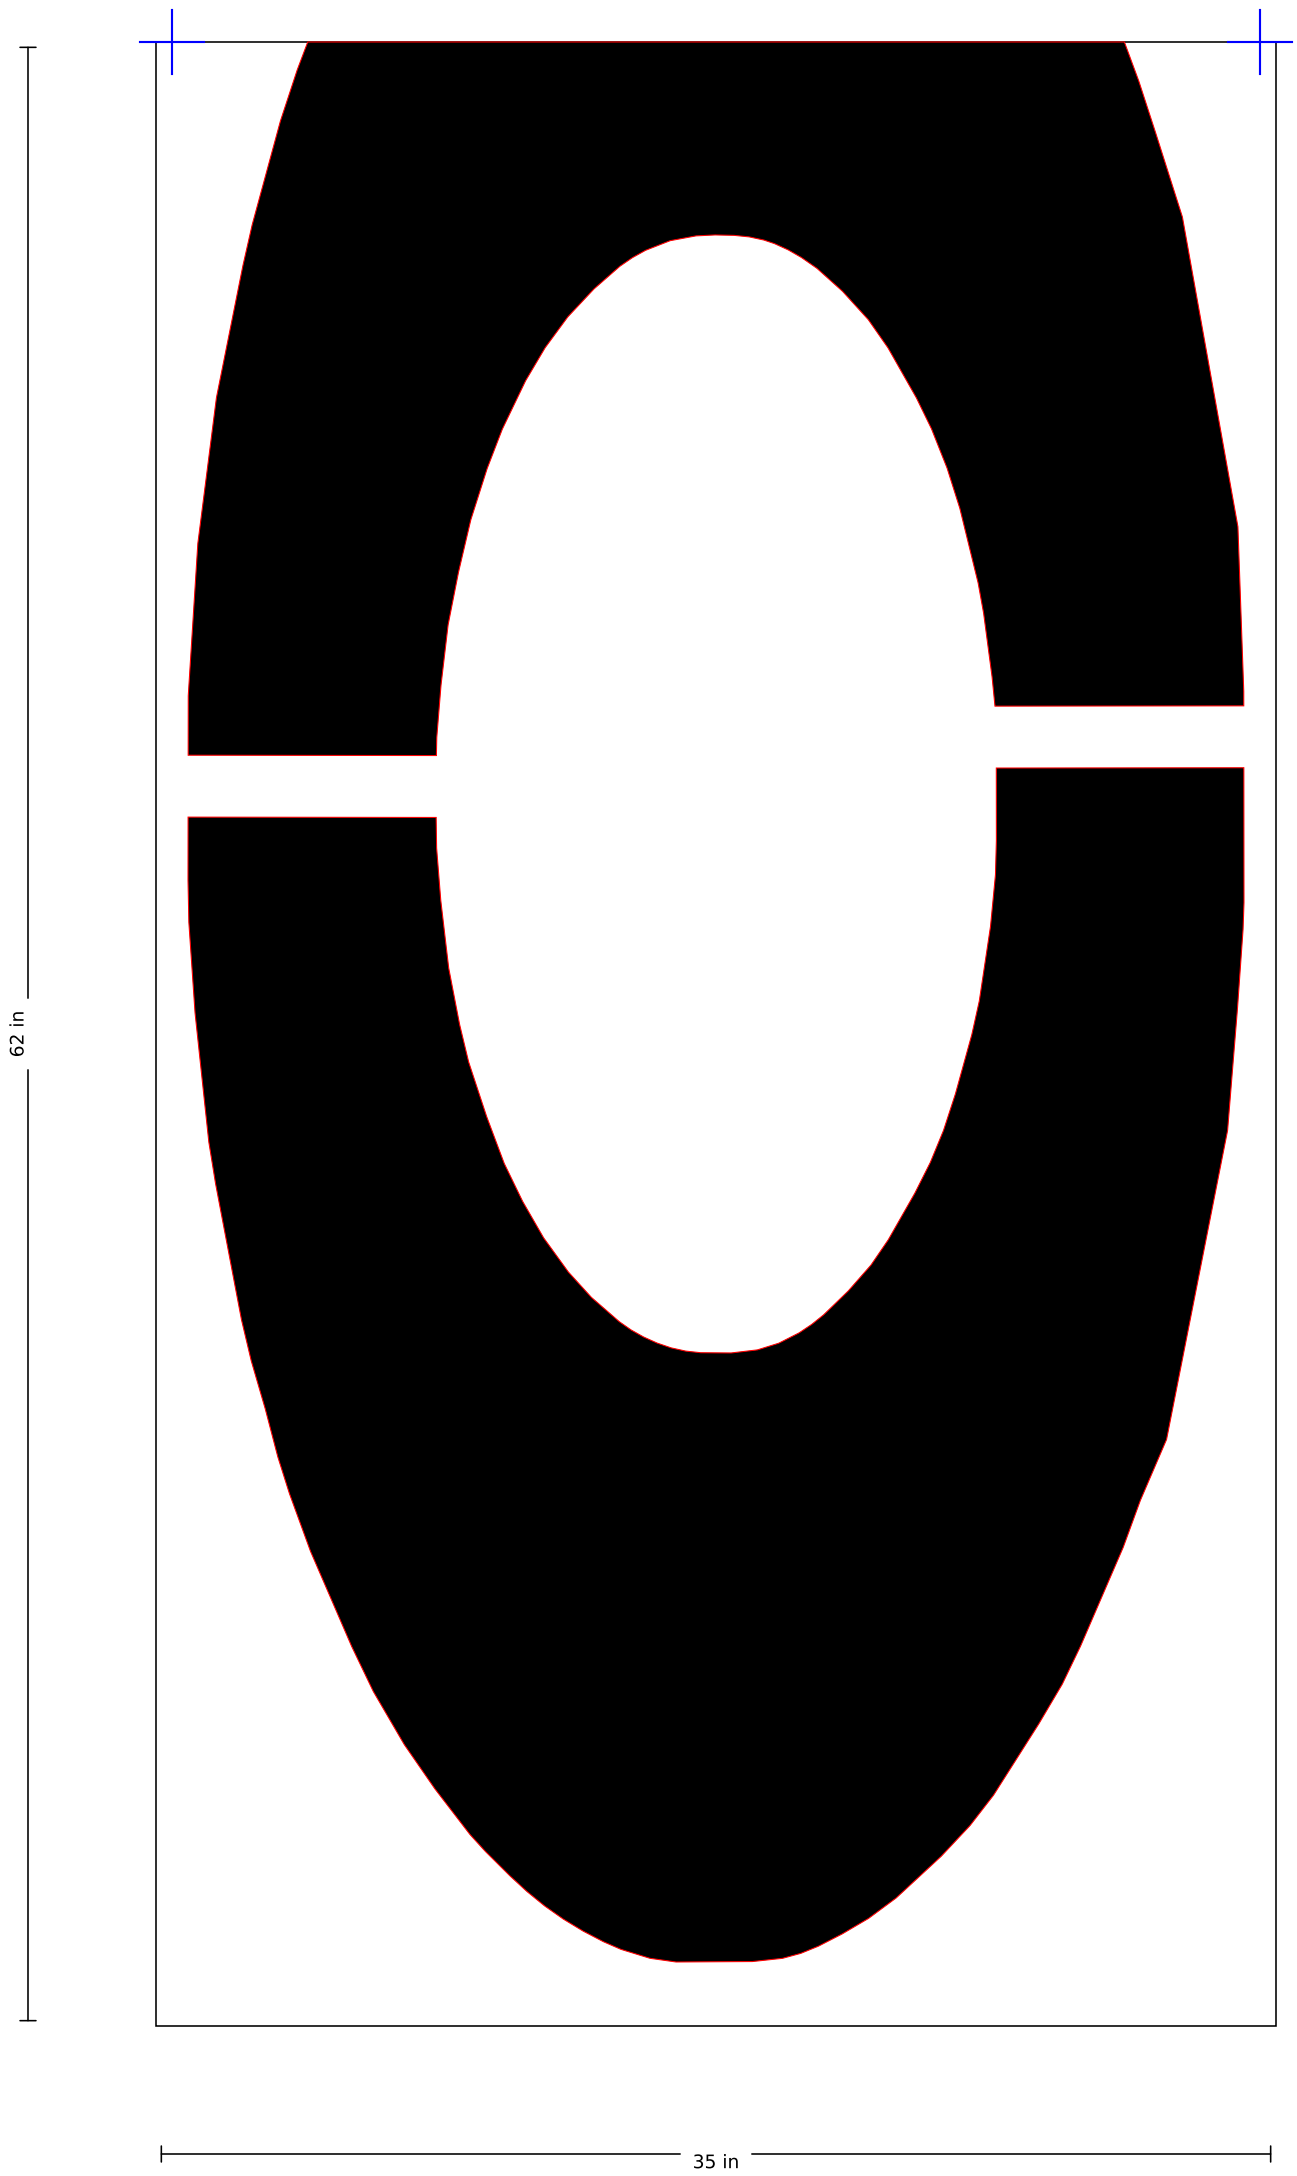

SSS-FAA-120-01-8 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

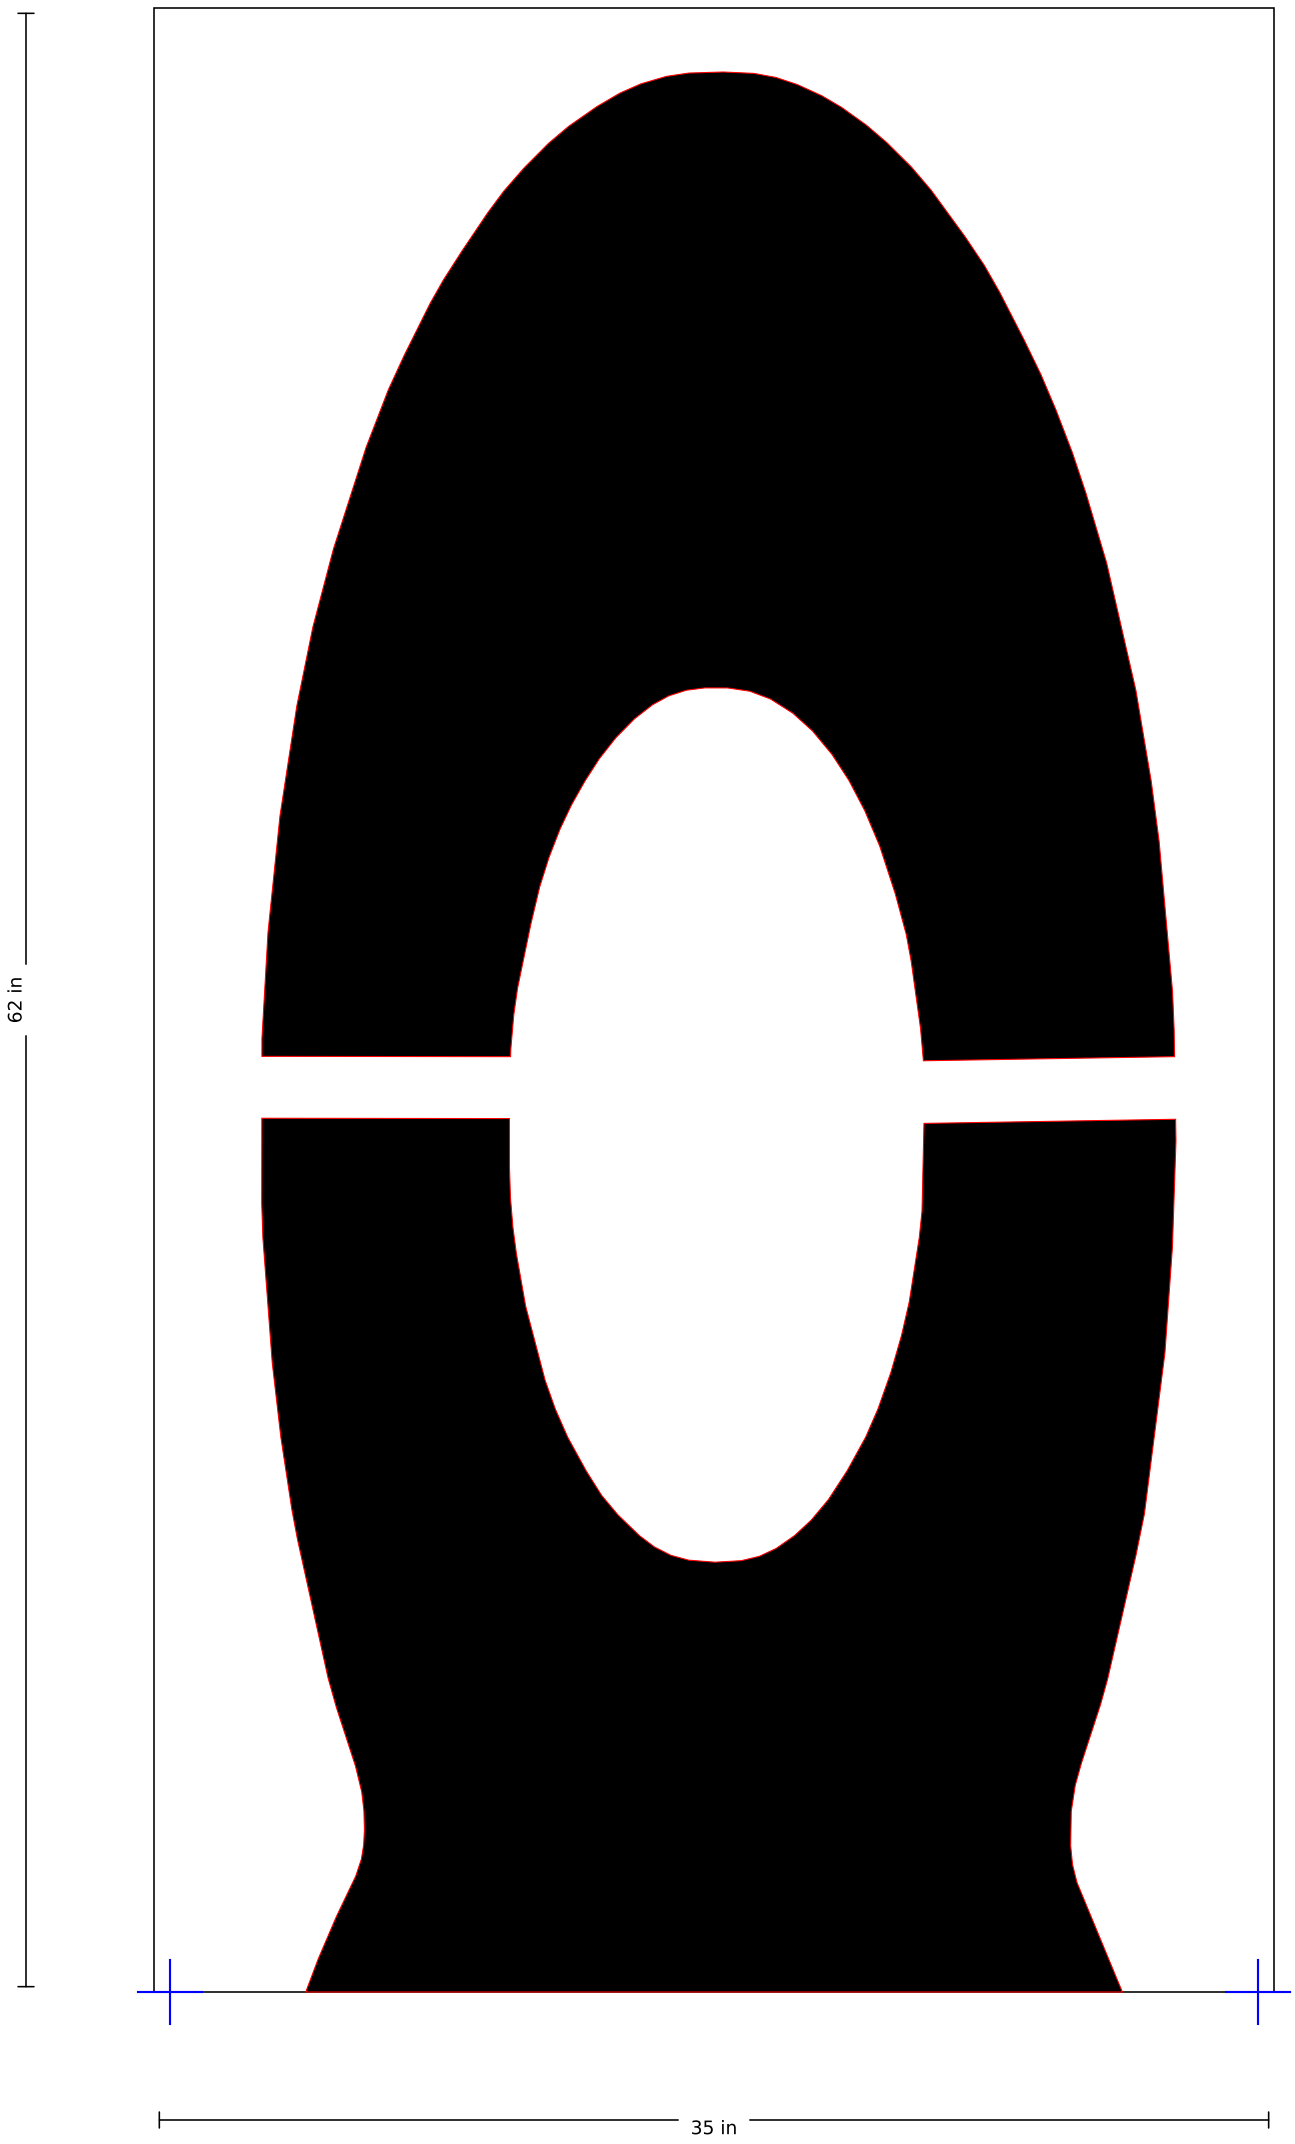

SSS-FAA-120-01-9

120" FAA Airport "9" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

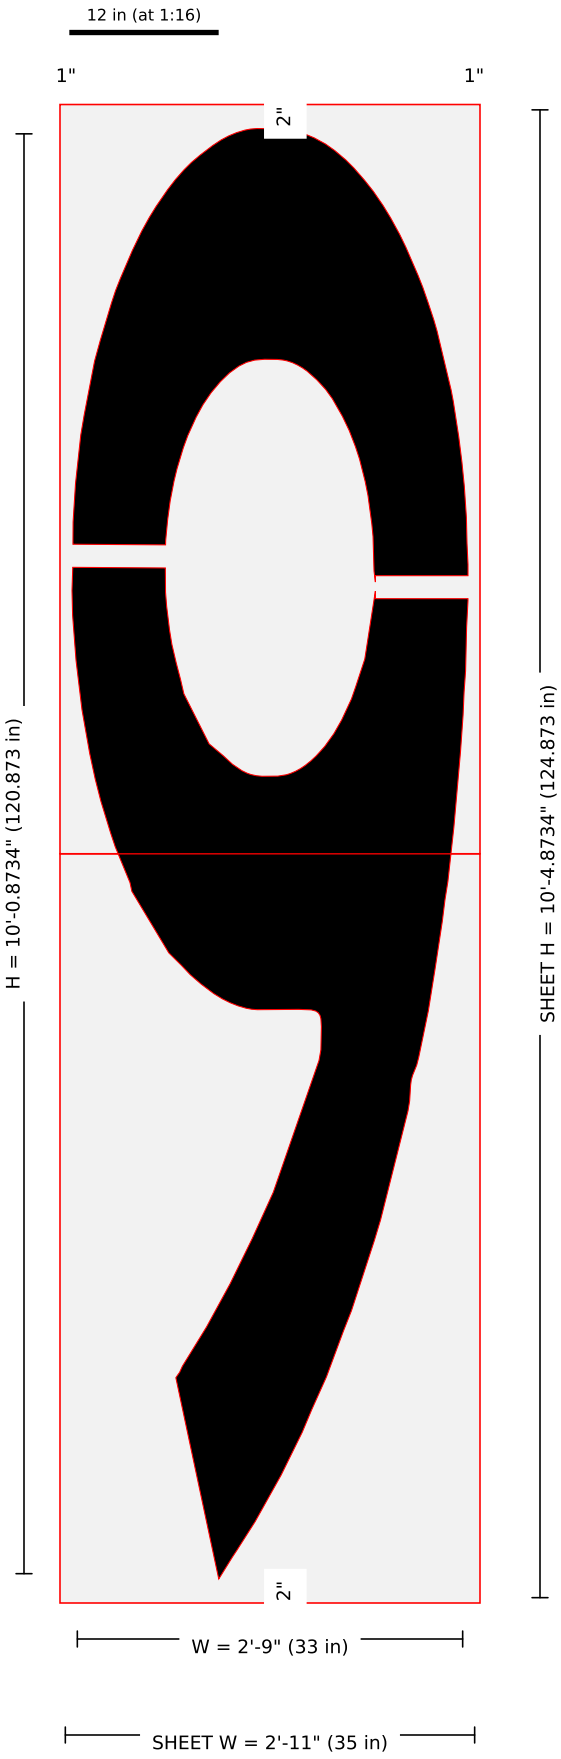

Pieces: 2 (1 x 2); blanks (in): 35 x 62.437, 35 x 62.437 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1209-120in-FAA-Airport-Letter-9-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.67); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (29.17,81.78) stroke 7.667" w=1.917"; (3.92,84.37) stroke 7.7" w=1.925" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-9 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

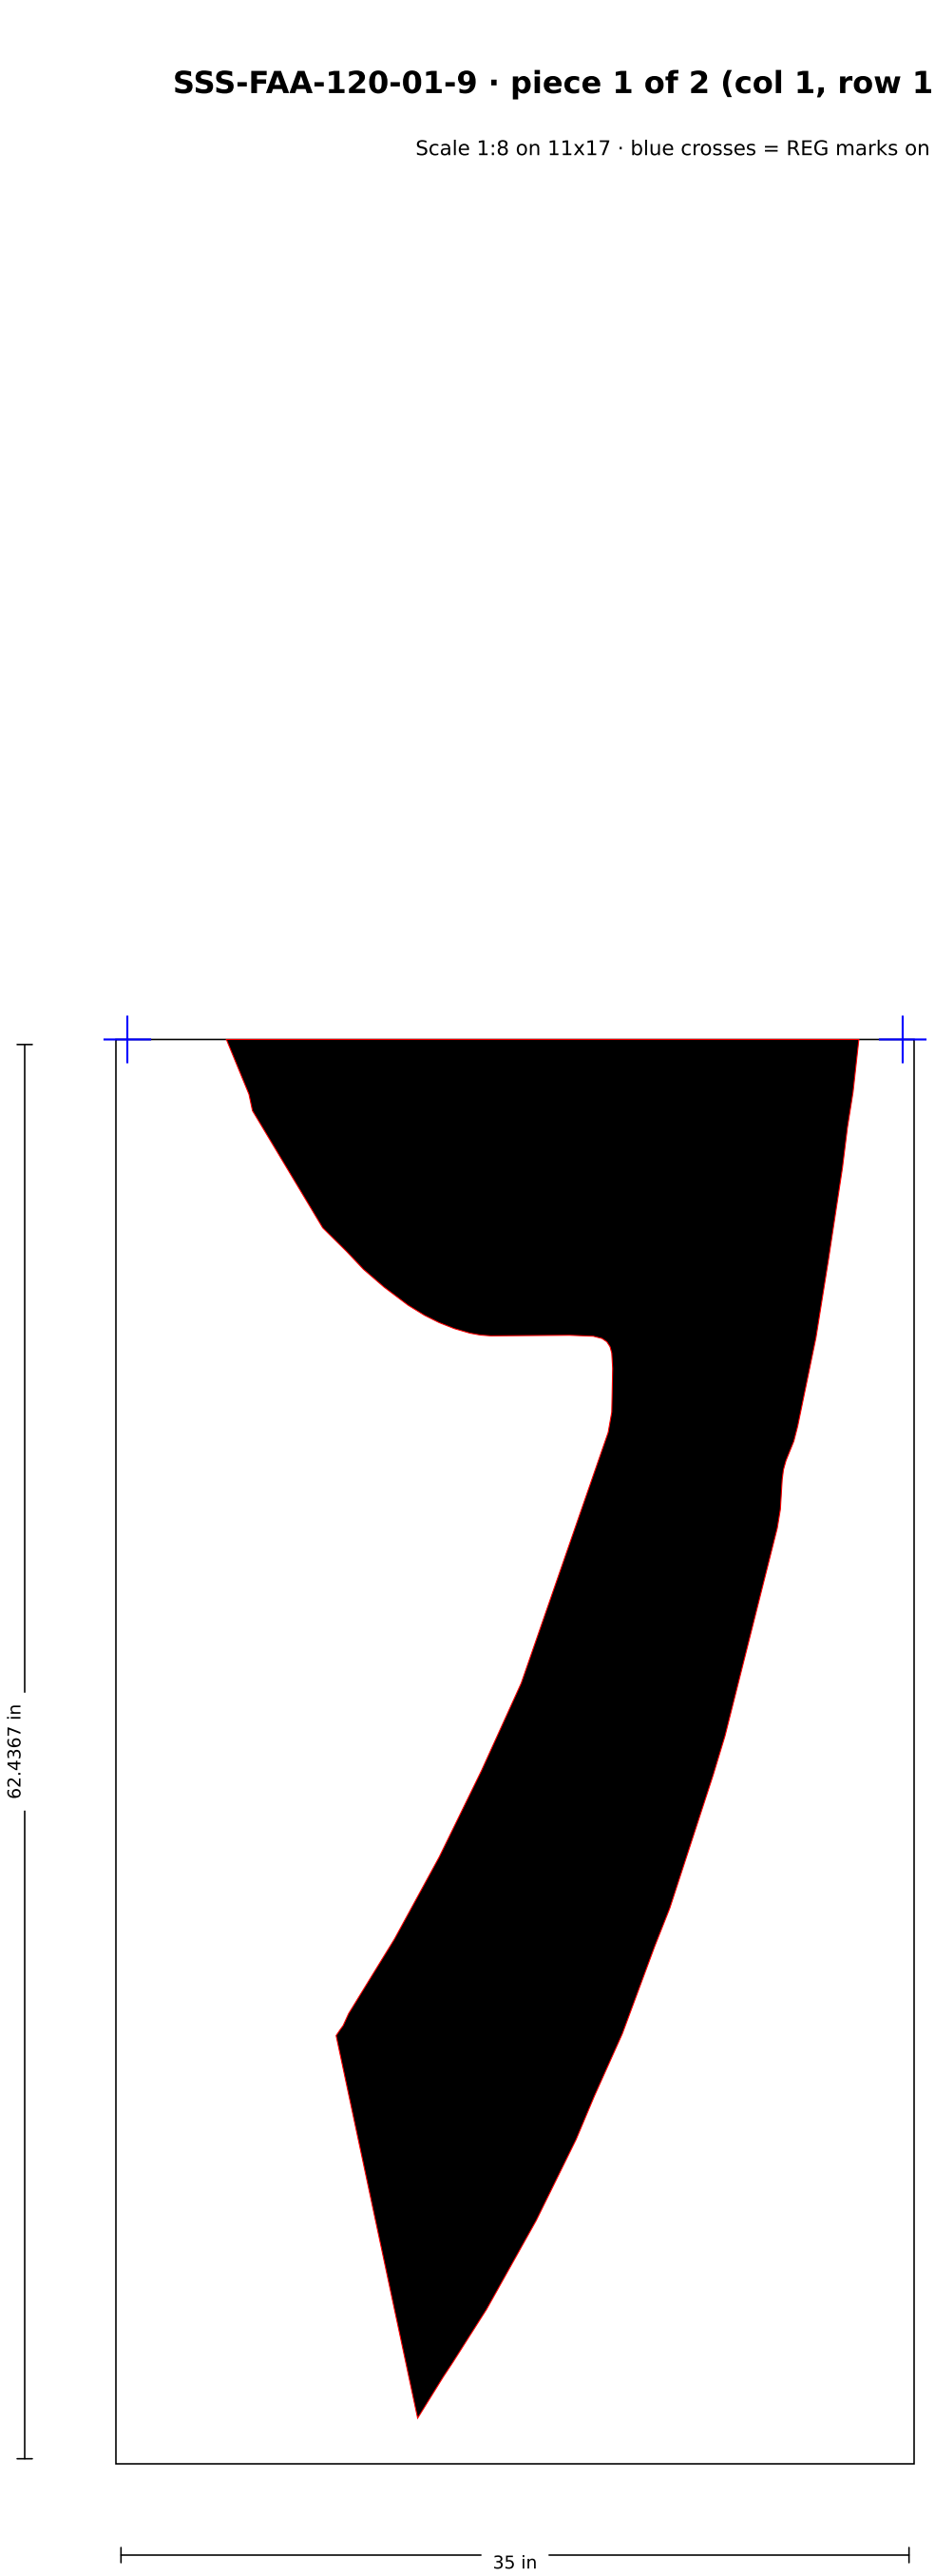

SSS-FAA-120-01-9 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

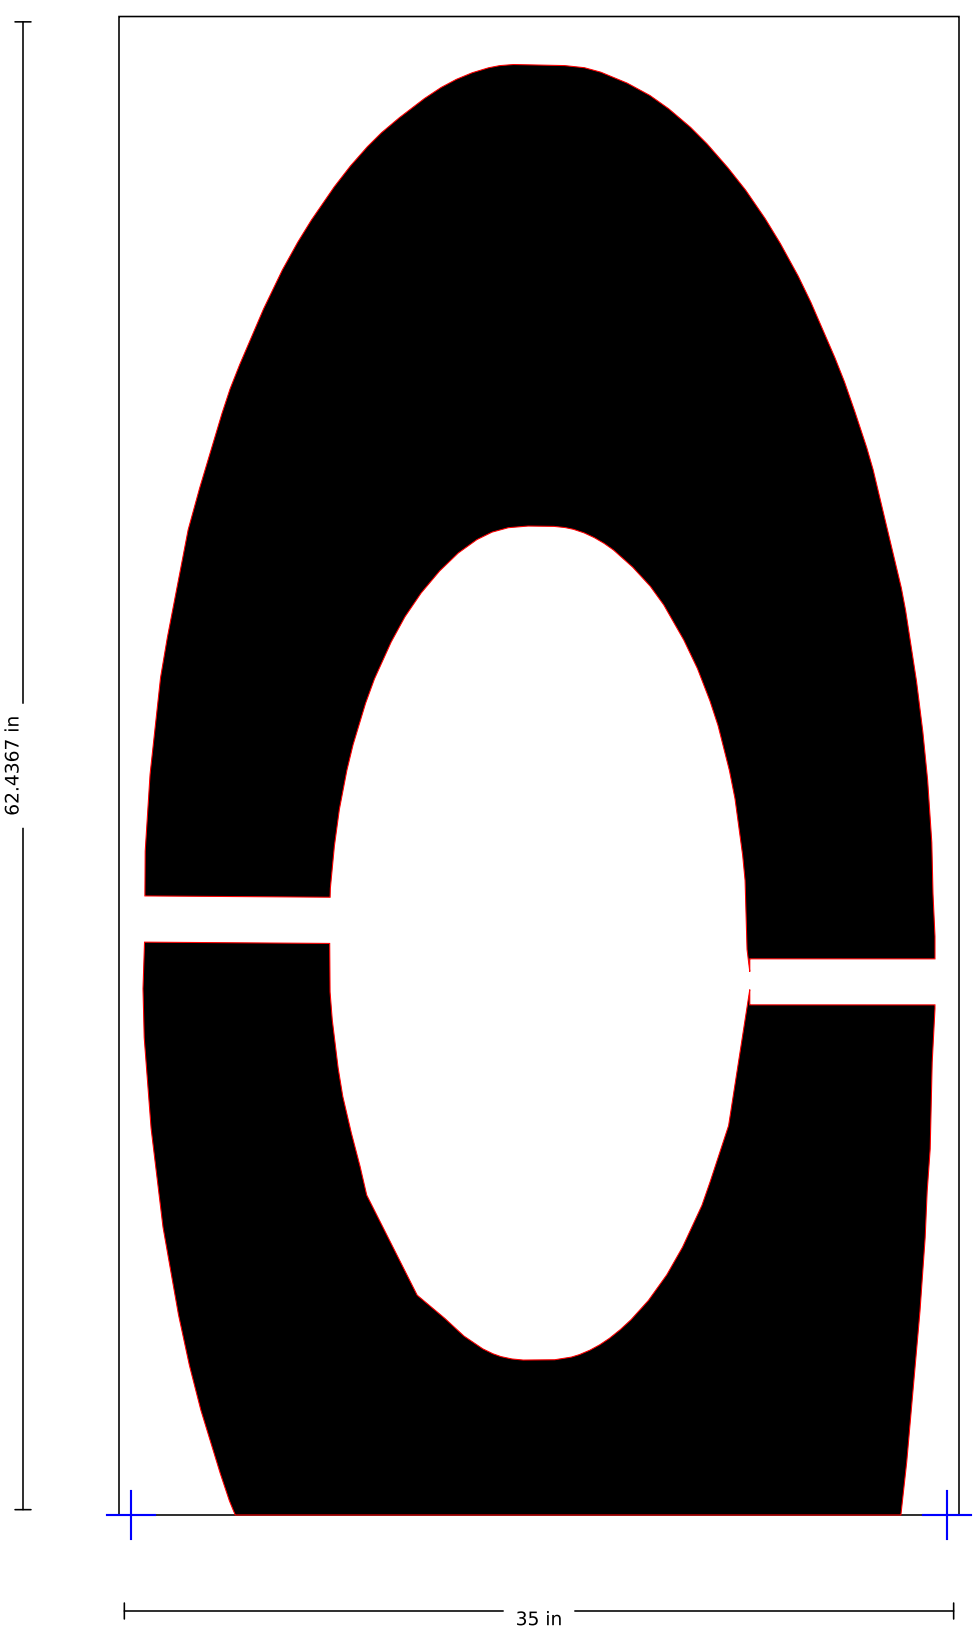

SSS-FAA-120-01-A

120" FAA Airport "A" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

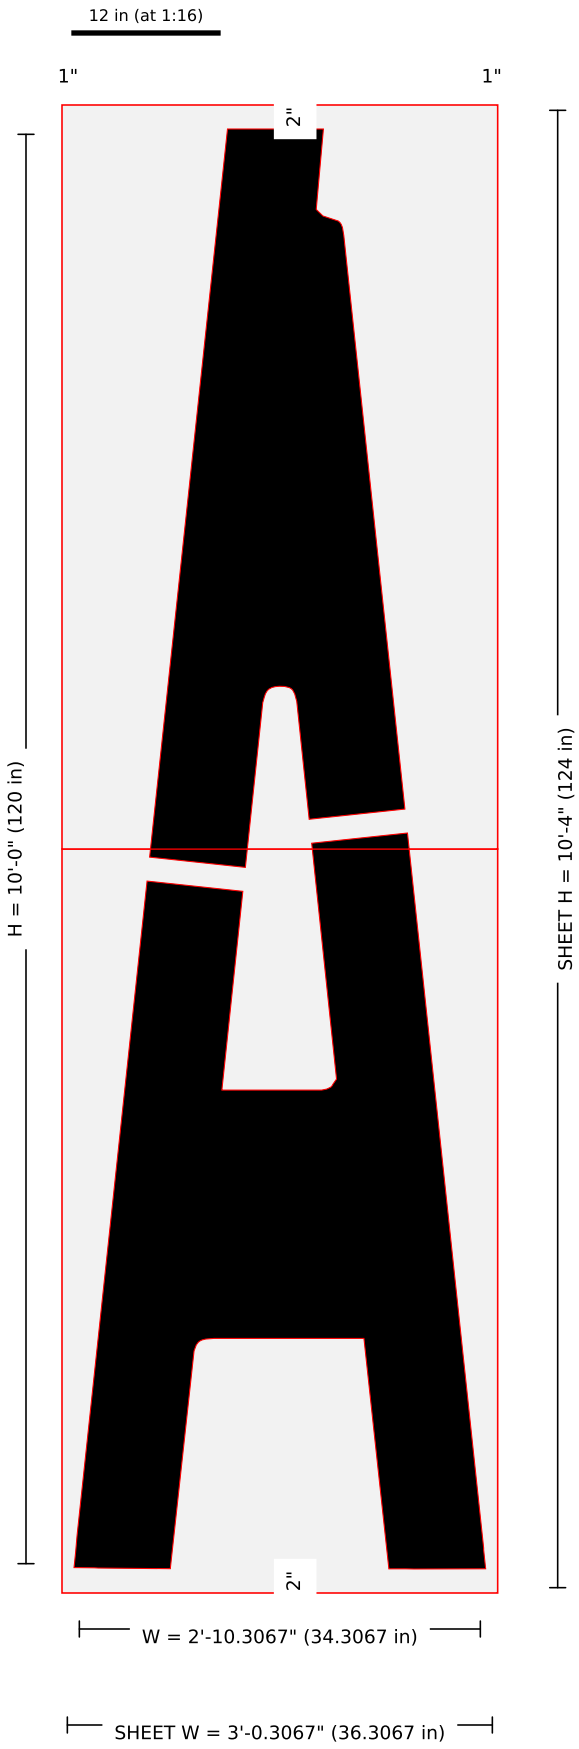

Pieces: 2 (1 x 2); blanks (in): 36.307 x 62, 36.307 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120A-120in-FAA-Airport-Letter-A-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 33.88); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (10.05,57.9) stroke 8.025" w=2.006"; (23.55,61.9) stroke 8.025" w=2.006" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-A · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

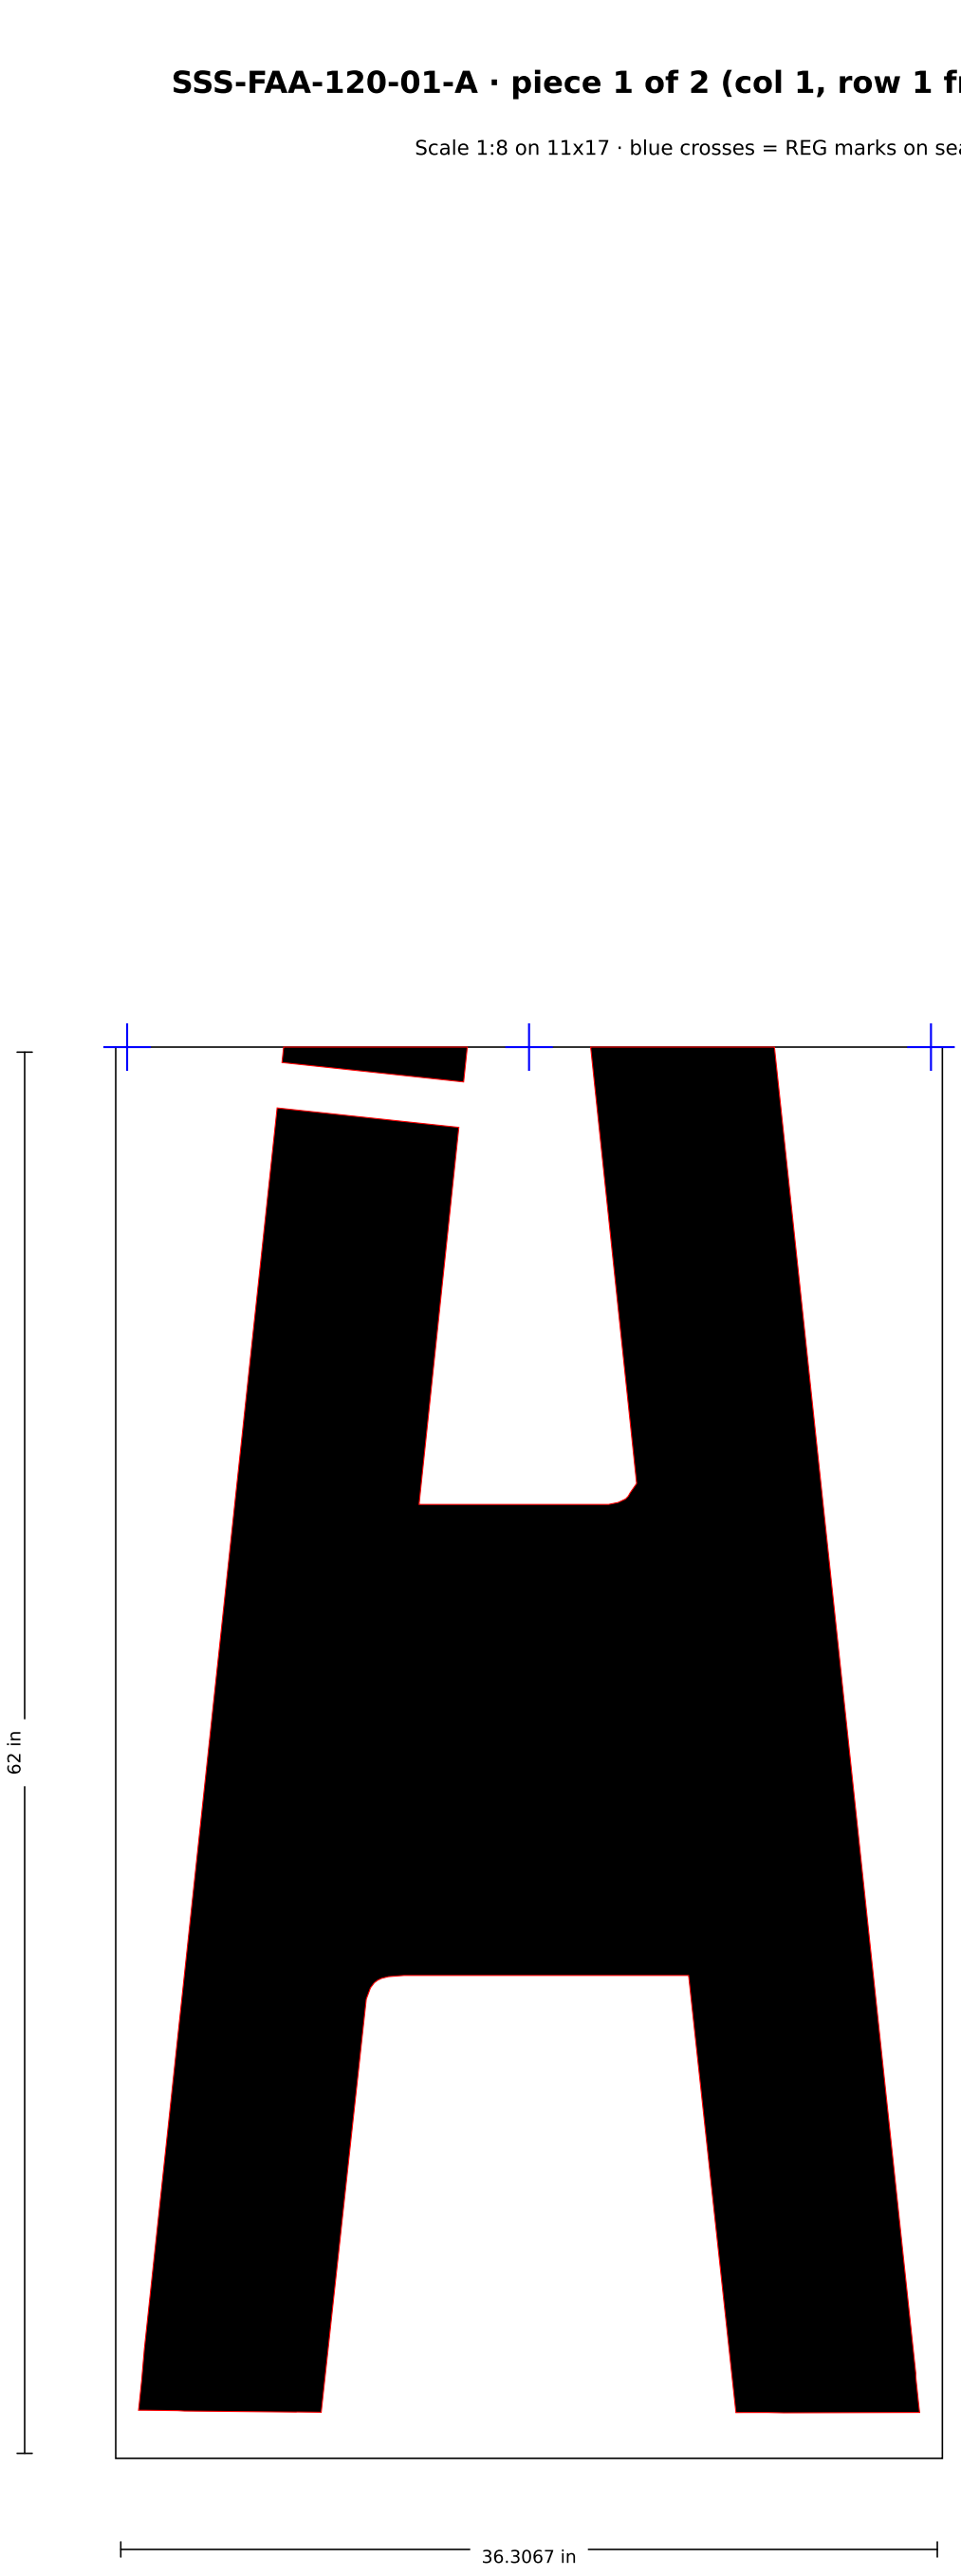

SSS-FAA-120-01-A · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

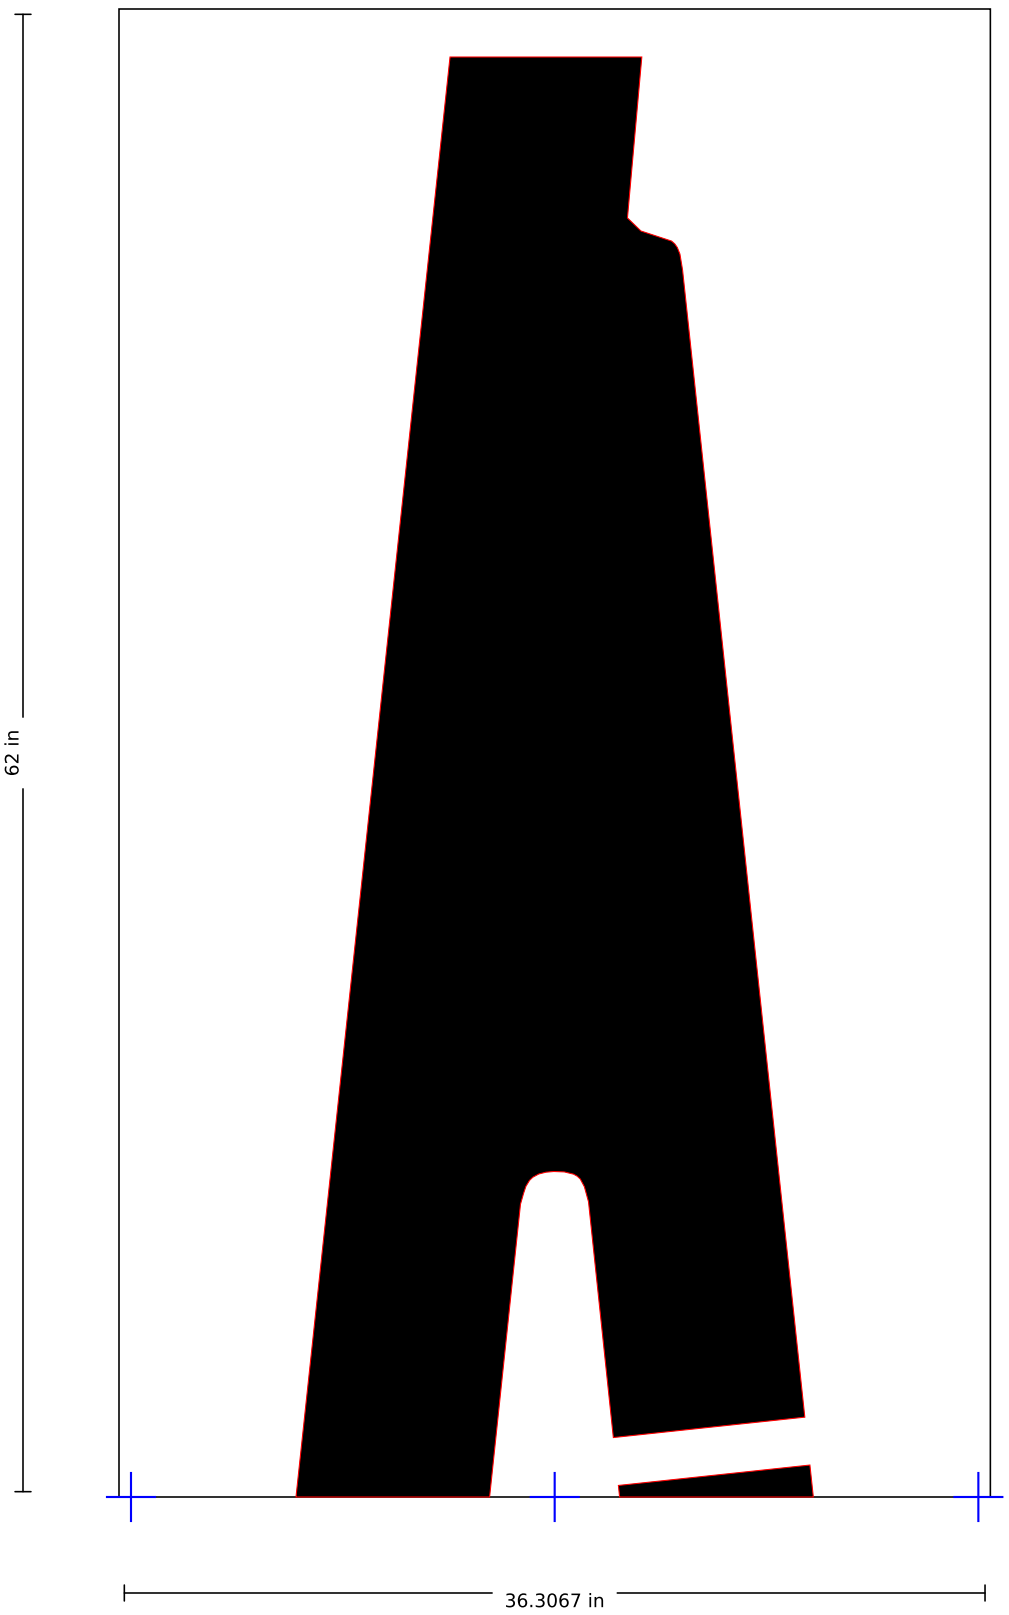

SSS-FAA-120-01-B

120" FAA Airport "B" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

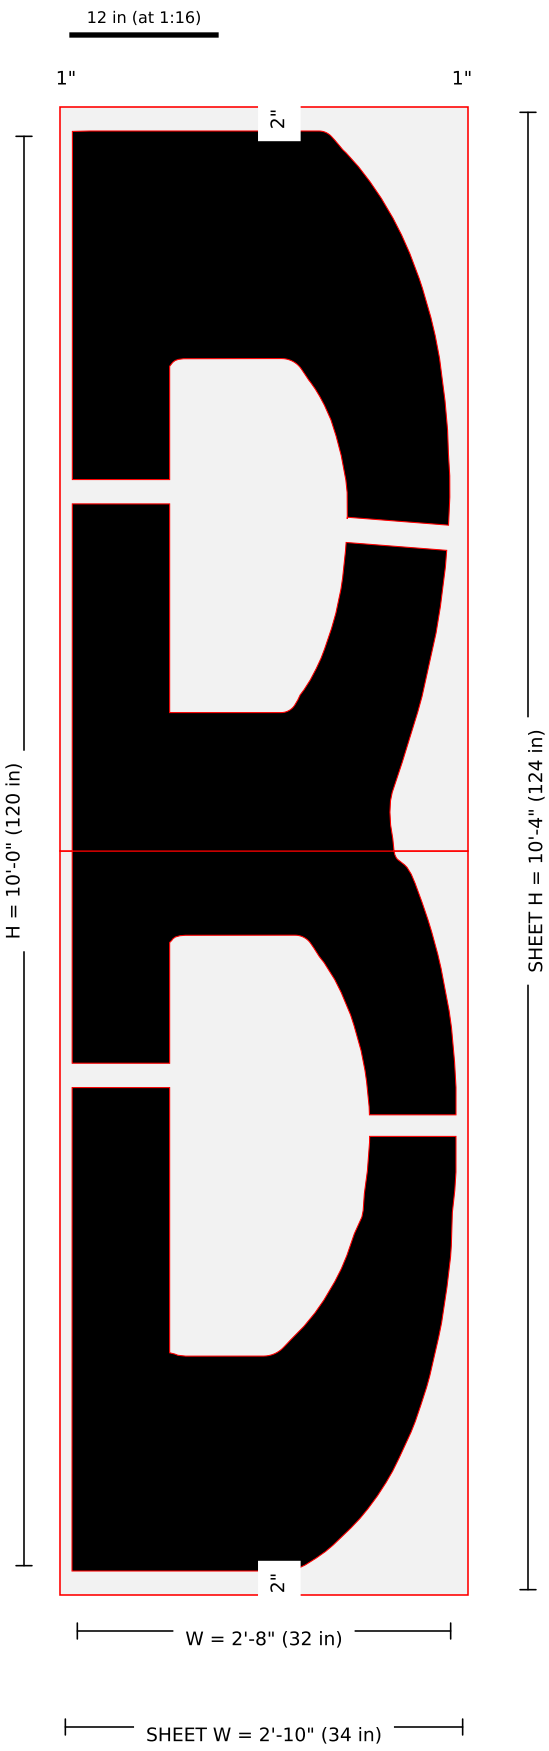

Pieces: 2 (1 x 2); blanks (in): 34 x 62, 34 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120B-120in-FAA-Airport-Letter-B-134x48-2.jpg: width = 1-800 image width label 32 in (image-scale 32.45); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 16 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
ISLAND BRIDGES (2026-11-04): (28.41,37.12) stroke 7.182" w=1.795"; (4.08,41.3) stroke 8.127" w=2.032"; (4.08,89.94) stroke 8.113" w=2.028"; (27.11,86.43) stroke 8.418" w=2.104" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-B · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

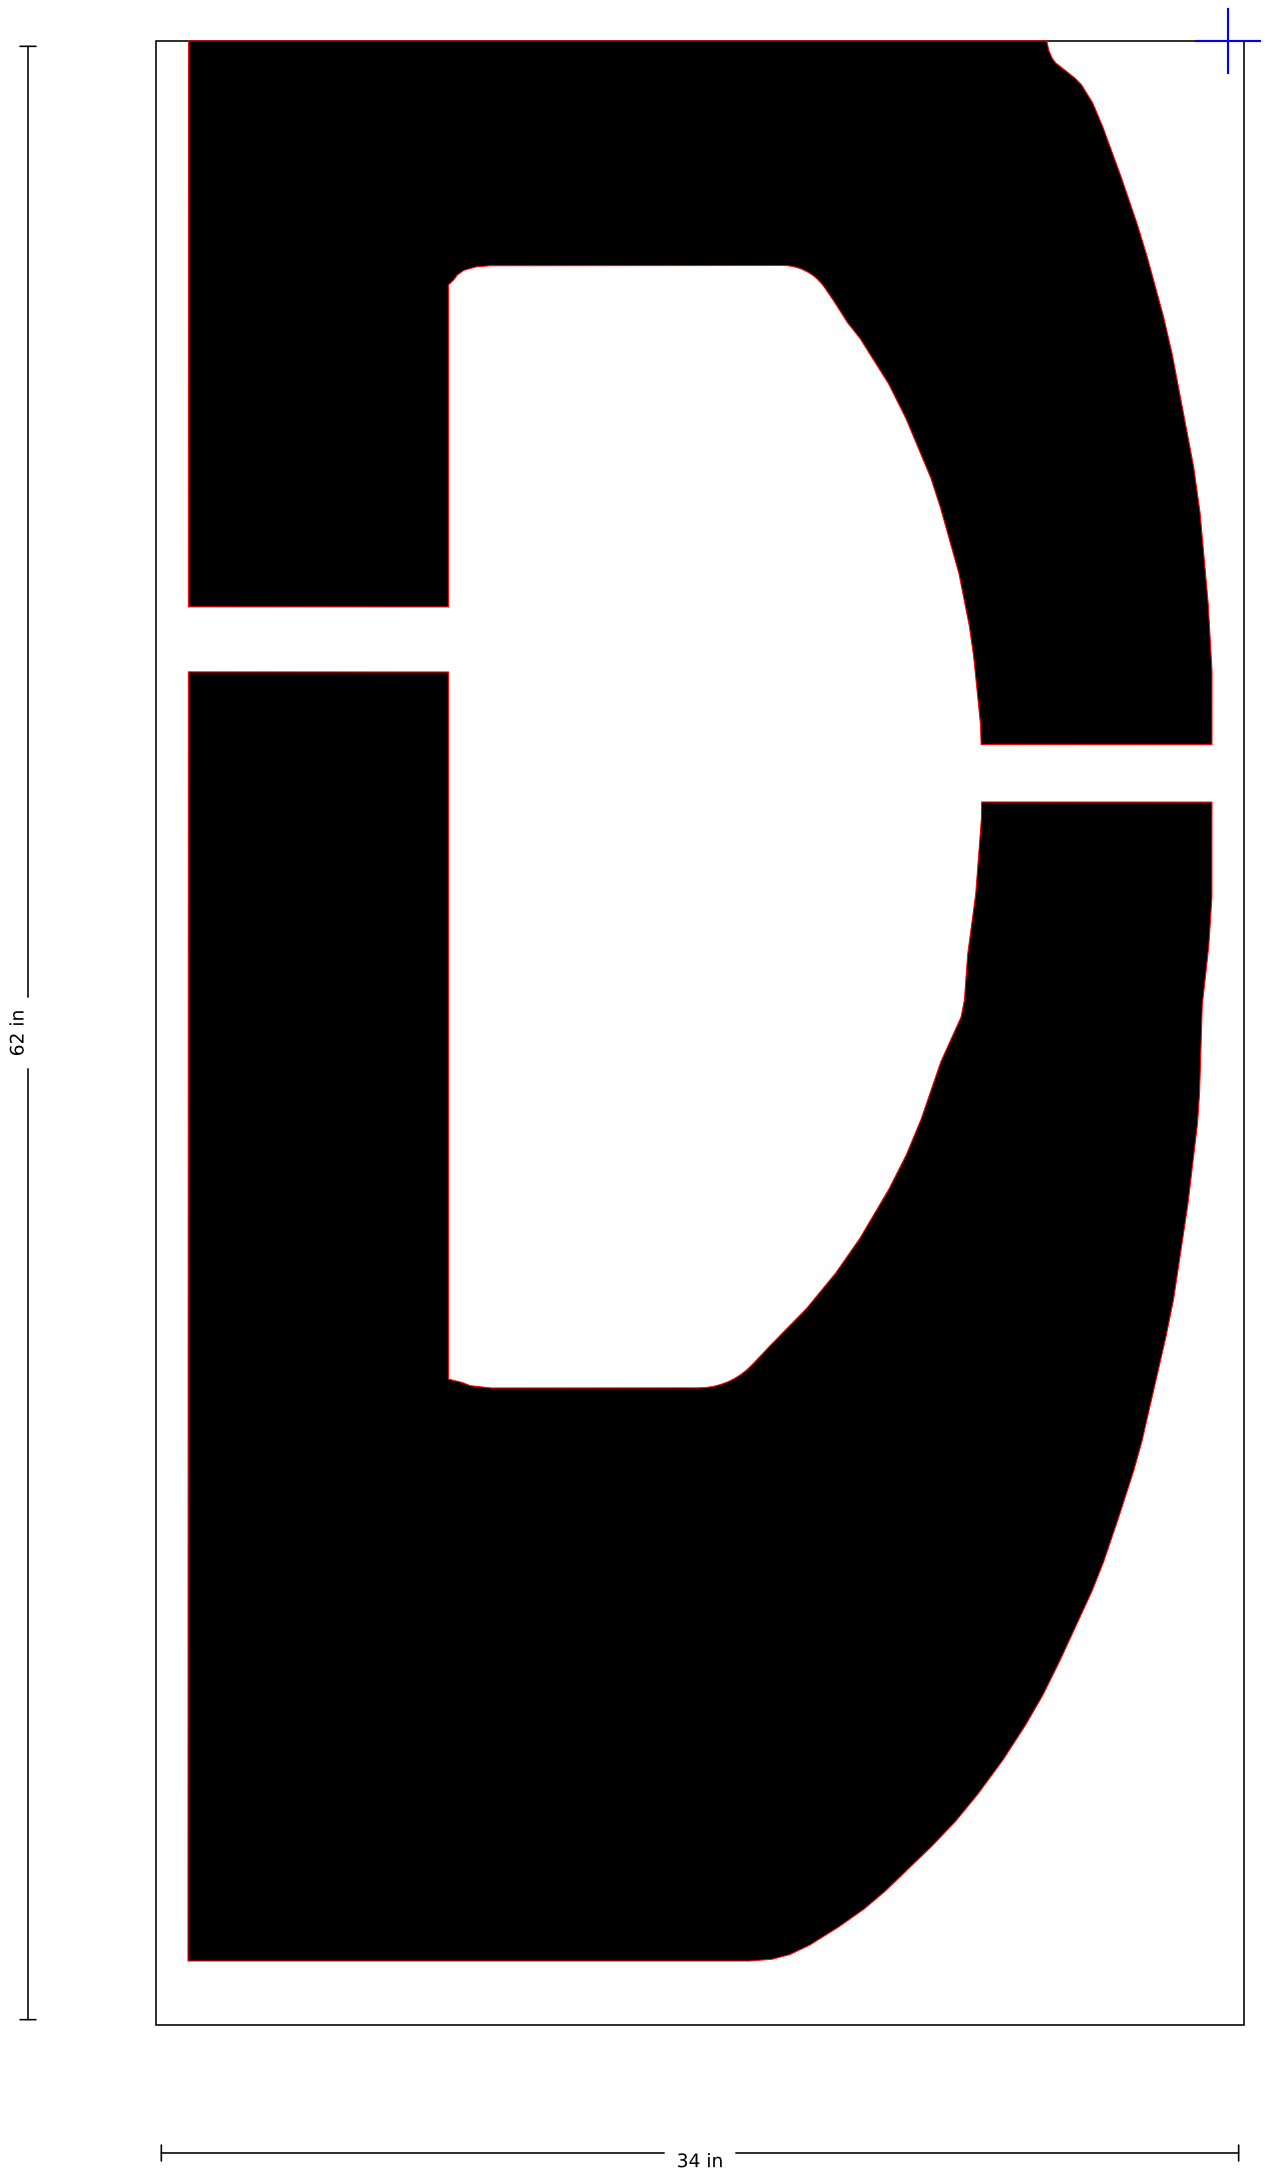

SSS-FAA-120-01-B · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

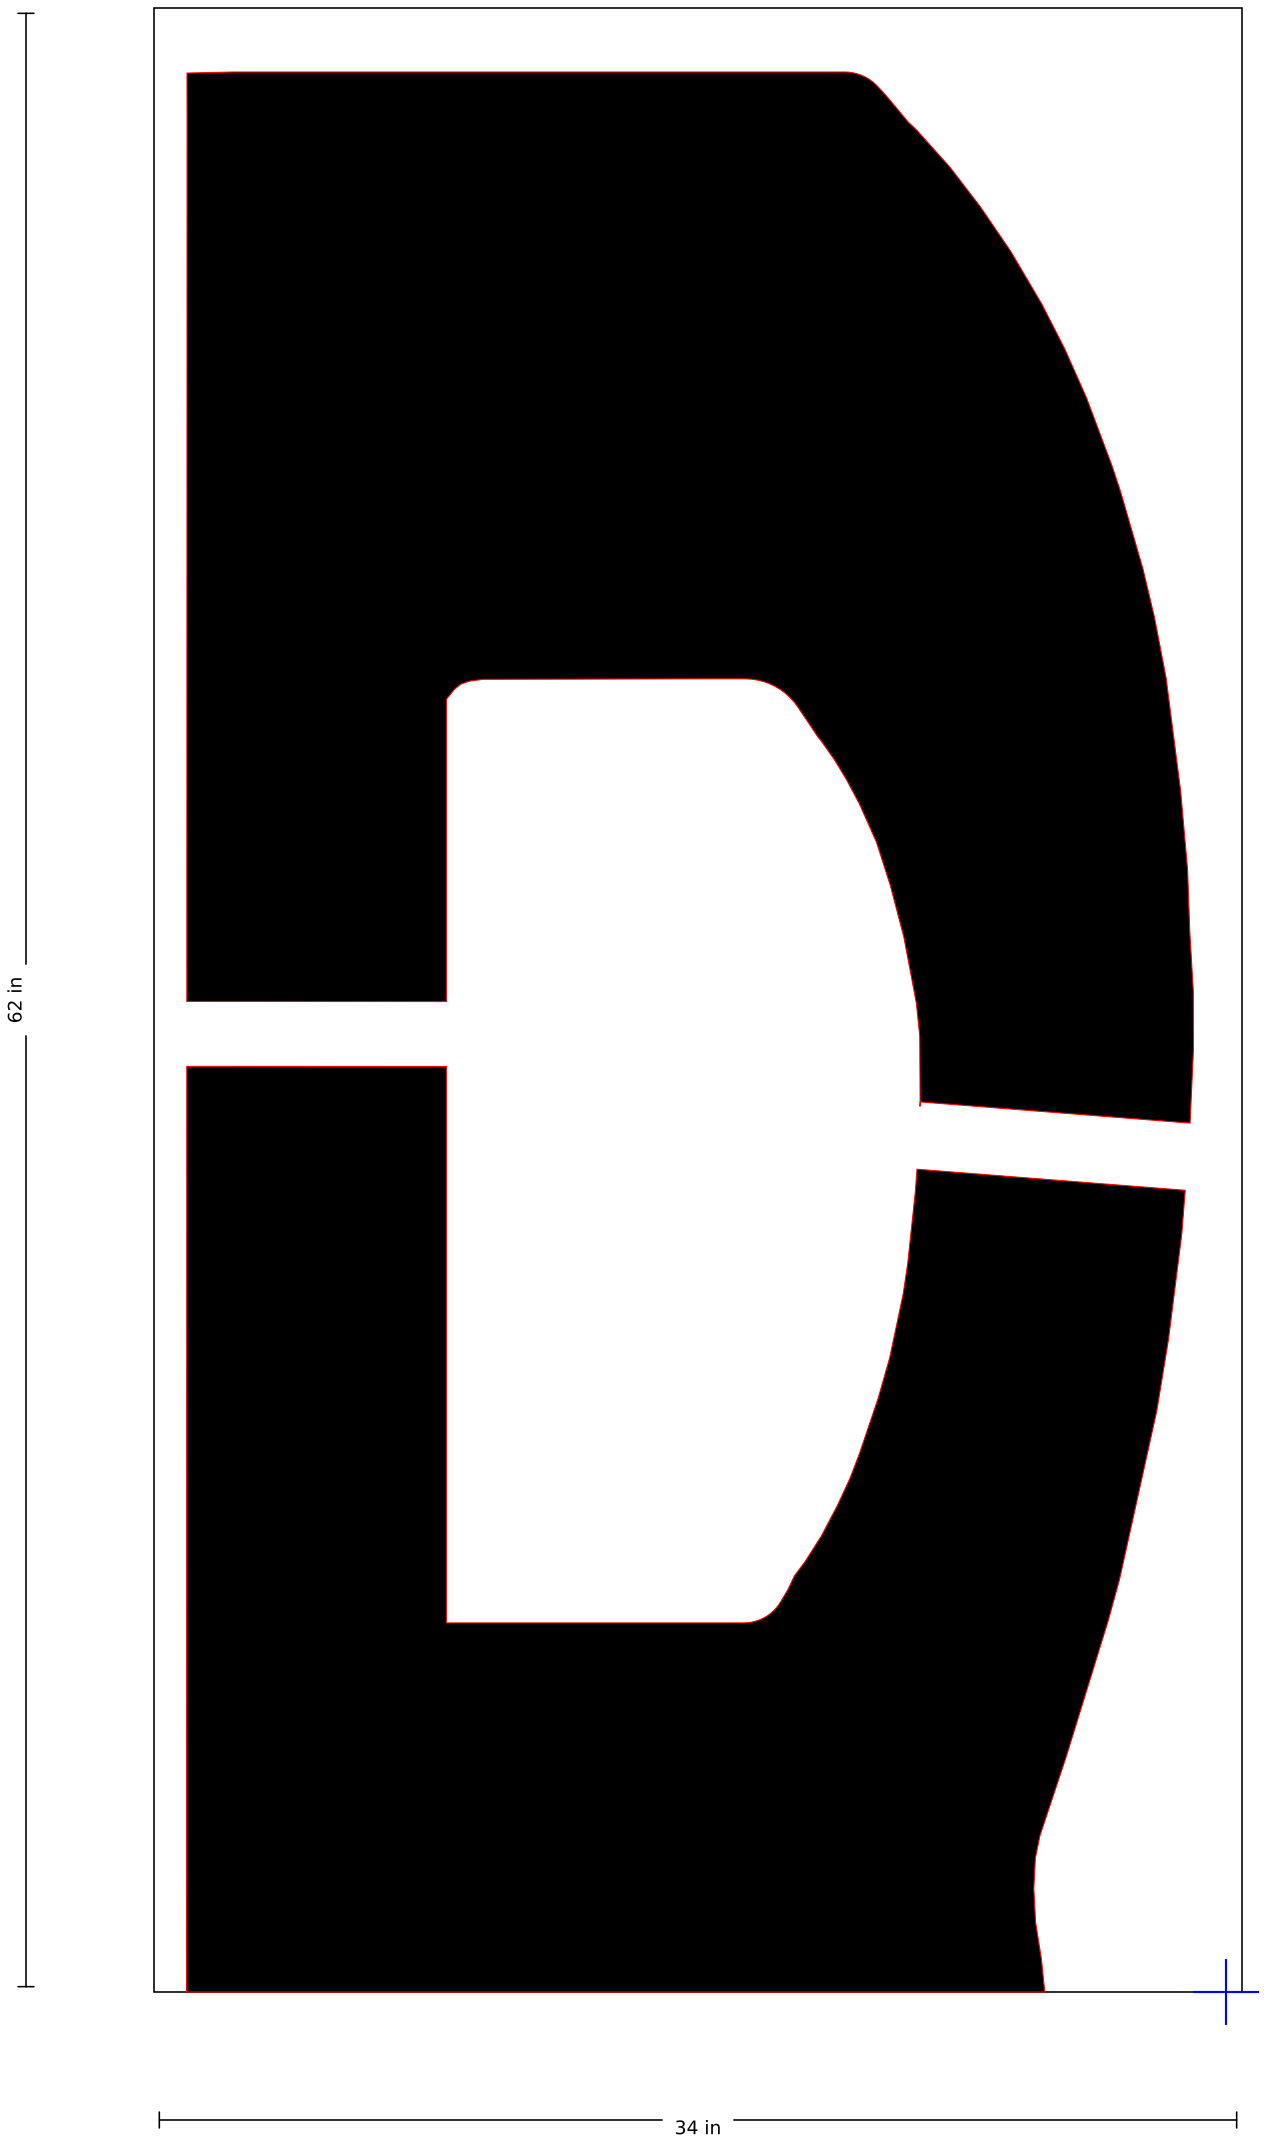

SSS-FAA-120-01-D

120" FAA Airport "D" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

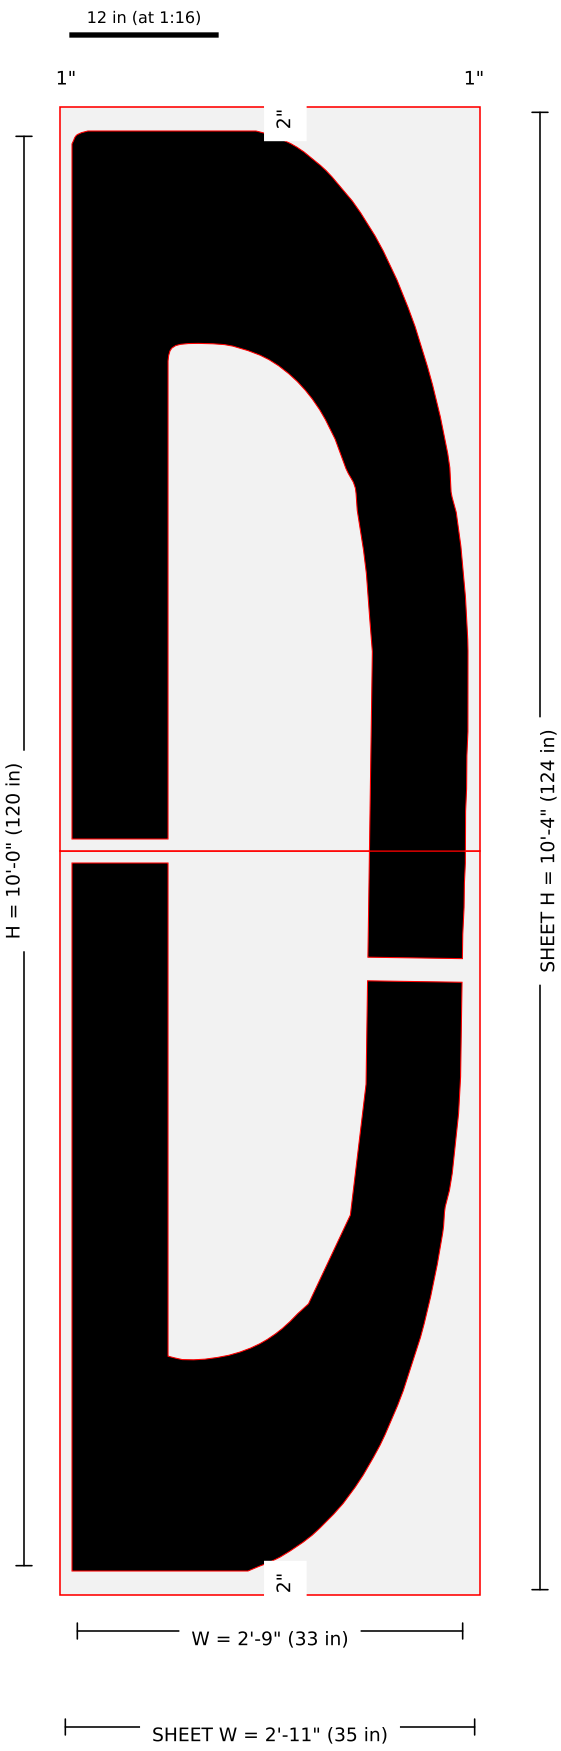

Pieces: 2 (1 x 2); blanks (in): 35 x 62, 35 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120D-120in-FAA-Airport-Letter-D-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 33.29); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (28.58,50.11) stroke 7.874" w=1.968"; (4.0,60.0) stroke 8.002" w=2.001" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-D · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:6 on 11x17 · blue crosses = REG marks on seams

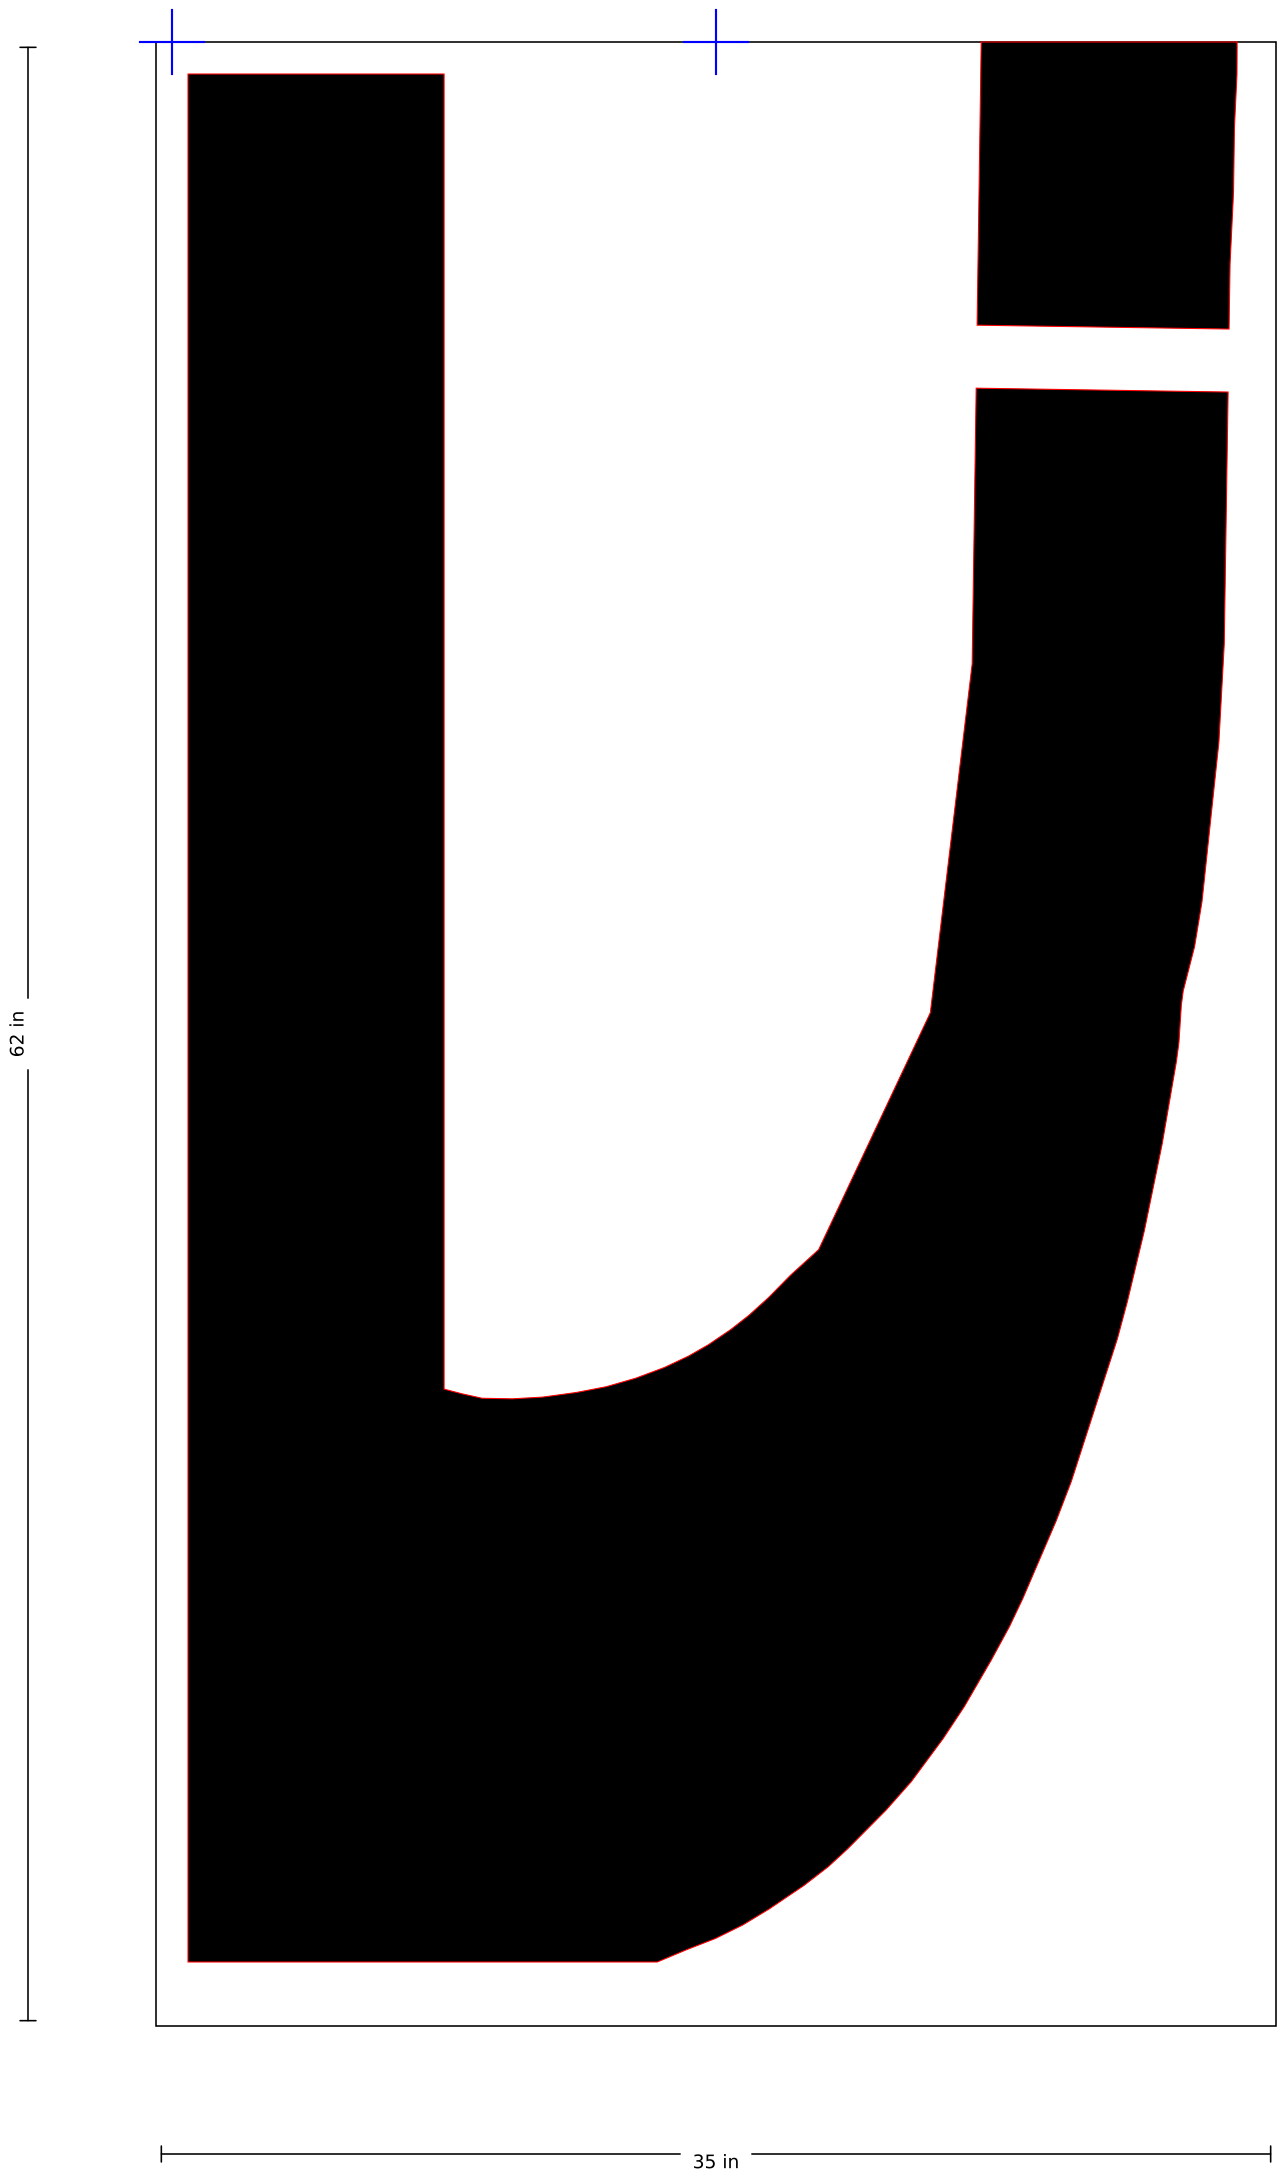

SSS-FAA-120-01-D · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:6 on 11x17 · blue crosses = REG marks on seams

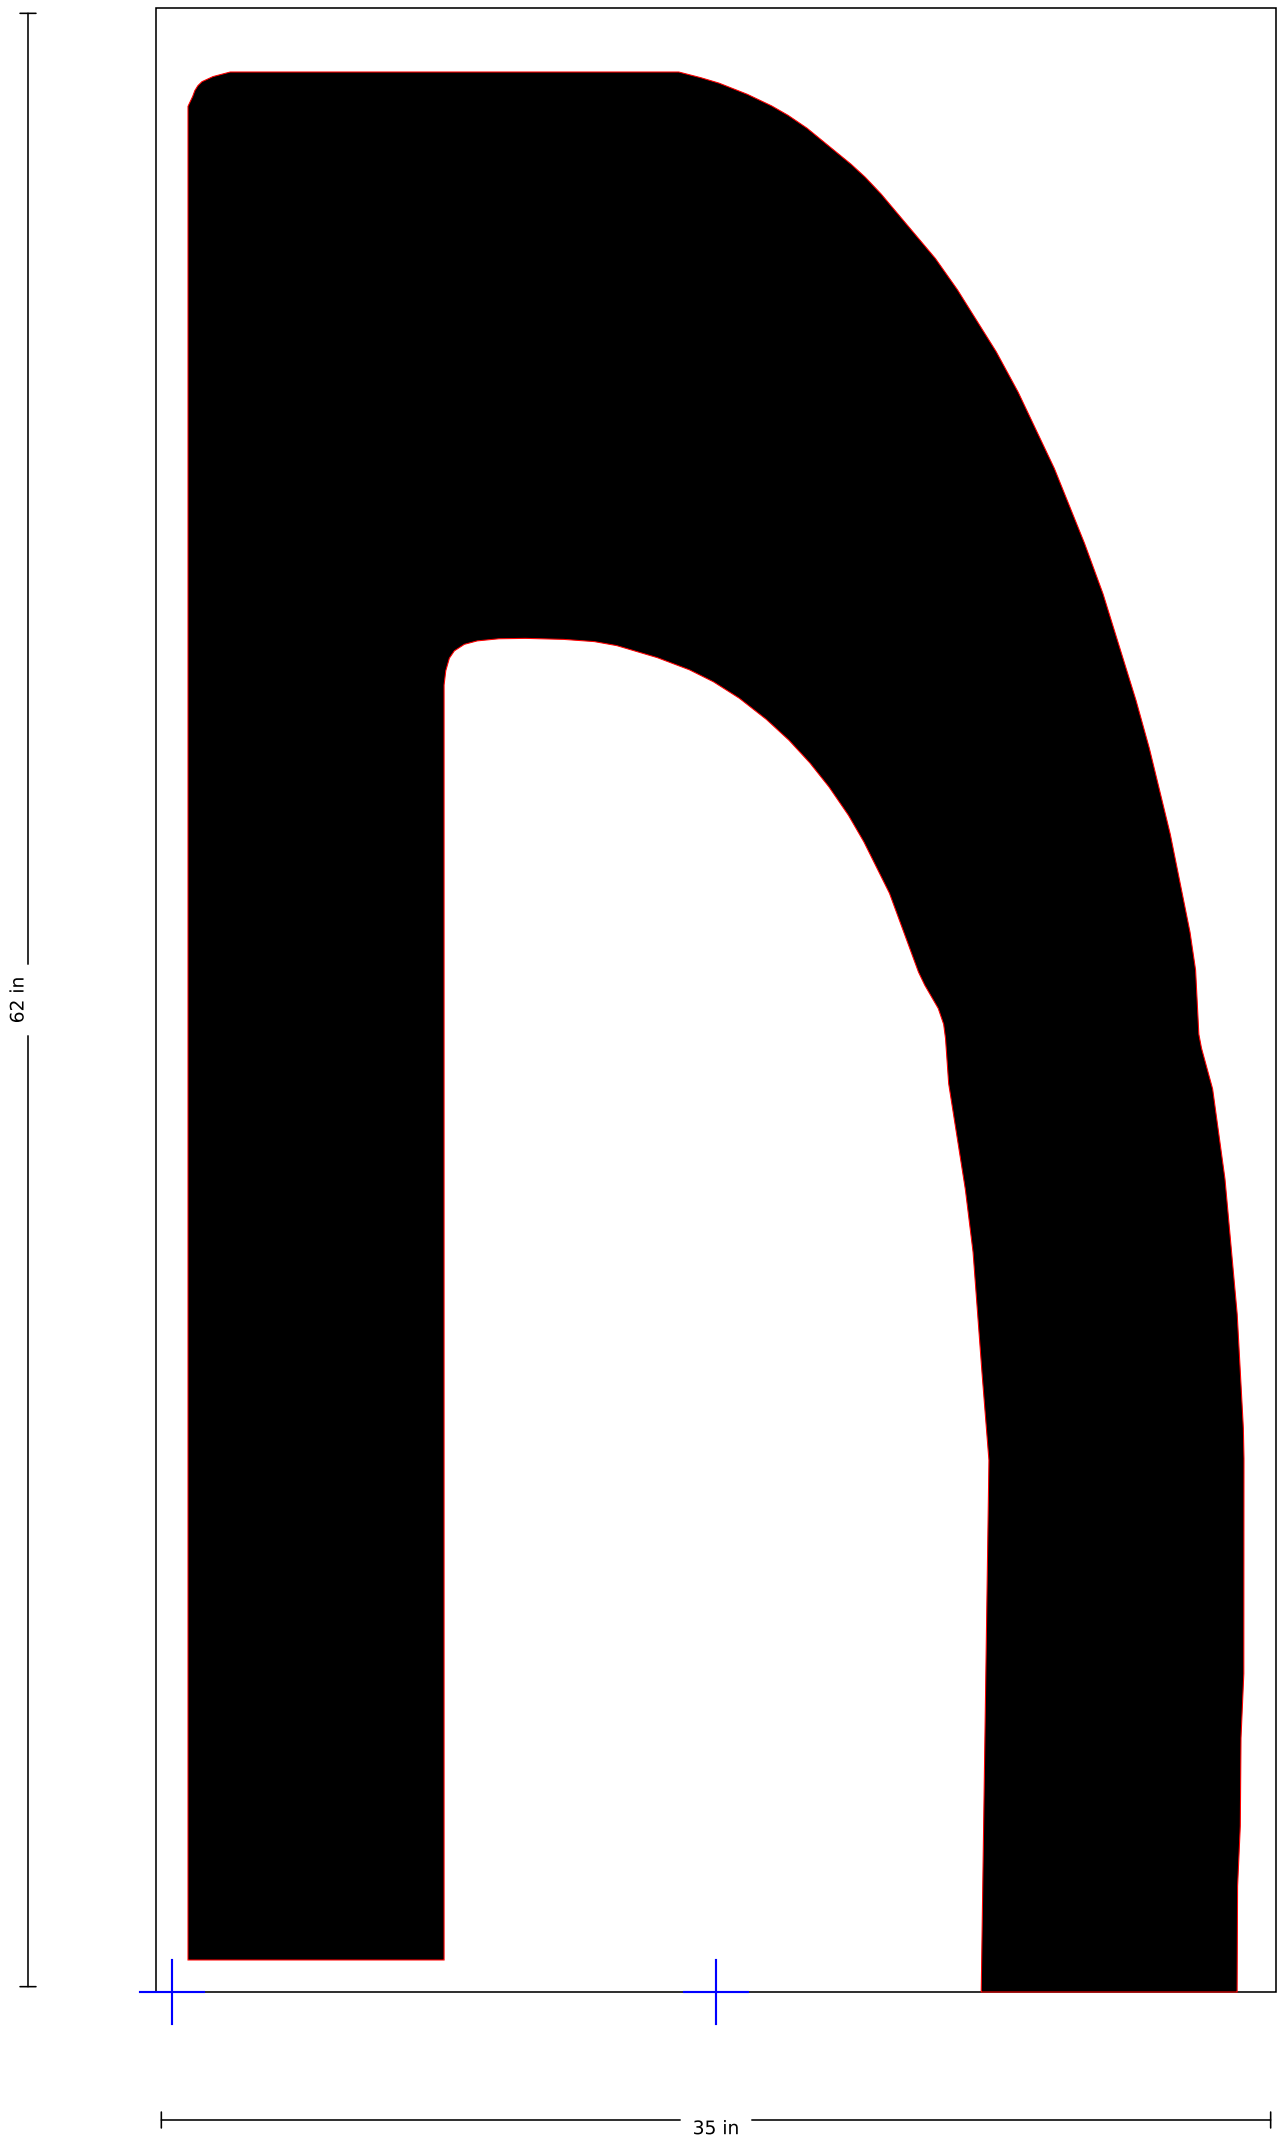

SSS-FAA-120-01-E

120" FAA Airport "E" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

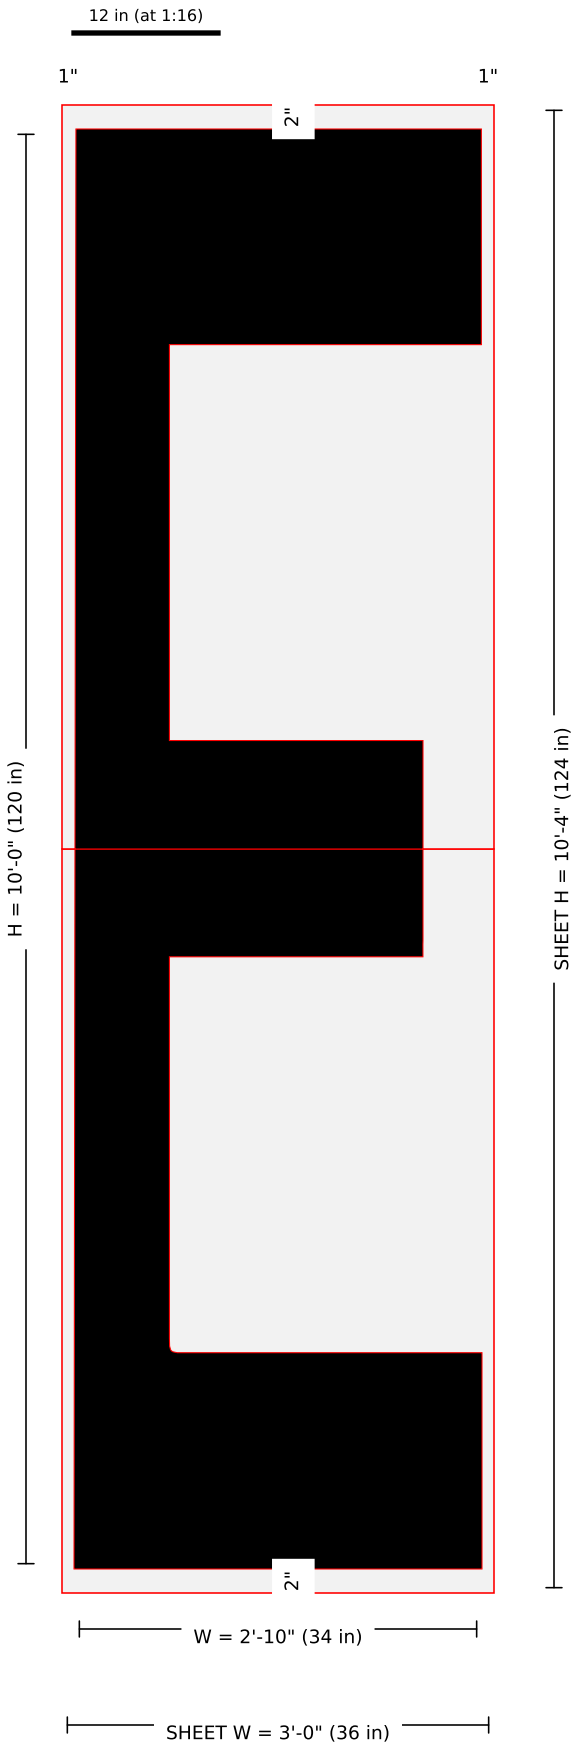

Pieces: 2 (1 x 2); blanks (in): 36 x 62, 36 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120E-120in-FAA-Airport-Letter-E-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-E · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

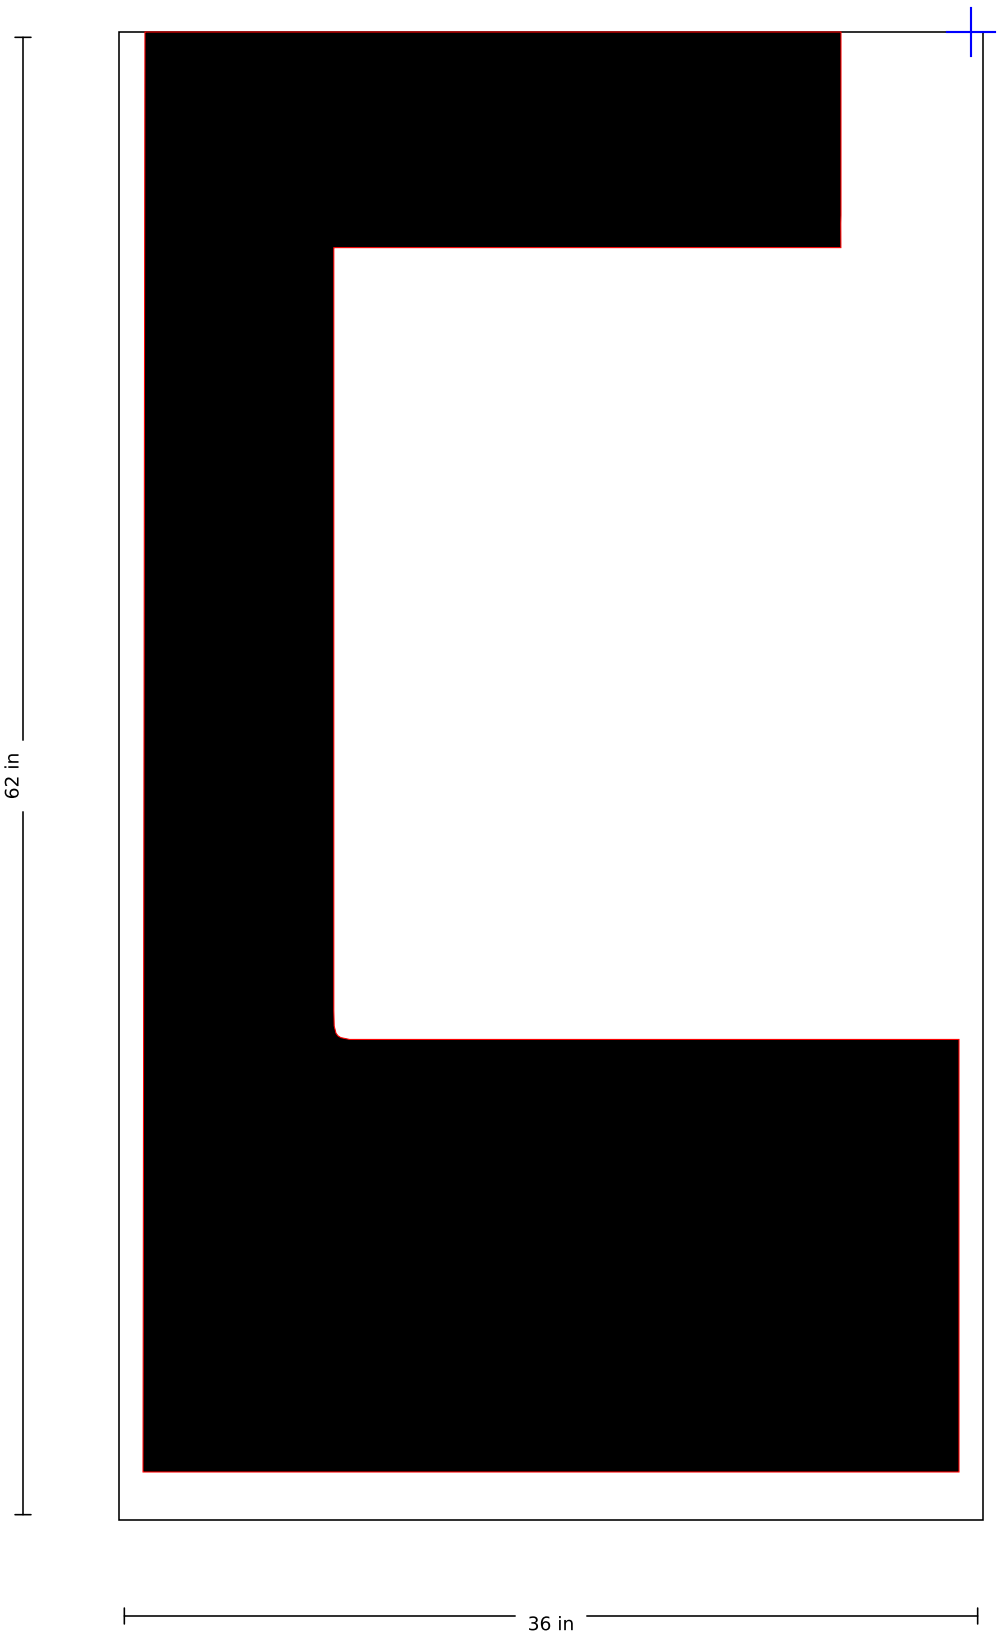

SSS-FAA-120-01-E · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

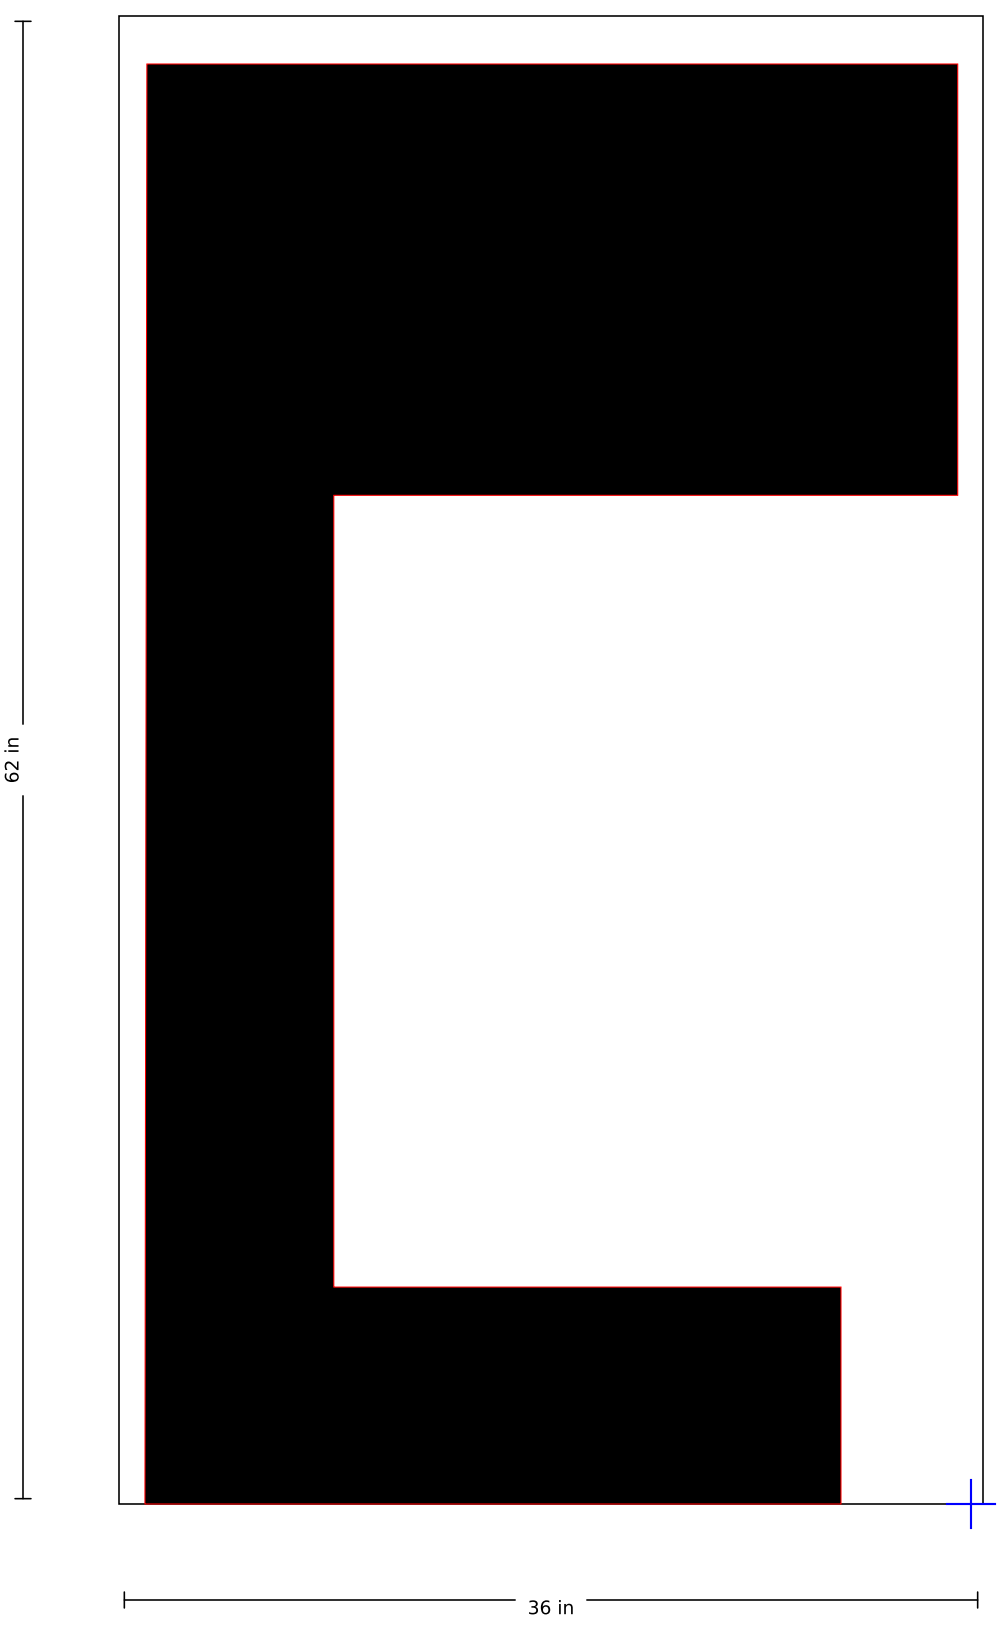

SSS-FAA-120-01-F

120" FAA Airport "F" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

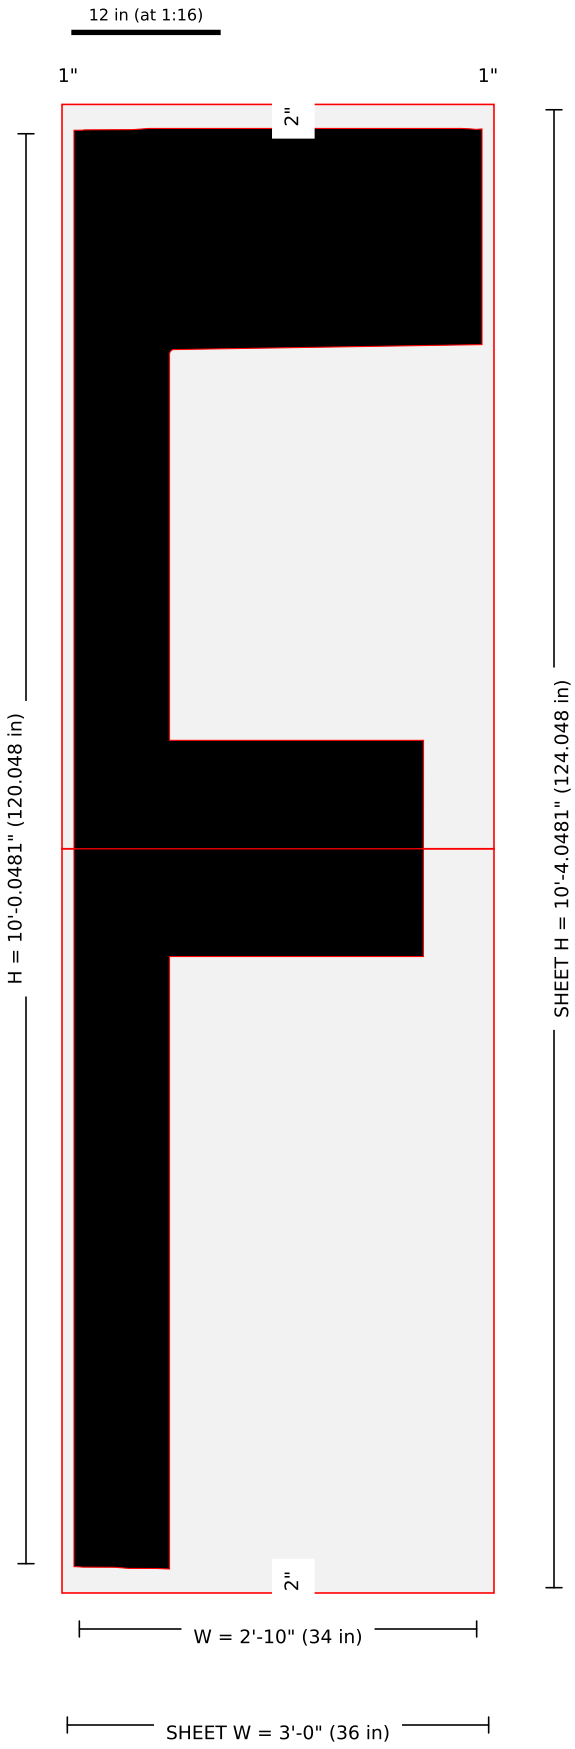

Pieces: 2 (1 x 2); blanks (in): 36 x 62.024, 36 x 62.024 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120F-120in-FAA-Airport-Letter-F-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-F · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

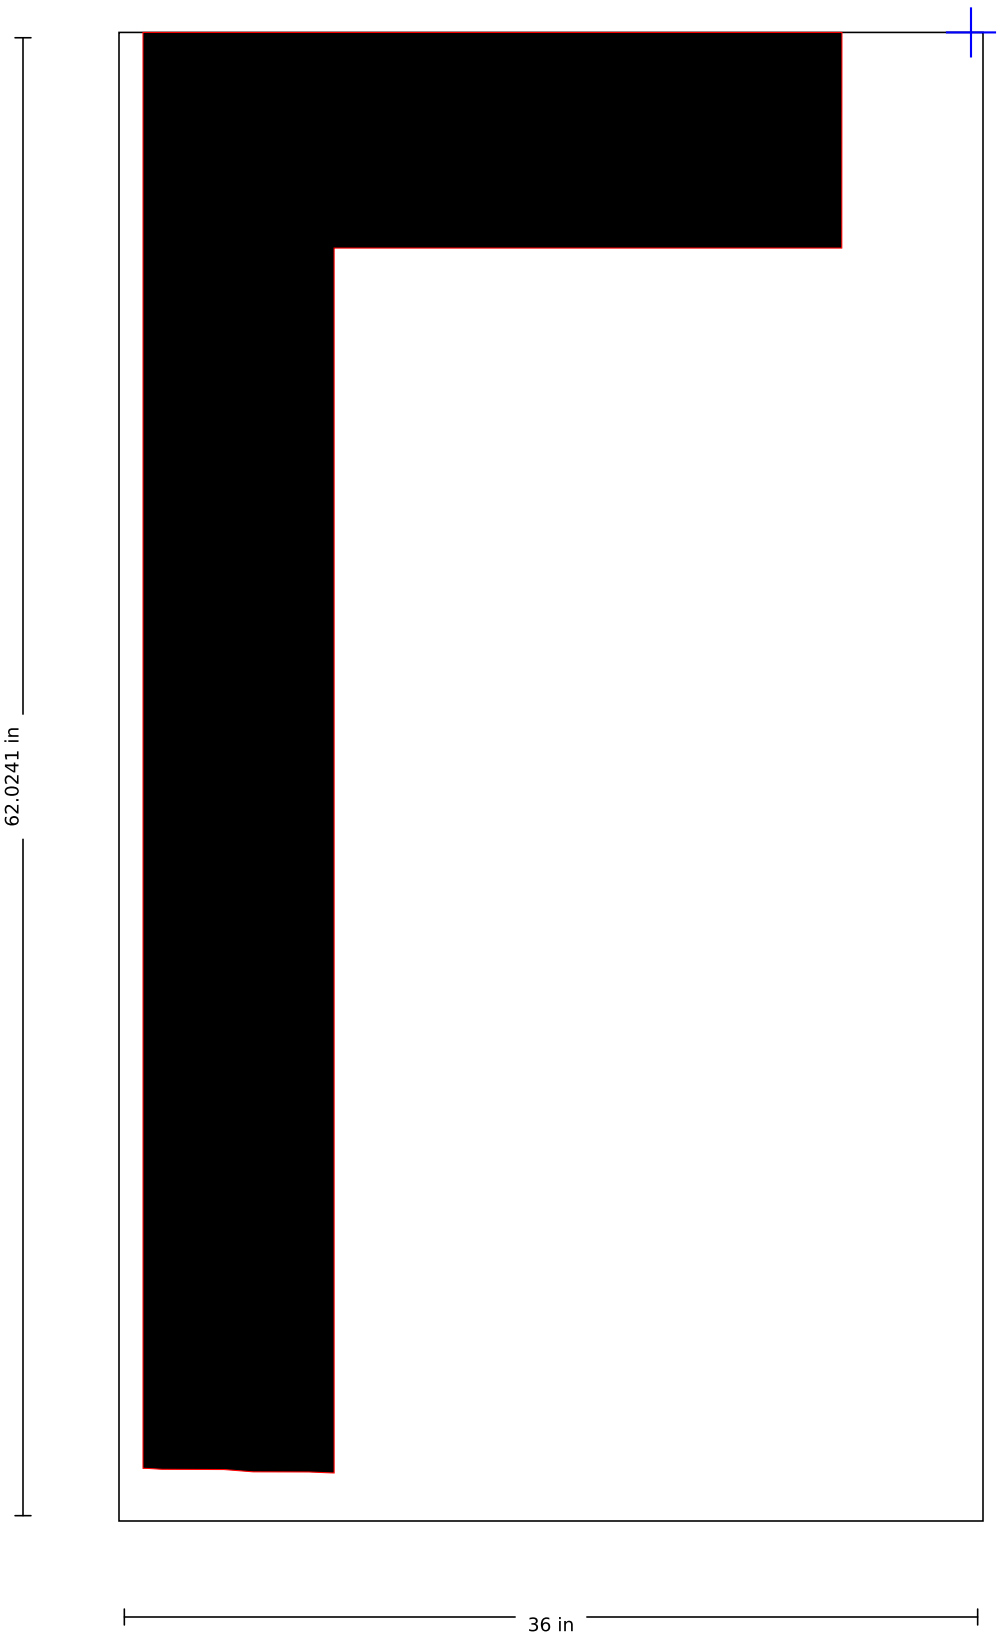

SSS-FAA-120-01-F · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

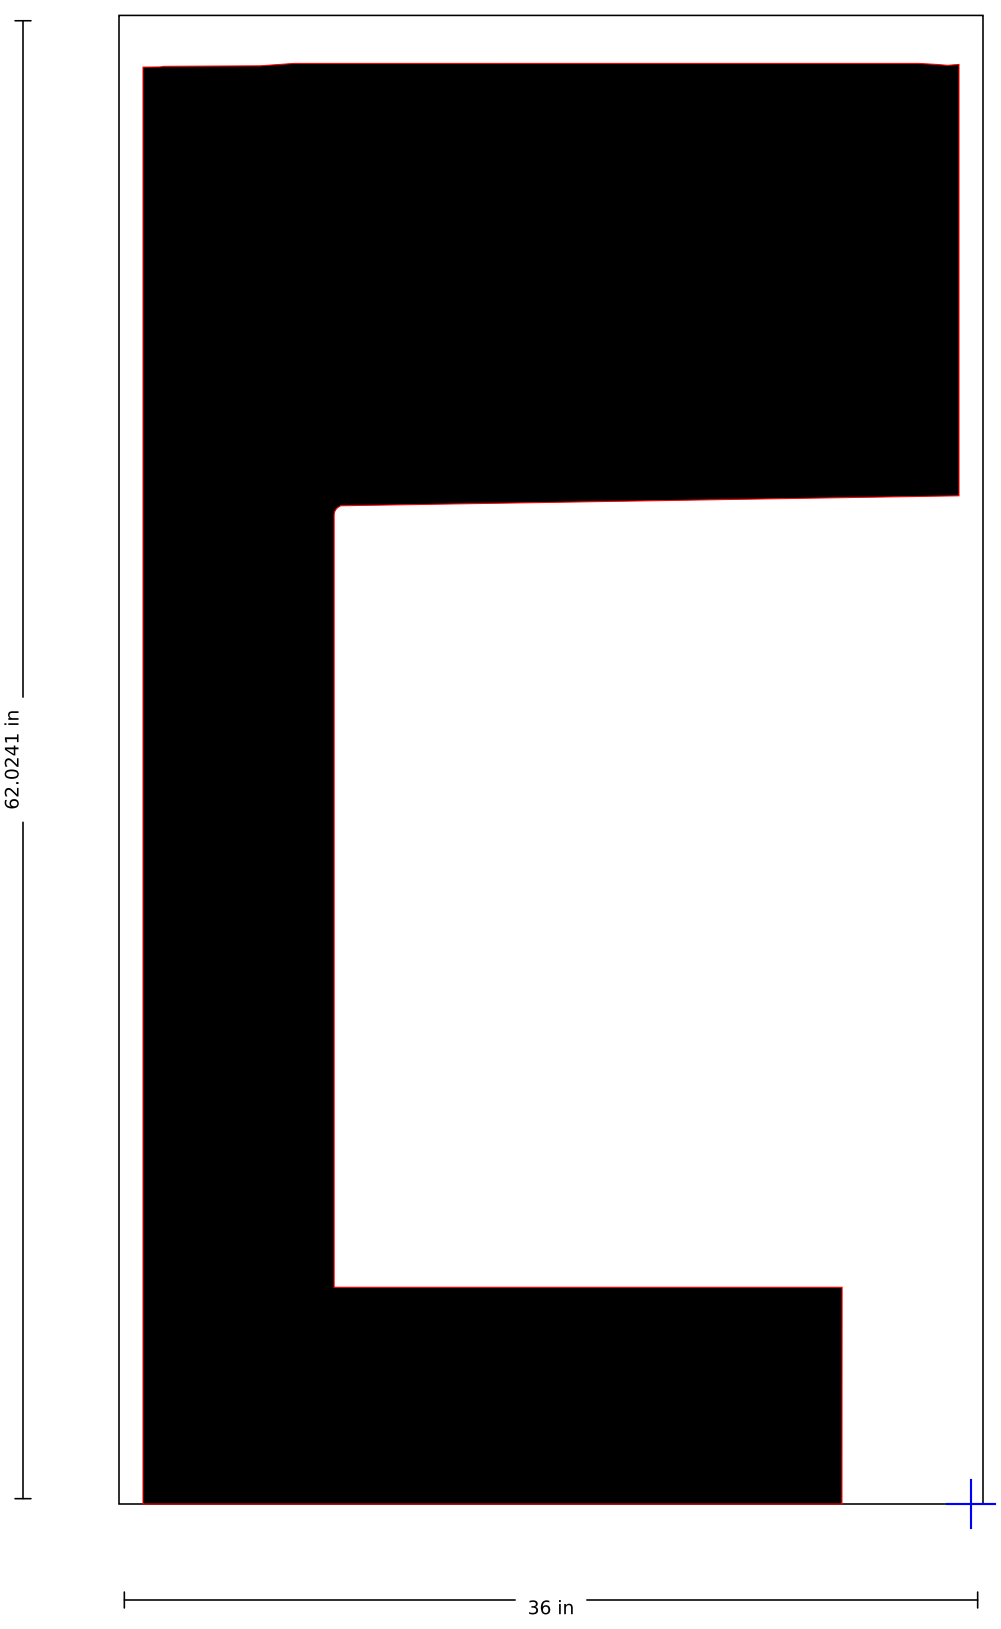

SSS-FAA-120-01-G

120" FAA Airport "G" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

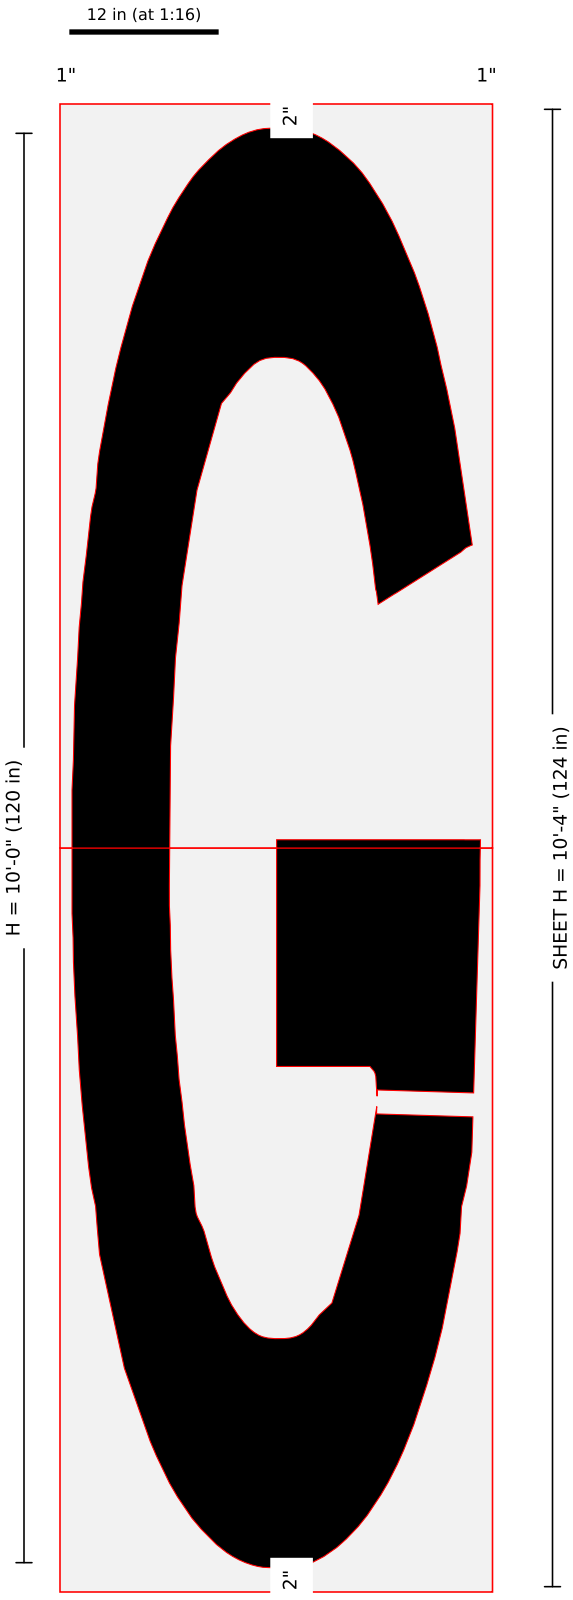

Pieces: 2 (1 x 2); blanks (in): 36.042 x 62, 36.042 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120G-120in-FAA-Airport-Letter-G-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 33.67); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-G · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

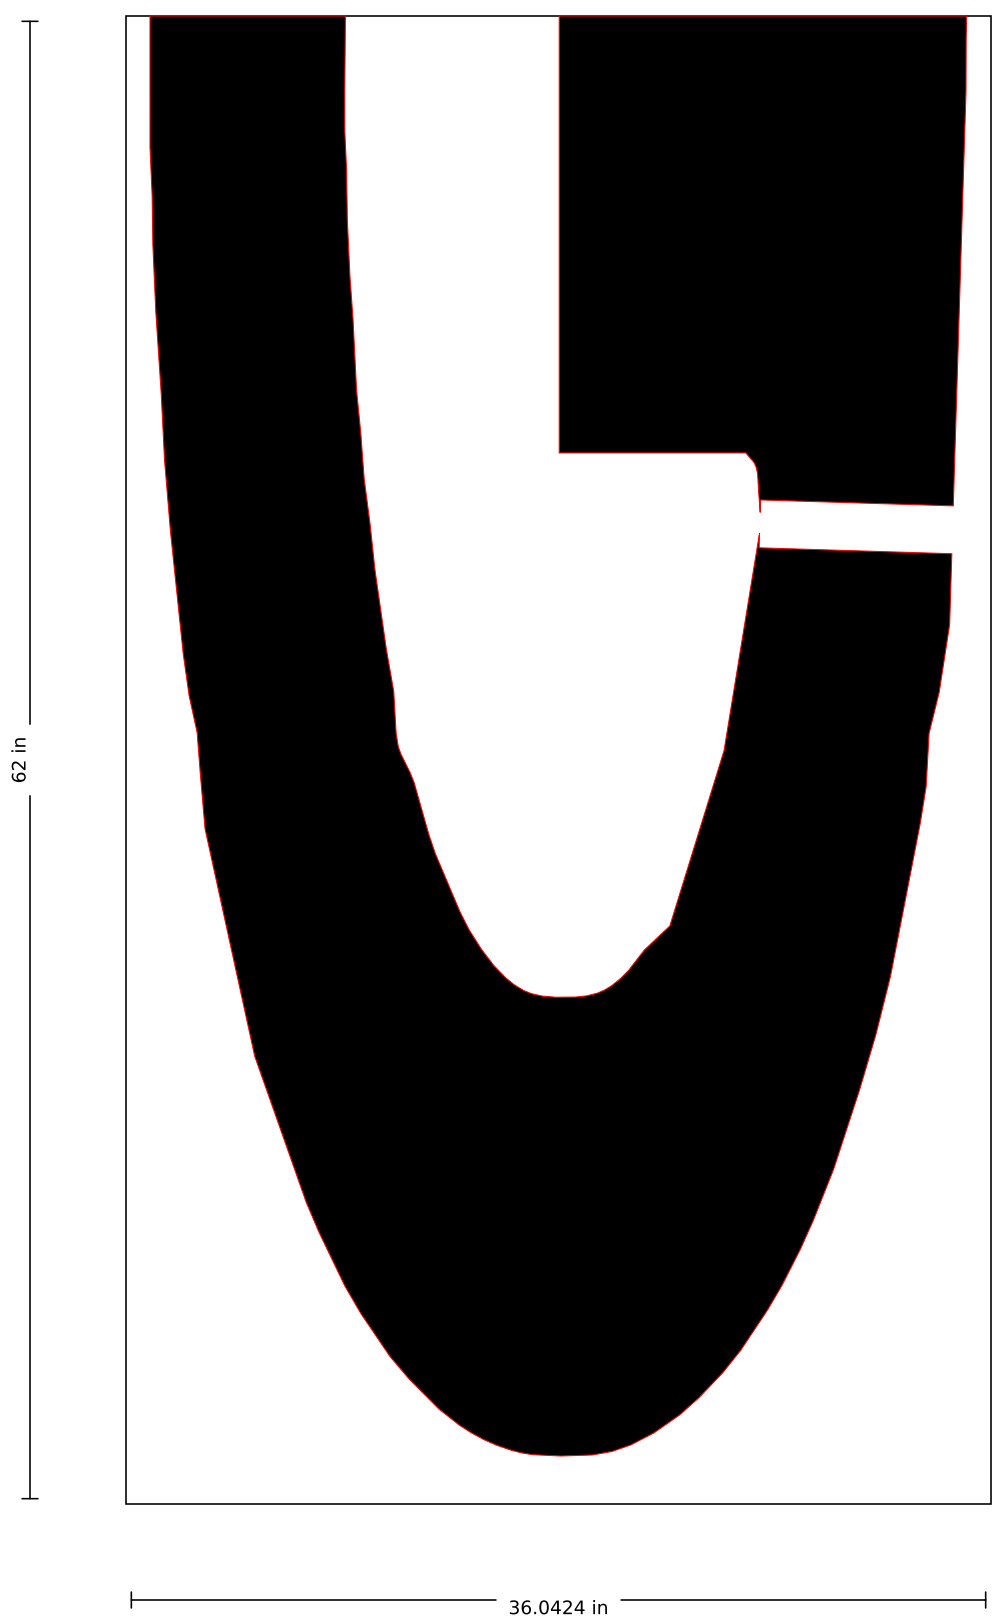

SSS-FAA-120-01-G · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

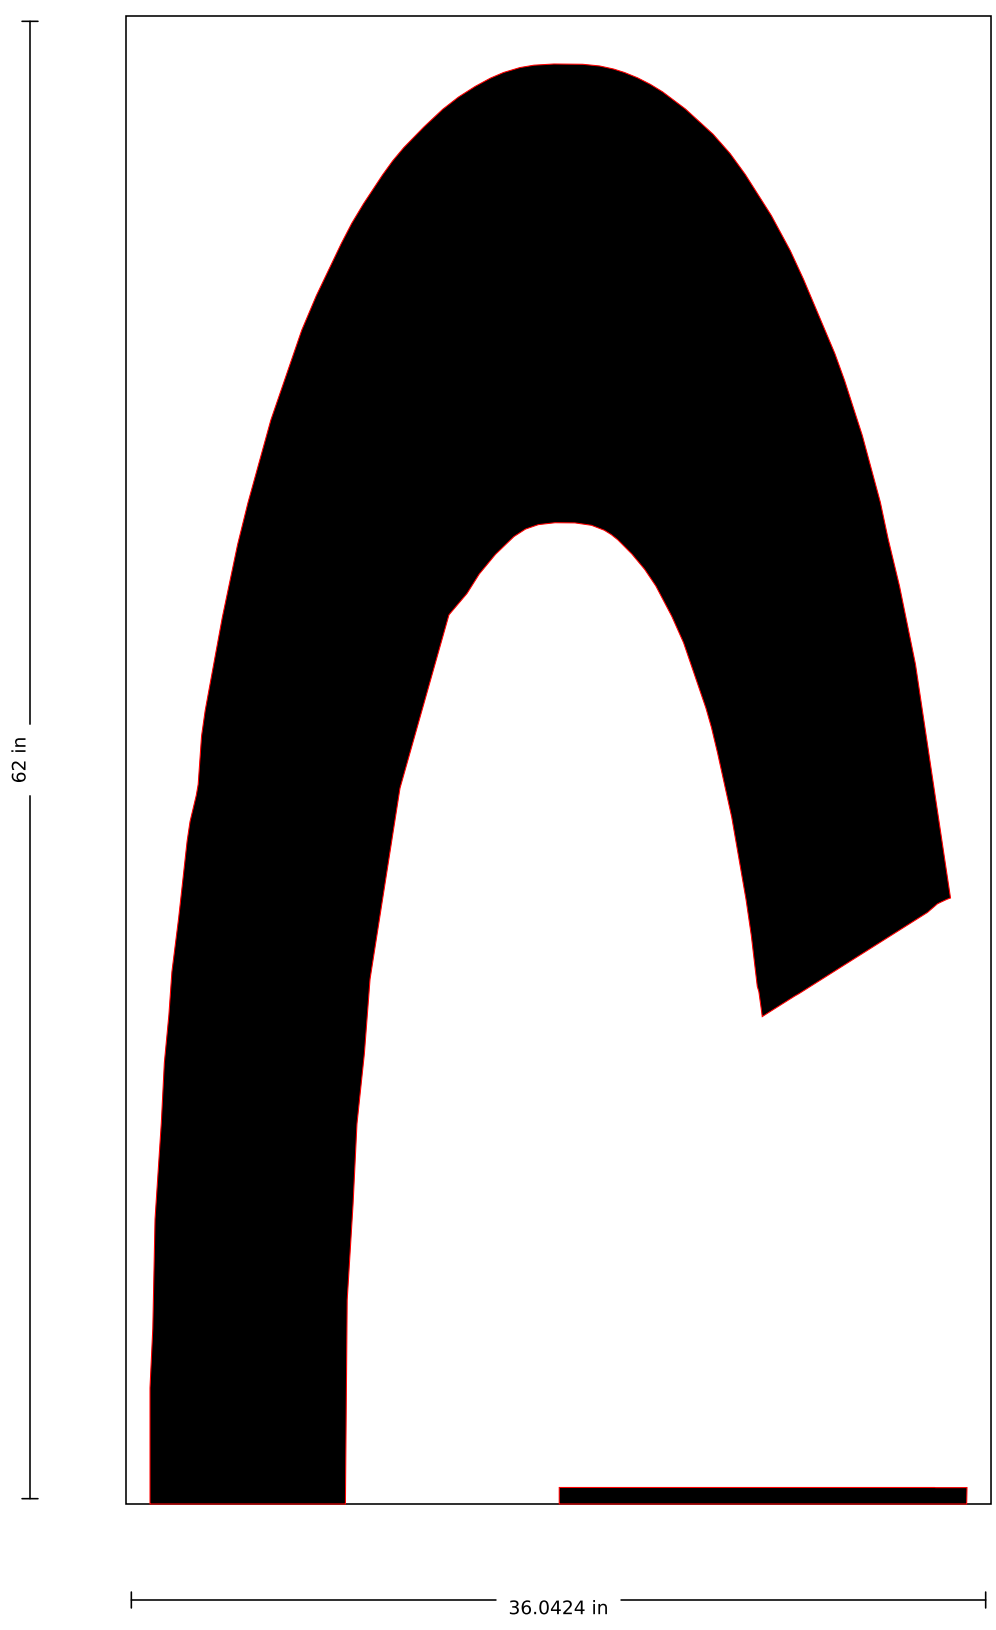

SSS-FAA-120-01-H

120" FAA Airport "H" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

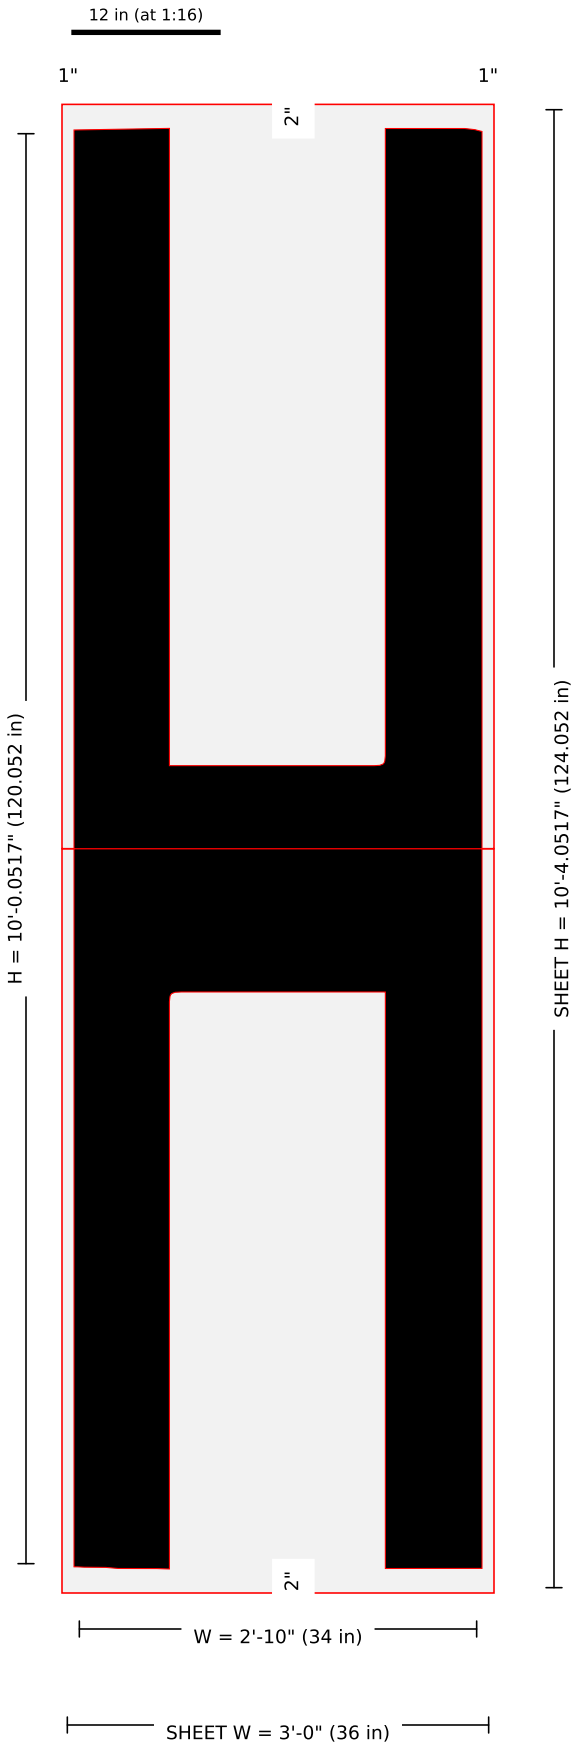

Pieces: 2 (1 x 2); blanks (in): 36 x 62.026, 36 x 62.026 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120H-120in-FAA-Airport-Letter-H-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-H · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

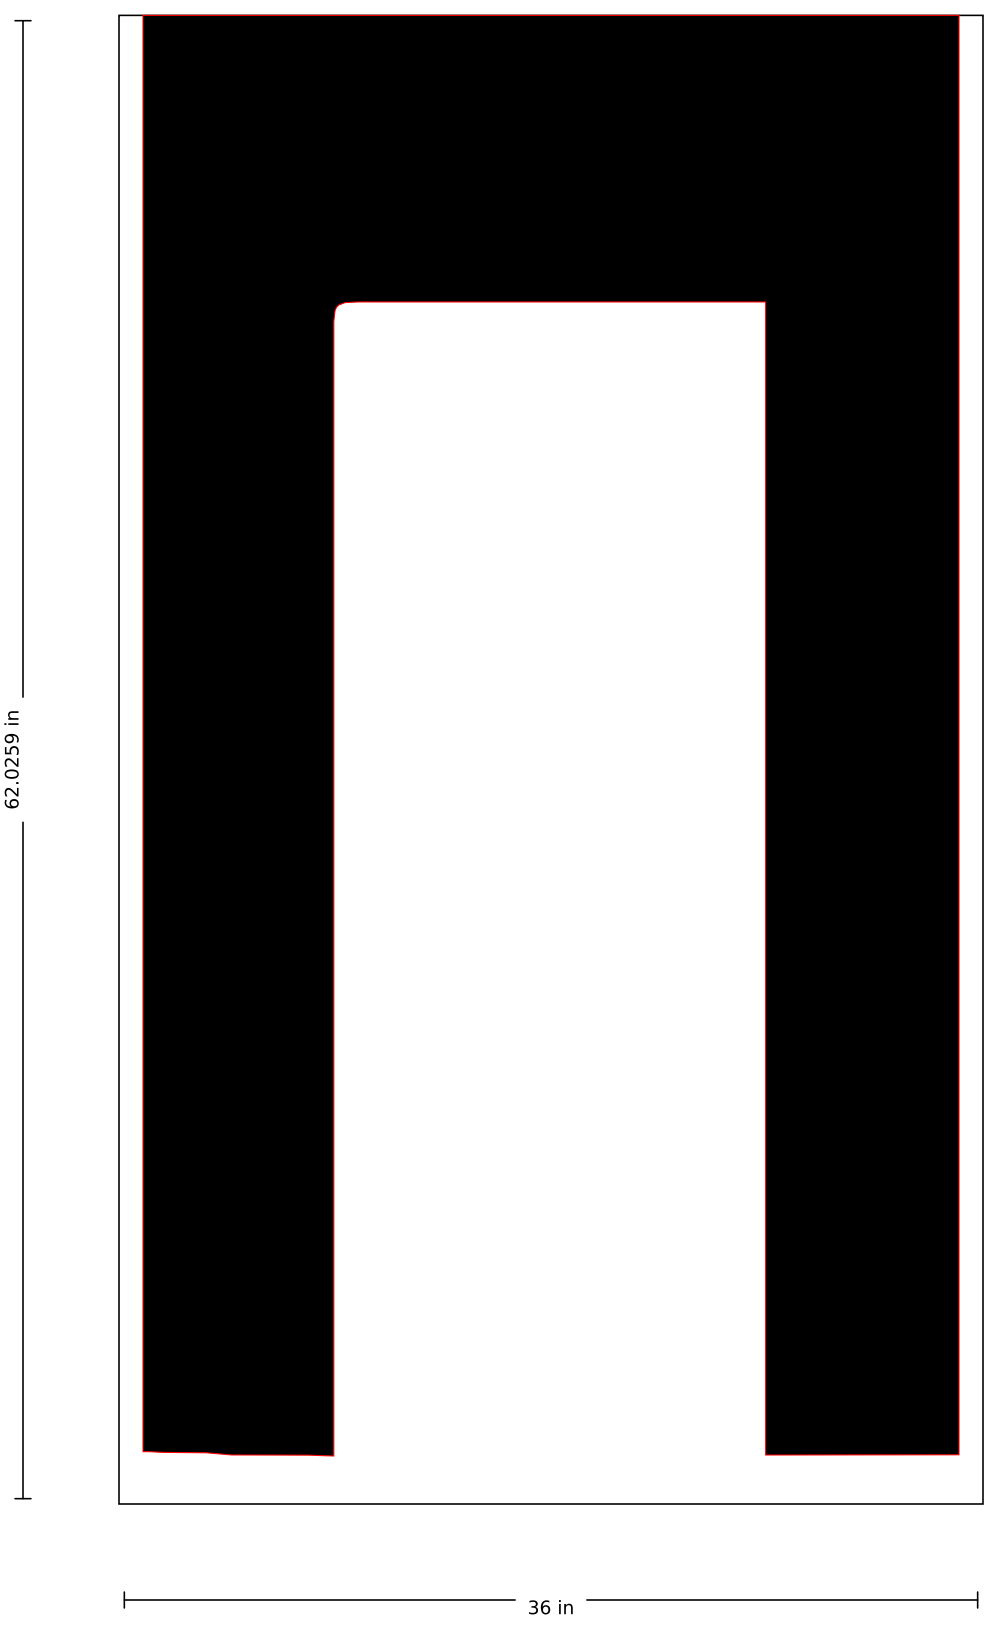

SSS-FAA-120-01-H · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

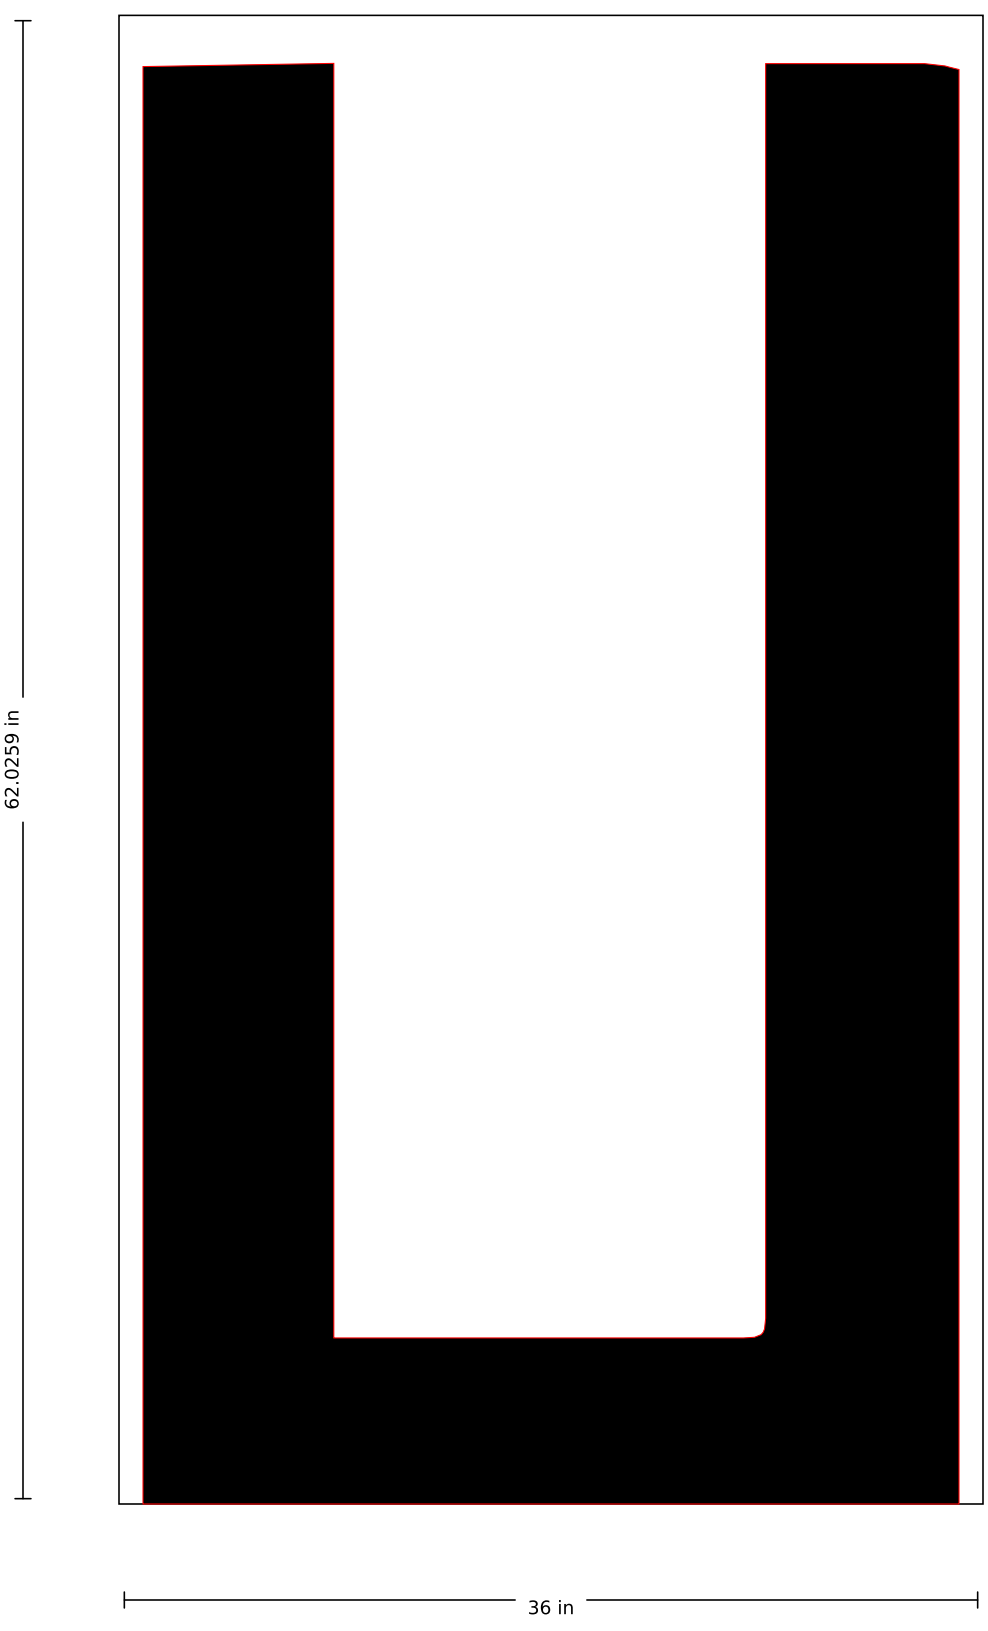

SSS-FAA-120-01-J

120" FAA Airport "J" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 32 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

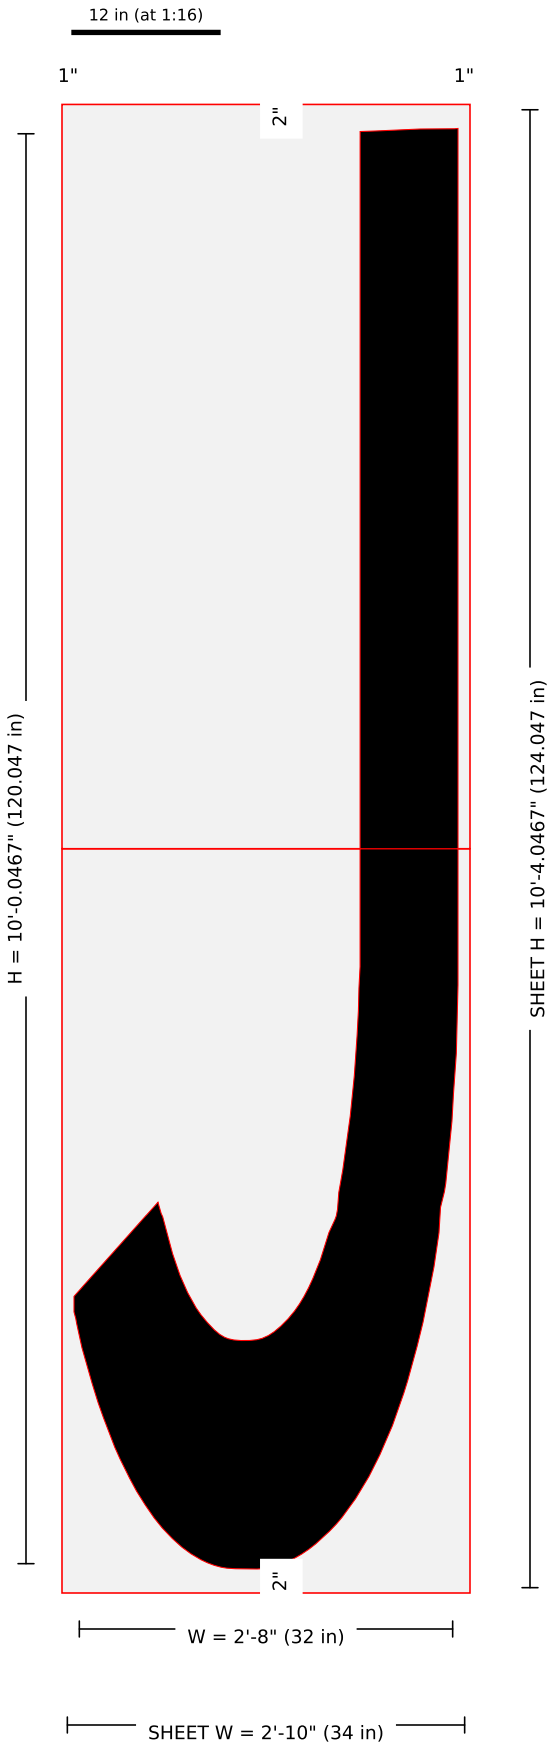

Pieces: 2 (1 x 2); blanks (in): 34 x 62.023, 34 x 62.023 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120J-120in-FAA-Airport-Letter-J-134x48-2.jpg: width = 1-800 image width label 32 in (image-scale 31.35); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-J · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

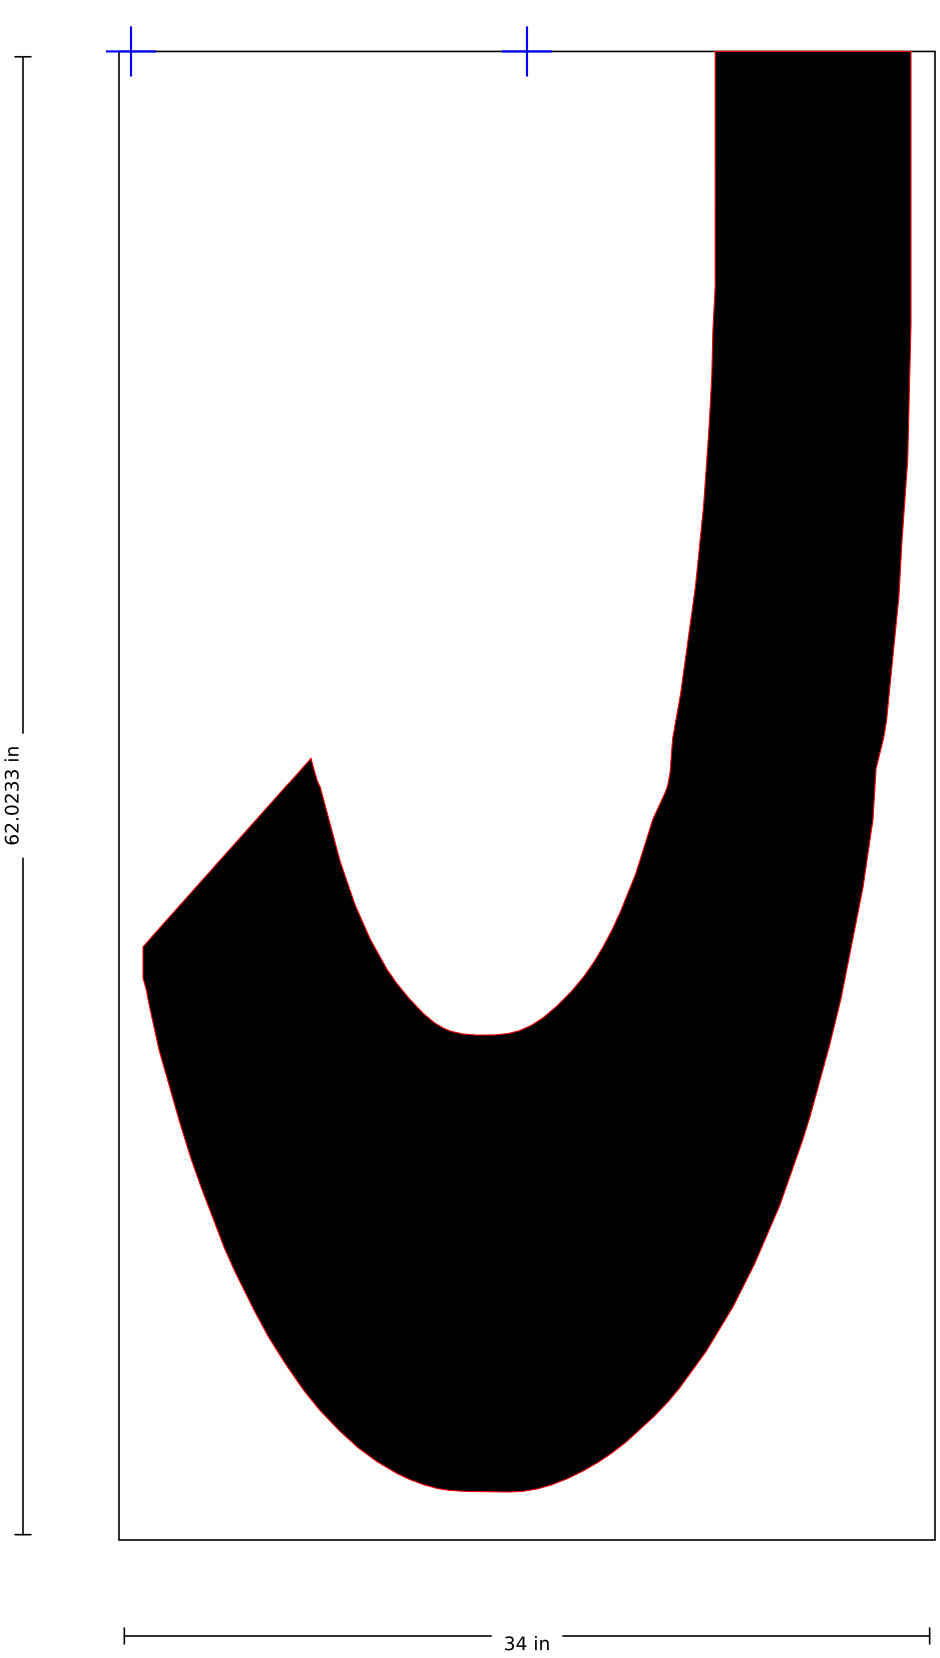

SSS-FAA-120-01-J · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

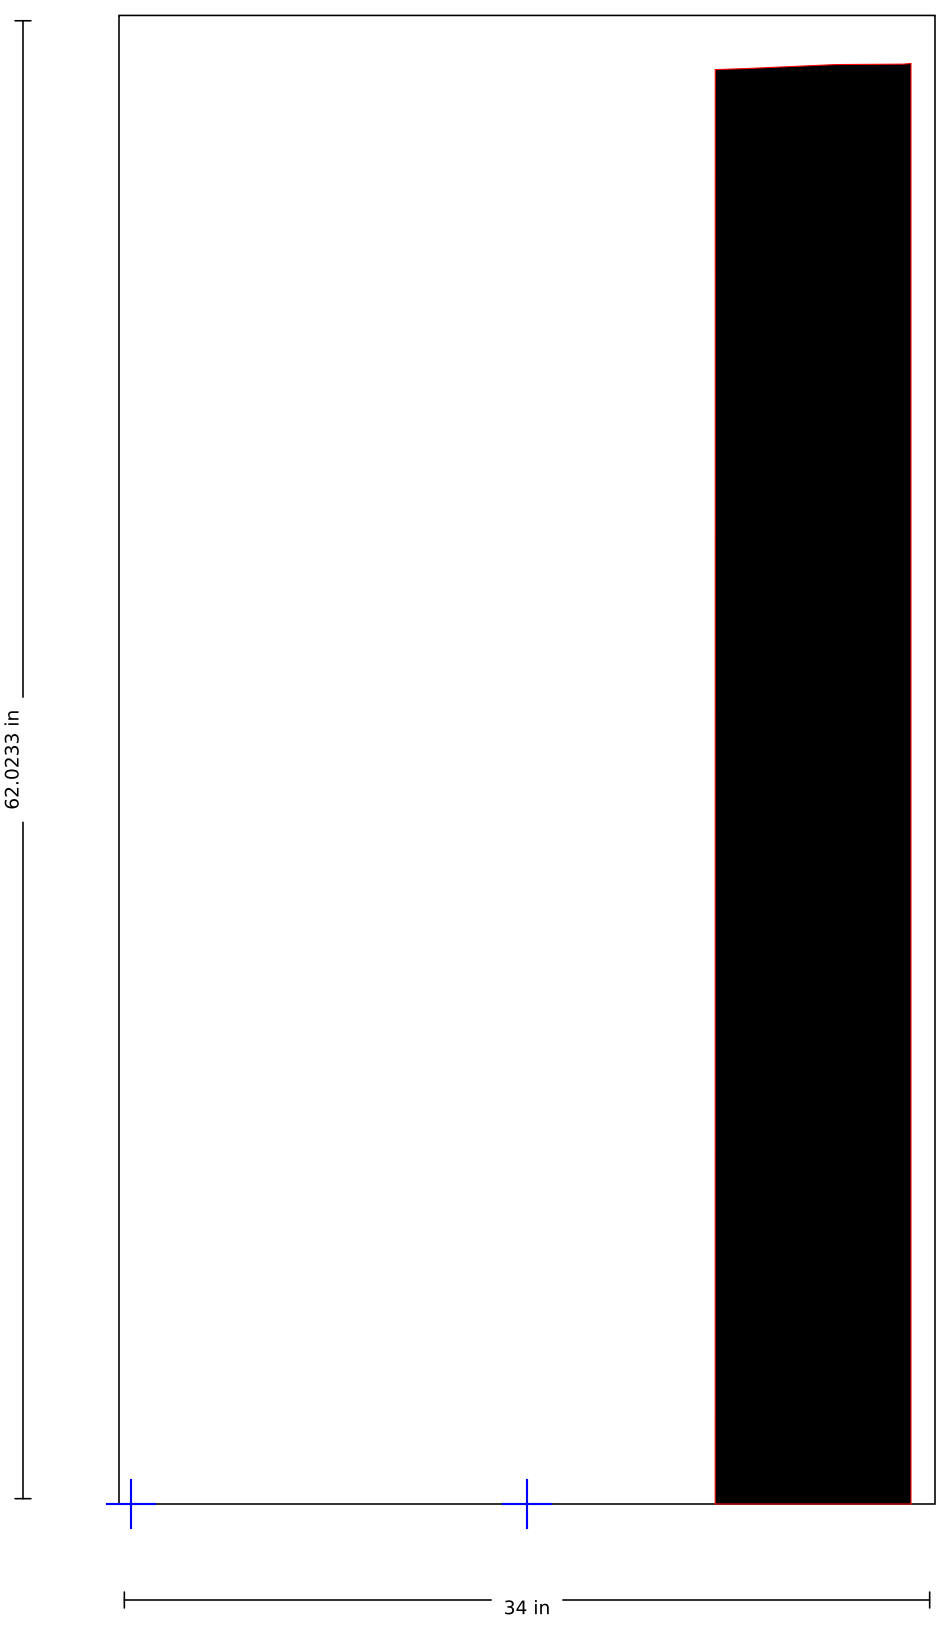

SSS-FAA-120-01-K

120" FAA Airport "K" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 36 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

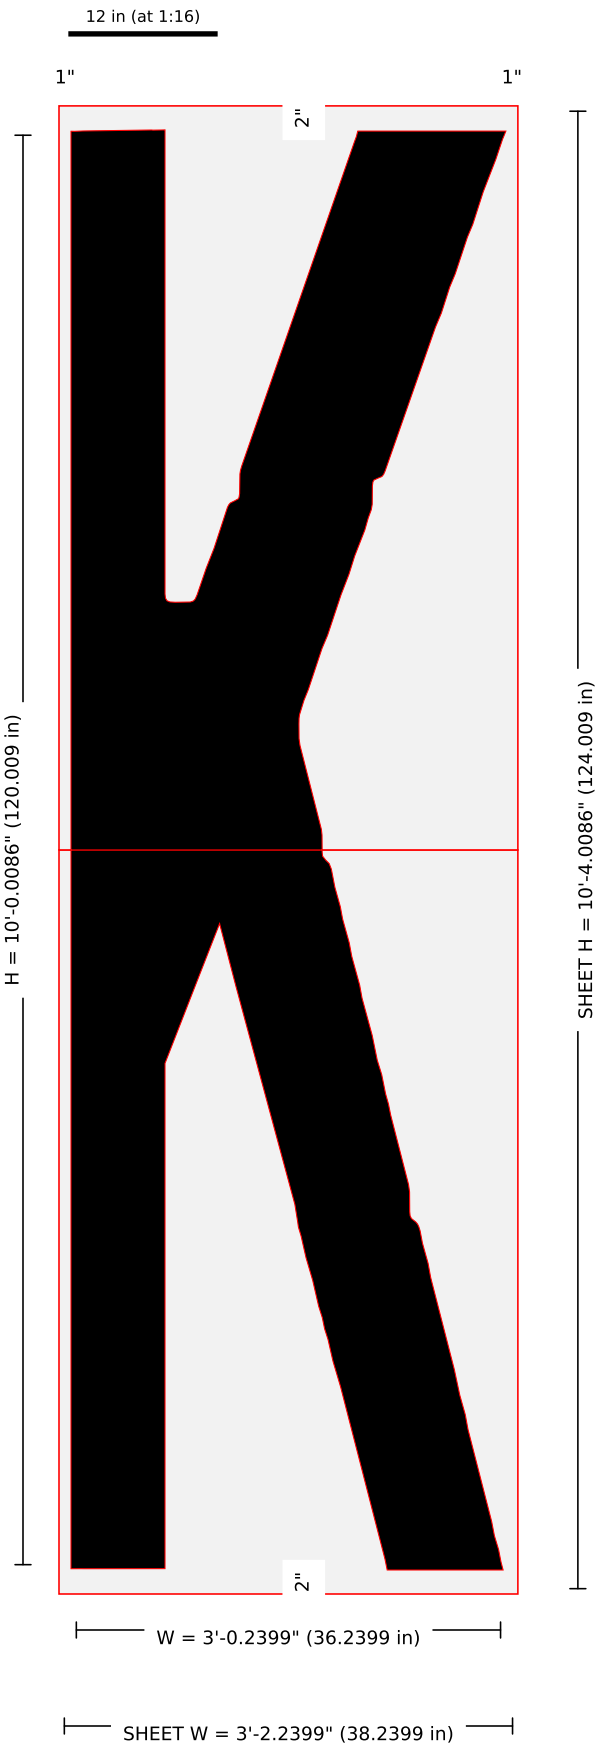

Pieces: 2 (1 x 2); blanks (in): 38.24 x 62.004, 38.24 x 62.004 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120K-120in-FAA-Airport-Letter-K-134x48-2.jpg: width = 1-800 image width label 36 in (image-scale 35.46); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.42 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-K · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

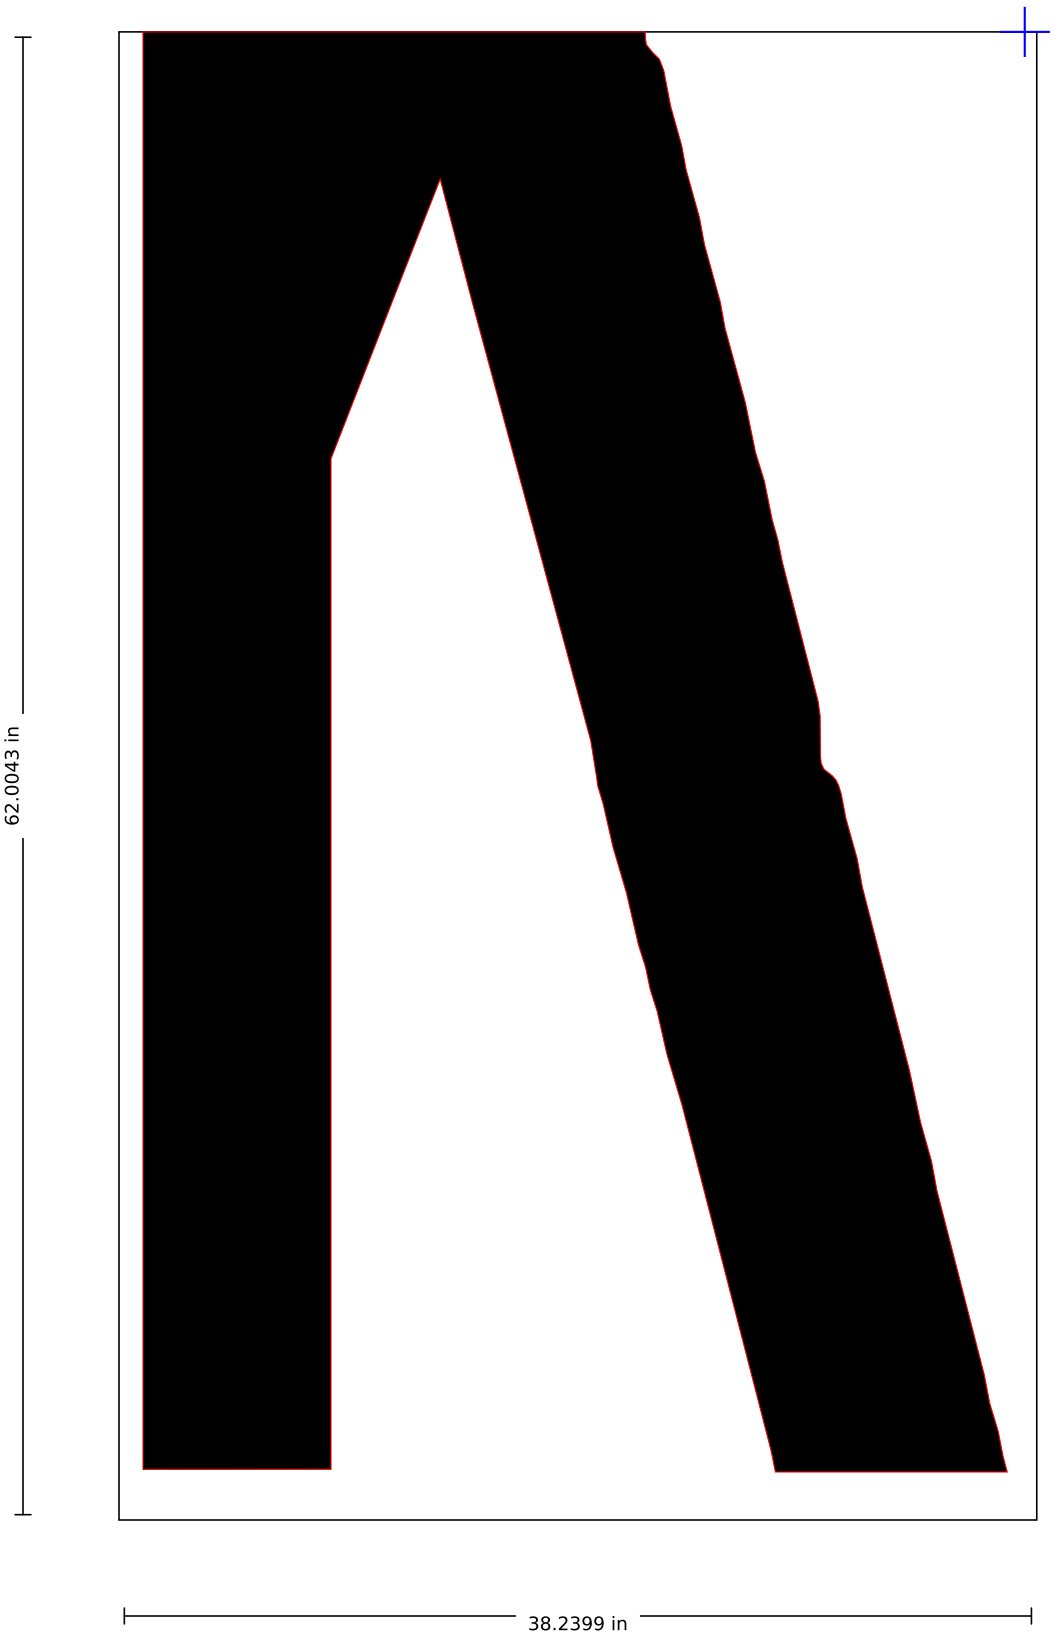

SSS-FAA-120-01-K · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

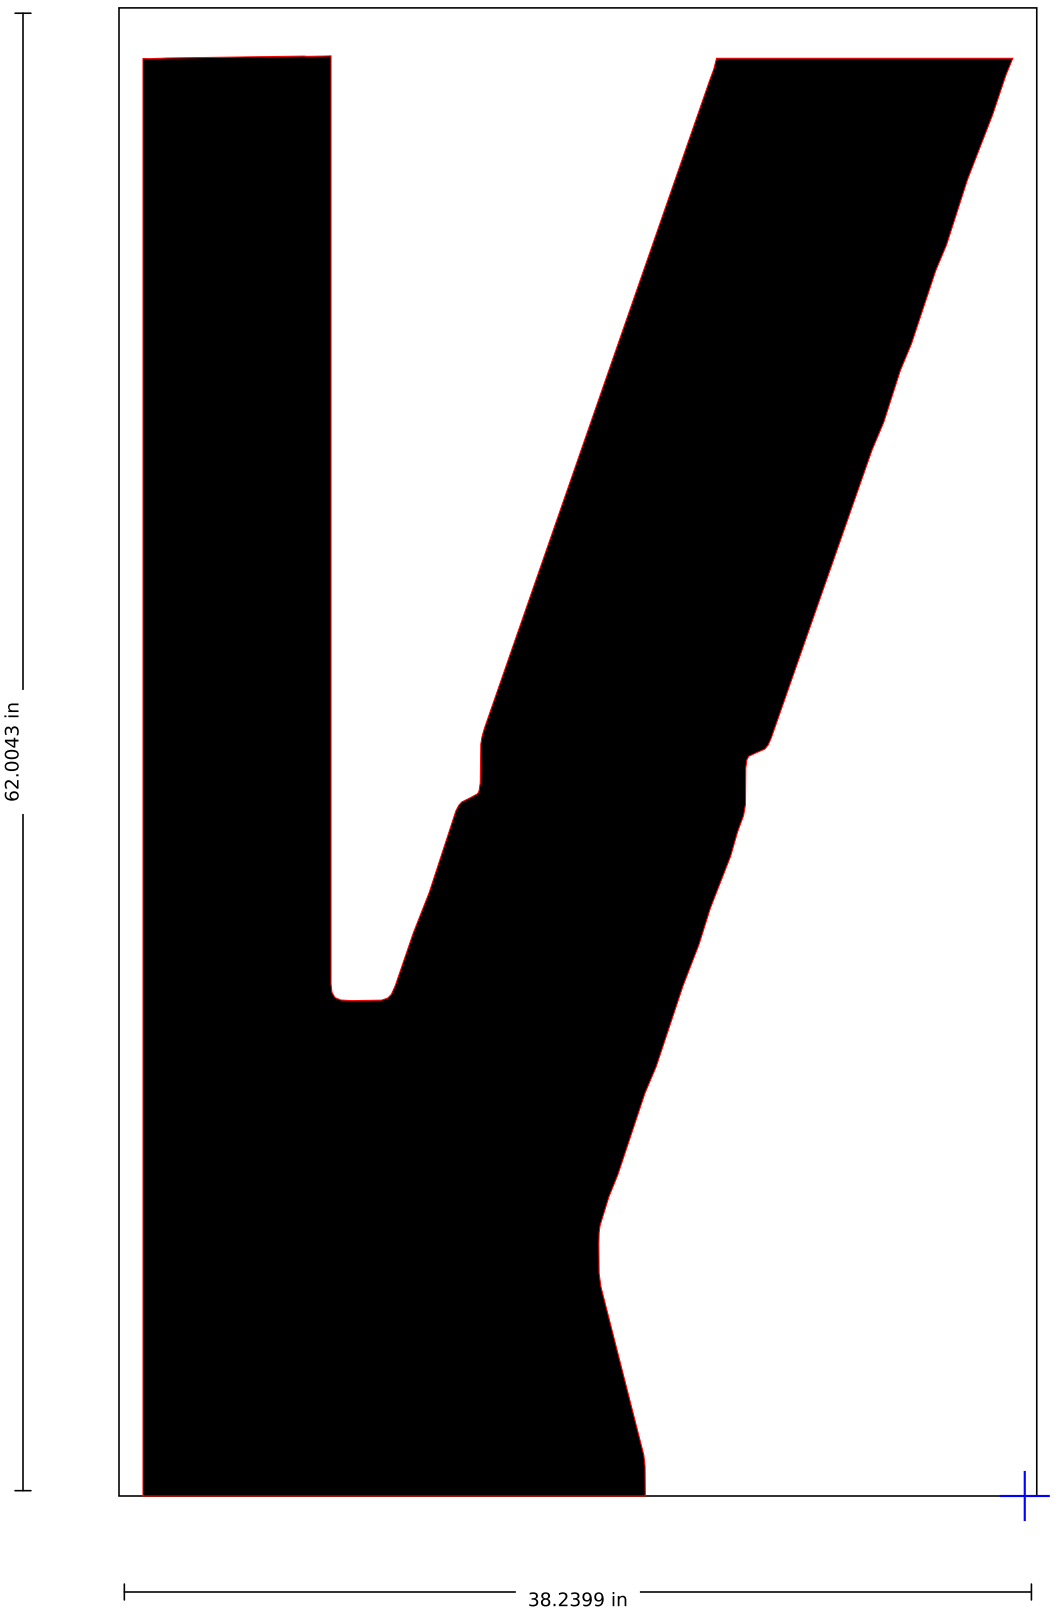

SSS-FAA-120-01-L

120" FAA Airport "L" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

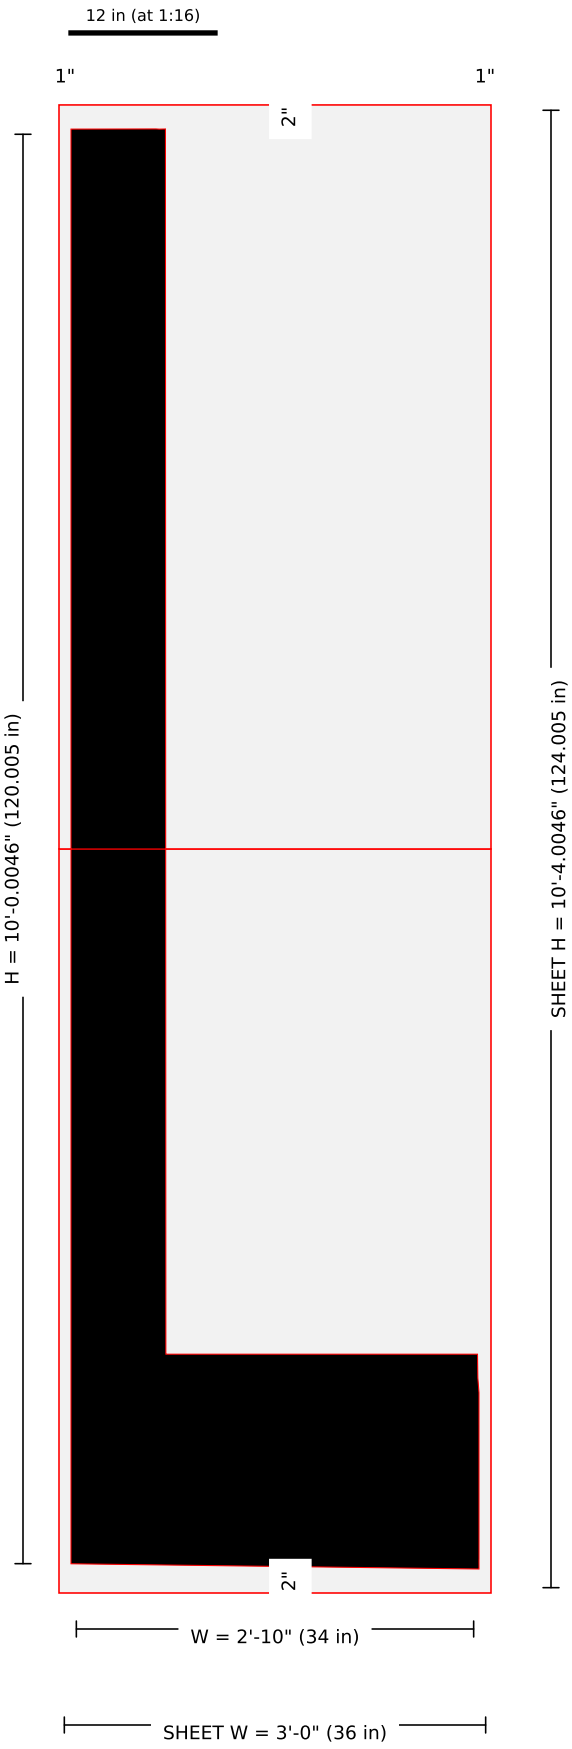

Pieces: 2 (1 x 2); blanks (in): 36 x 62.002, 36 x 62.002 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120L-120in-FAA-Airport-Letter-L-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.30); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.24 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-L · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

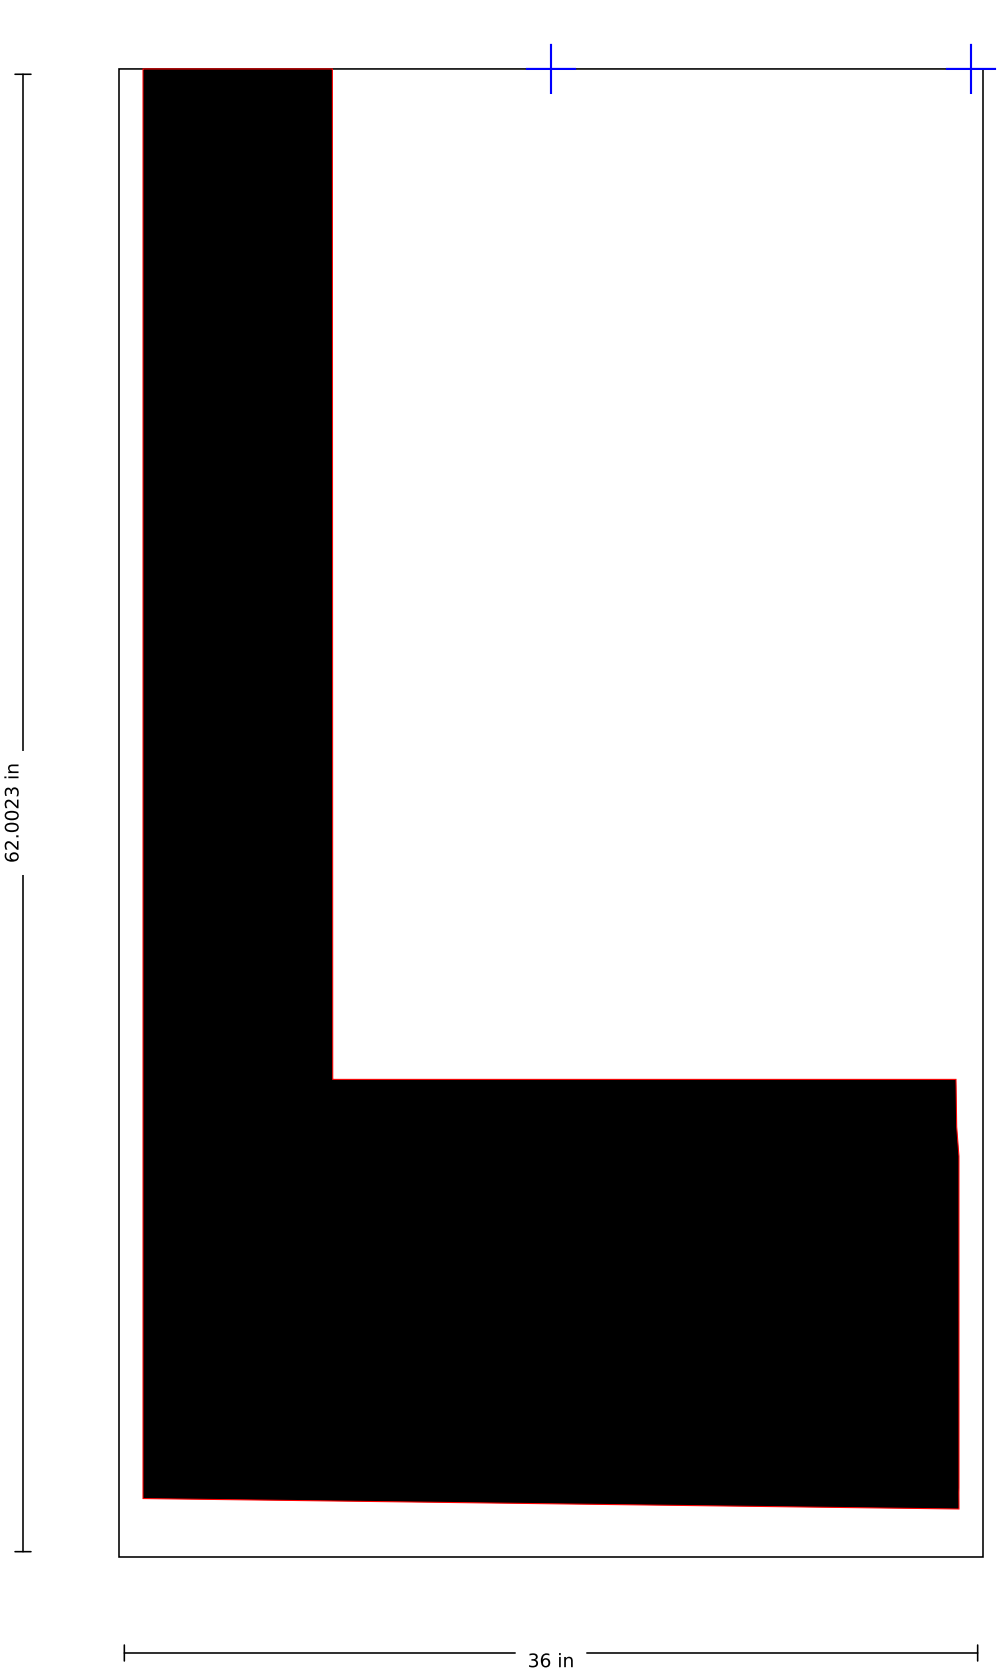

SSS-FAA-120-01-L · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

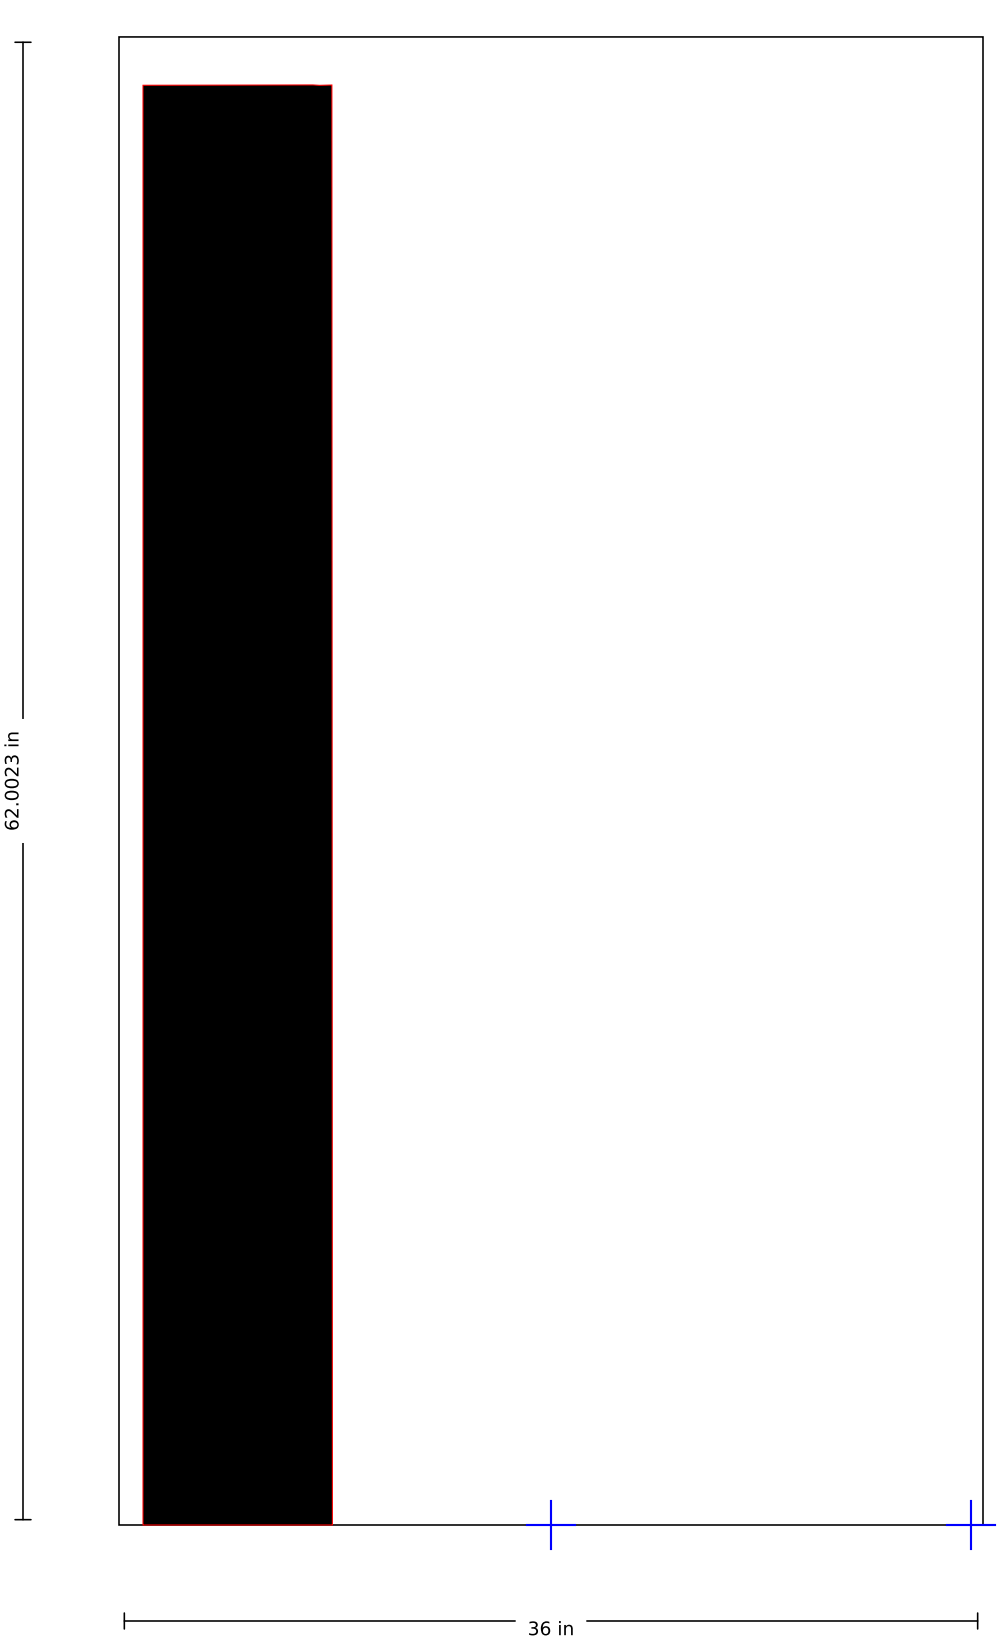

SSS-FAA-120-01-O

120" FAA Airport "O" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

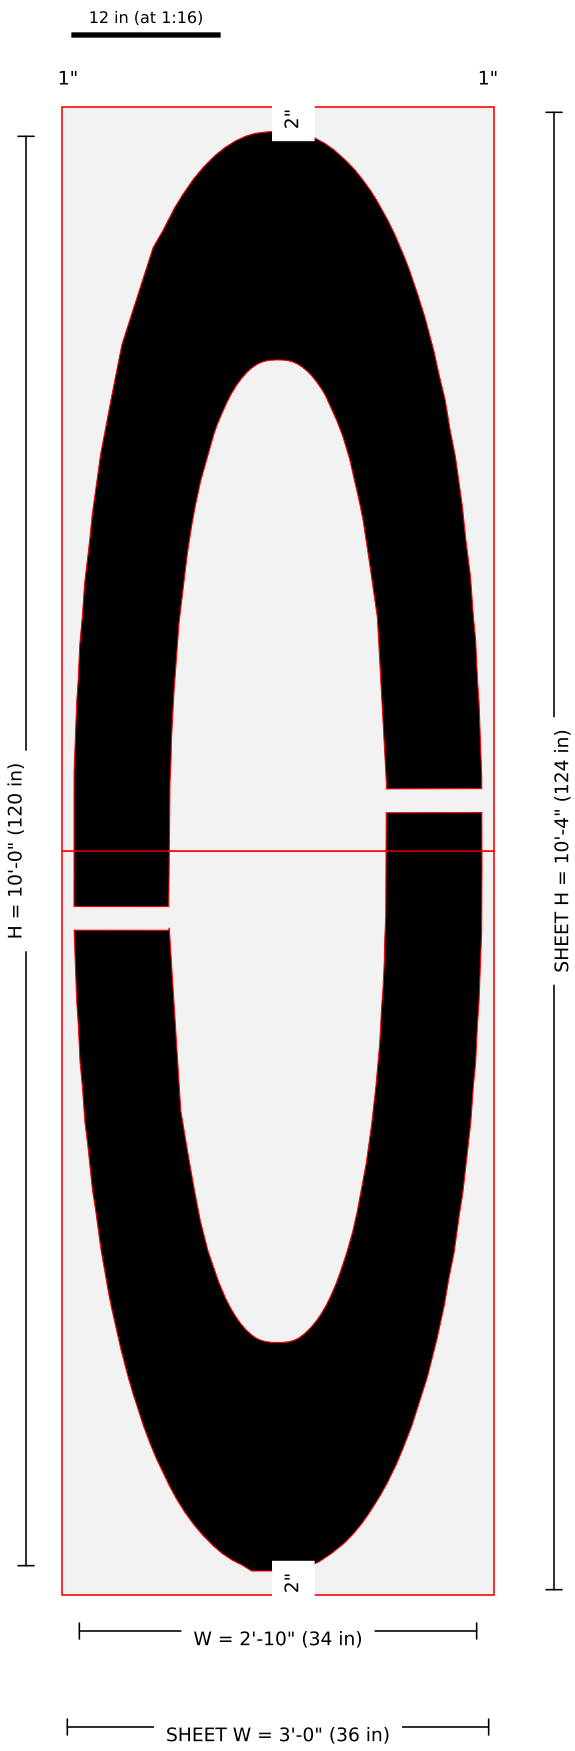

Pieces: 2 (1 x 2); blanks (in): 36 x 62, 36 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120O-120in-FAA-Airport-Letter-O-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.23); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (3.94,54.39) stroke 7.888" w=1.972"; (30.01,64.19) stroke 7.956" w=1.989" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-O · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

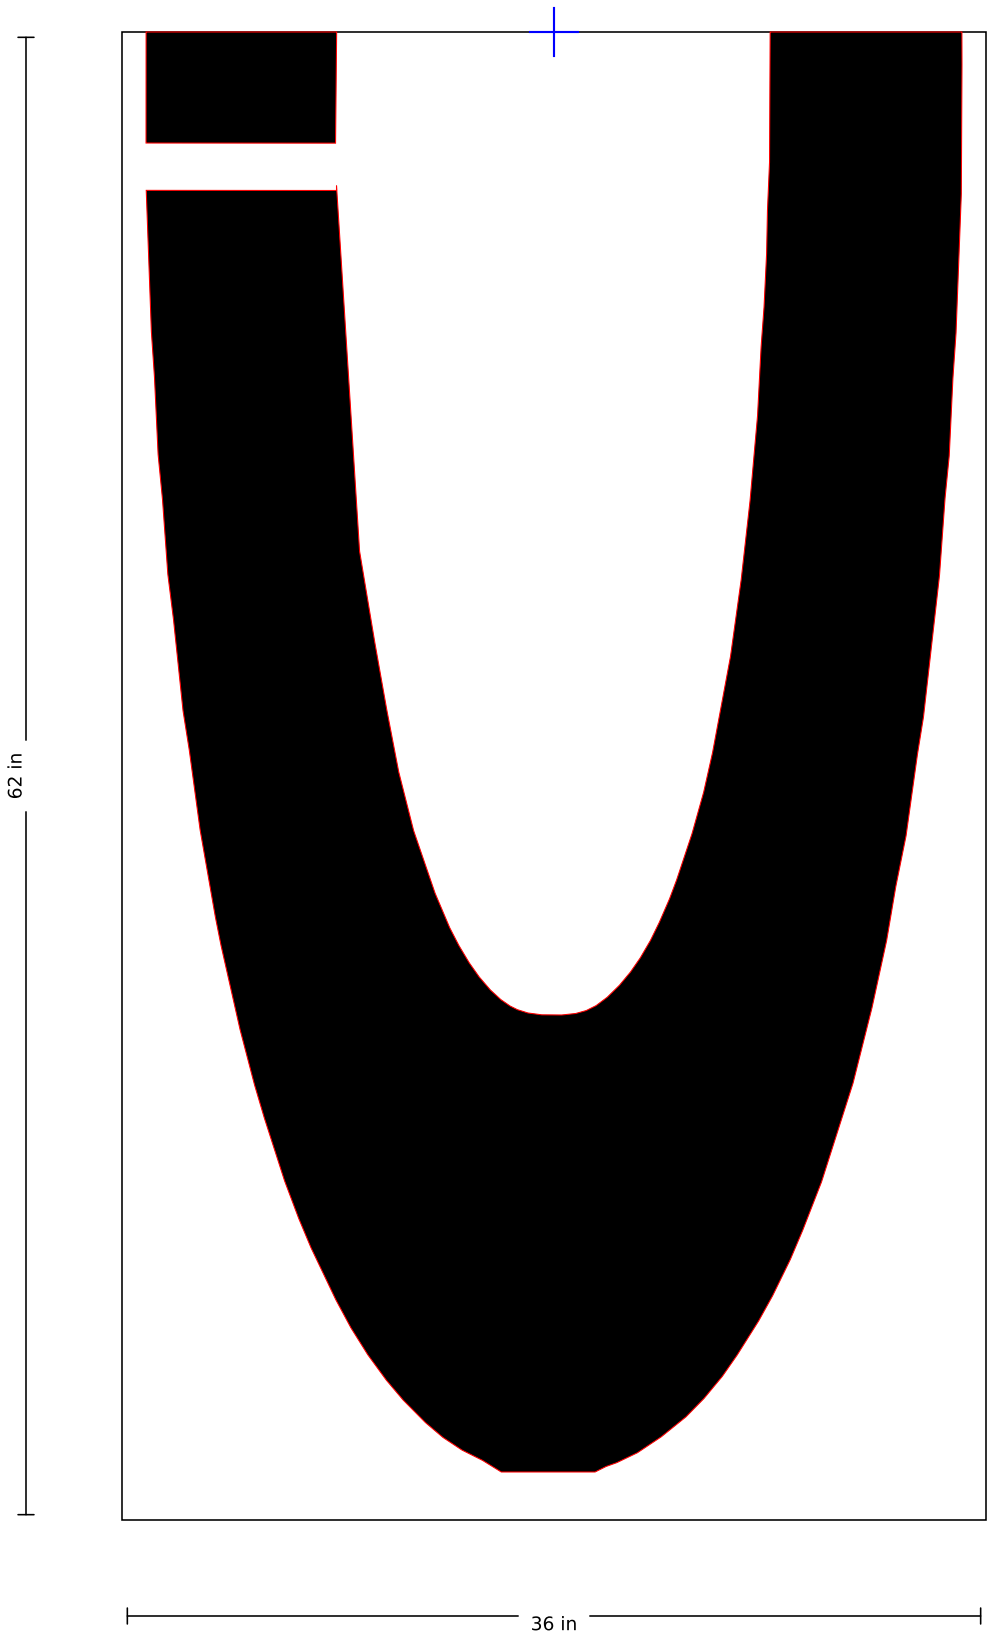

SSS-FAA-120-01-O · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

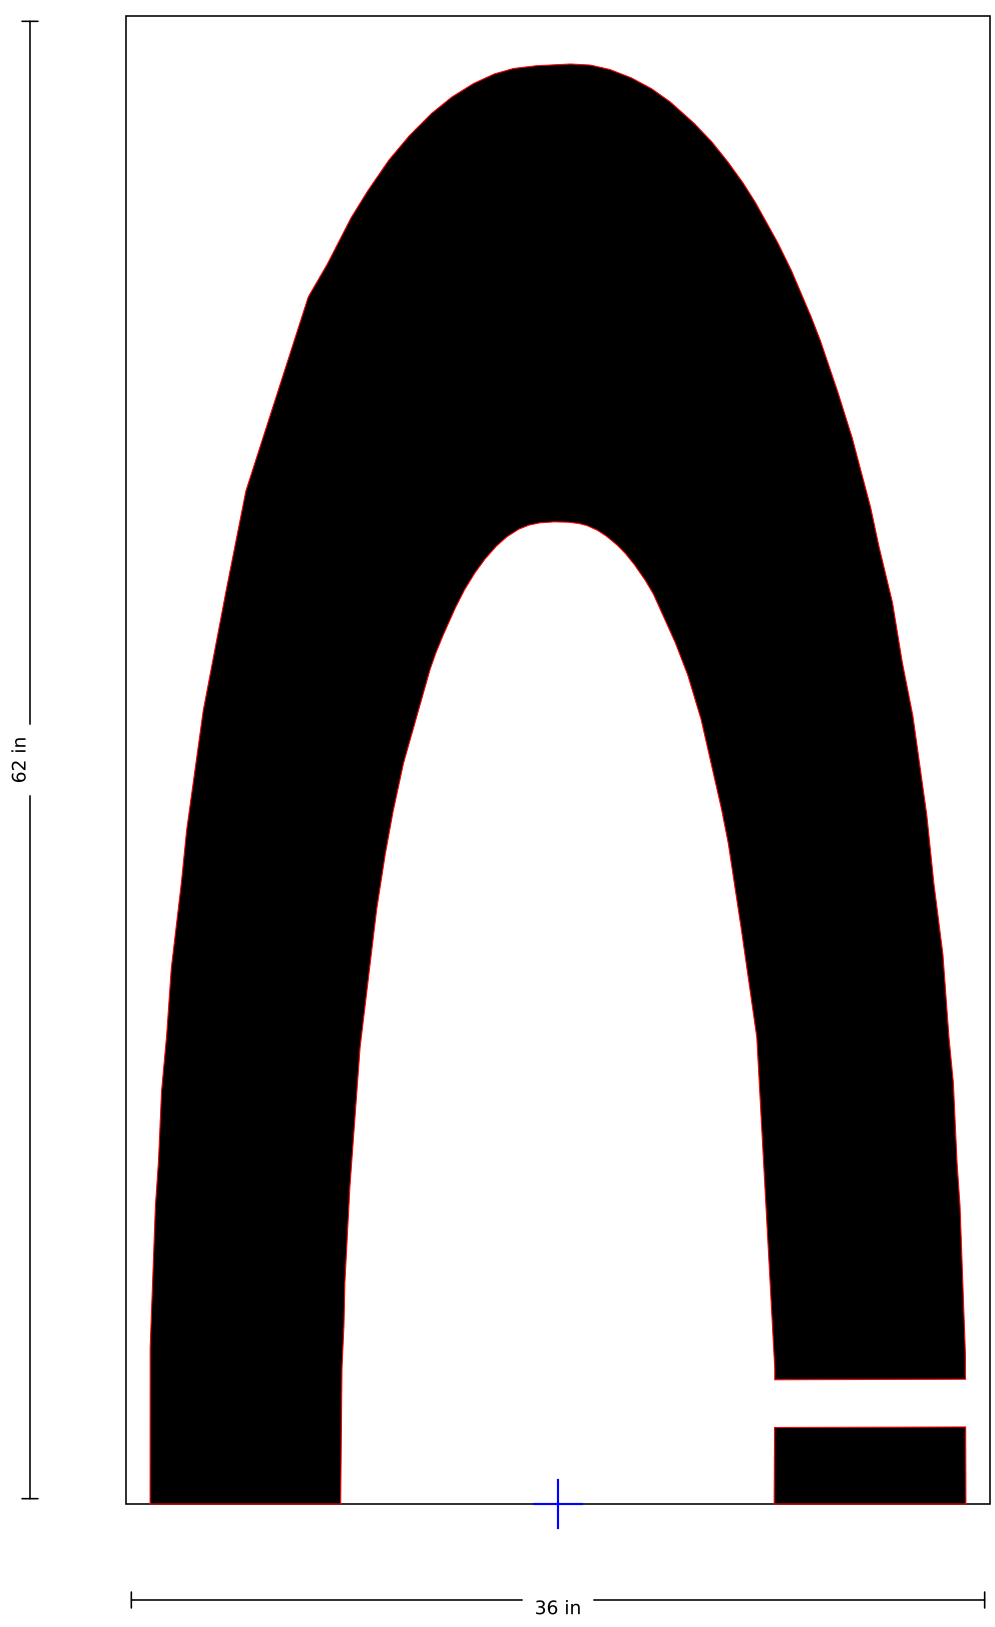

SSS-FAA-120-01-Q

120" FAA Airport "Q" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 36 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

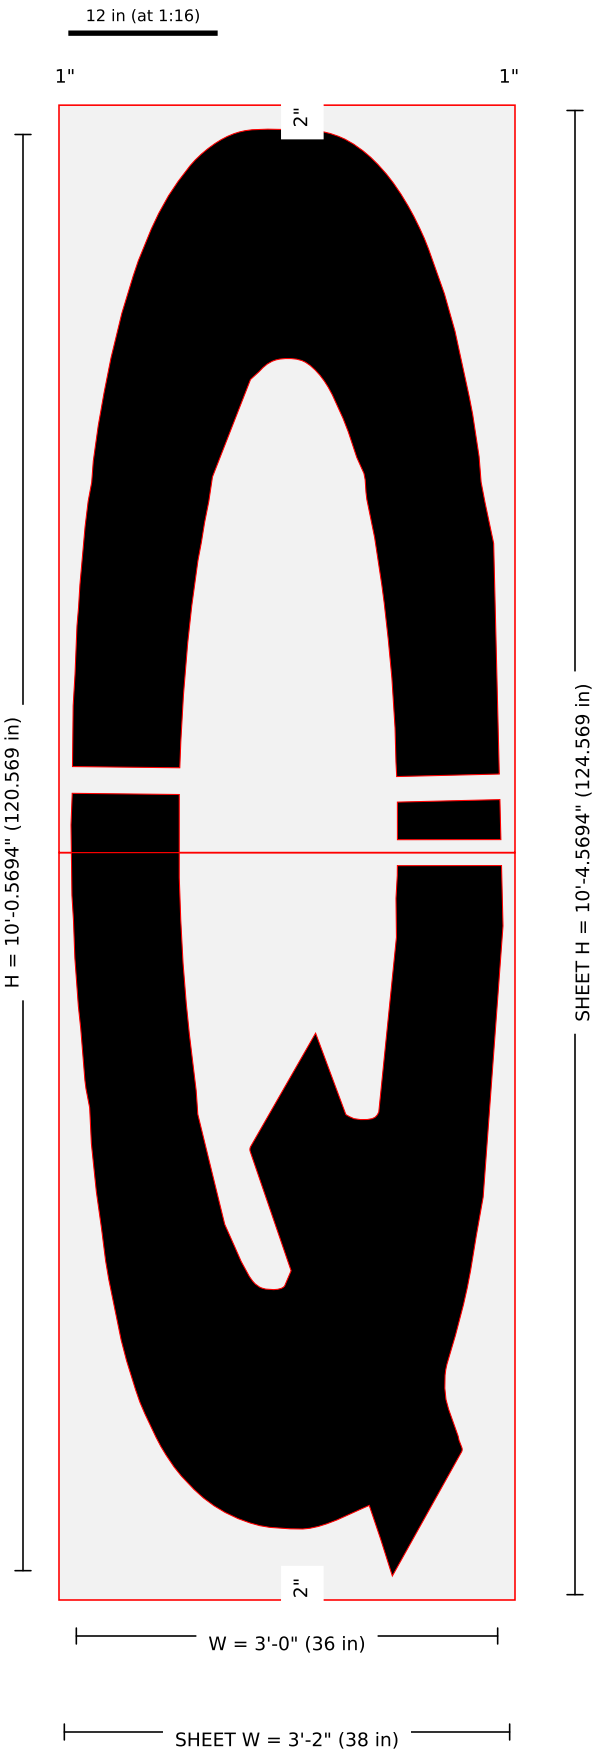

Pieces: 2 (1 x 2); blanks (in): 38 x 62.285, 38 x 62.285 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120Q-120in-FAA-Airport-Letter-Q-134x48-2.jpg: width = 1-800 image width label 36 in (image-scale 35.84); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 6 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
ISLAND BRIDGES (2026-11-04): (31.46,65.09) stroke 8.522" w=2.13"; (4.57,65.72) stroke 8.912" w=2.228" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-Q · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

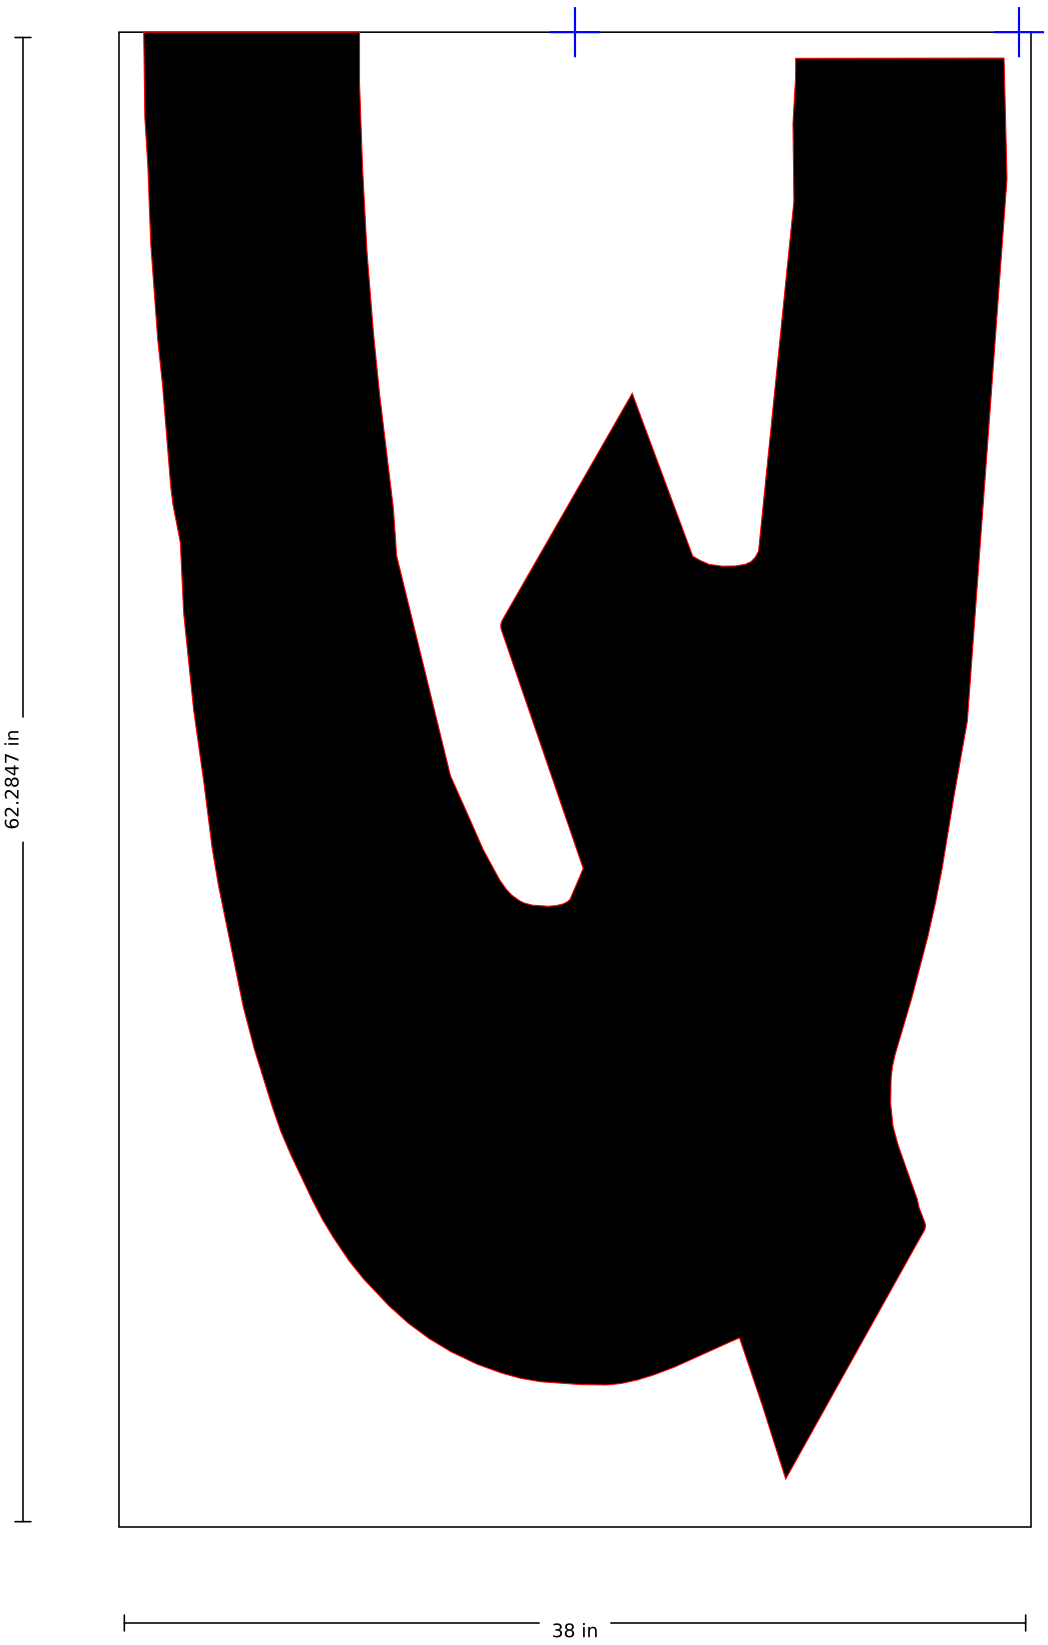

SSS-FAA-120-01-Q · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

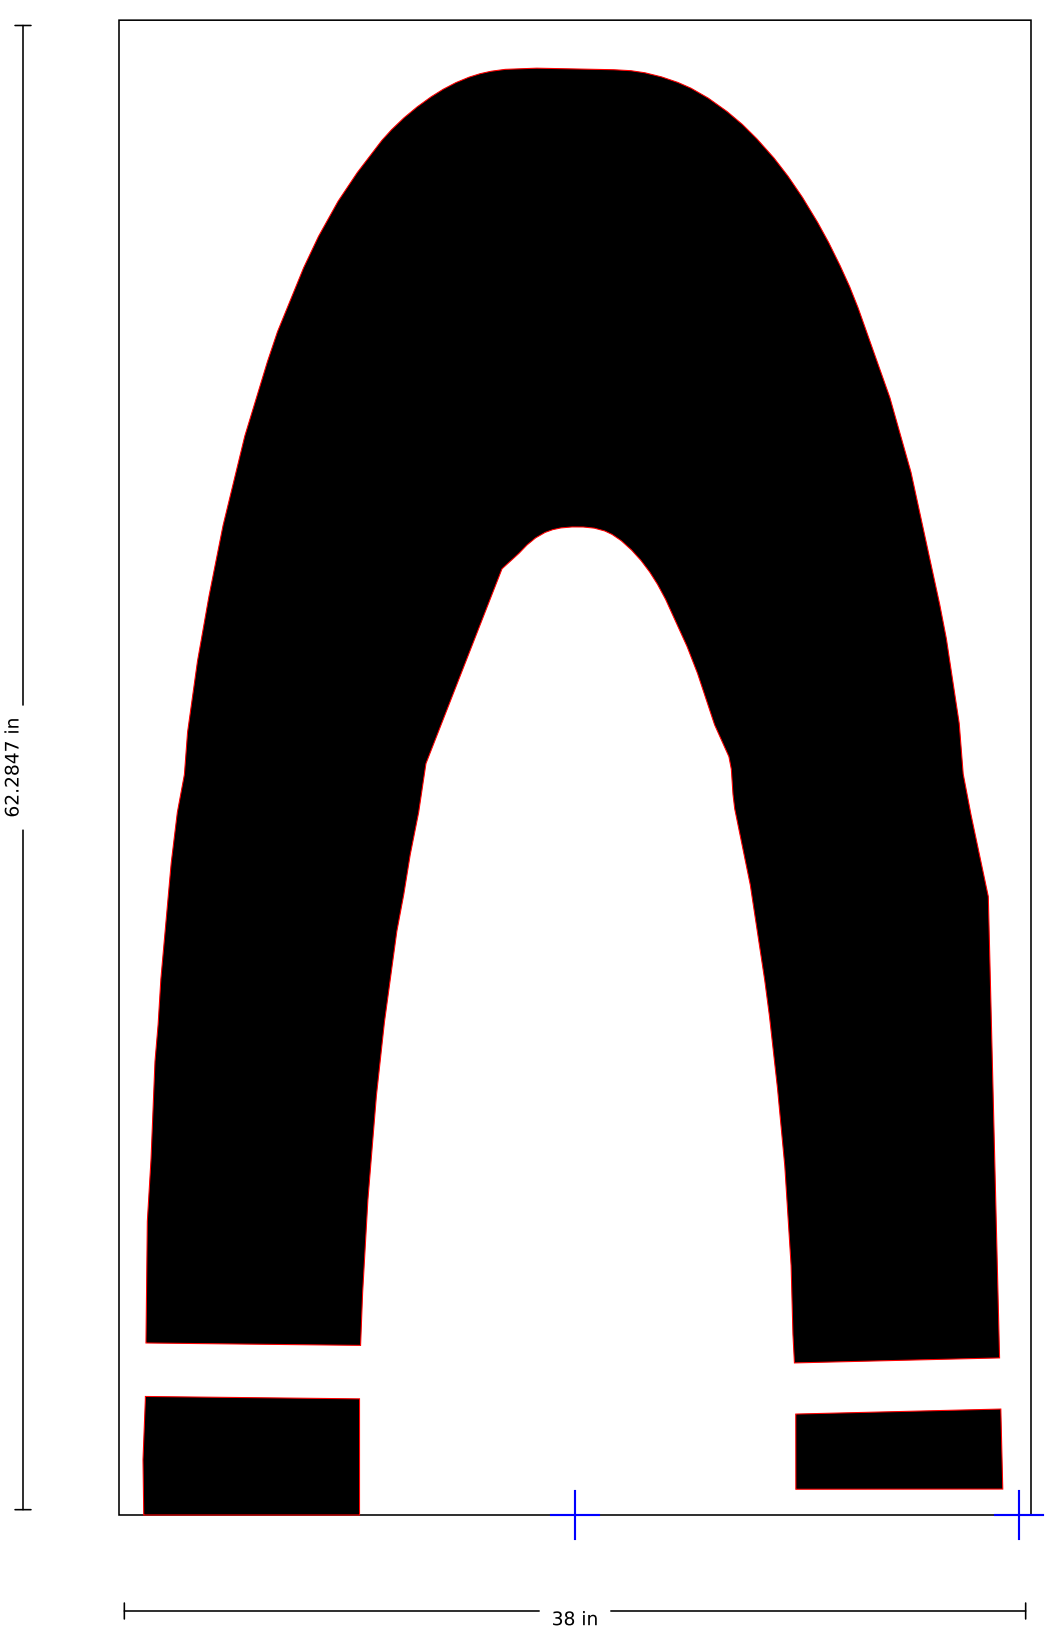

SSS-FAA-120-01-R

120" FAA Airport "R" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

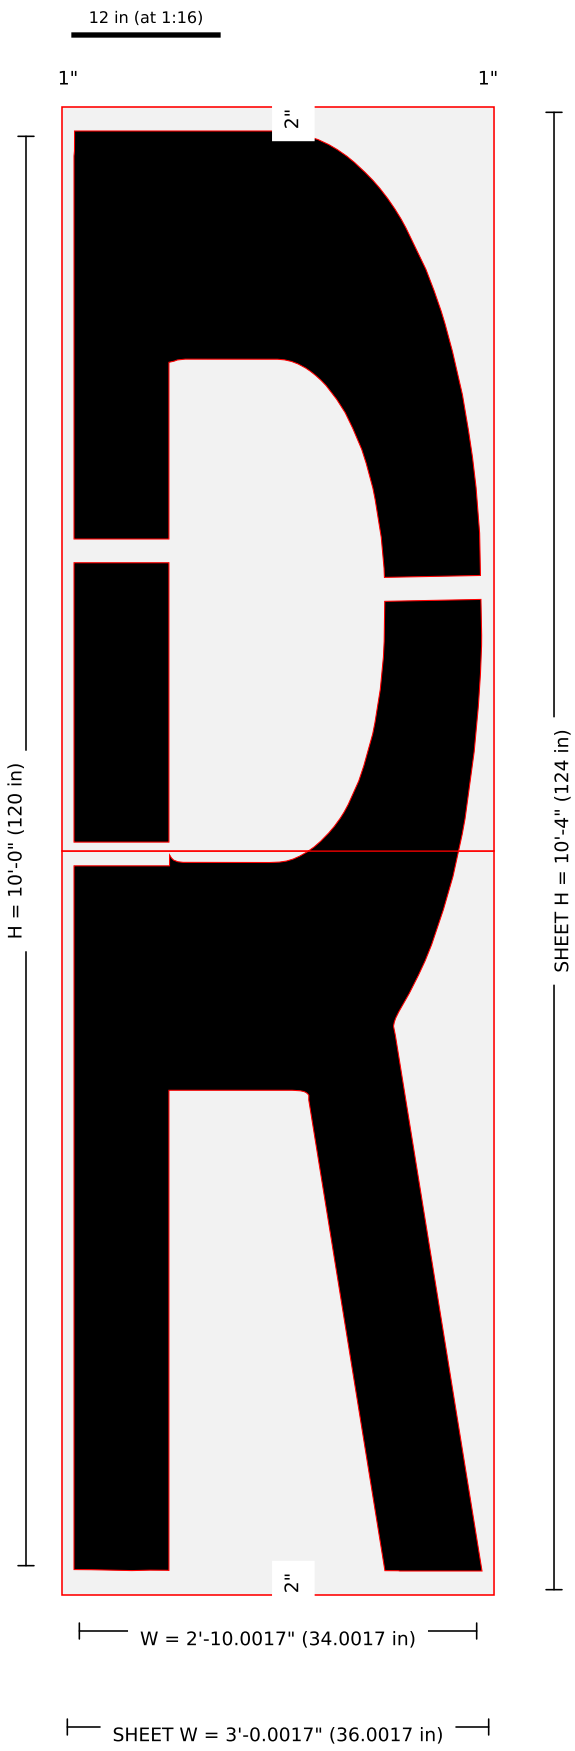

Pieces: 2 (1 x 2); blanks (in): 36.002 x 62, 36.002 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120R-120in-FAA-Airport-Letter-R-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.24); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (3.96,85.01) stroke 7.911" w=1.978"; (29.9,81.88) stroke 7.984" w=1.996" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-R · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

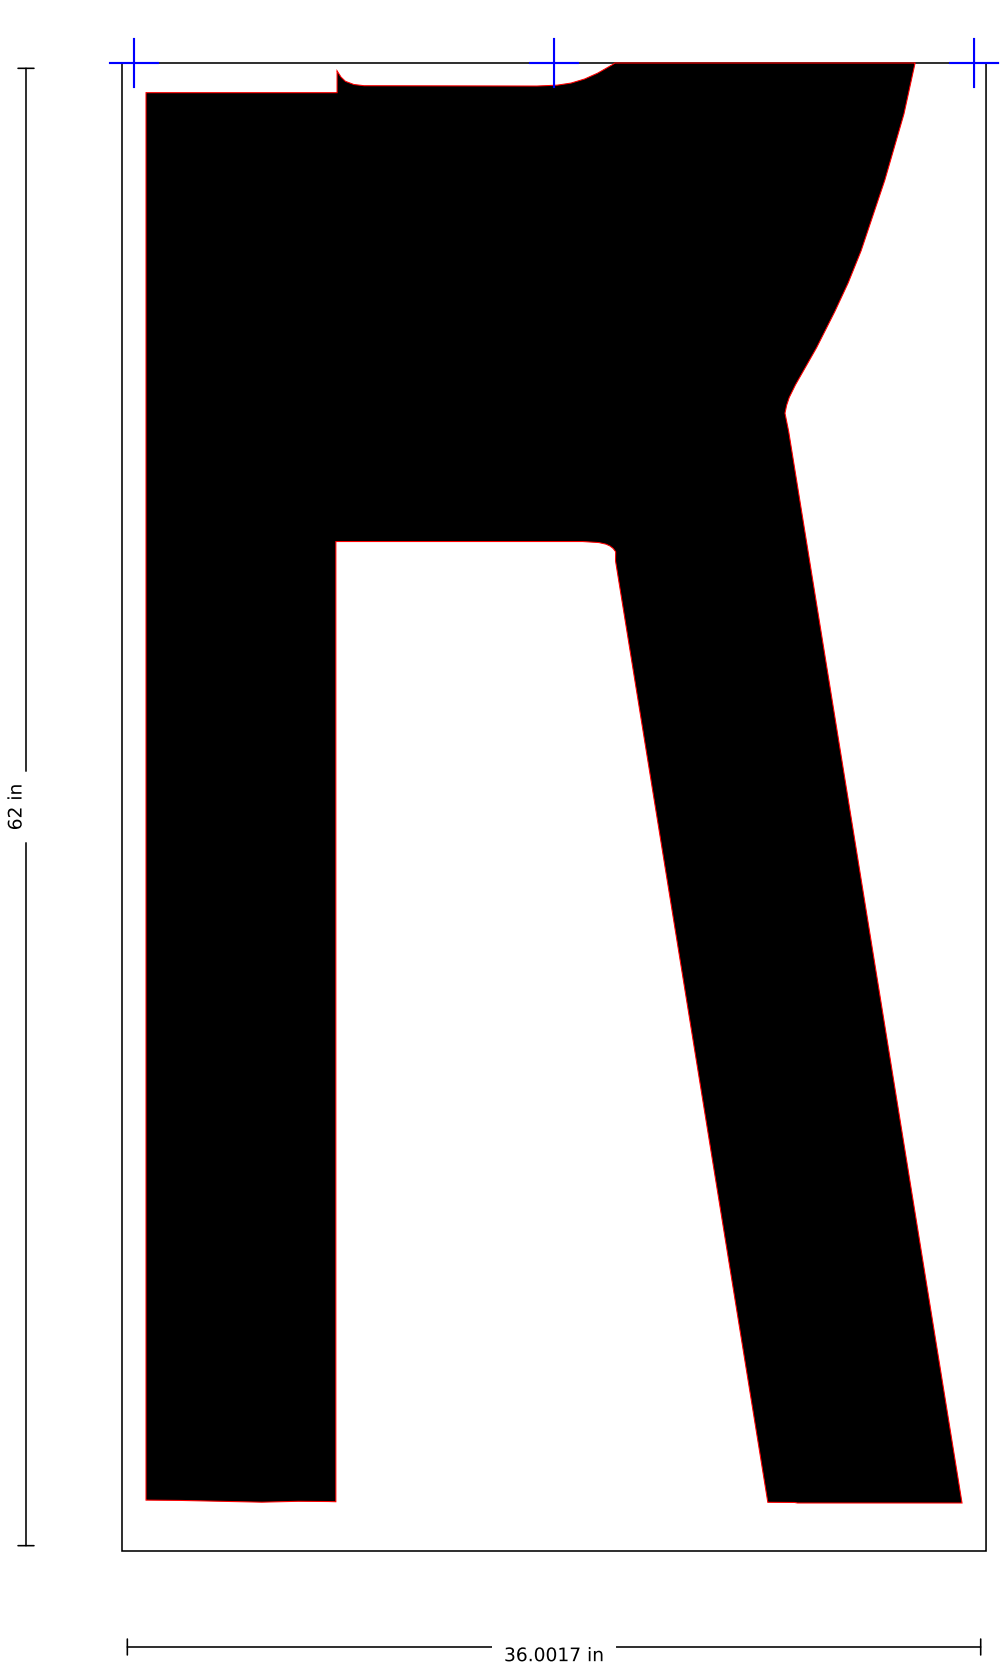

SSS-FAA-120-01-R · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

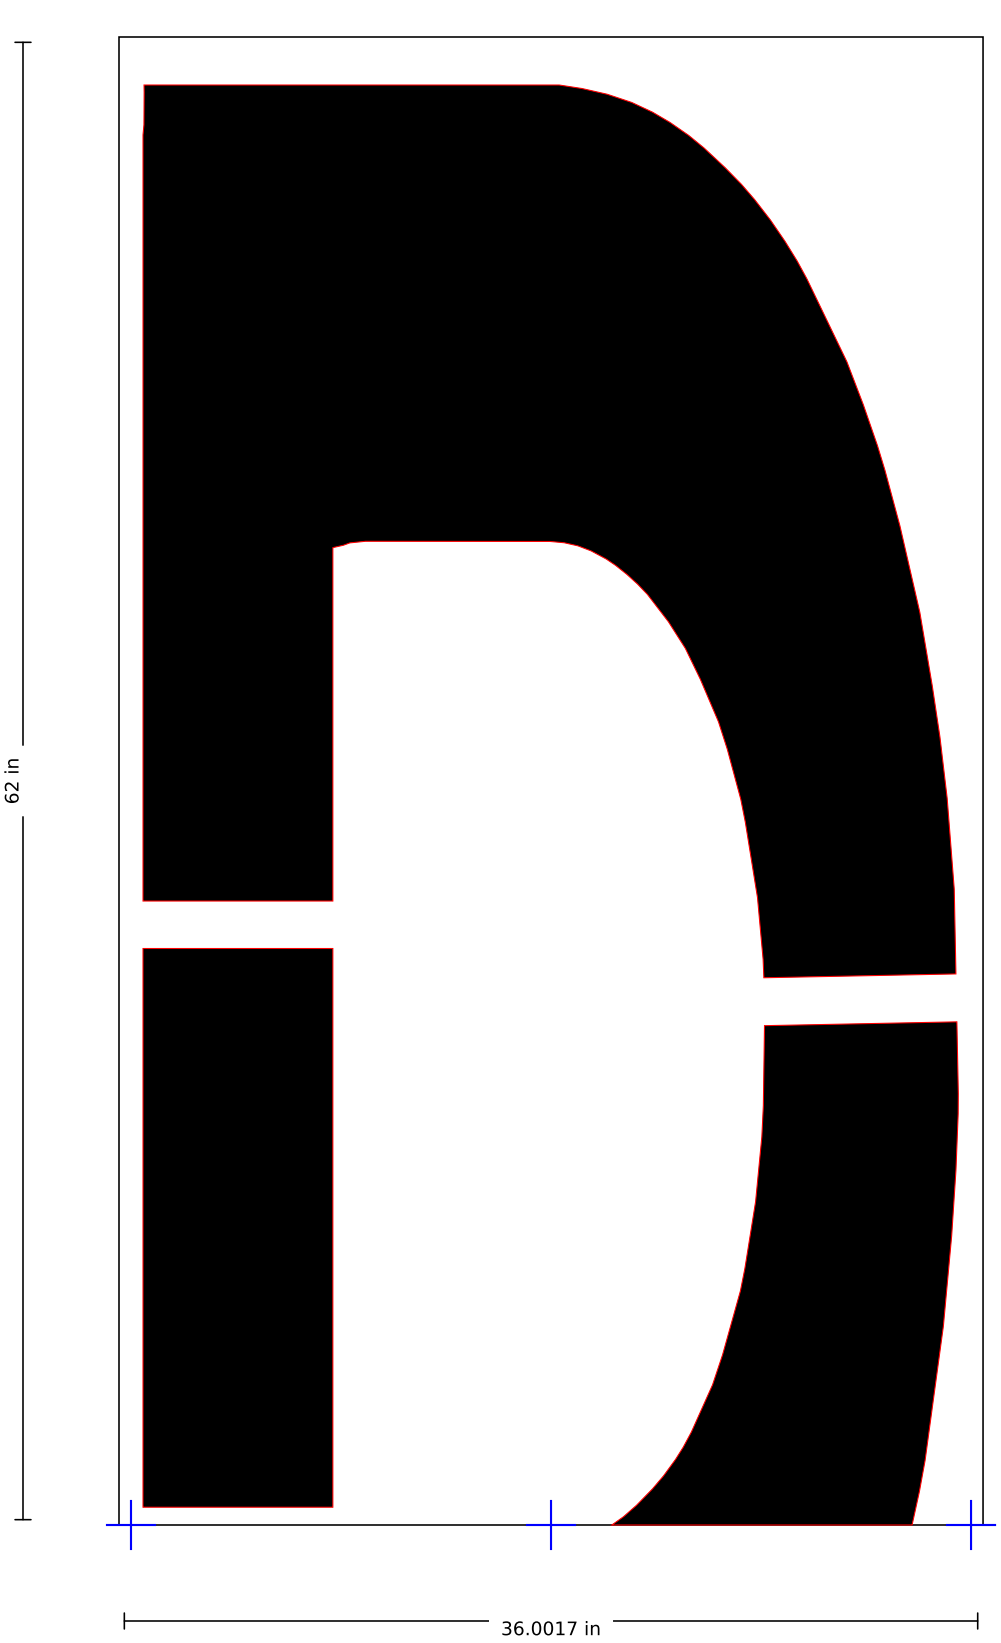

SSS-FAA-120-01-S

120" FAA Airport "S" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 34 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

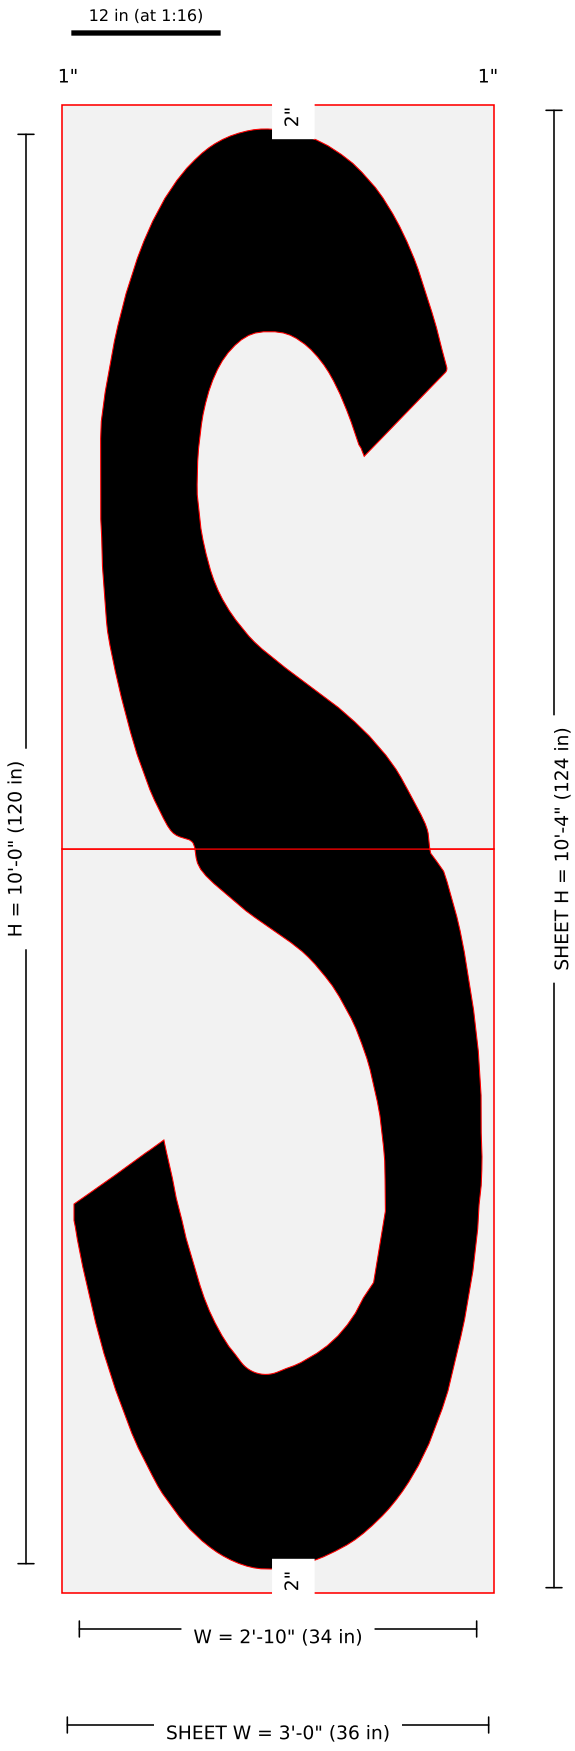

Pieces: 2 (1 x 2); blanks (in): 36 x 62, 36 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120S-120in-FAA-Airport-Letter-S-134x48-2.jpg: width = 1-800 image width label 34 in (image-scale 34.20); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 6 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-S · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

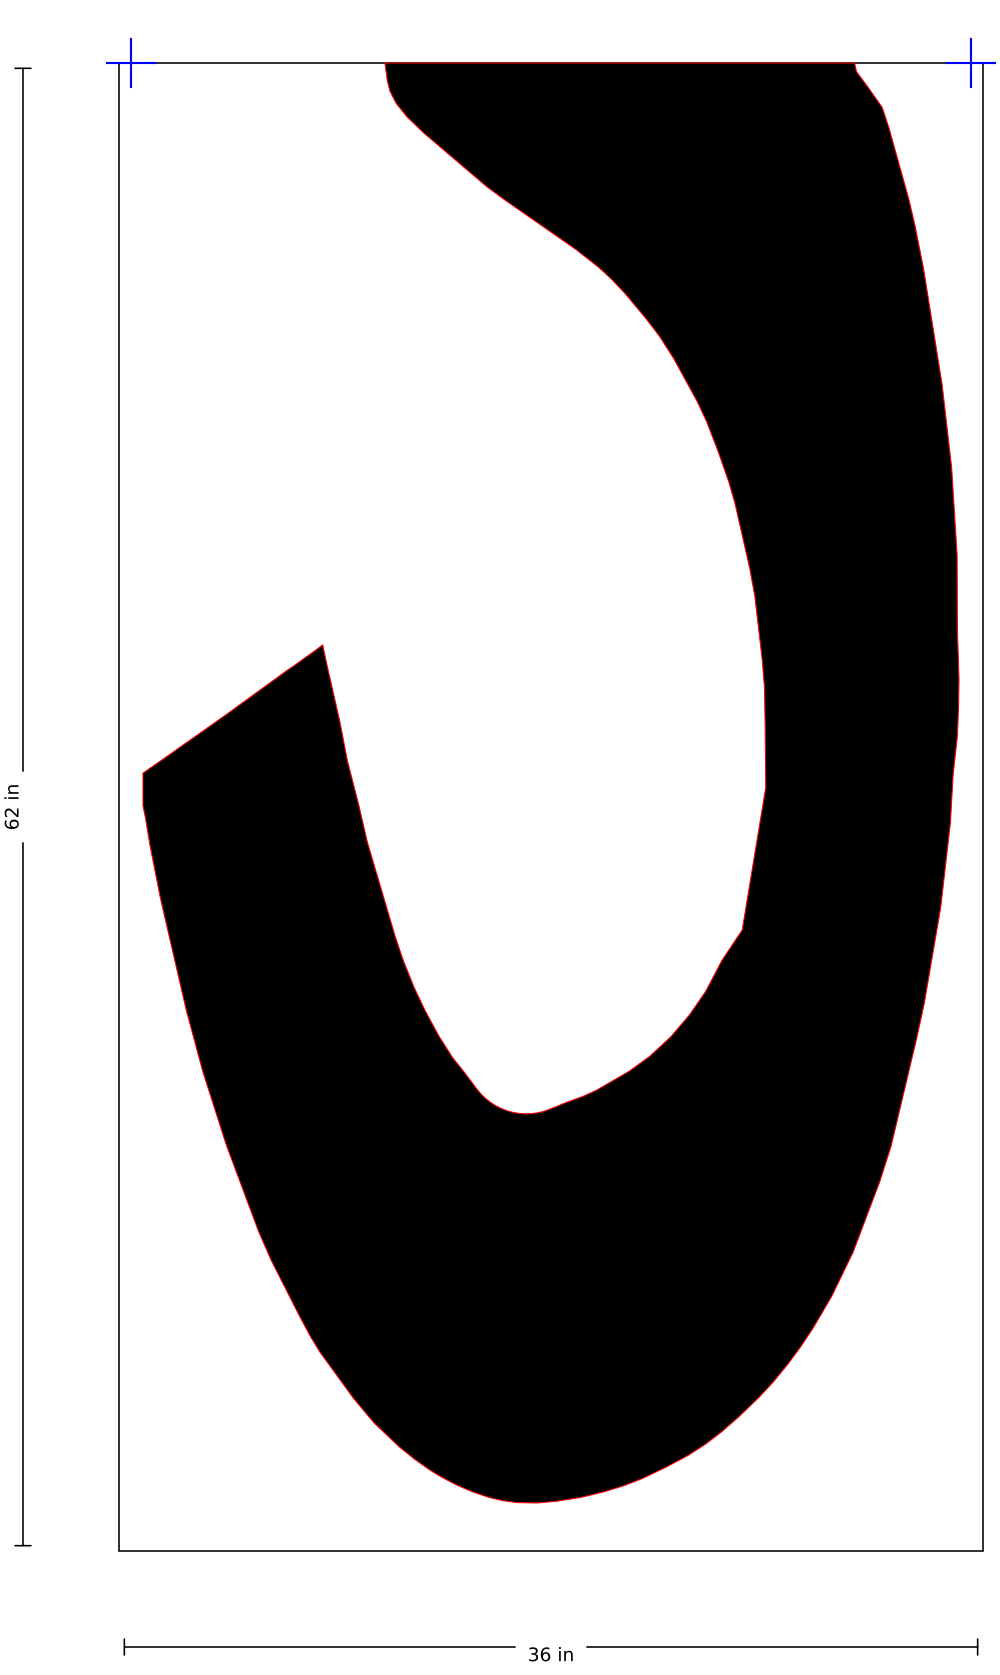

SSS-FAA-120-01-S · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

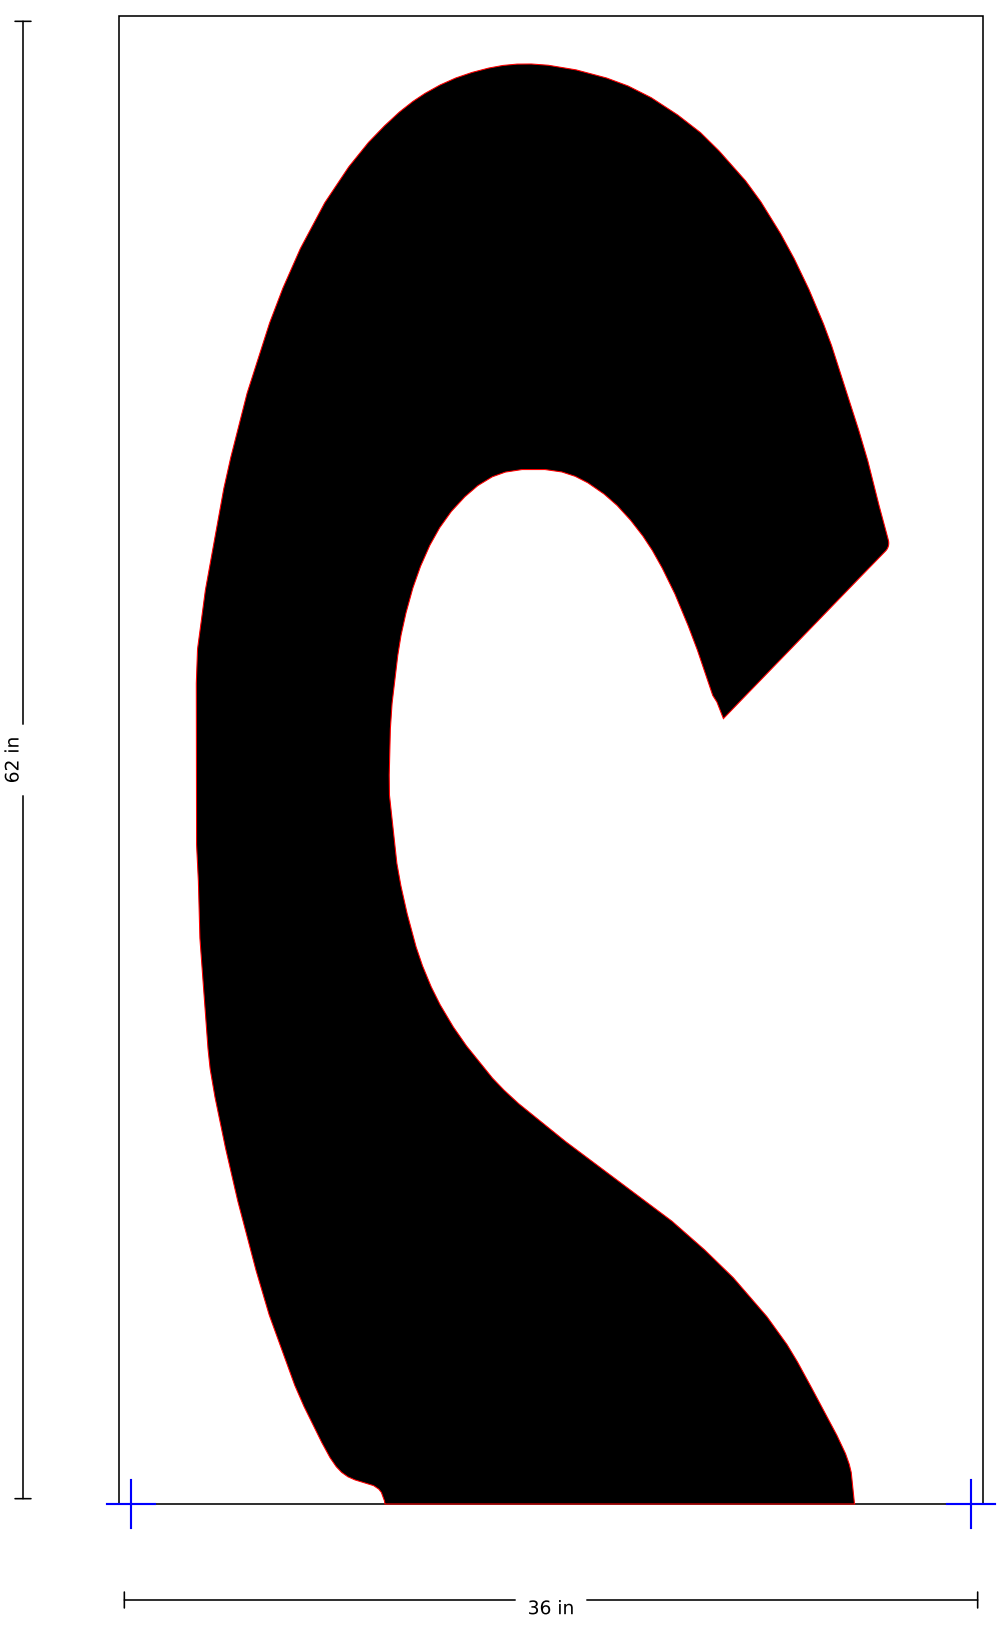

SSS-FAA-120-01-V

120" FAA Airport "V" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 40 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

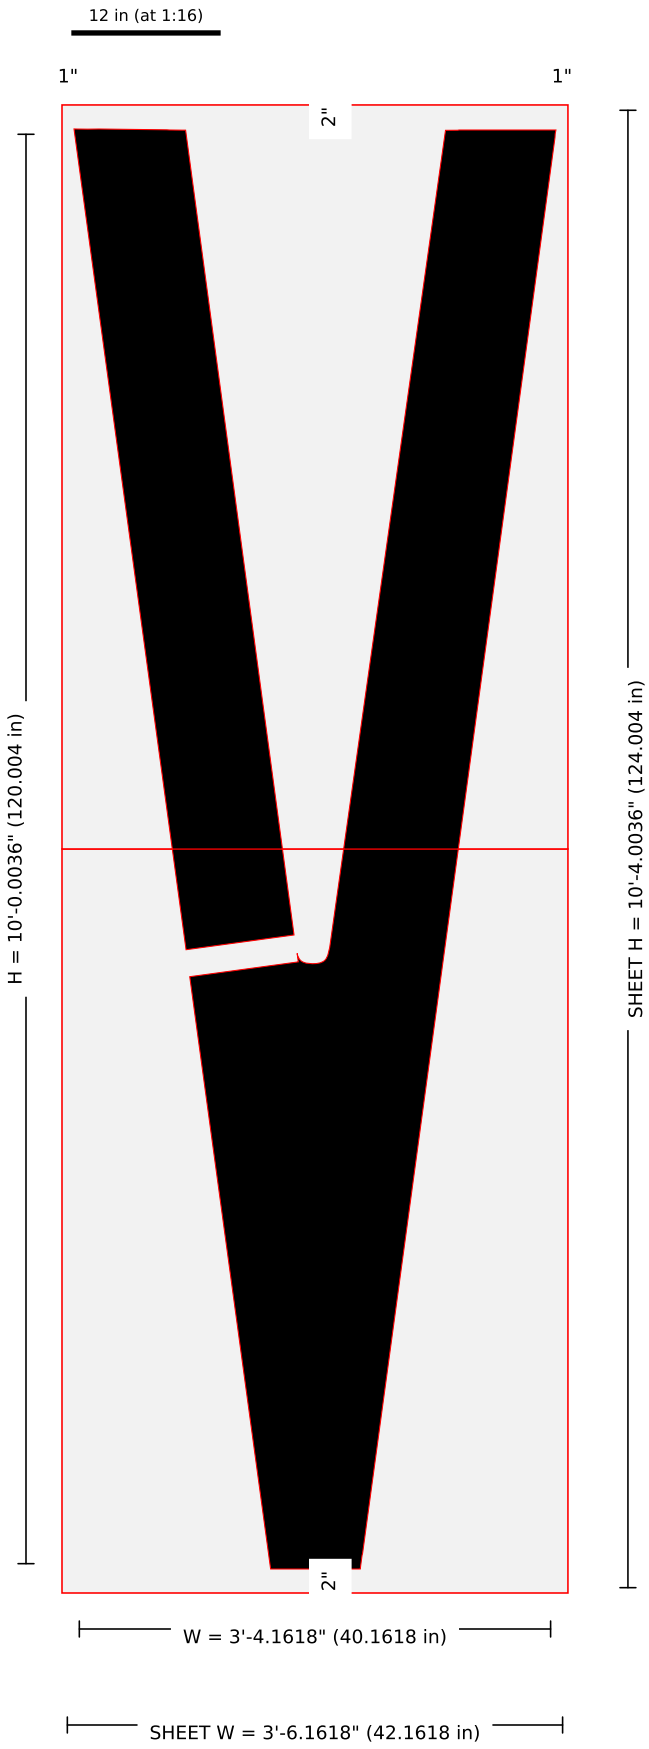

Pieces: 2 (1 x 2); blanks (in): 42.162 x 62.002, 42.162 x 62.002 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120V-120in-FAA-Airport-Letter-V-134x48-2.jpg: width = 1-800 image width label 40 in (image-scale 40.39); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-120-01-V · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

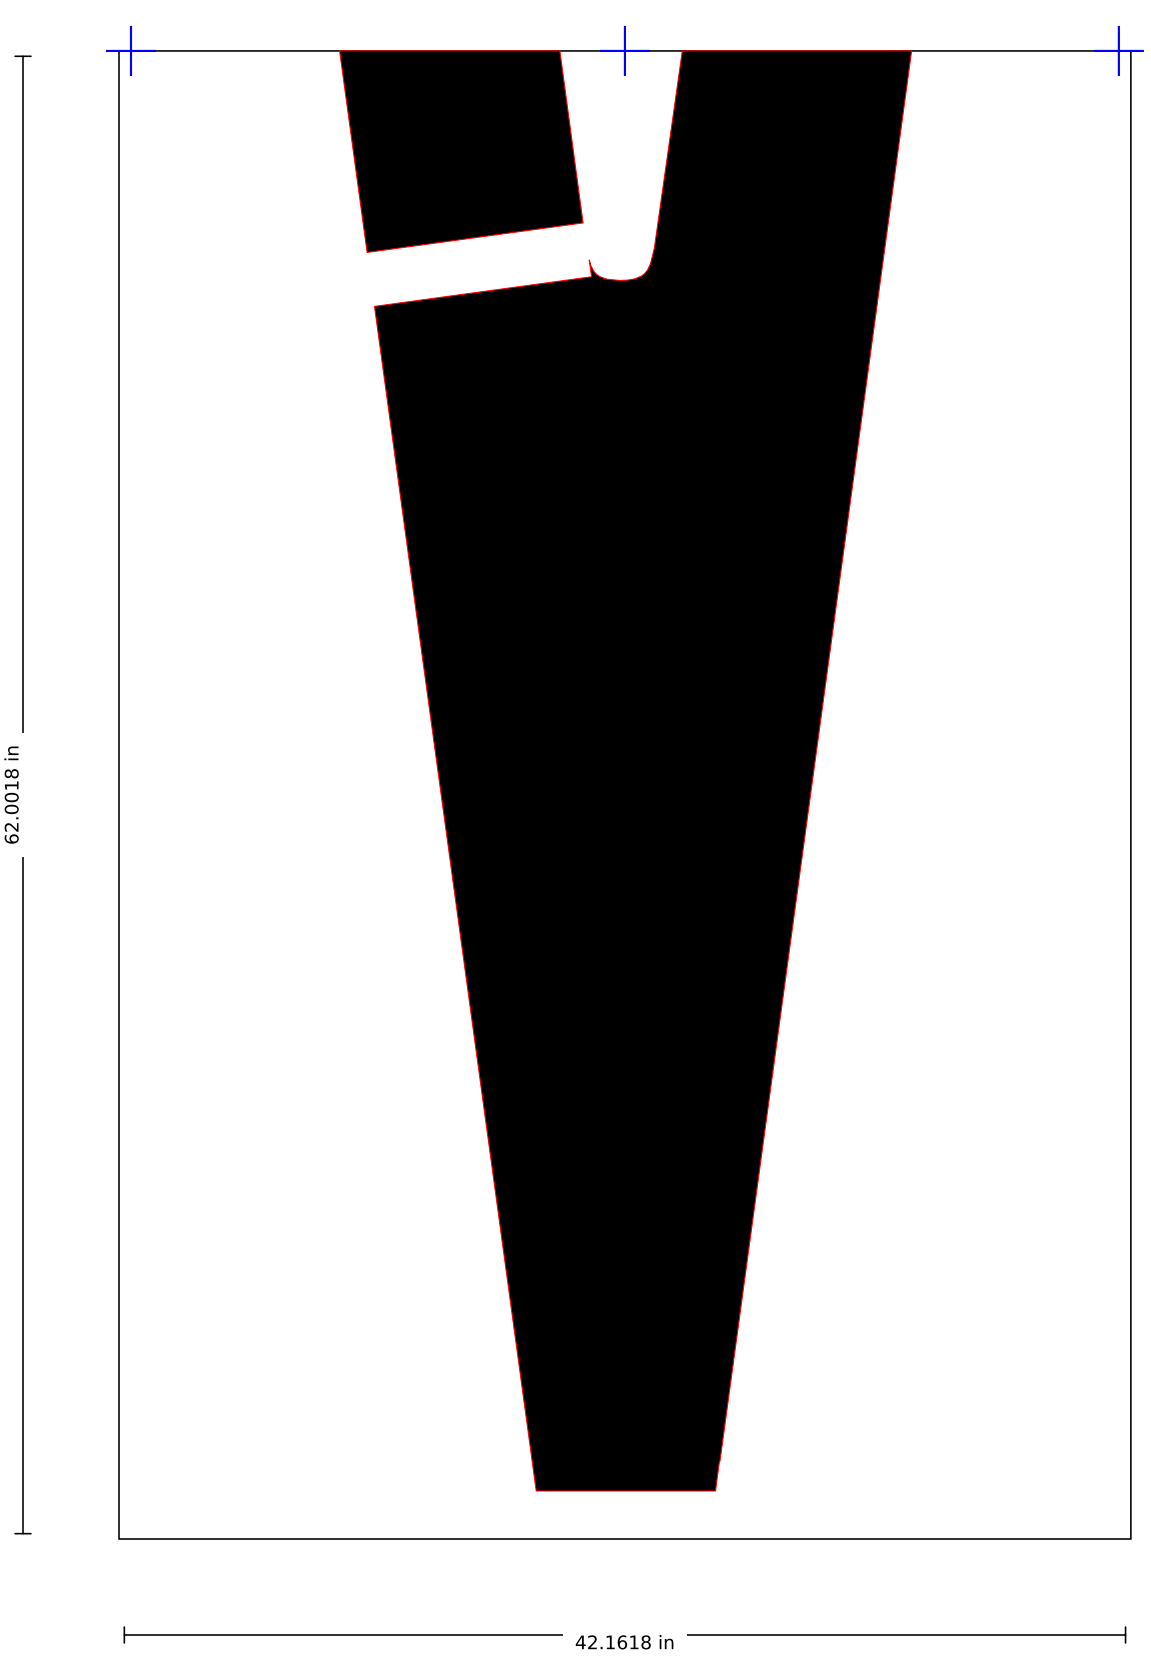

SSS-FAA-120-01-V · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

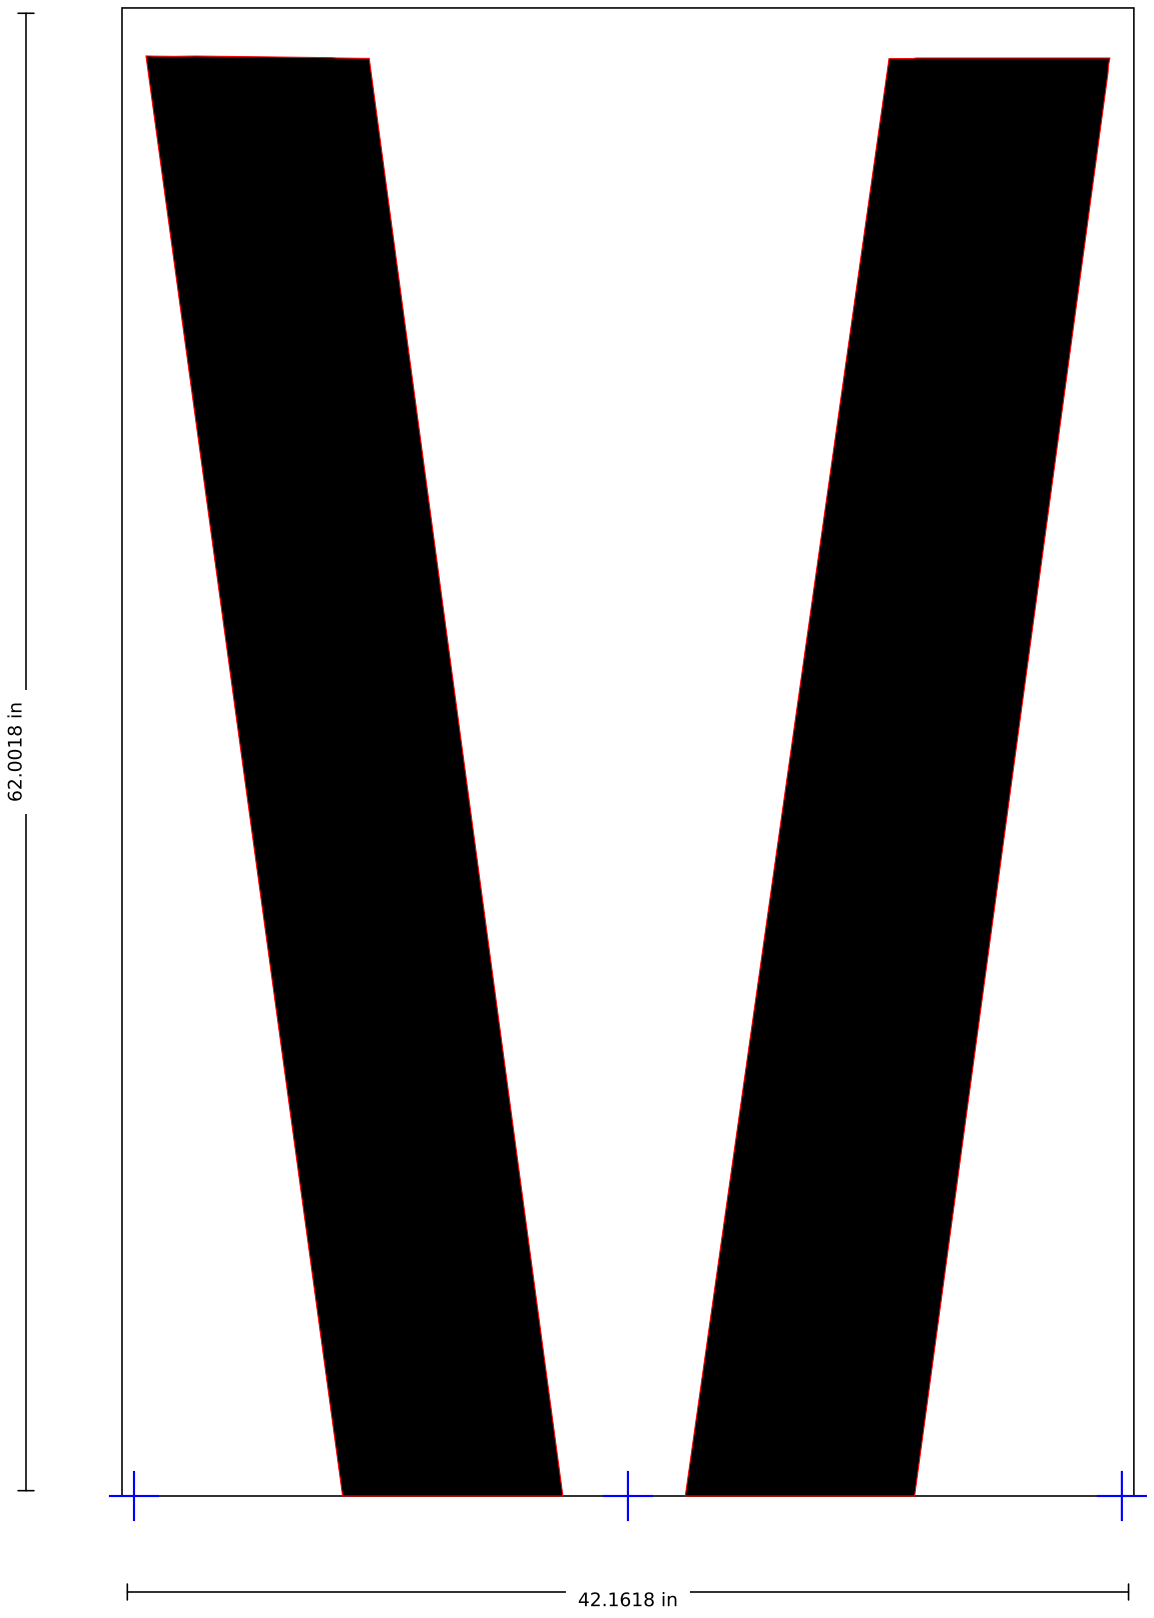

SSS-FAA-120-01-X

120" FAA Airport "X" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 33 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

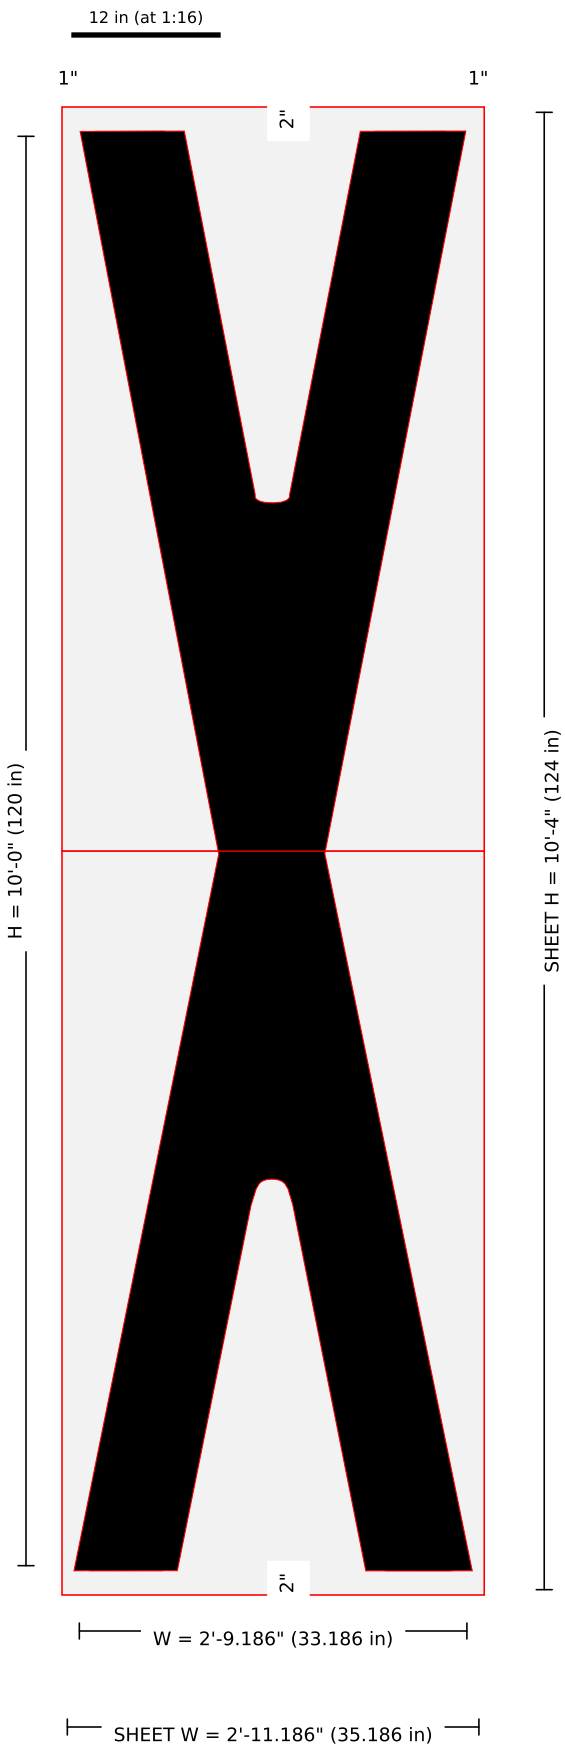

Pieces: 2 (1 x 2); blanks (in): 35.186 x 62, 35.186 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120X-120in-FAA-Airport-Letter-X-134x48-2.jpg: width = 1-800 image width label 33 in (image-scale 34.17); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.48 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-120-01-X · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

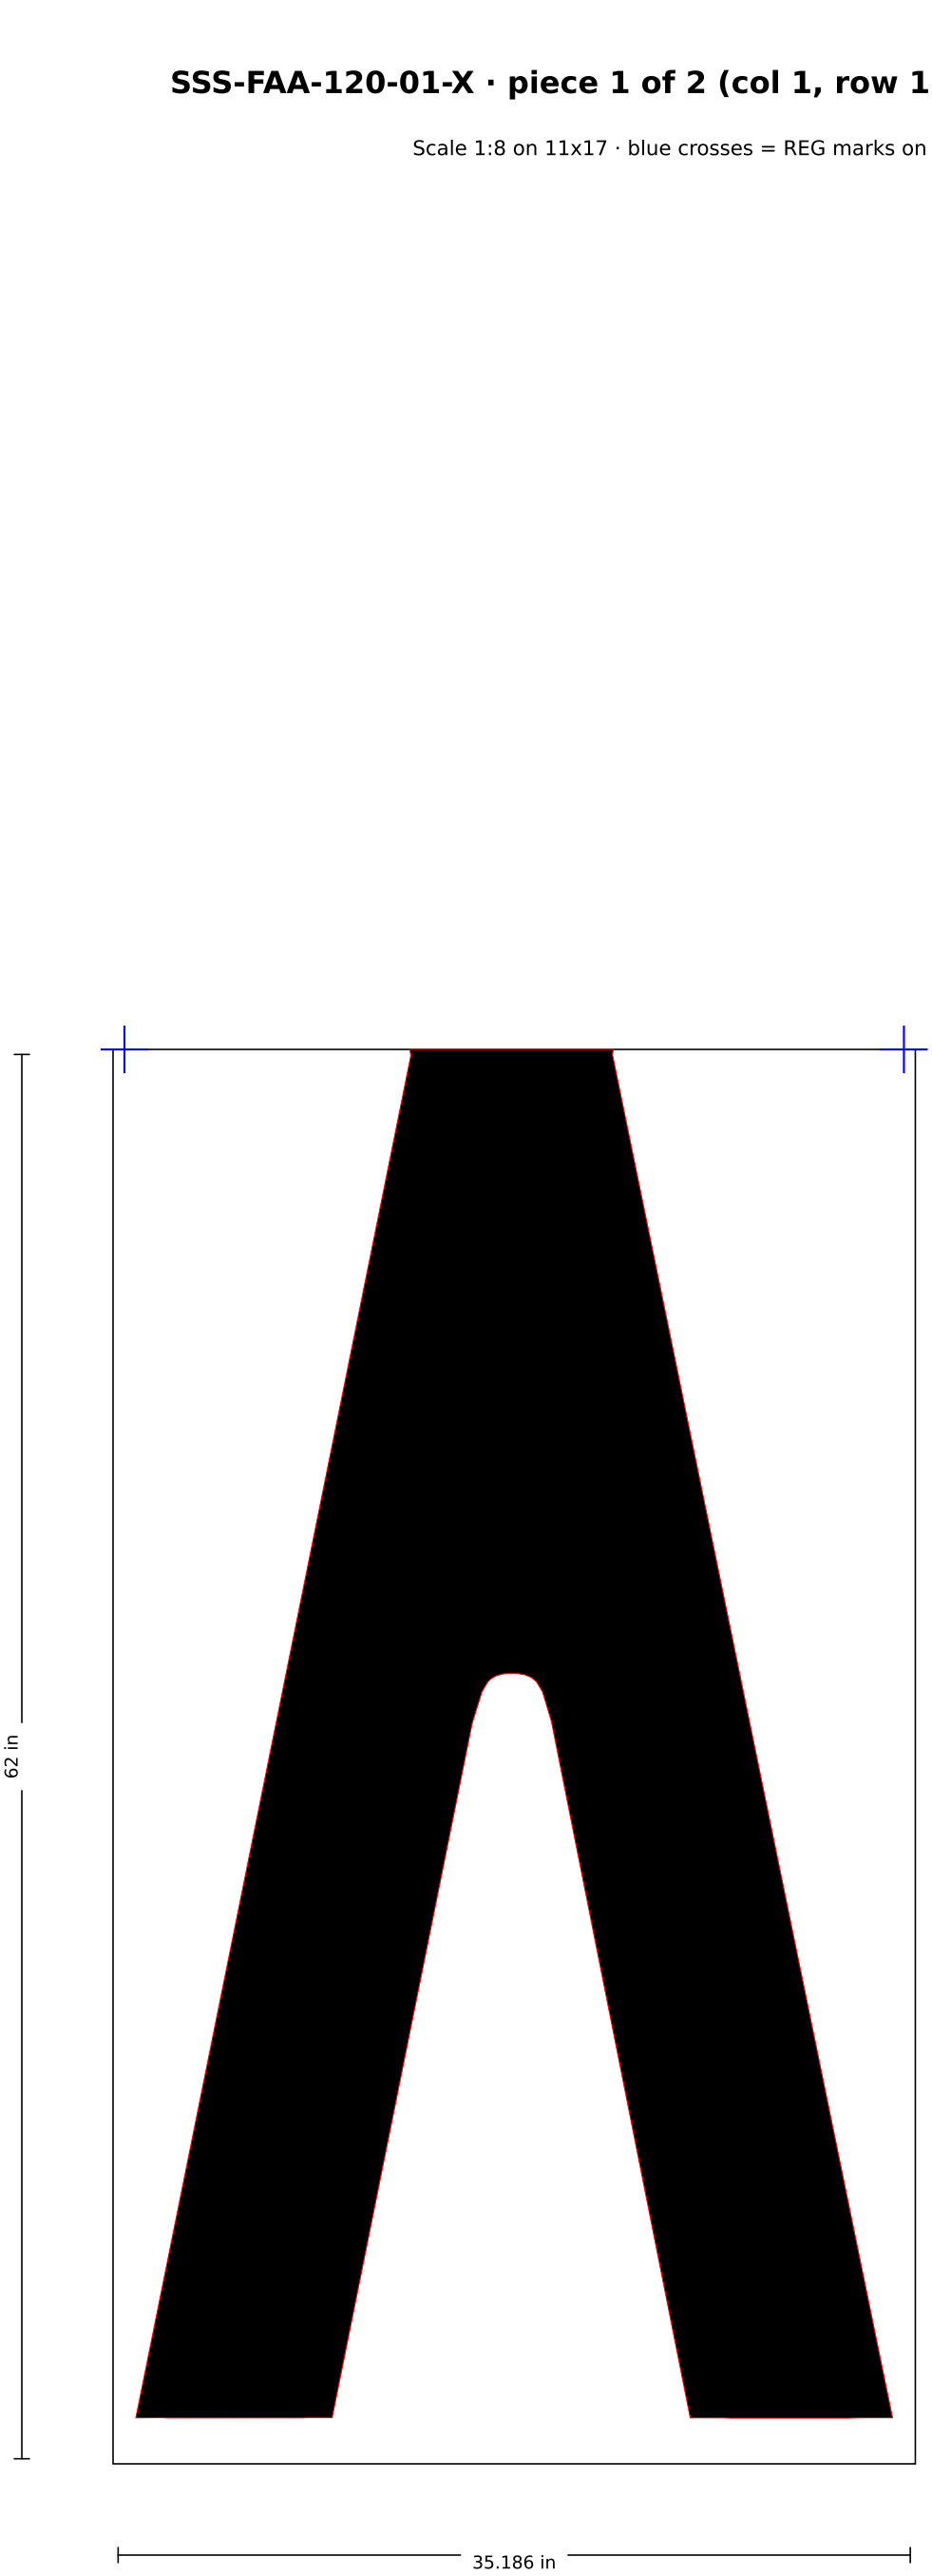

SSS-FAA-120-01-X · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

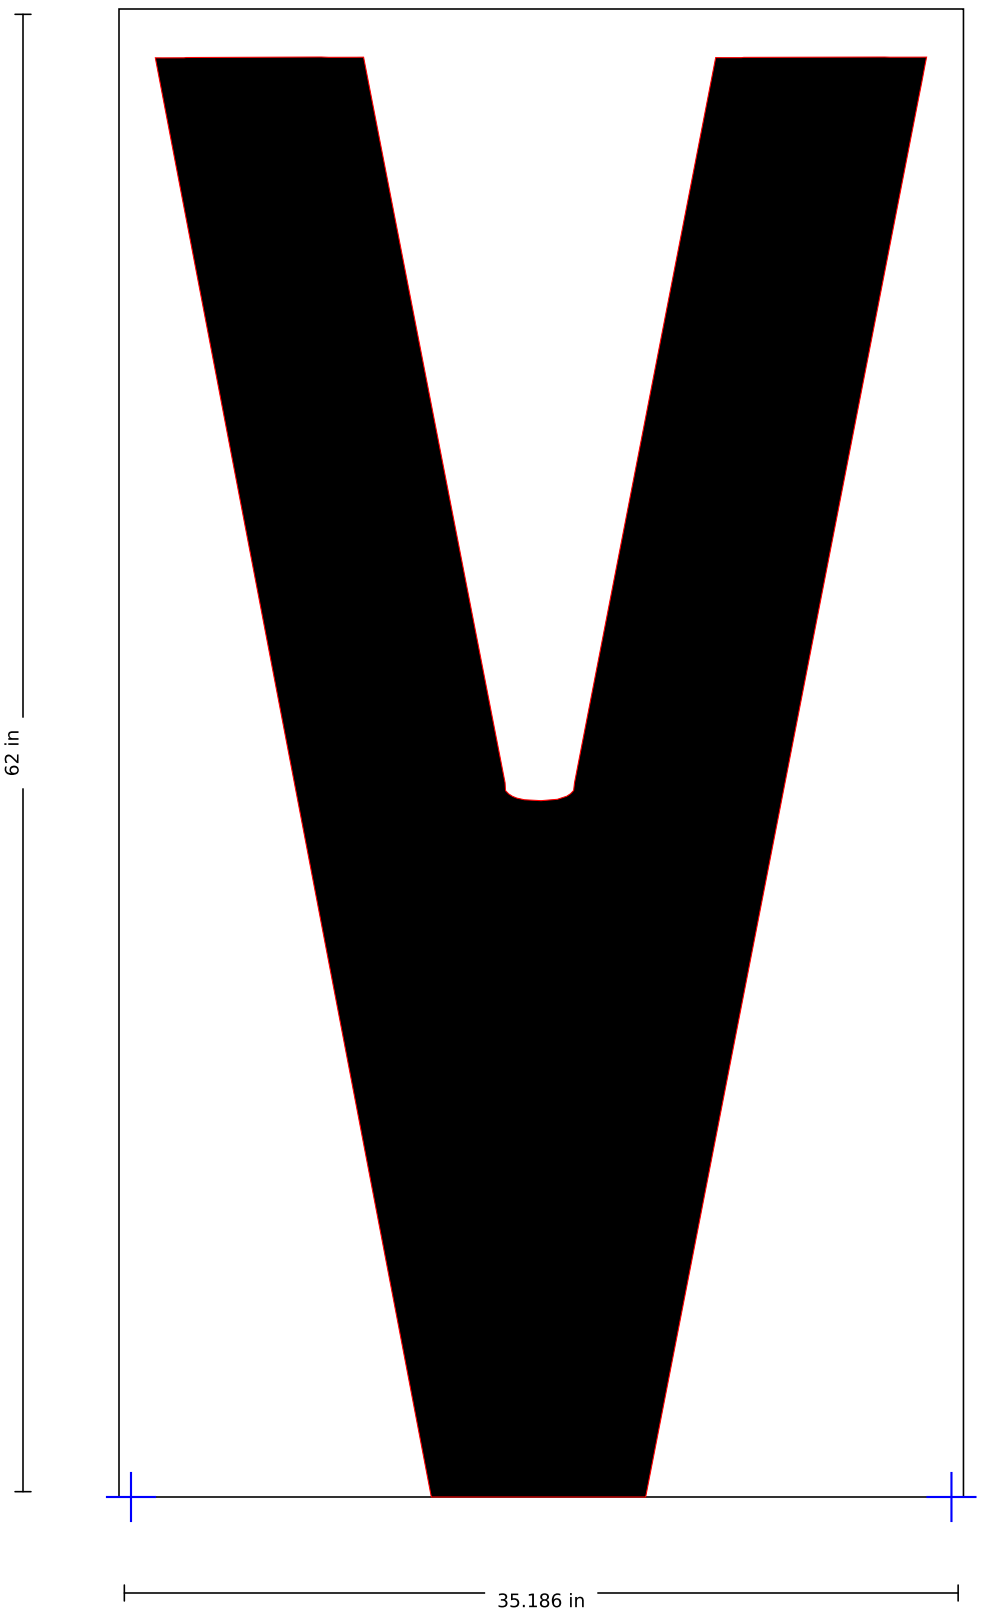

SSS-FAA-120-01-Z

120" FAA Airport "Z" - kit SSS-FAA-120-01, traced from 1-800-Stencil image, 30 W x 120 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

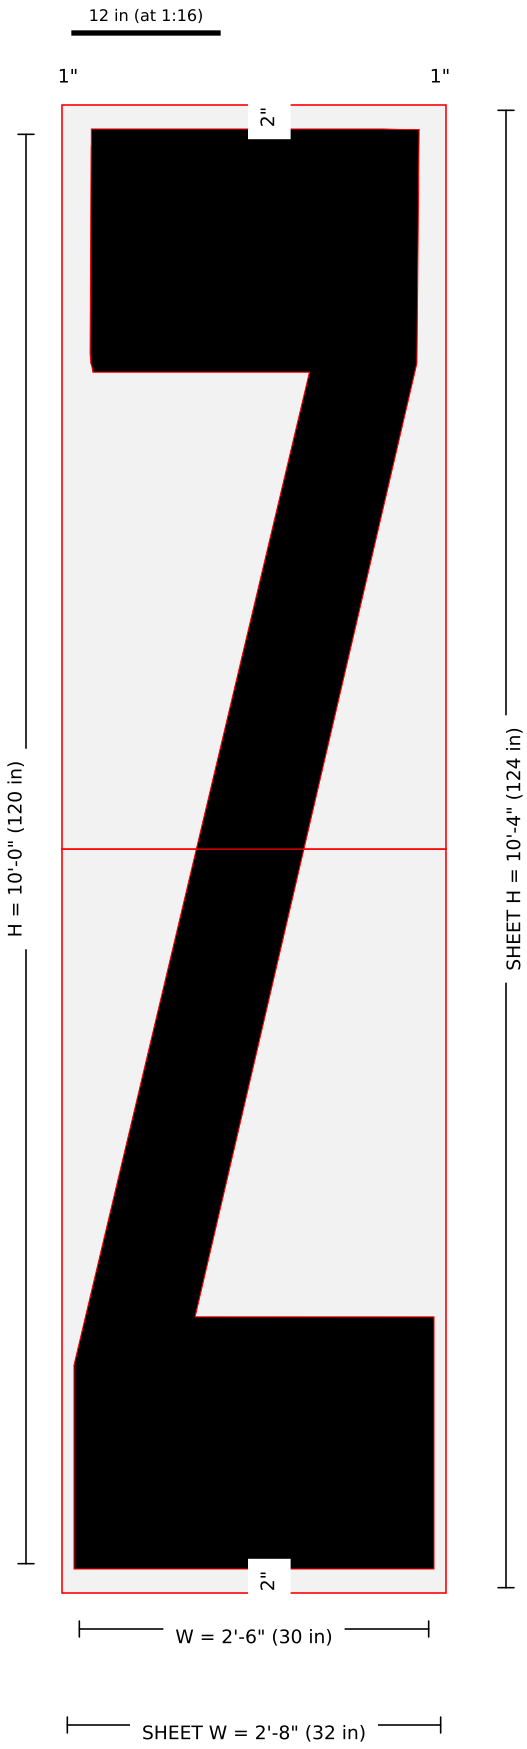

Pieces: 2 (1 x 2); blanks (in): 32 x 62, 32 x 62 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F120Z-120in-FAA-Airport-Letter-Z-134x48-2.jpg: width = 1-800 image width label 30 in (image-scale 33.22); kit sheet 48 x 134 (side margin 6.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.45 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-120-01-Z · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

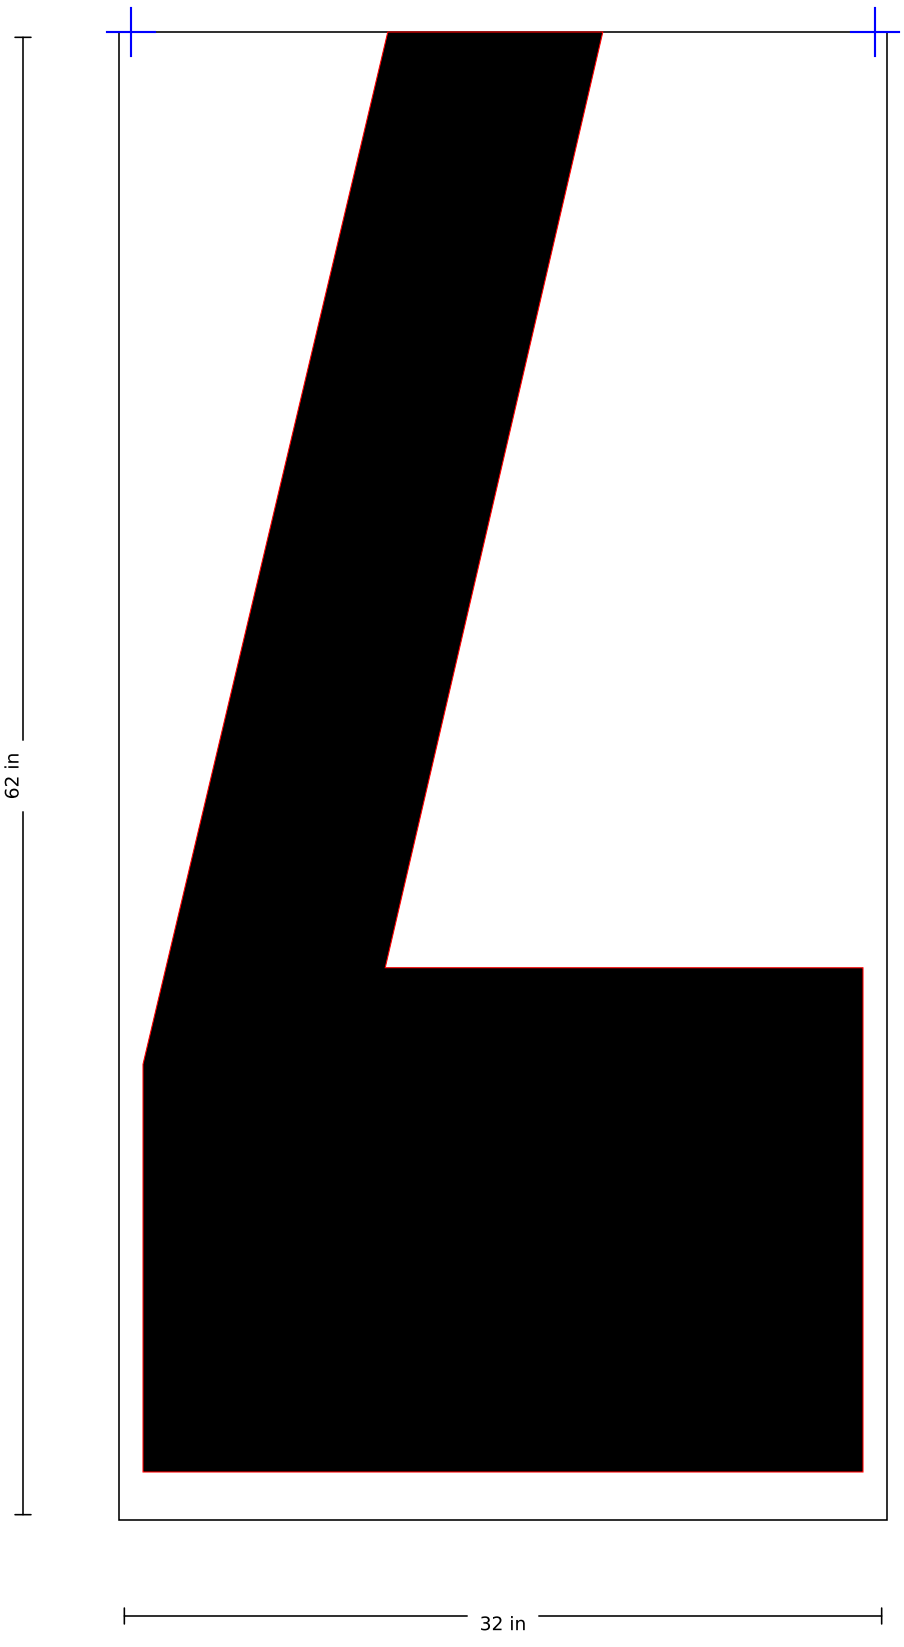

SSS-FAA-120-01-Z · piece 2 of 2 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

