
SSS-FAA-144-03-0

144" FAA Airport "0" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

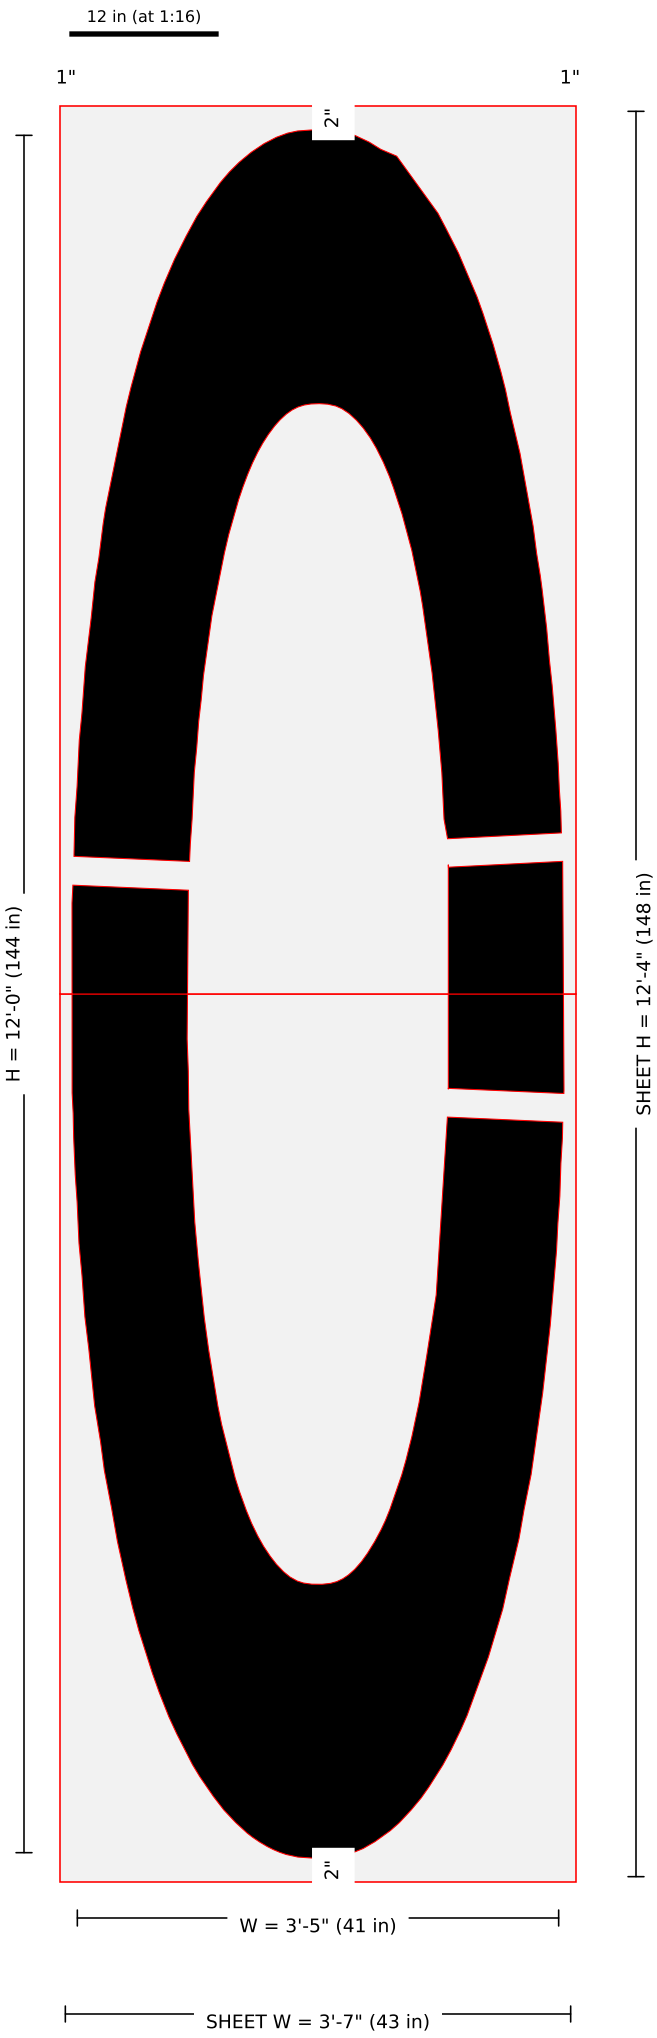

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1440-144in-FAA-Airport-Number-0-157x60-2.jpg: width = kit listing 41 (image-scale 40.87); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (36.1,84.0) stroke 9.491" w=2.373"; (4.94,82.06) stroke 9.616" w=2.404" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-0 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

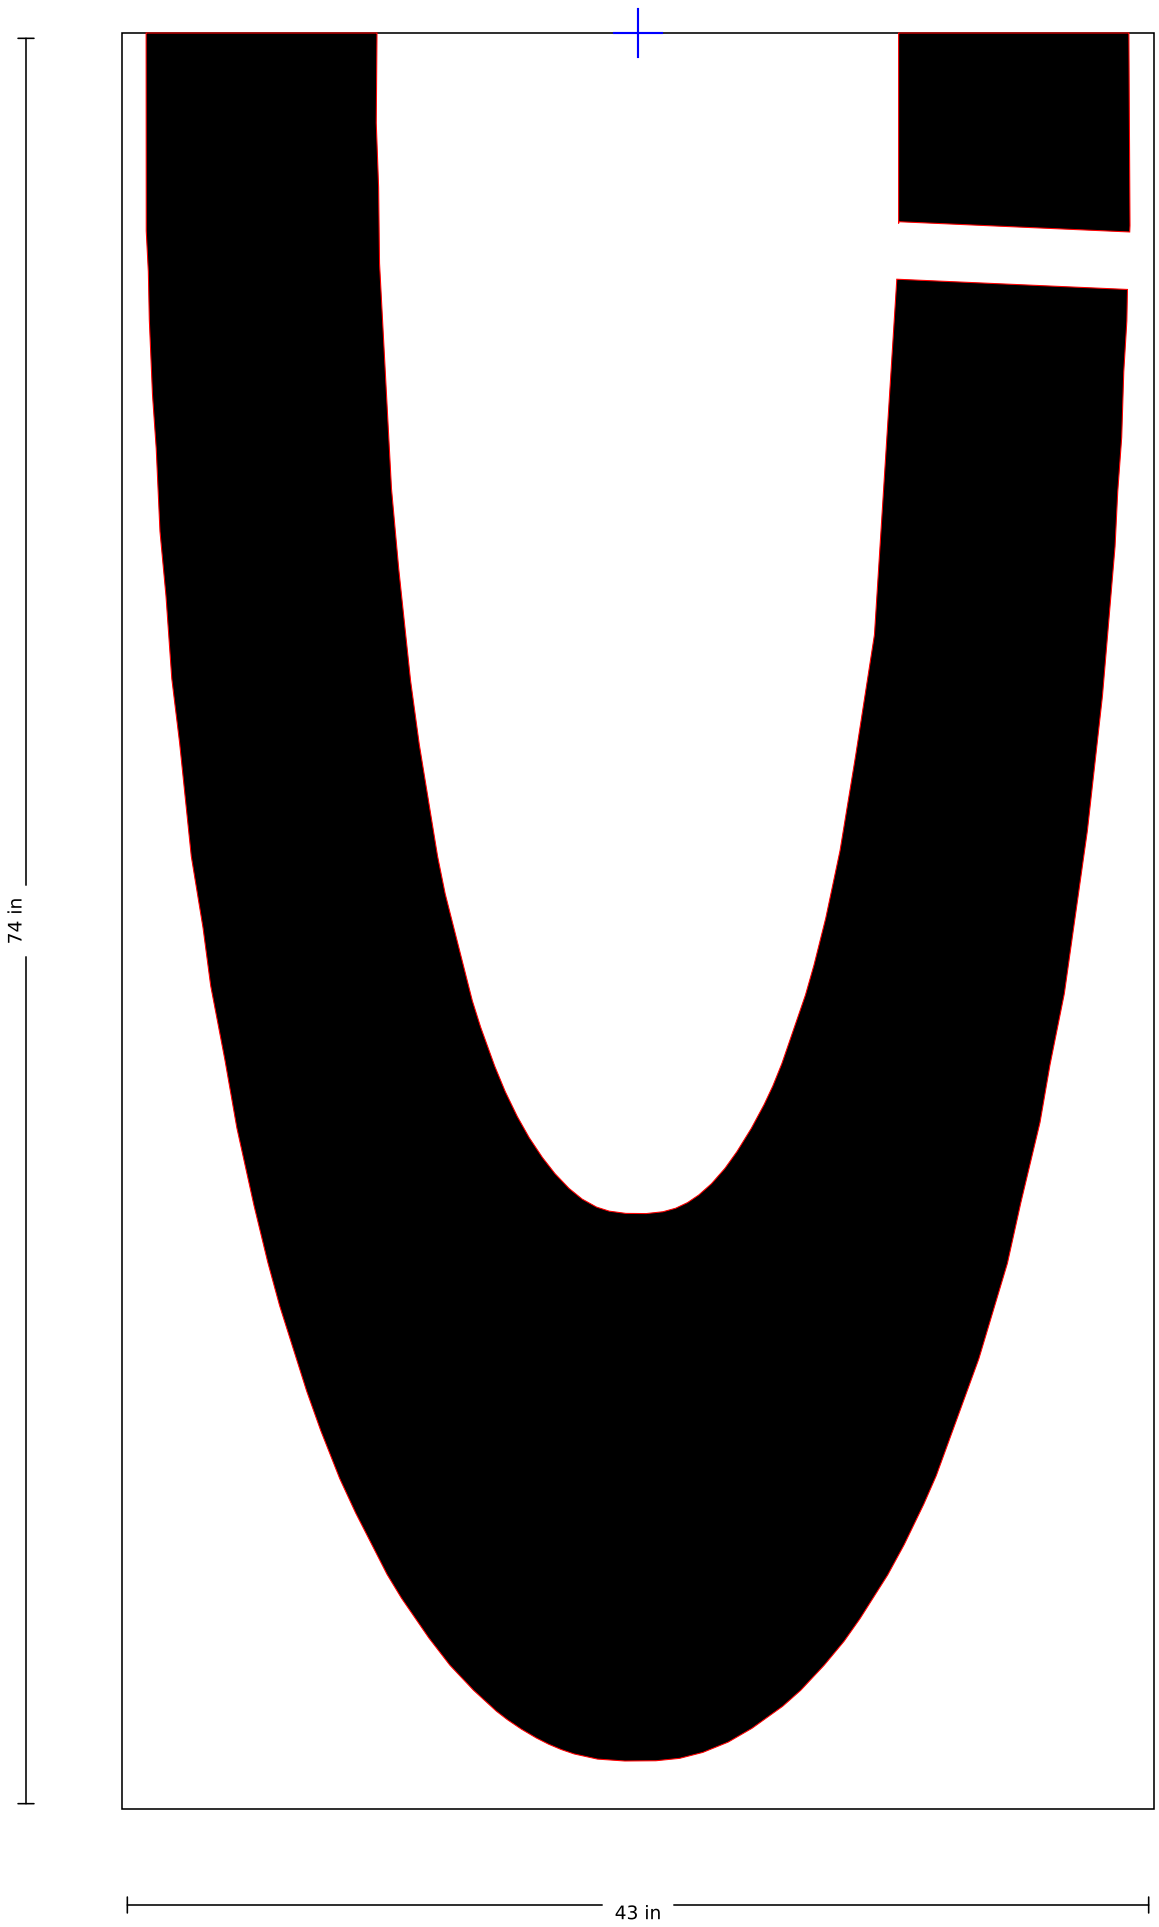

SSS-FAA-144-03-0 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

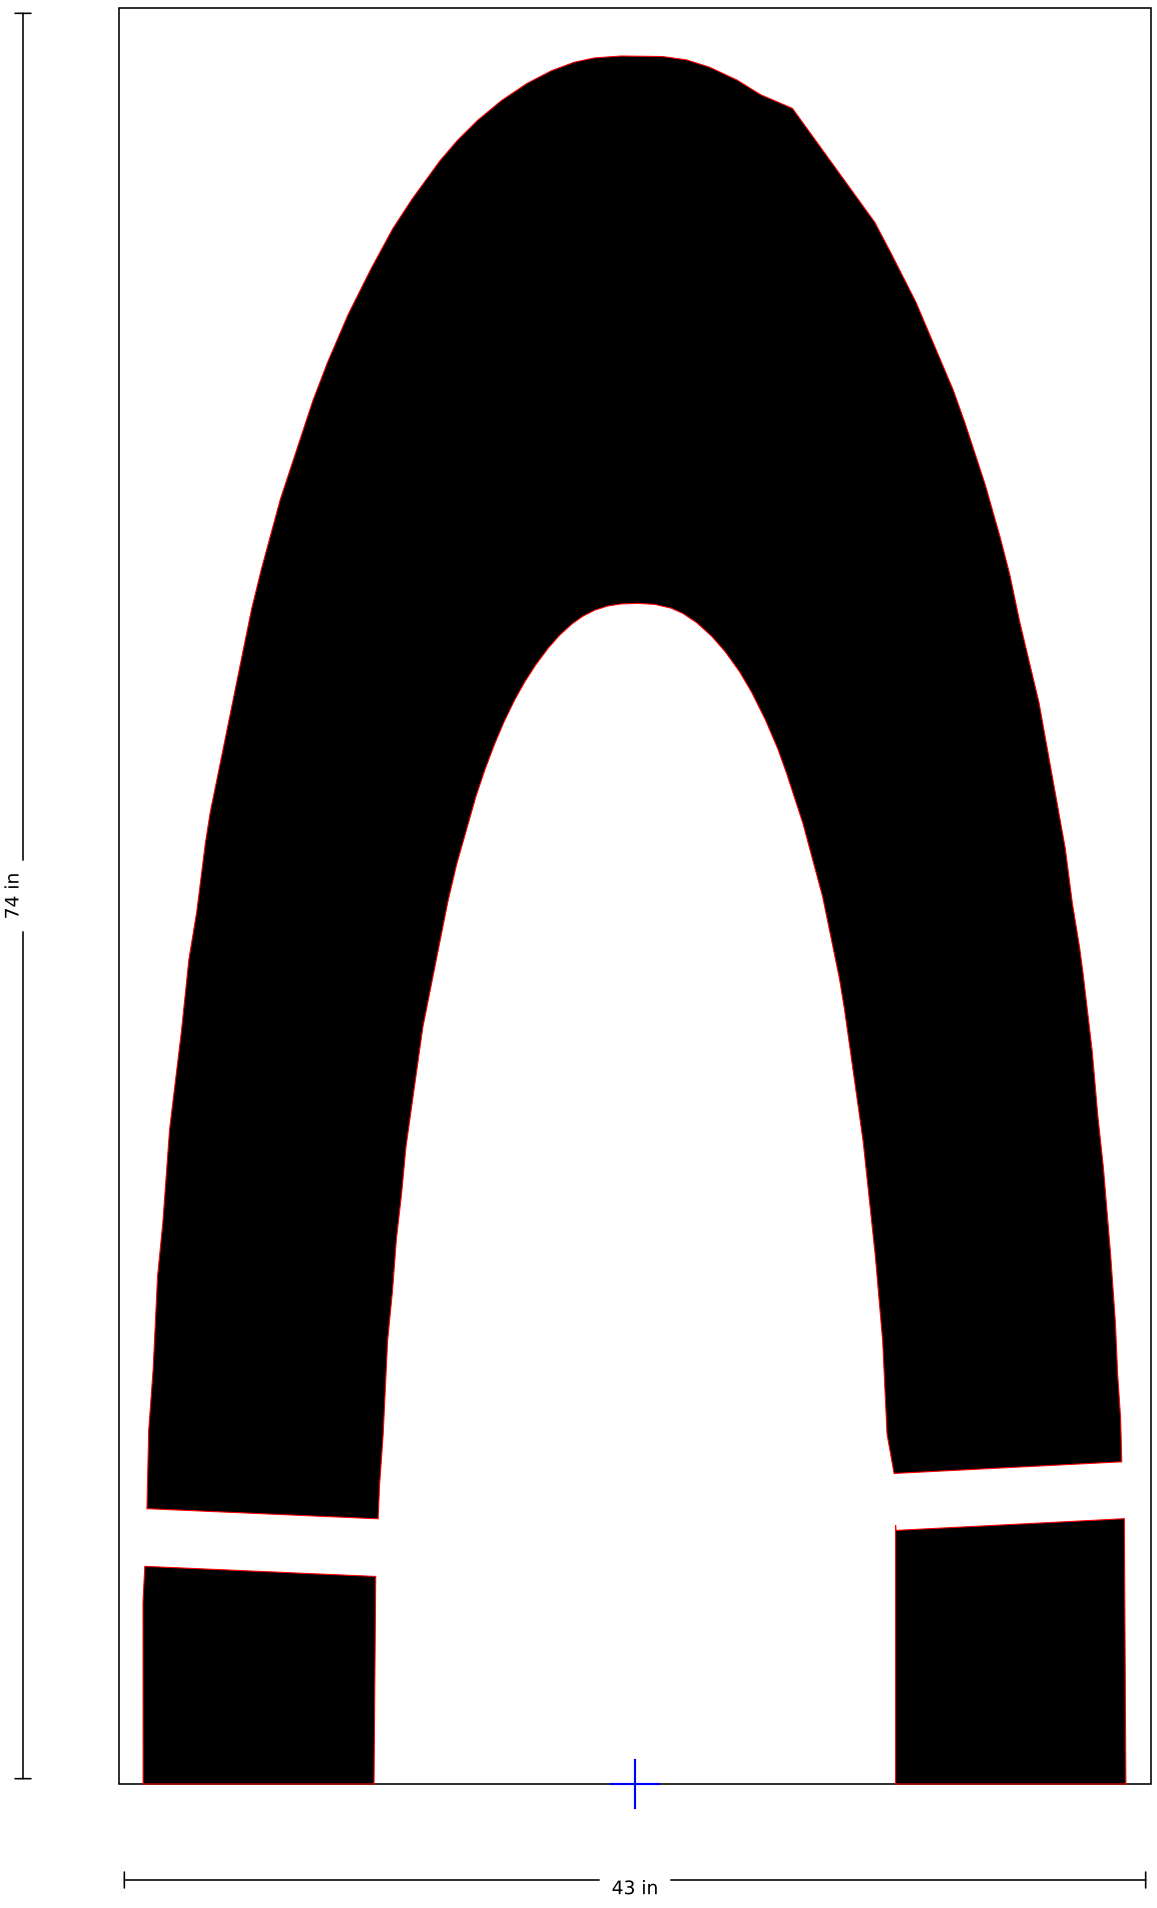

SSS-FAA-144-03-2

144" FAA Airport "2" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

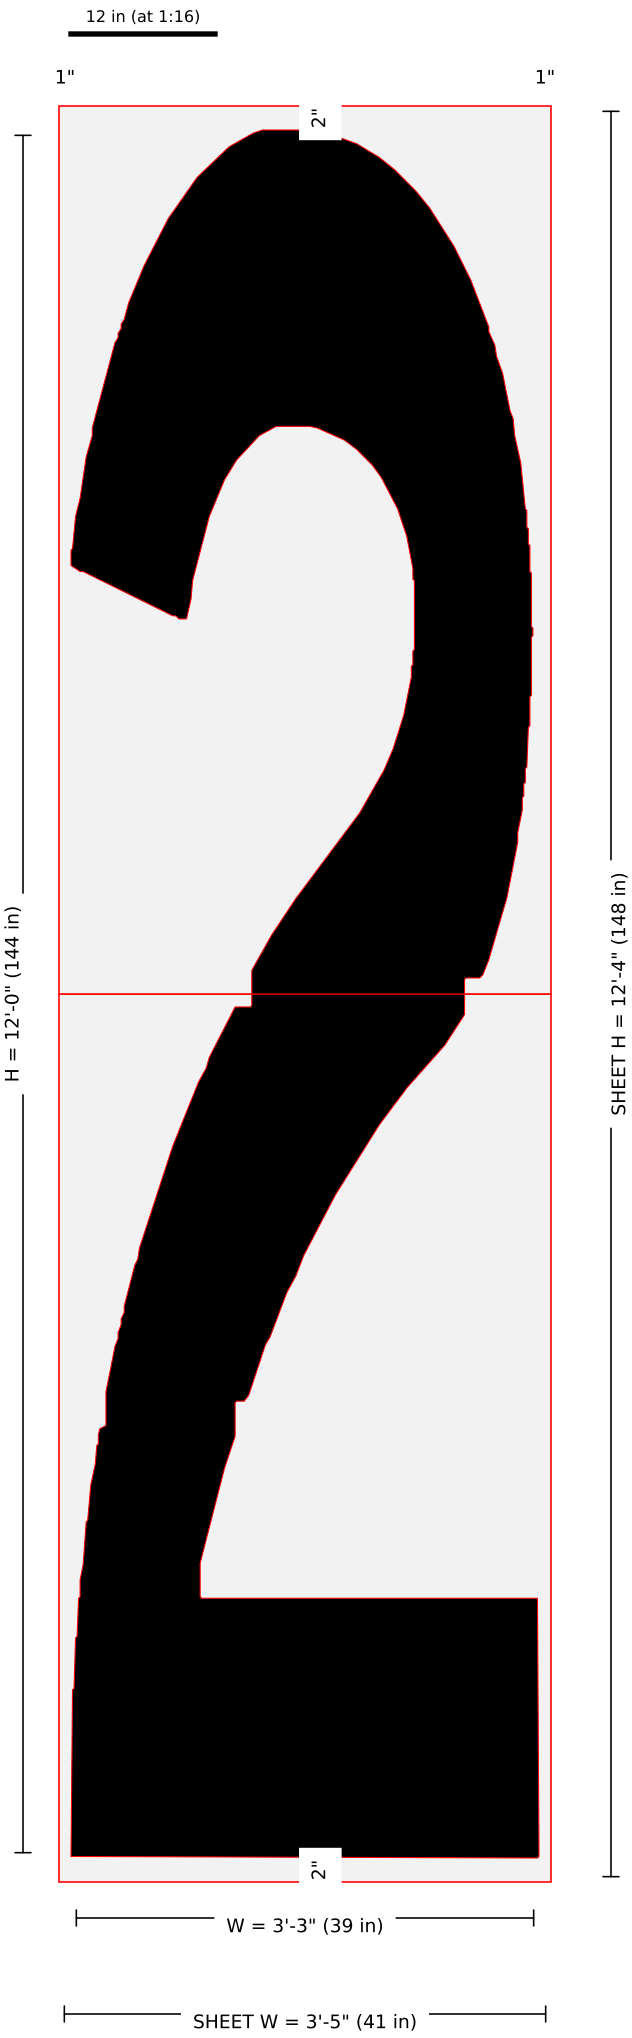

Pieces: 2 (1 x 2); blanks (in): 41 x 74, 41 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1442-144in-FAA-Airport-Number-2-157x60-2.jpg: width 39 from image scale (39.21); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-2 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

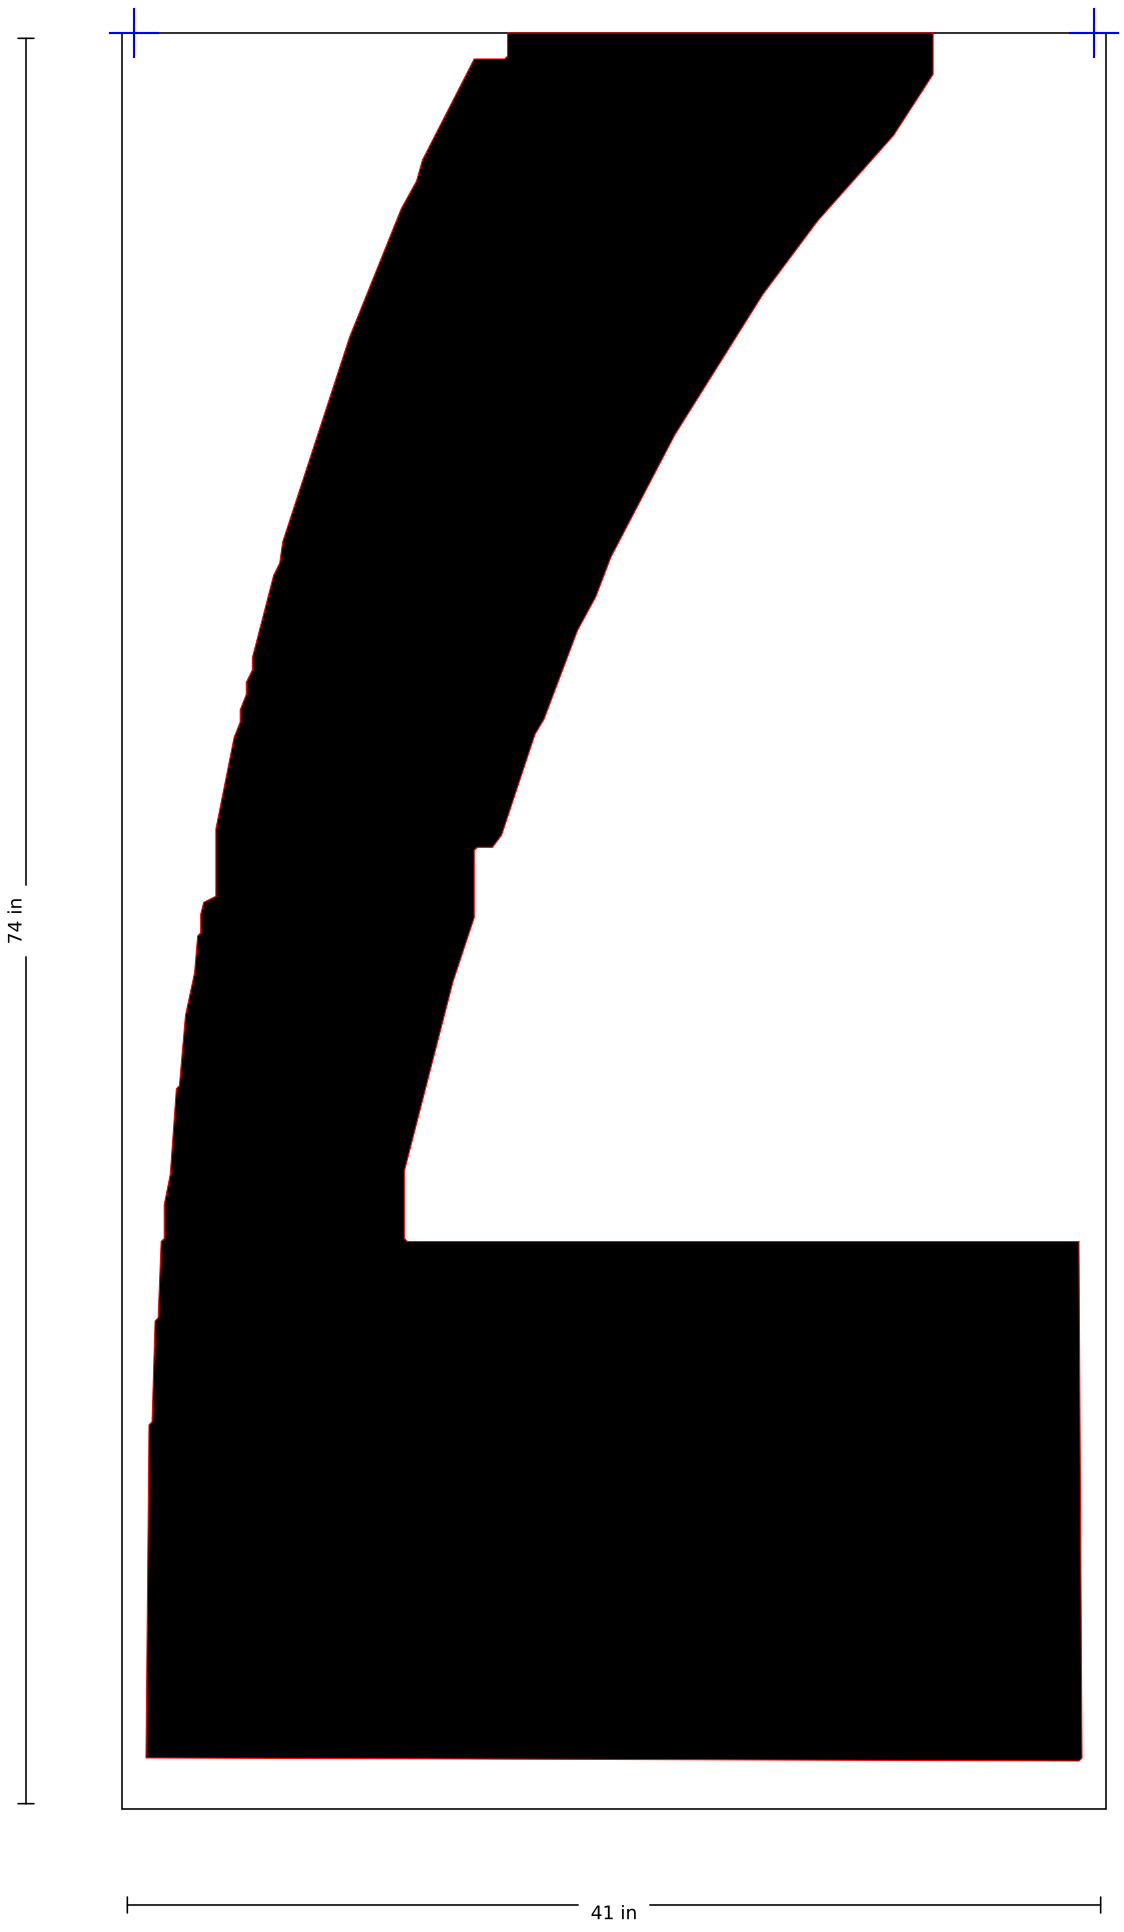

SSS-FAA-144-03-2 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

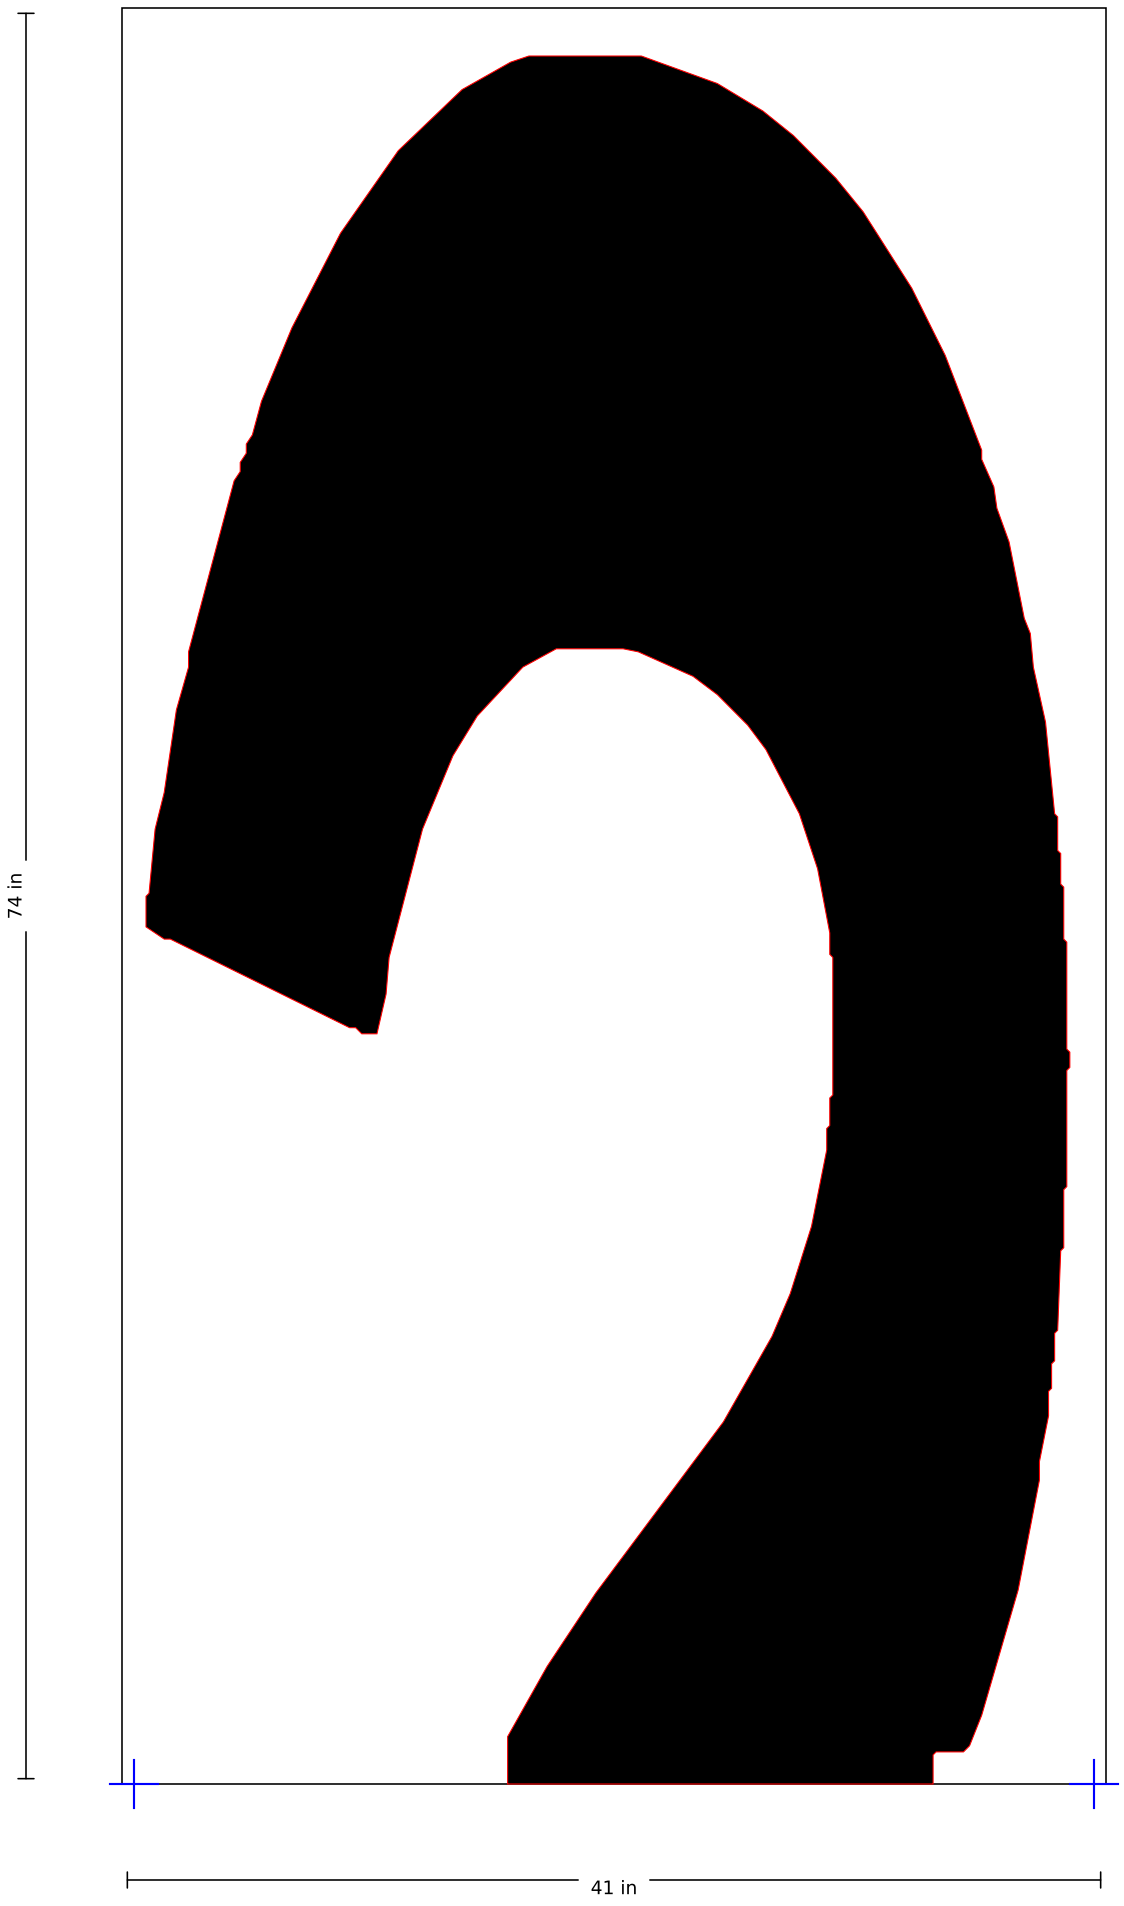

SSS-FAA-144-03-3

144" FAA Airport "3" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

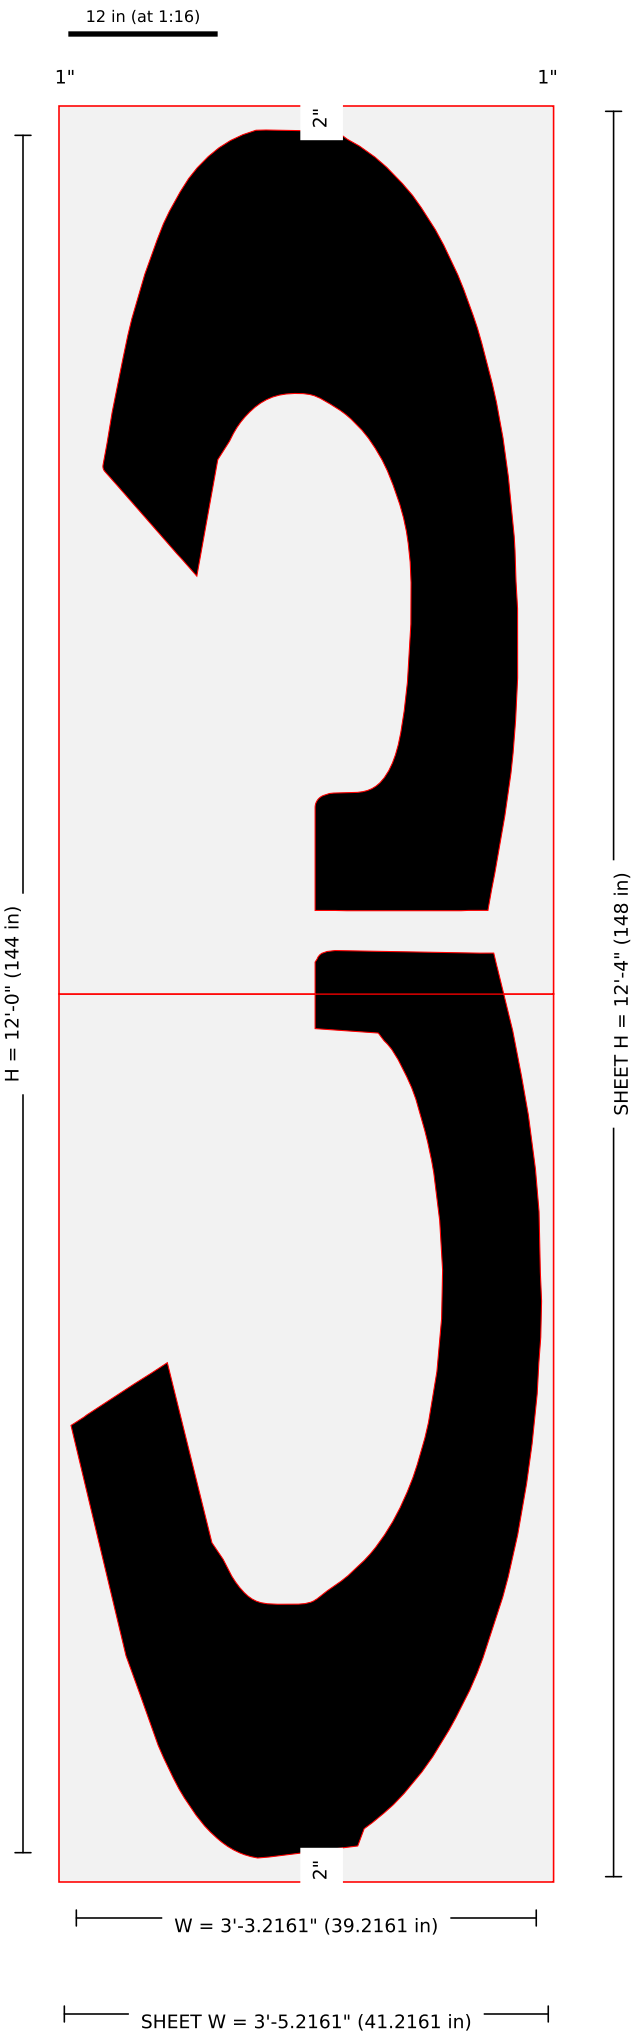

Pieces: 2 (1 x 2); blanks (in): 41.216 x 74, 41.216 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1443-144in-FAA-Airport-Number-3-157x60-2.jpg: width 39 from image scale (39.18); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 5 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-3 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

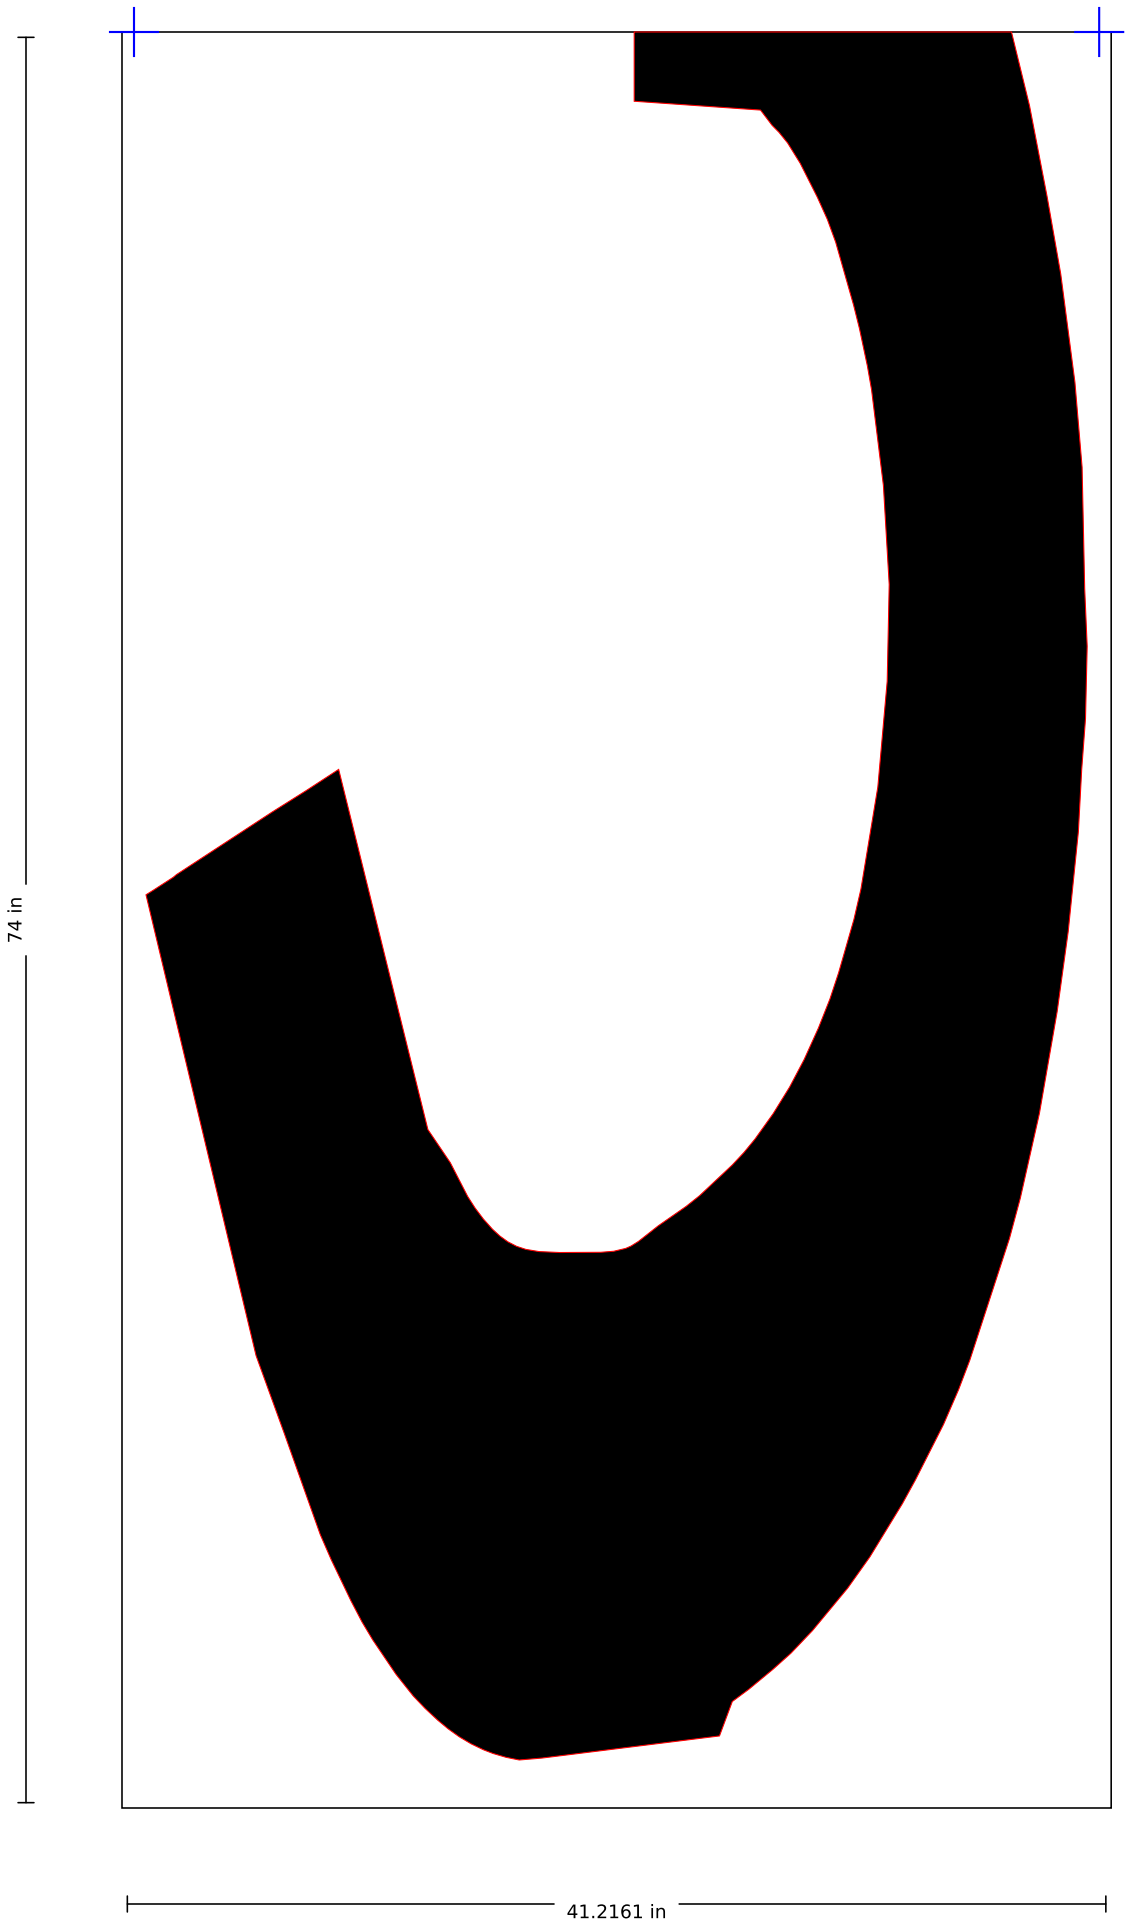

SSS-FAA-144-03-3 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

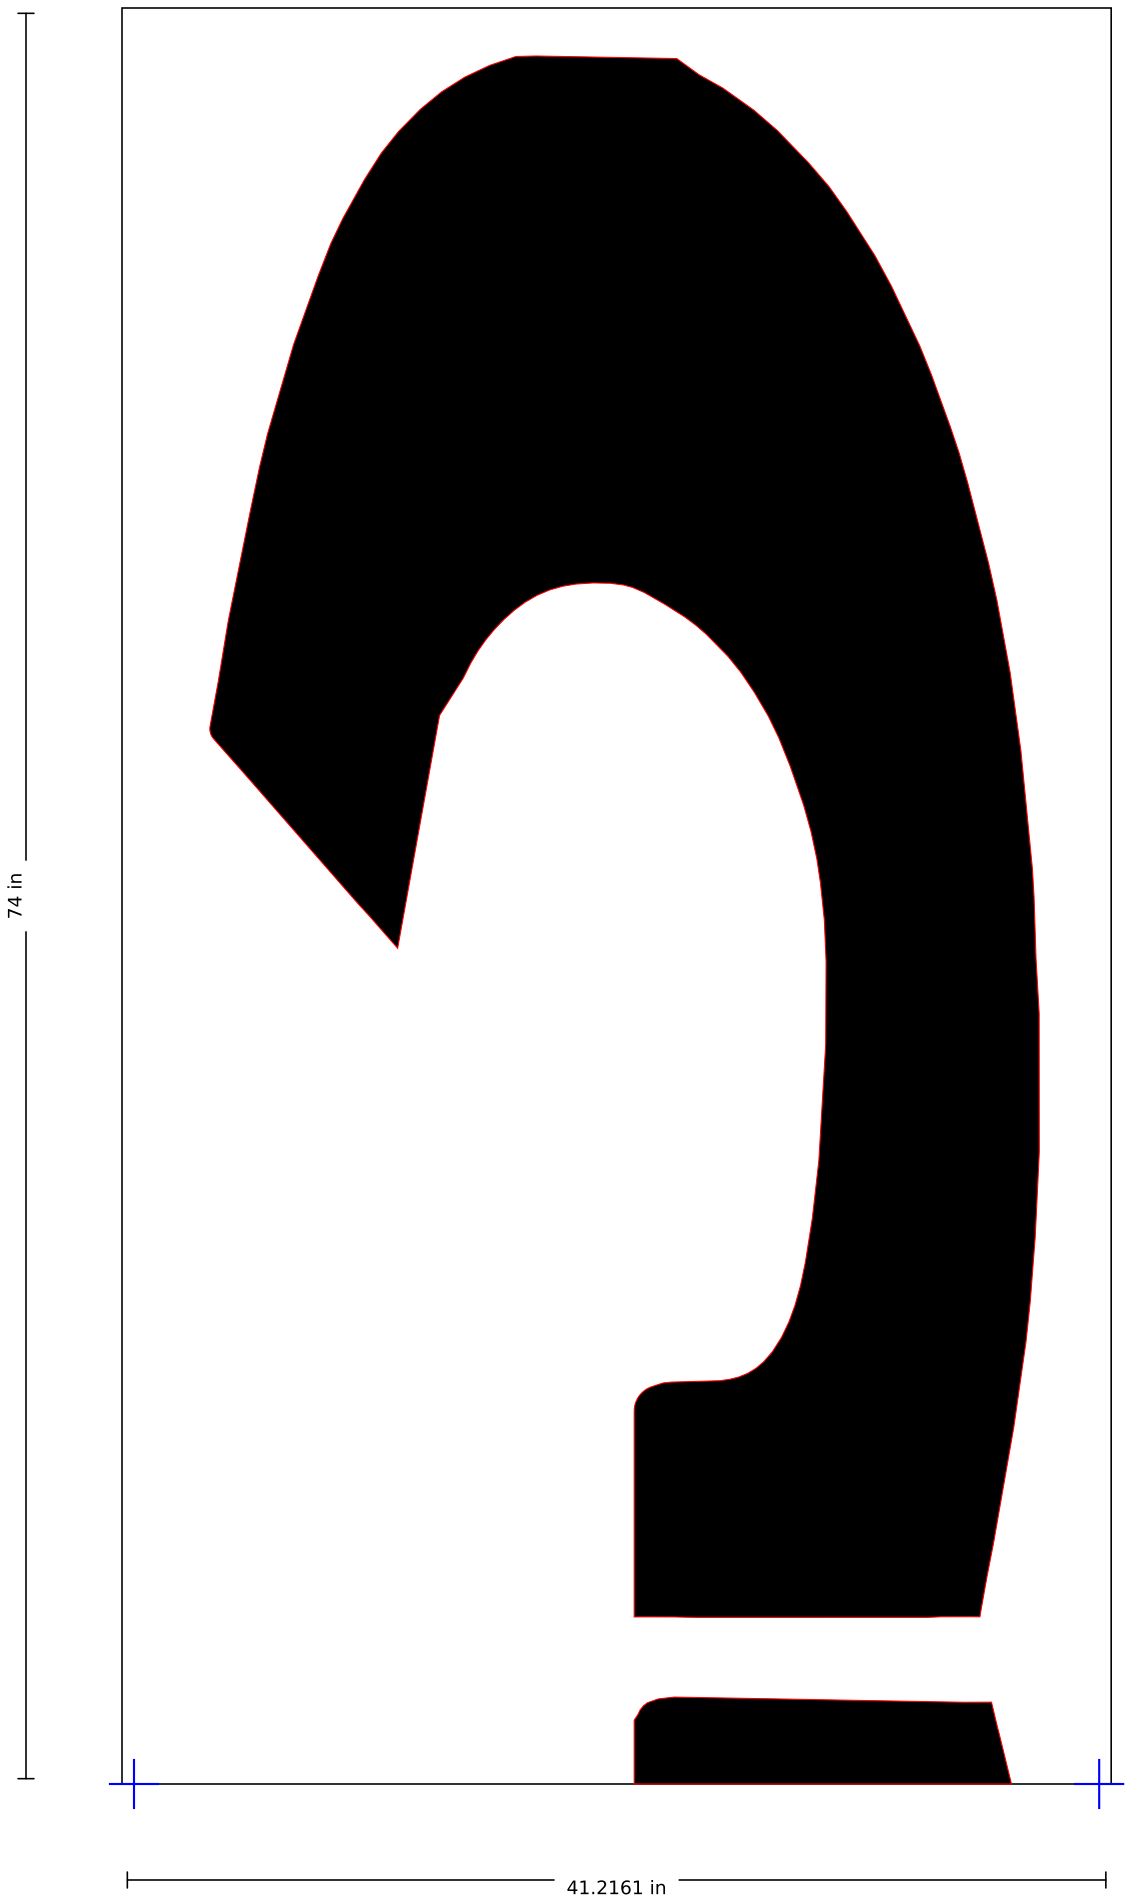

SSS-FAA-144-03-4

144" FAA Airport "4" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 43 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

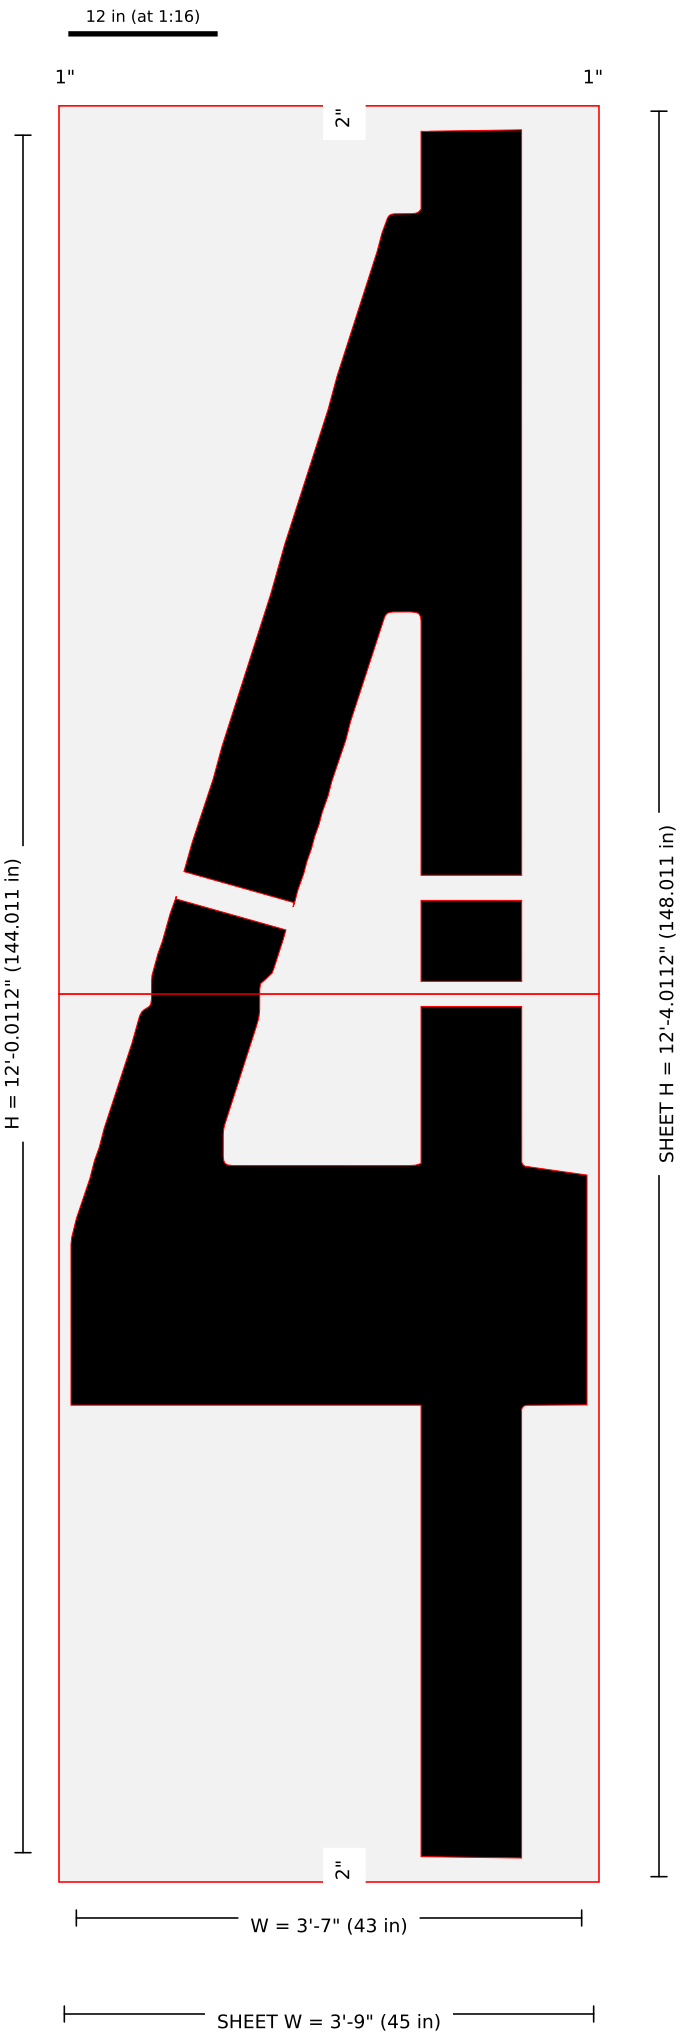

Pieces: 2 (1 x 2); blanks (in): 45 x 74.006, 45 x 74.006 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1444-144in-FAA-Airport-Number-4-157x60-2.jpg: width 43 from image scale (43.09); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.51 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (33.36,80.85) stroke 8.381" w=2.095"; (13.66,79.77) stroke 9.496" w=2.374" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-4 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

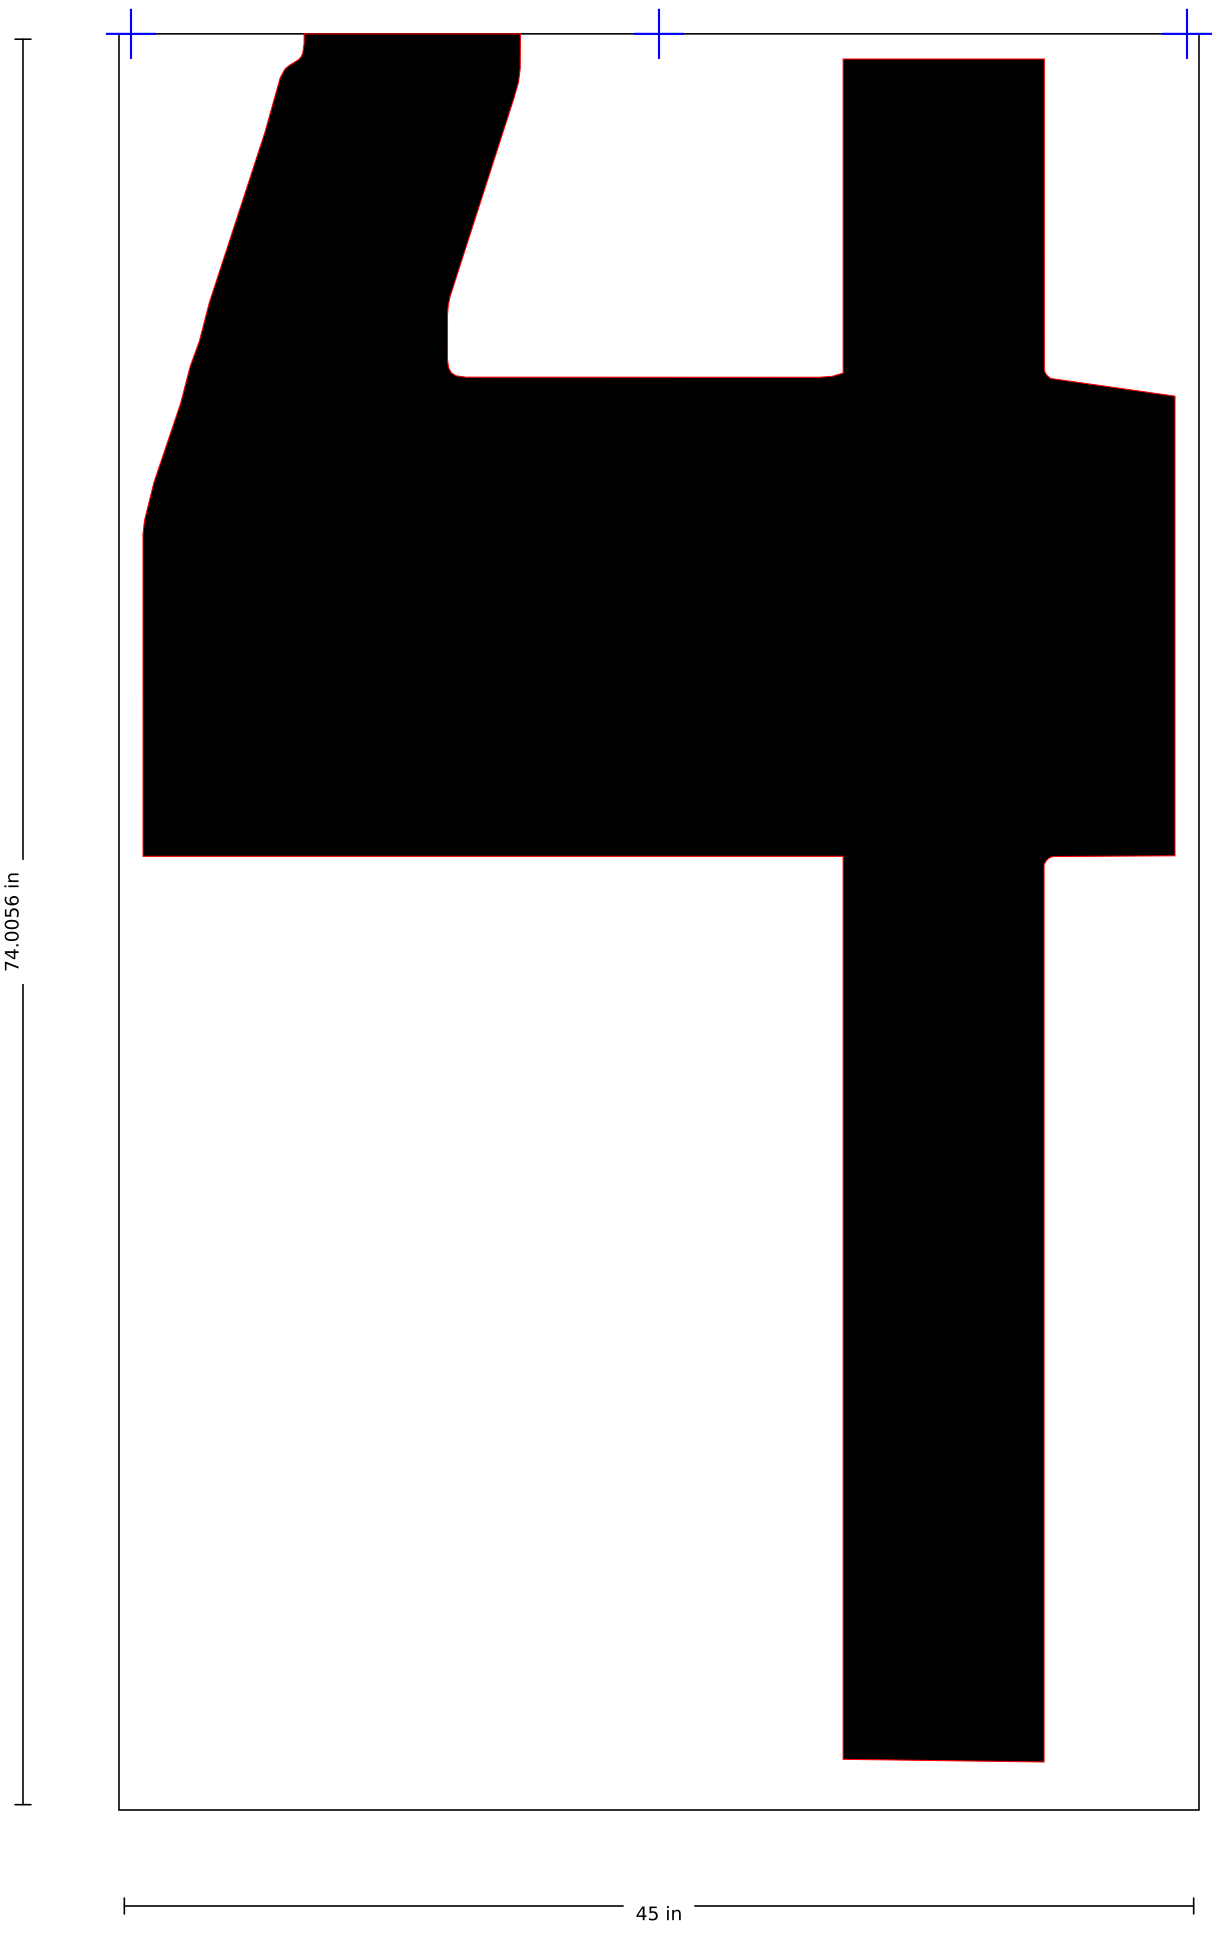

SSS-FAA-144-03-4 · piece 2 of 2 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

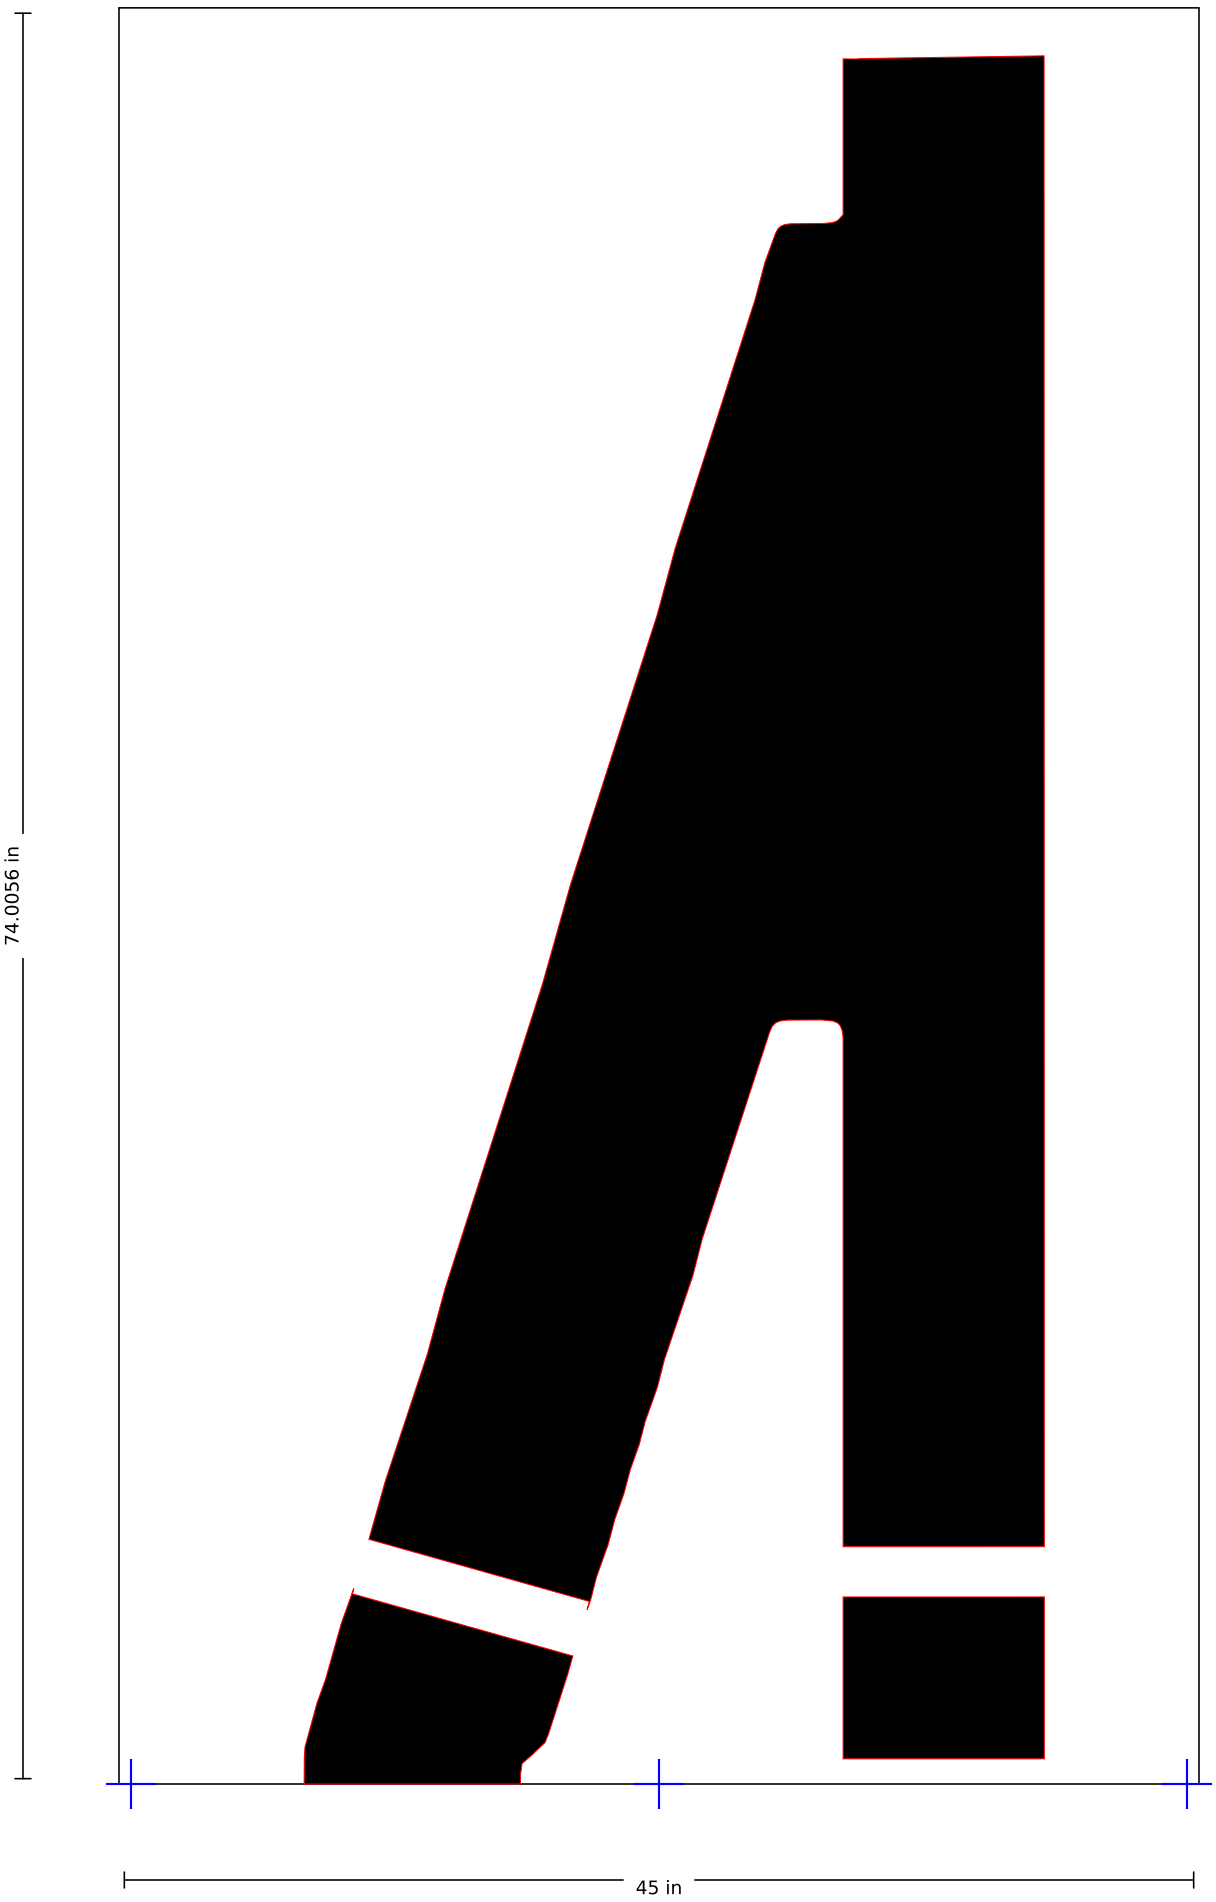

SSS-FAA-144-03-5

144" FAA Airport "5" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut



Pieces: 2 (1 x 2); blanks (in): 41.5 x 74, 41.5 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1445-144in-FAA-Airport-Number-5-157x60-2.jpg: width 39.5 from image scale (39.27); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-5 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

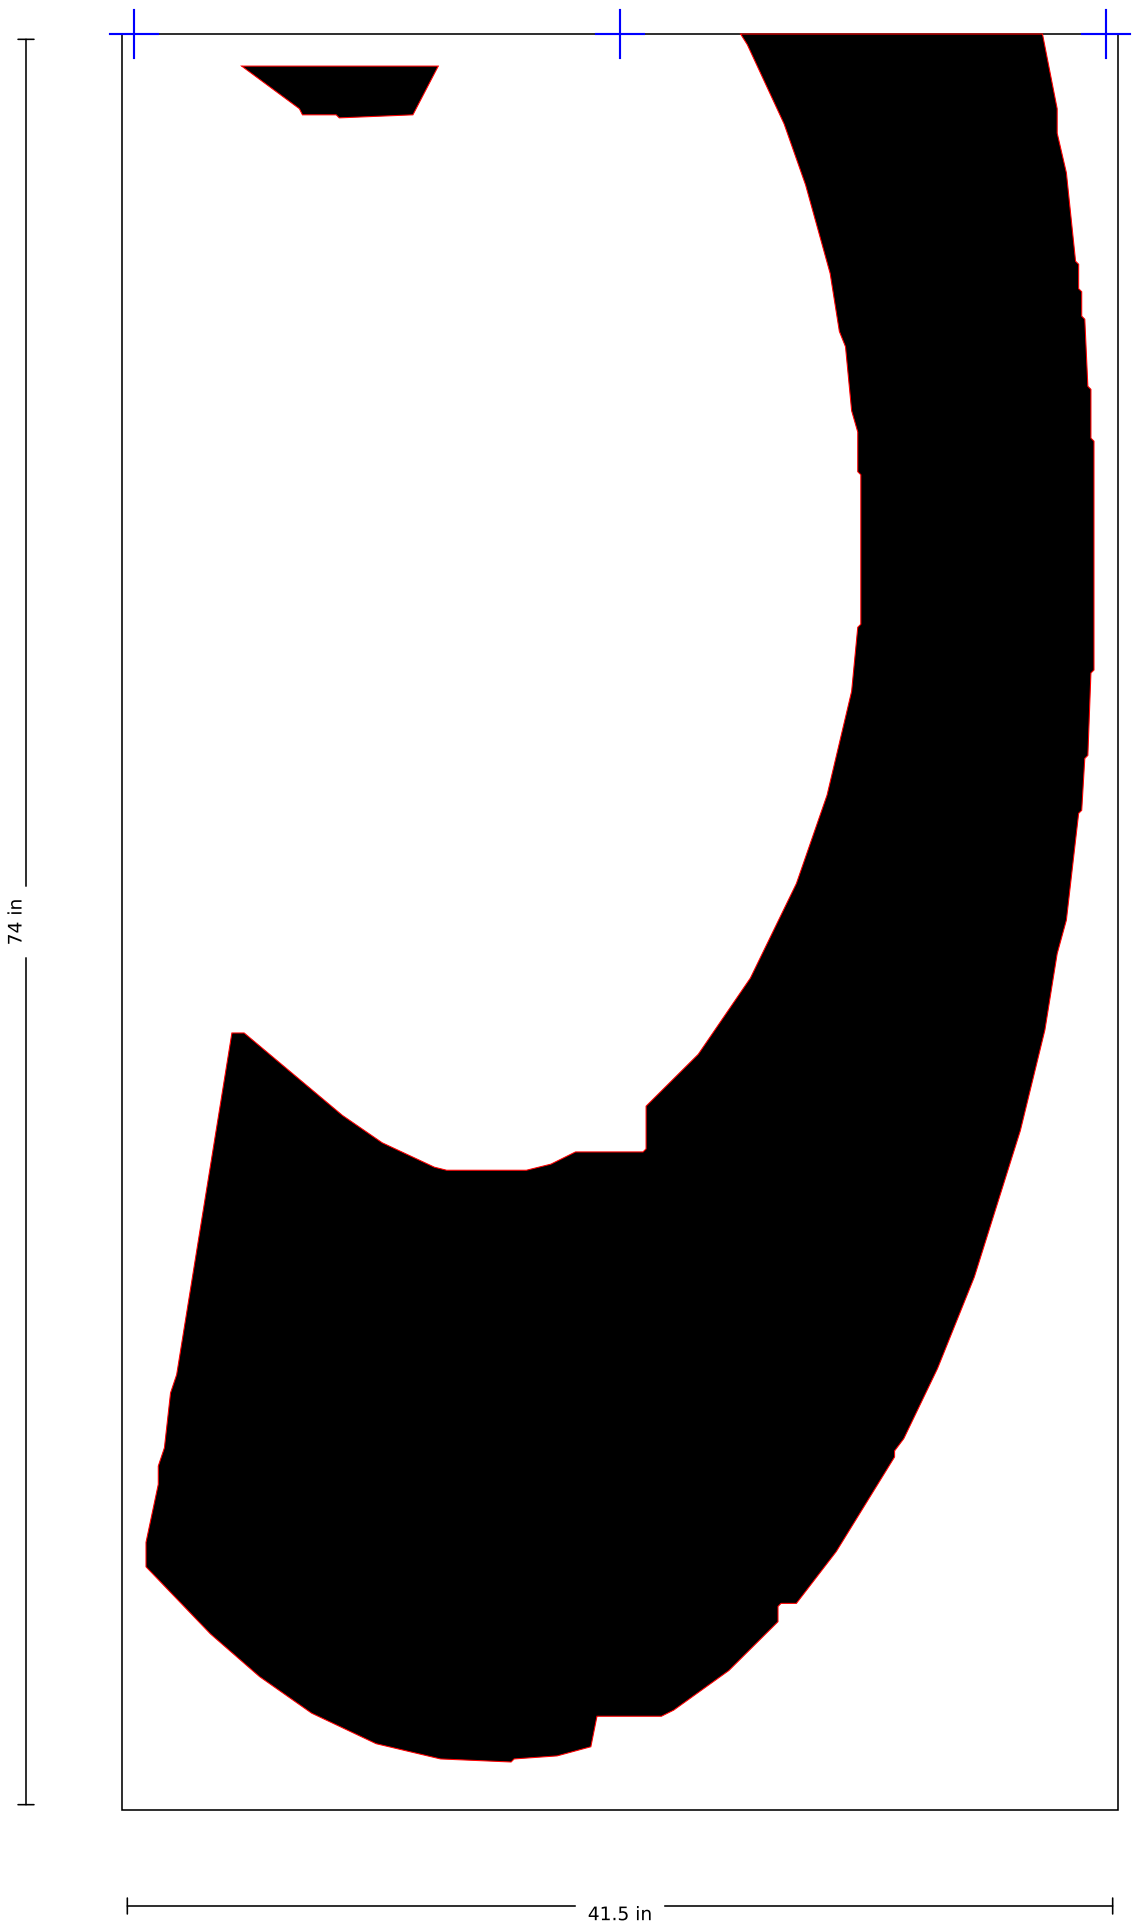

SSS-FAA-144-03-5 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

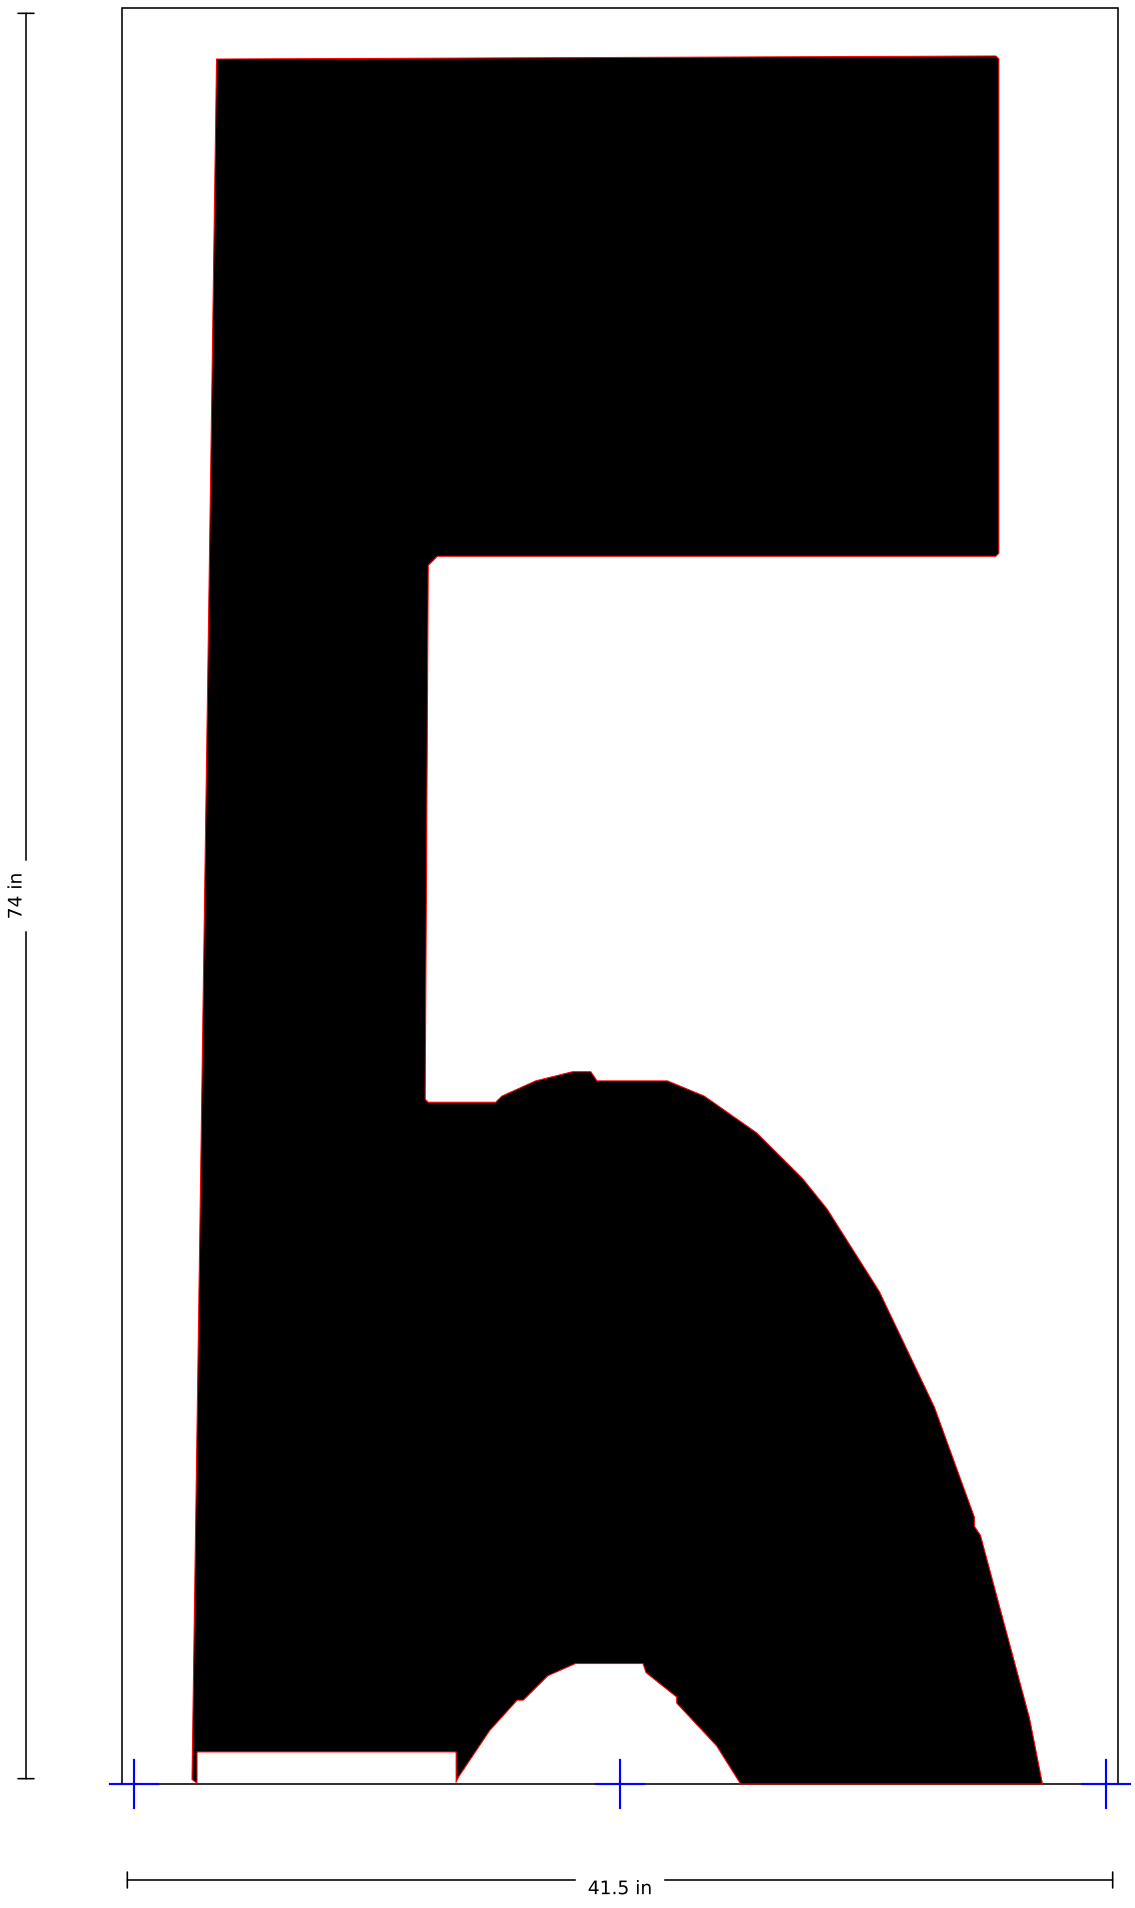

SSS-FAA-144-03-6

144" FAA Airport "6" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

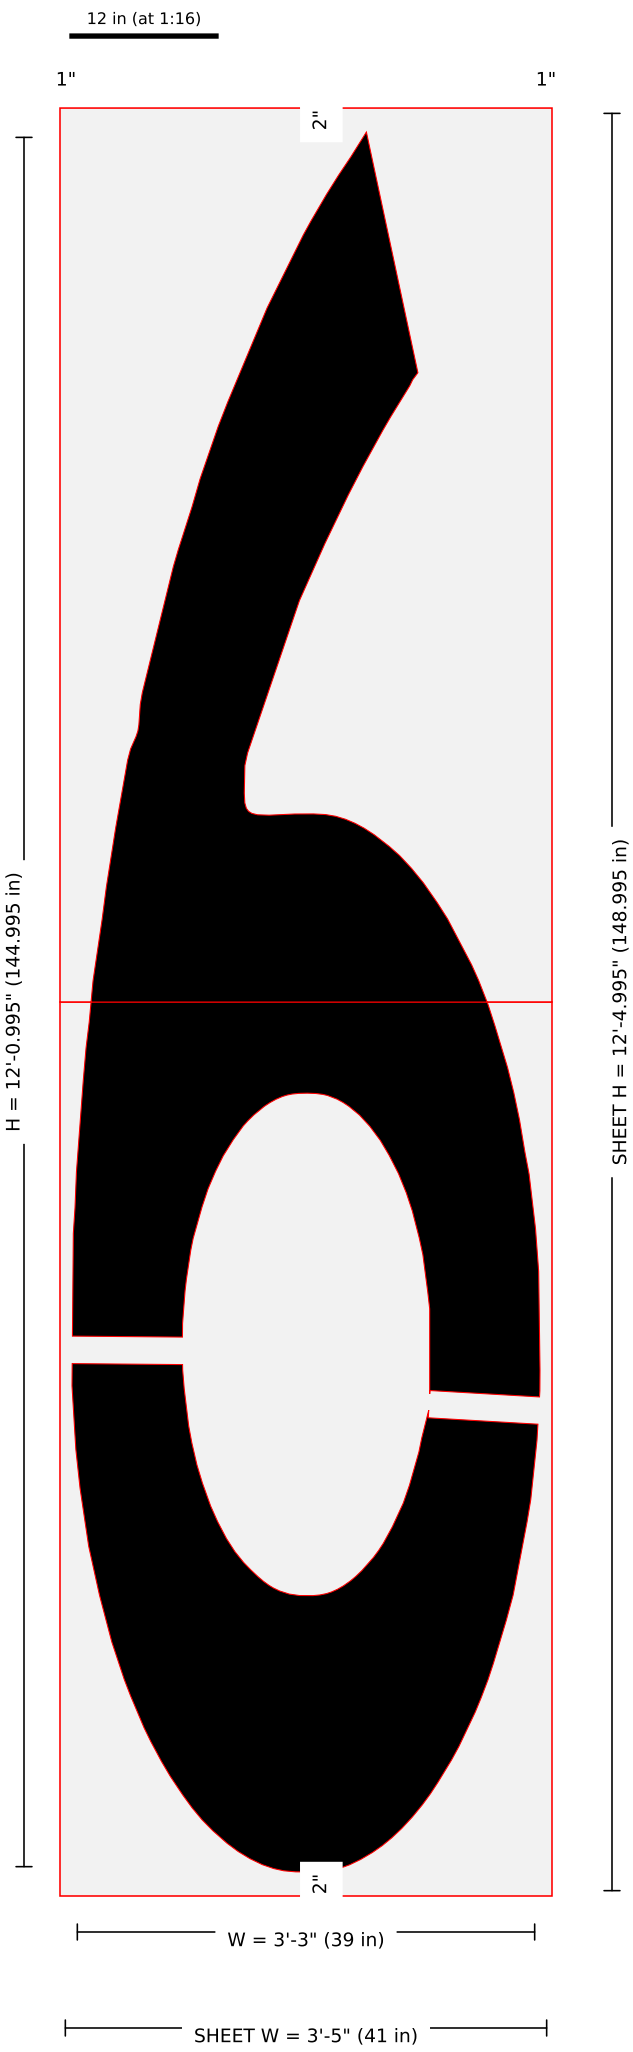

Pieces: 2 (1 x 2); blanks (in): 41 x 74.498, 41 x 74.498 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1446-144in-FAA-Airport-Number-6-157x60-2.jpg: width 39 from image scale (39.11); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (34.35,38.72) stroke 9.101" w=2.275"; (4.61,43.47) stroke 9.168" w=2.292" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-6 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

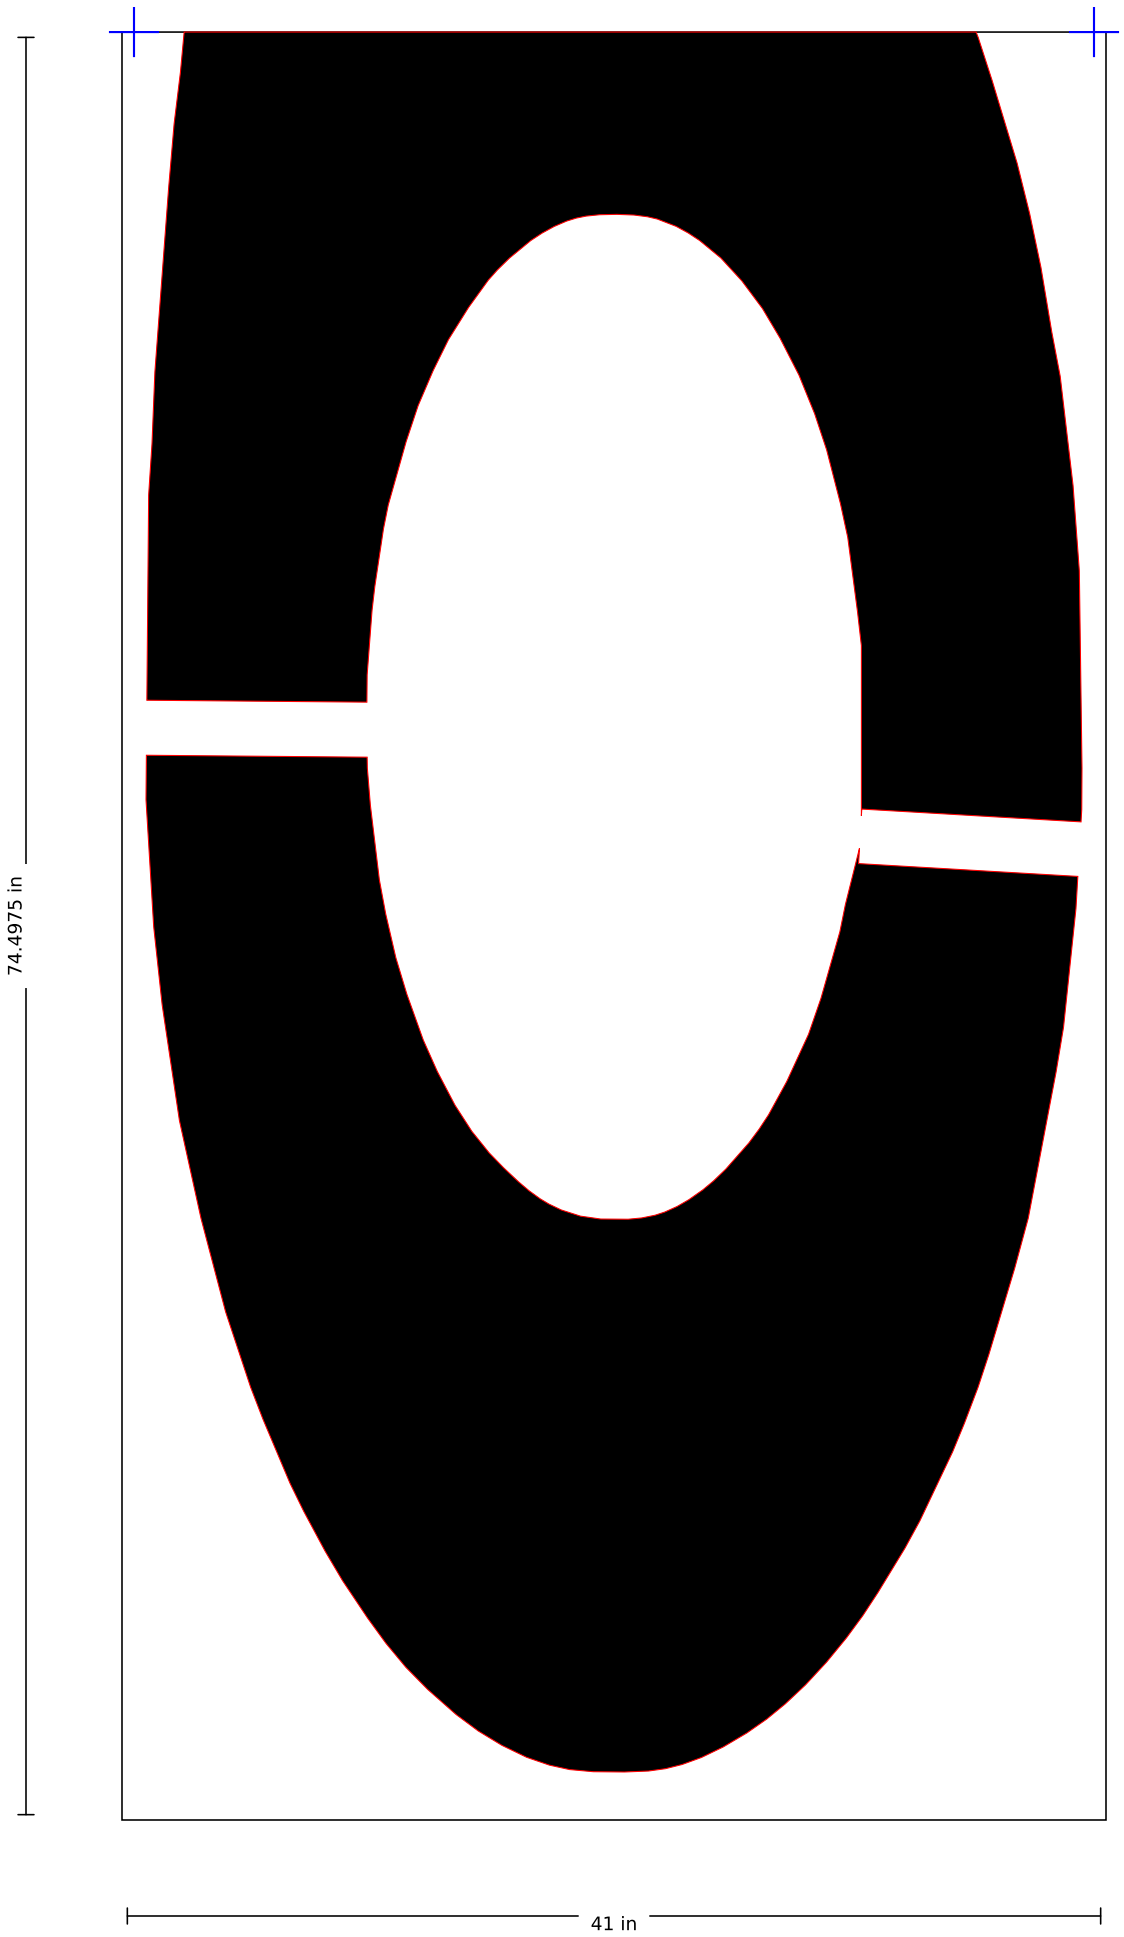

SSS-FAA-144-03-6 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

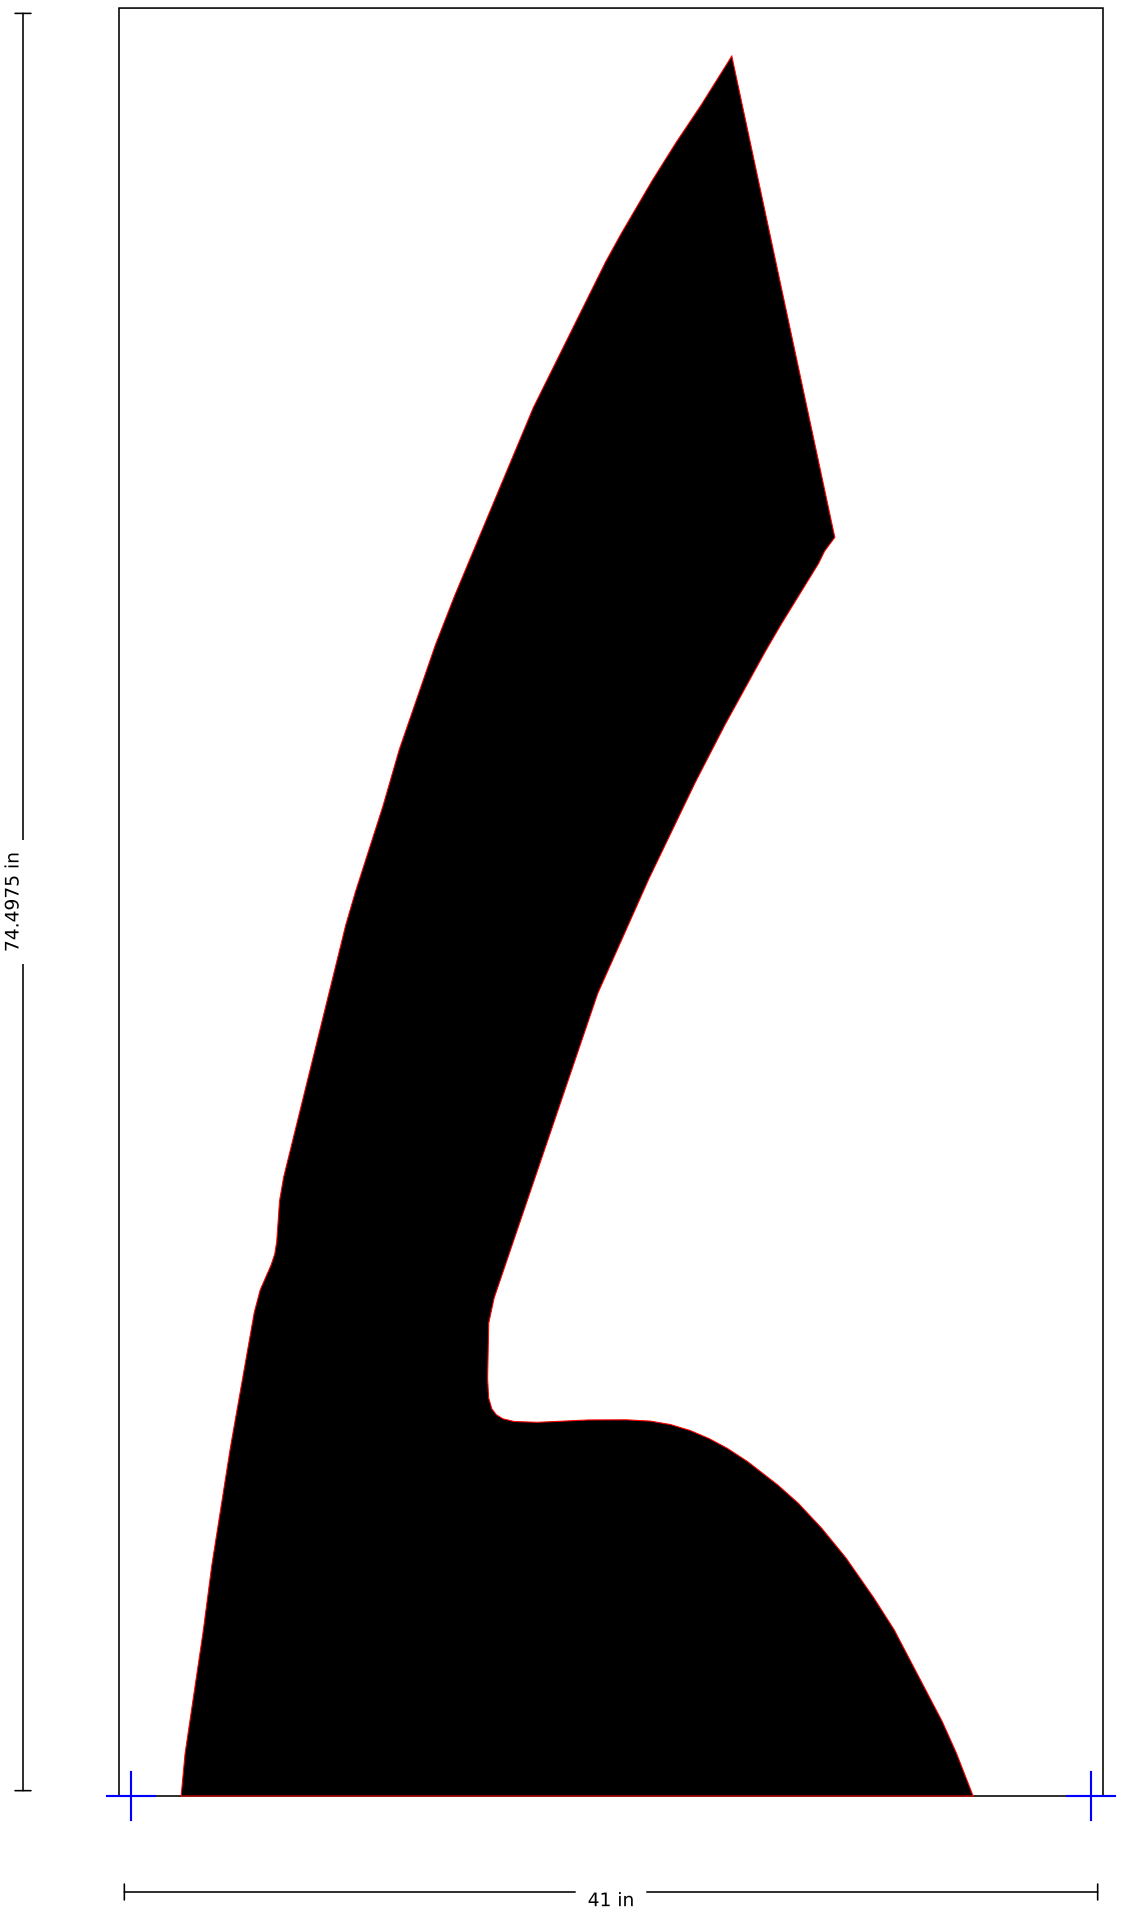


SSS-FAA-144-03-7

144" FAA Airport "7" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

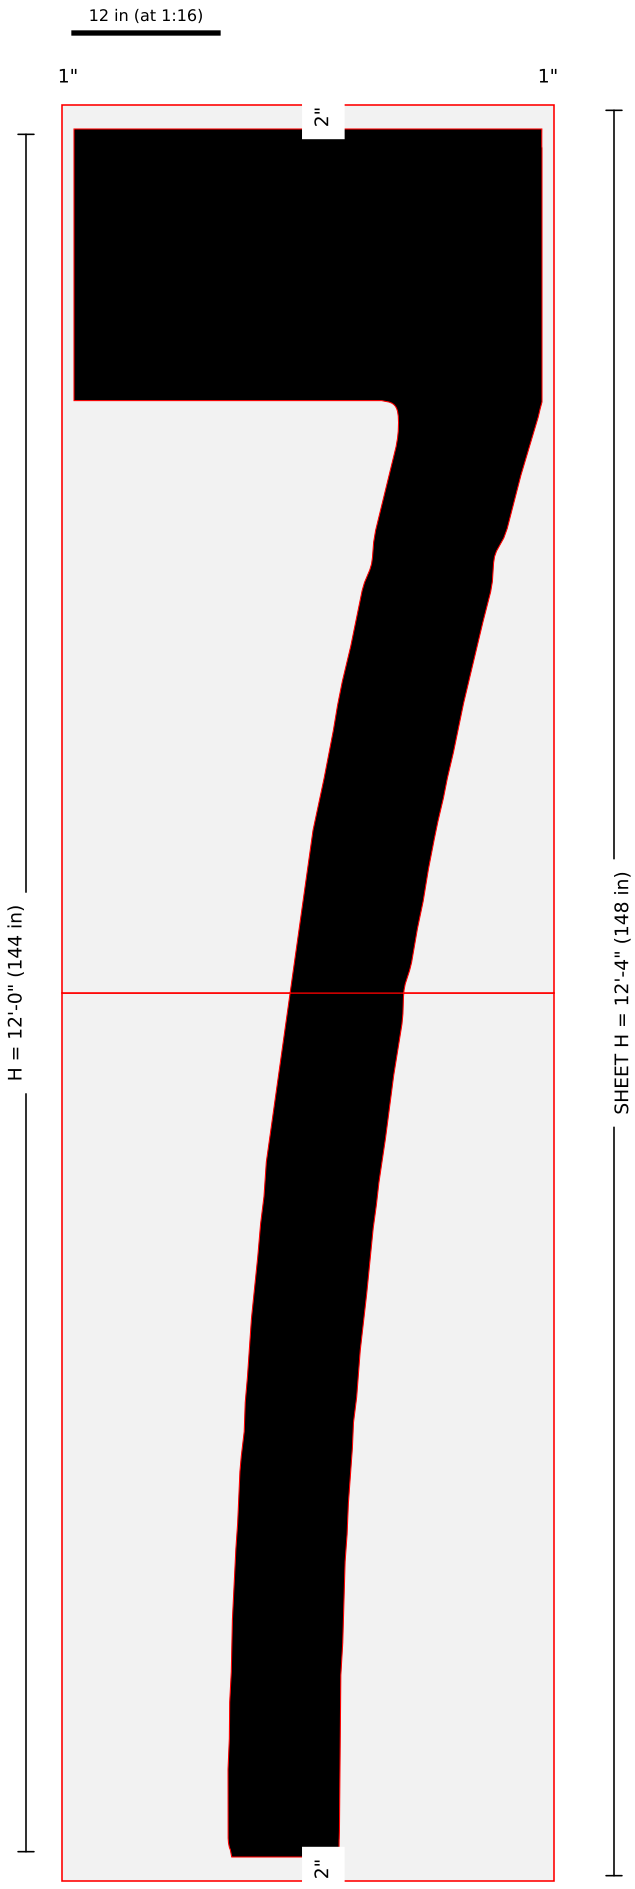




Pieces: 2 (1 x 2); blanks (in): 41 x 74, 41 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1447-144in-FAA-Airport-Number-7-157x60-2.jpg: width 39 from image scale (39.02); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-7 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

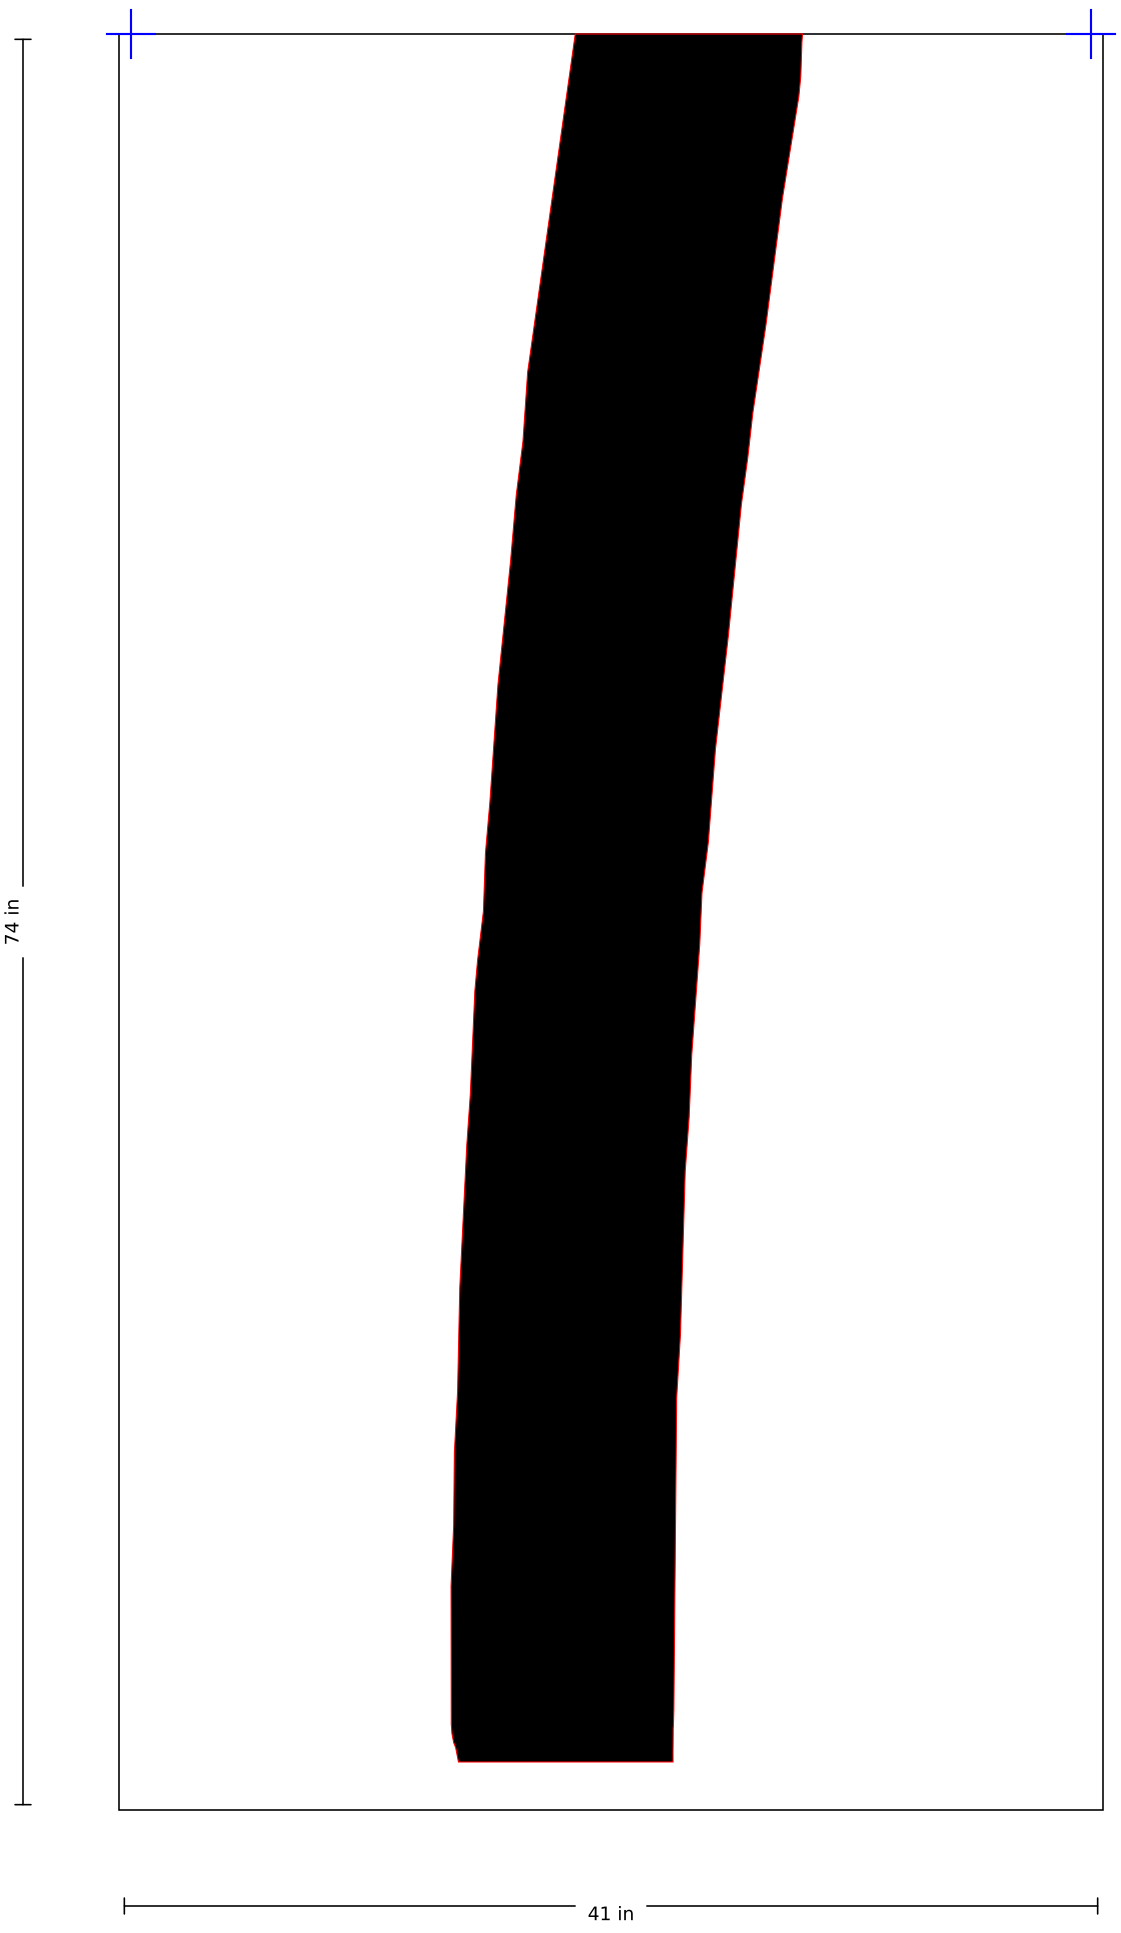

SSS-FAA-144-03-7 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

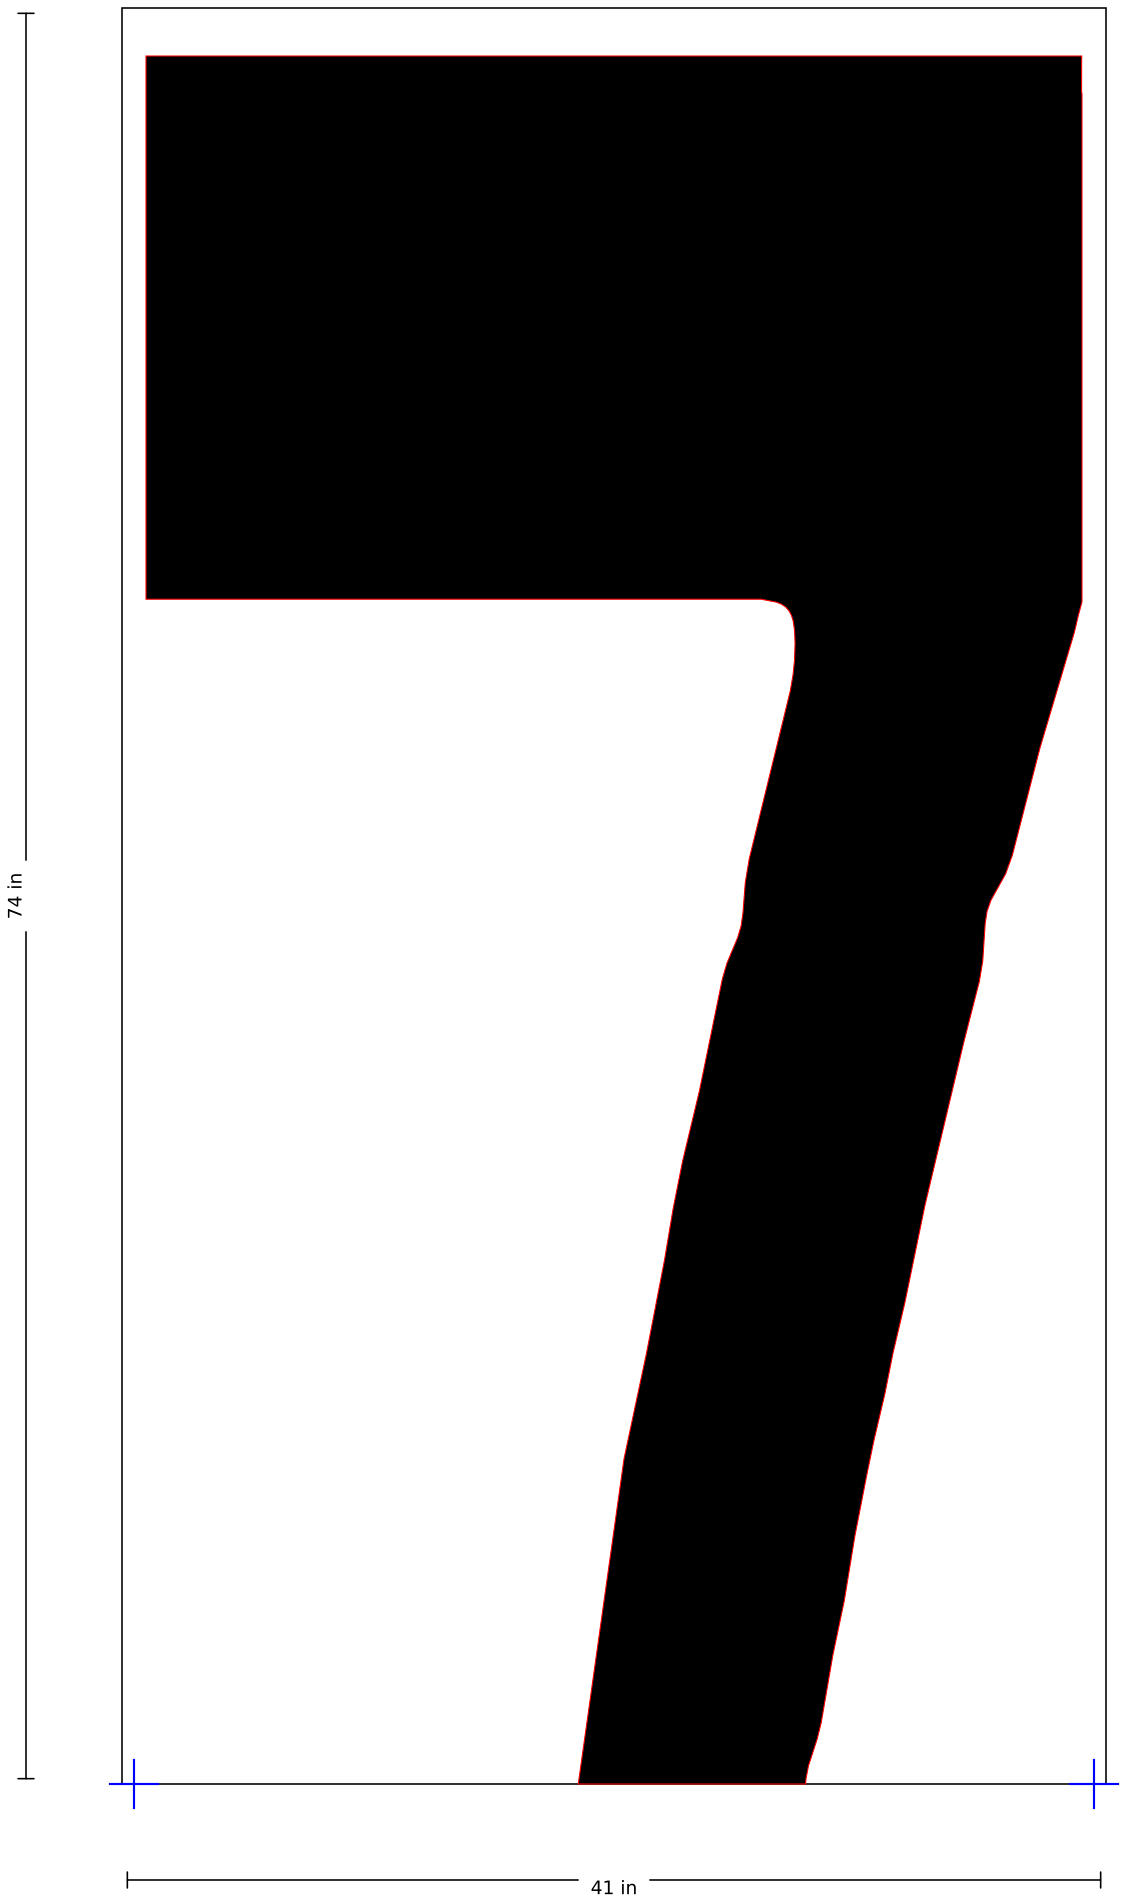

SSS-FAA-144-03-8

144" FAA Airport "8" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

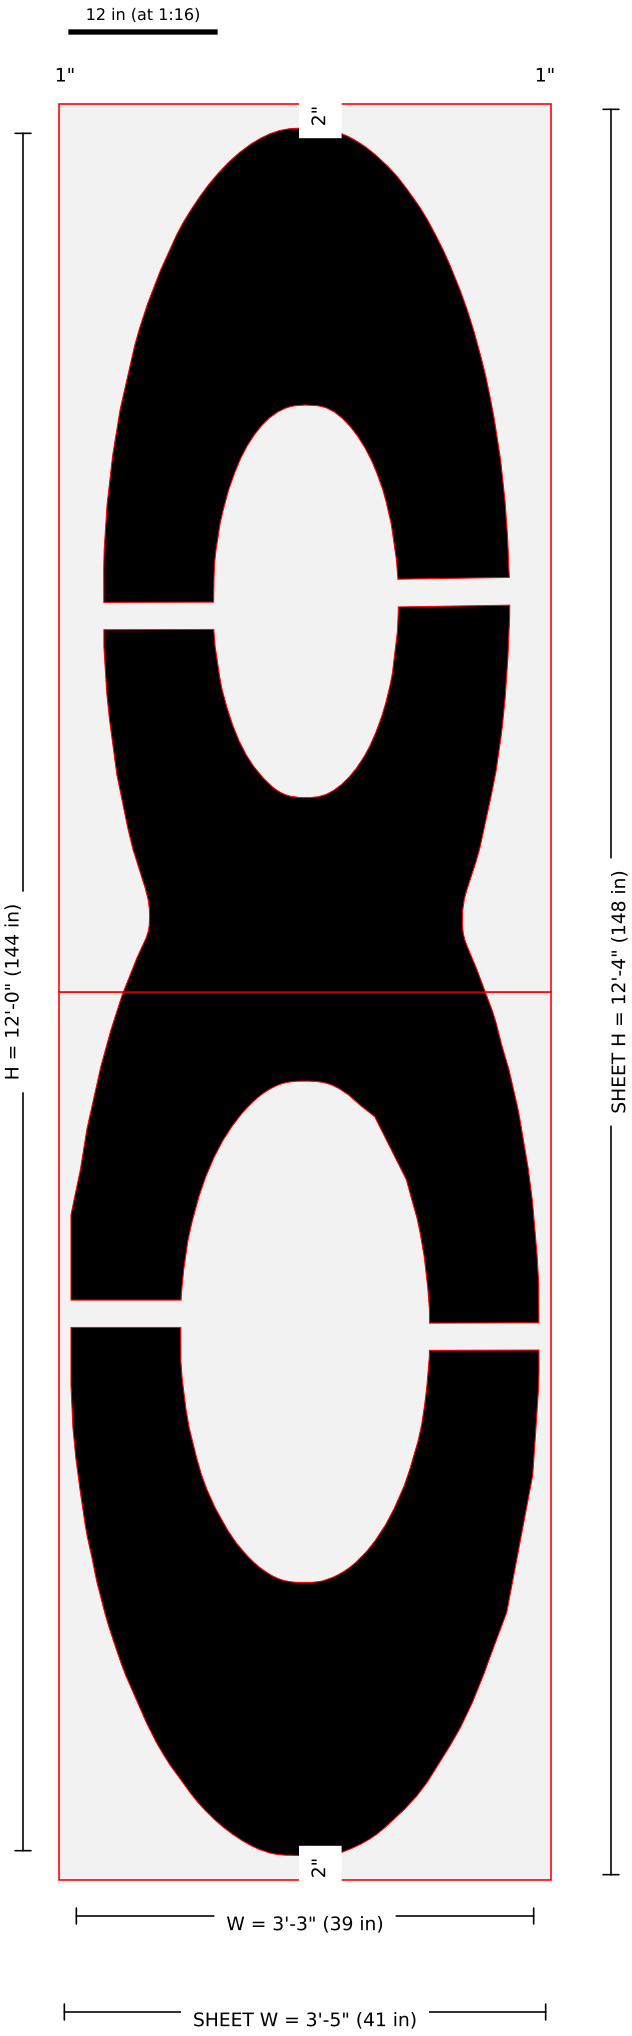

Pieces: 2 (1 x 2); blanks (in): 41 x 74, 41 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1448-144in-FAA-Airport-Number-8-157x60-2.jpg: width 39 from image scale (38.87); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (34.45,43.29) stroke 9.092" w=2.273"; (4.57,45.19) stroke 9.14" w=2.285"; (7.3,103.34) stroke 9.124" w=2.281"; (31.92,105.32) stroke 9.262" w=2.316" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-8 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

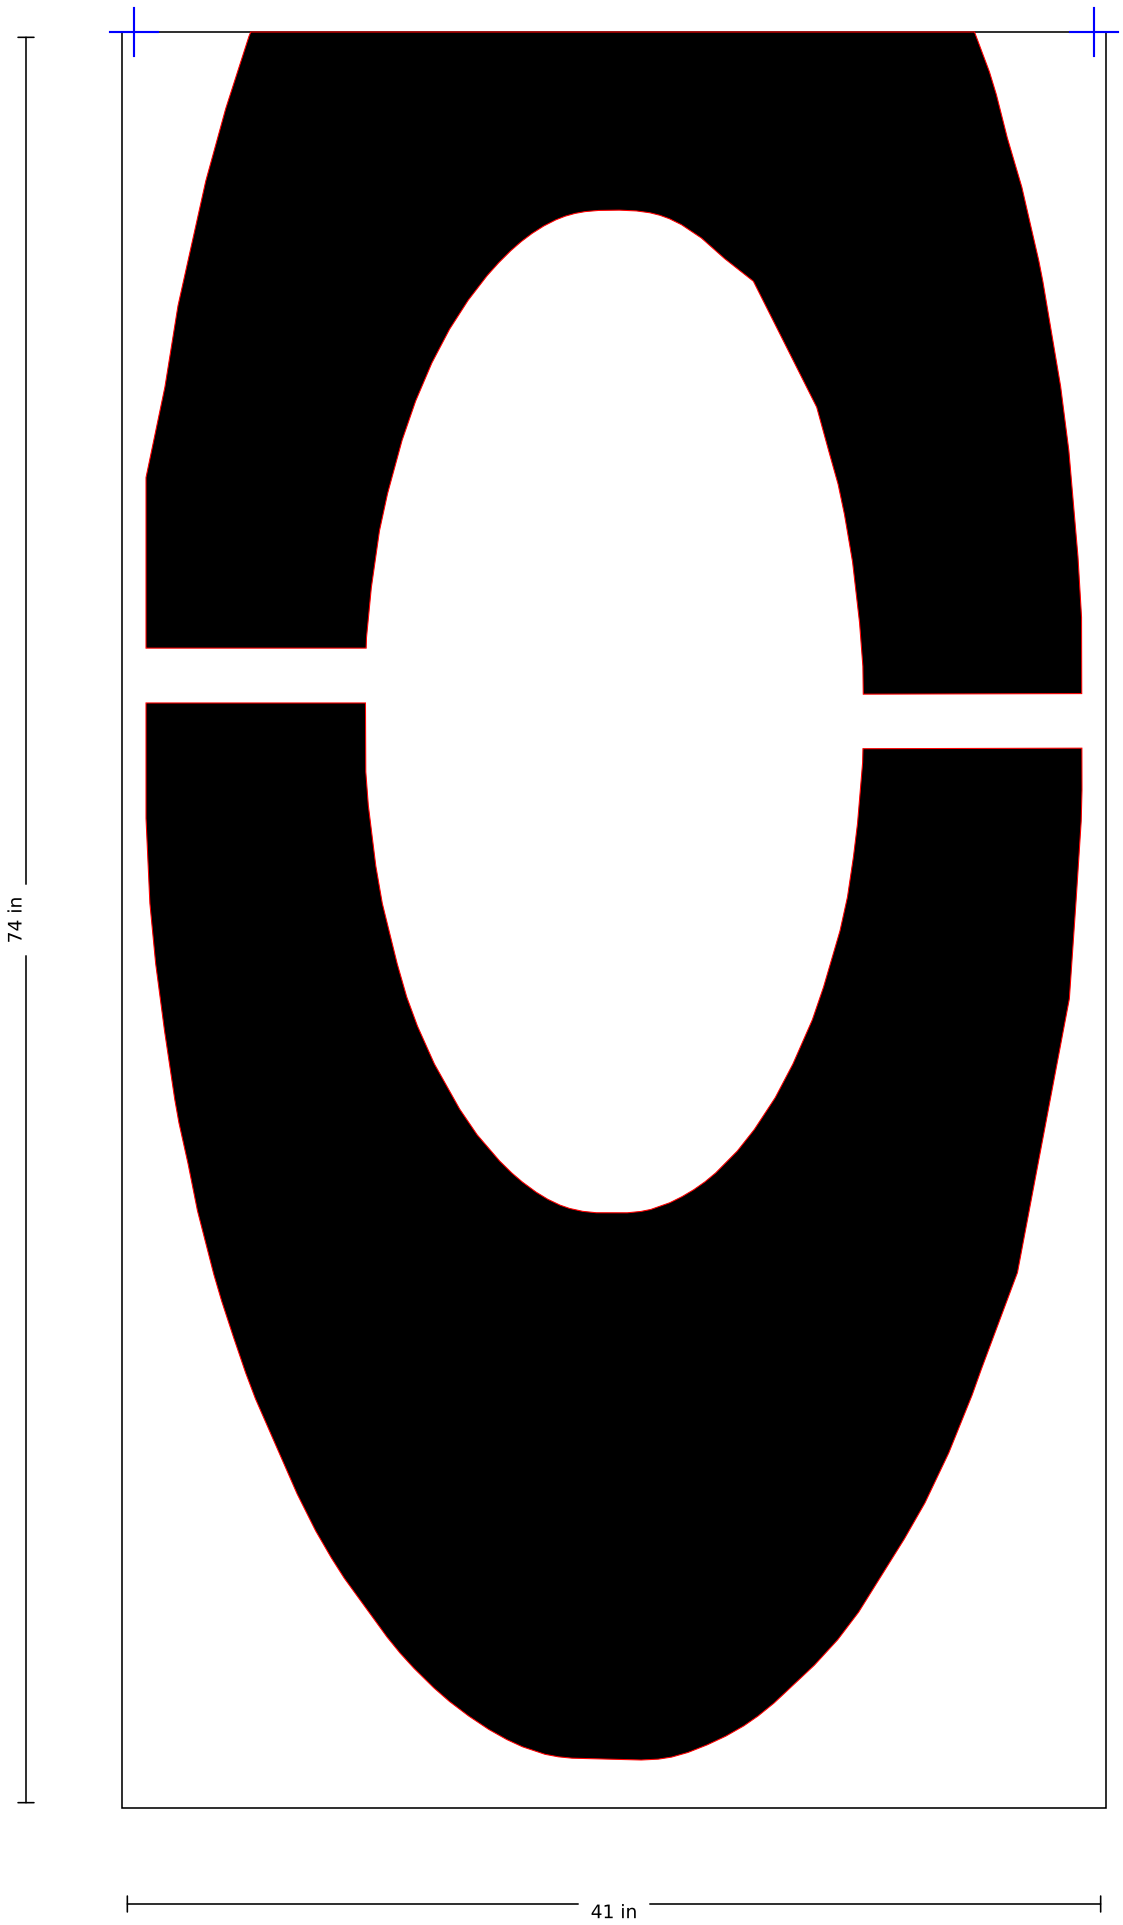

SSS-FAA-144-03-8 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

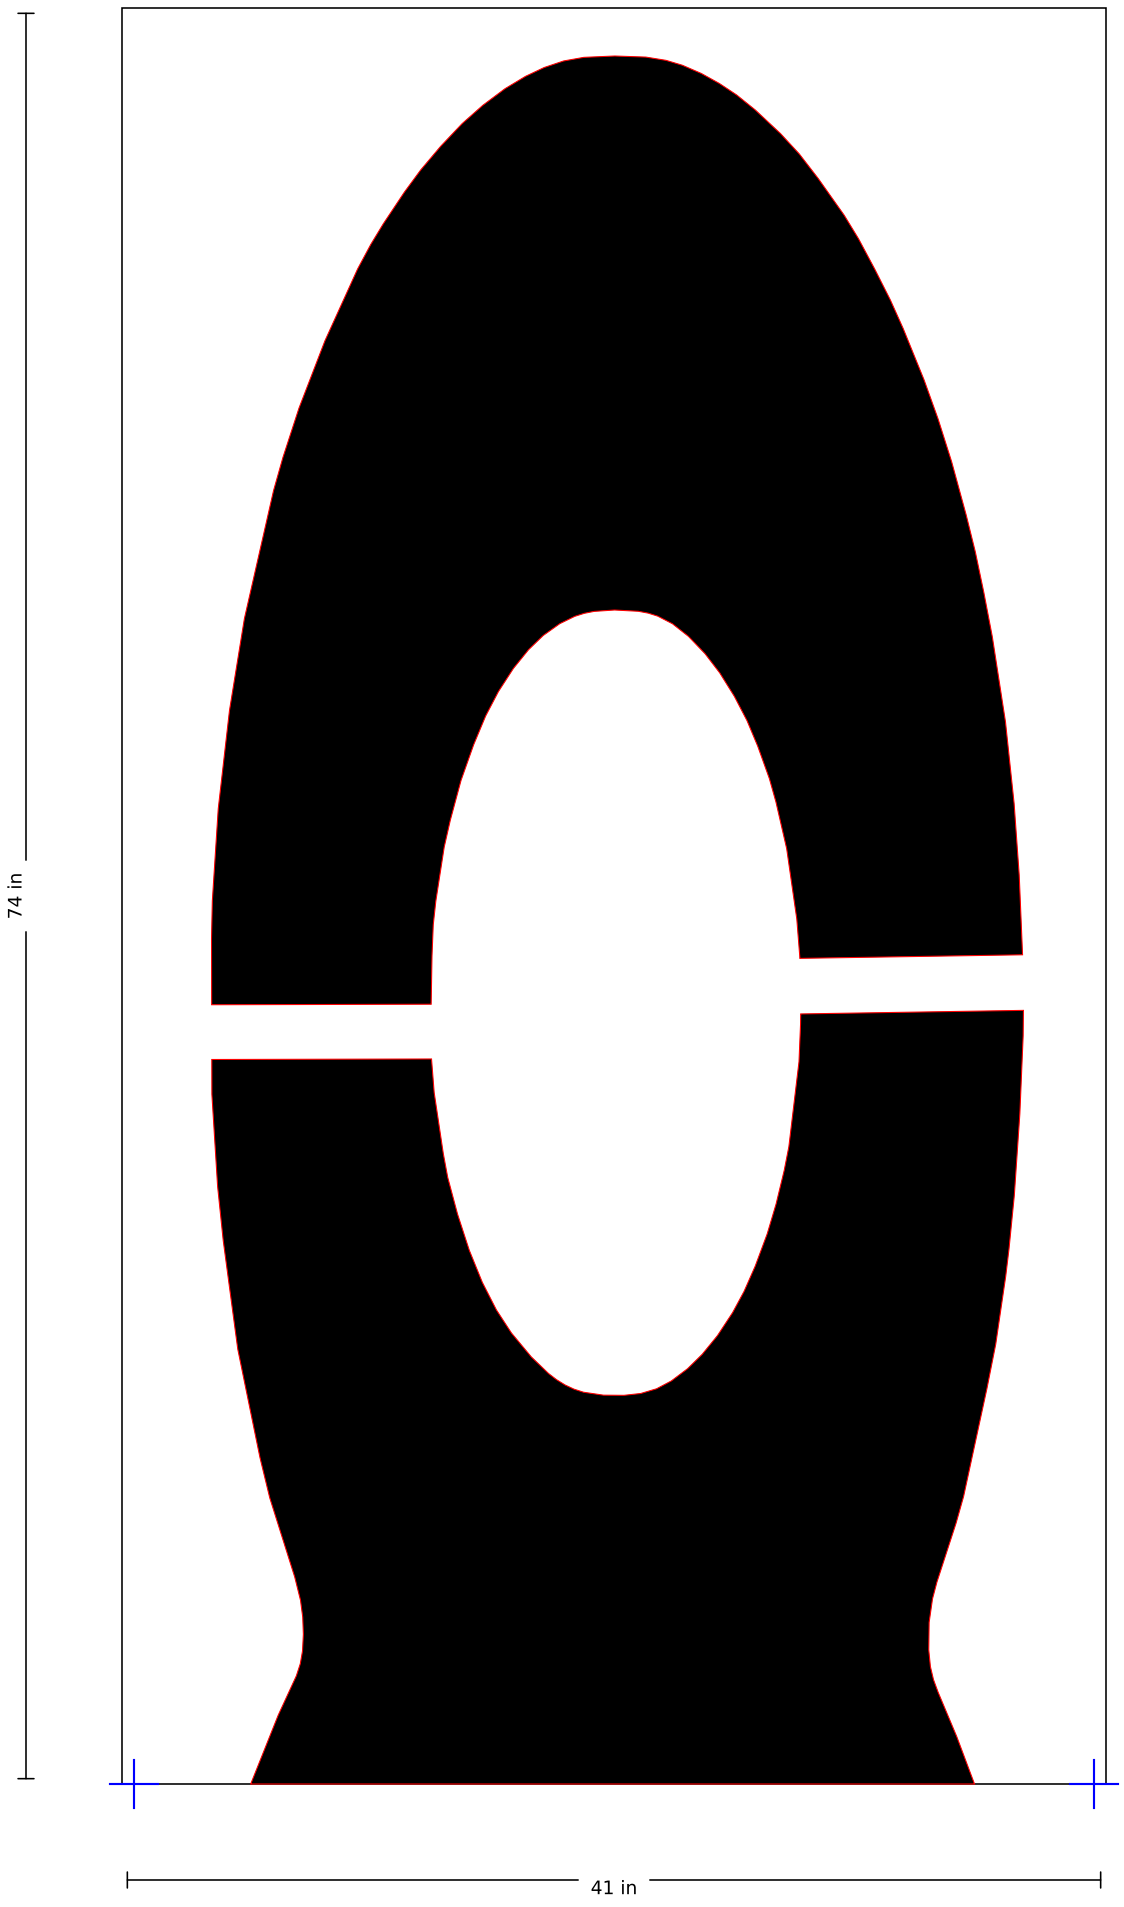

SSS-FAA-144-03-9

144" FAA Airport "9" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

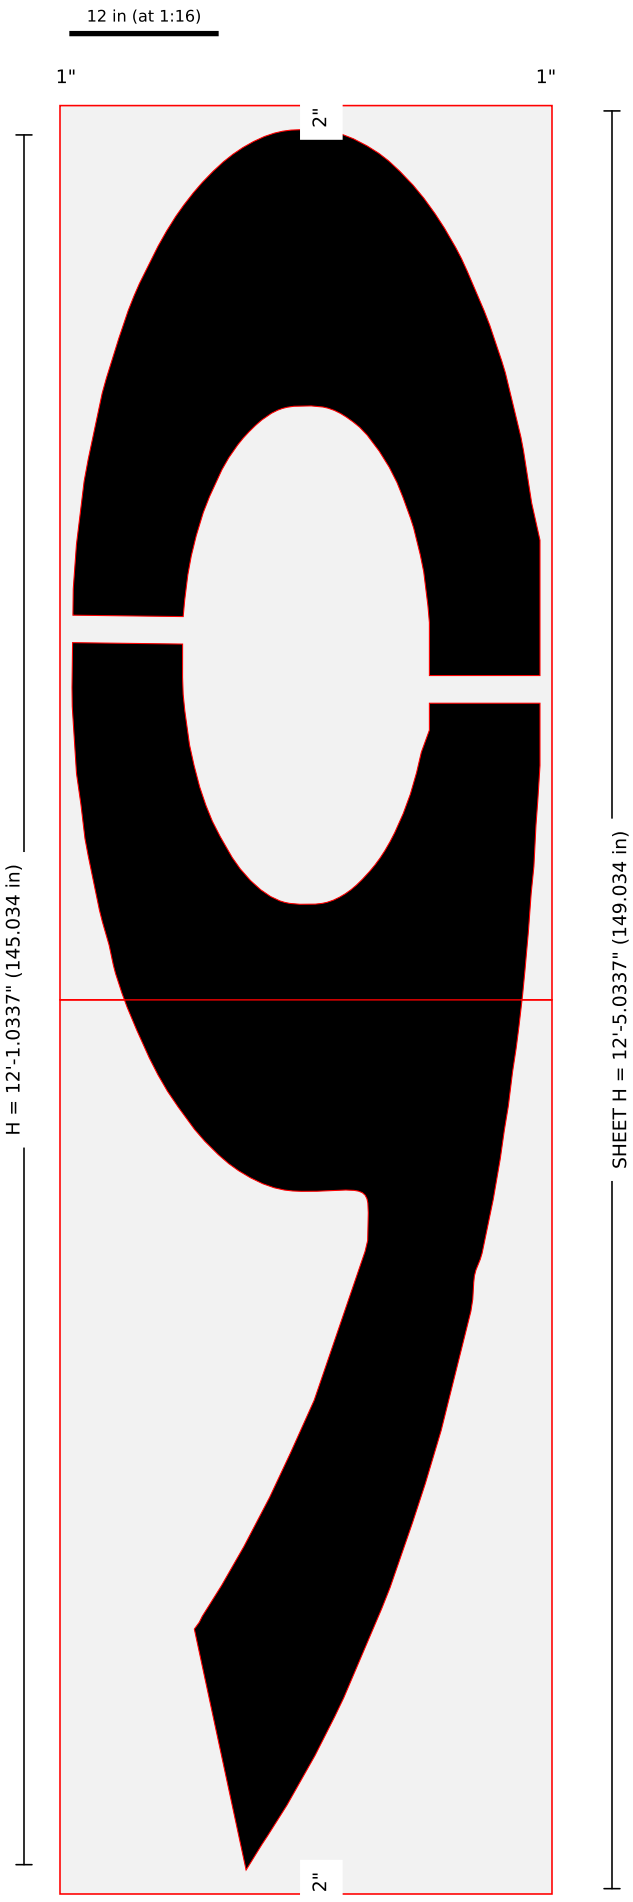

Pieces: 2 (1 x 2); blanks (in): 41 x 74.517, 41 x 74.517 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1449-144in-FAA-Airport-Number-9-157x60-2.jpg: width 39 from image scale (38.90); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (4.64,102.33) stroke 9.158" w=2.289"; (34.39,97.35) stroke 9.217" w=2.304" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-9 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

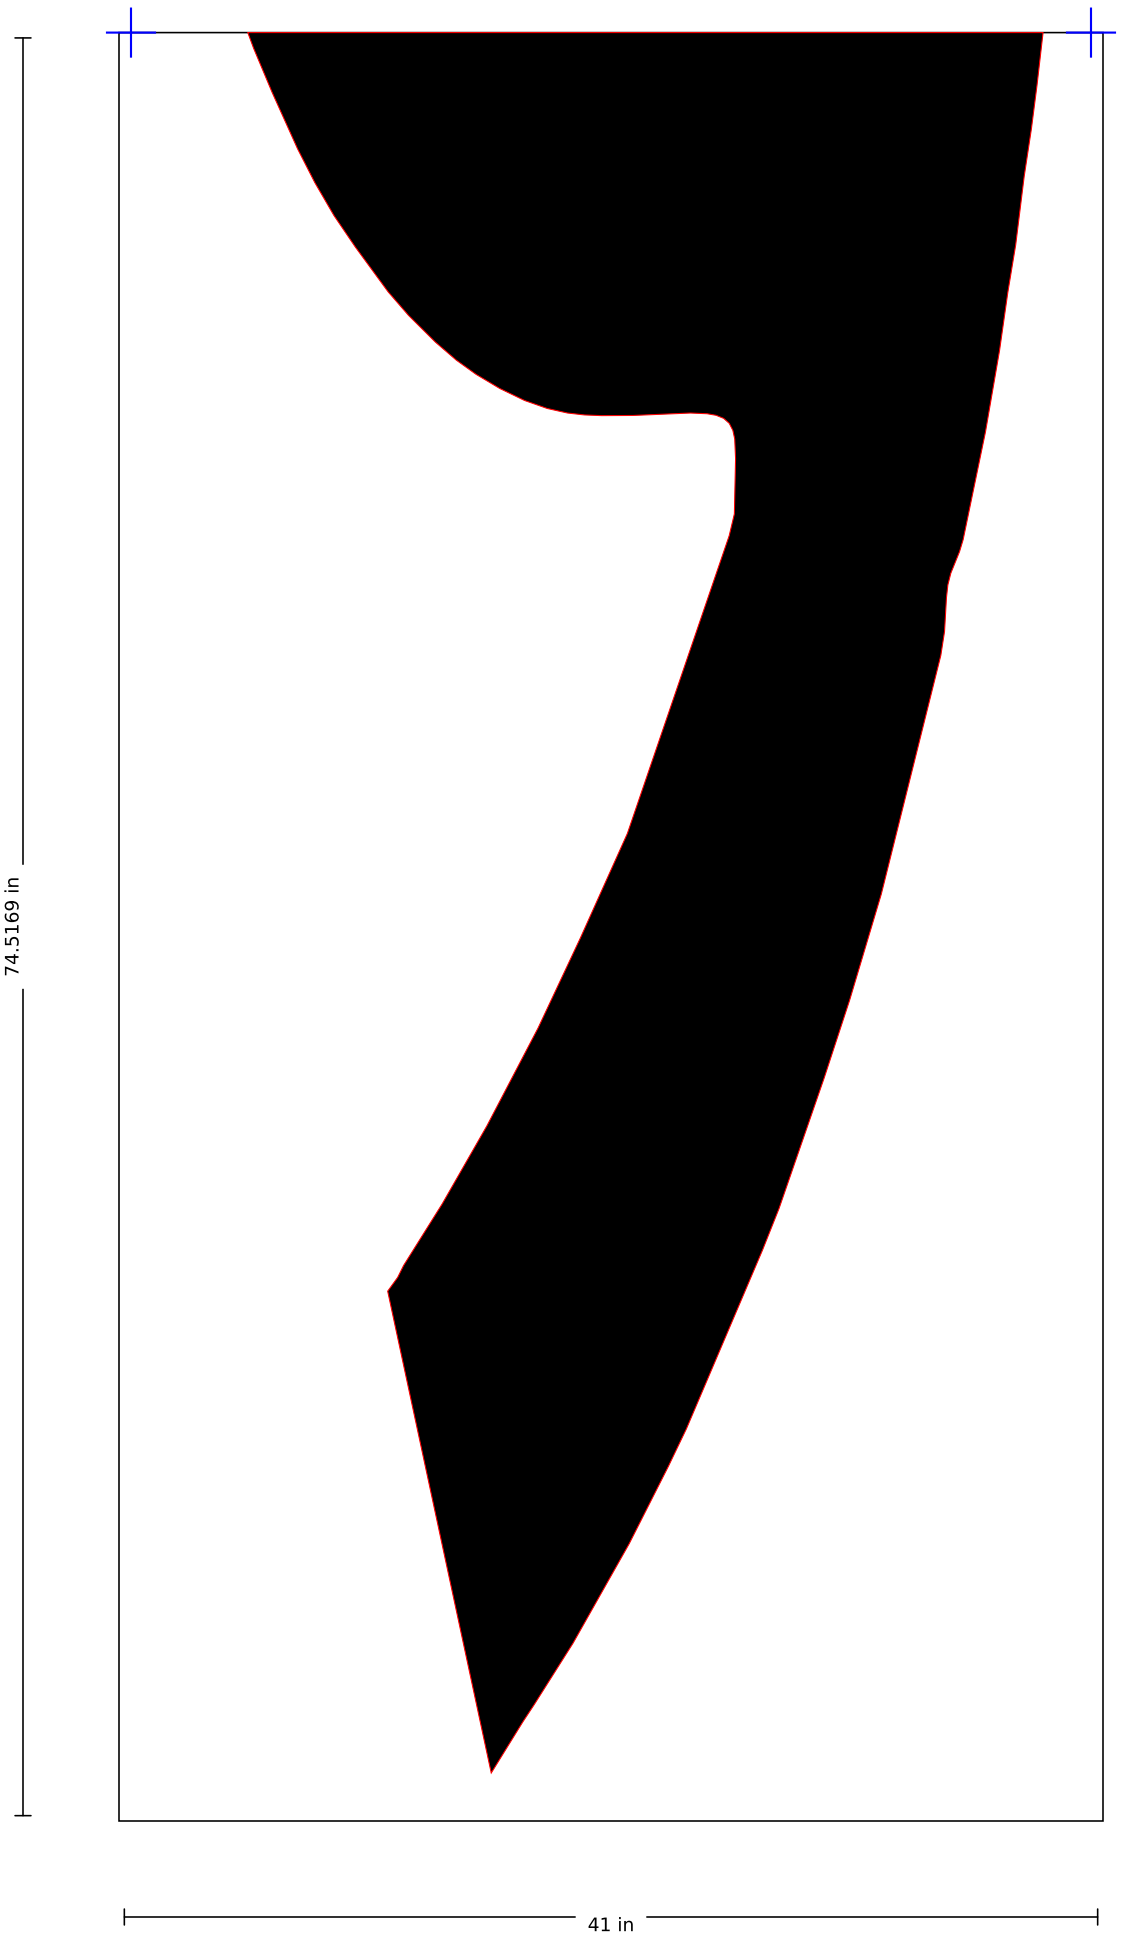

SSS-FAA-144-03-9 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

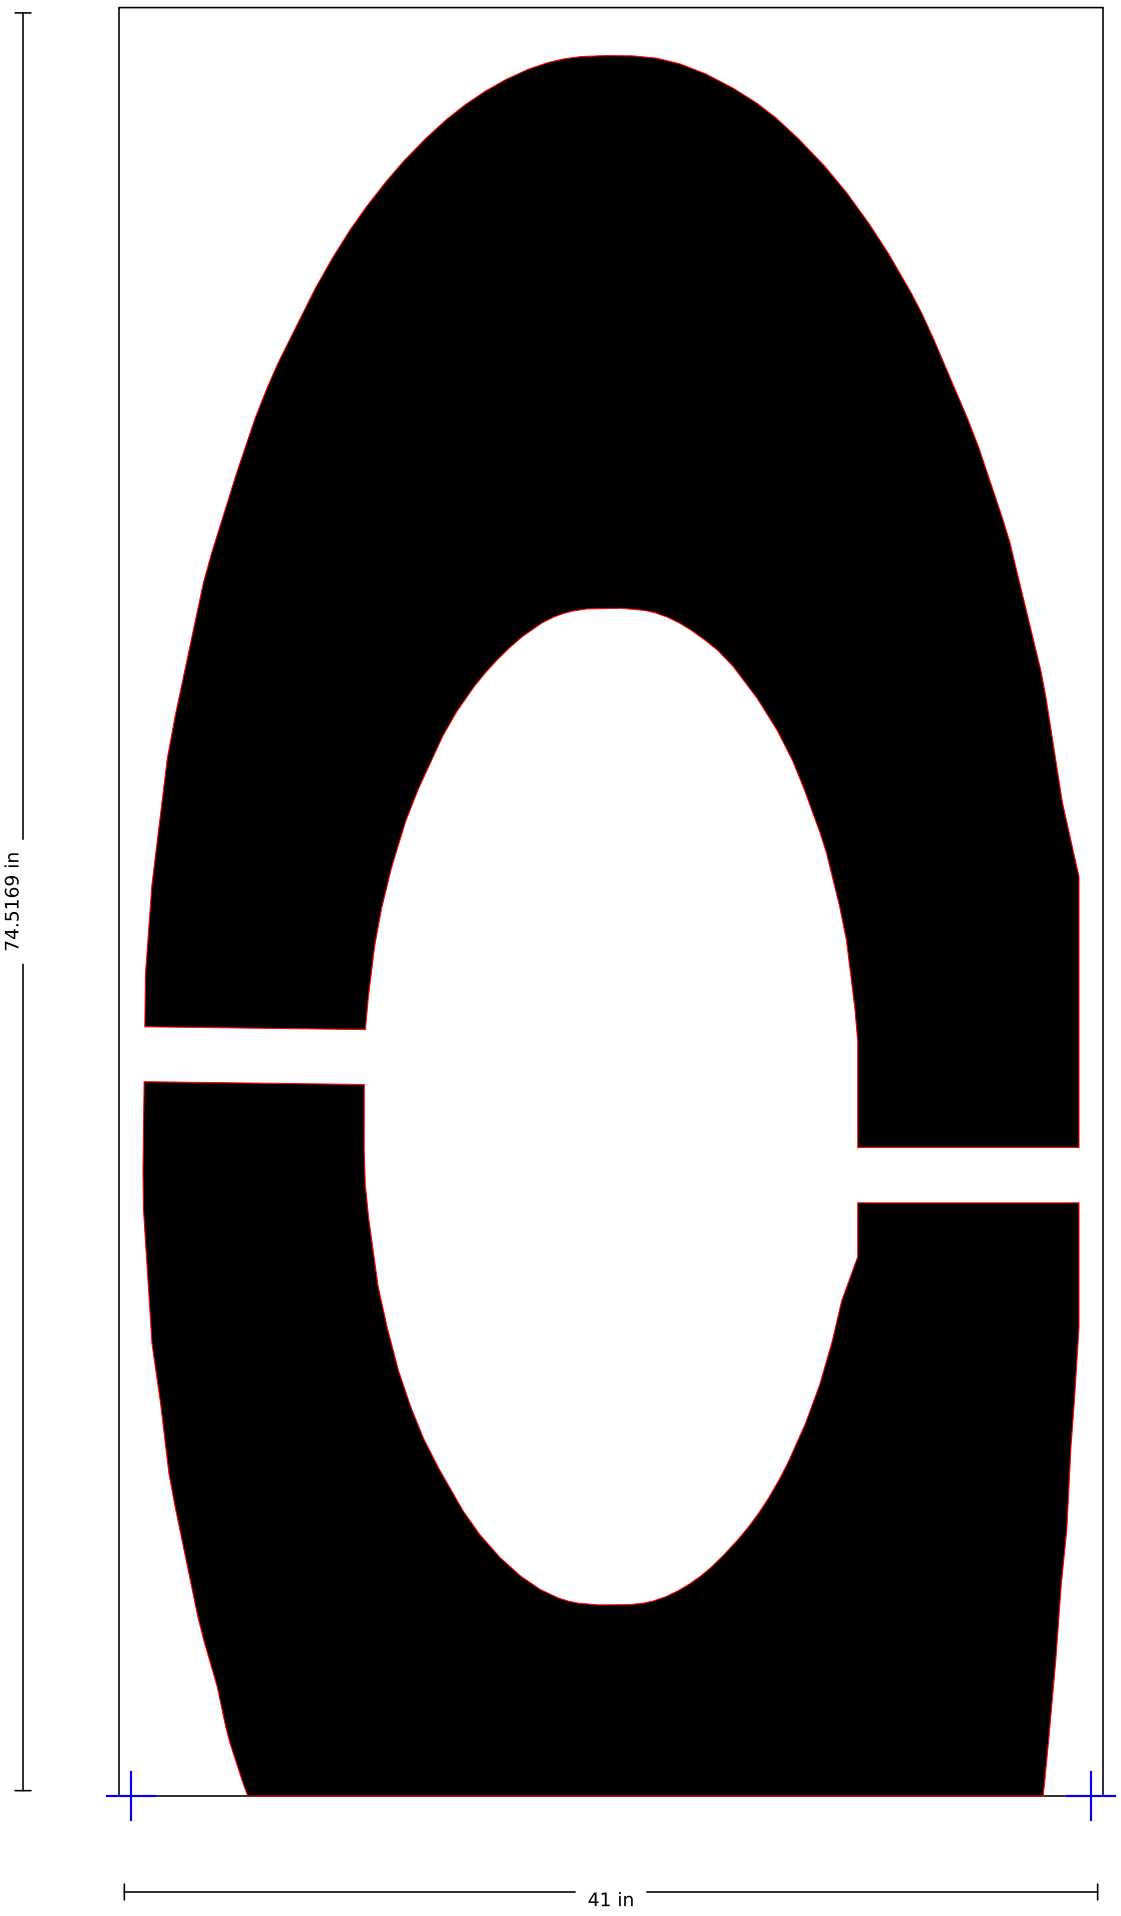

SSS-FAA-144-03-A

144" FAA Airport "A" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

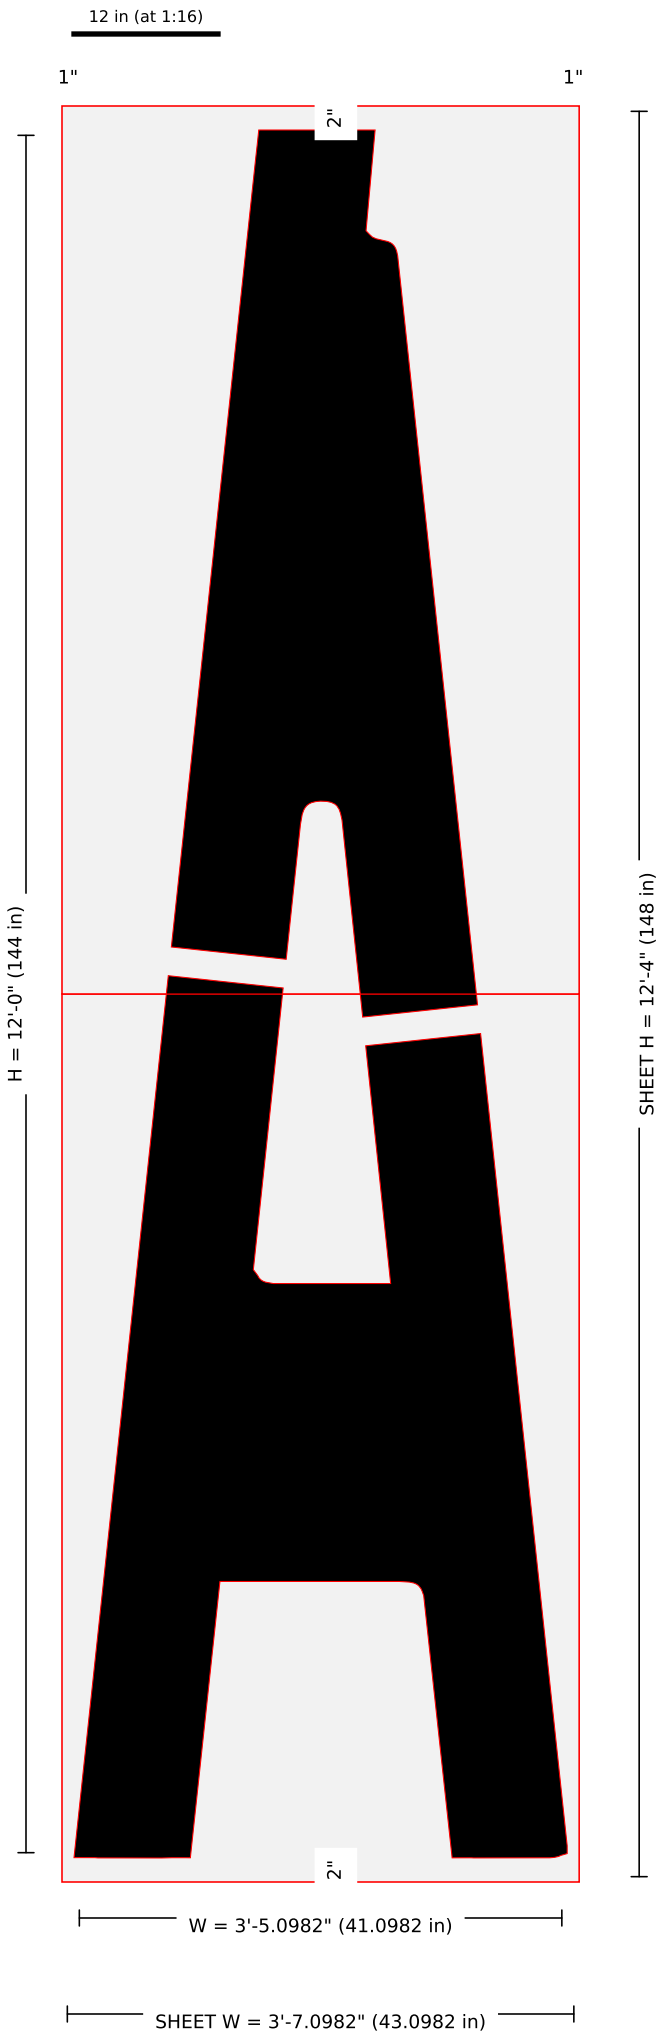

Pieces: 2 (1 x 2); blanks (in): 43.098 x 74, 43.098 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144A-144in-FAA-Airport-Letter-A-157x60-2.jpg: width = kit listing 41 (image-scale 40.87); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (28.87,69.39) stroke 9.626" w=2.406"; (12.67,74.21) stroke 9.624" w=2.406" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-A · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

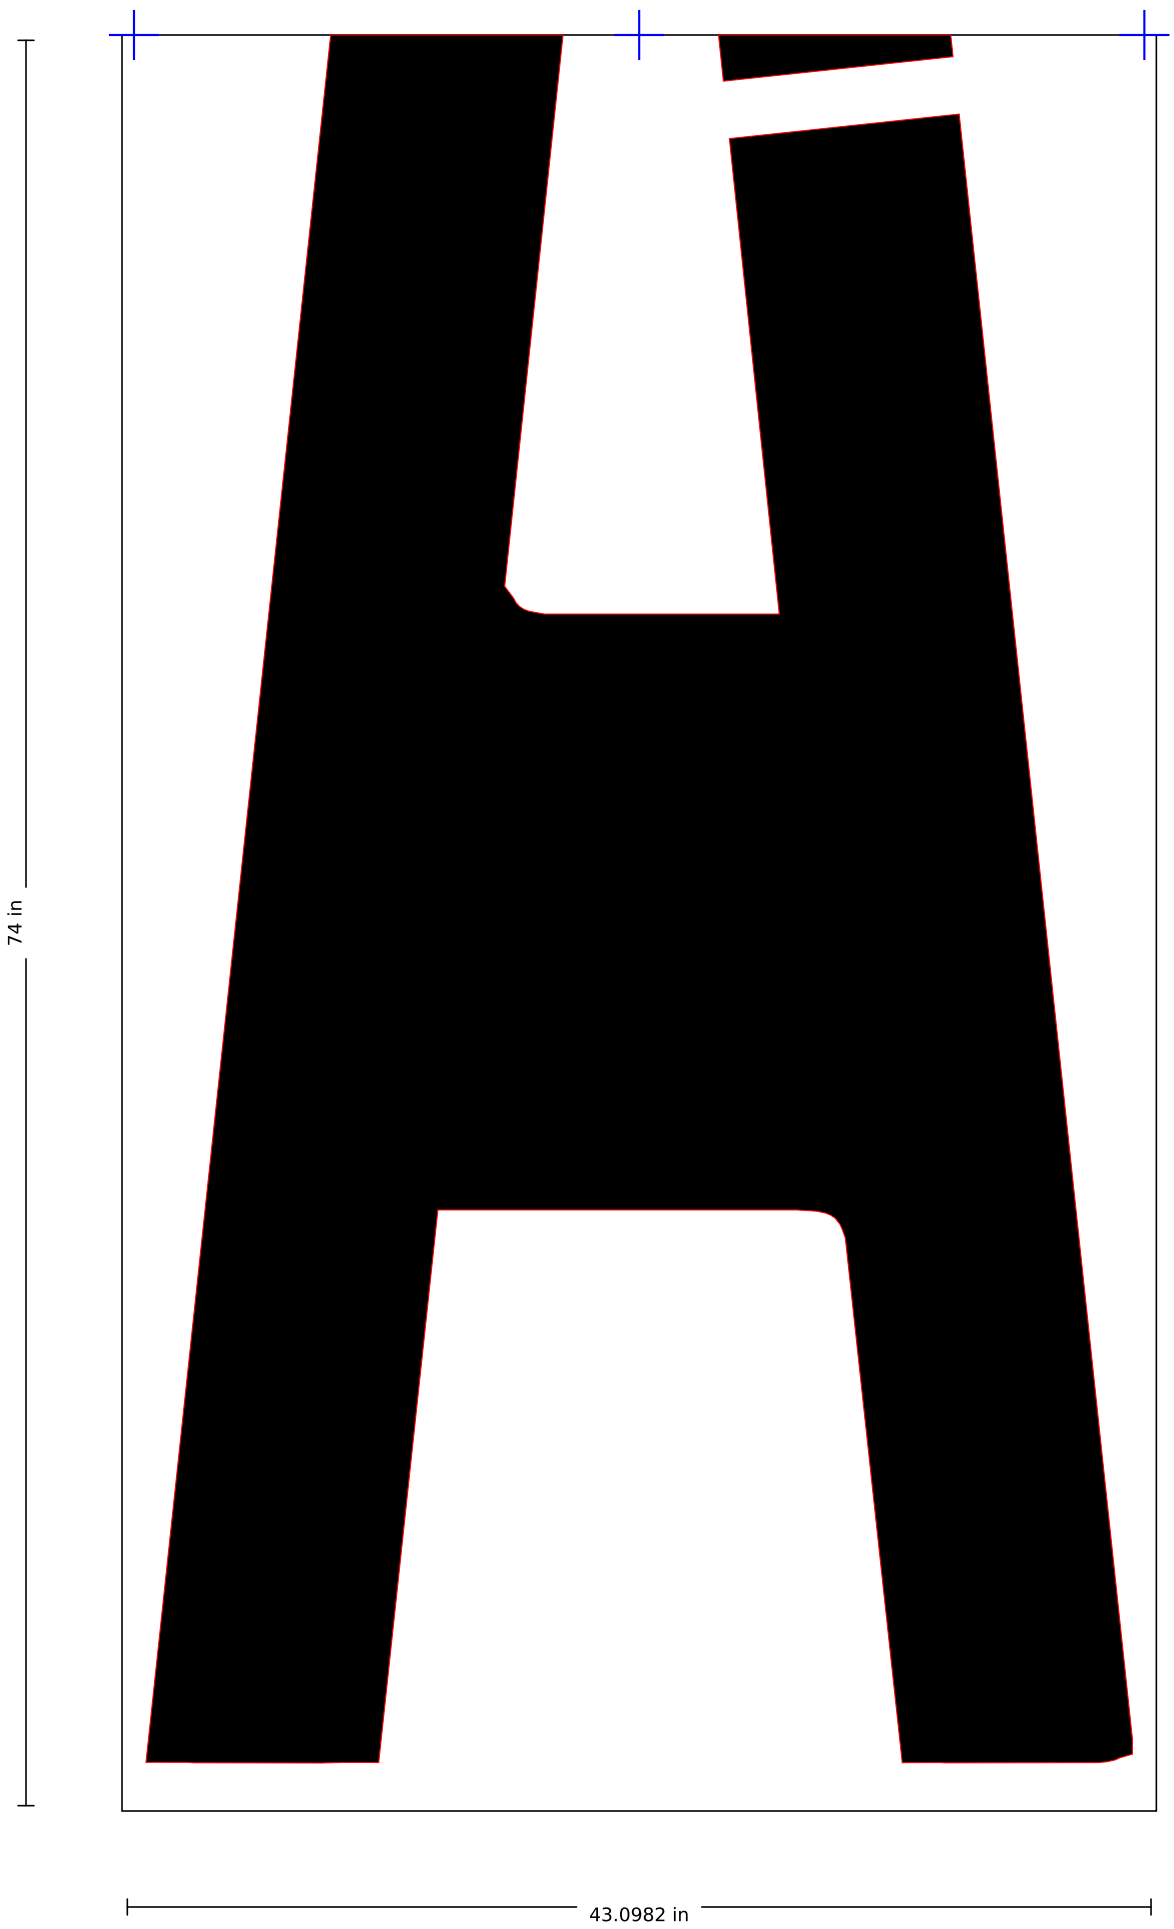

SSS-FAA-144-03-A · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

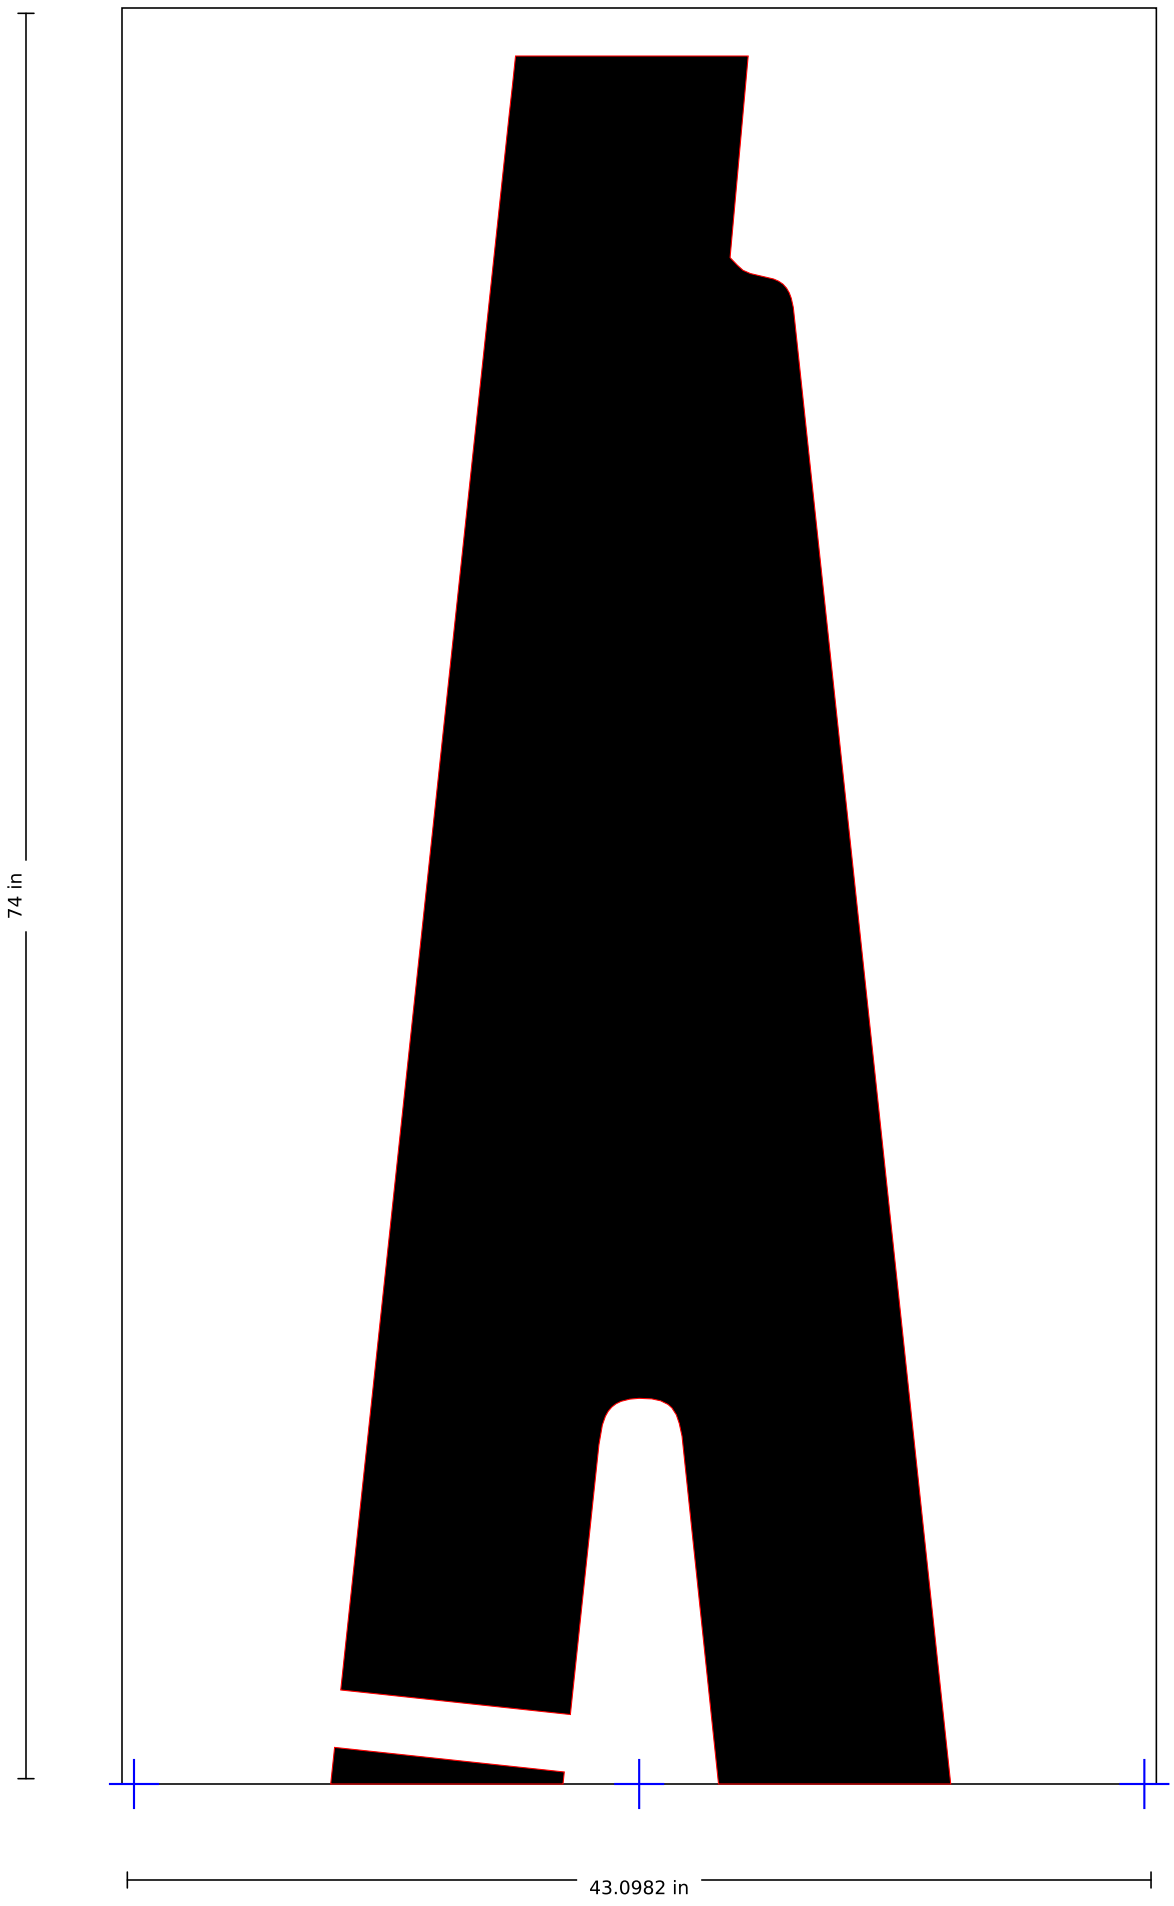

SSS-FAA-144-03-B

144" FAA Airport "B" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 39 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

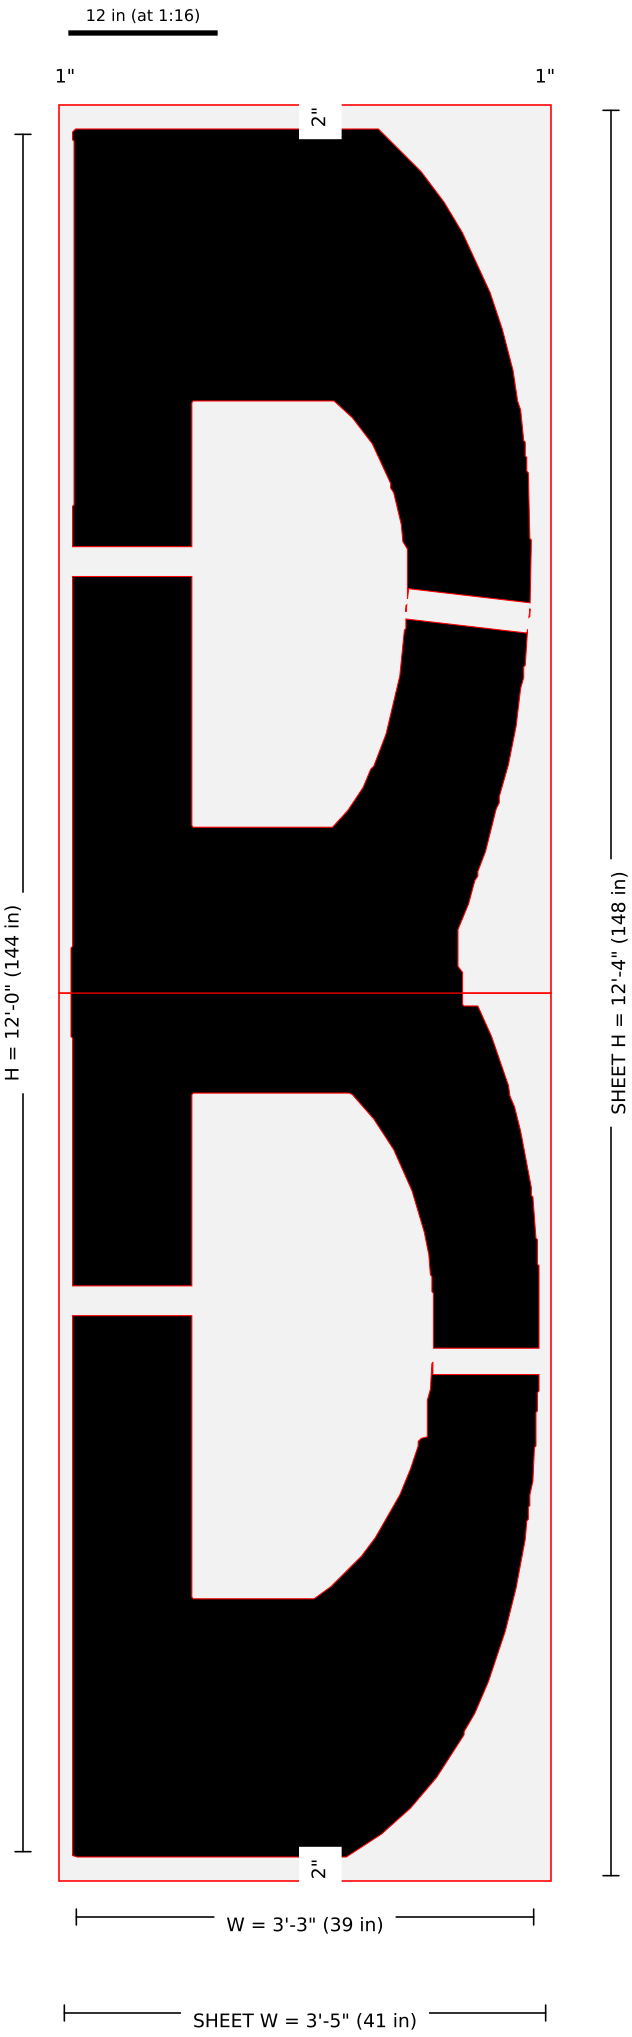

Pieces: 2 (1 x 2); blanks (in): 41 x 74, 41 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144B-144in-FAA-Airport-Letter-B-157x60-2.jpg: width 39 from image scale (38.96); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (34.6,41.3) stroke 8.794" w=2.199"; (5.1,46.35) stroke 9.941" w=2.485"; (5.1,107.95) stroke 9.941" w=2.485"; (33.07,103.84) stroke 10.136" w=2.534" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-B · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

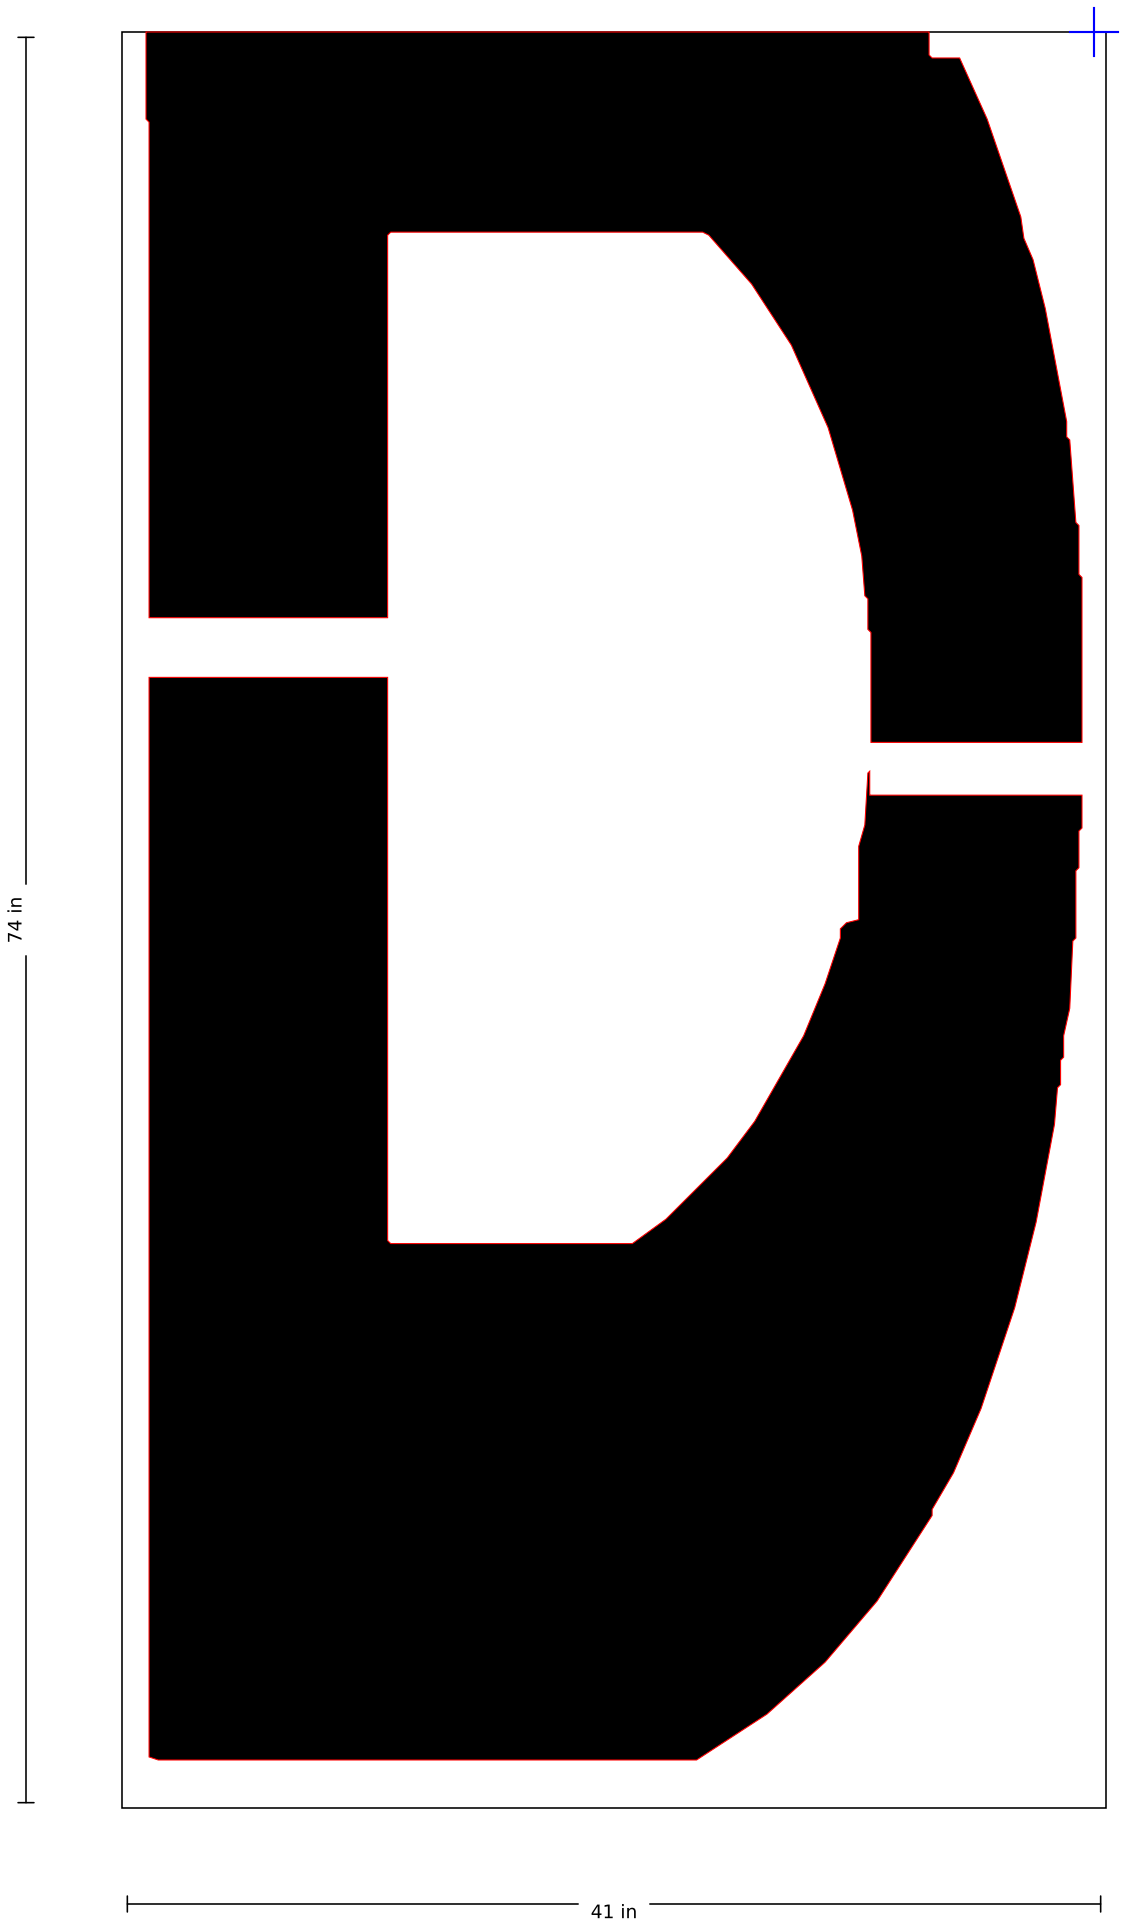

SSS-FAA-144-03-B · piece 2 of 2 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

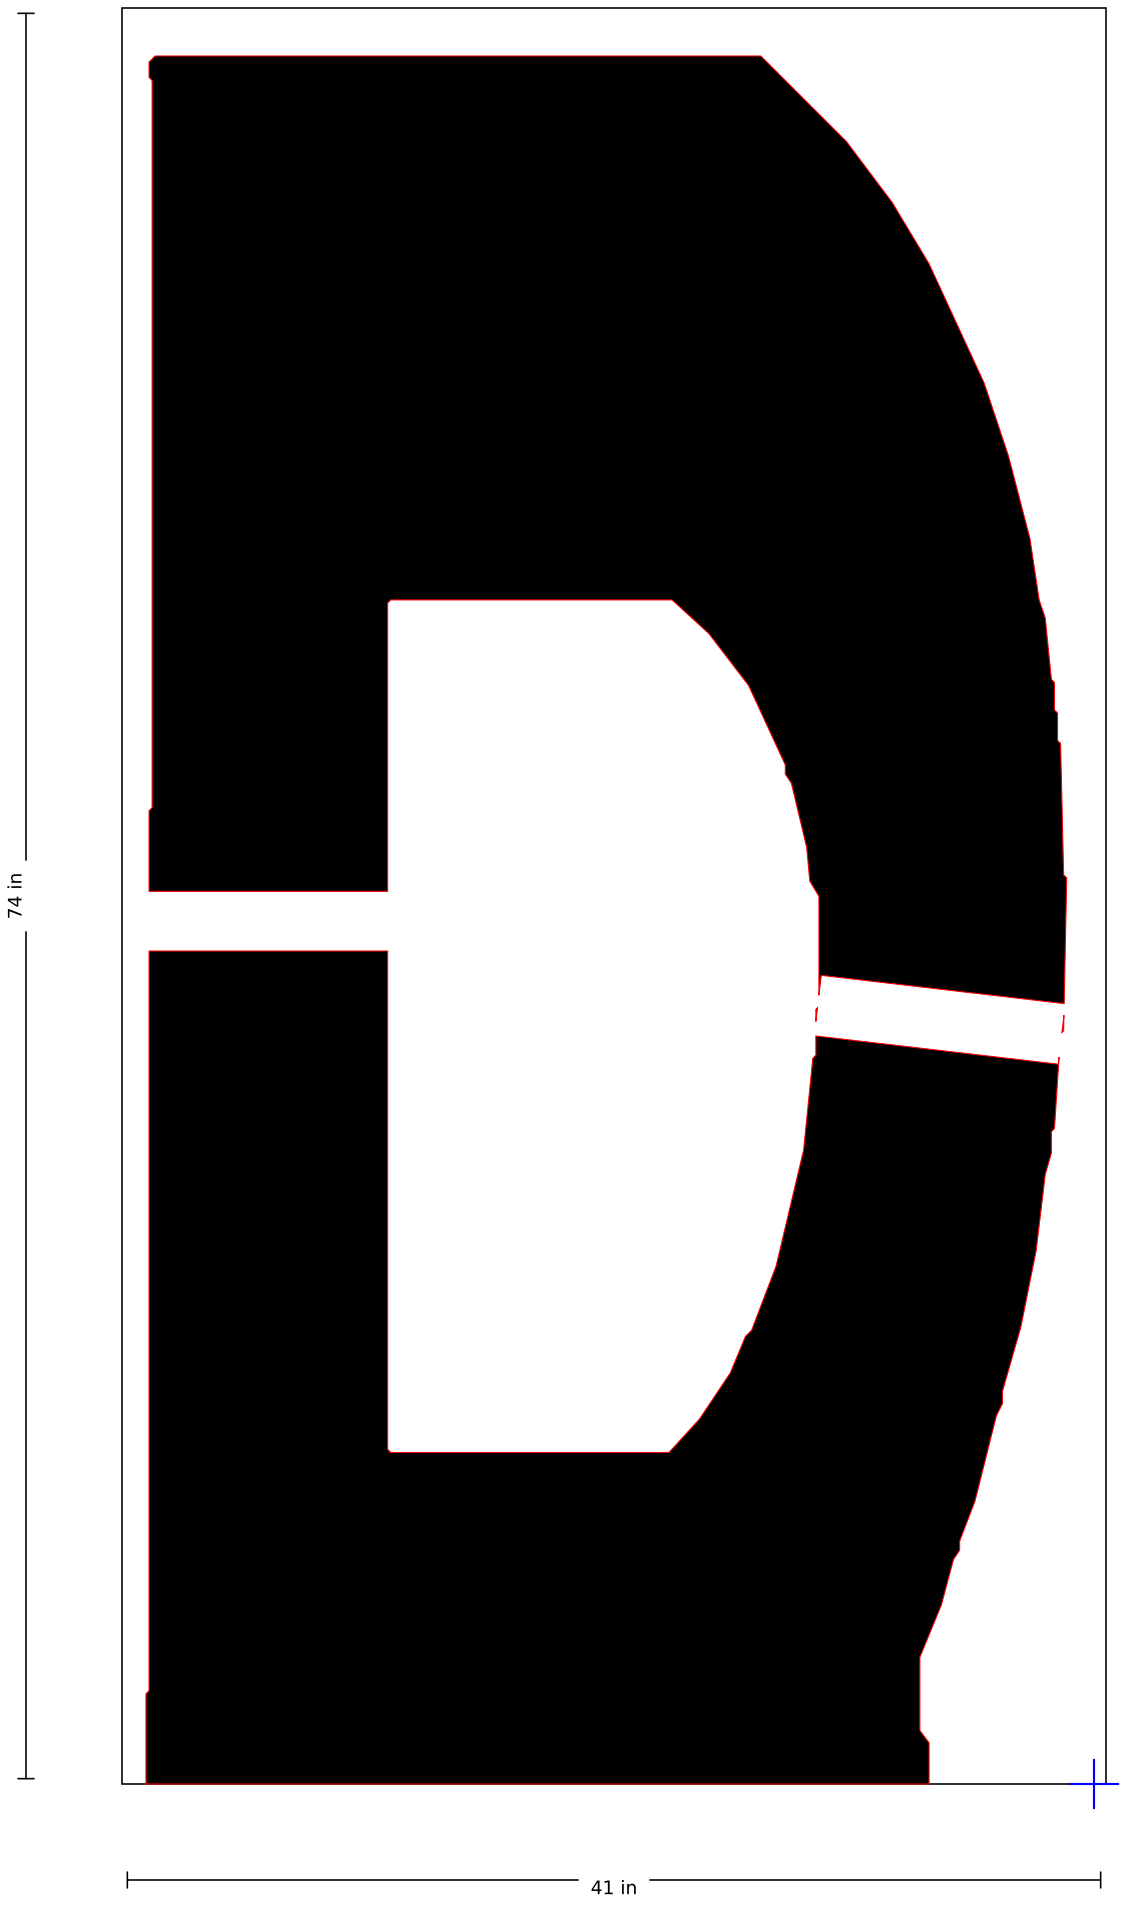

SSS-FAA-144-03-C

144" FAA Airport "C" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut



Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144C-144in-FAA-Airport-Letter-C-157x60-2.jpg: width = kit listing 41 (image-scale 39.54); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-C · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

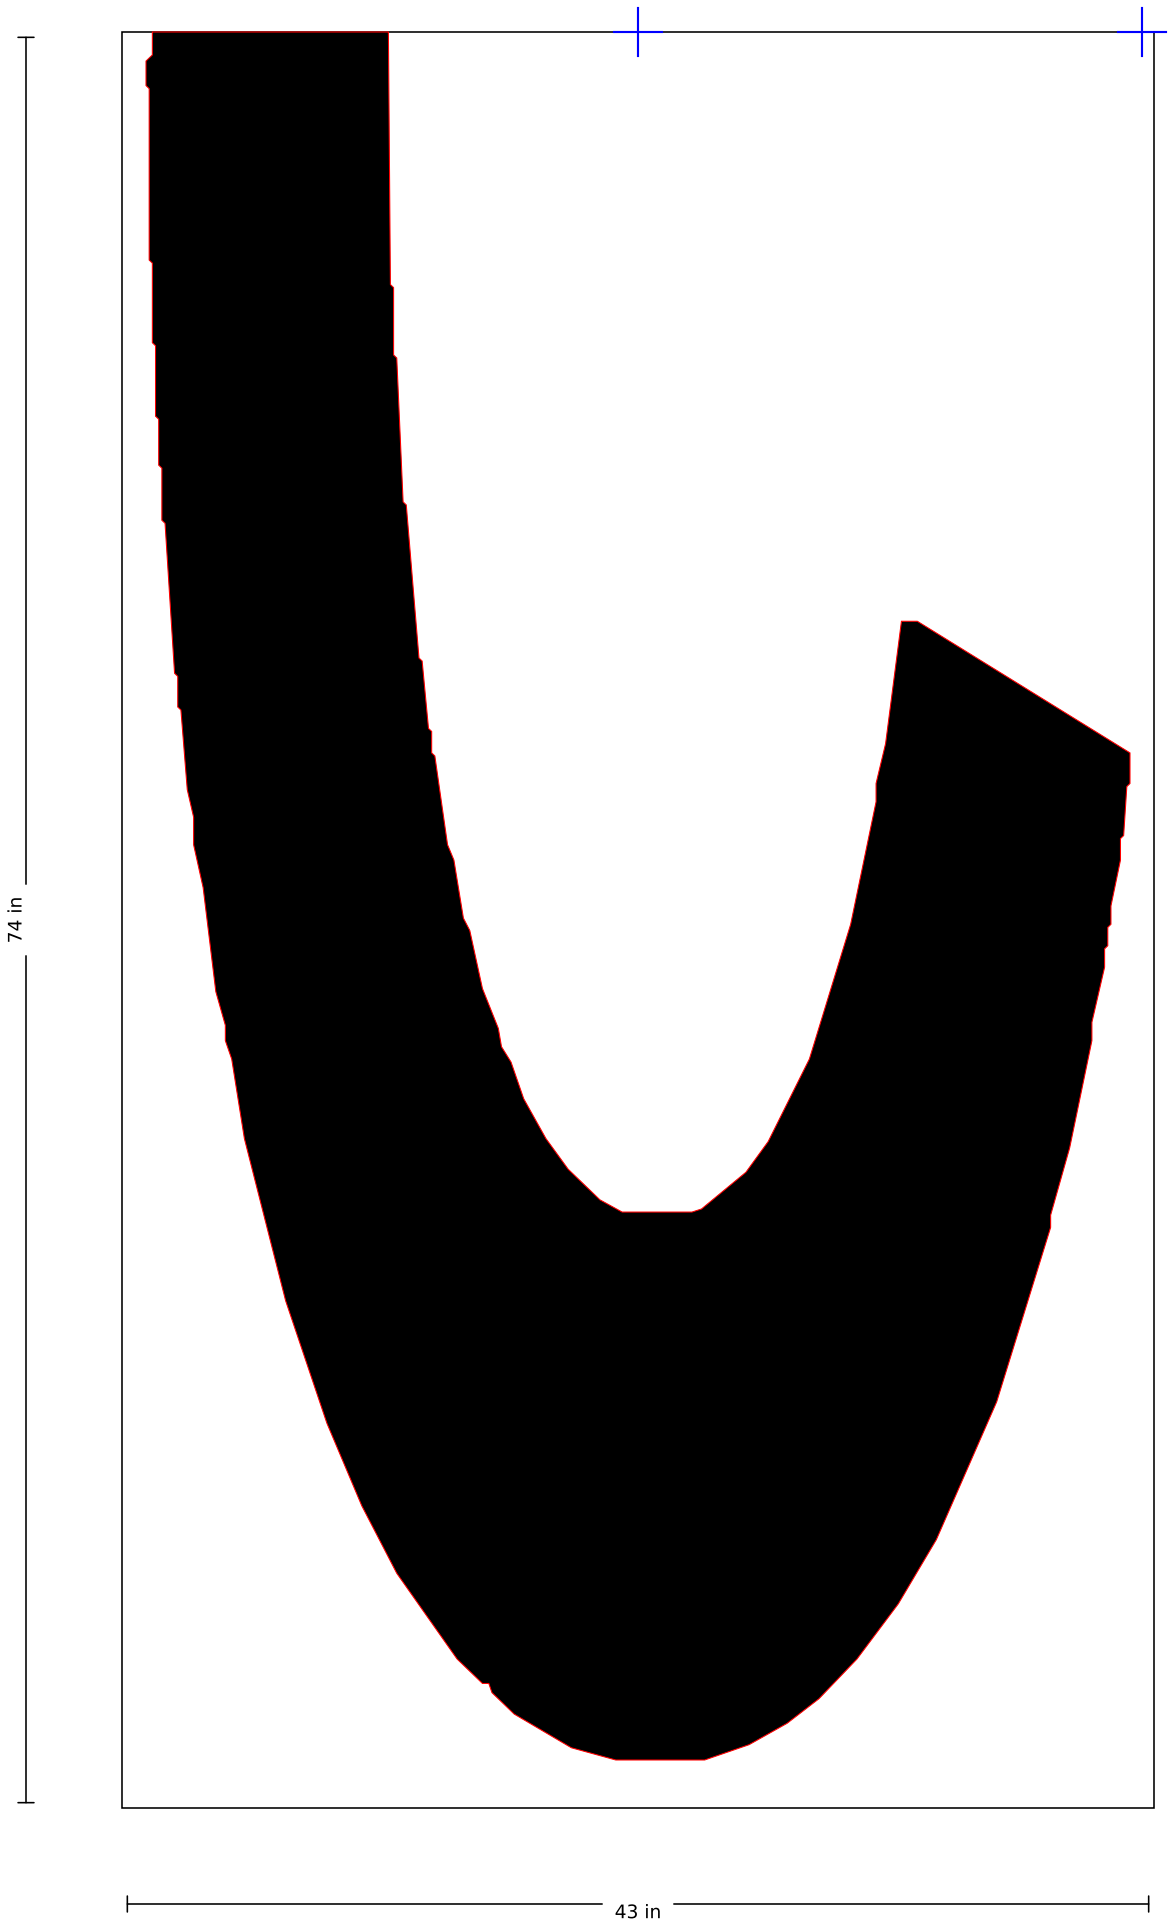

SSS-FAA-144-03-C · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

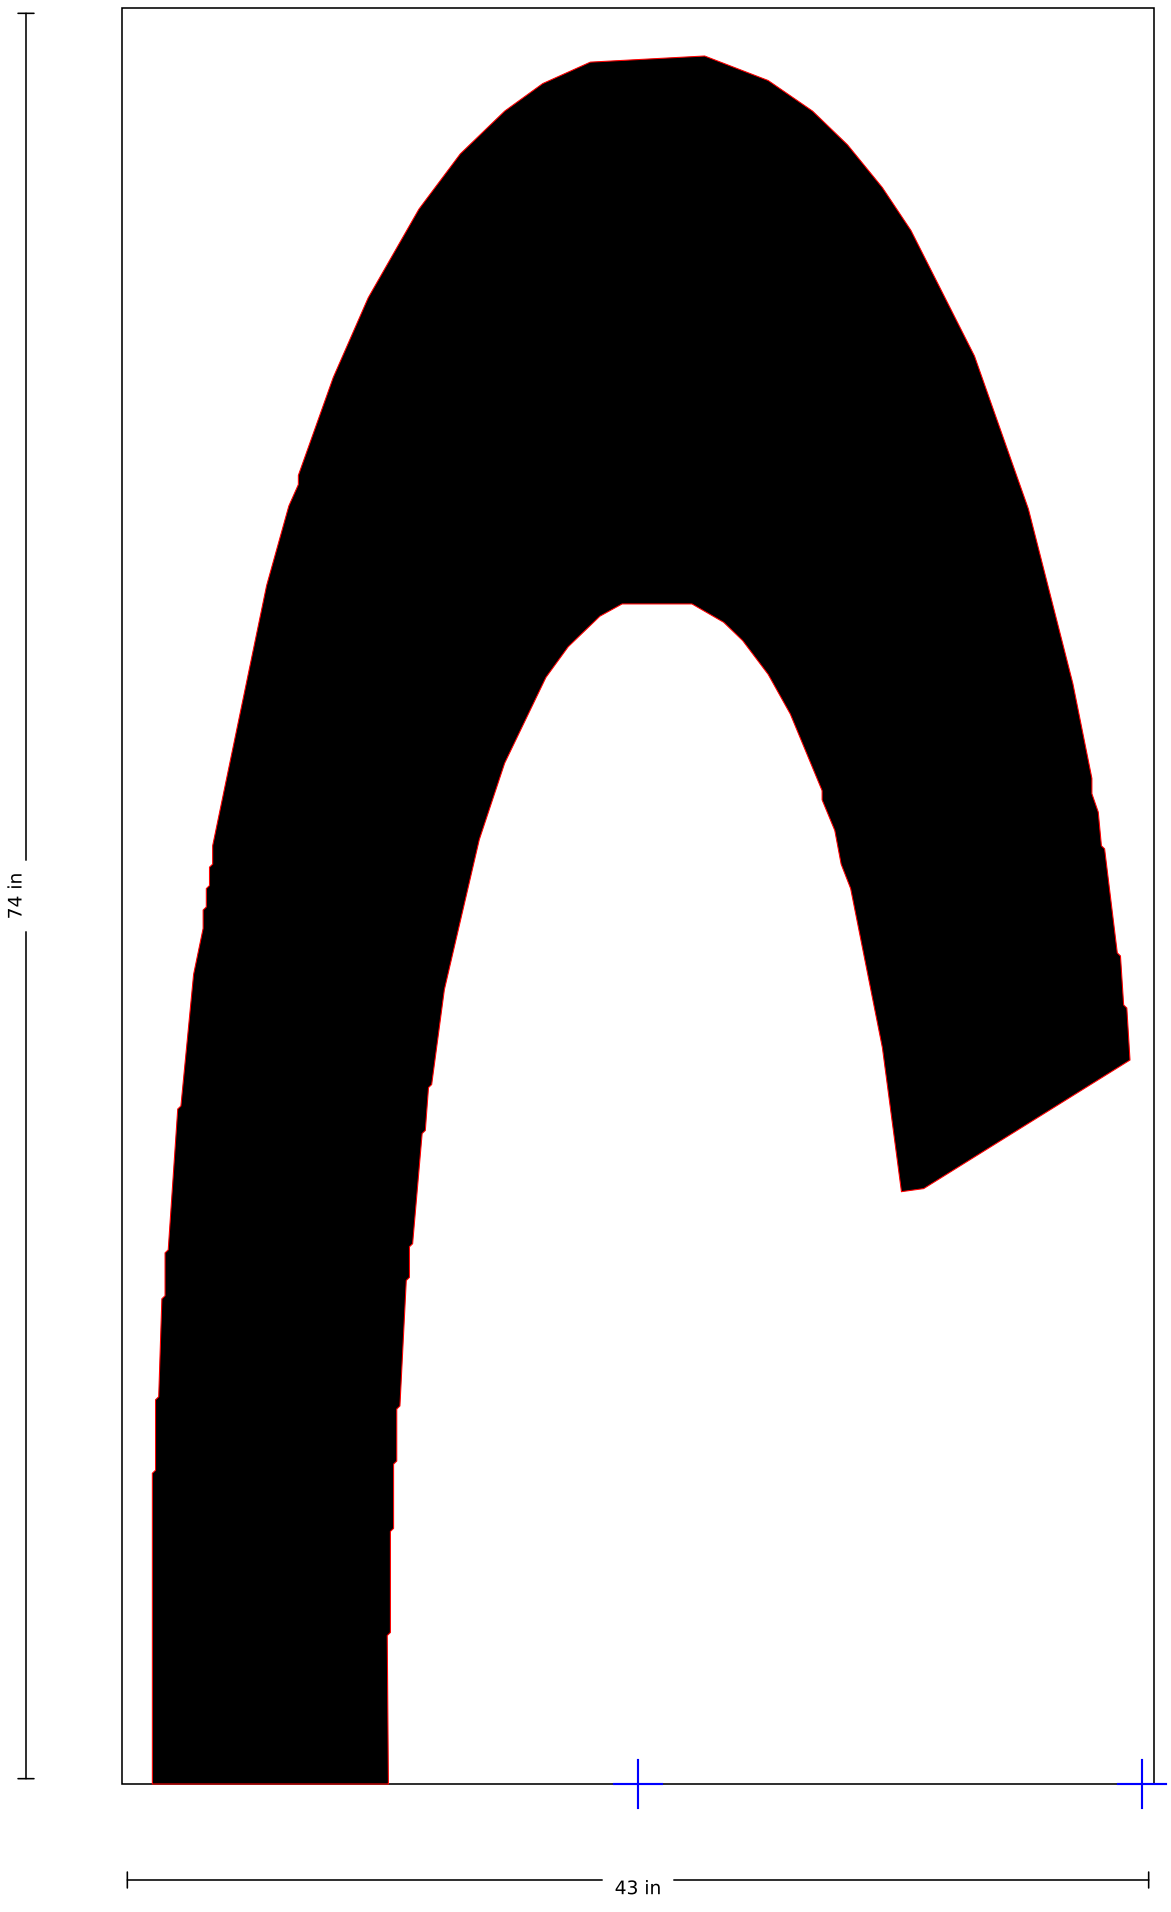

SSS-FAA-144-03-D

144" FAA Airport "D" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

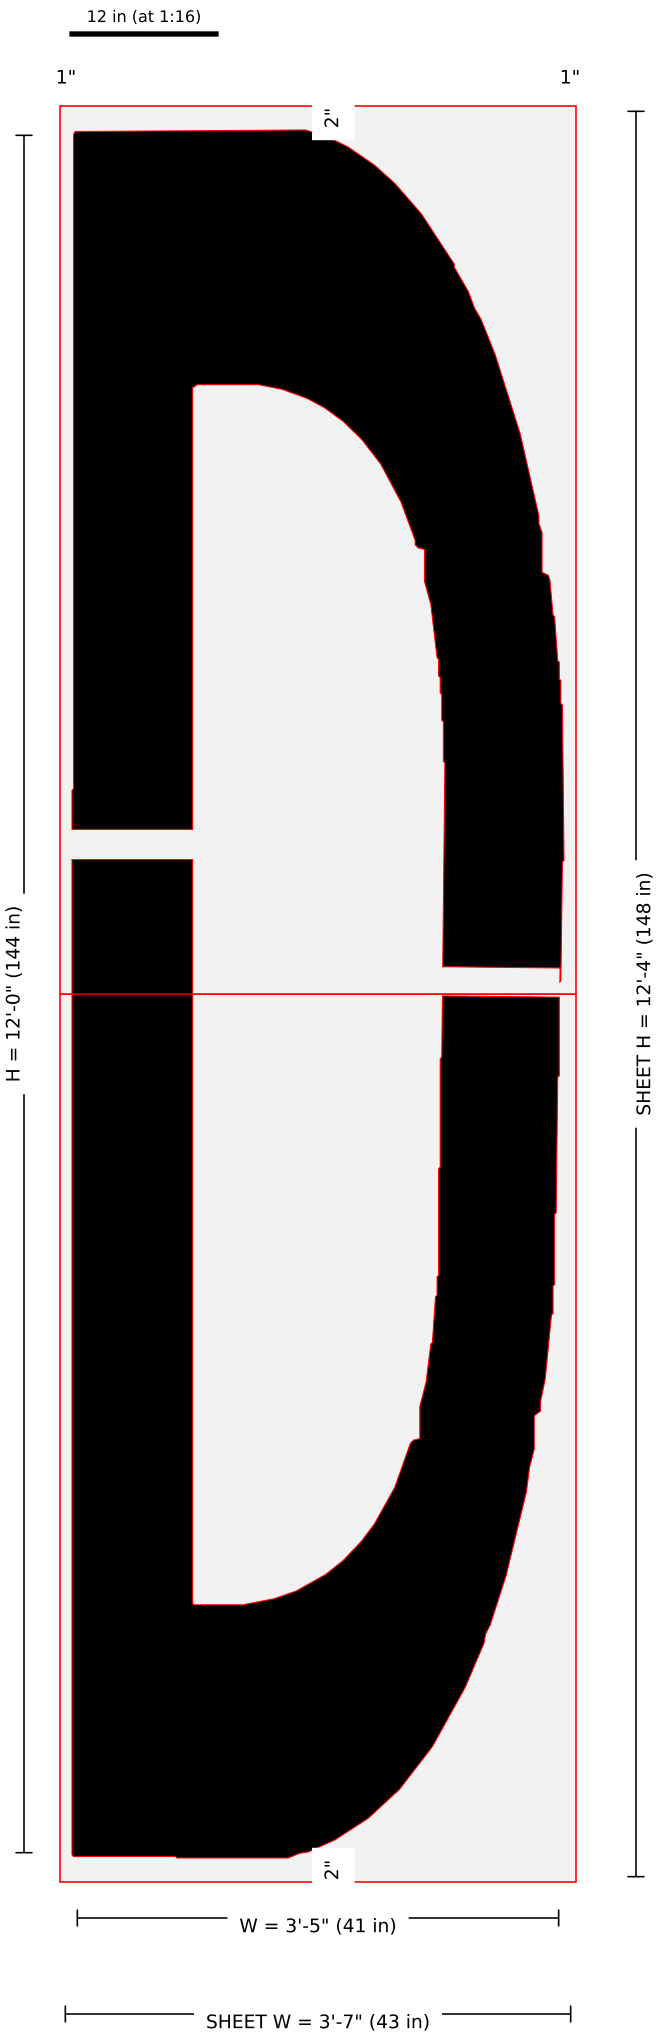

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144D-144in-FAA-Airport-Letter-D-157x60-2.jpg: width = kit listing 41 (image-scale 39.91); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (35.75,73.0) stroke 9.726" w=2.432"; (5.03,84.46) stroke 10.054" w=2.514" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-D · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

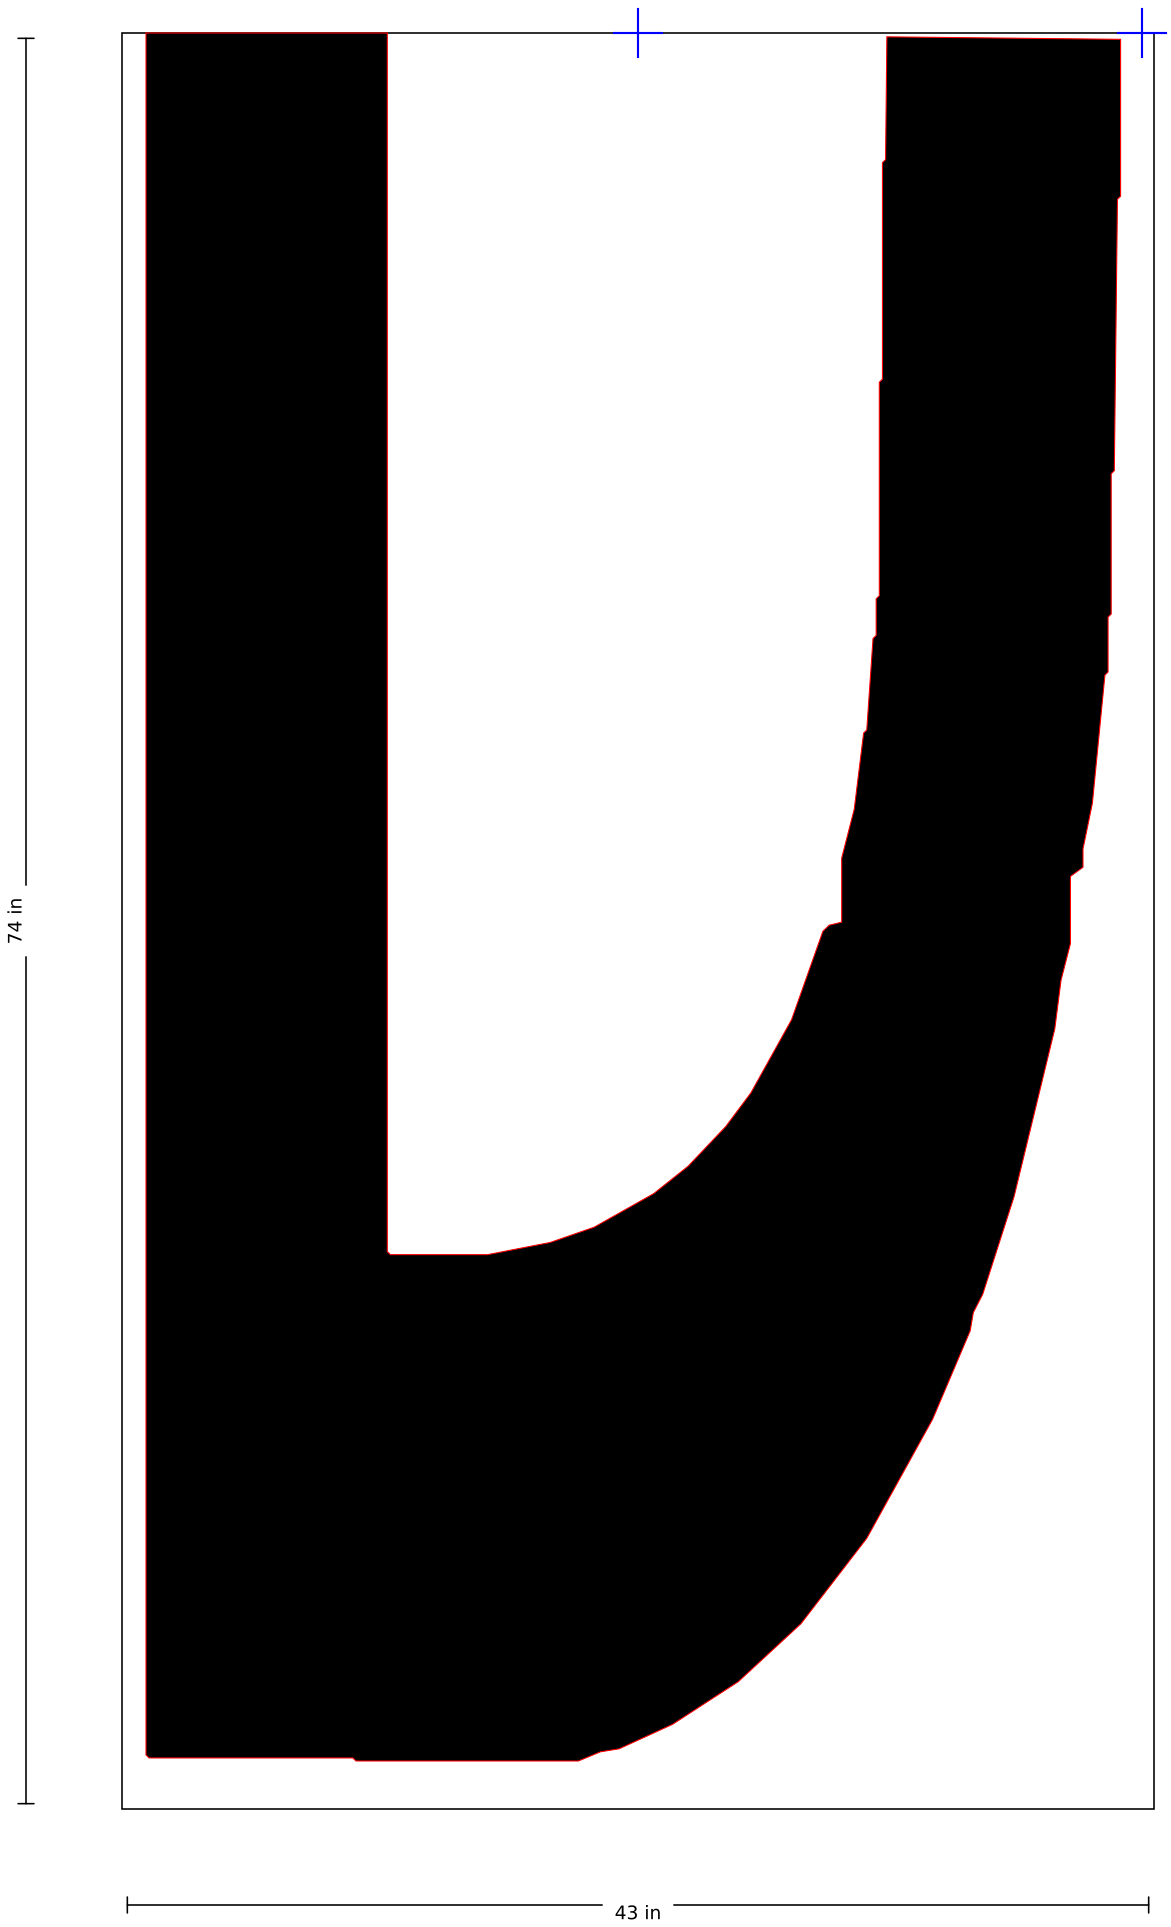

SSS-FAA-144-03-D · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

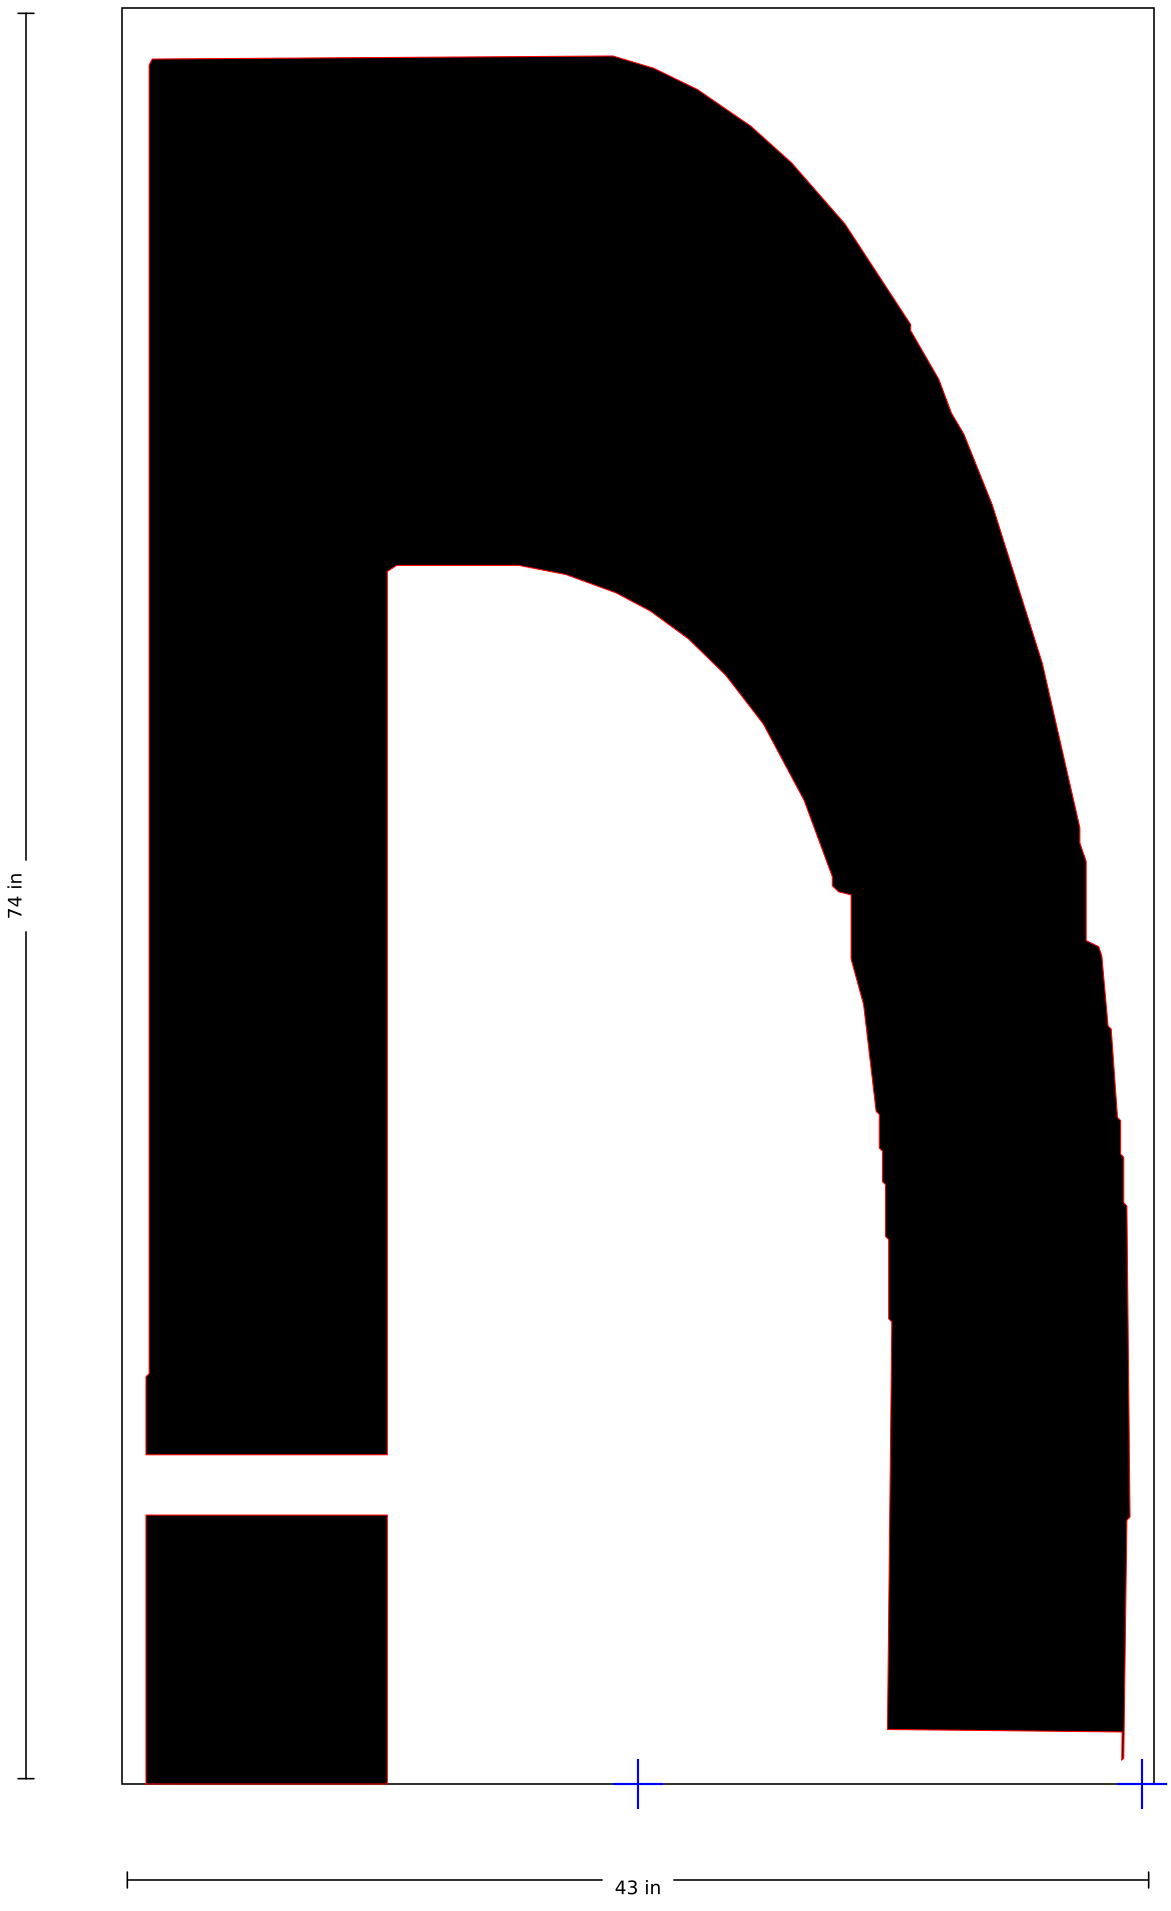

SSS-FAA-144-03-E

144" FAA Airport "E" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

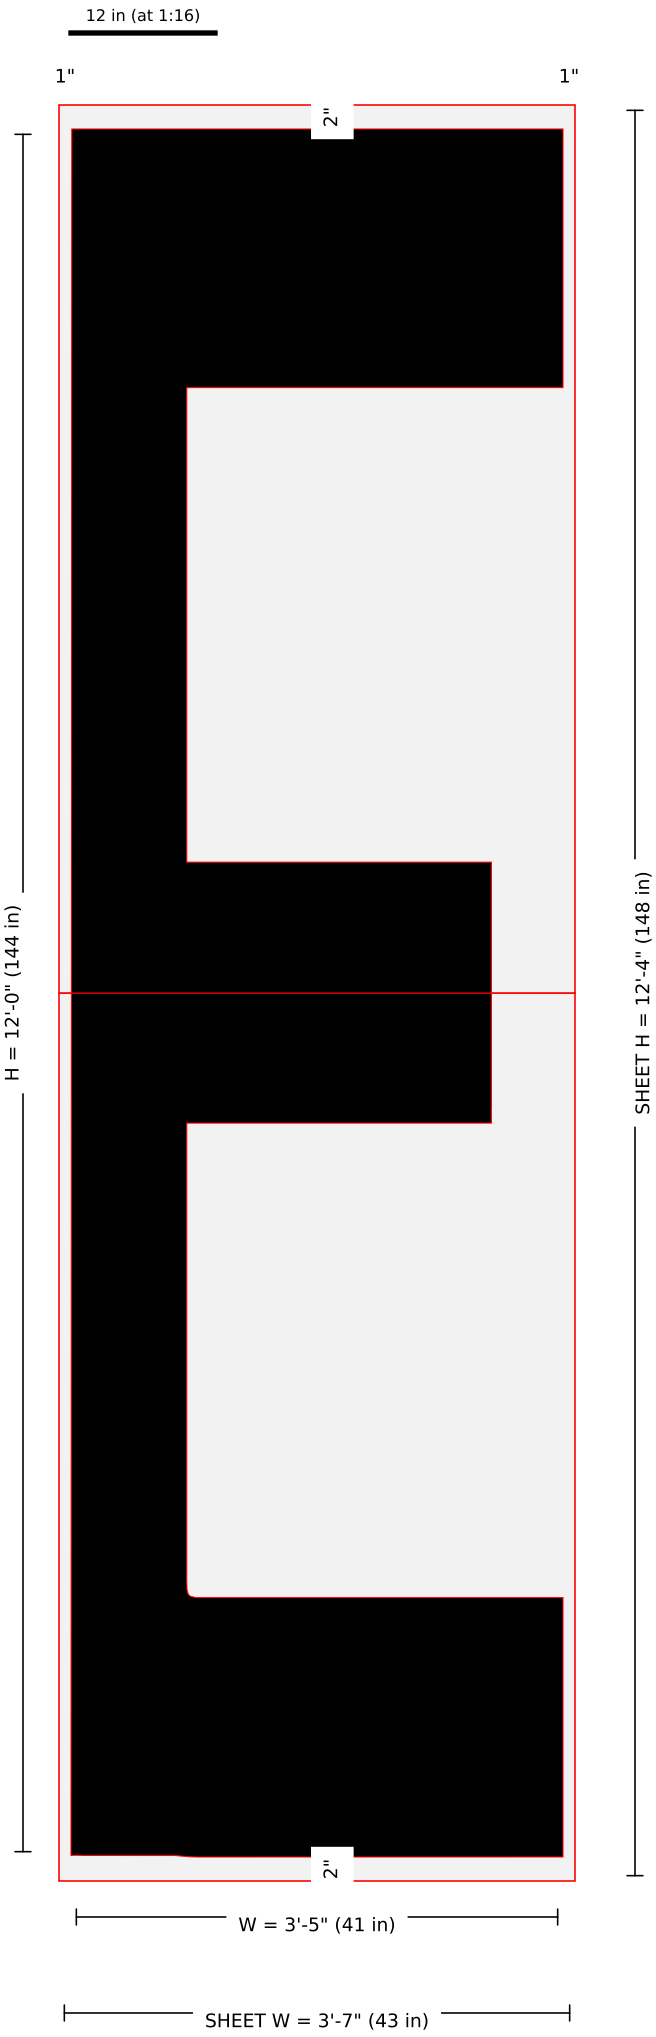

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144E-144in-FAA-Airport-Letter-E-157x60-2.jpg: width = kit listing 41 (image-scale 41.05); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-E · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

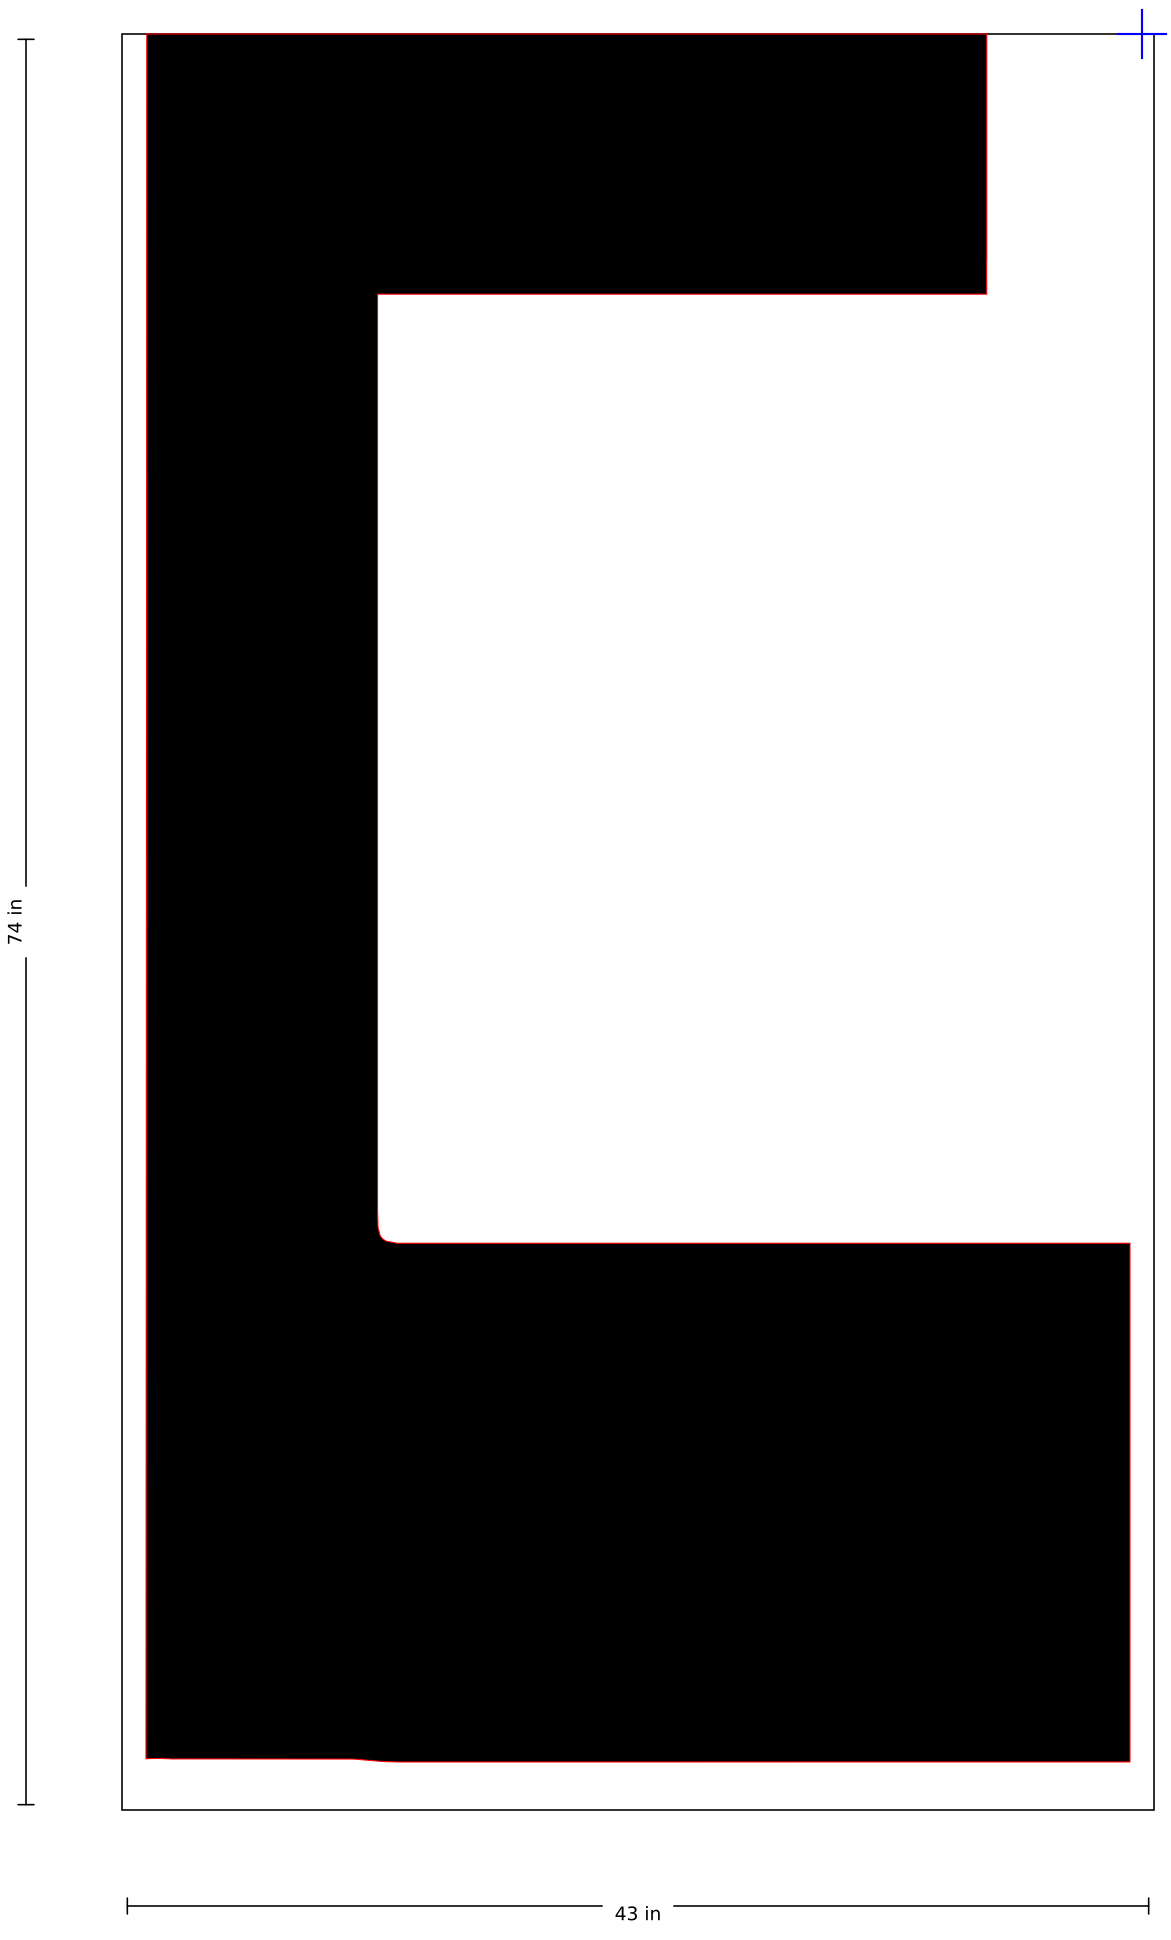

SSS-FAA-144-03-E · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

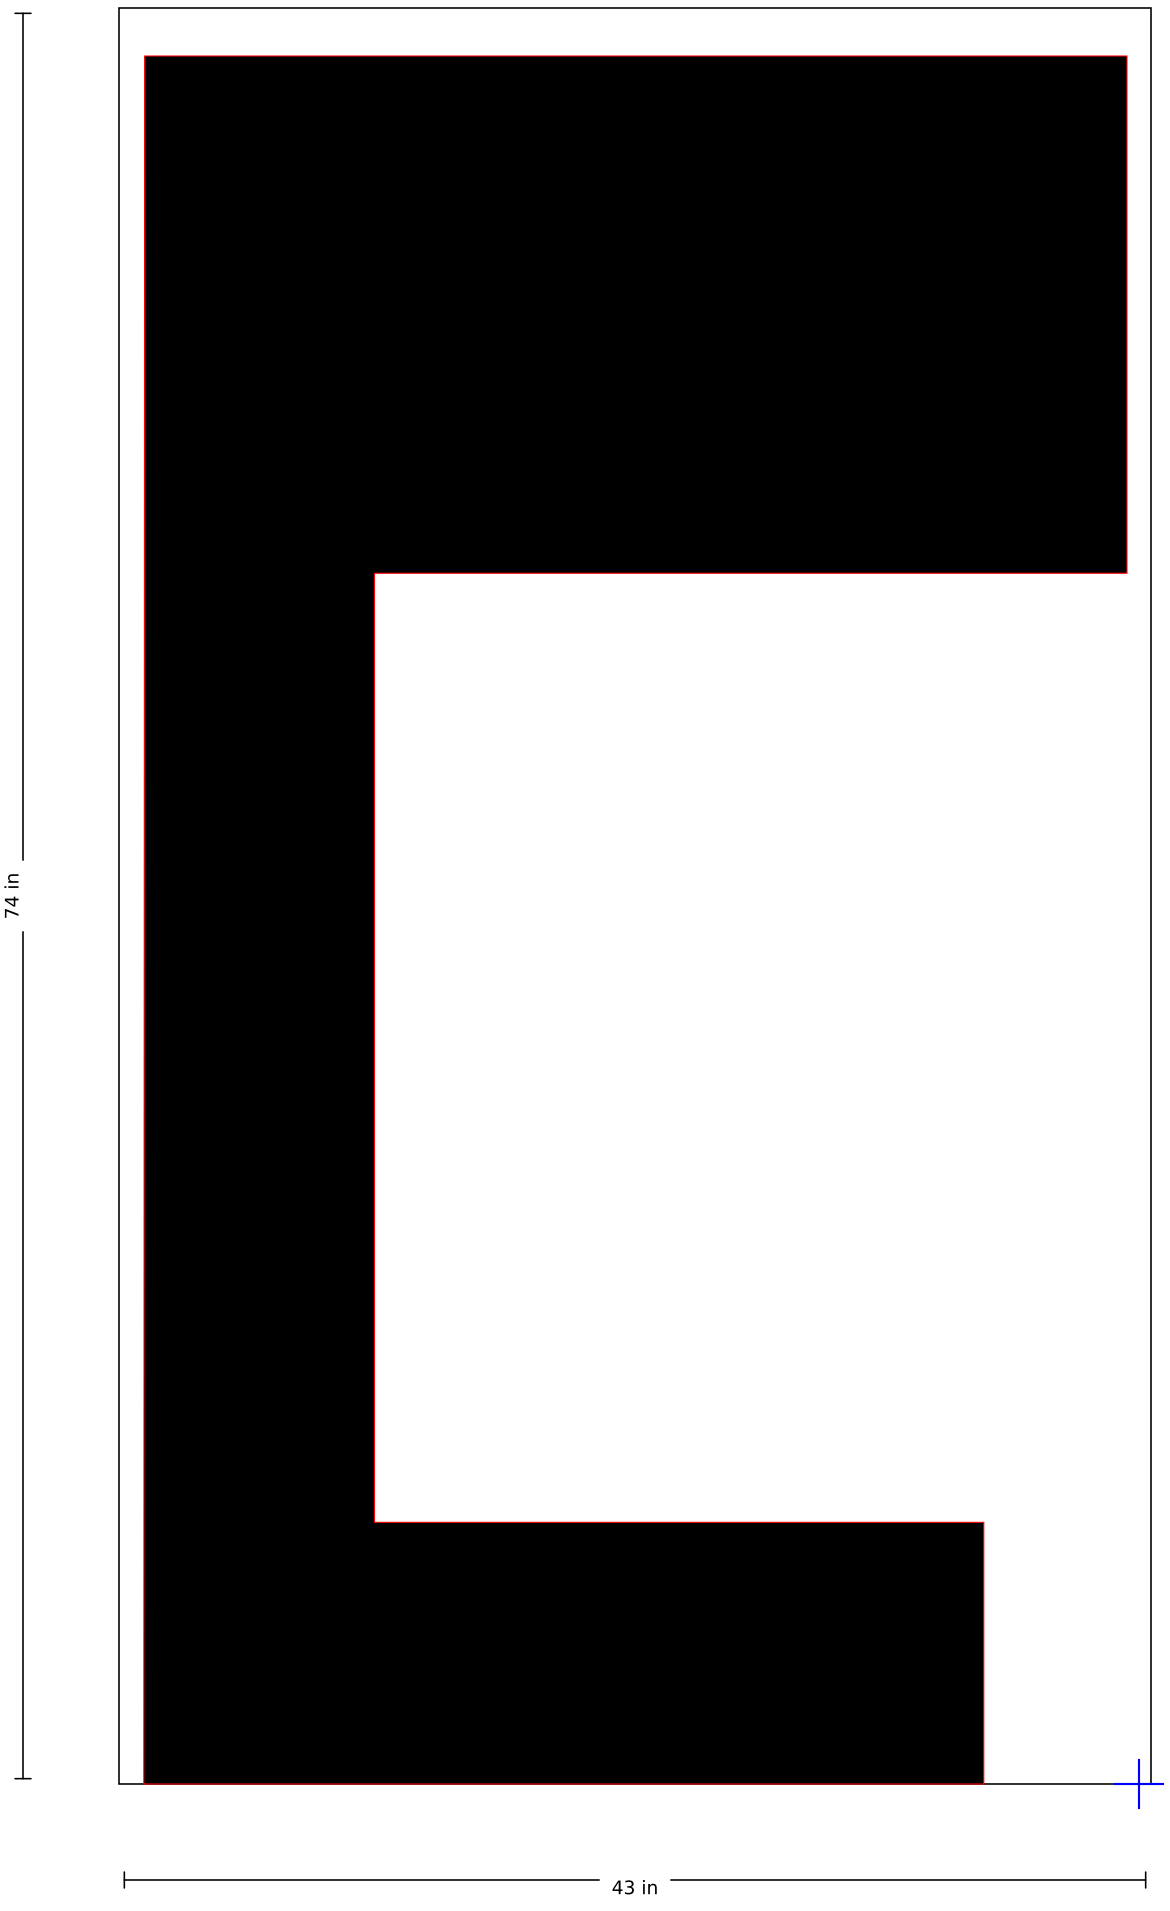

SSS-FAA-144-03-F

144" FAA Airport "F" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

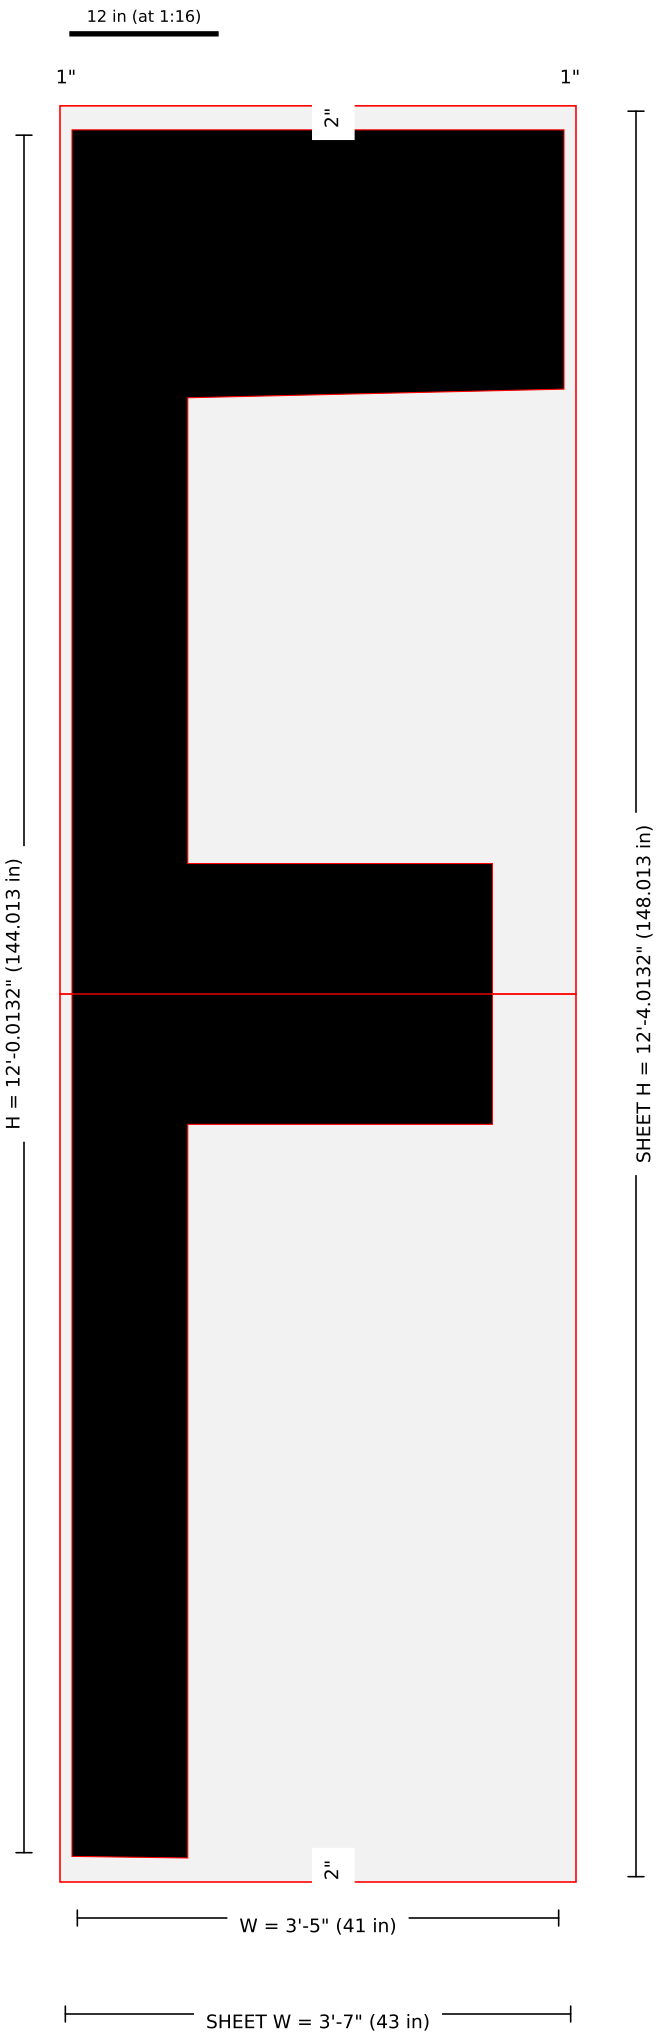

Pieces: 2 (1 x 2); blanks (in): 43 x 74.007, 43 x 74.007 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144F-144in-FAA-Airport-Letter-F-157x60-2.jpg: width = kit listing 41 (image-scale 41.05); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-F · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

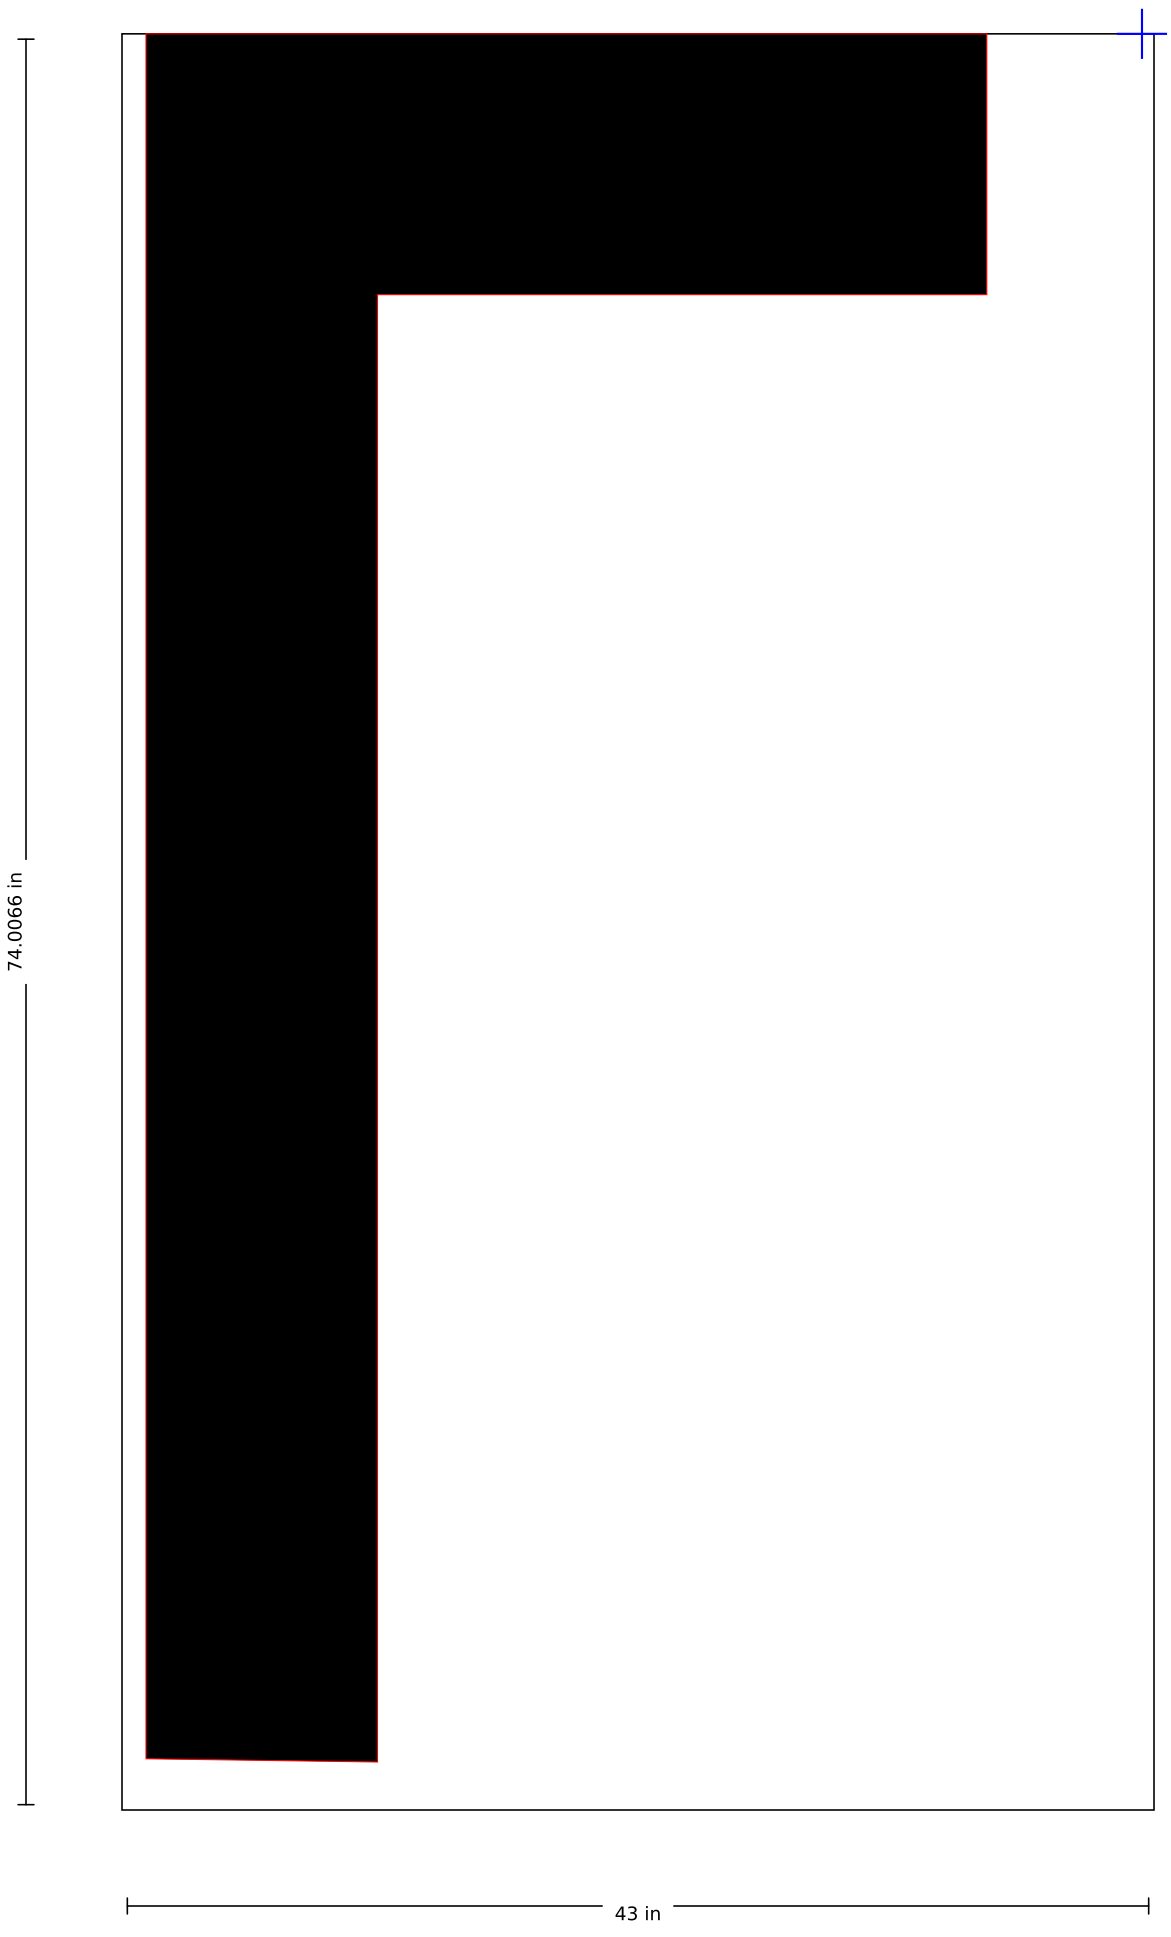

SSS-FAA-144-03-F · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

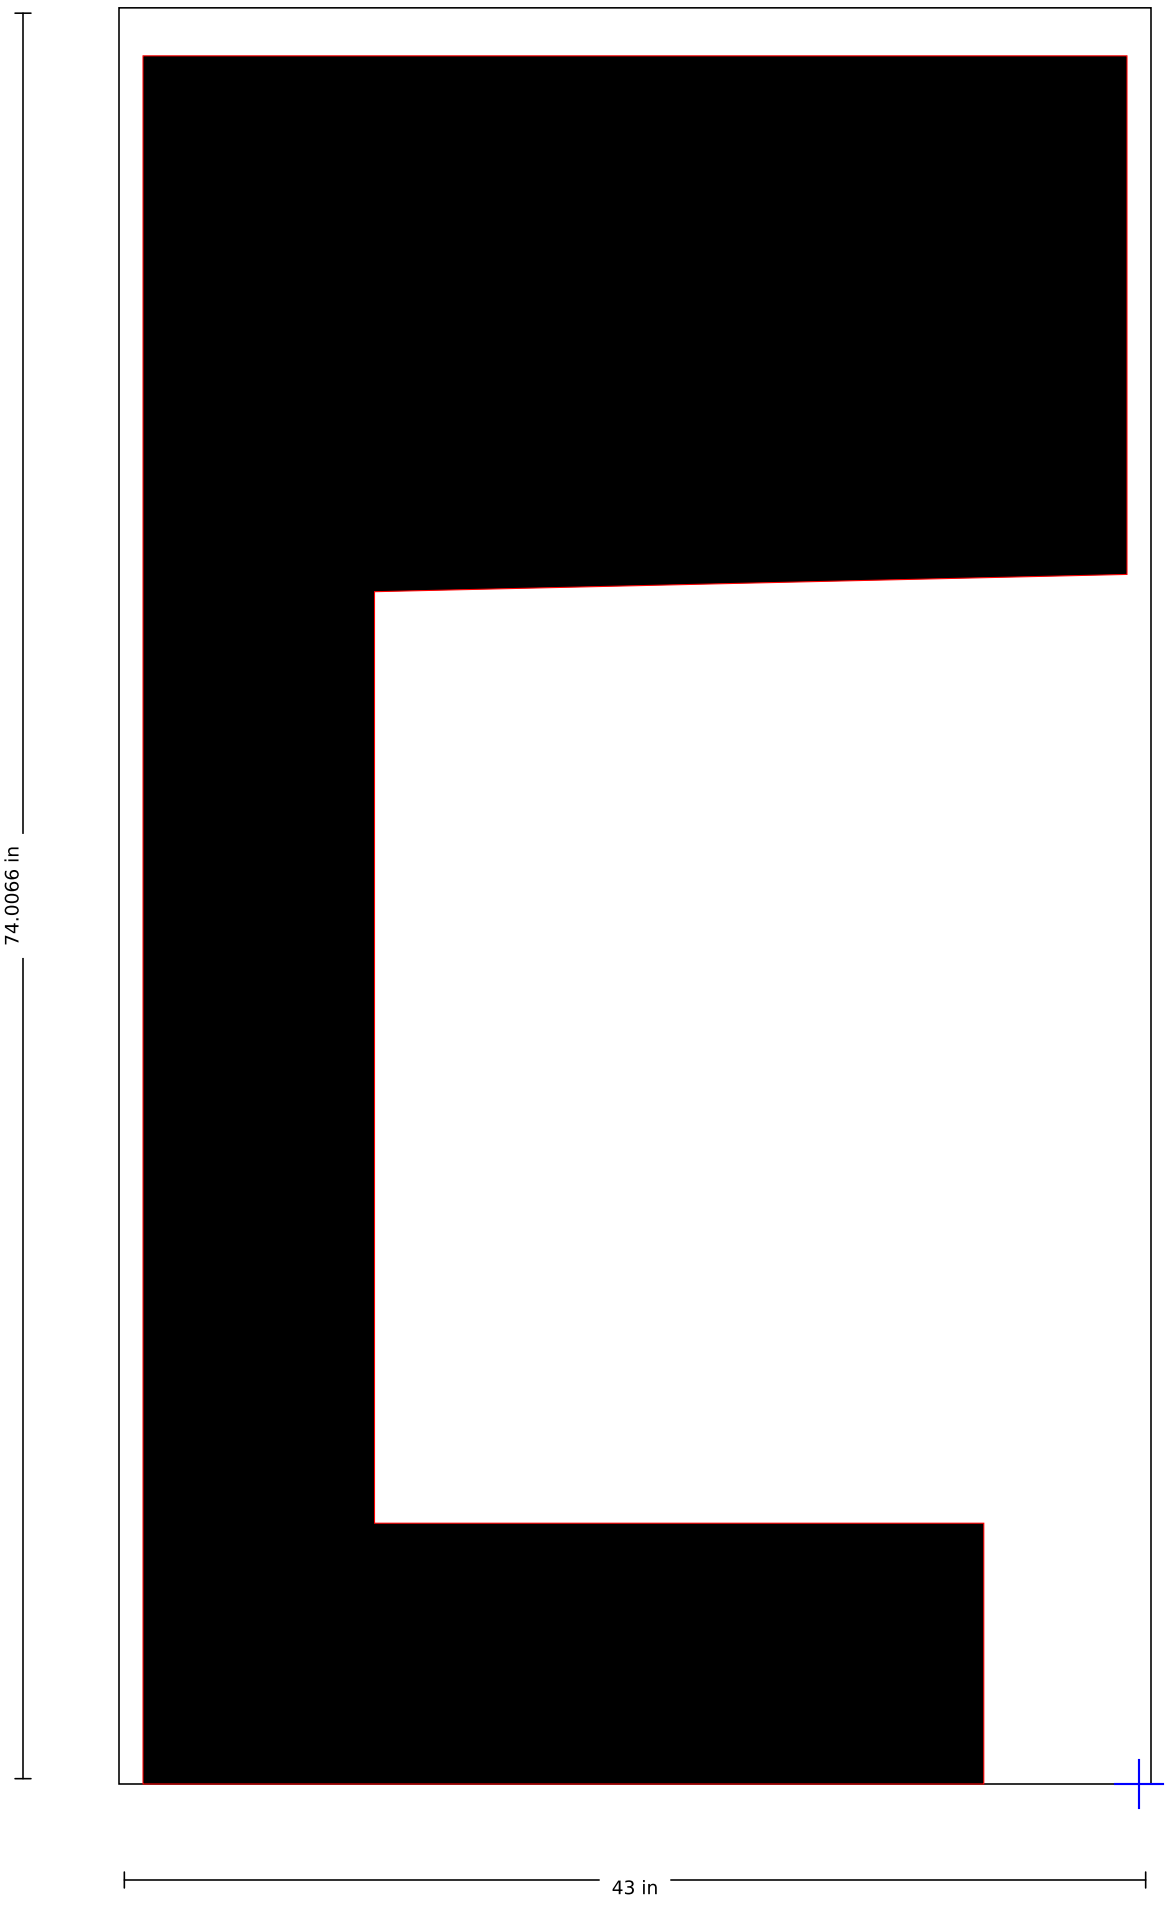


SSS-FAA-144-03-G

144" FAA Airport "G" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

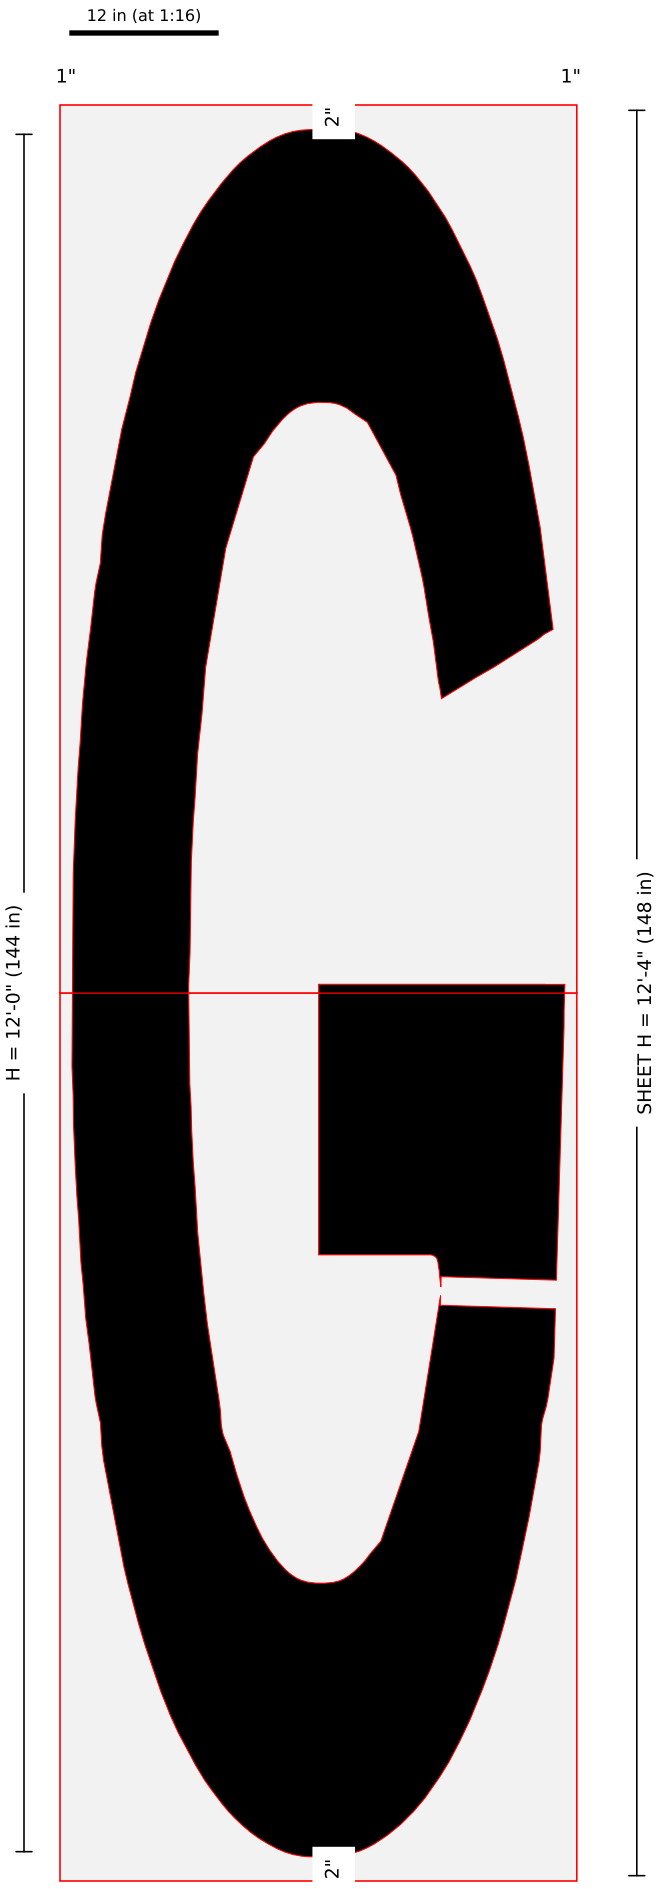


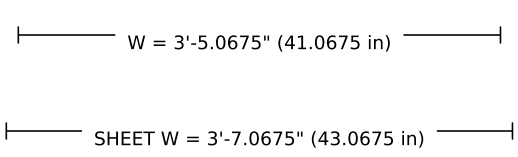

Pieces: 2 (1 x 2); blanks (in): 43.067 x 74, 43.067 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144G-144in-FAA-Airport-Letter-G-157x60-2.jpg: width = kit listing 41 (image-scale 40.36); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-G · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

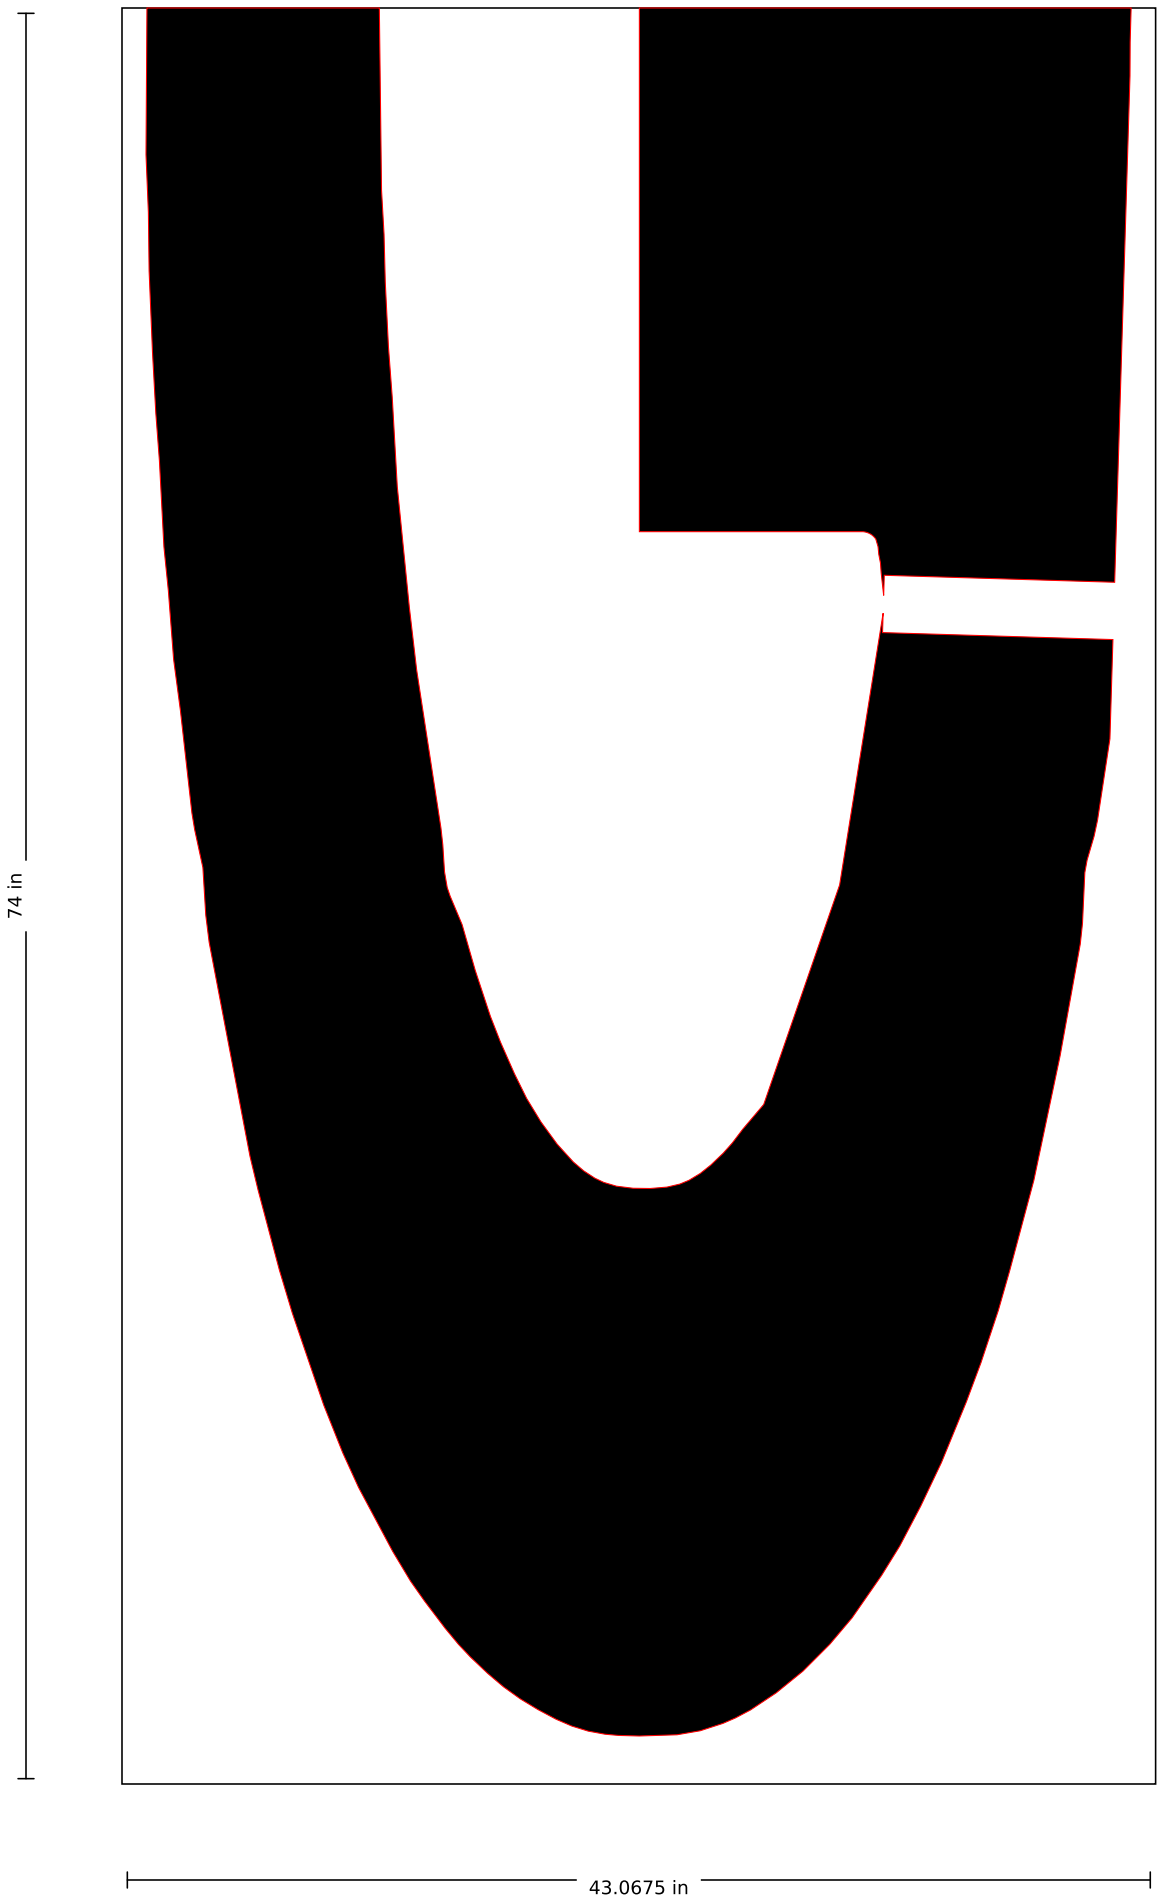

SSS-FAA-144-03-G · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

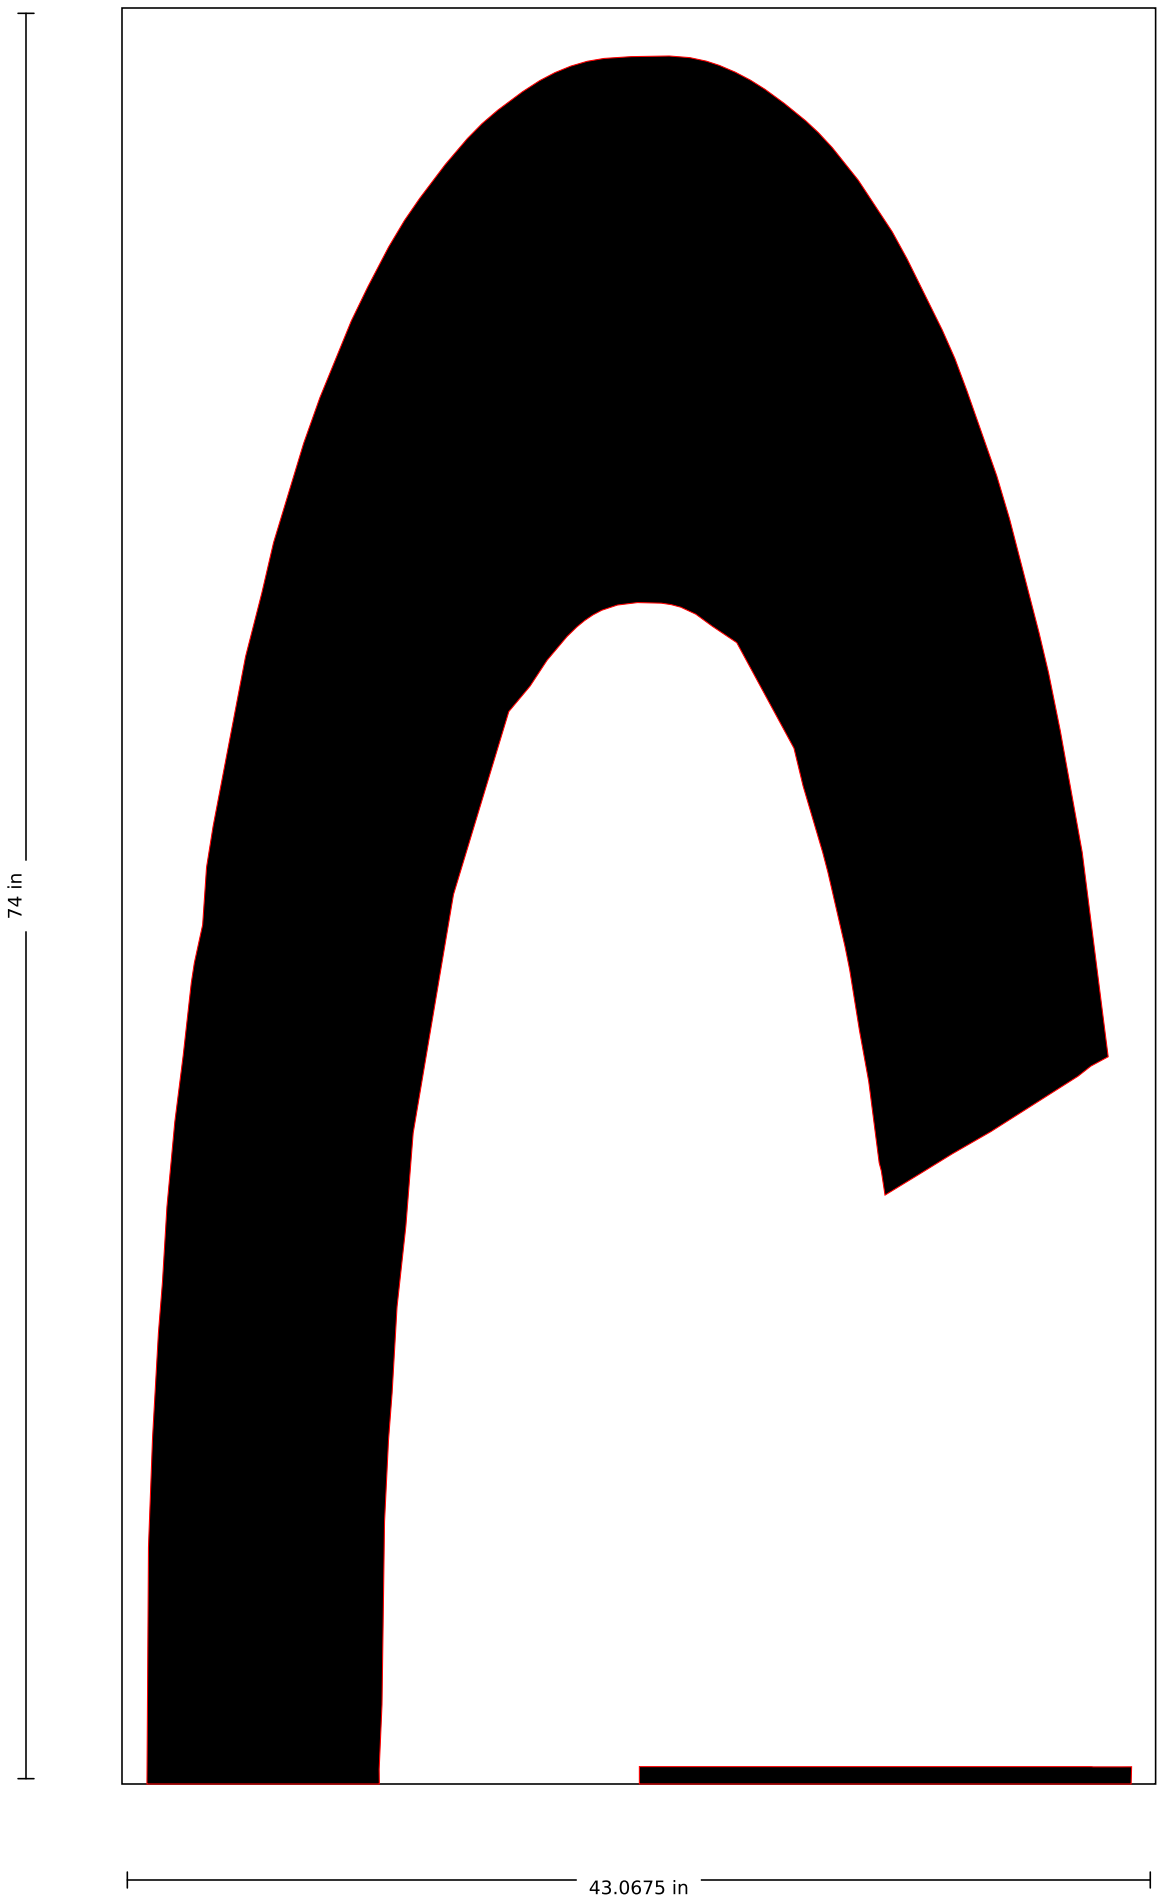

SSS-FAA-144-03-H

144" FAA Airport "H" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

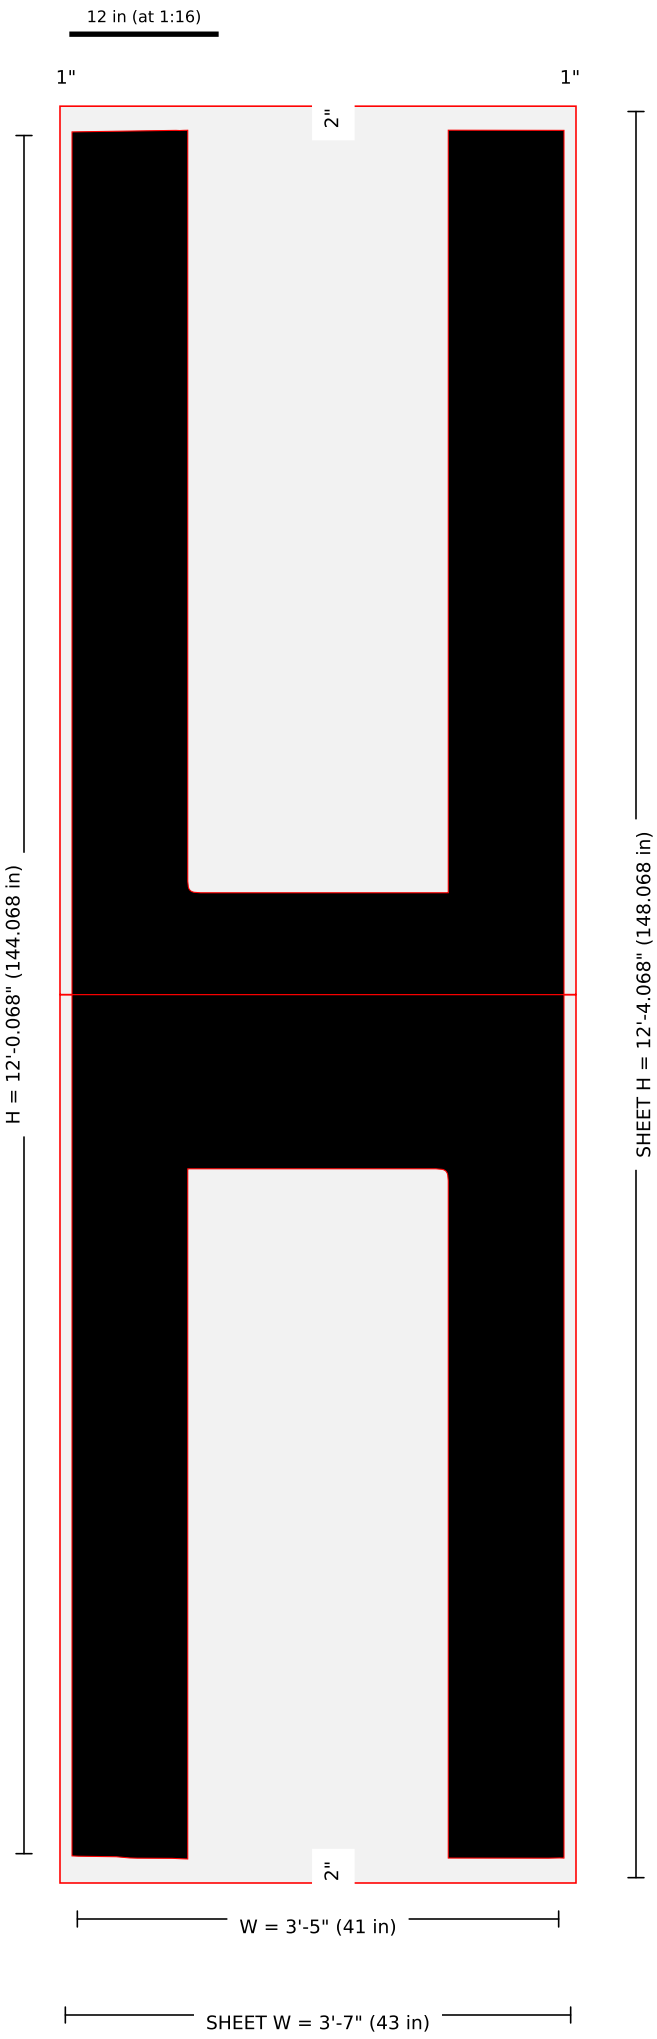

Pieces: 2 (1 x 2); blanks (in): 43 x 74.034, 43 x 74.034 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144H-144in-FAA-Airport-Letter-H-157x60-2.jpg: width = kit listing 41 (image-scale 41.05); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-H · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

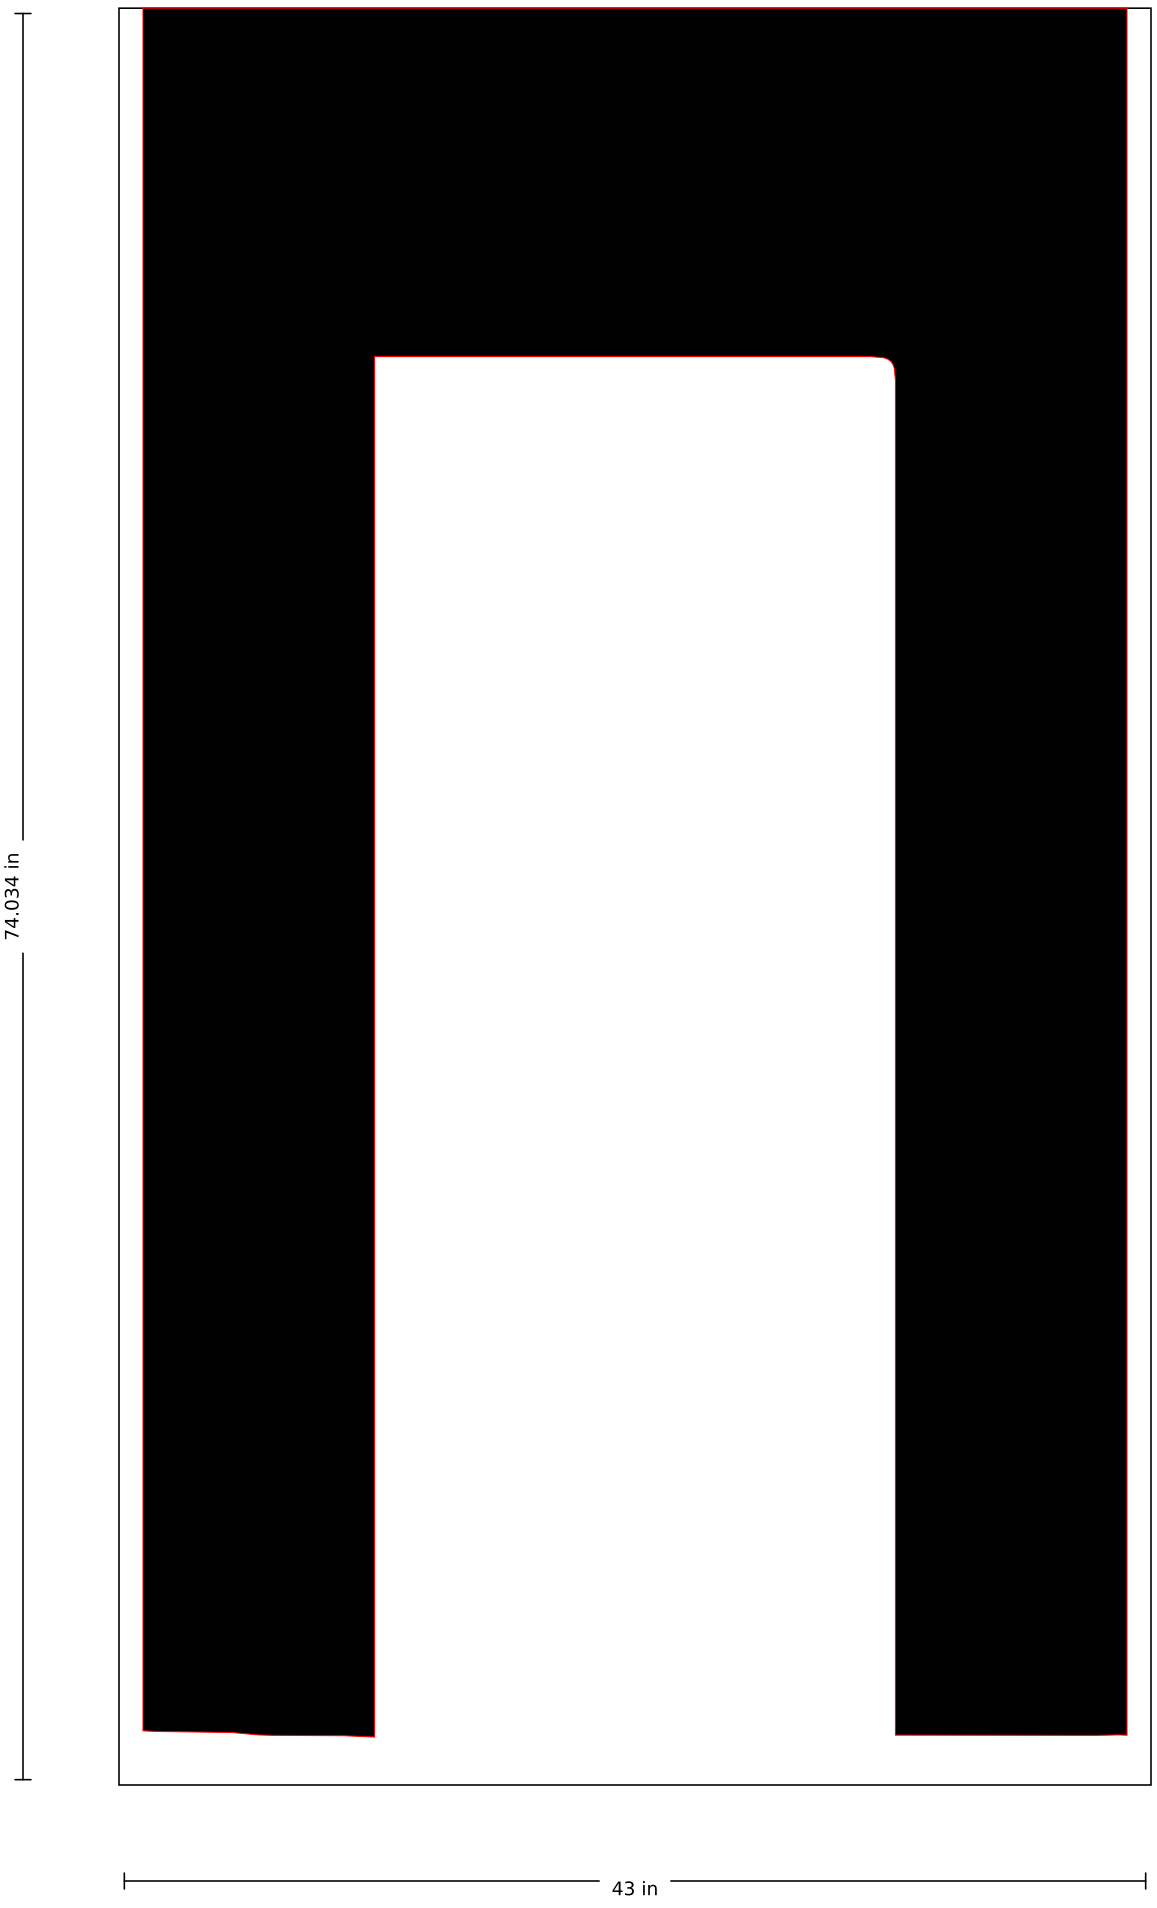

SSS-FAA-144-03-H · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

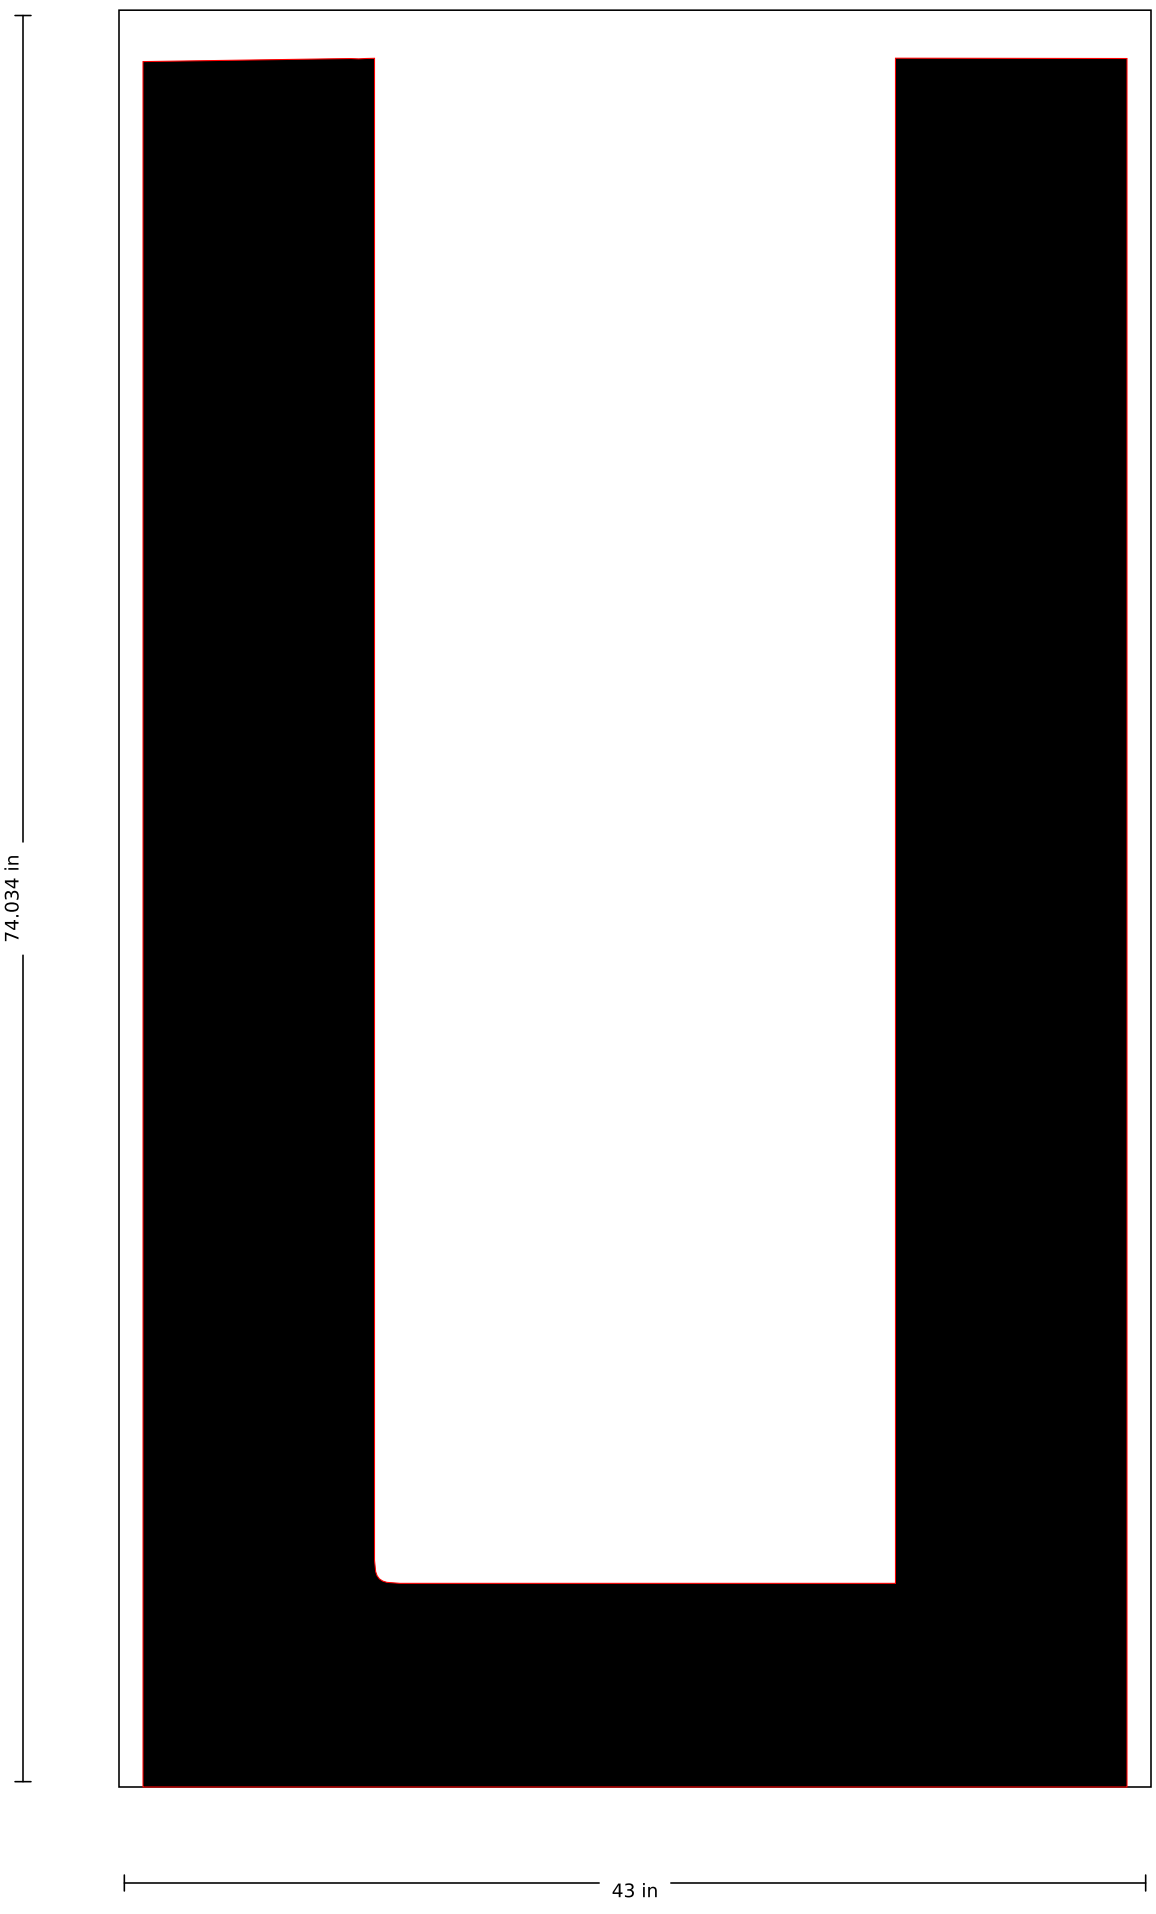

SSS-FAA-144-03-J

144" FAA Airport "J" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 37.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

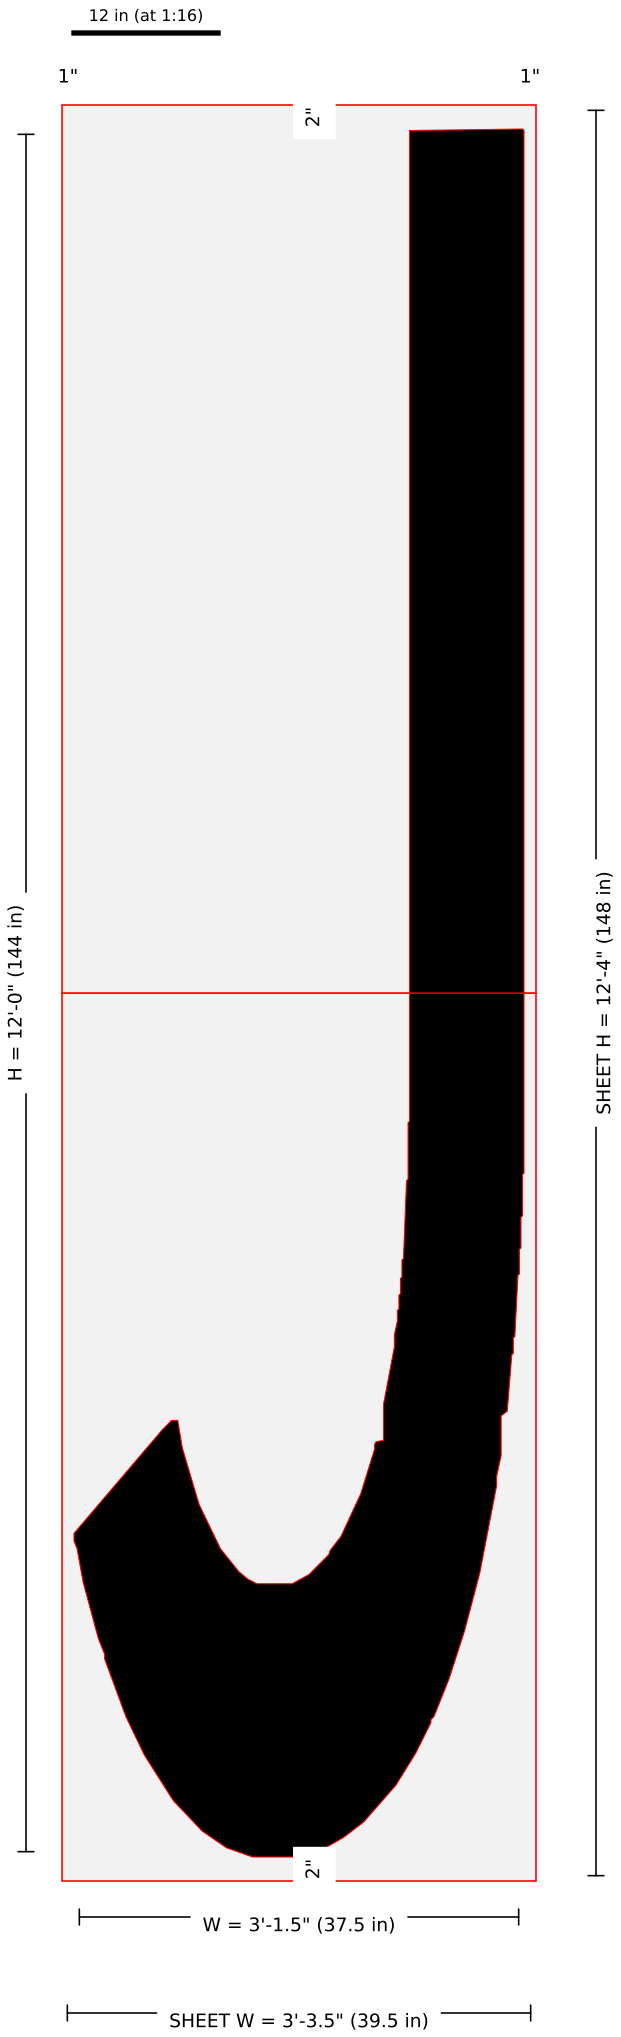

Pieces: 2 (1 x 2); blanks (in): 39.5 x 74, 39.5 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144J-144in-FAA-Airport-Letter-J-157x60-2.jpg: width 37.5 from image scale (37.53); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-J · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

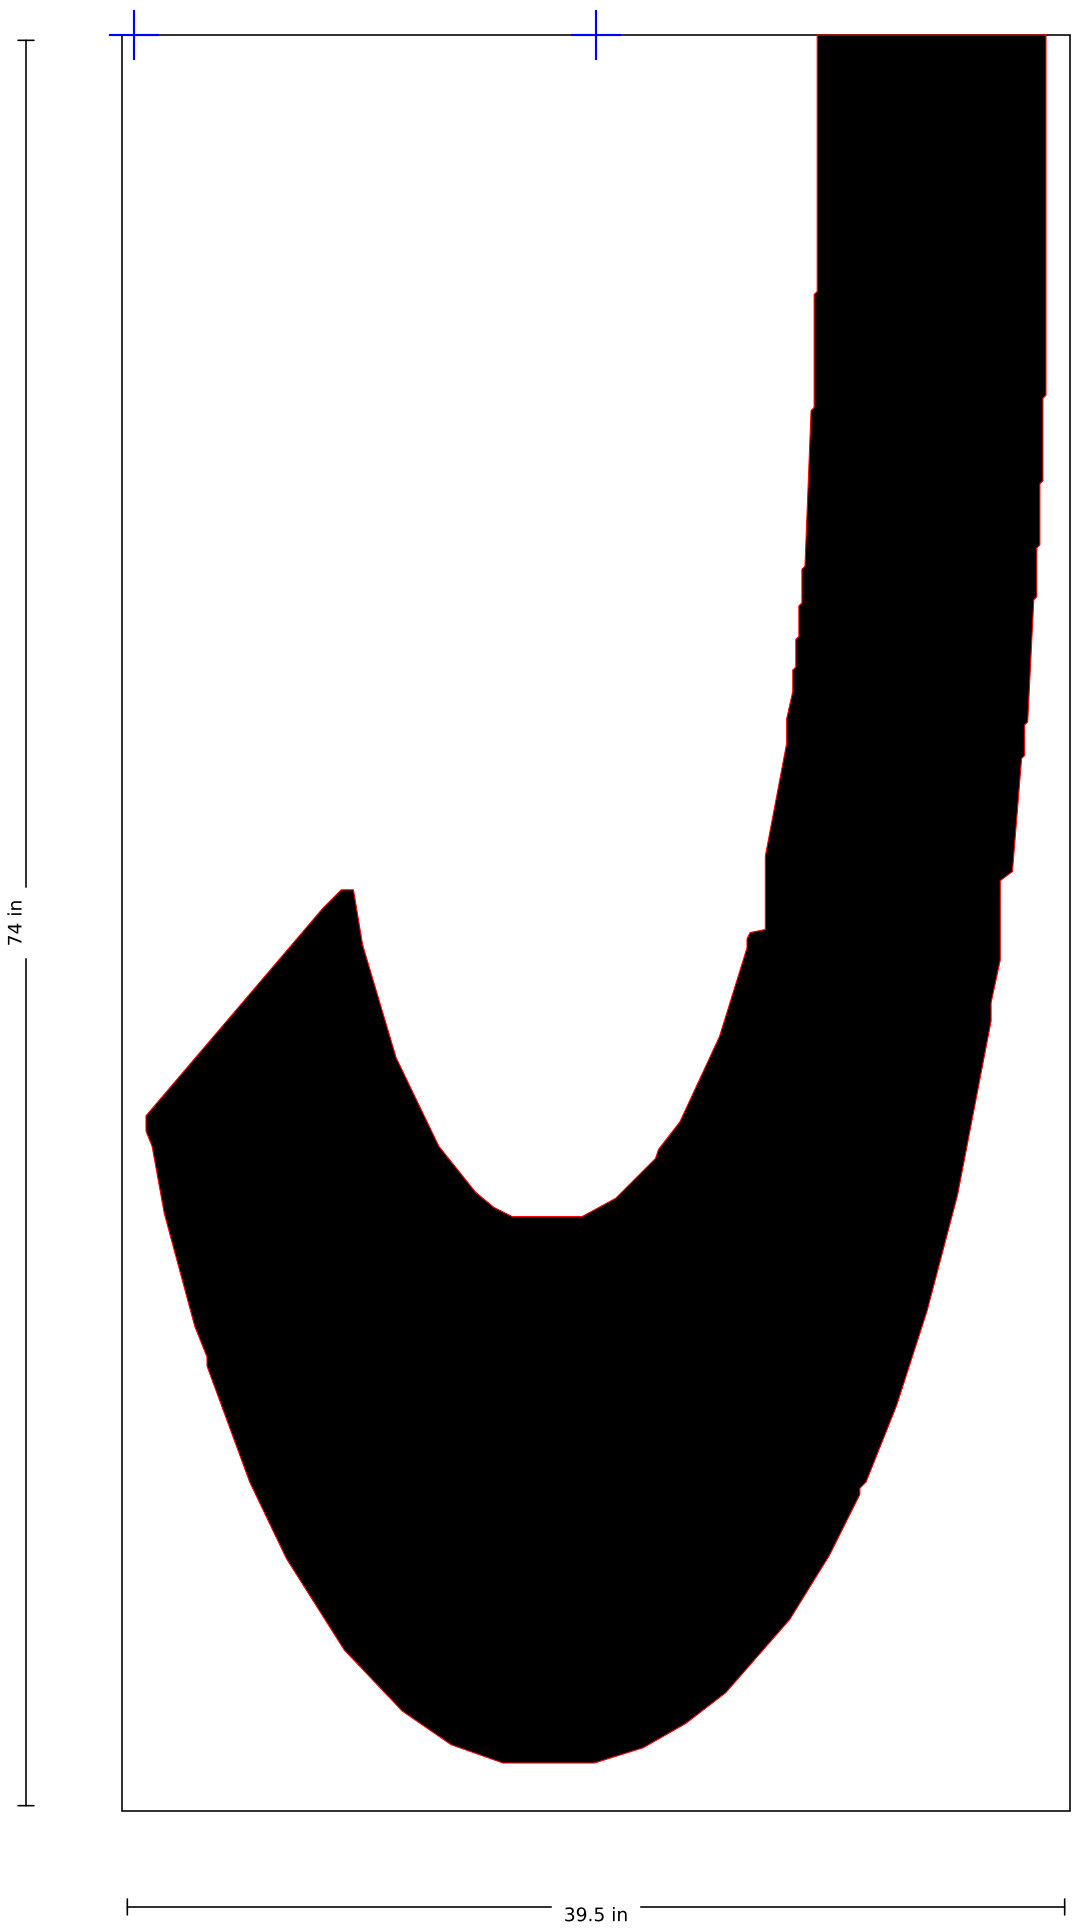

SSS-FAA-144-03-J · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

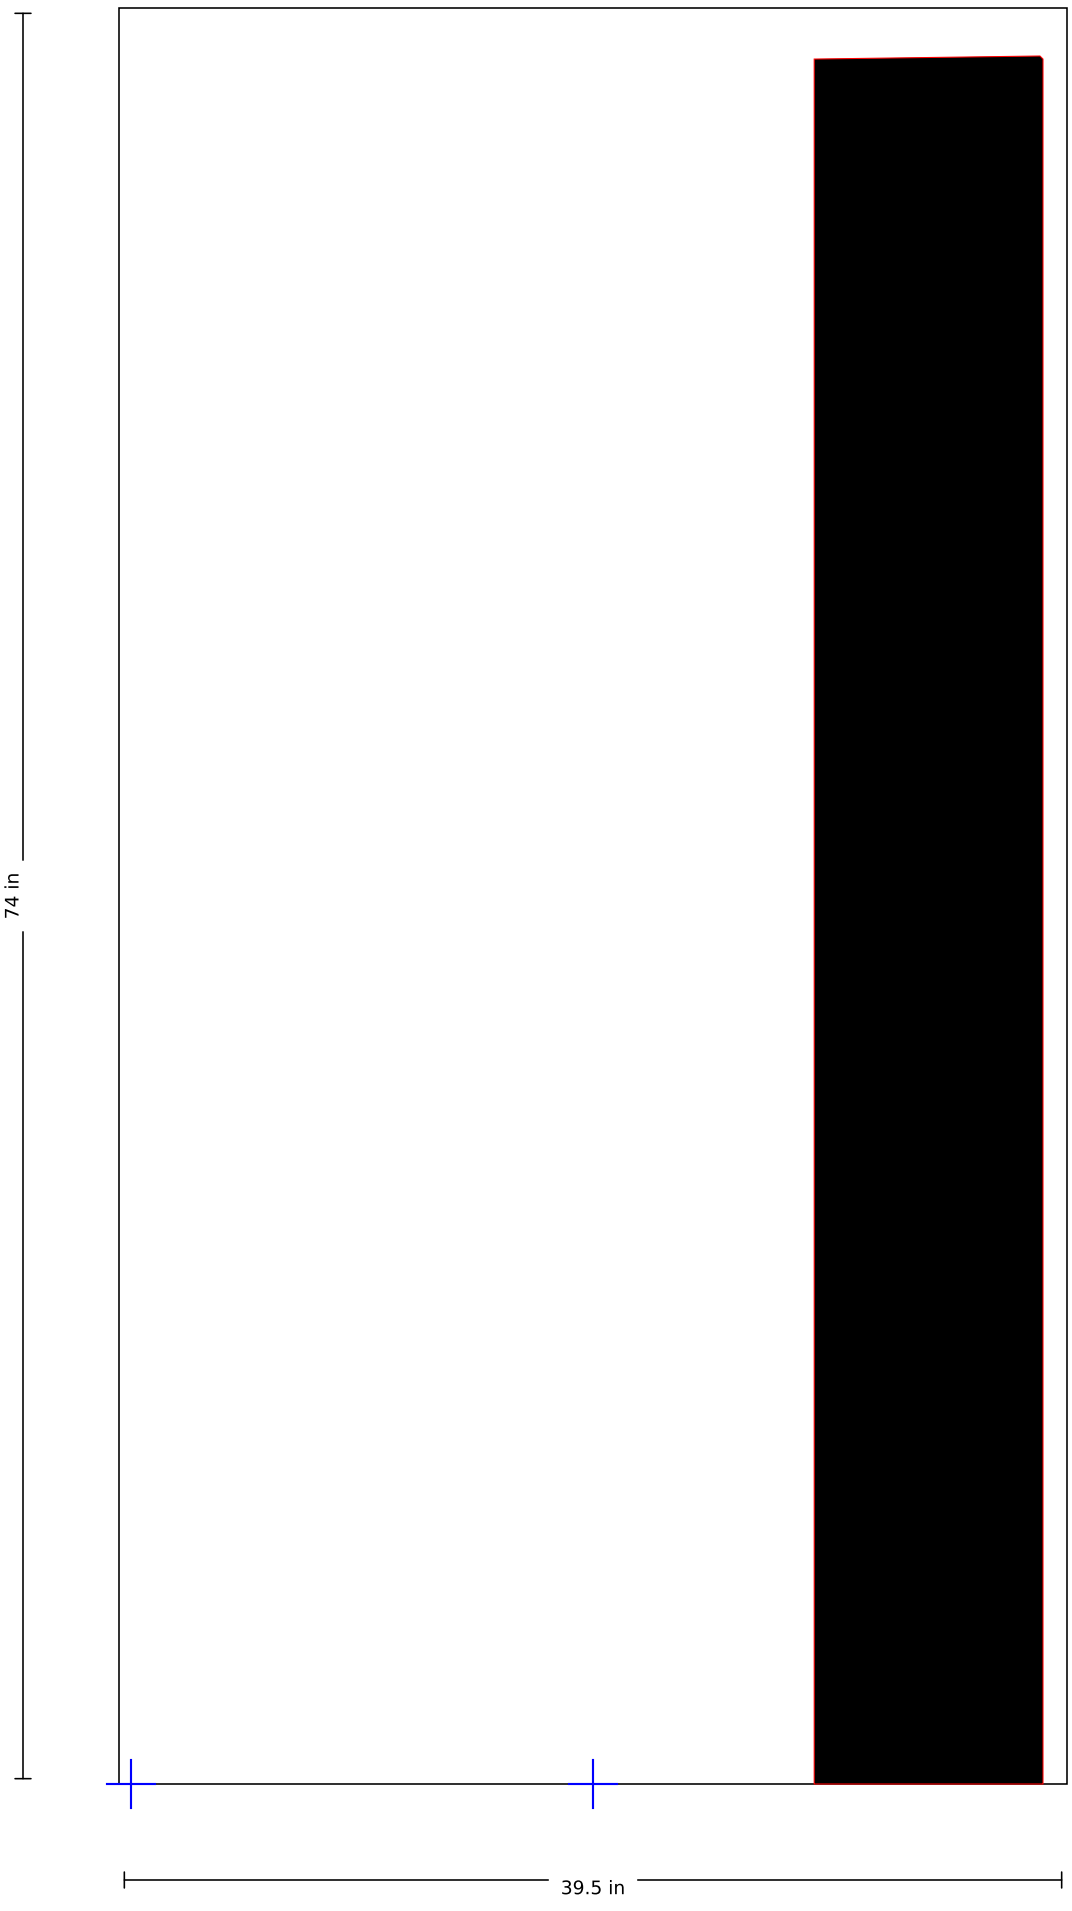

SSS-FAA-144-03-K

144" FAA Airport "K" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

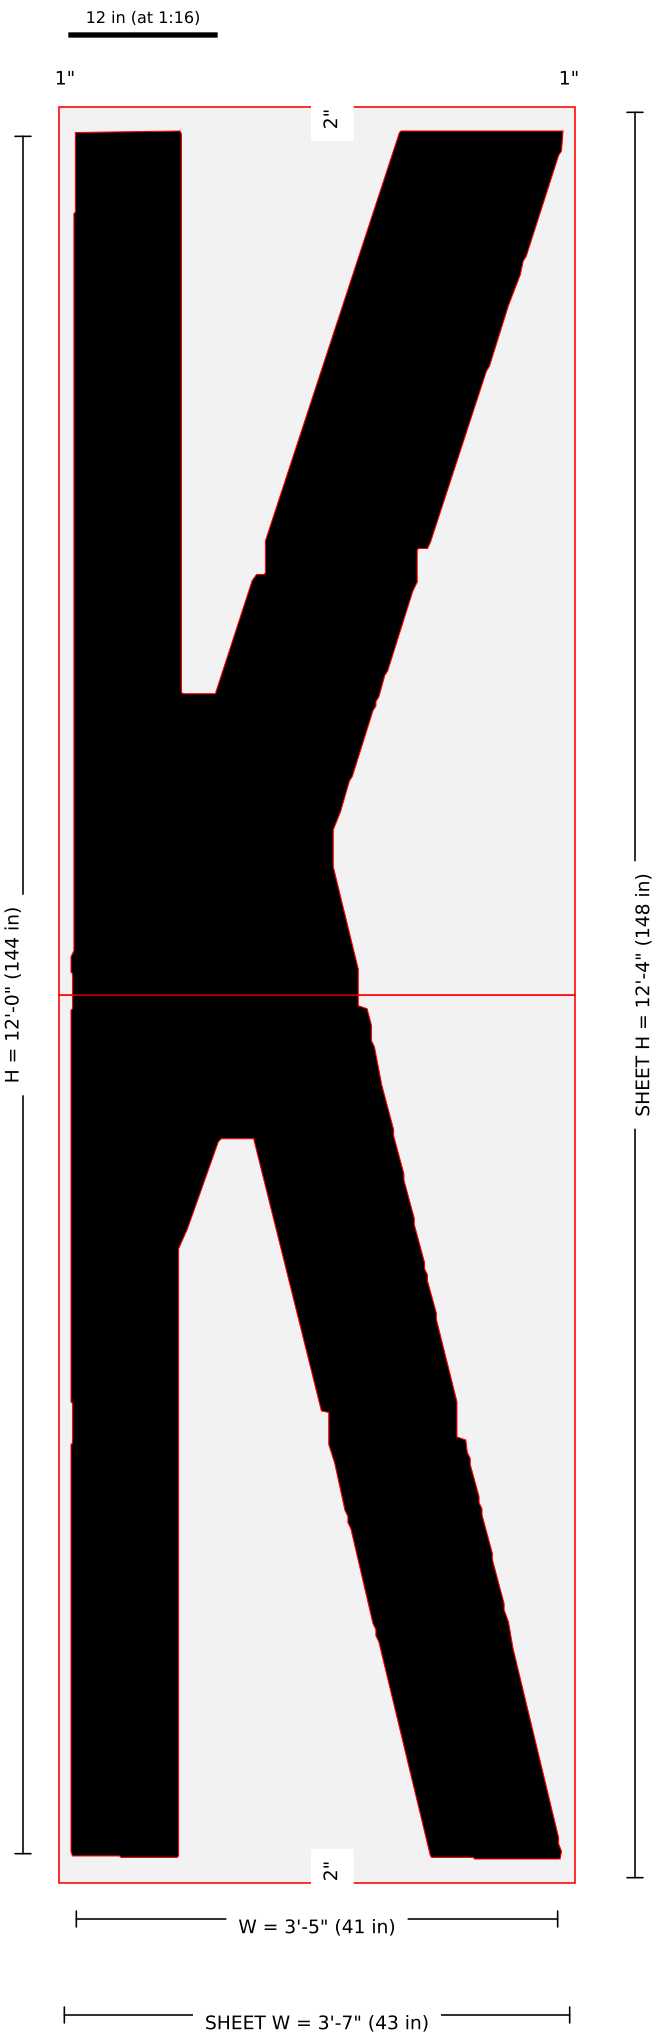

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144K-144in-FAA-Airport-Letter-K-157x60-2.jpg: width = kit listing 41 (image-scale 42.56); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-K · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

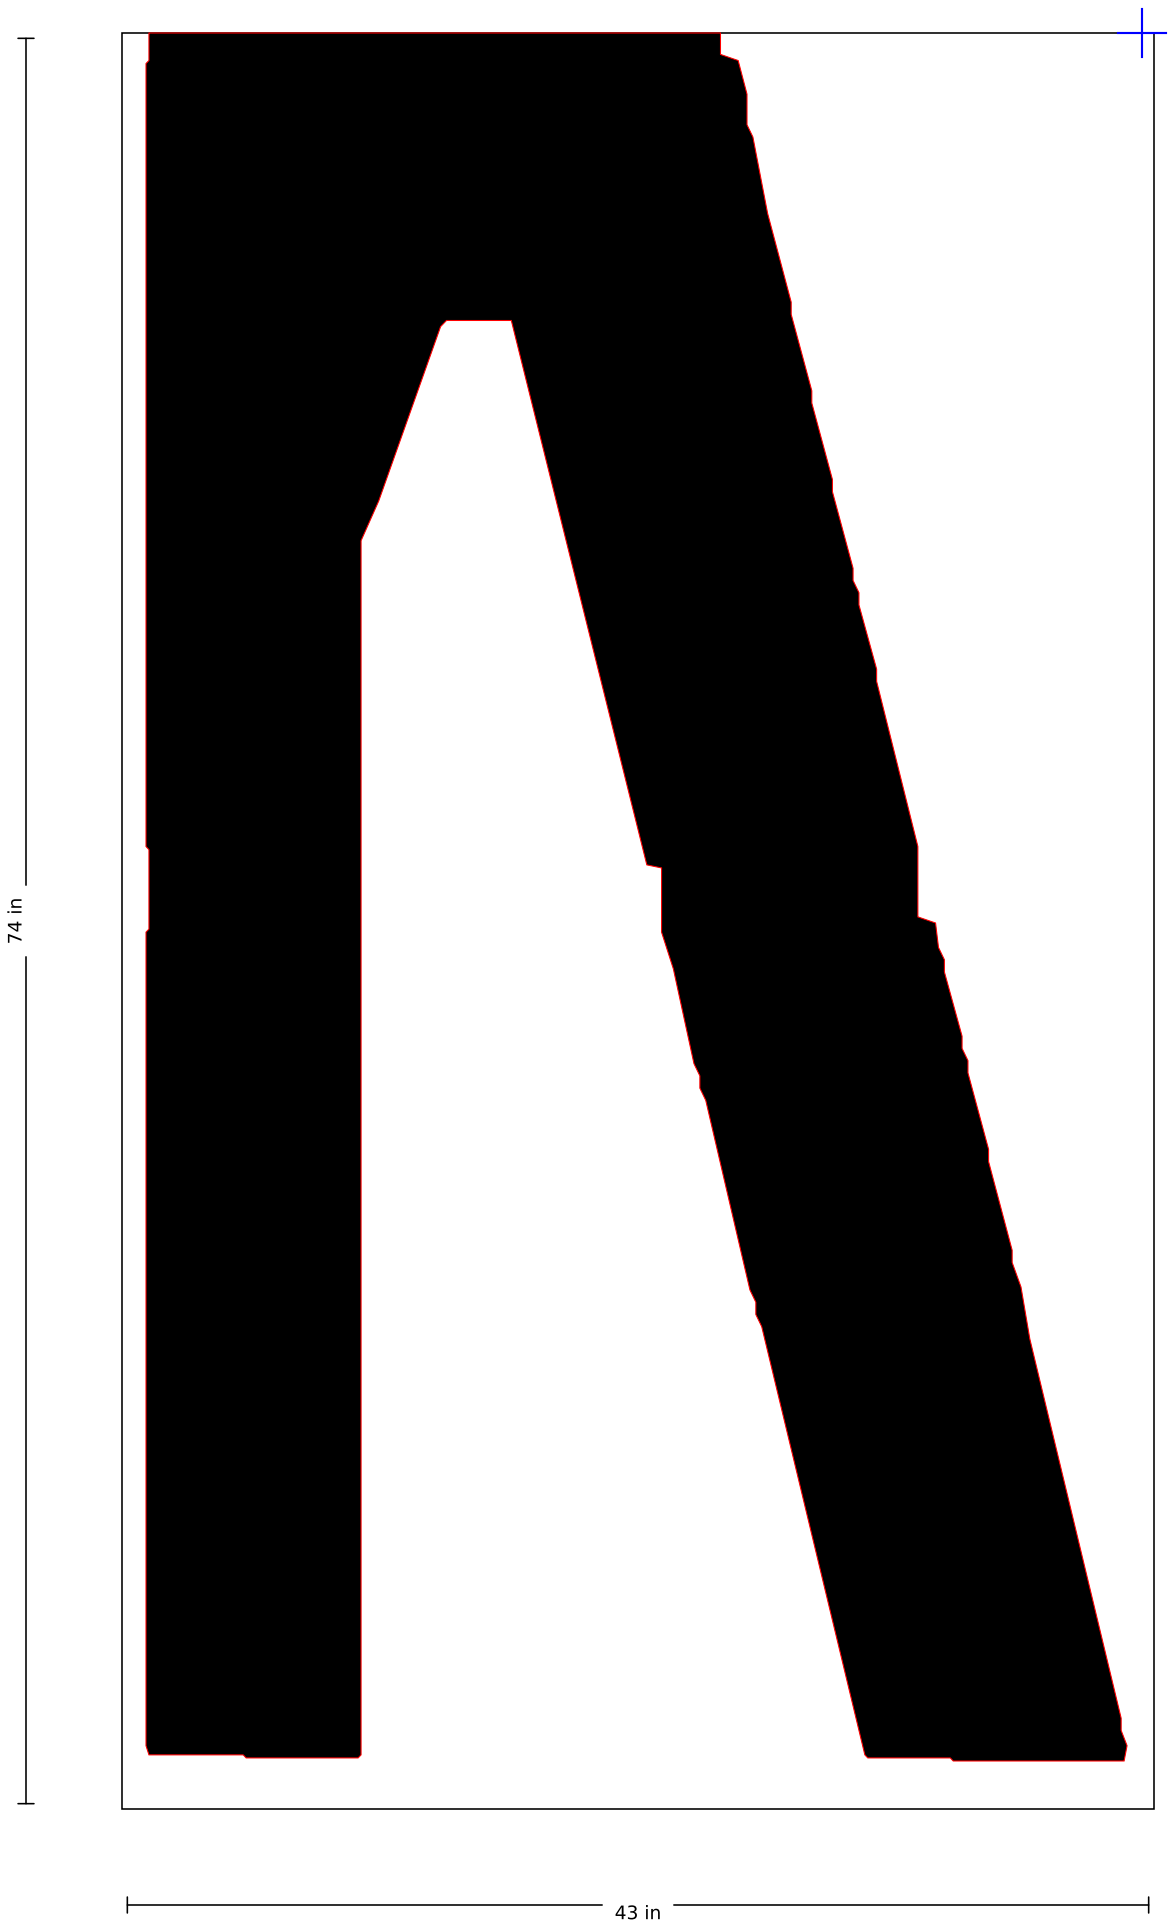

SSS-FAA-144-03-K · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

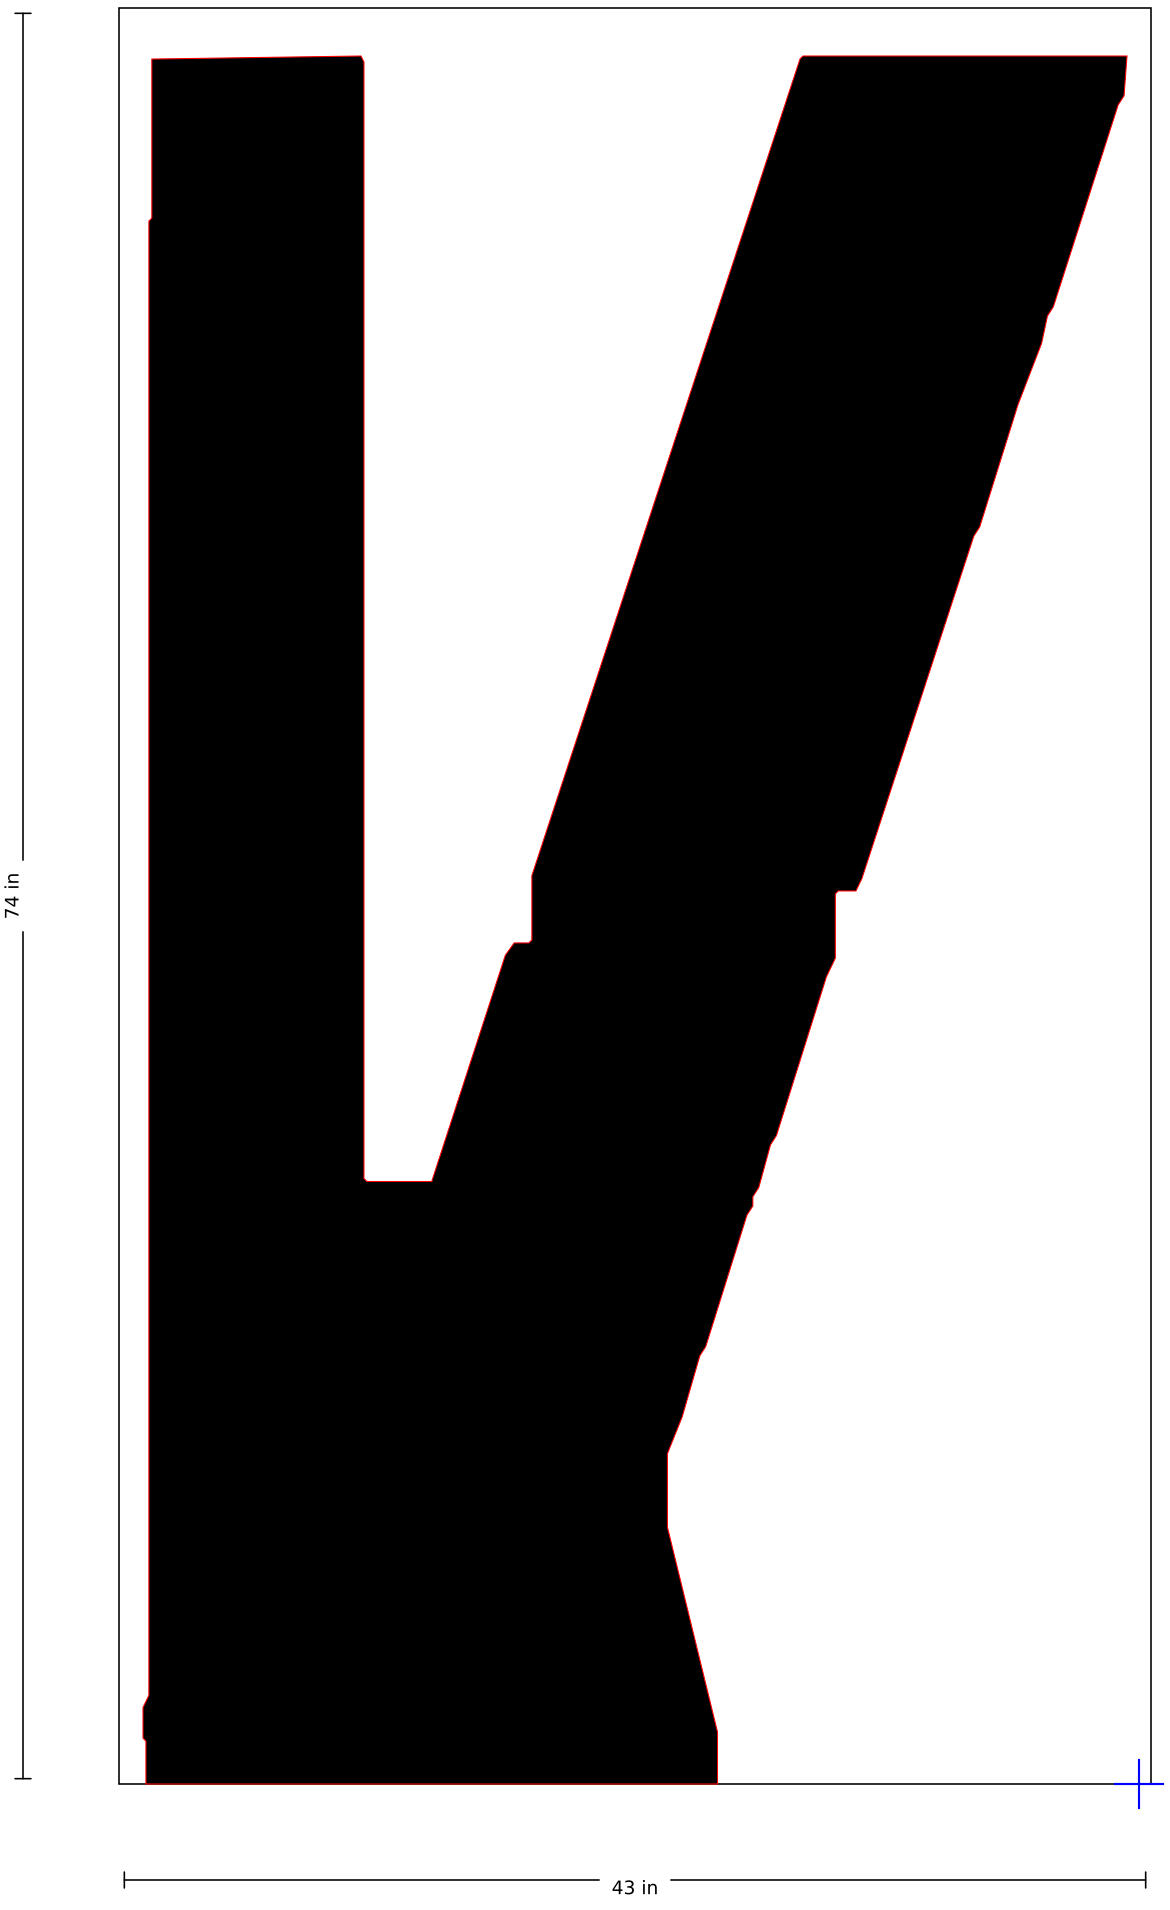

SSS-FAA-144-03-L

144" FAA Airport "L" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

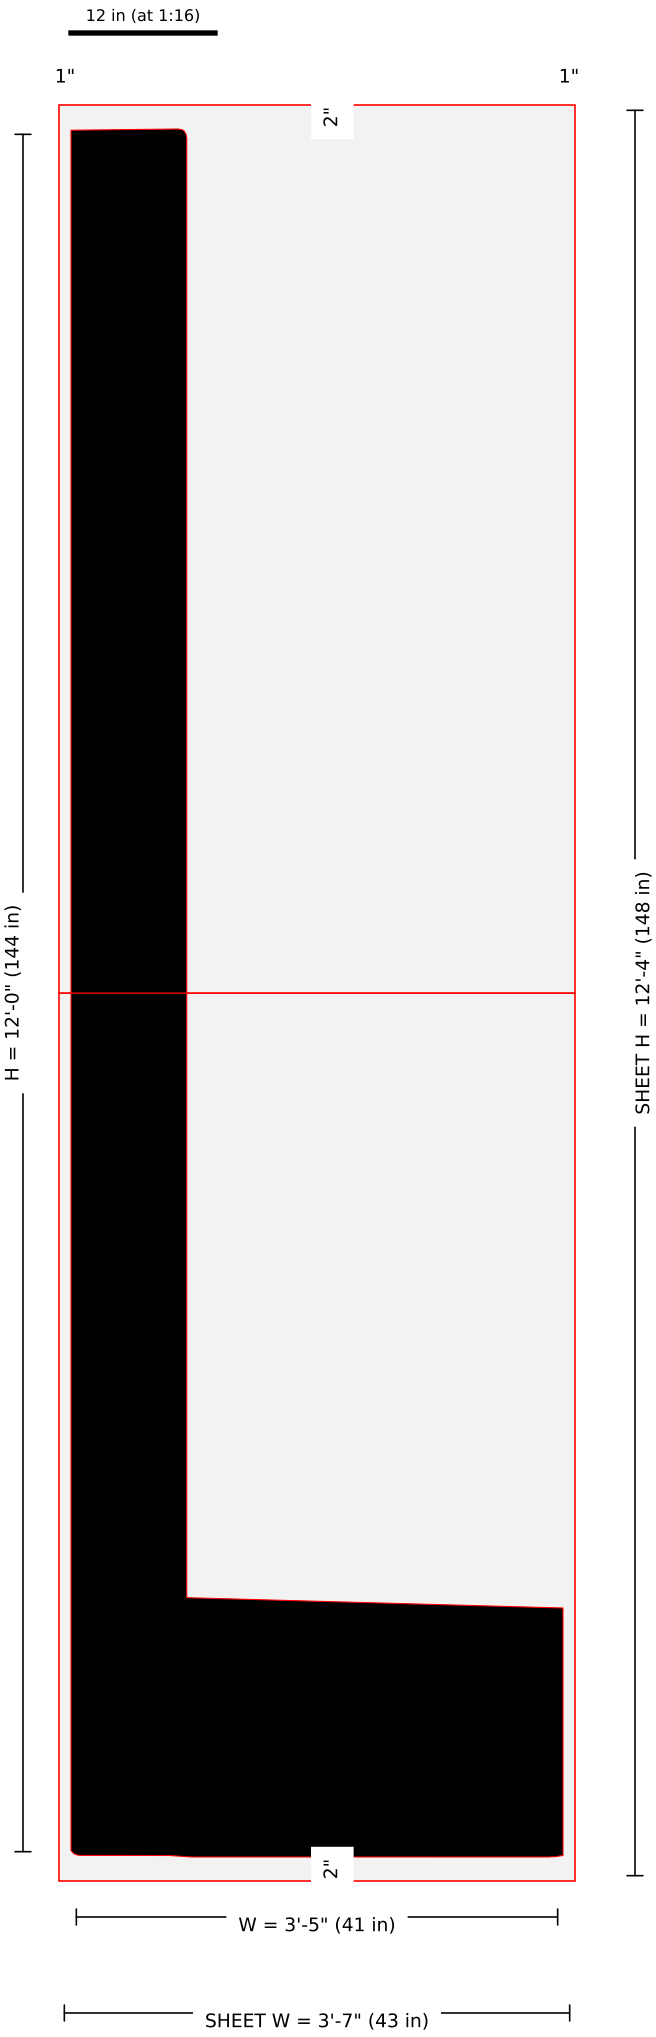

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144L-144in-FAA-Airport-Letter-L-157x60-2.jpg: width = kit listing 41 (image-scale 41.05); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-L · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

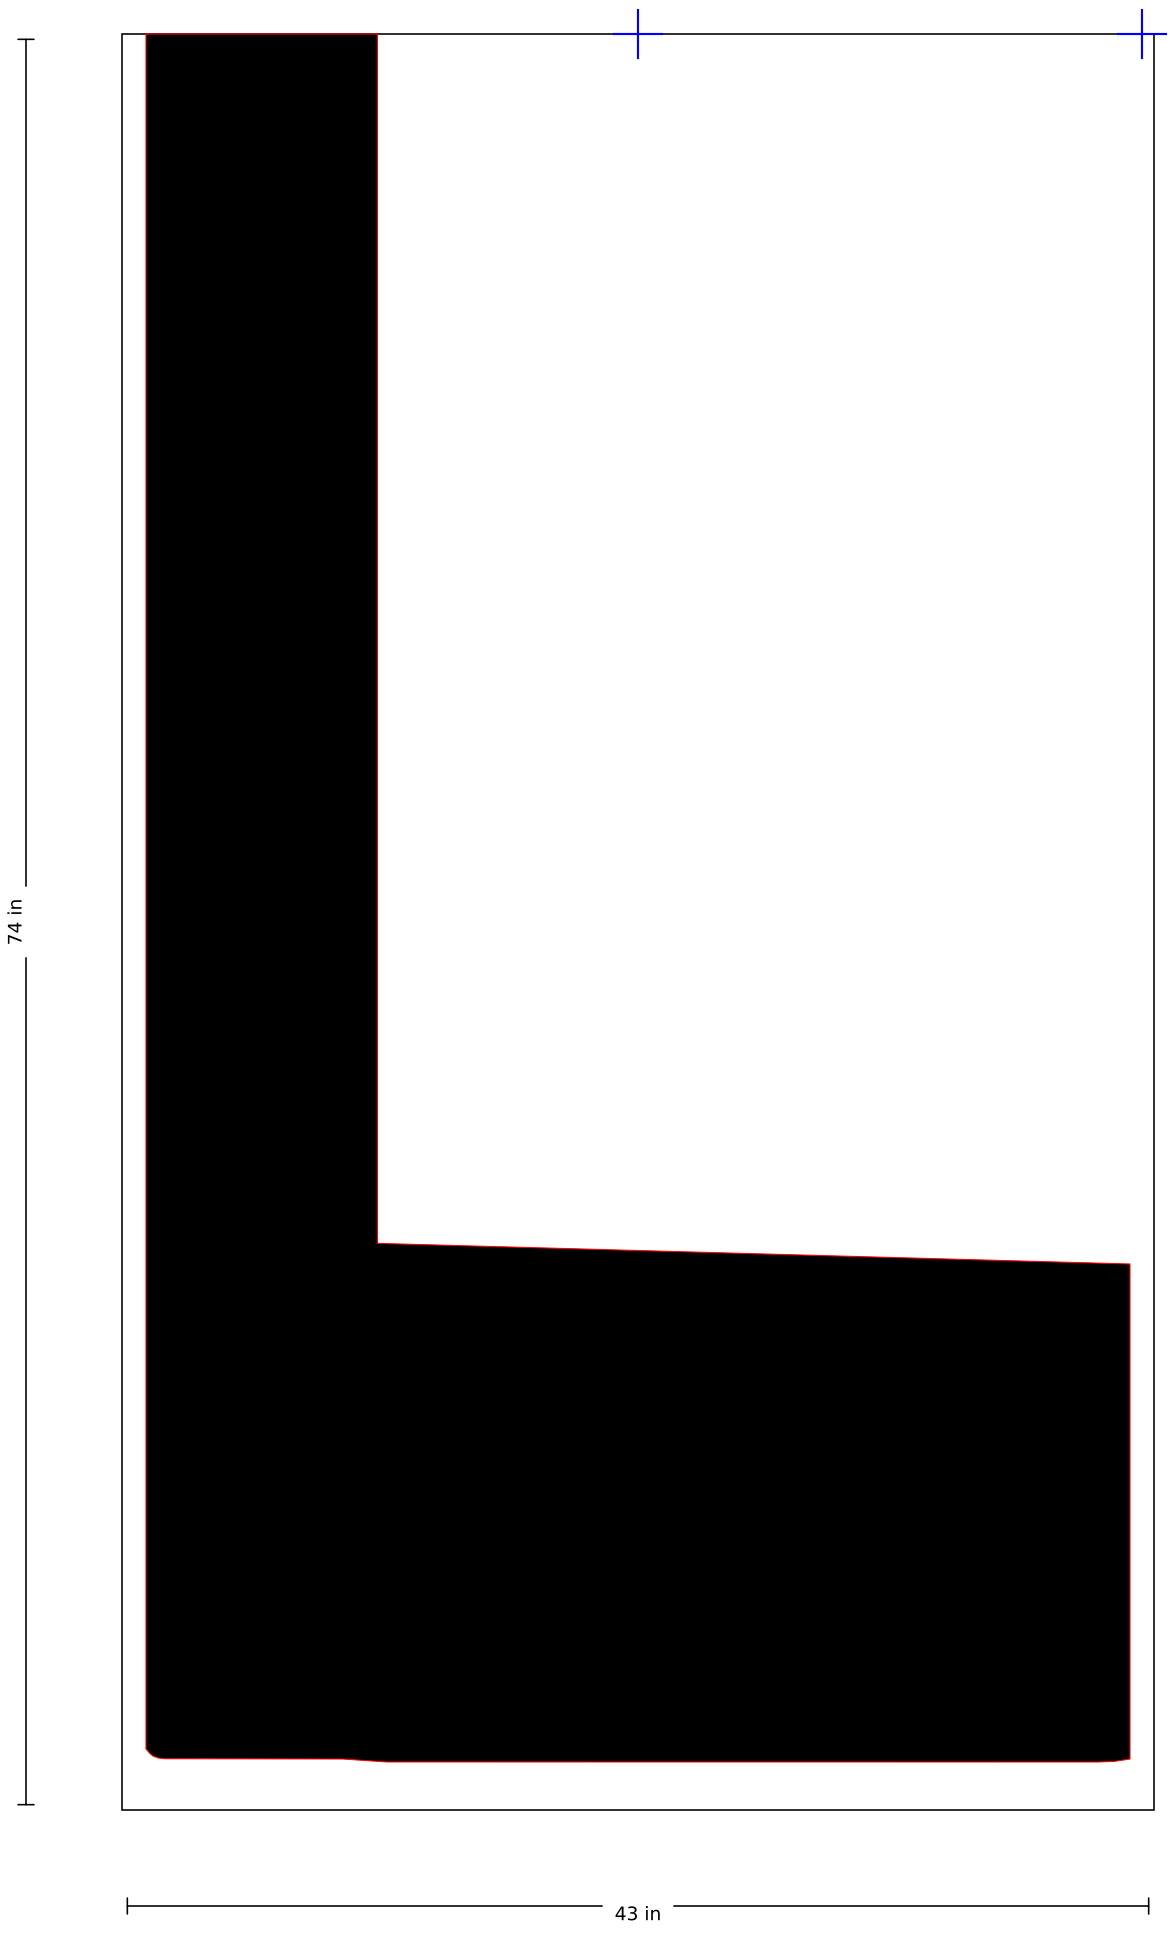

SSS-FAA-144-03-L · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

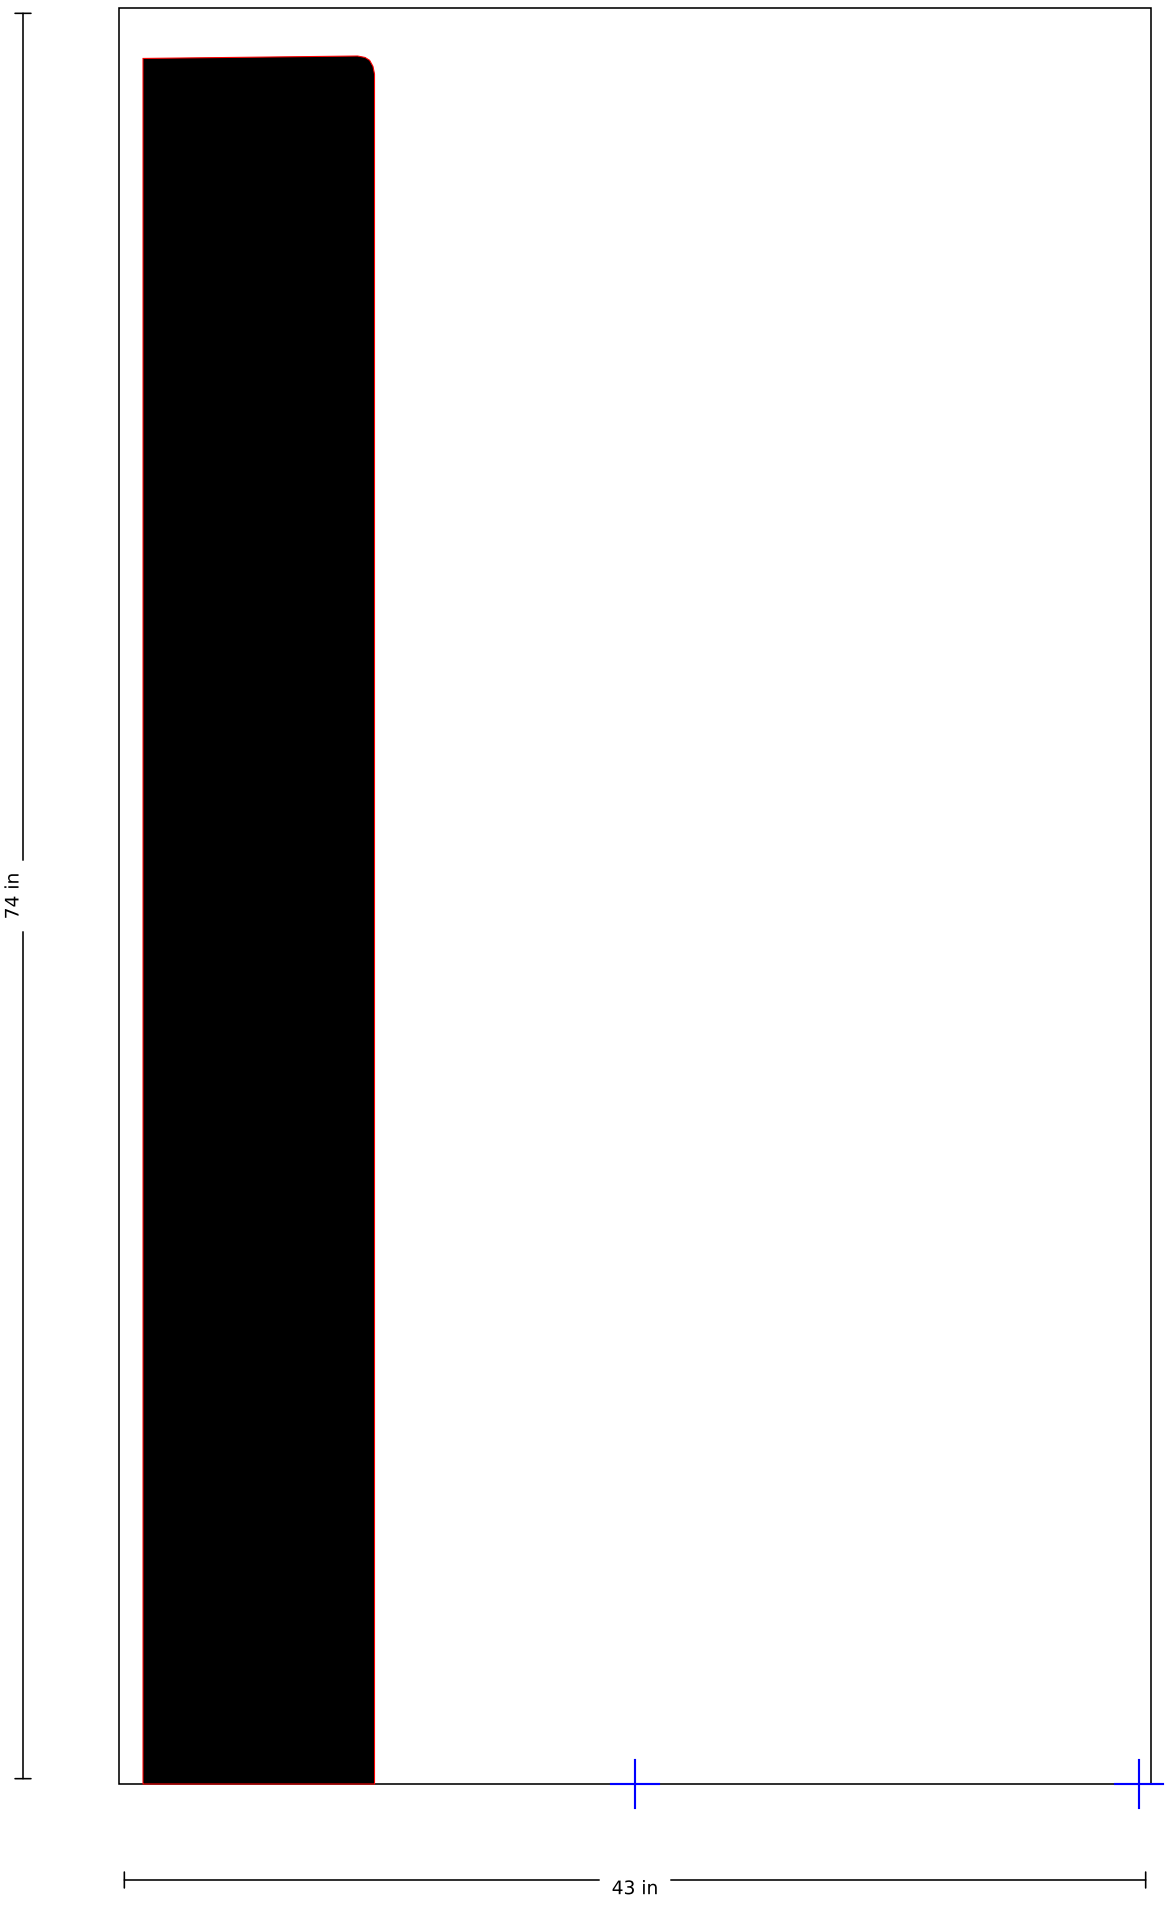

SSS-FAA-144-03-M

144" FAA Airport "M" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 46.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

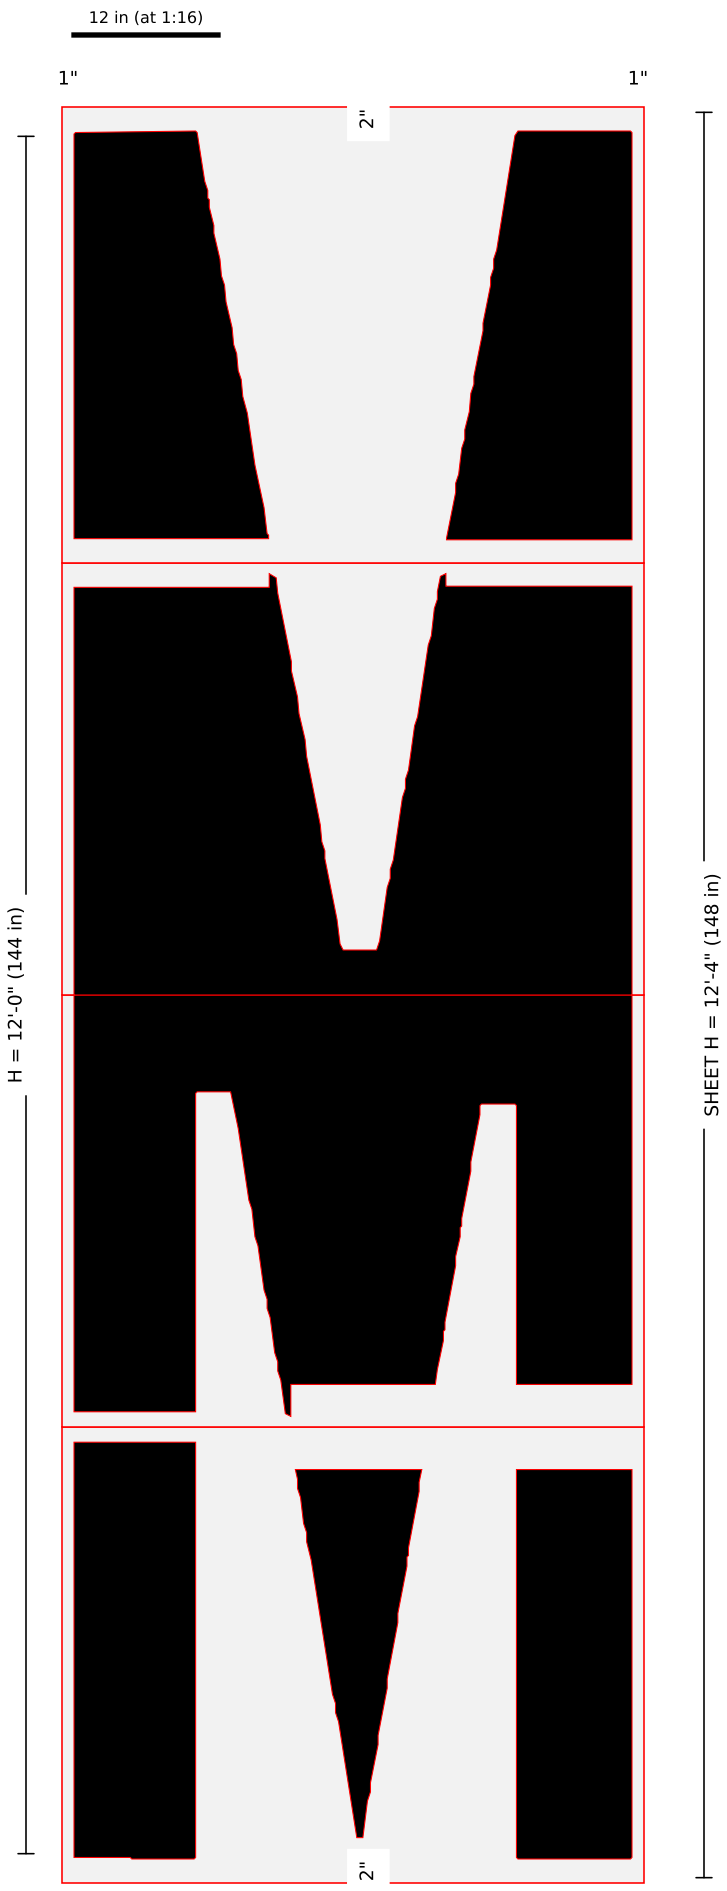

Pieces: 4 (1 x 4); blanks (in): 48.5 x 38, 48.5 x 36, 48.5 x 36, 48.5 x 38 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144M-144in-FAA-Airport-Letter-M-157x60-2.jpg: width 46.5 from image scale (46.64); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 5 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-M · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

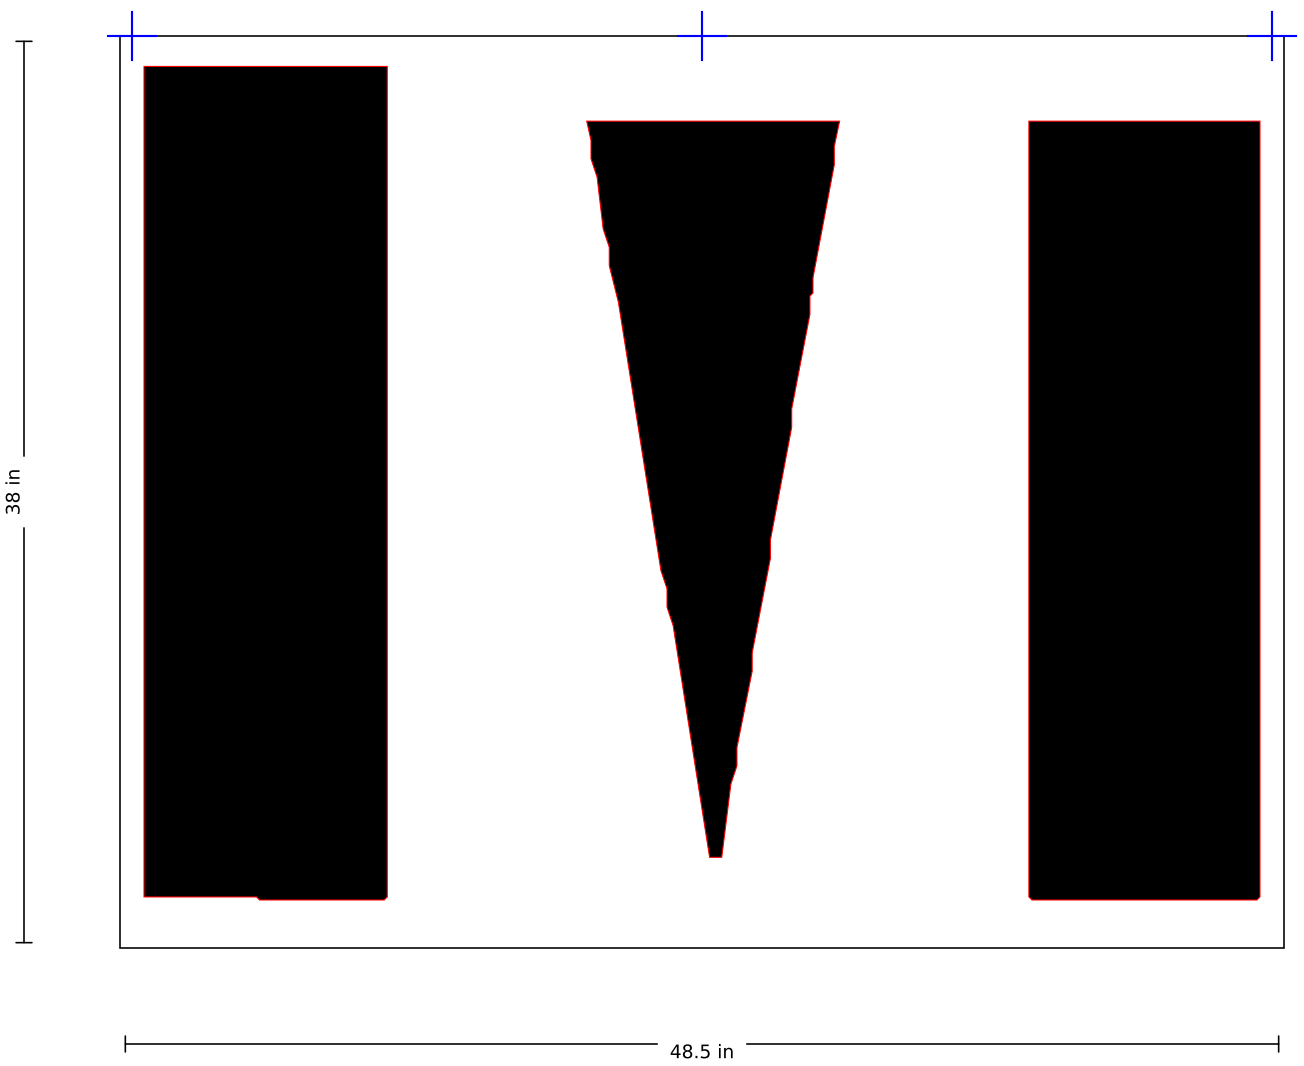


SSS-FAA-144-03-M · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

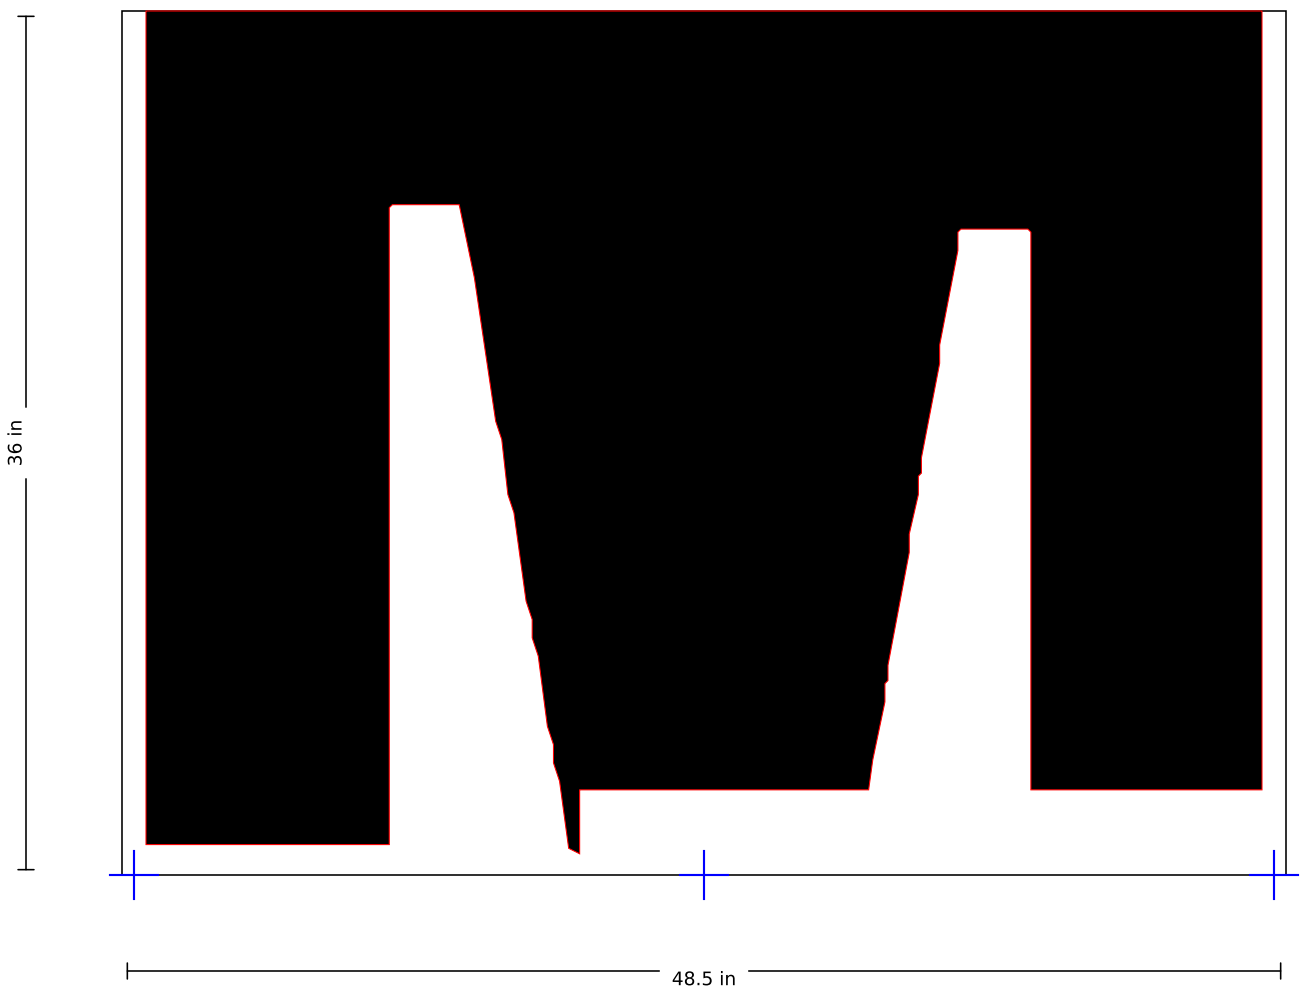


SSS-FAA-144-03-M · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

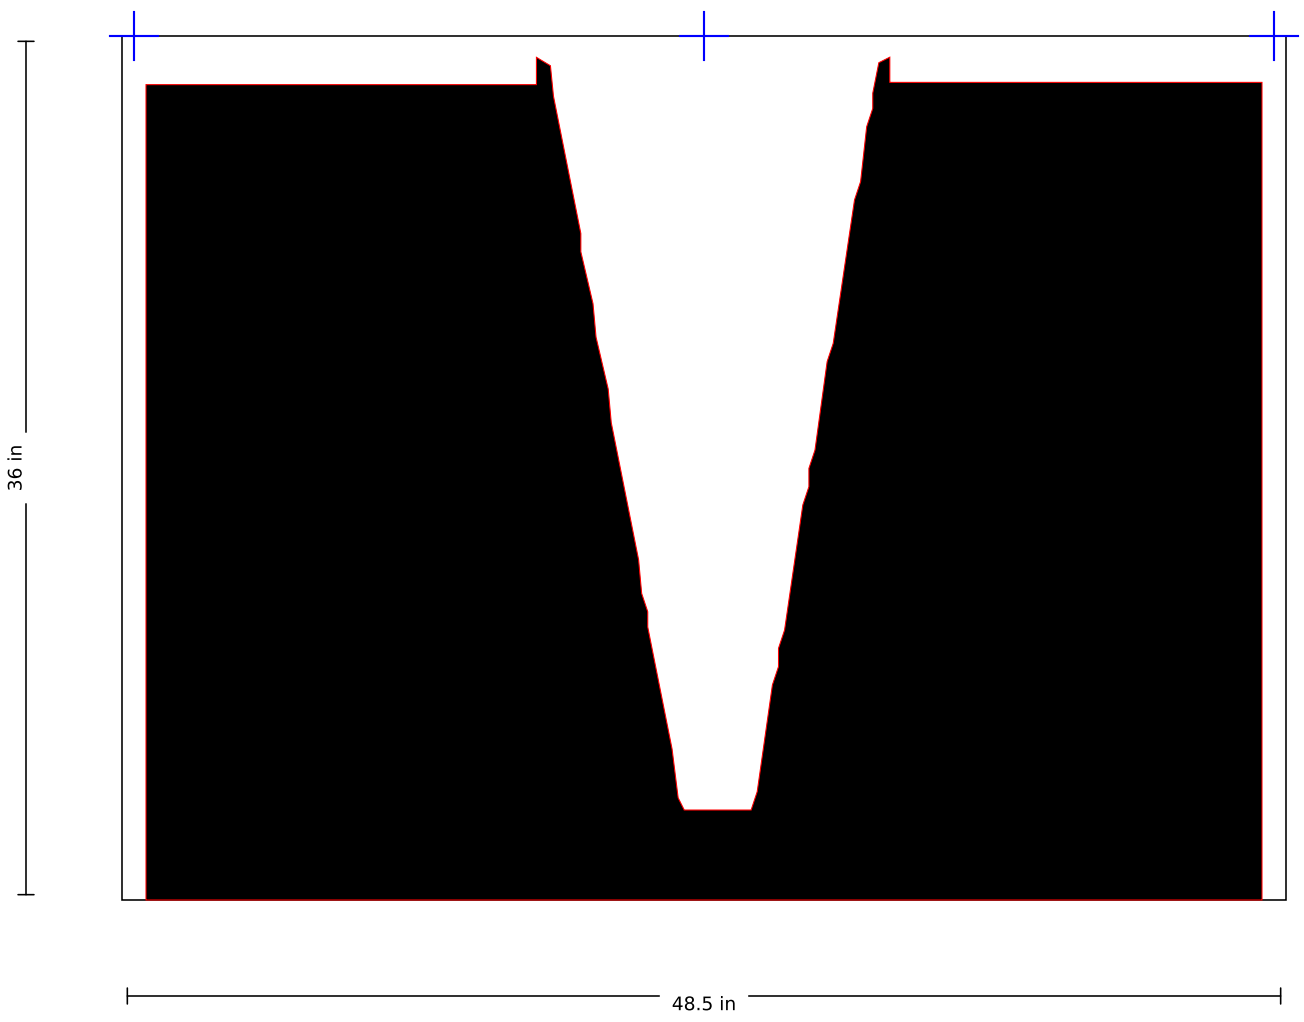

SSS-FAA-144-03-M · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

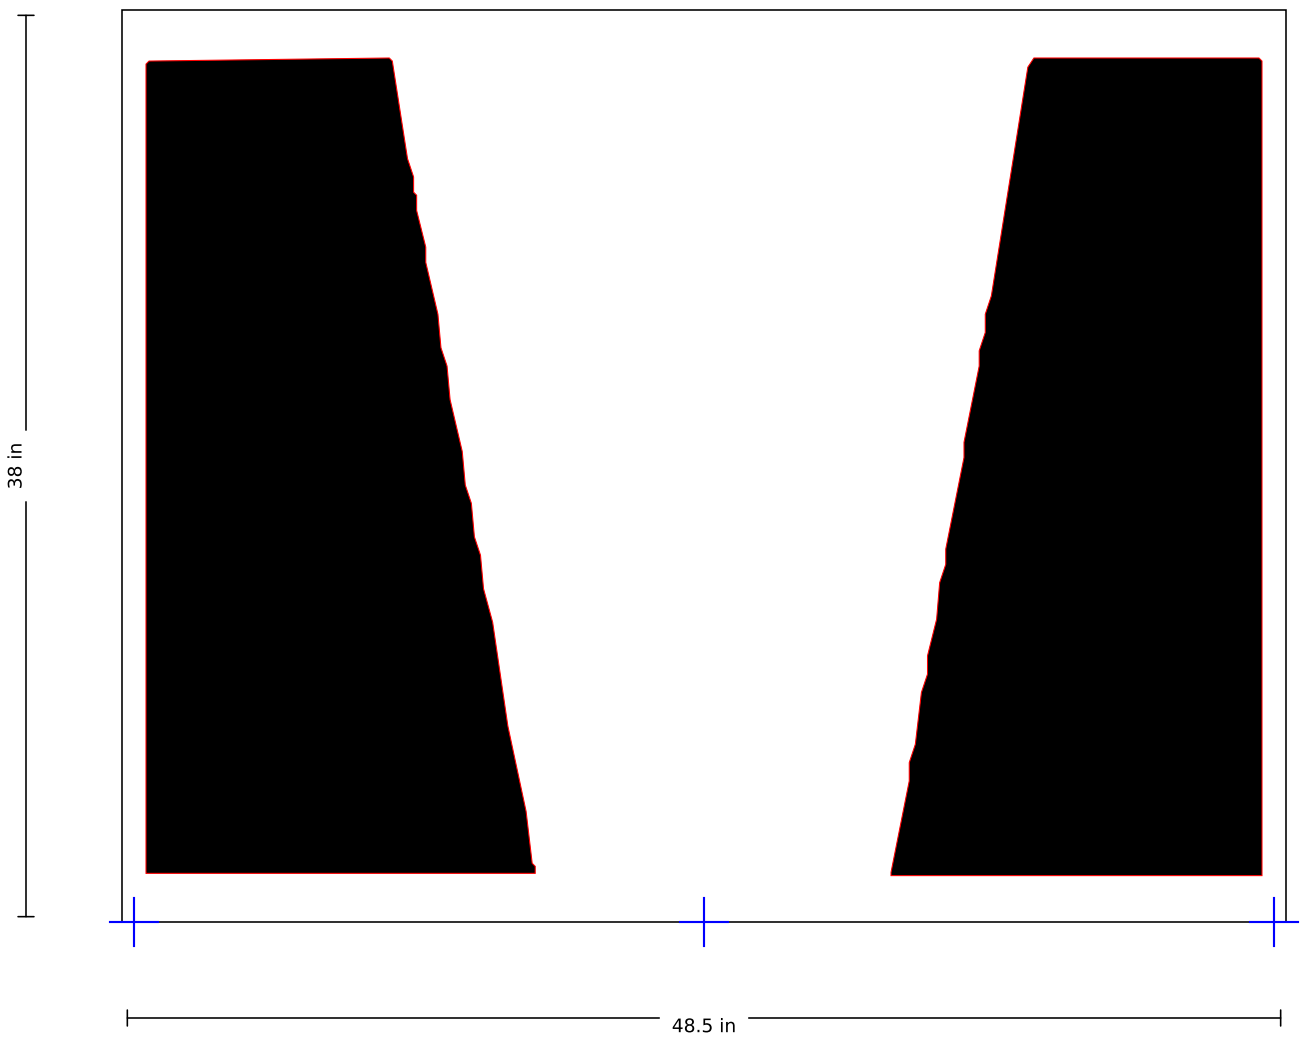

SSS-FAA-144-03-N

144" FAA Airport "N" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

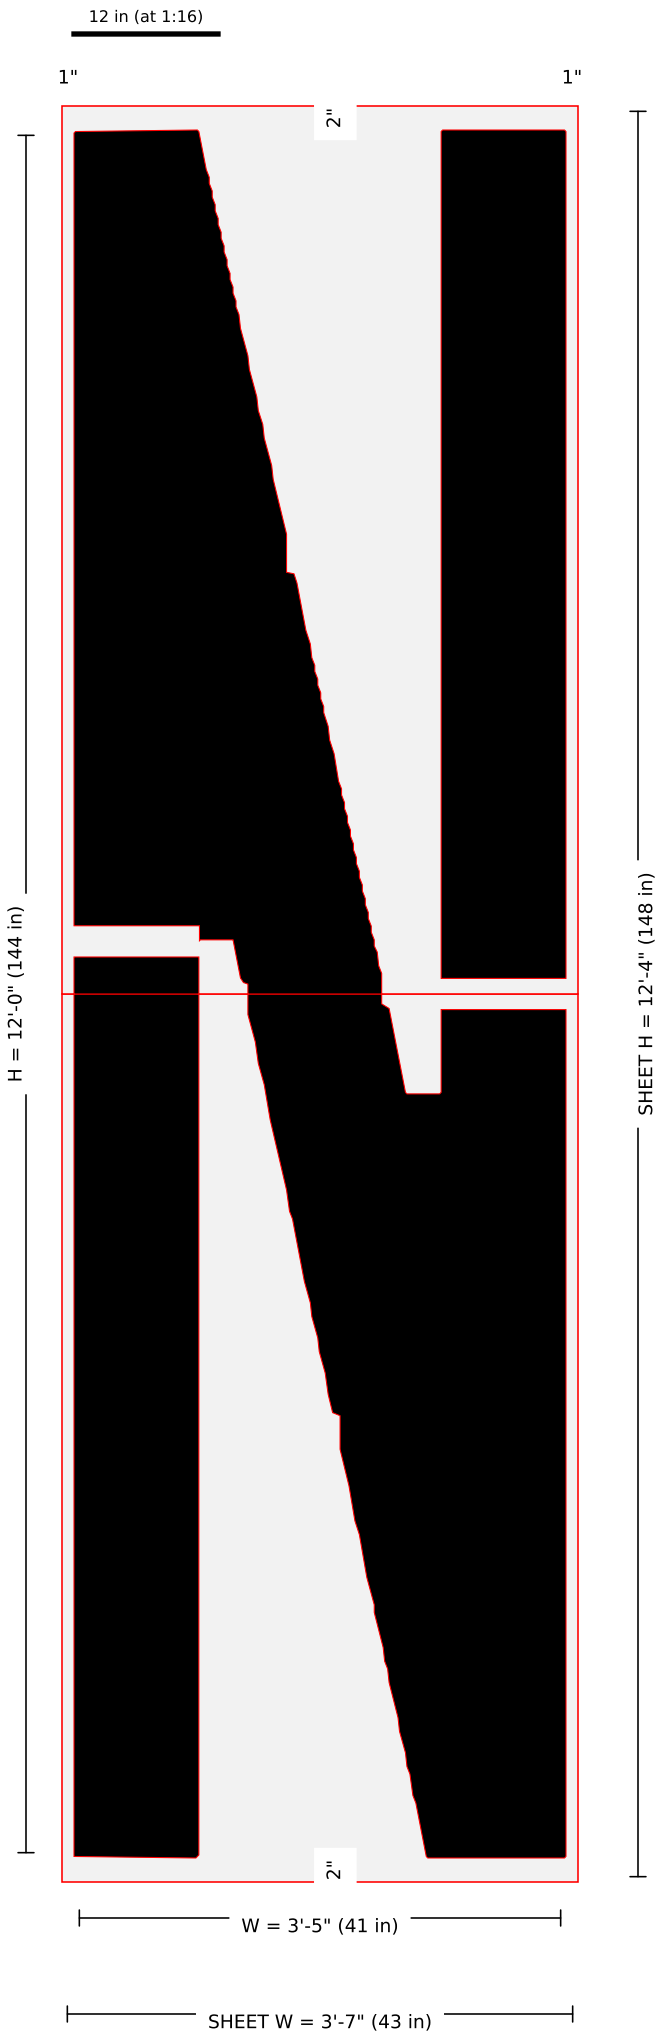

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144N-144in-FAA-Airport-Letter-N-157x60-2.jpg: width = kit listing 41 (image-scale 42.07); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 2 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-N · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

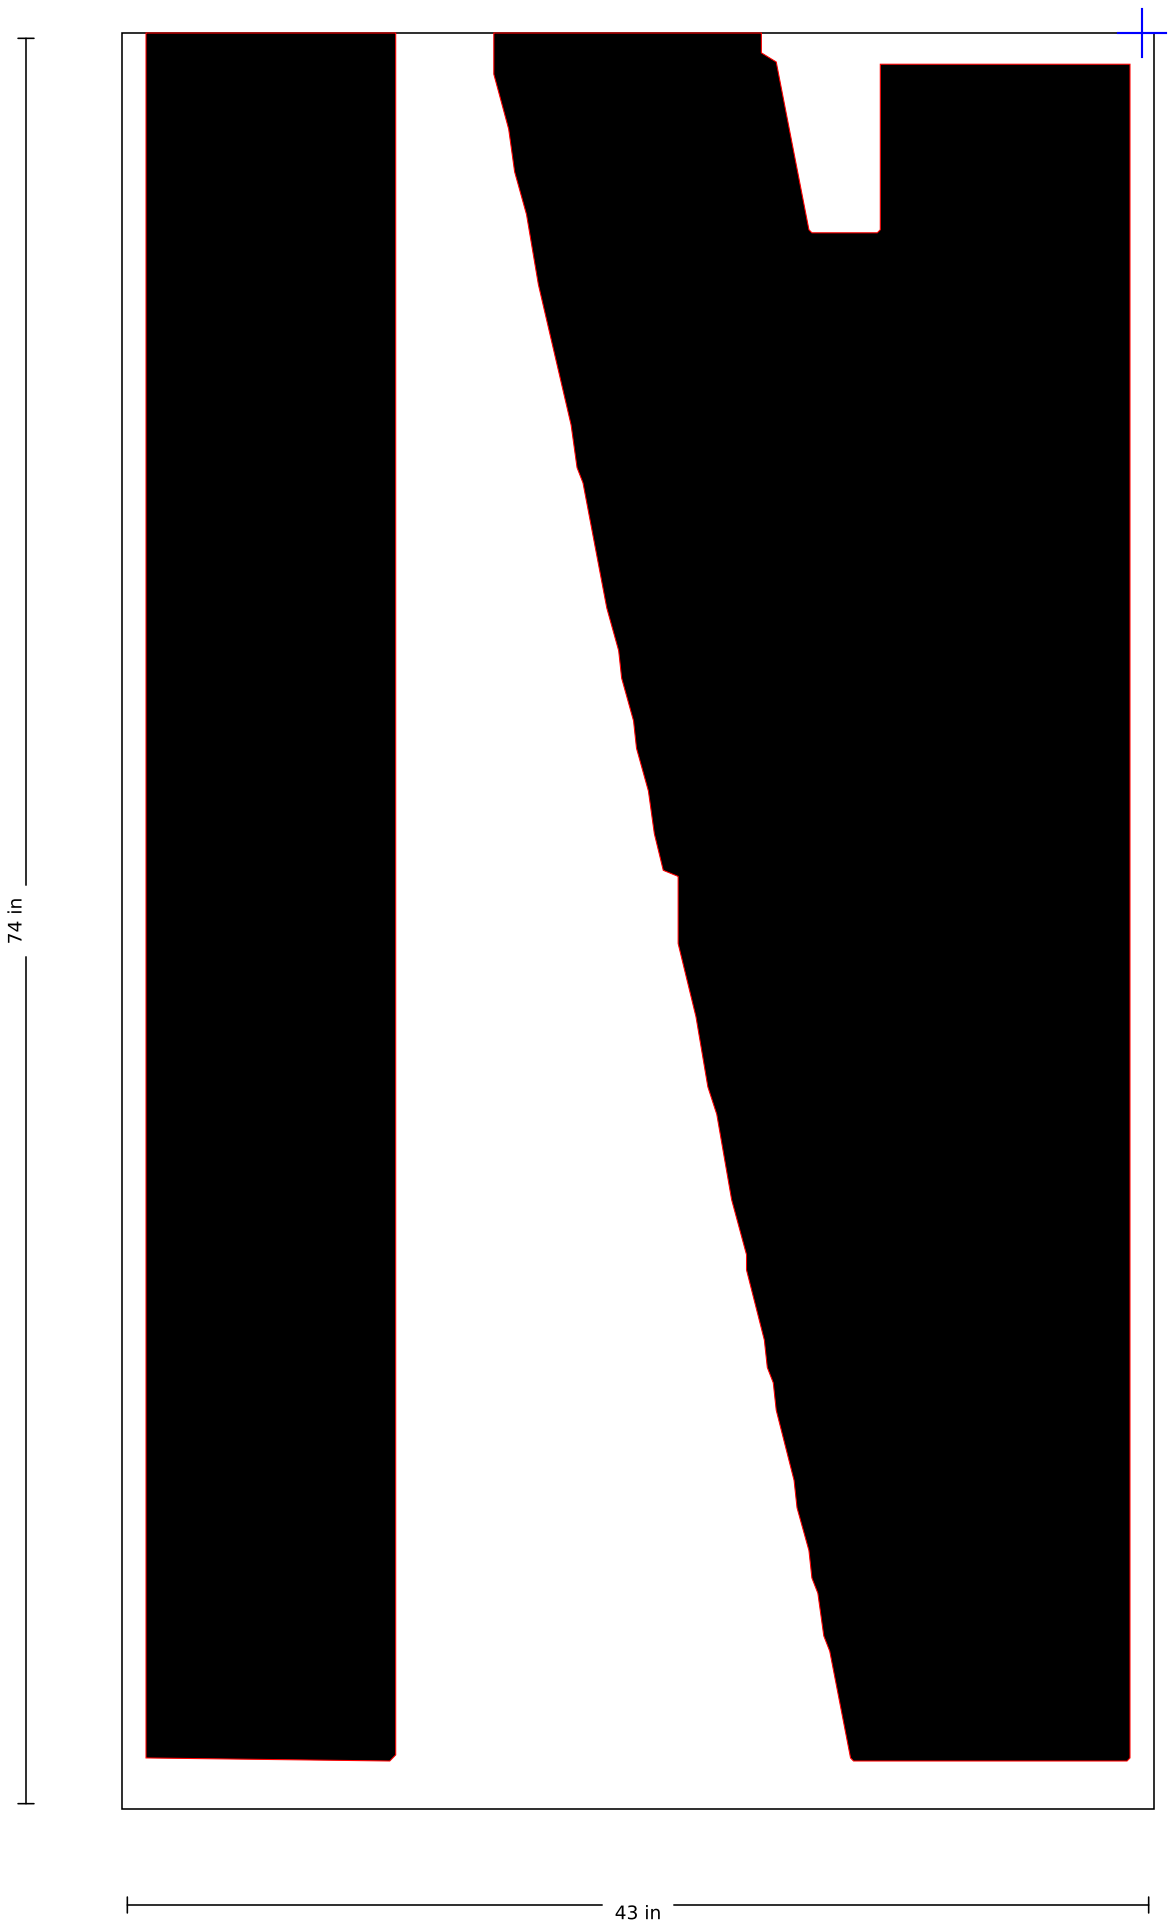

SSS-FAA-144-03-N · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

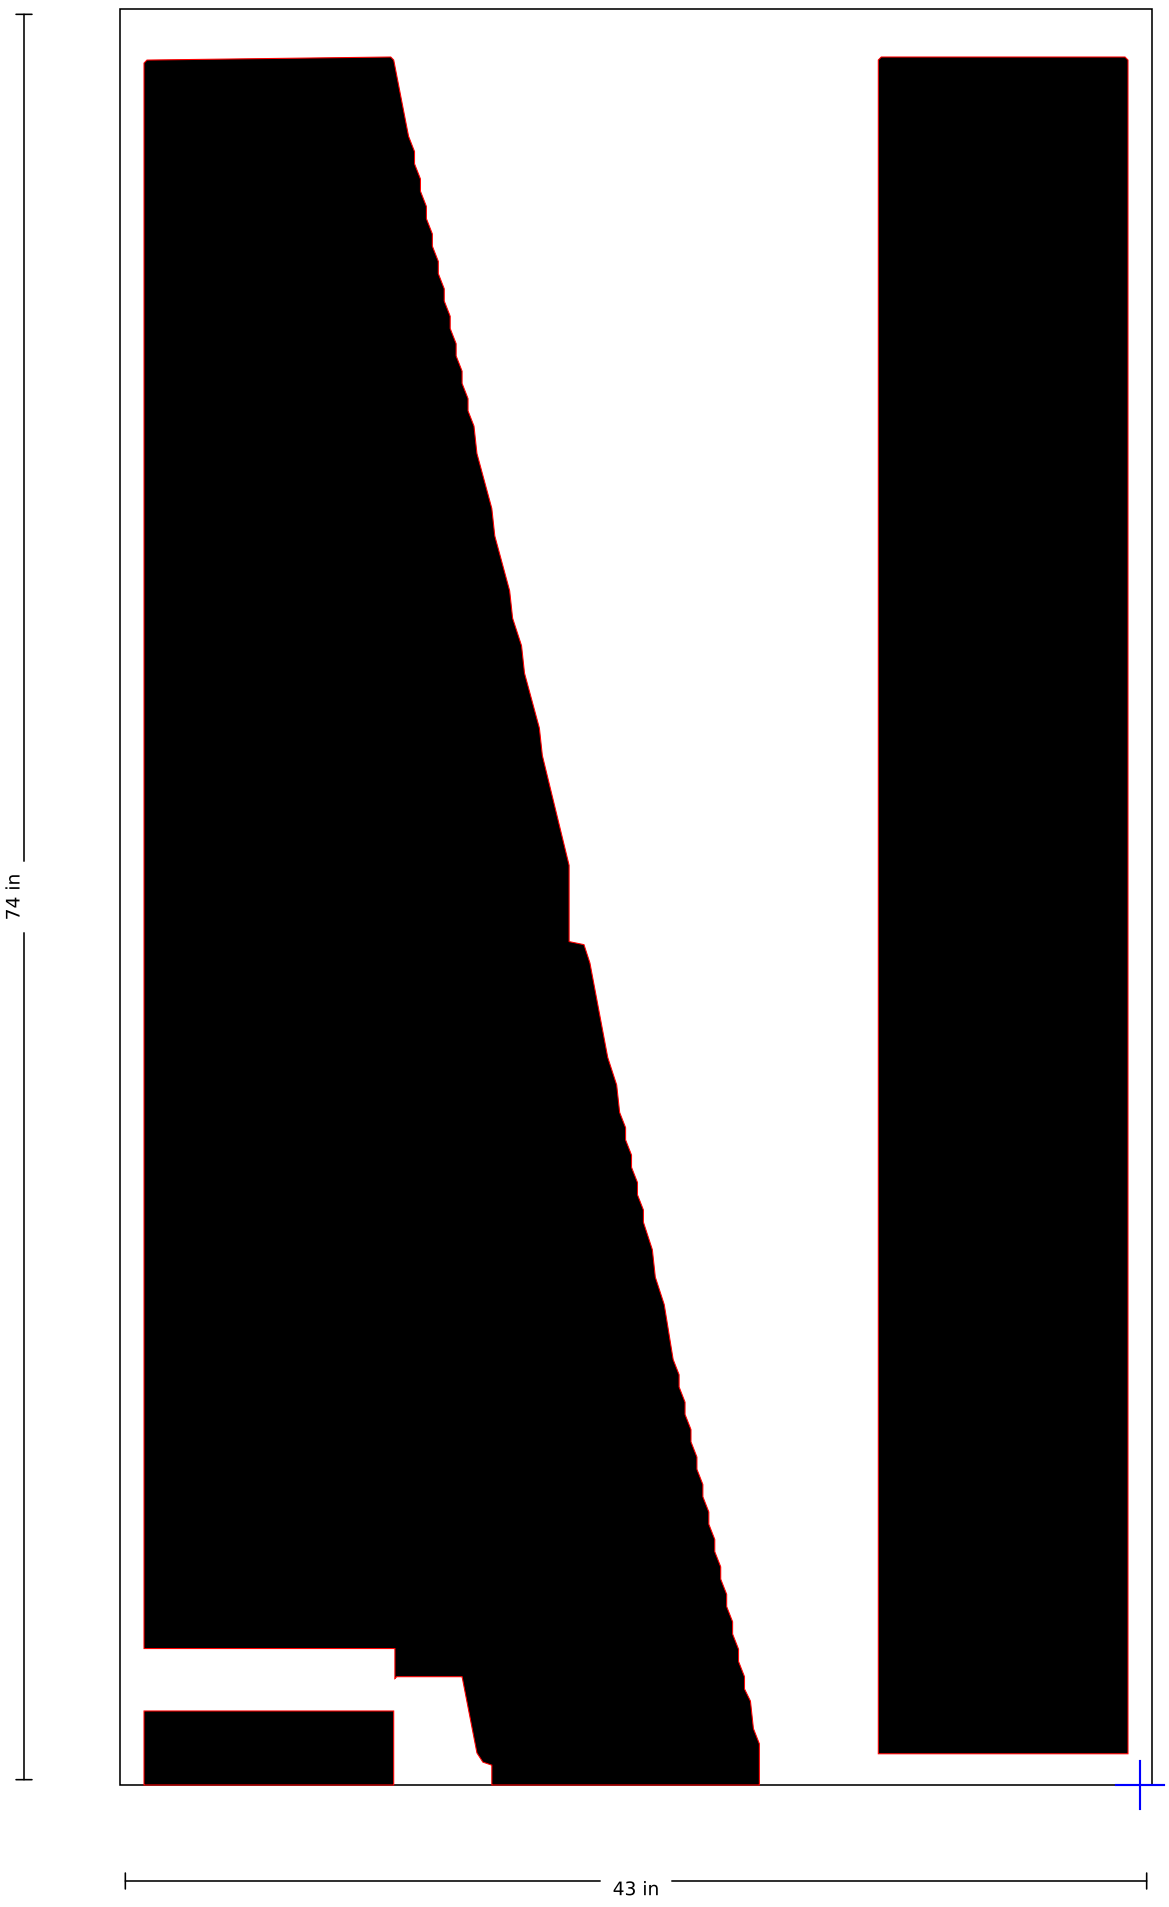

SSS-FAA-144-03-O

144" FAA Airport "O" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

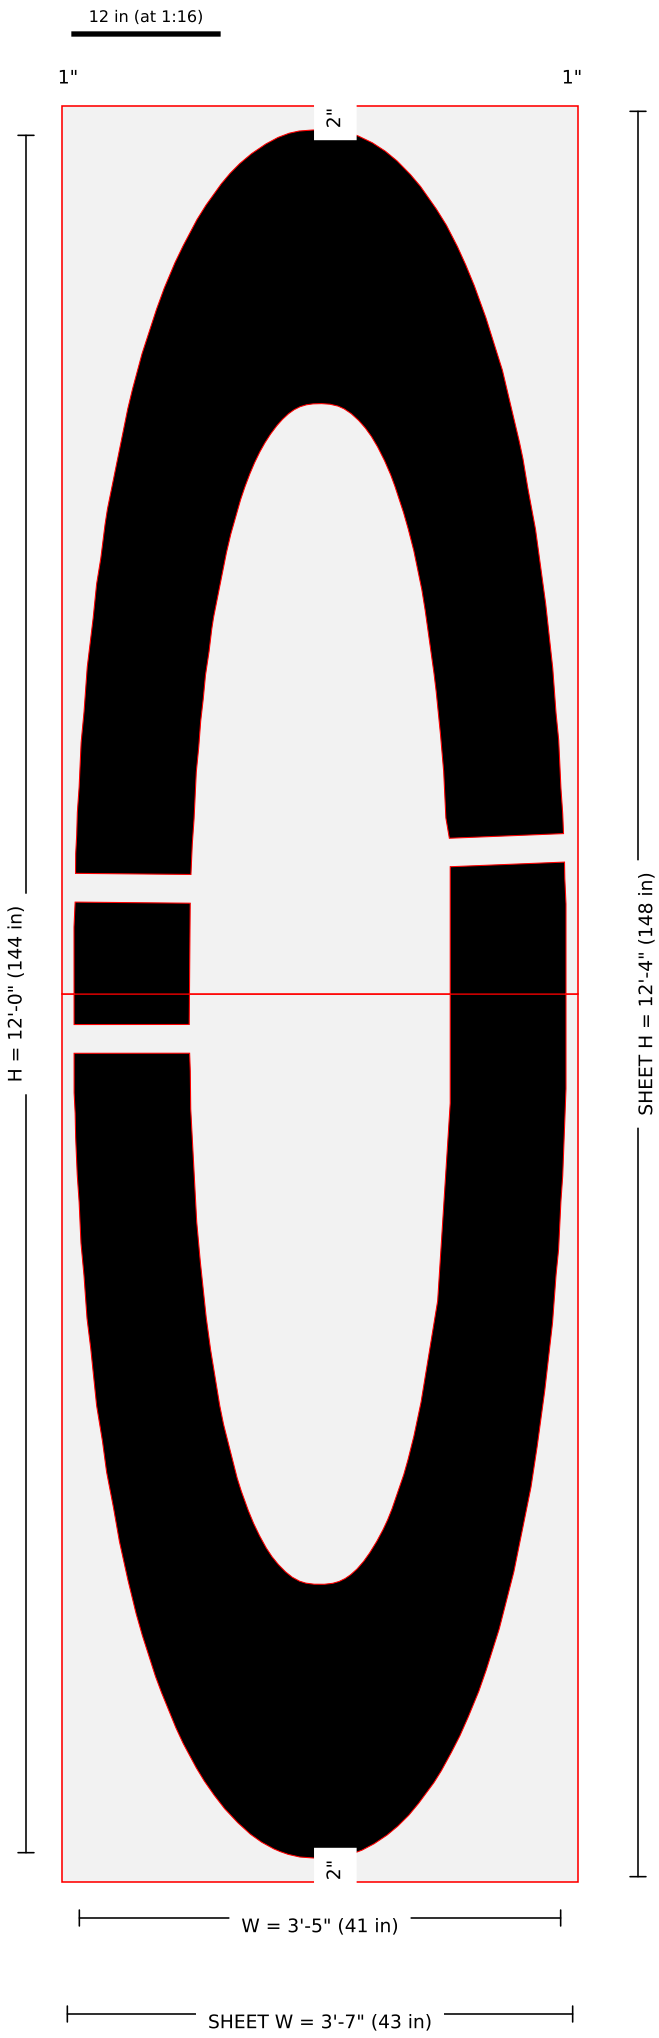

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144O-144in-FAA-Airport-Letter-O-157x60-2.jpg: width = kit listing 41 (image-scale 40.87); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (36.1,83.99) stroke 9.498" w=2.375"; (4.91,80.81) stroke 9.58" w=2.395" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-O · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

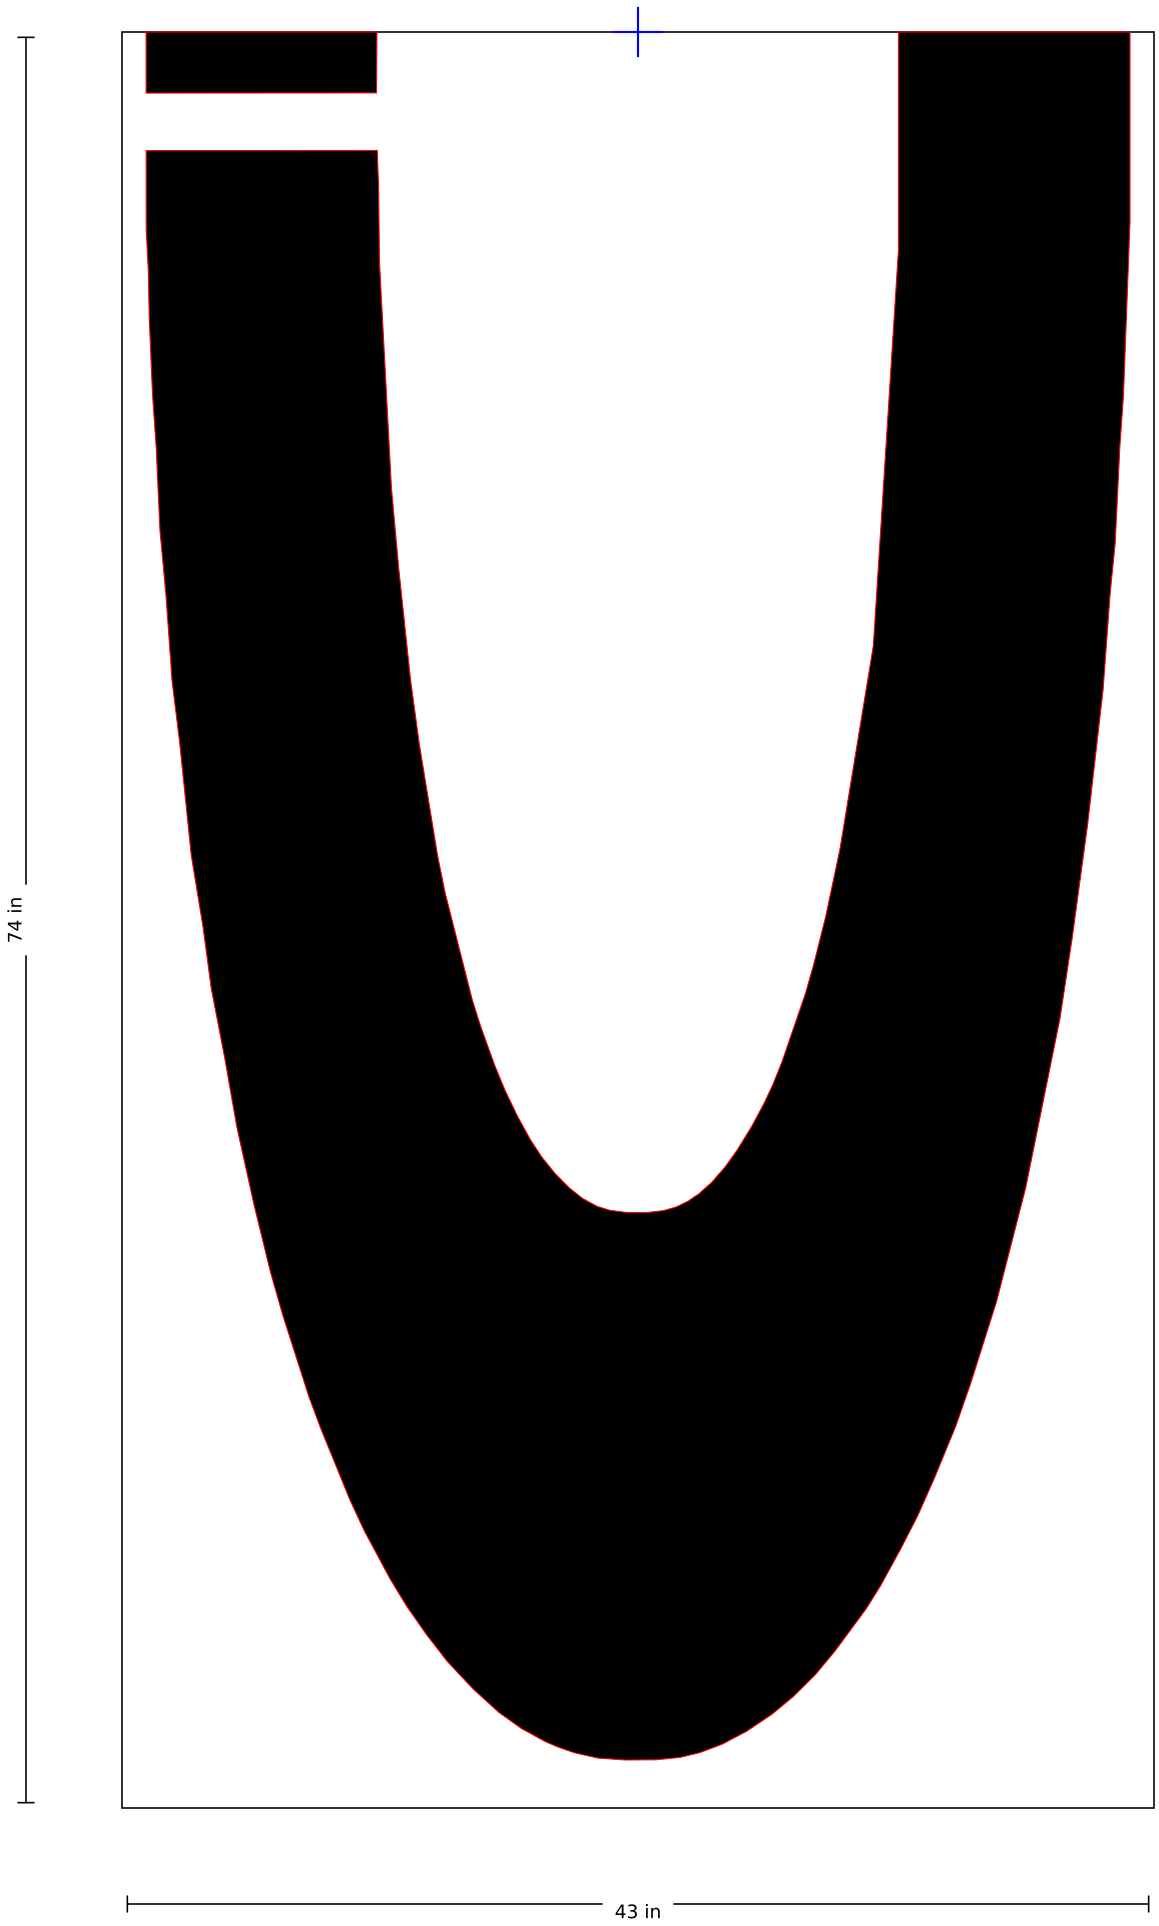

SSS-FAA-144-03-O · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

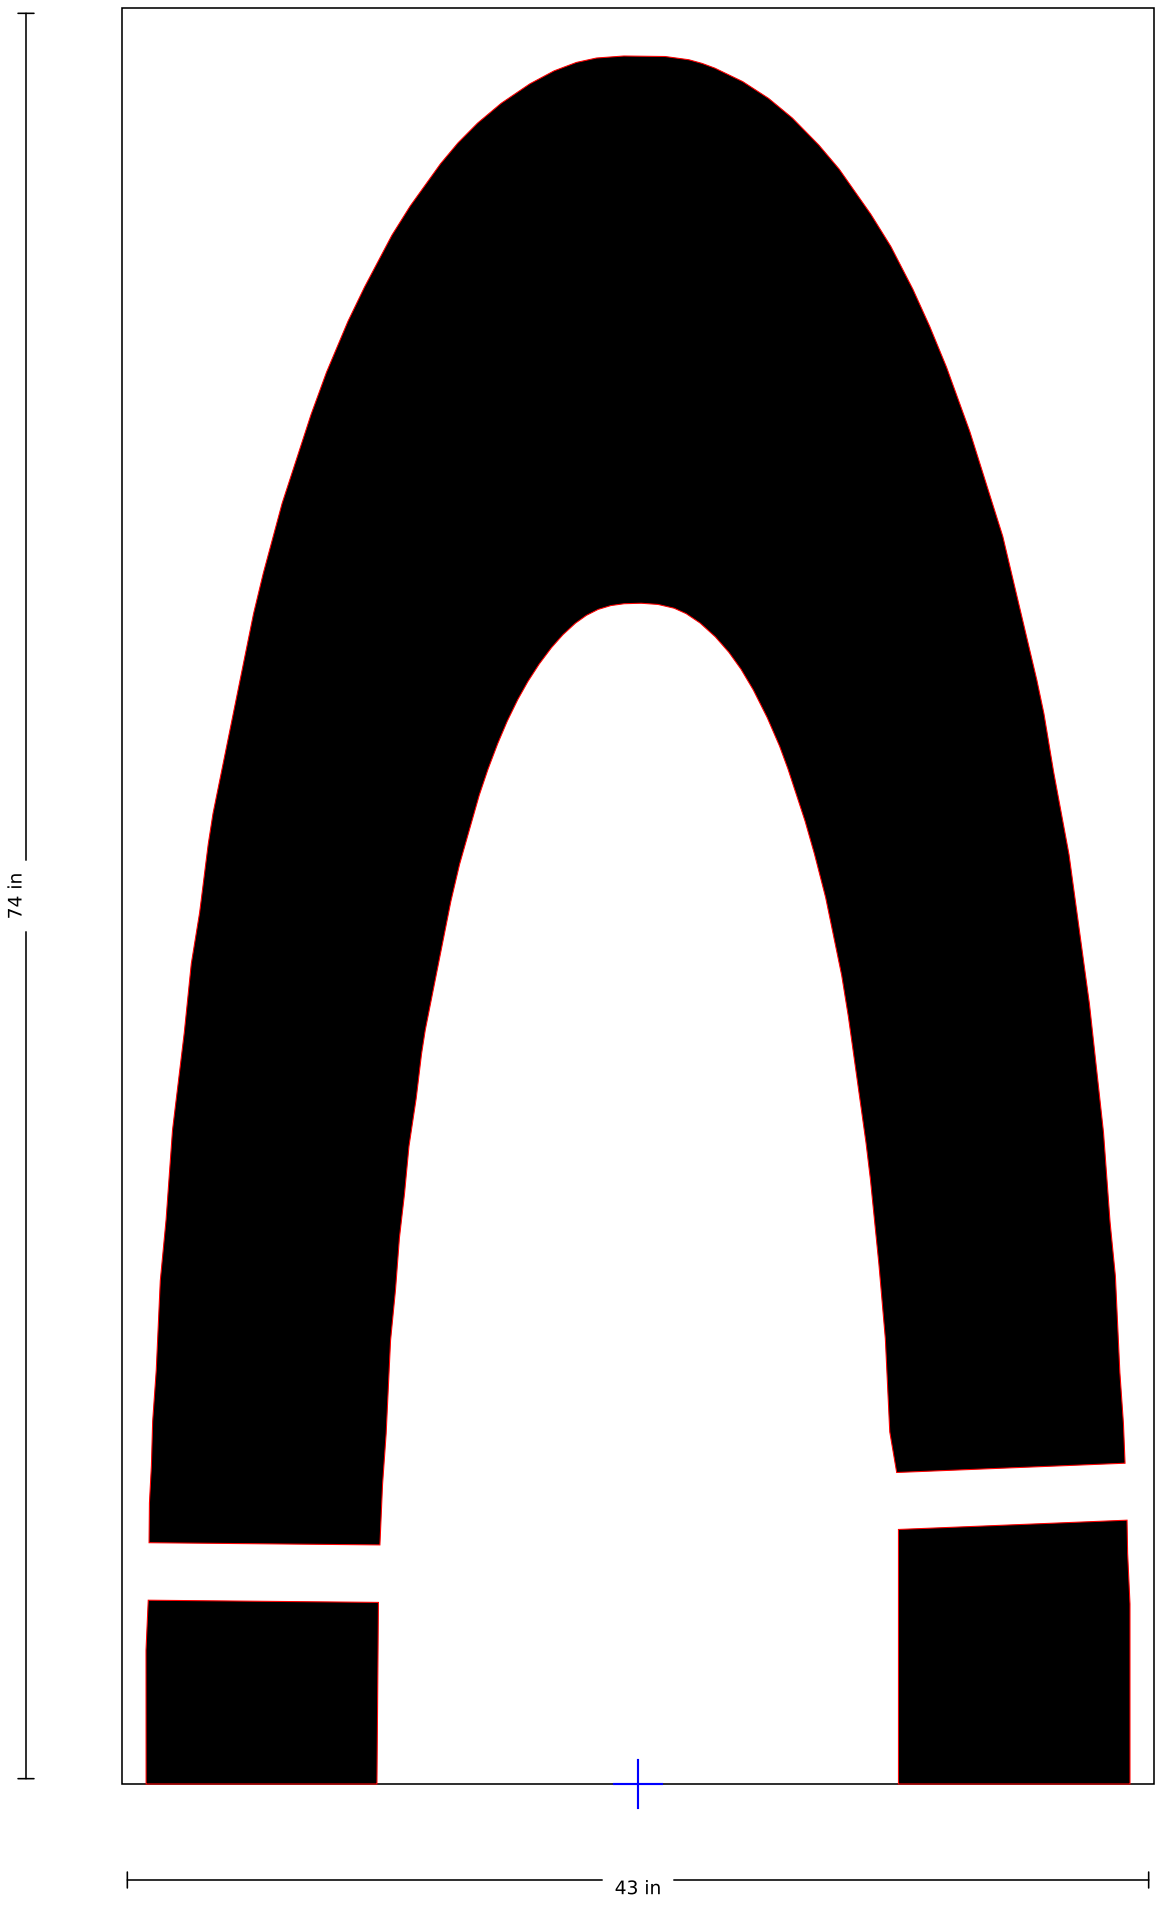

SSS-FAA-144-03-P

144" FAA Airport "P" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

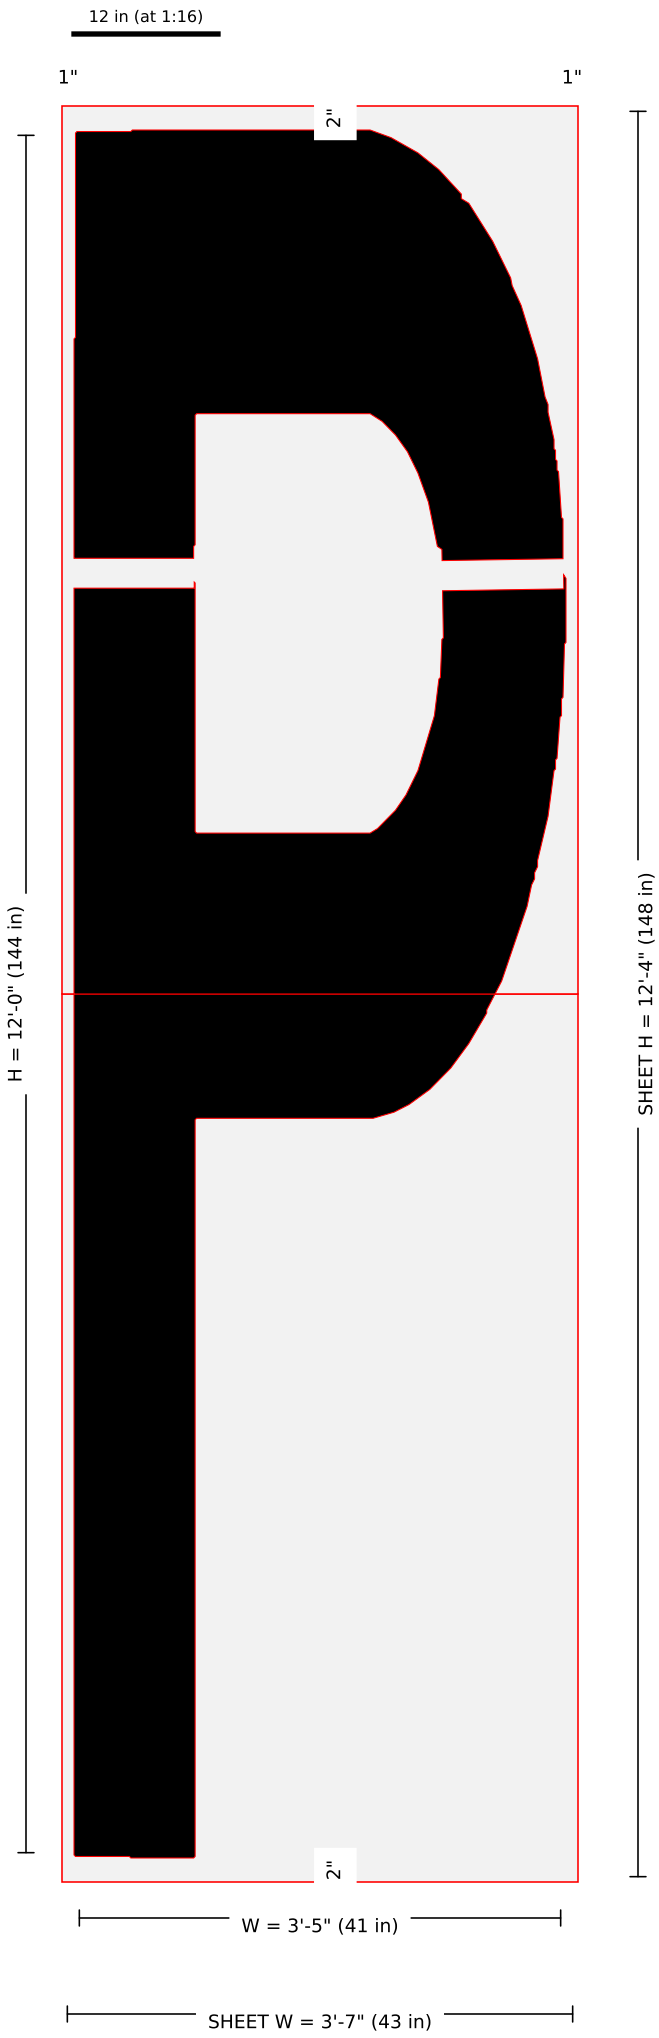

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144P-144in-FAA-Airport-Letter-P-157x60-2.jpg: width = kit listing 41 (image-scale 41.81); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (4.98,107.06) stroke 9.97" w=2.492"; (35.72,106.94) stroke 10.058" w=2.515" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-P · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

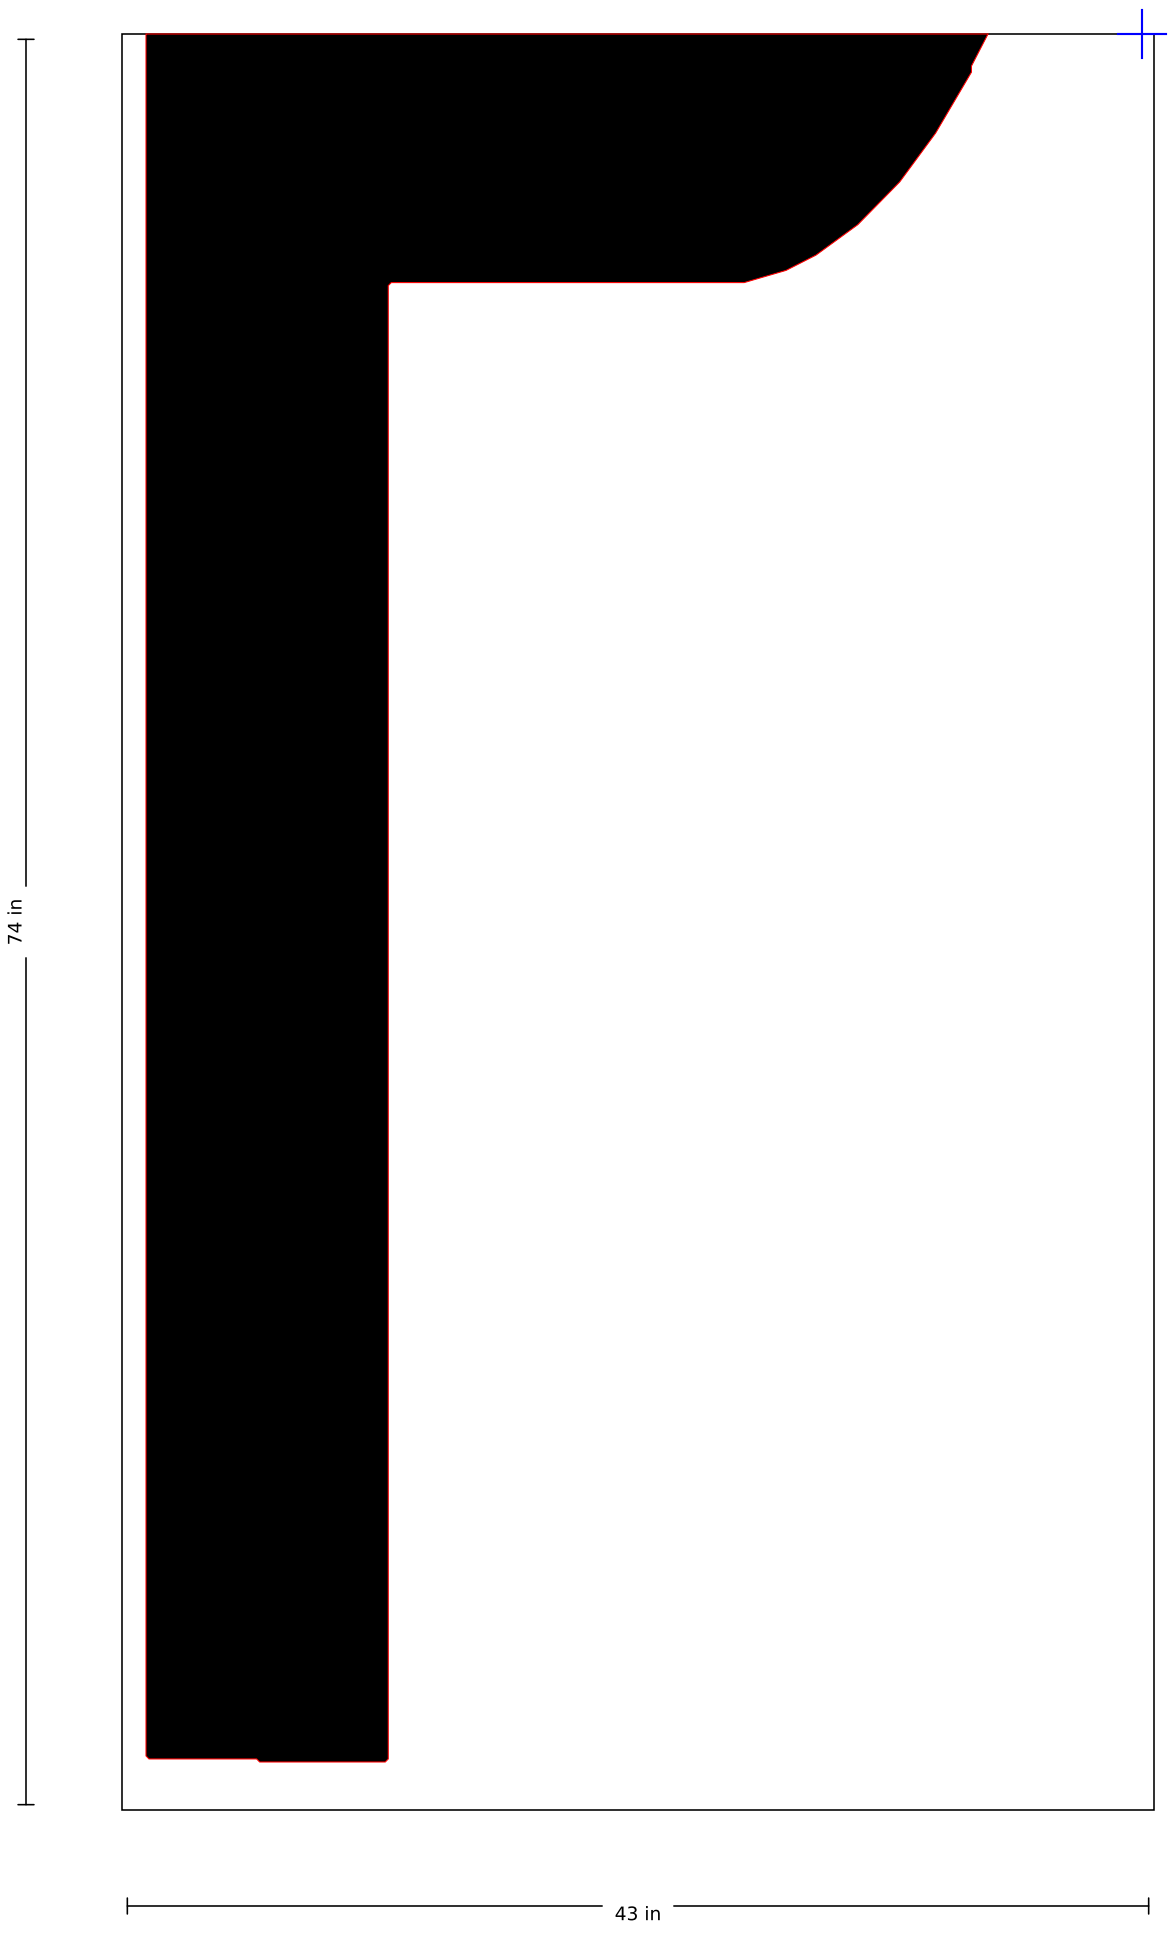

SSS-FAA-144-03-P · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

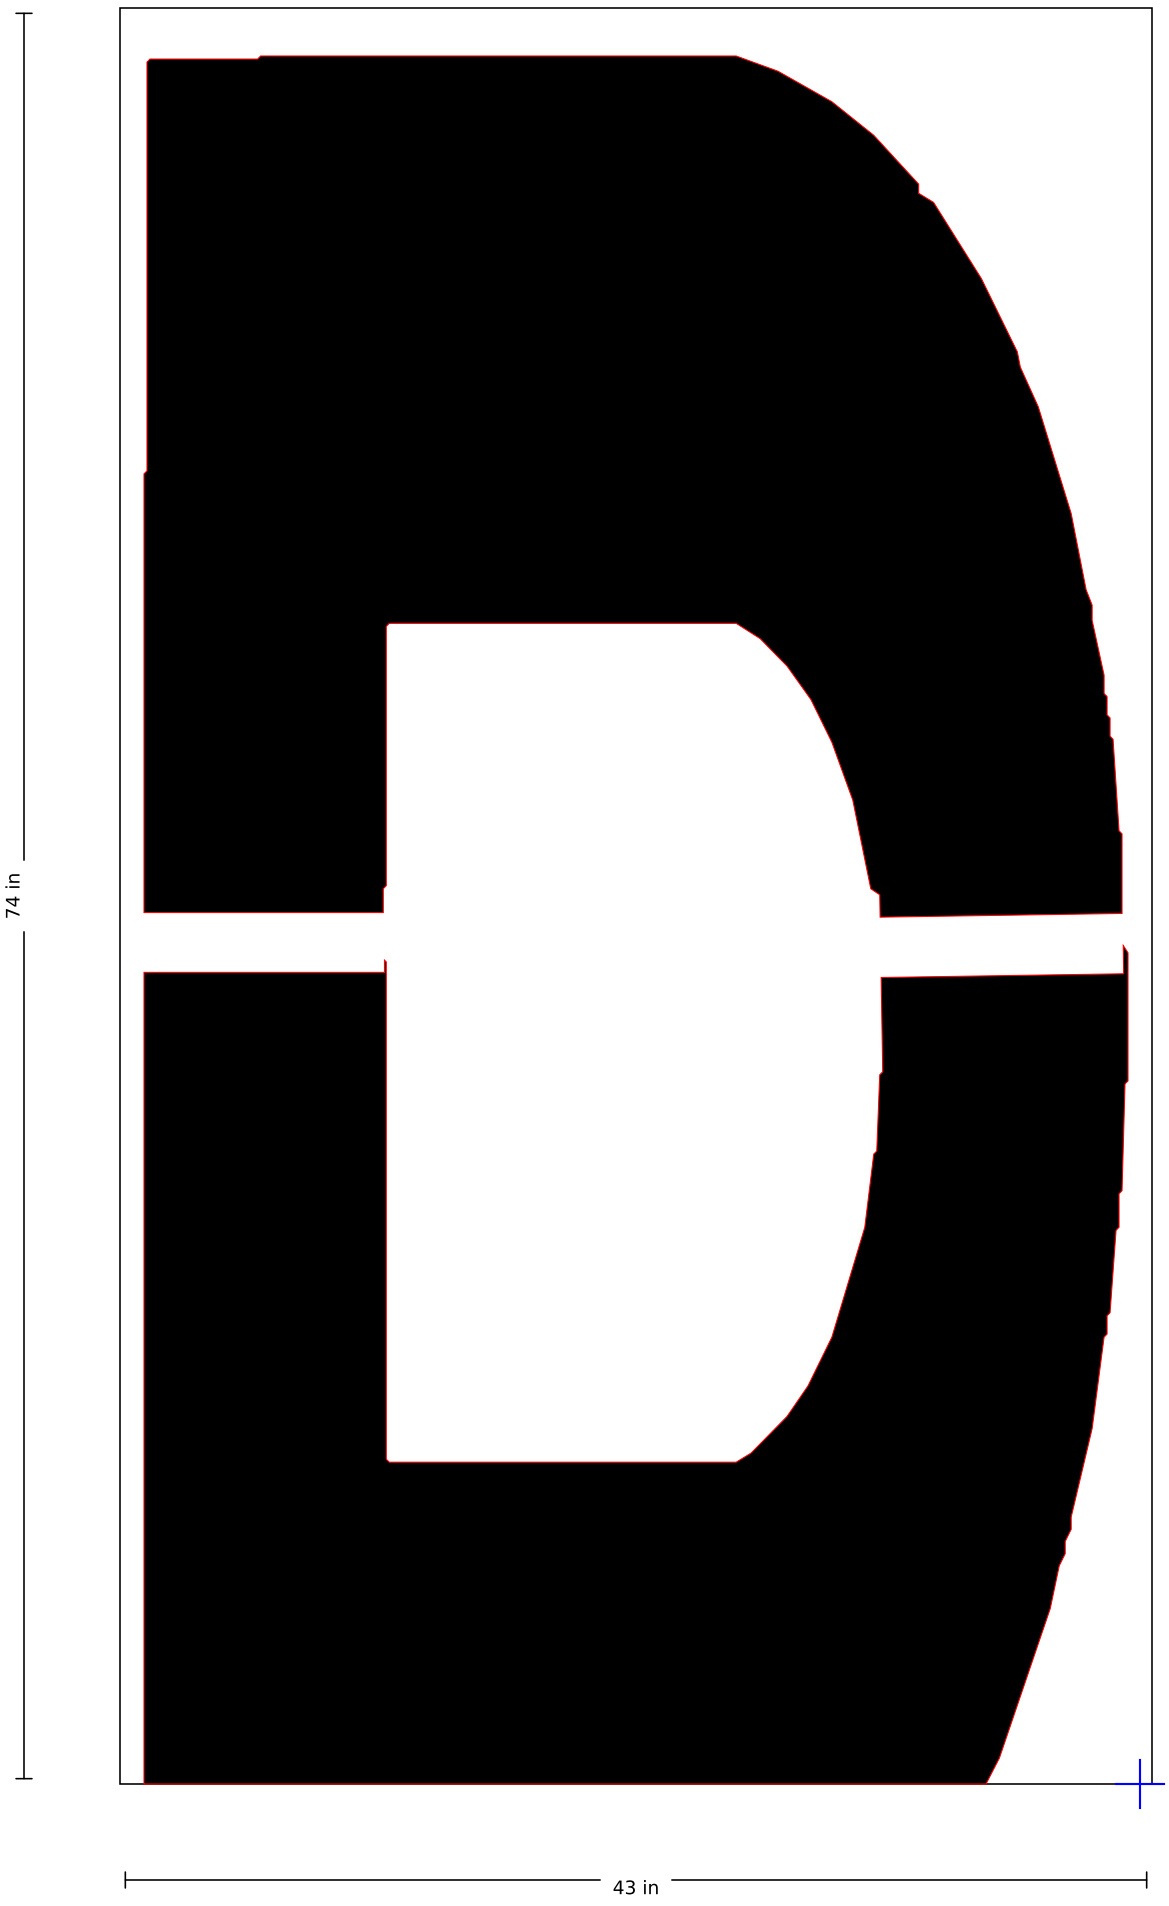

SSS-FAA-144-03-Q

144" FAA Airport "Q" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 42.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

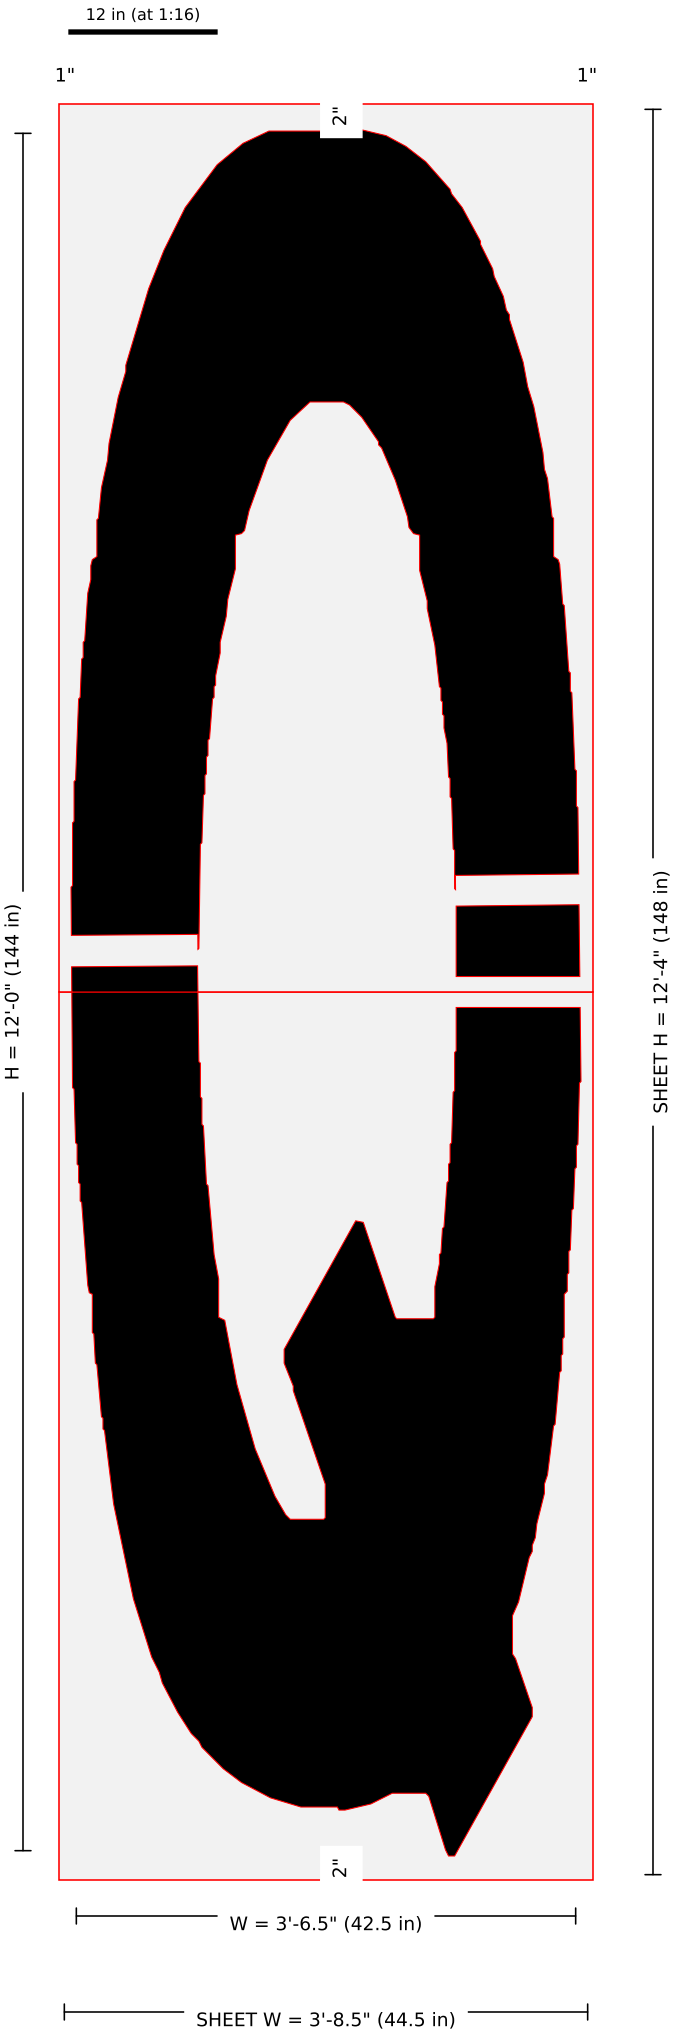

Pieces: 2 (1 x 2); blanks (in): 44.5 x 74, 44.5 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144Q-144in-FAA-Airport-Letter-Q-157x60-2.jpg: width 42.5 from image scale (42.73); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (37.21,80.49) stroke 10.226" w=2.556"; (5.29,75.45) stroke 10.49" w=2.622" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-Q · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

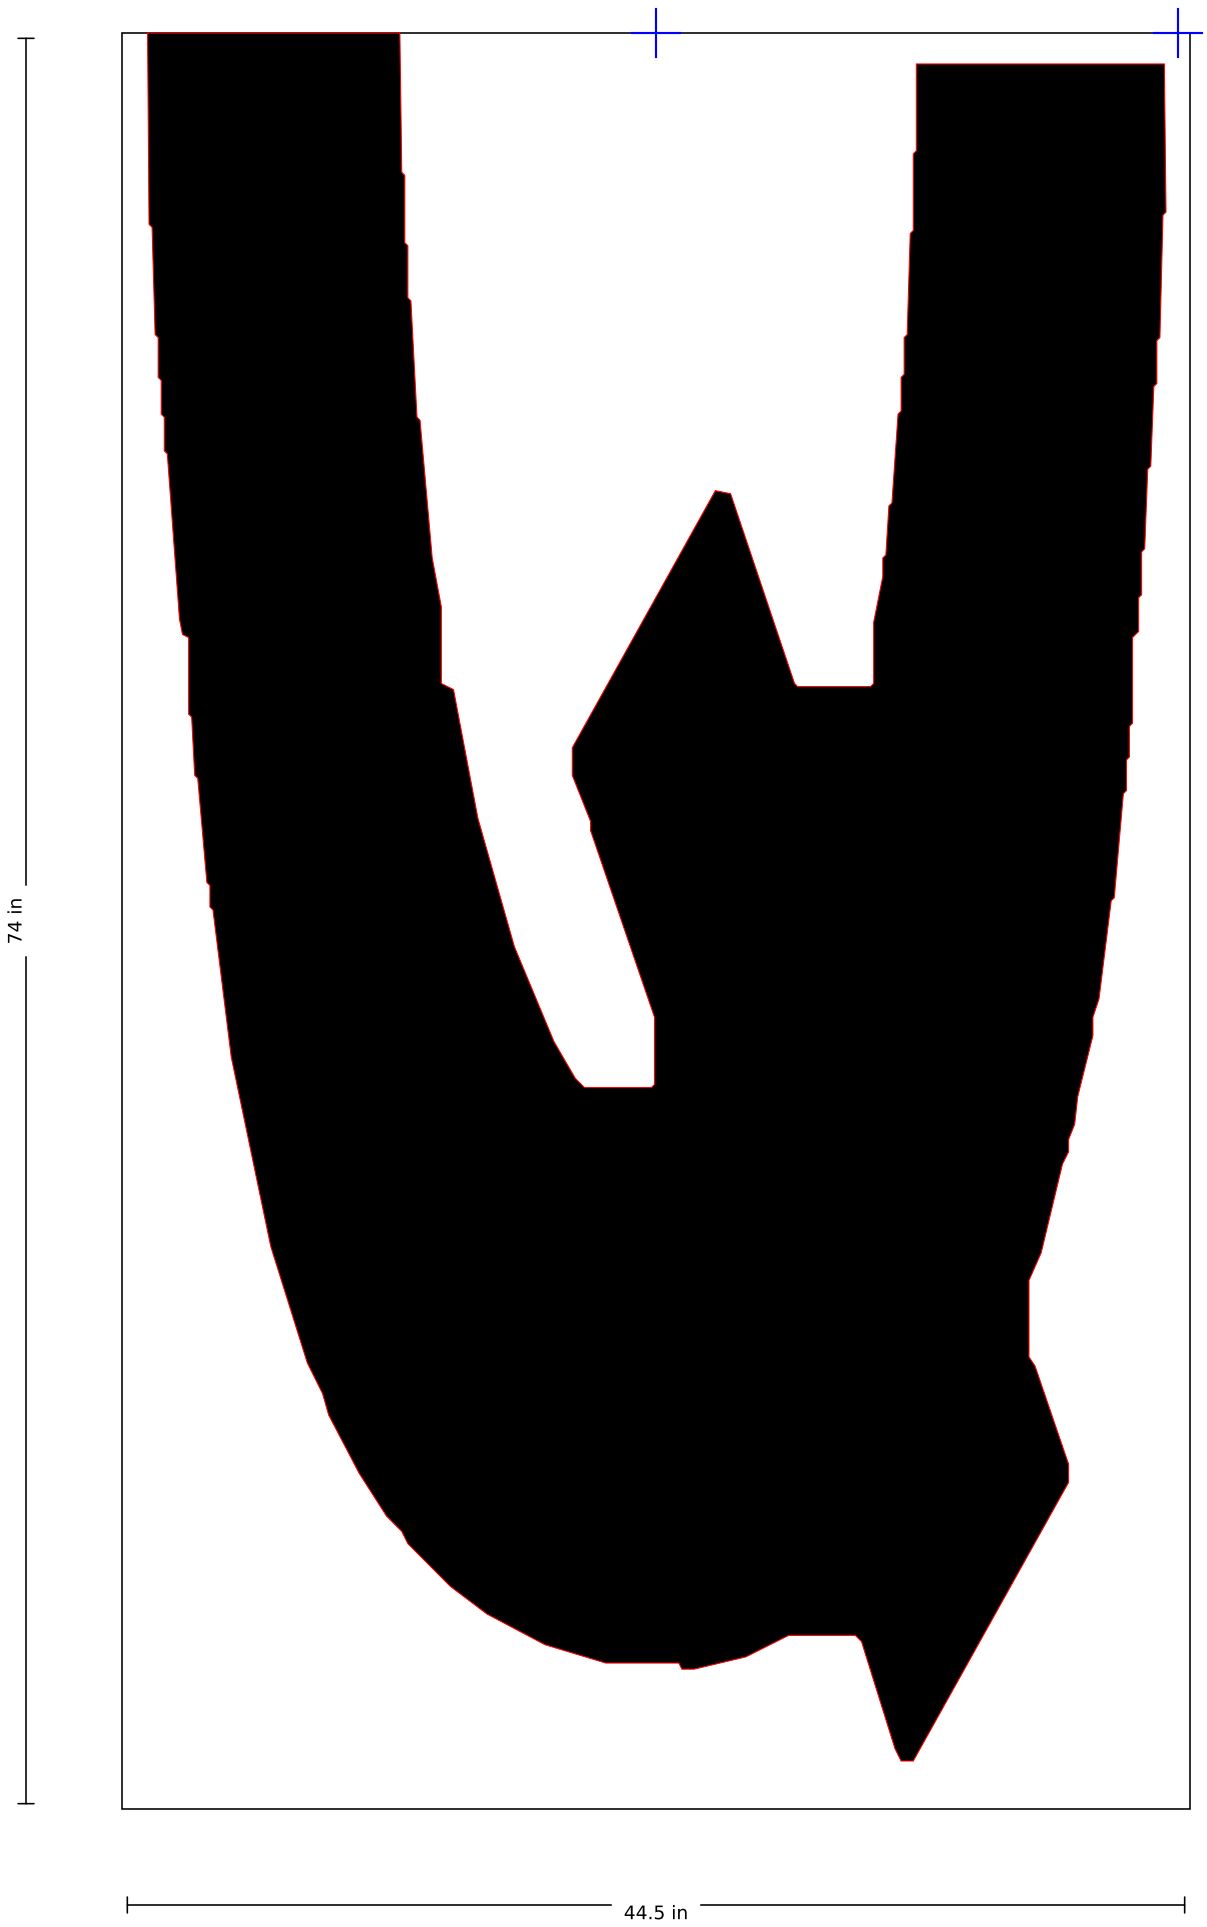

SSS-FAA-144-03-Q · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

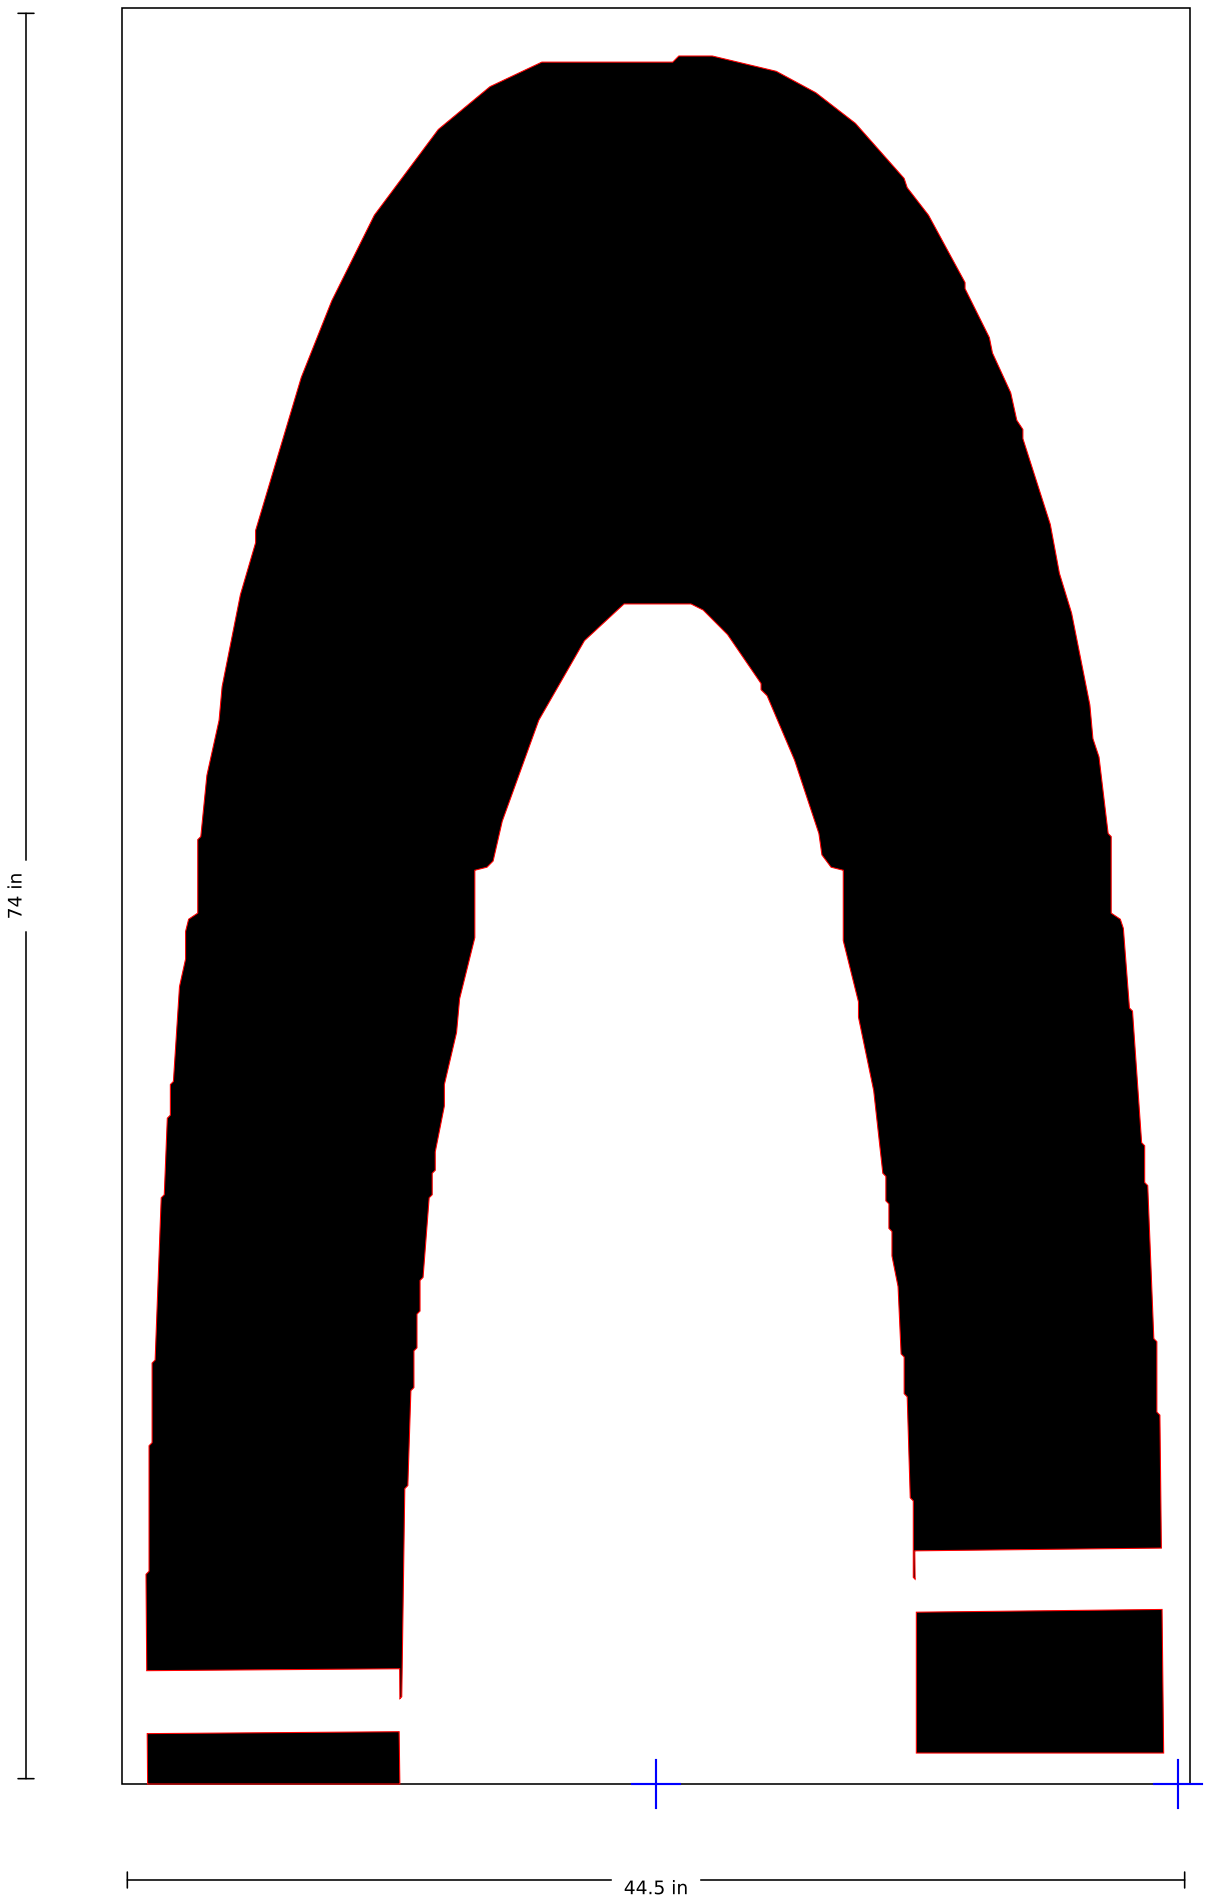

SSS-FAA-144-03-R

144" FAA Airport "R" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

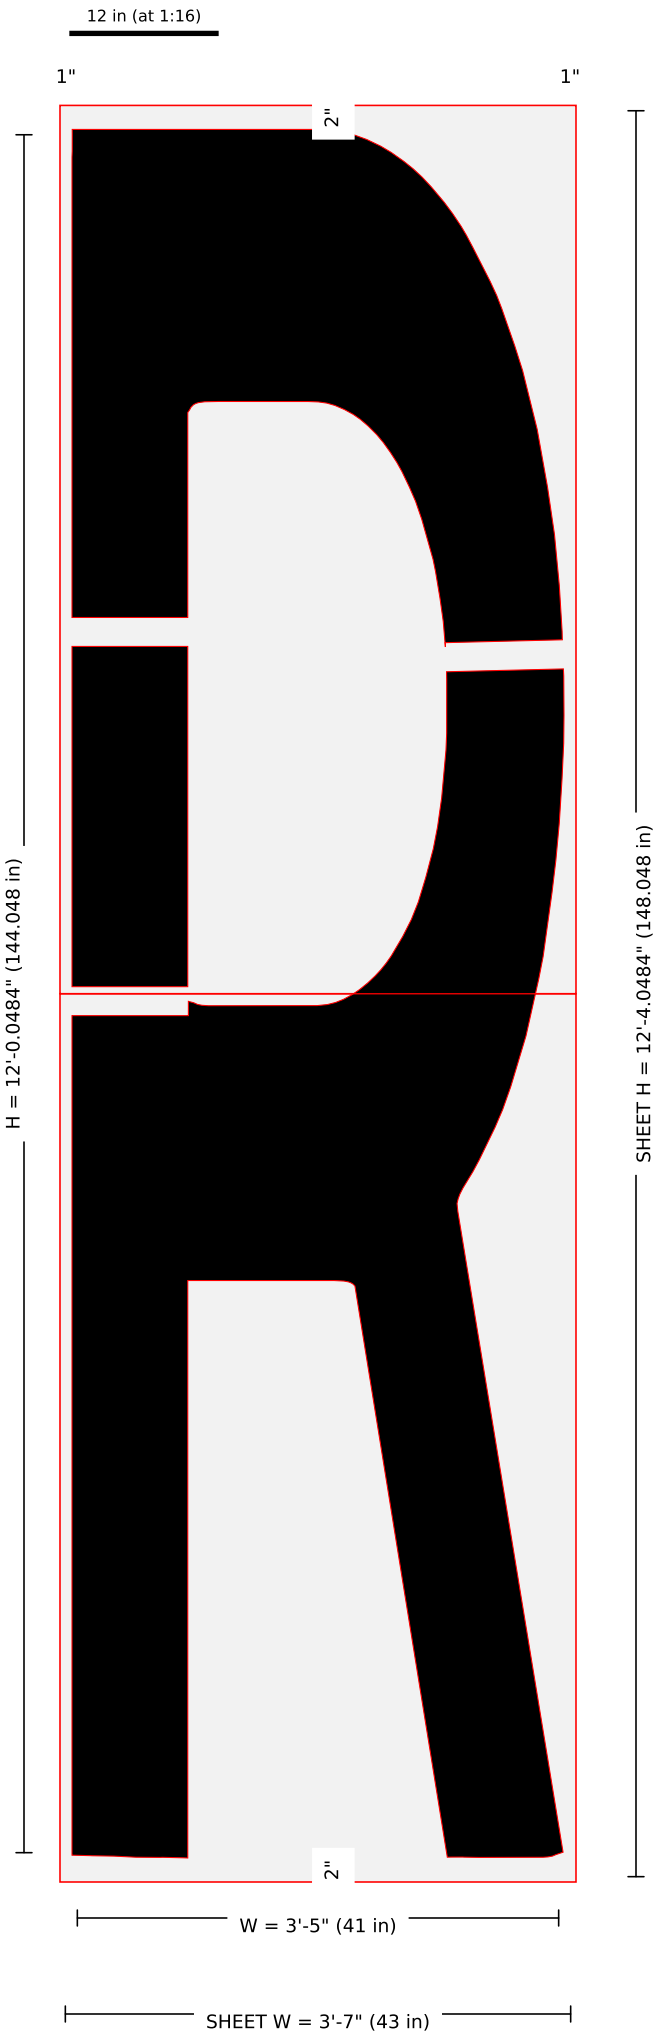

Pieces: 2 (1 x 2); blanks (in): 43 x 74.024, 43 x 74.024 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144R-144in-FAA-Airport-Letter-R-157x60-2.jpg: width = kit listing 41 (image-scale 41.05); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (4.82,102.12) stroke 9.647" w=2.412"; (36.04,100.14) stroke 9.706" w=2.427" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-R · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

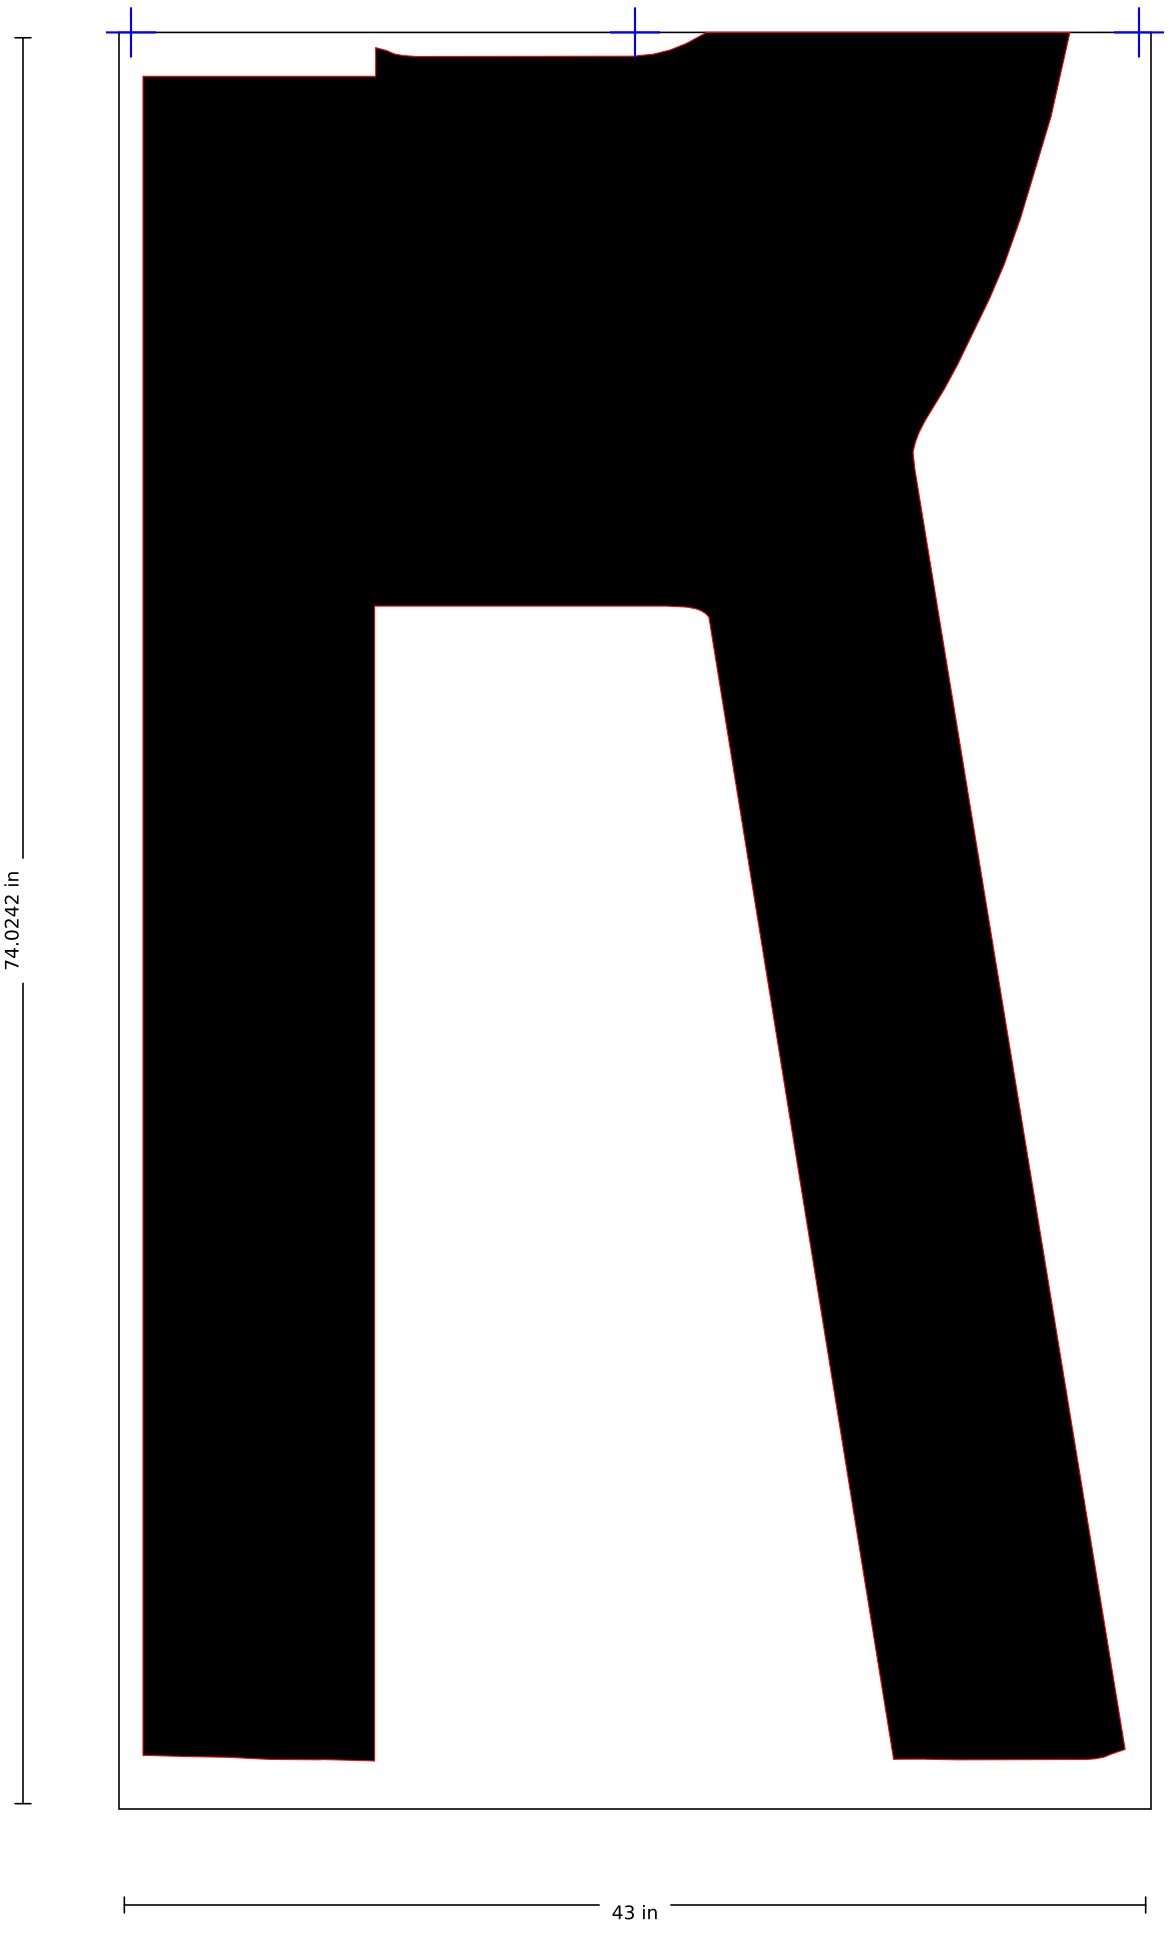

SSS-FAA-144-03-R · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

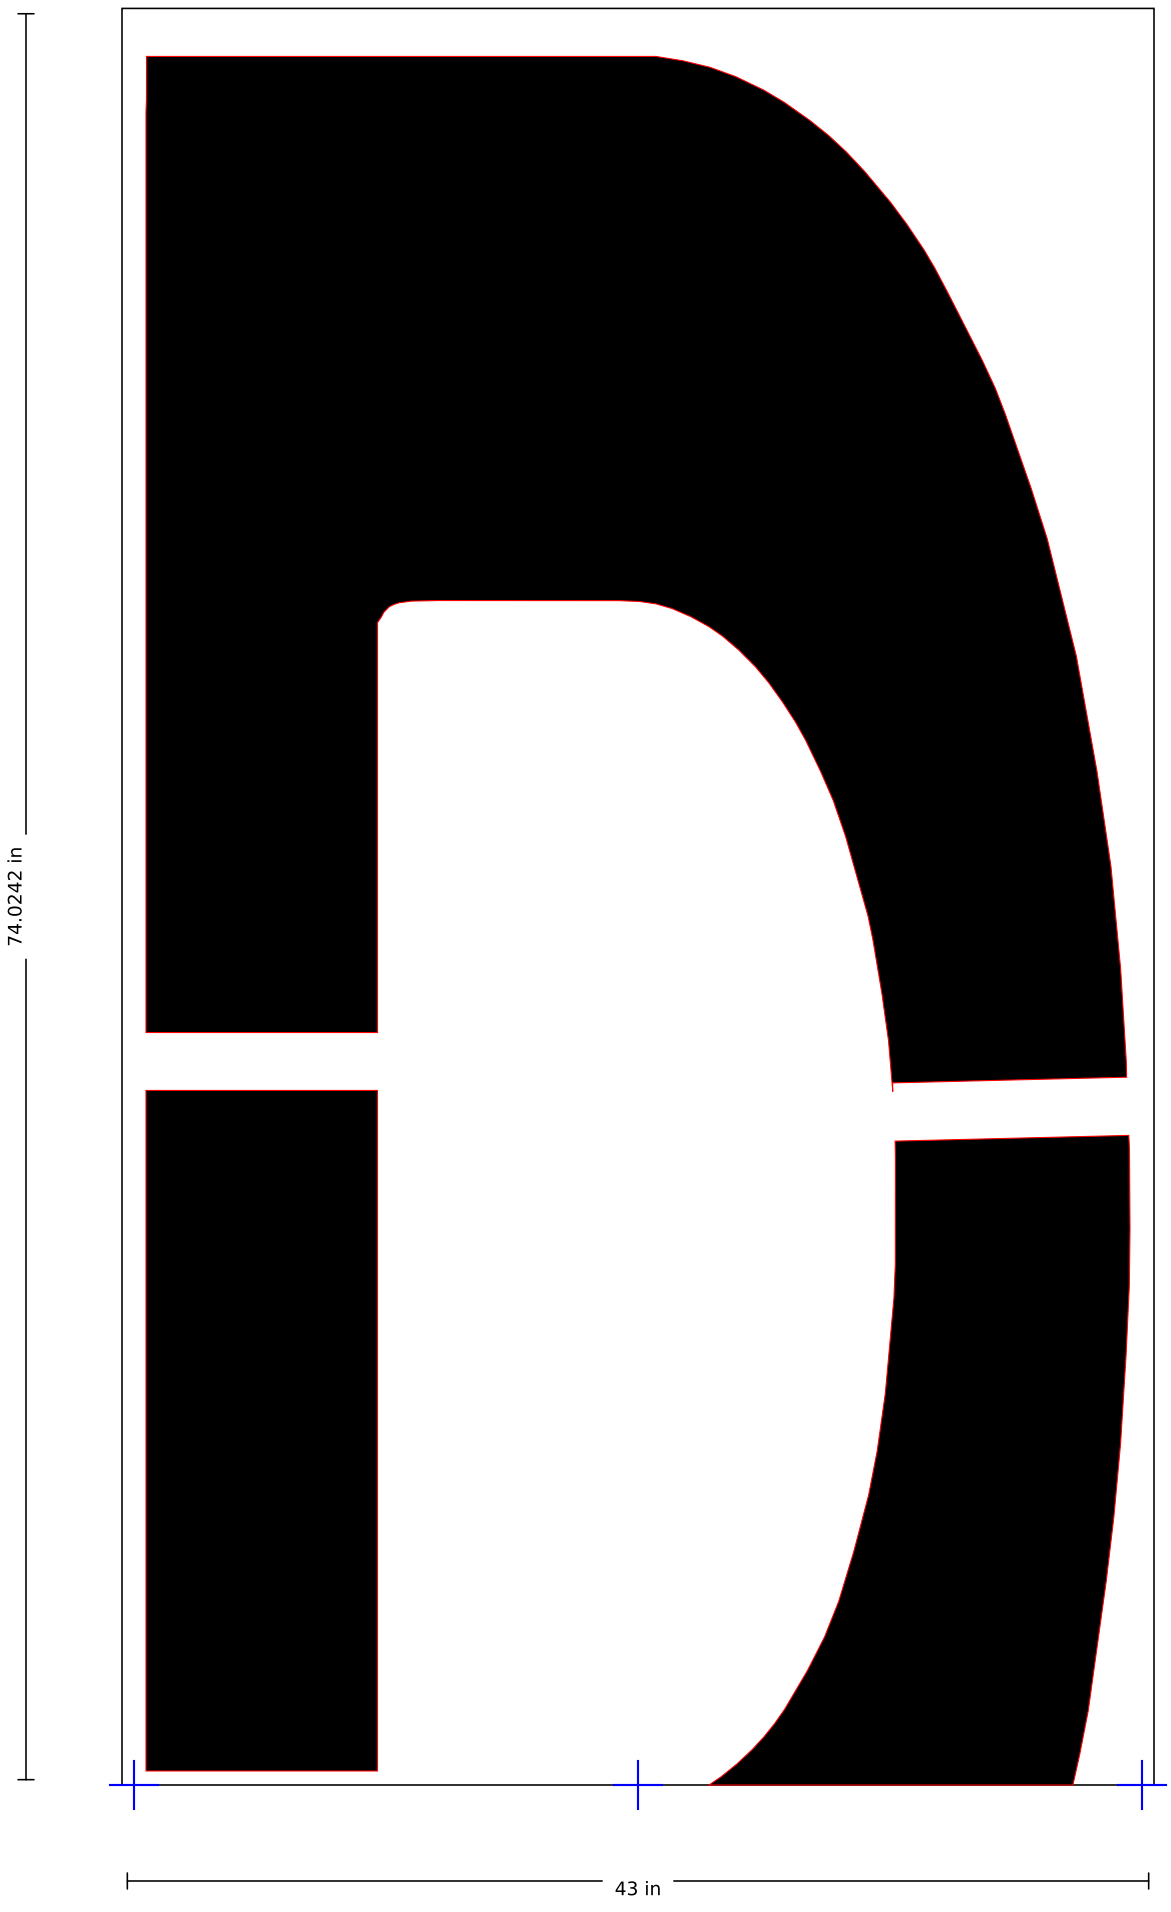

SSS-FAA-144-03-S

144" FAA Airport "S" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

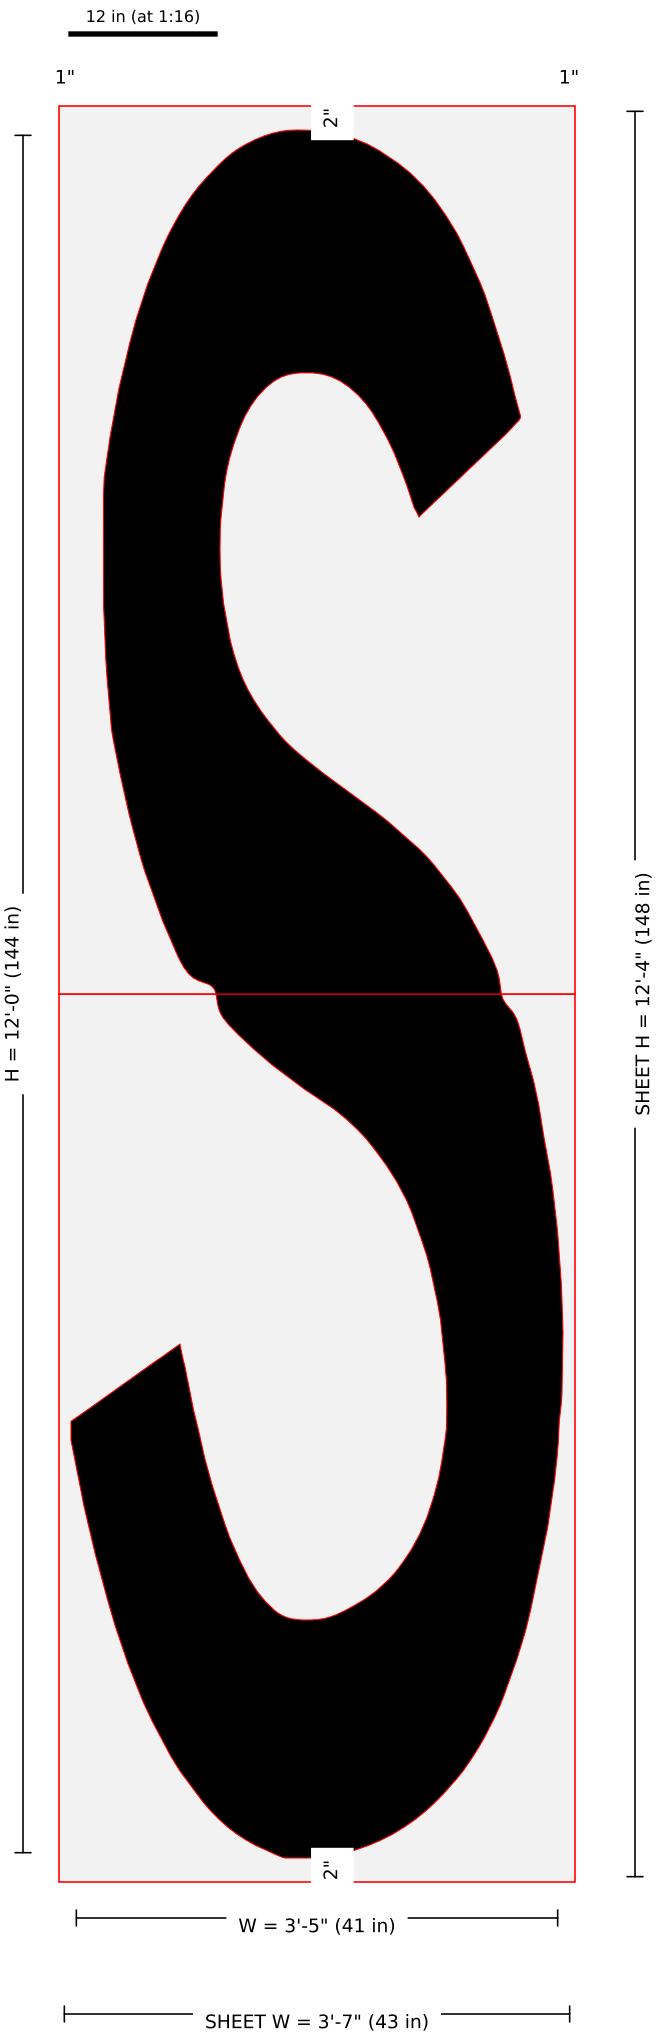

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144S-144in-FAA-Airport-Letter-S-157x60-2.jpg: width = kit listing 41 (image-scale 41.00); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 7 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-S · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

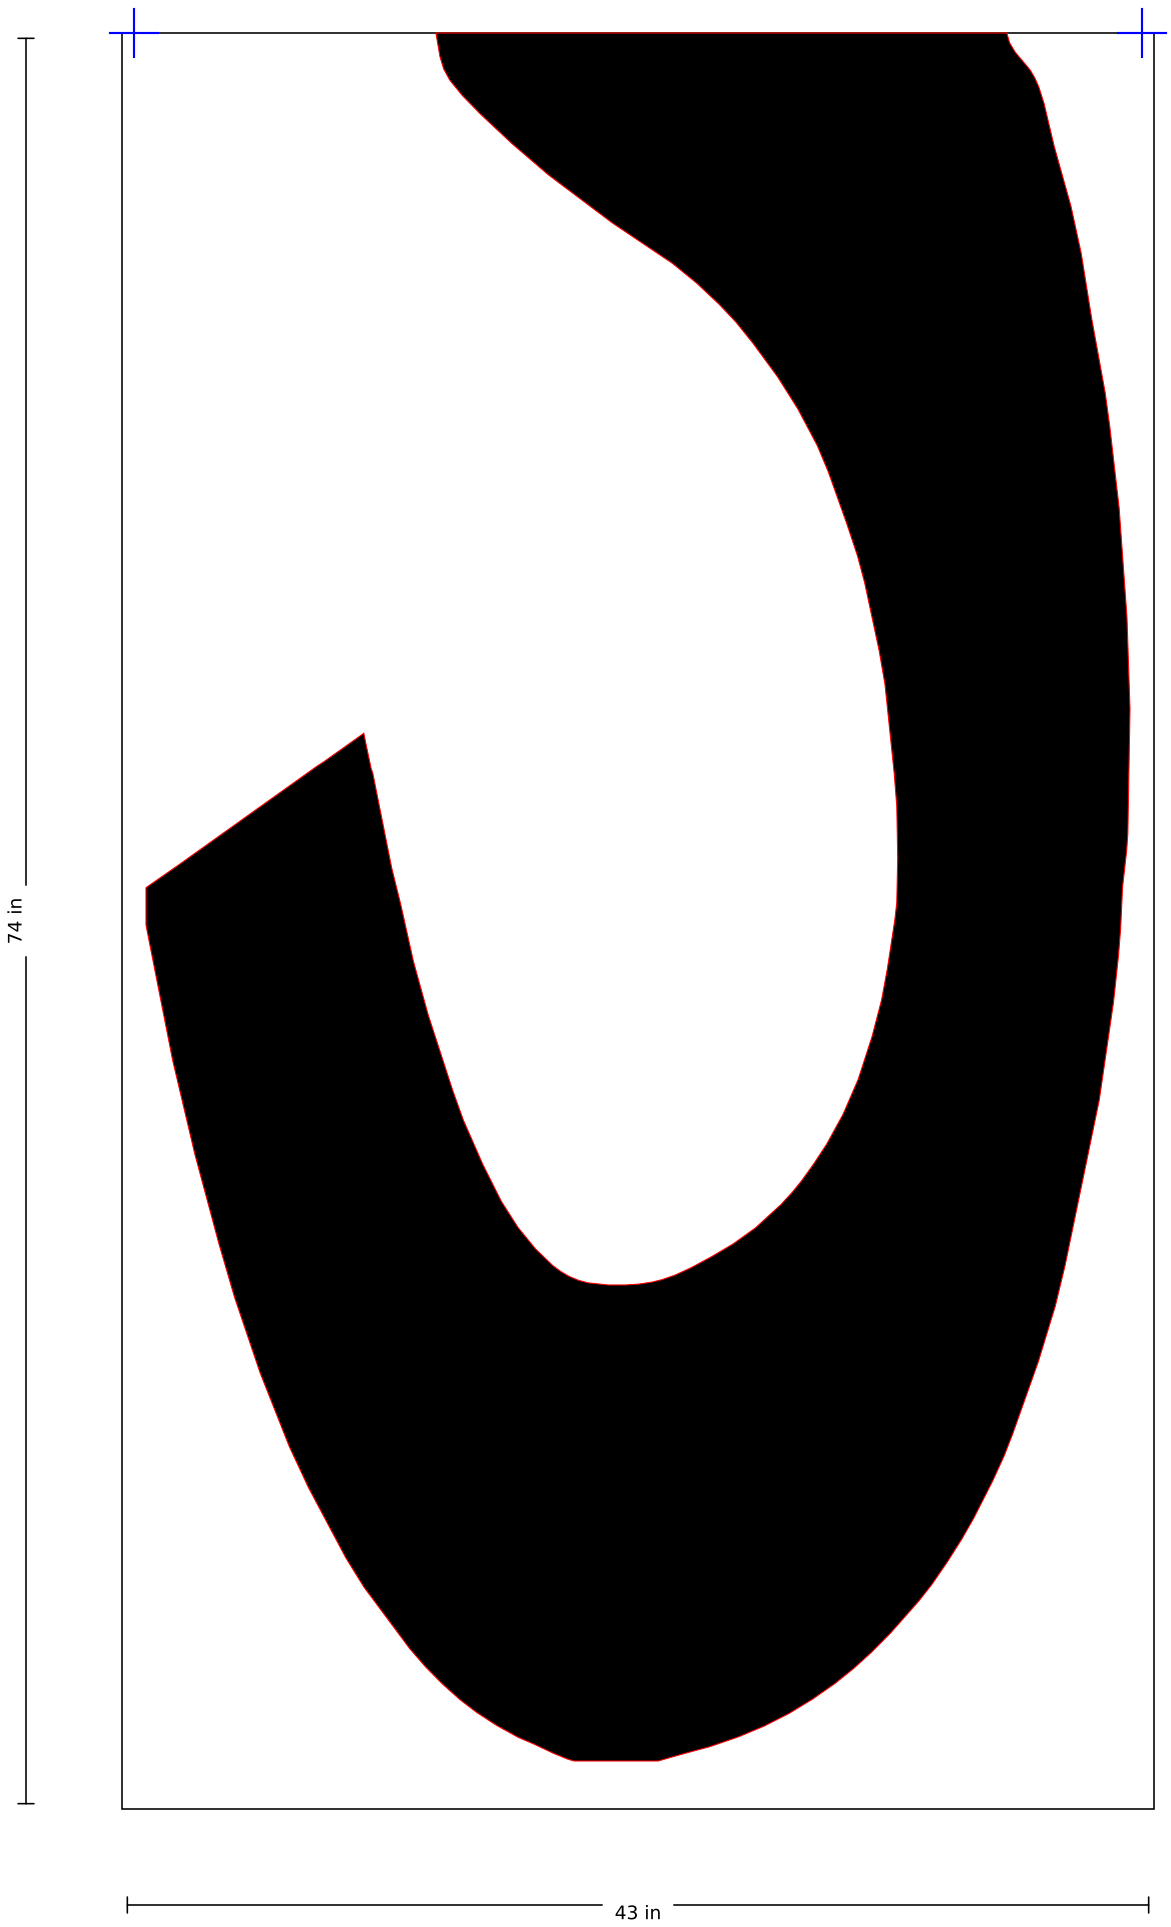

SSS-FAA-144-03-S · piece 2 of 2 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

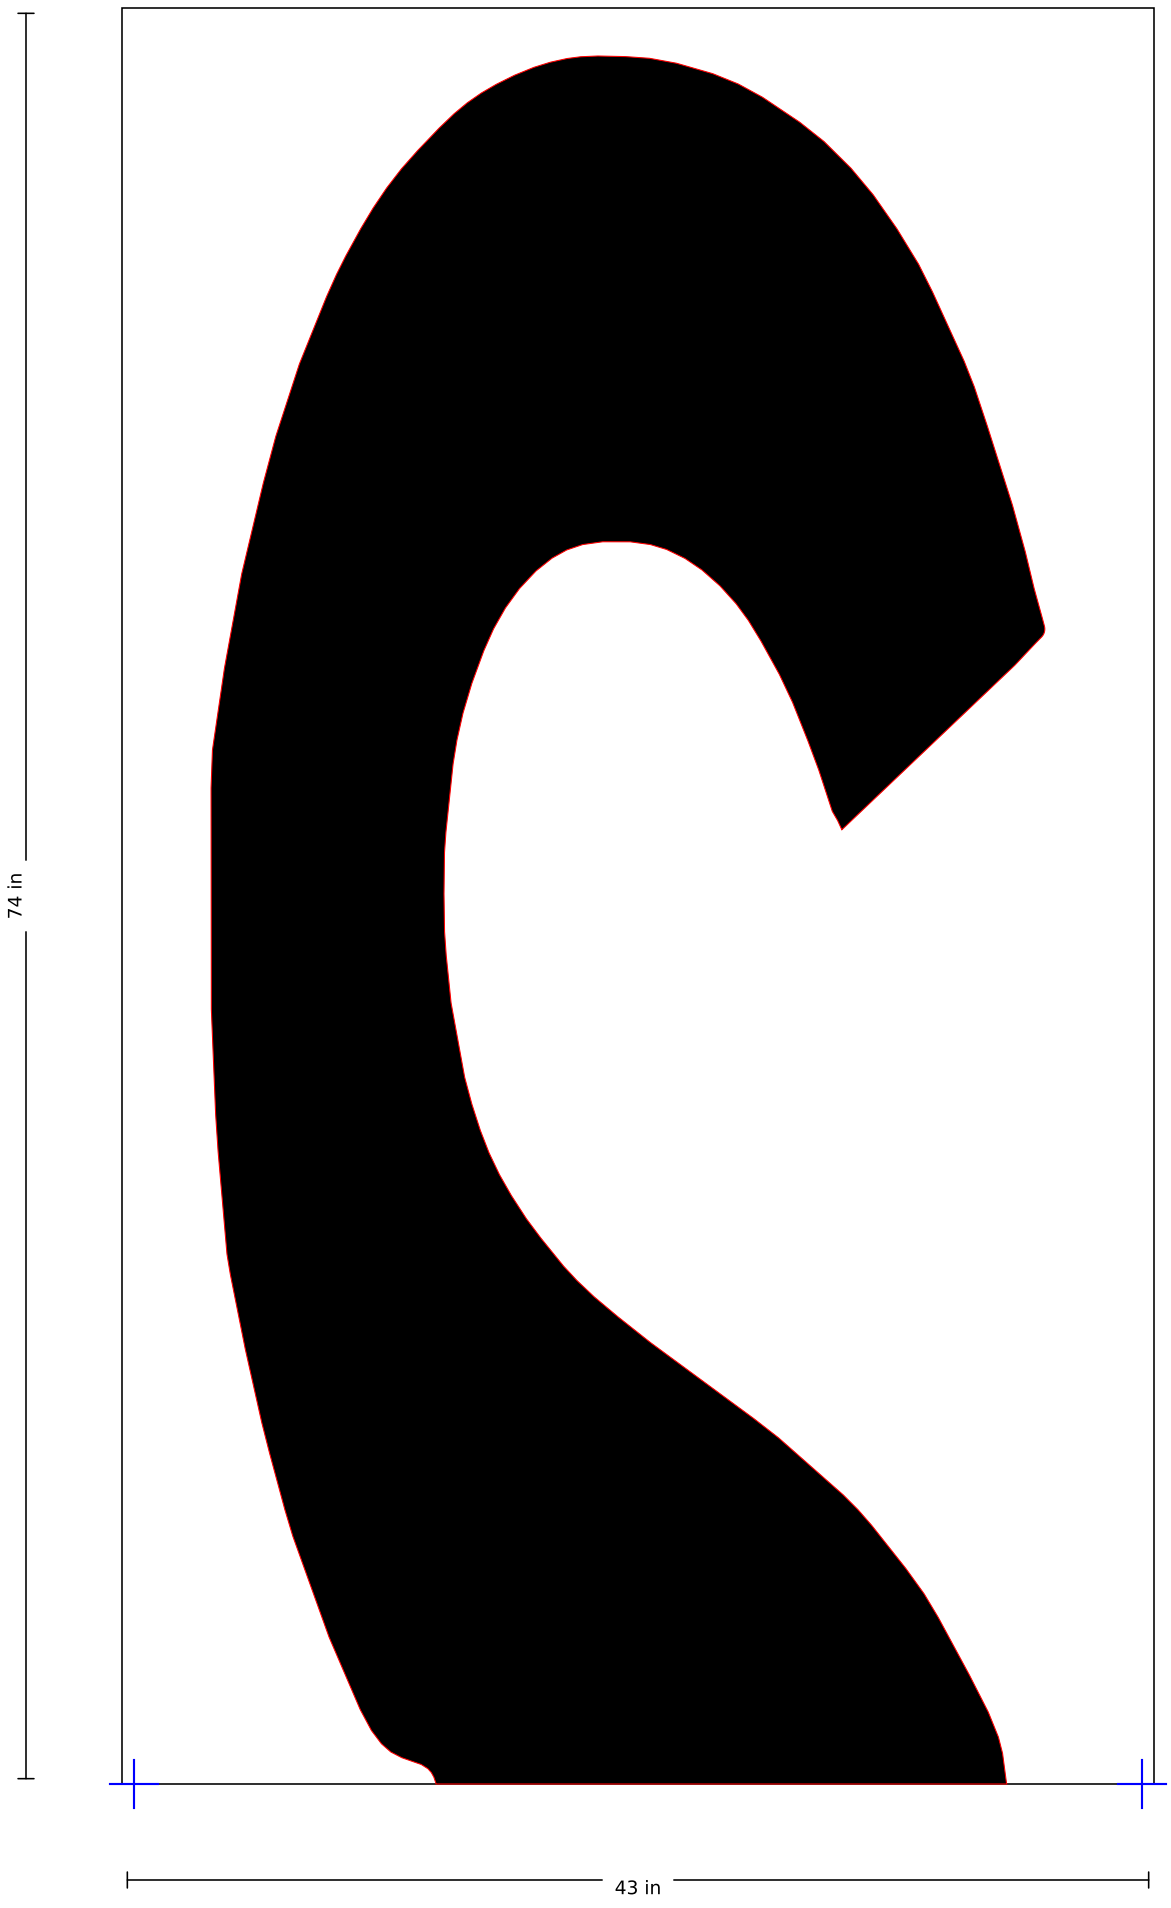

SSS-FAA-144-03-U

144" FAA Airport "U" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 44.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut



Pieces: 2 (1 x 2); blanks (in): 46.5 x 74, 46.5 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144U-144in-FAA-Airport-Letter-U-157x60-2.jpg: width 44.5 from image scale (44.48); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-U · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

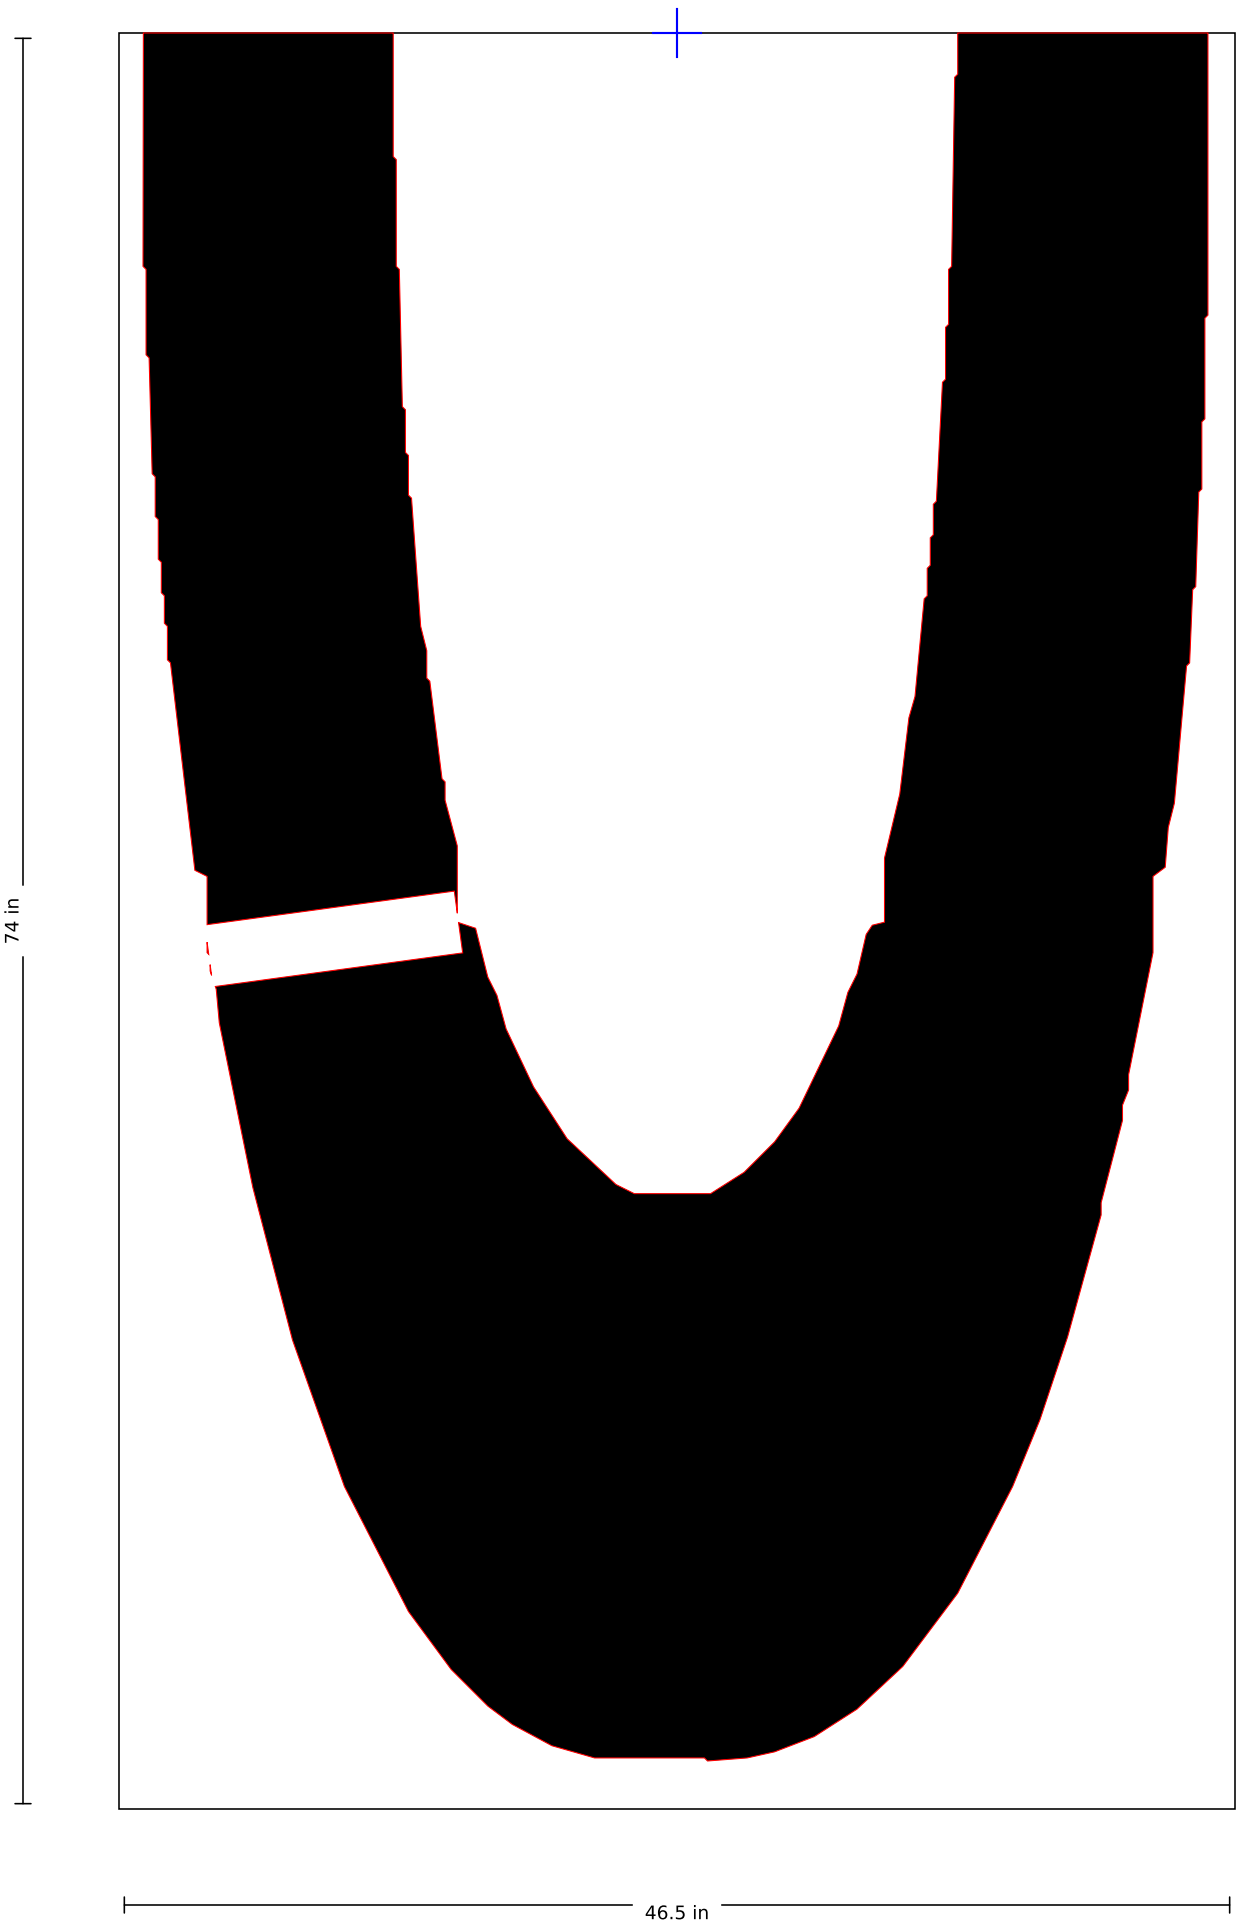

SSS-FAA-144-03-U · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

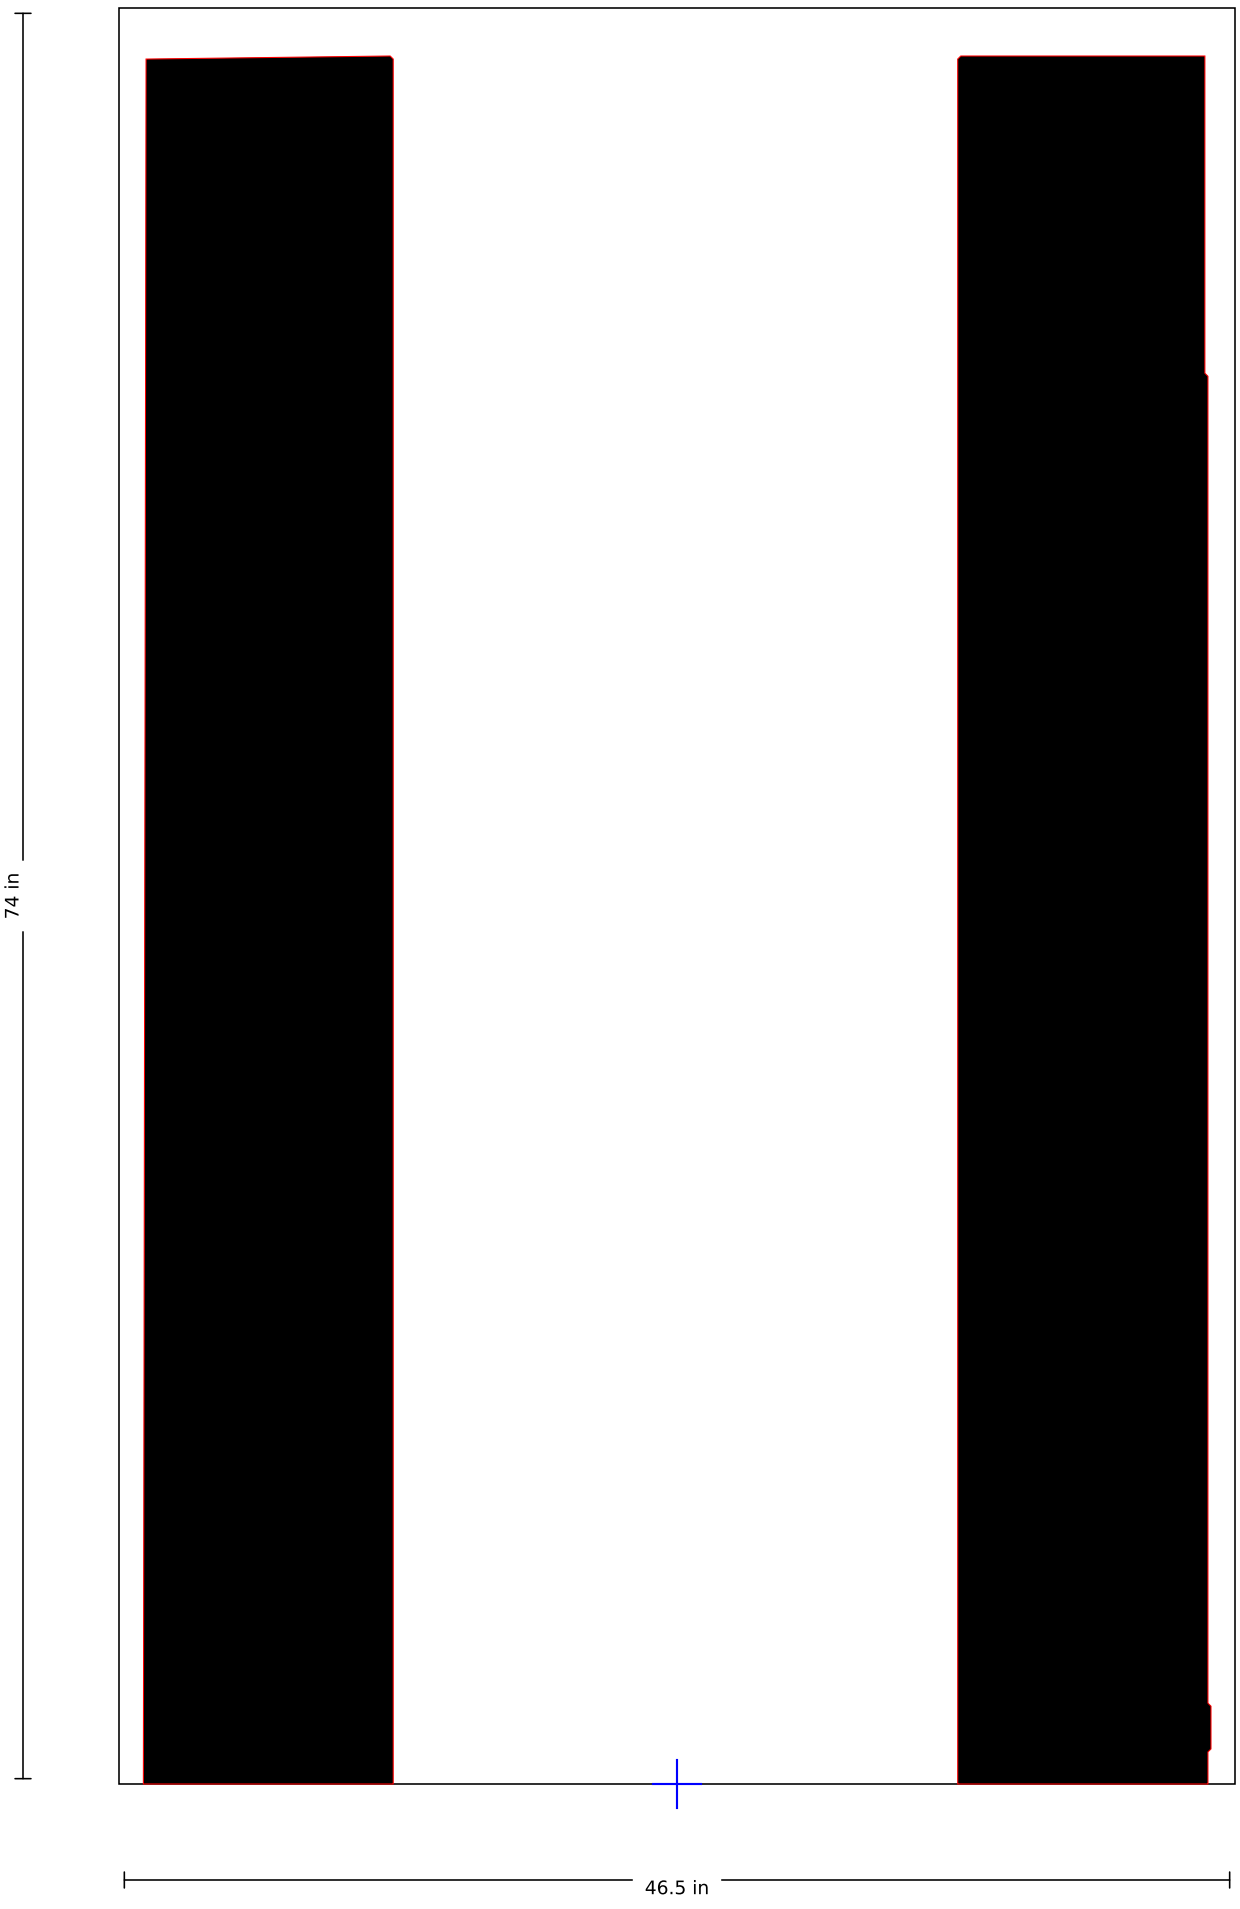

SSS-FAA-144-03-V

144" FAA Airport "V" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 48.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

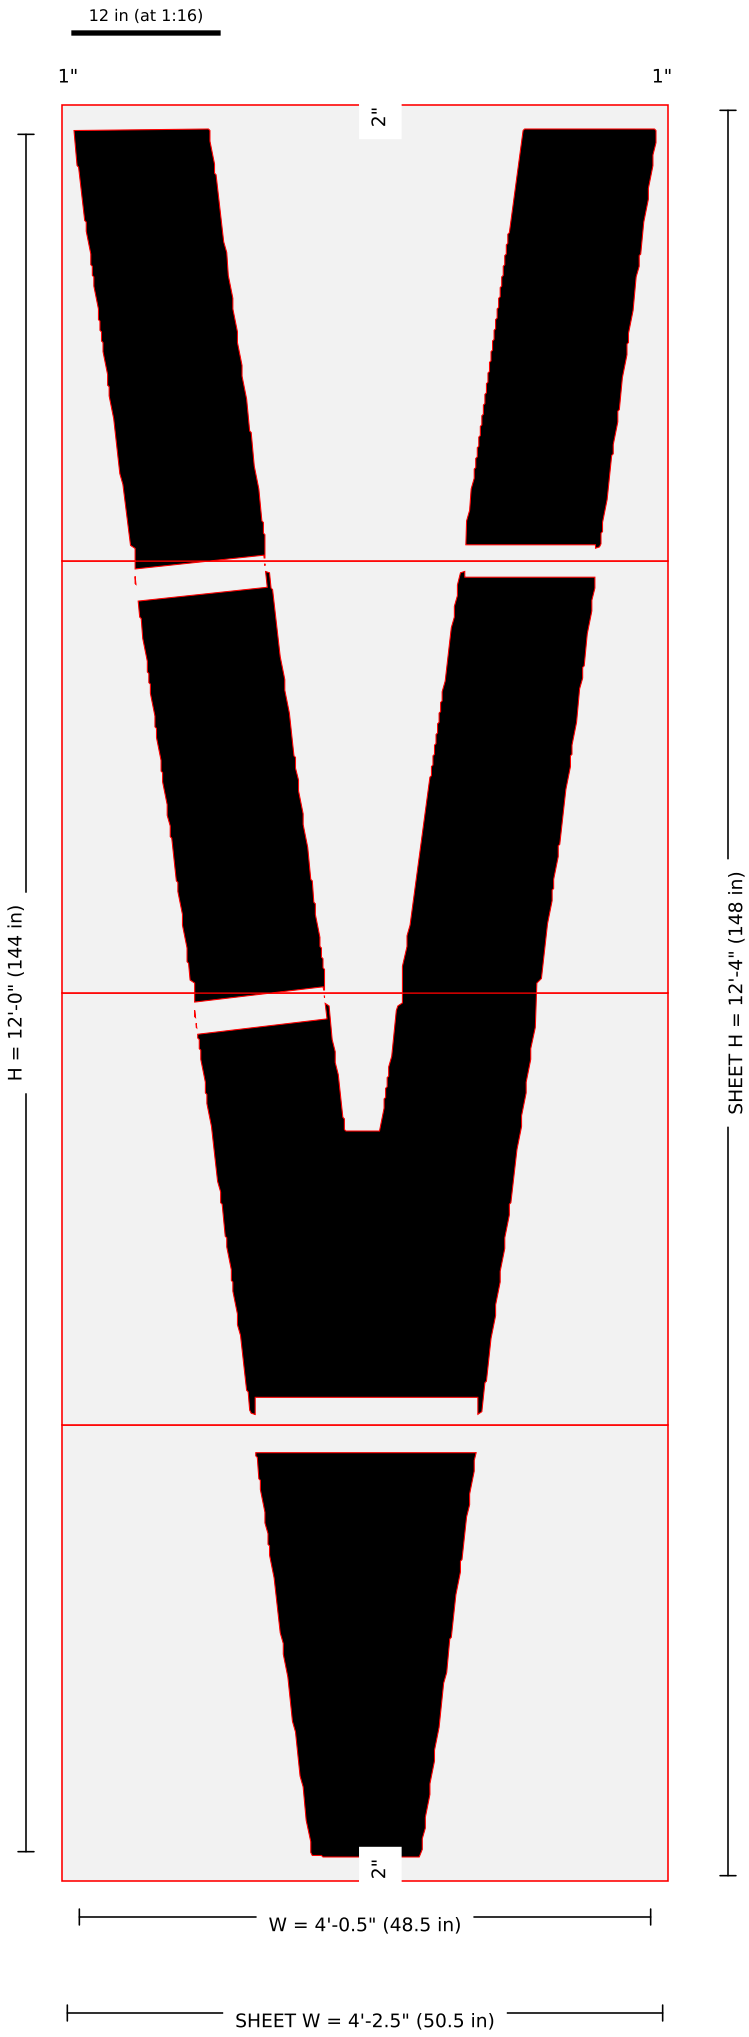

Pieces: 4 (1 x 4); blanks (in): 50.5 x 38, 50.5 x 36, 50.5 x 36, 50.5 x 38 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144V-144in-FAA-Airport-Letter-V-157x60-2.jpg: width 48.5 from image scale (48.42); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 6 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-V · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

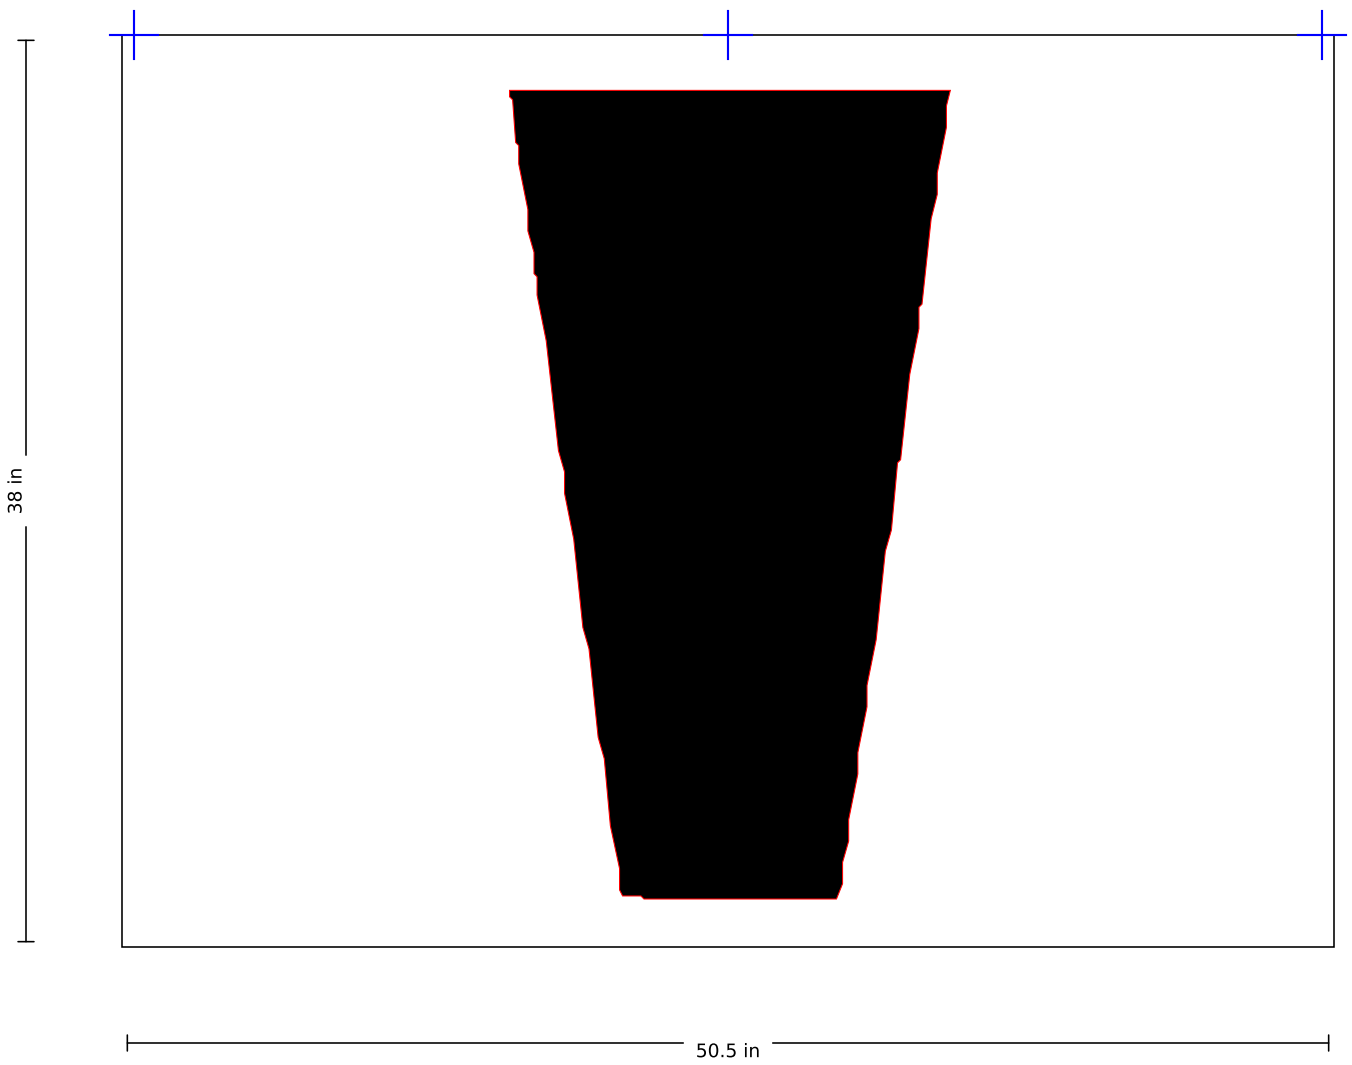


SSS-FAA-144-03-V · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

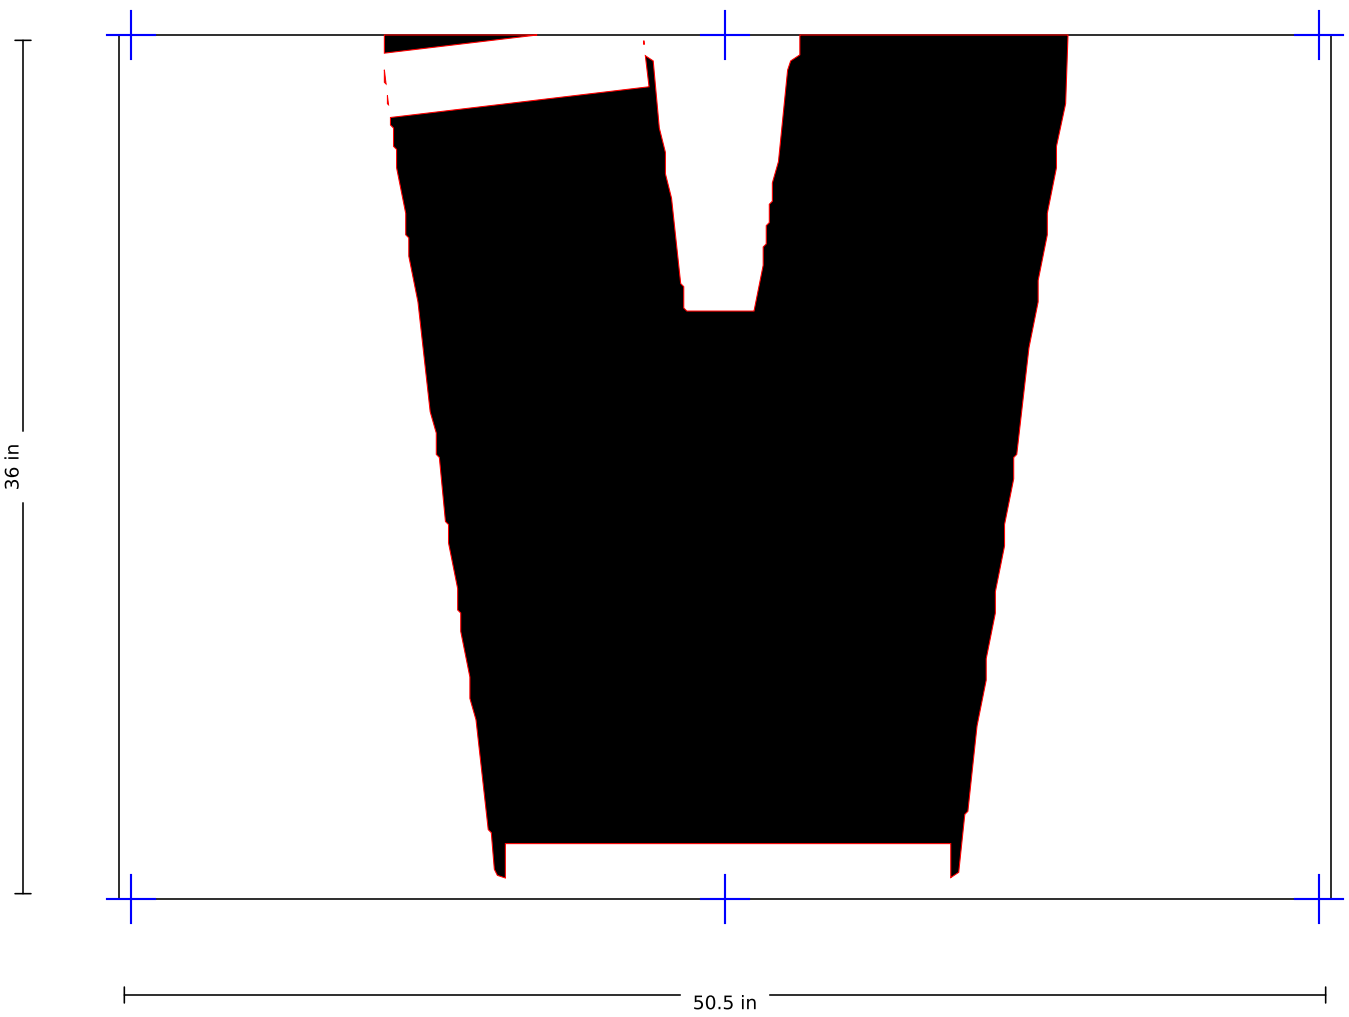


SSS-FAA-144-03-V · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

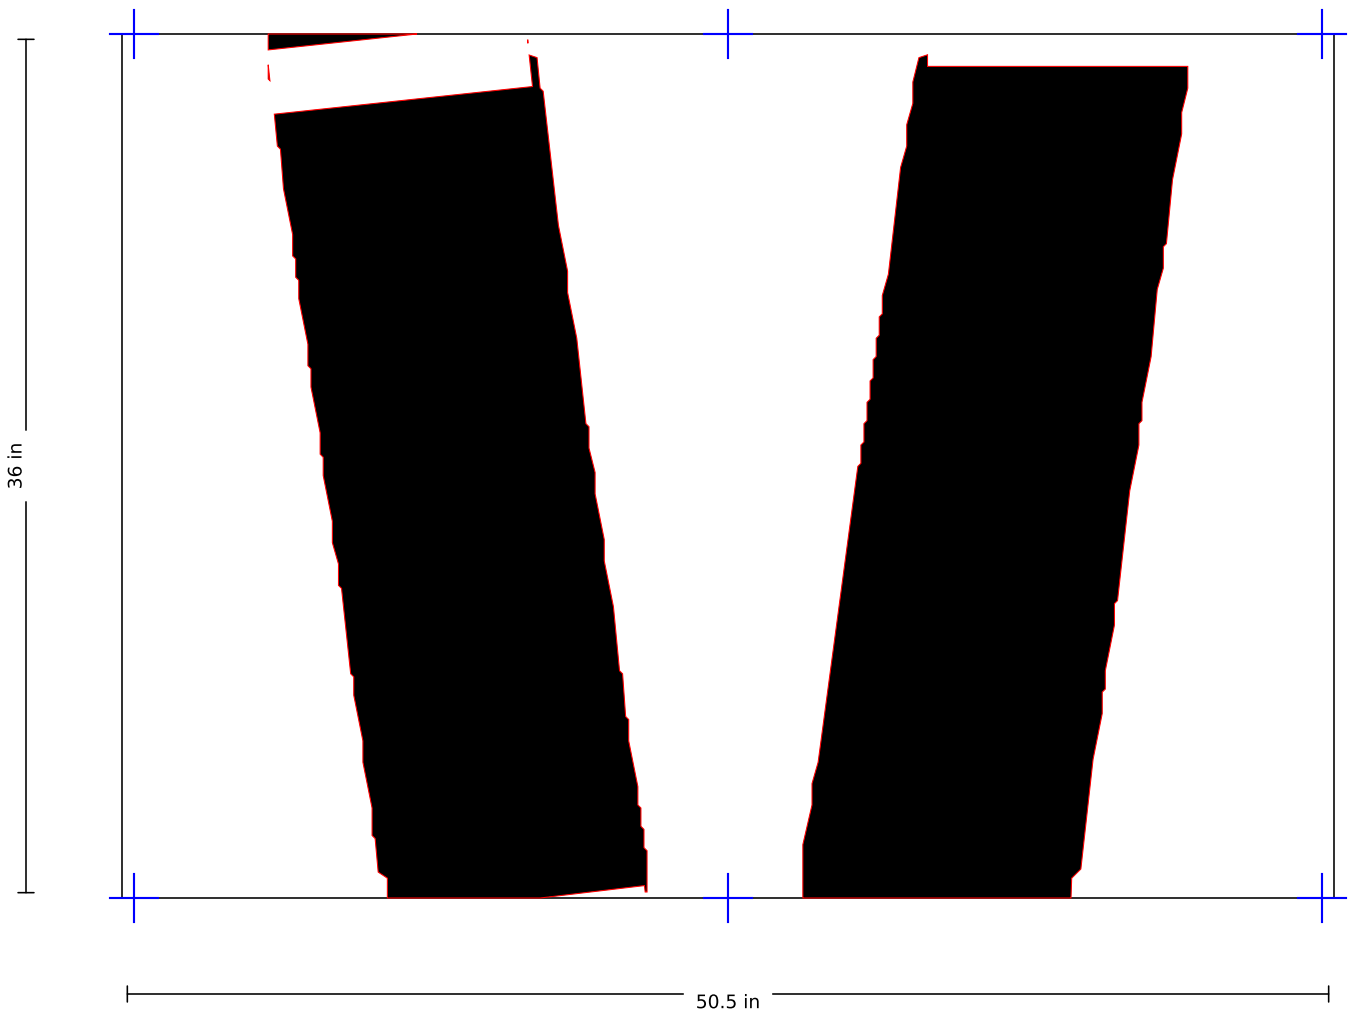

SSS-FAA-144-03-V · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

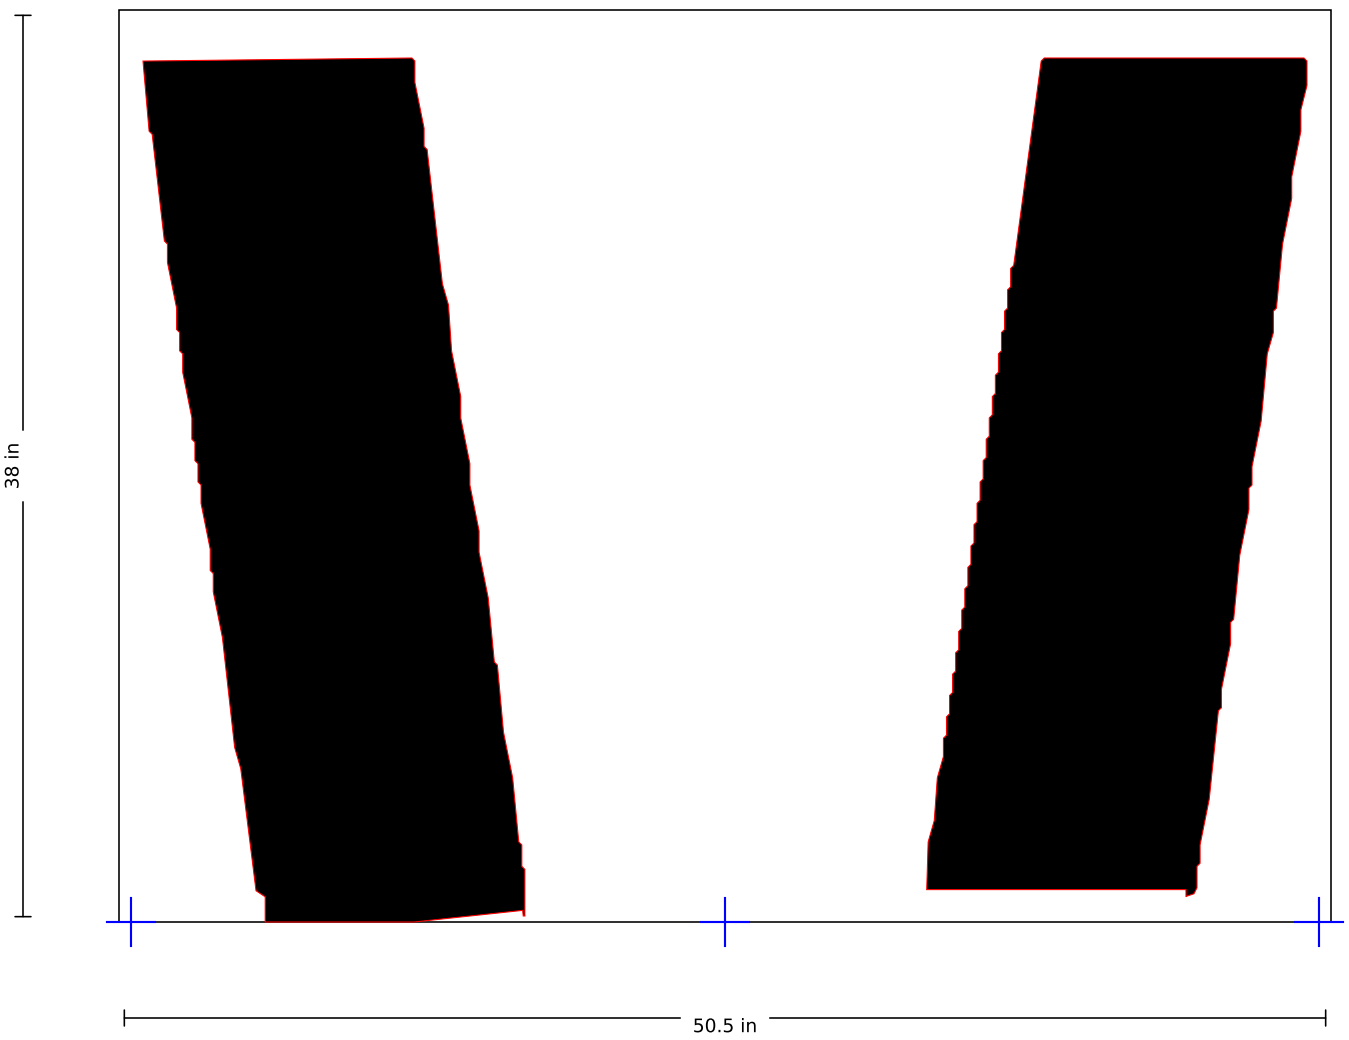

SSS-FAA-144-03-W

144" FAA Airport "W" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 52.5 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

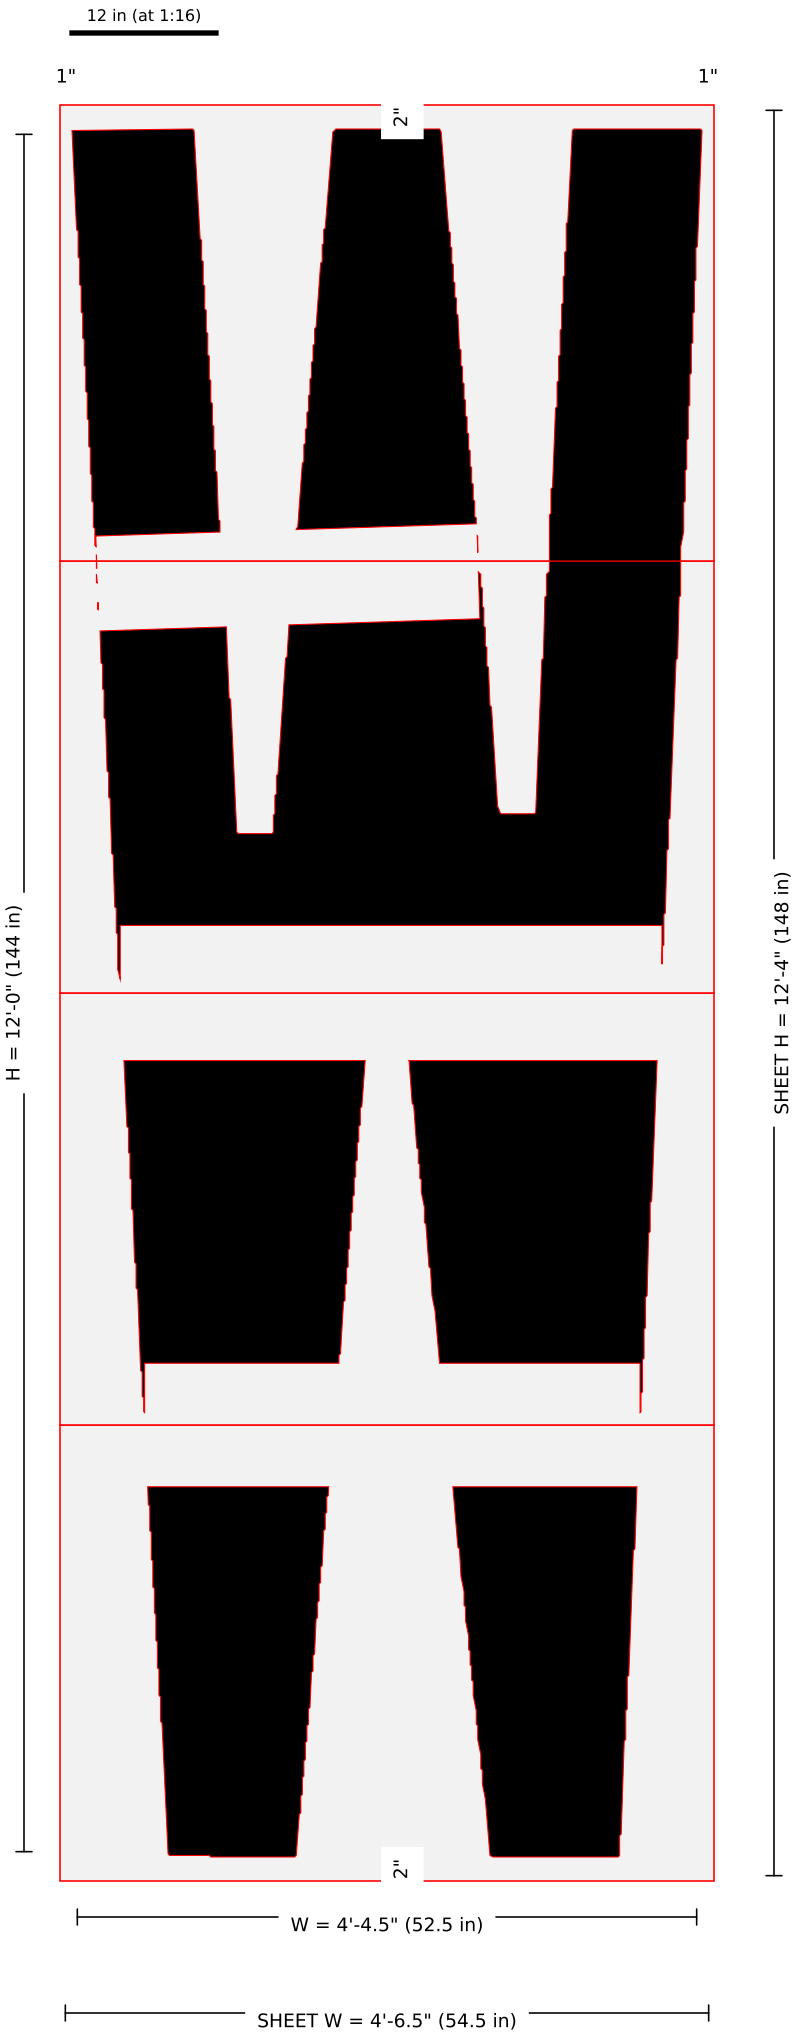

Pieces: 4 (1 x 4); blanks (in): 54.5 x 38, 54.5 x 36, 54.5 x 36, 54.5 x 38 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144W-144in-FAA-Airport-Letter-W-157x60-2.jpg: width 52.5 from image scale (52.49); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 5 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-W · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

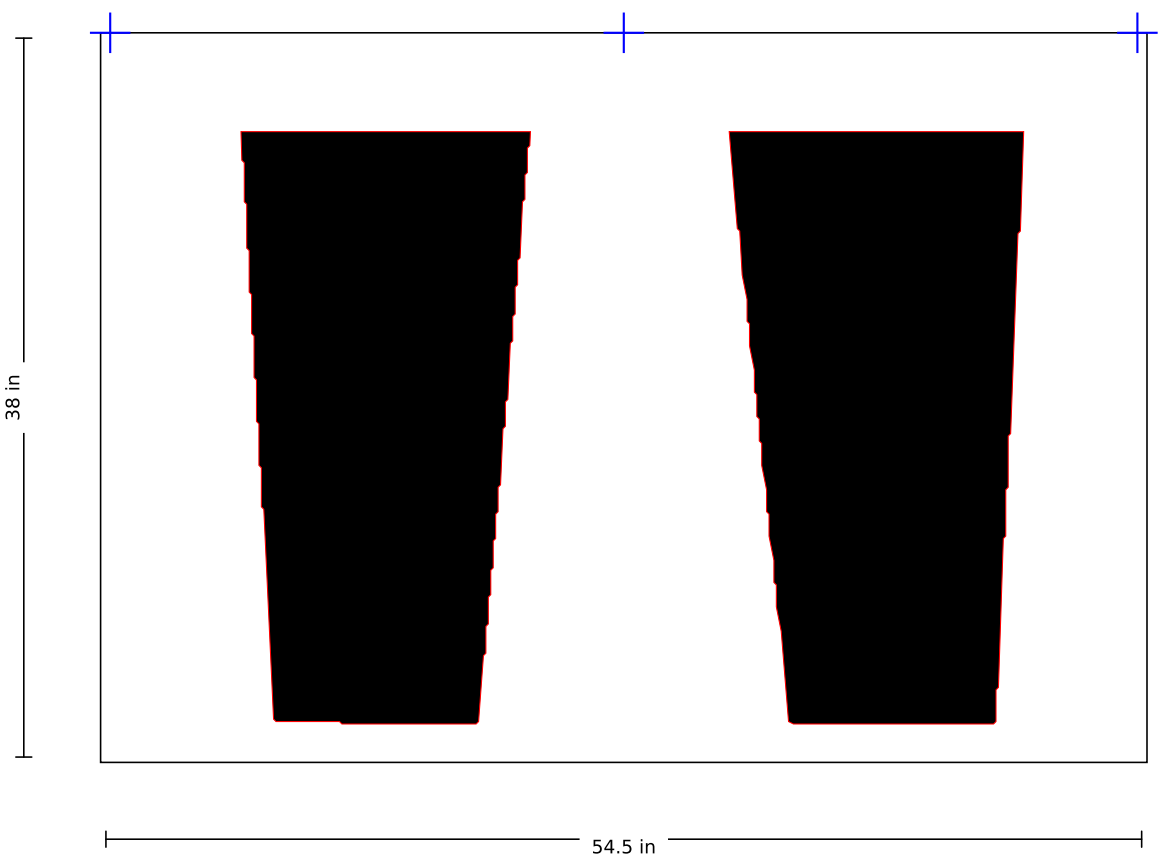


SSS-FAA-144-03-W · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

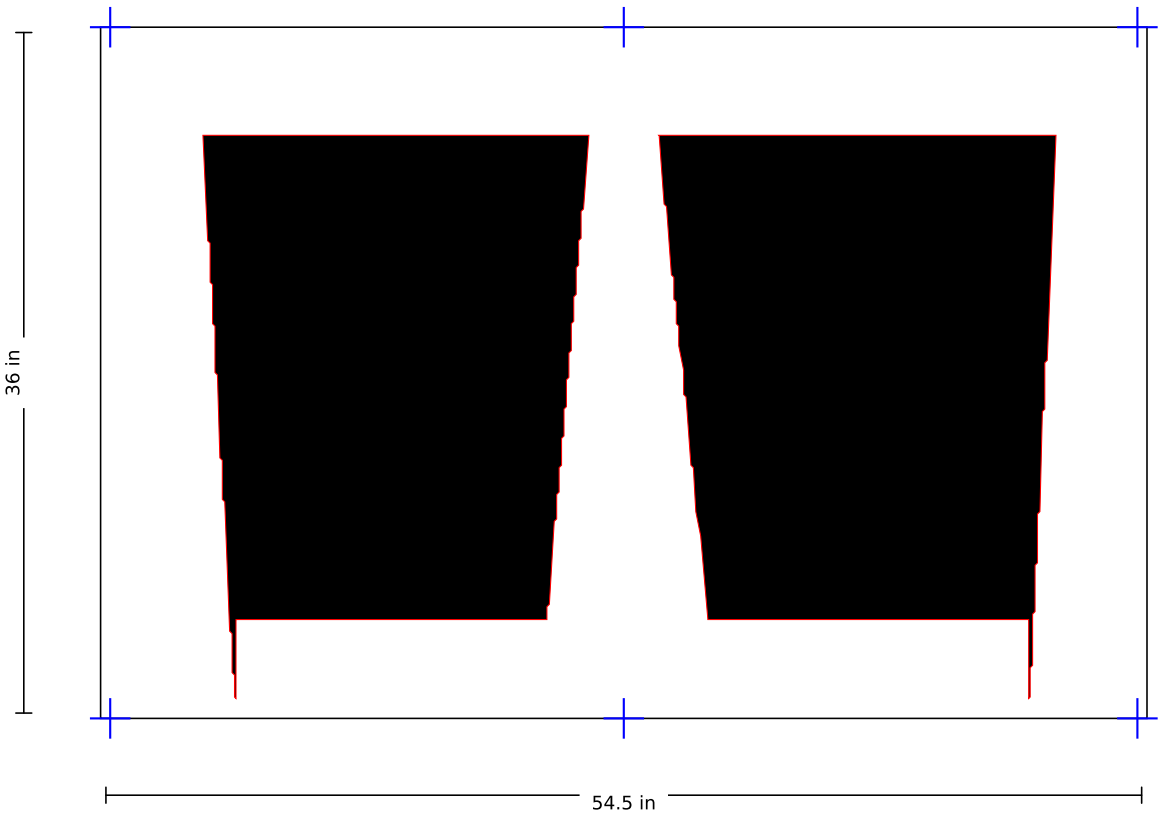


SSS-FAA-144-03-W · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

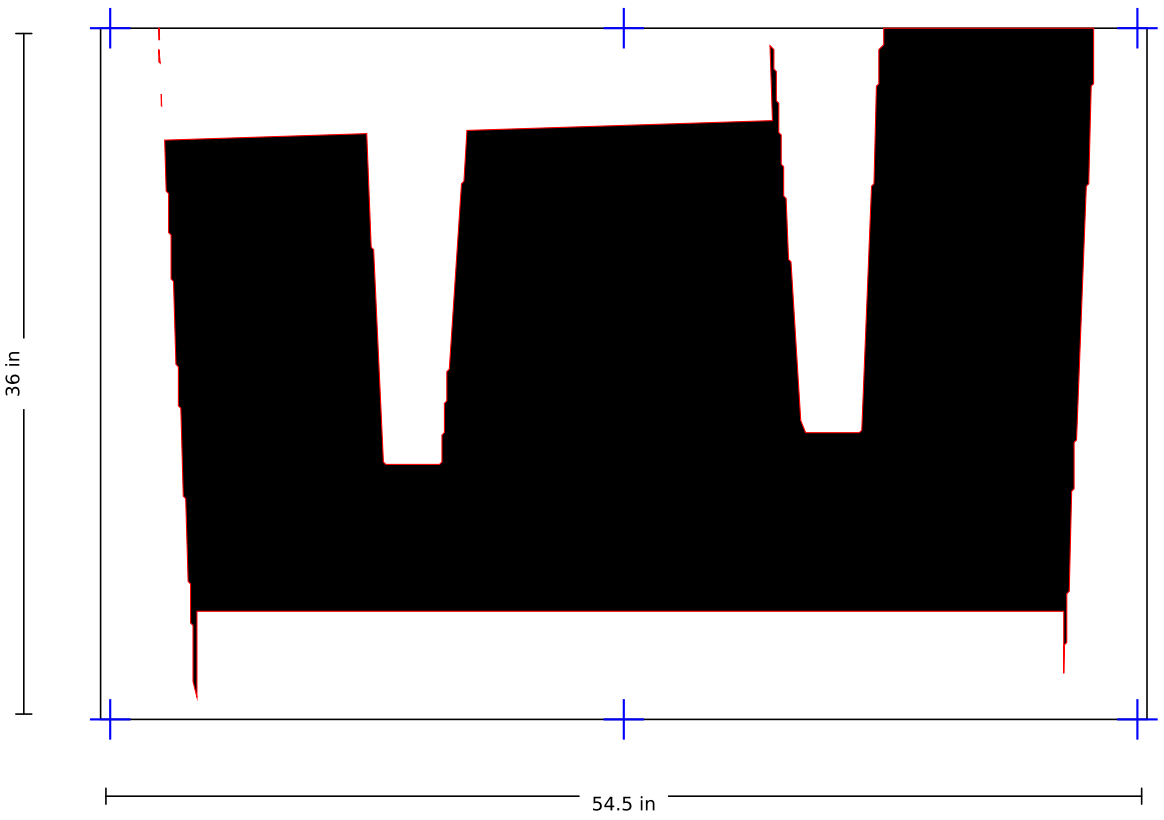

SSS-FAA-144-03-W · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:10 on 11x17 · blue crosses = REG marks on seams

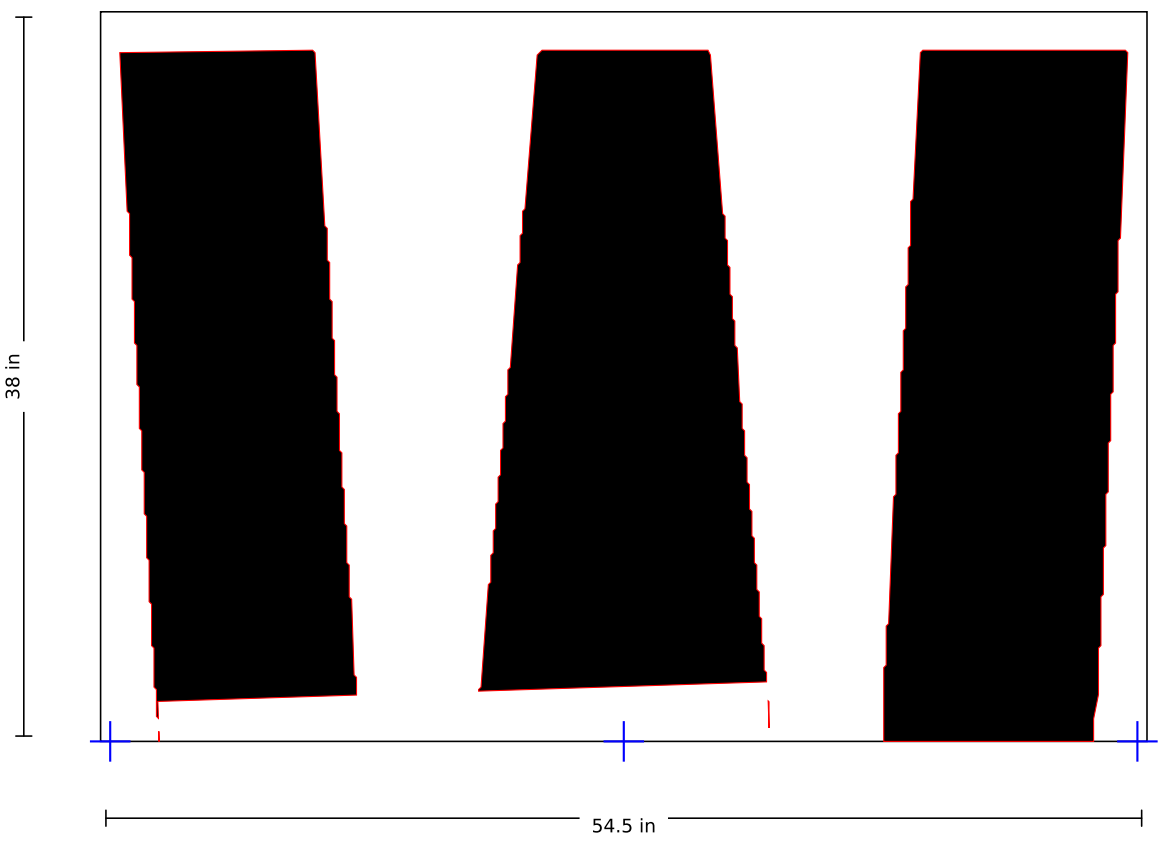

SSS-FAA-144-03-X

144" FAA Airport "X" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

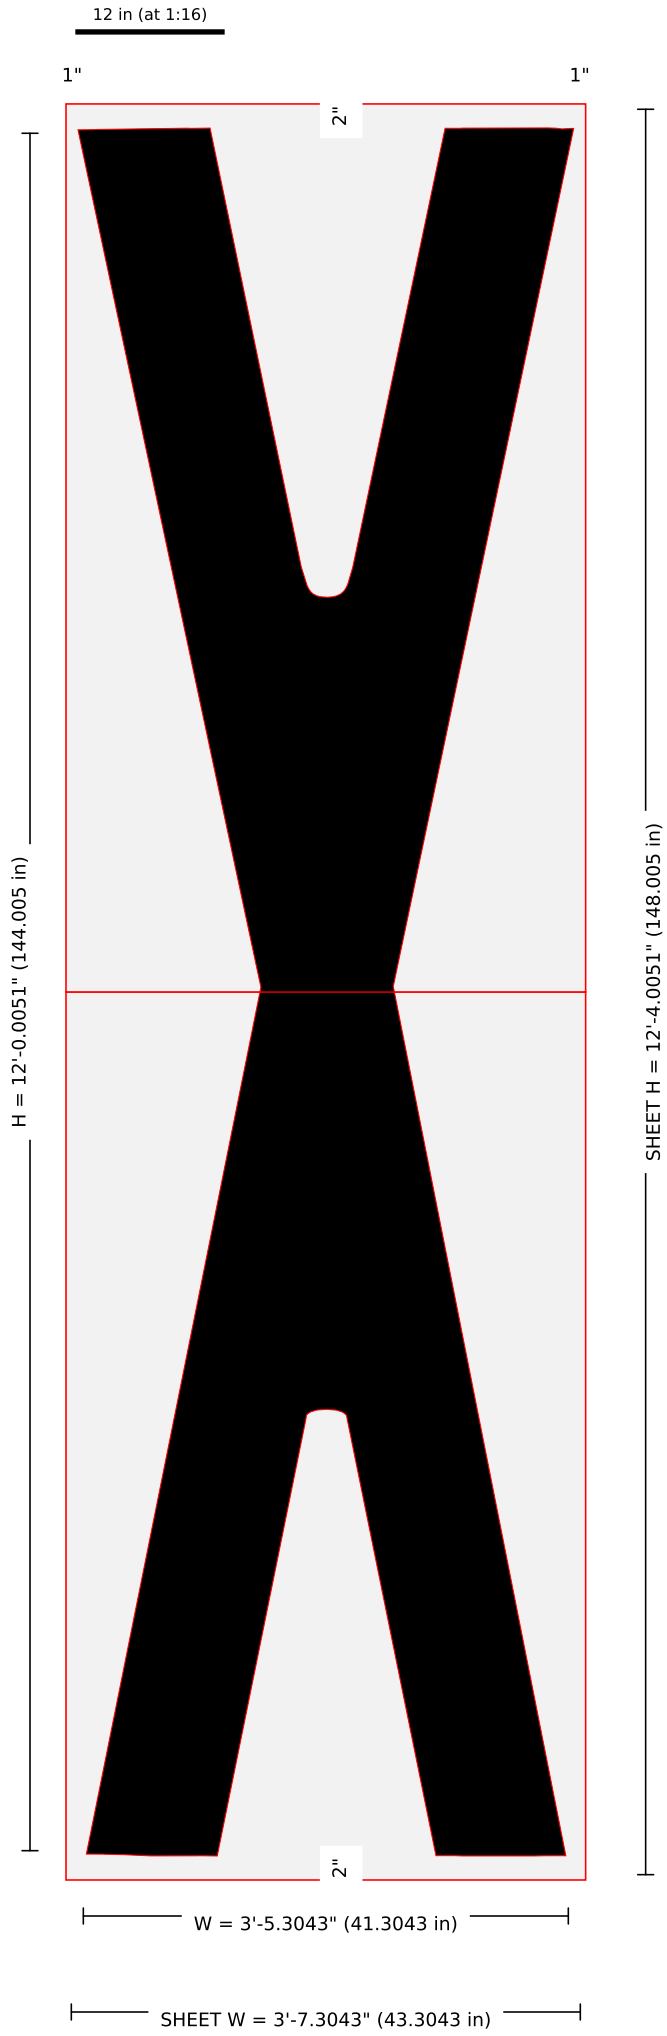

Pieces: 2 (1 x 2); blanks (in): 43.304 x 74.003, 43.304 x 74.003 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144X-144in-FAA-Airport-Letter-X-157x60-2.jpg: width = kit listing 41 (image-scale 40.80); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-X · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

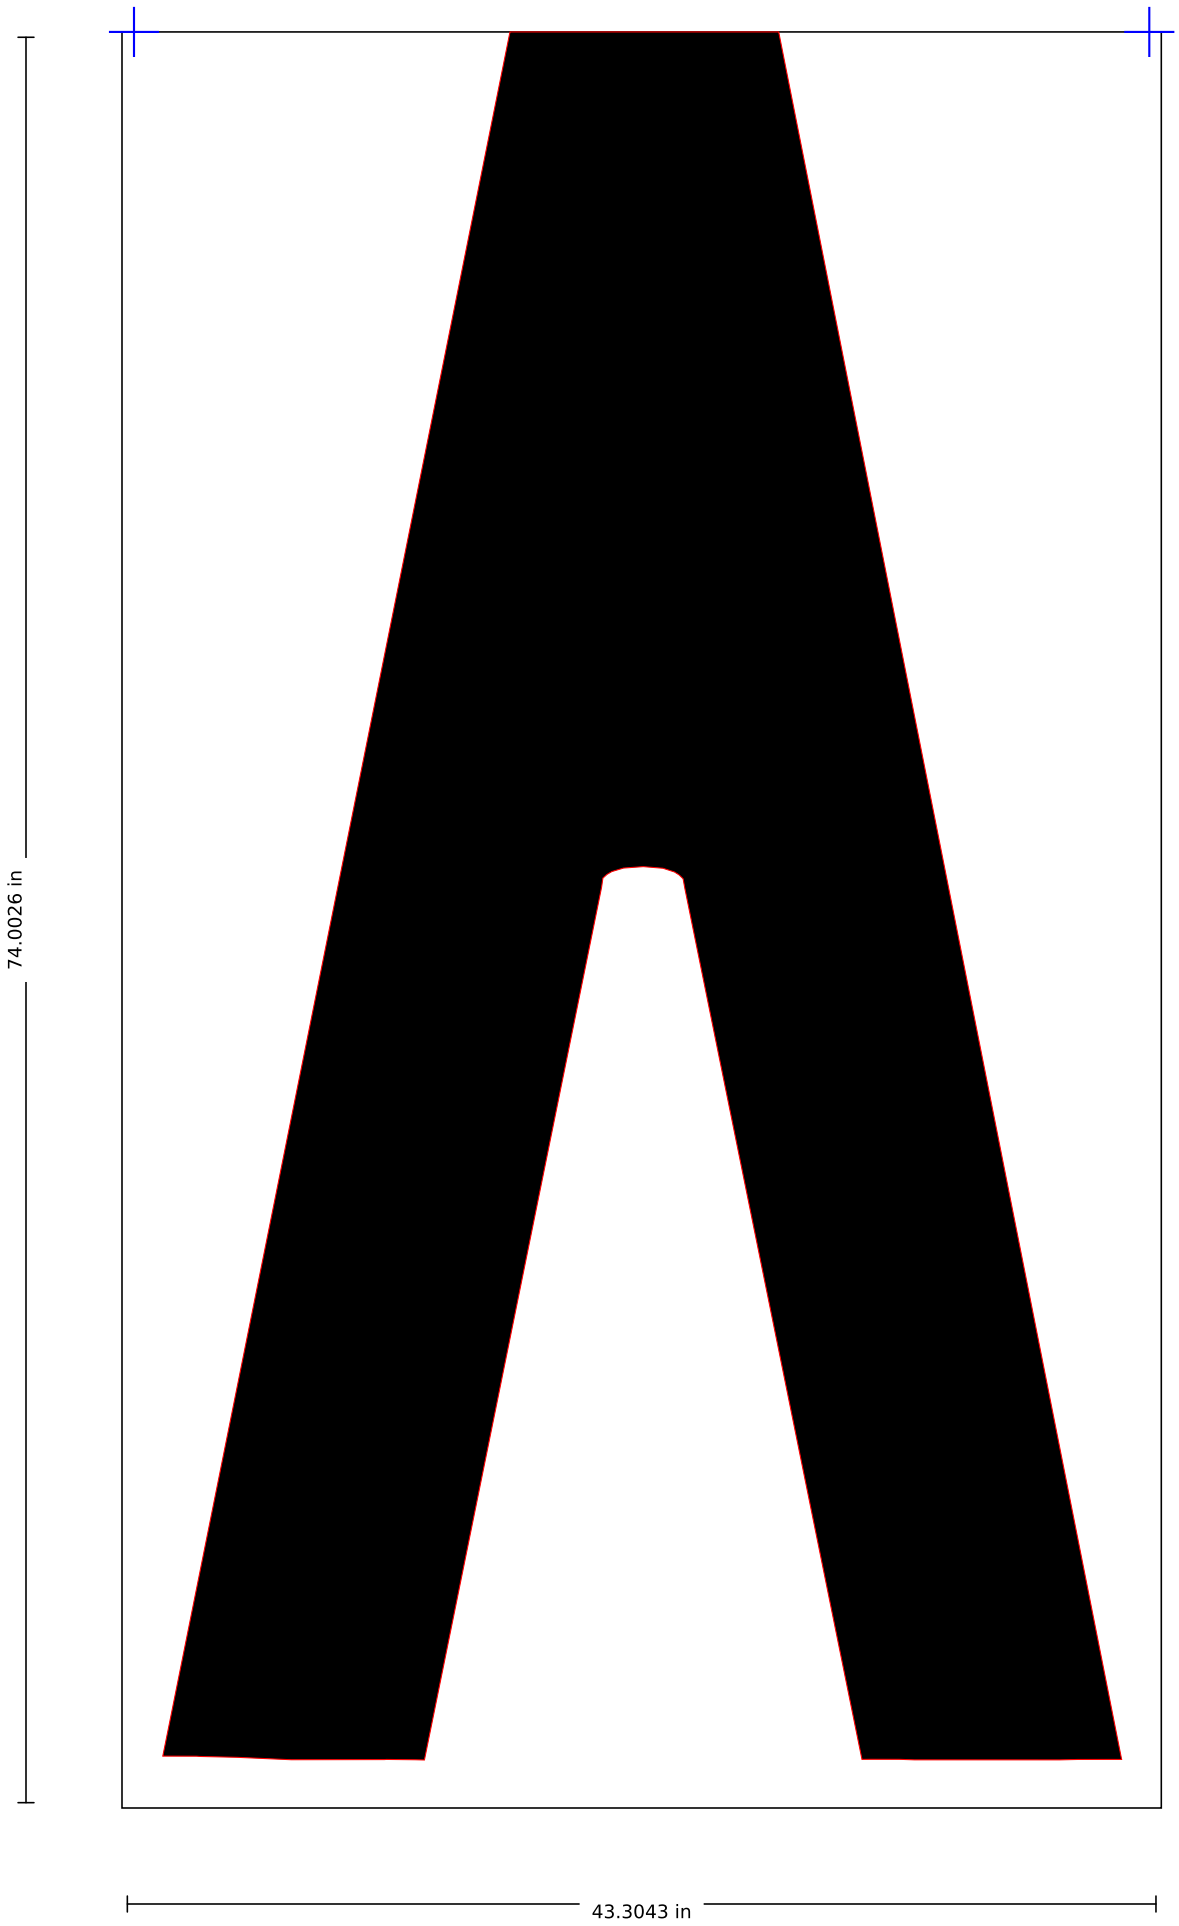

SSS-FAA-144-03-X · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

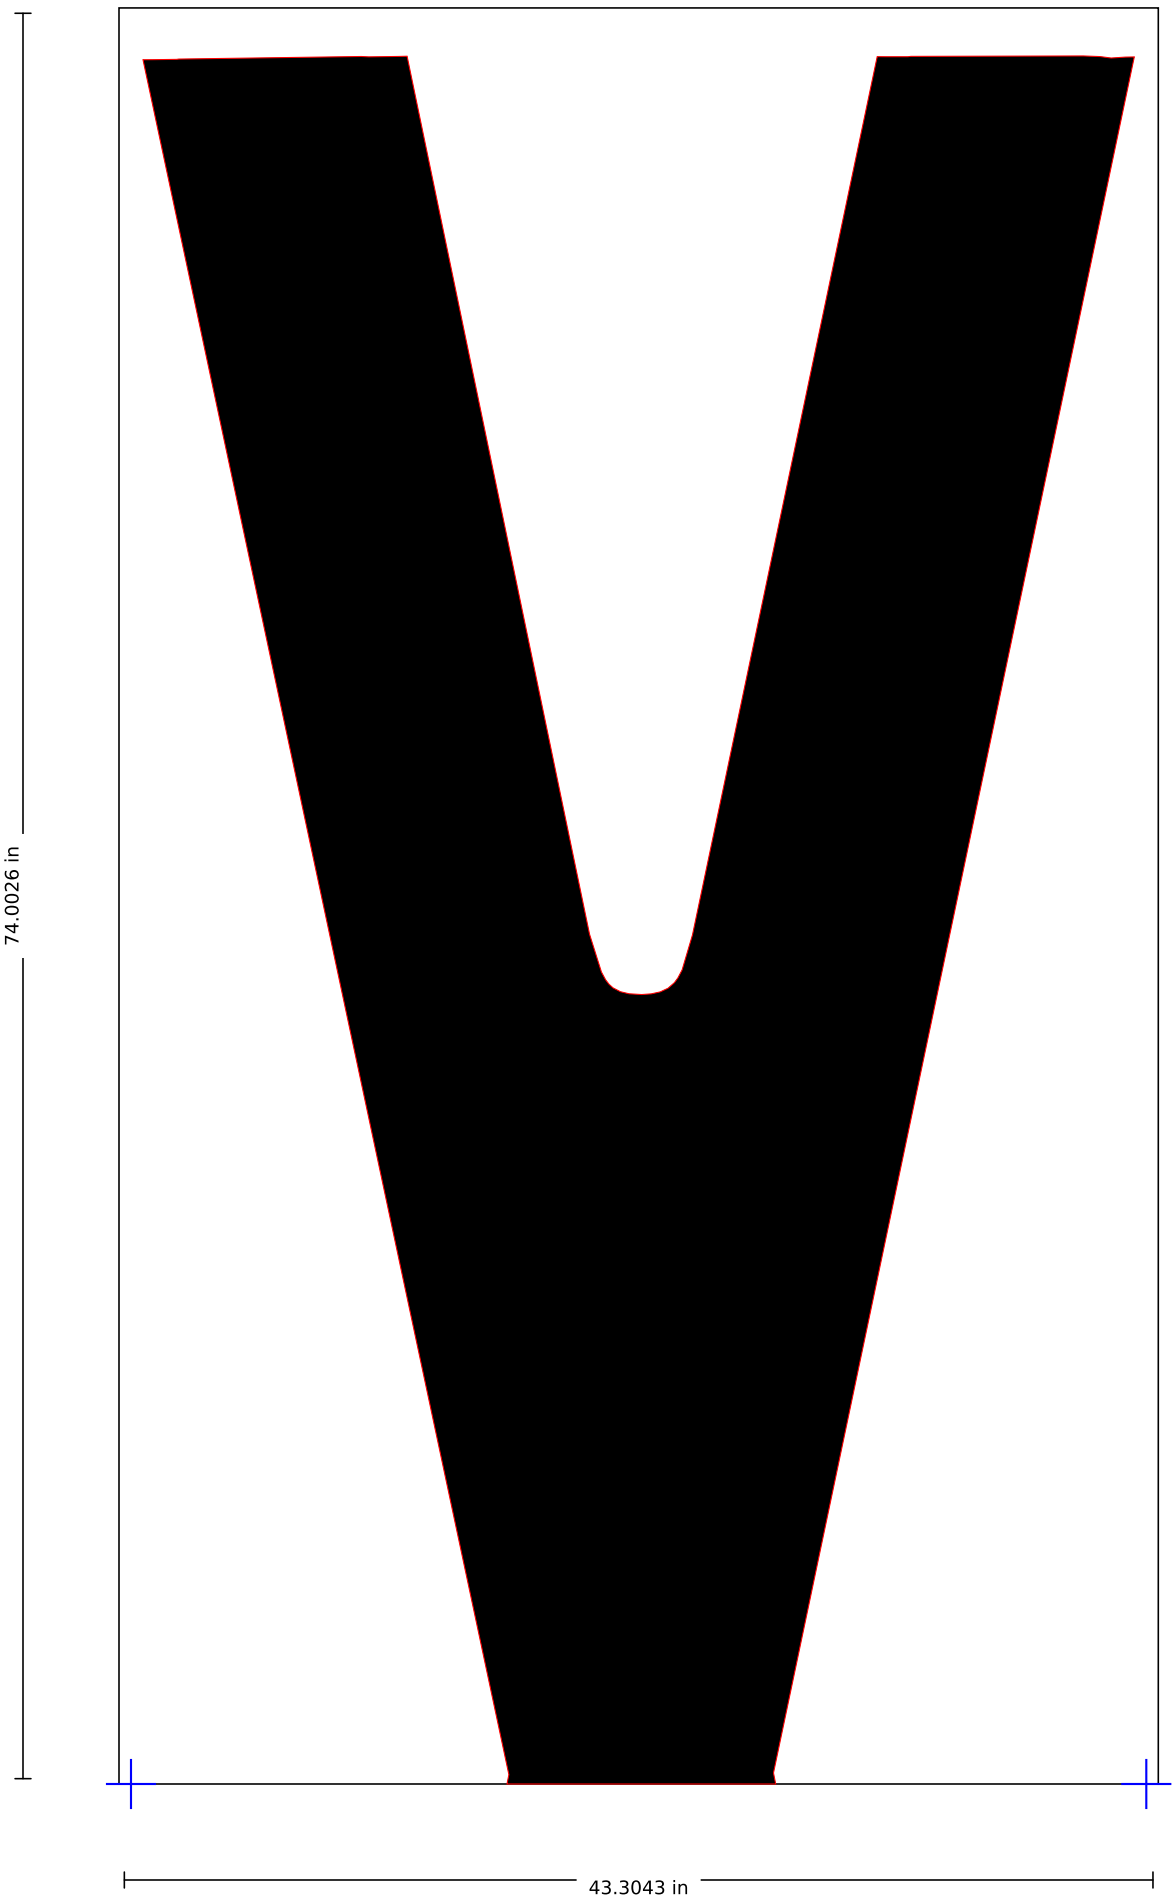

SSS-FAA-144-03-Y

144" FAA Airport "Y" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 50 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

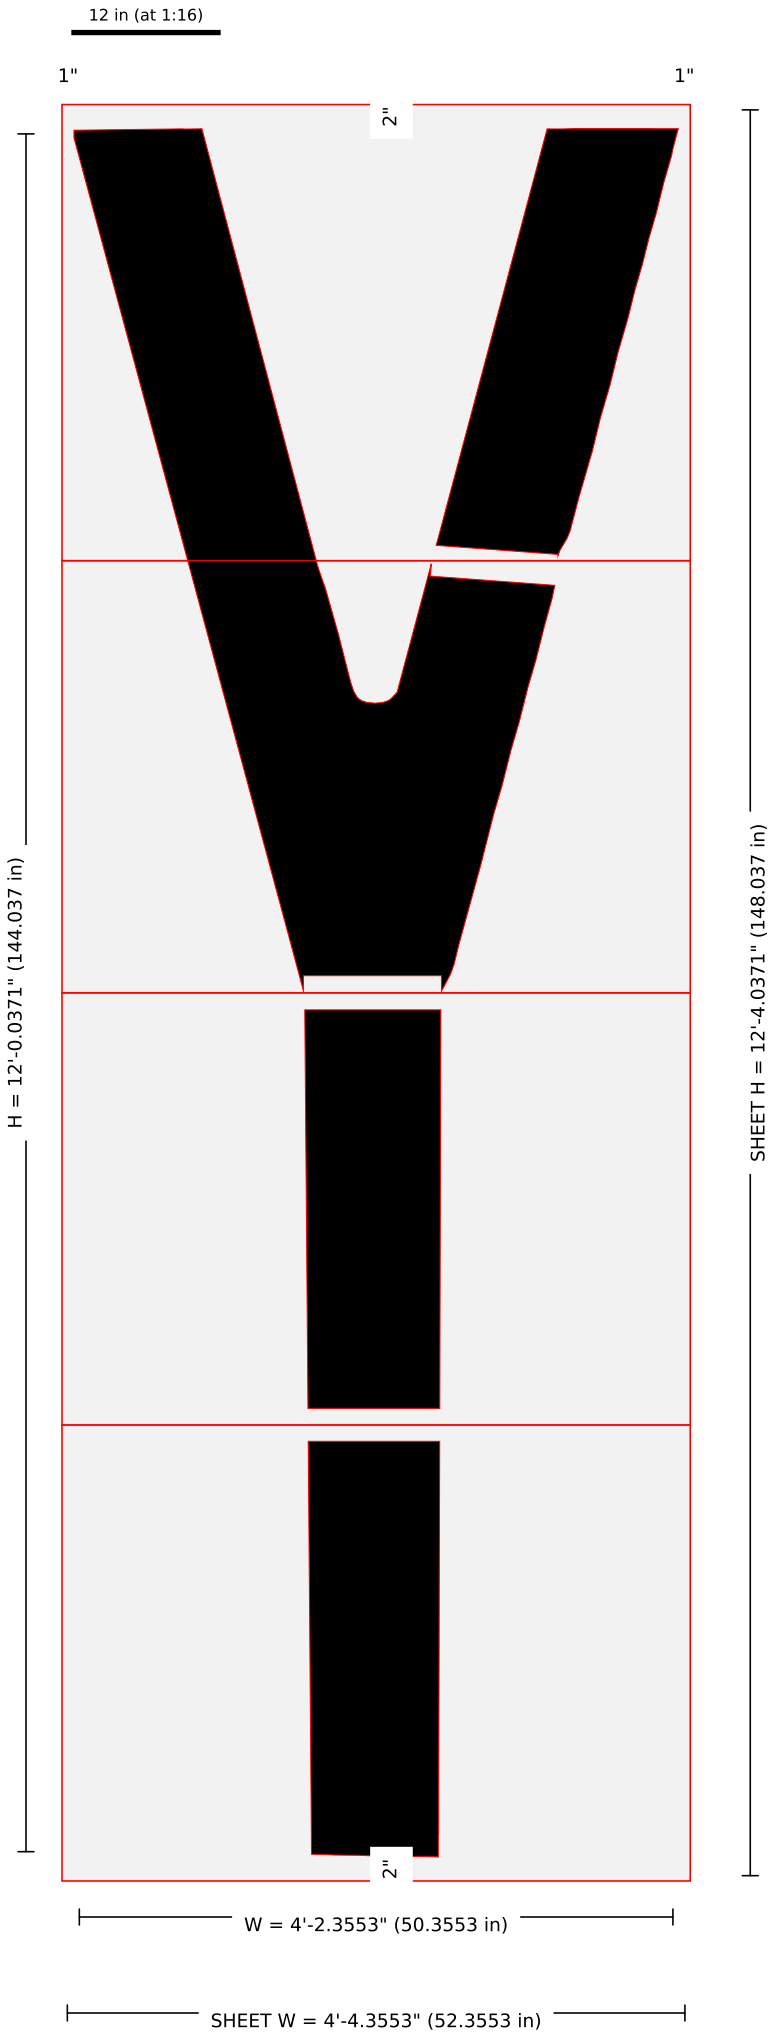

Pieces: 4 (1 x 4); blanks (in): 52.355 x 38.009, 52.355 x 36.009, 52.355 x 36.009, 52.355 x 38.009 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
REG marks)
REG marks)
REG marks)
Matches 1-800-Stencil per-character image 1800-F144Y-144in-FAA-Airport-Letter-Y-157x60-2.jpg: width 50 from image scale (49.95); NOT the kit listing width; kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 3 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-Y · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

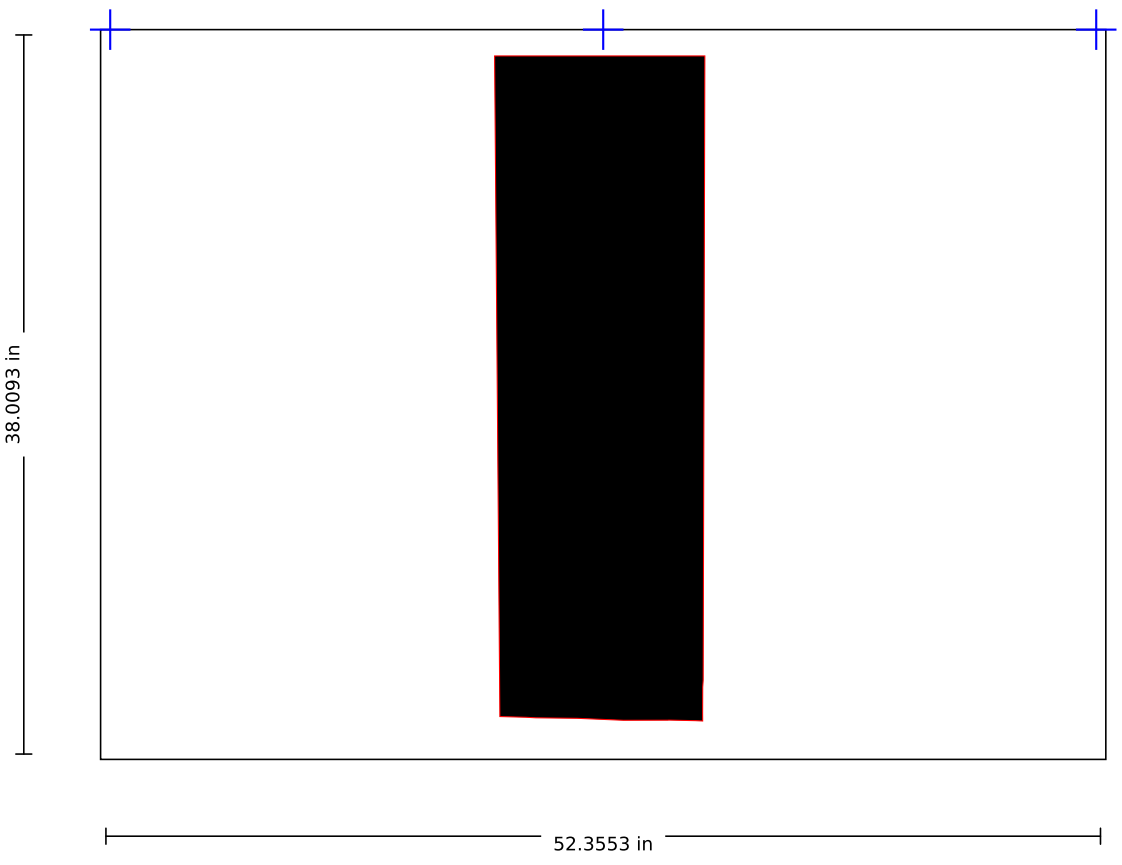


SSS-FAA-144-03-Y · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

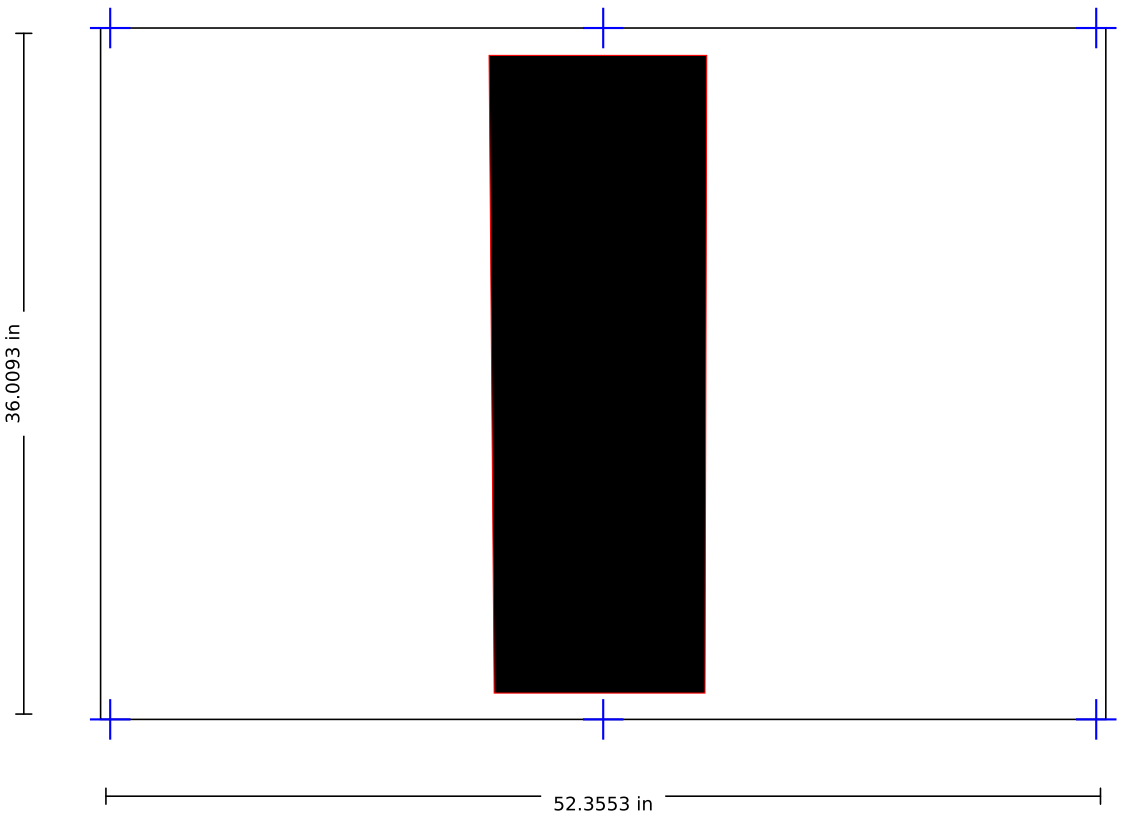


SSS-FAA-144-03-Y · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

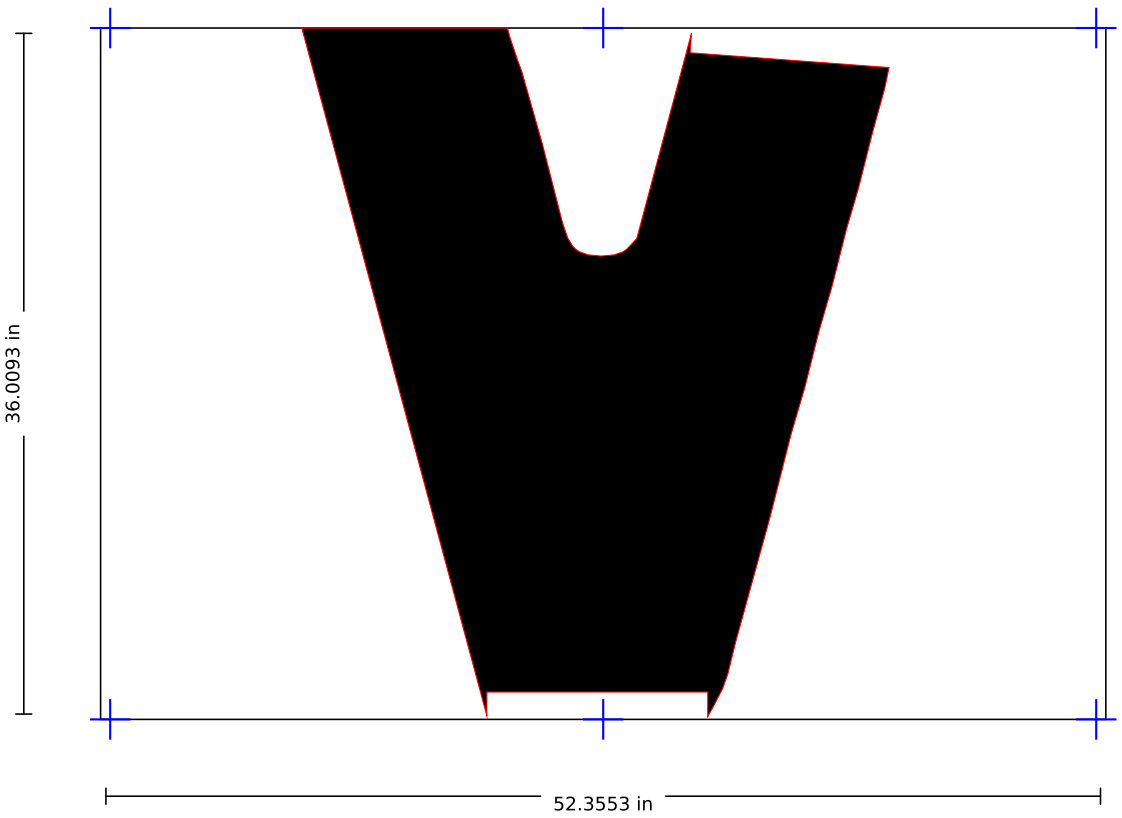

SSS-FAA-144-03-Y · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:10 on 11x17 · blue crosses = REG marks on seams

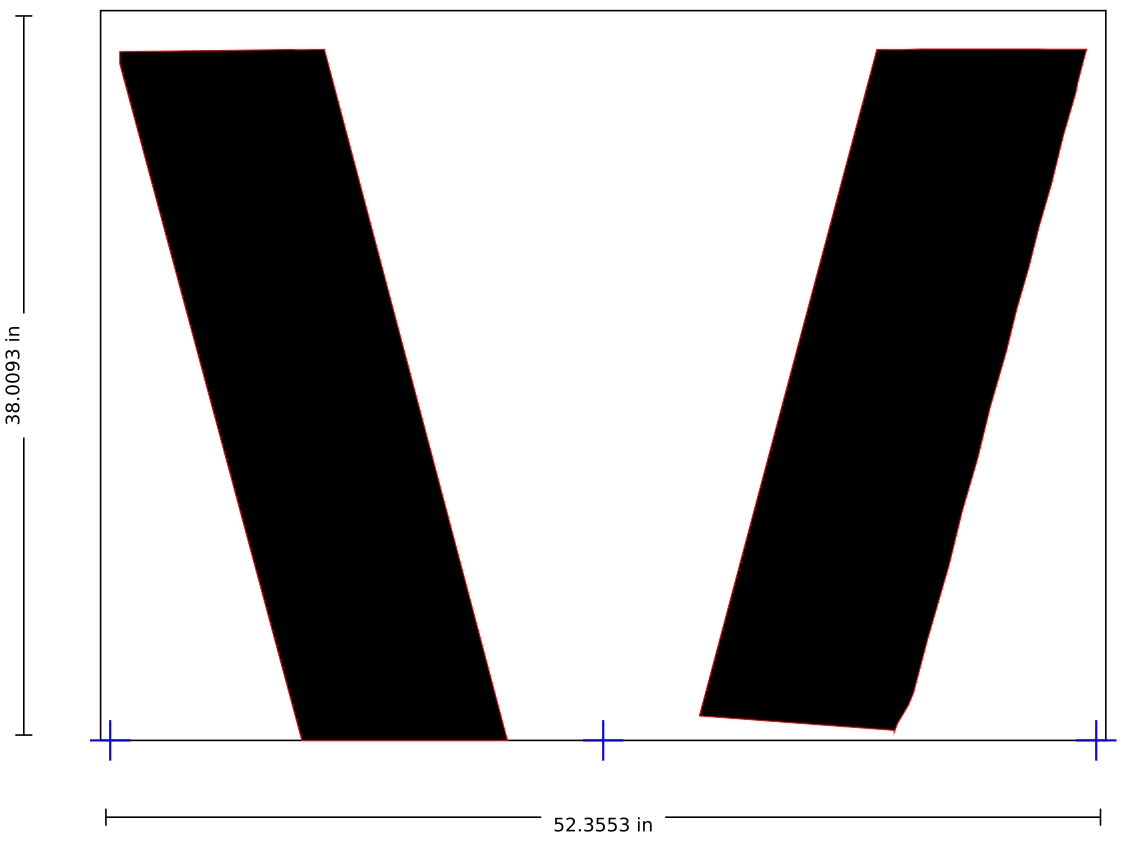

SSS-FAA-144-03-Z

144" FAA Airport "Z" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 41 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

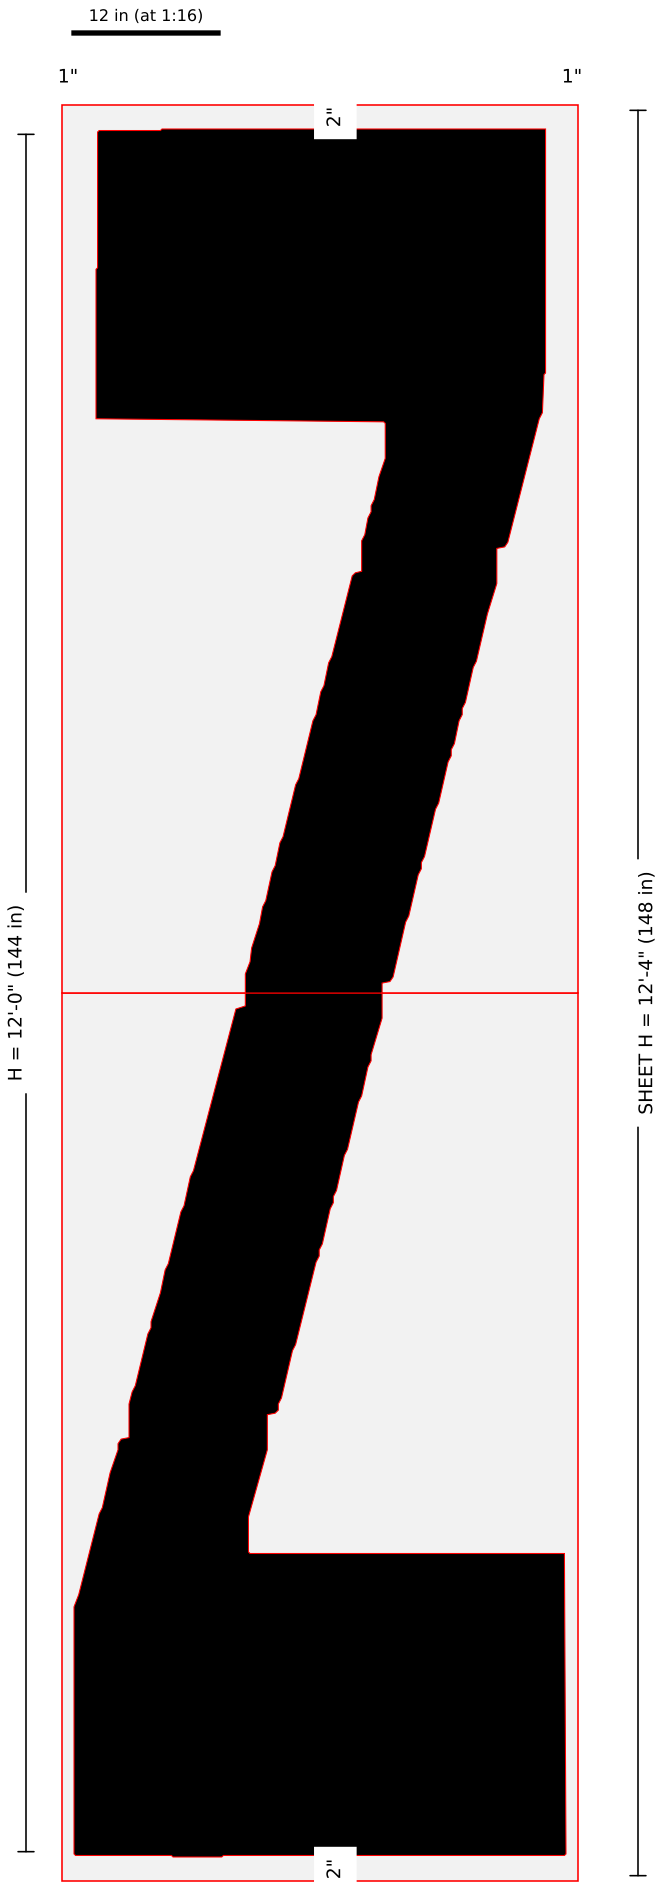

Pieces: 2 (1 x 2); blanks (in): 43 x 74, 43 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144Z-144in-FAA-Airport-Letter-Z-157x60-2.jpg: width = kit listing 41 (image-scale 39.78); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-Z · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

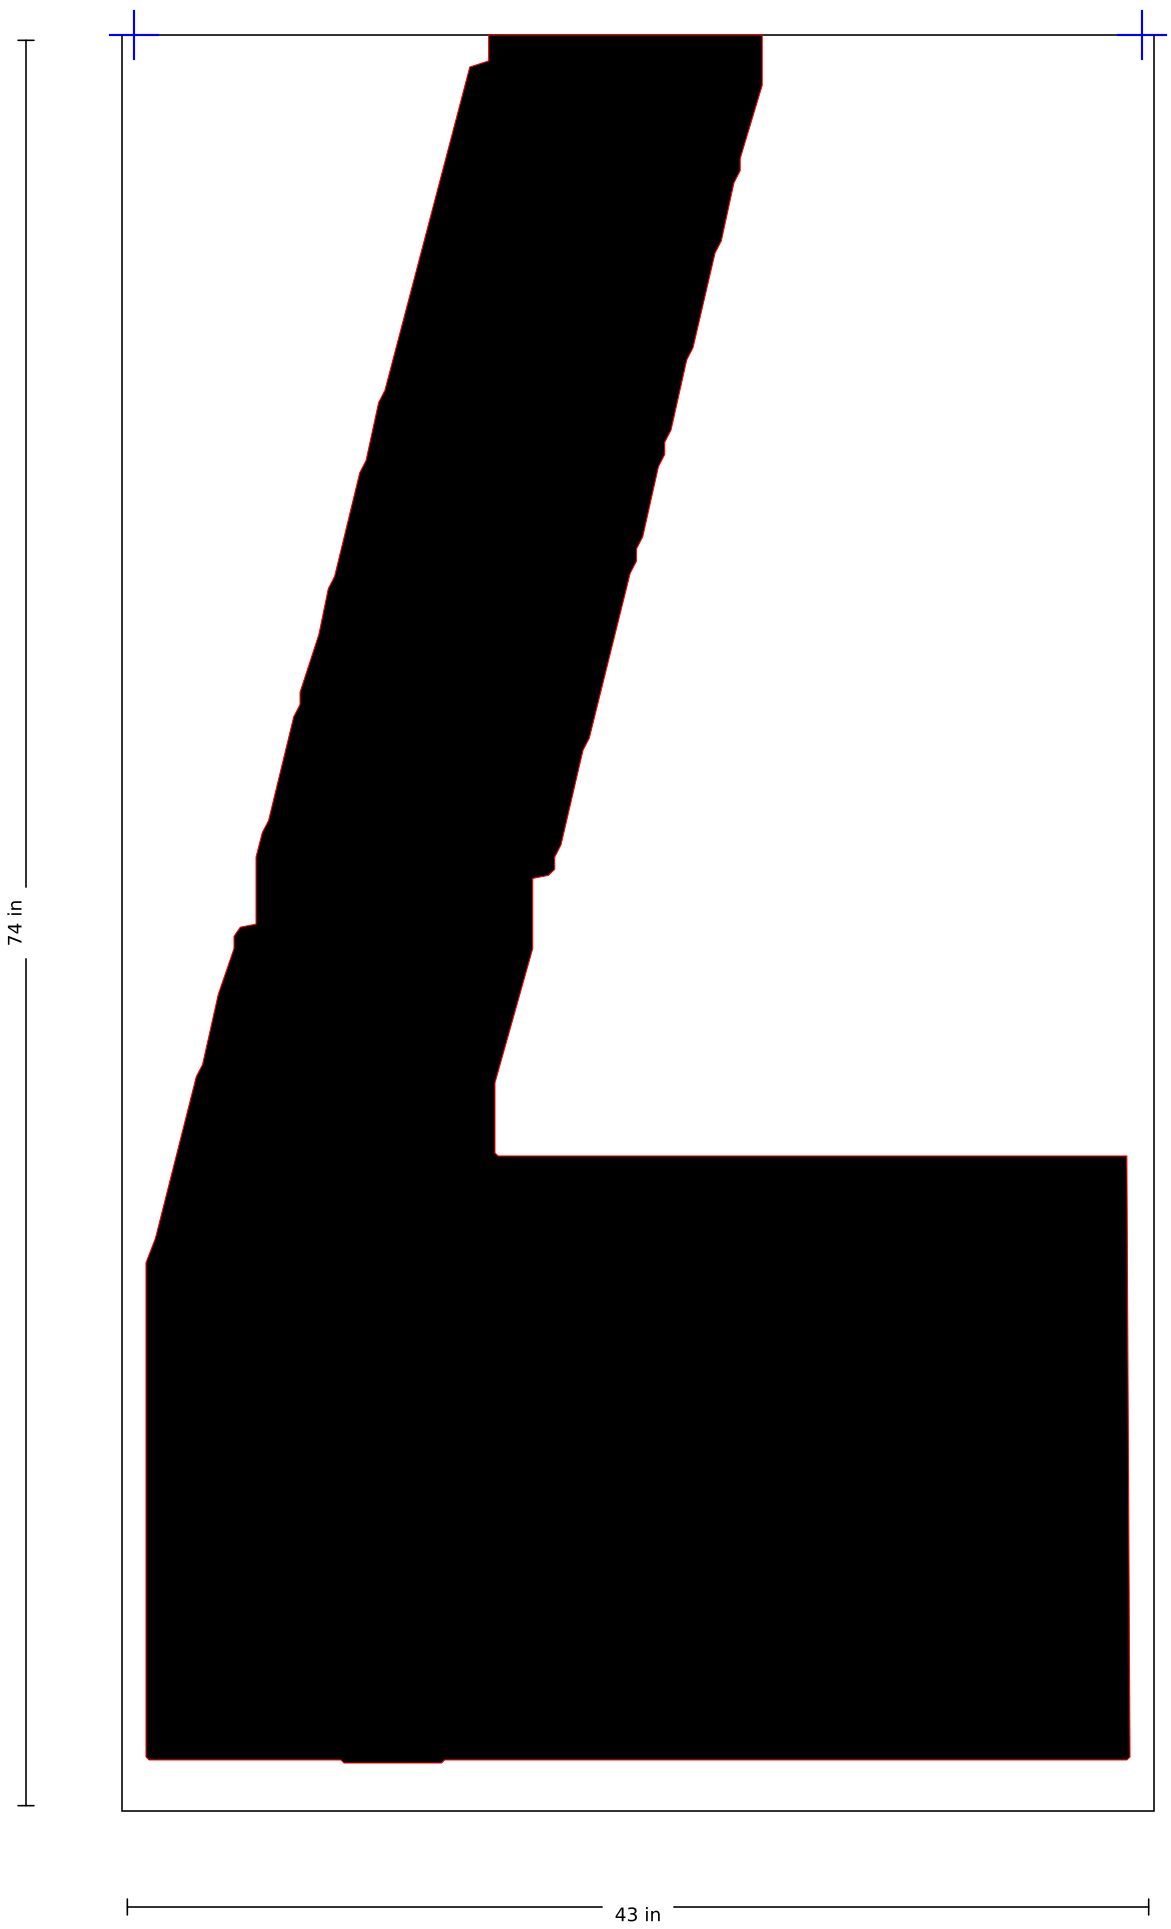

SSS-FAA-144-03-Z · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

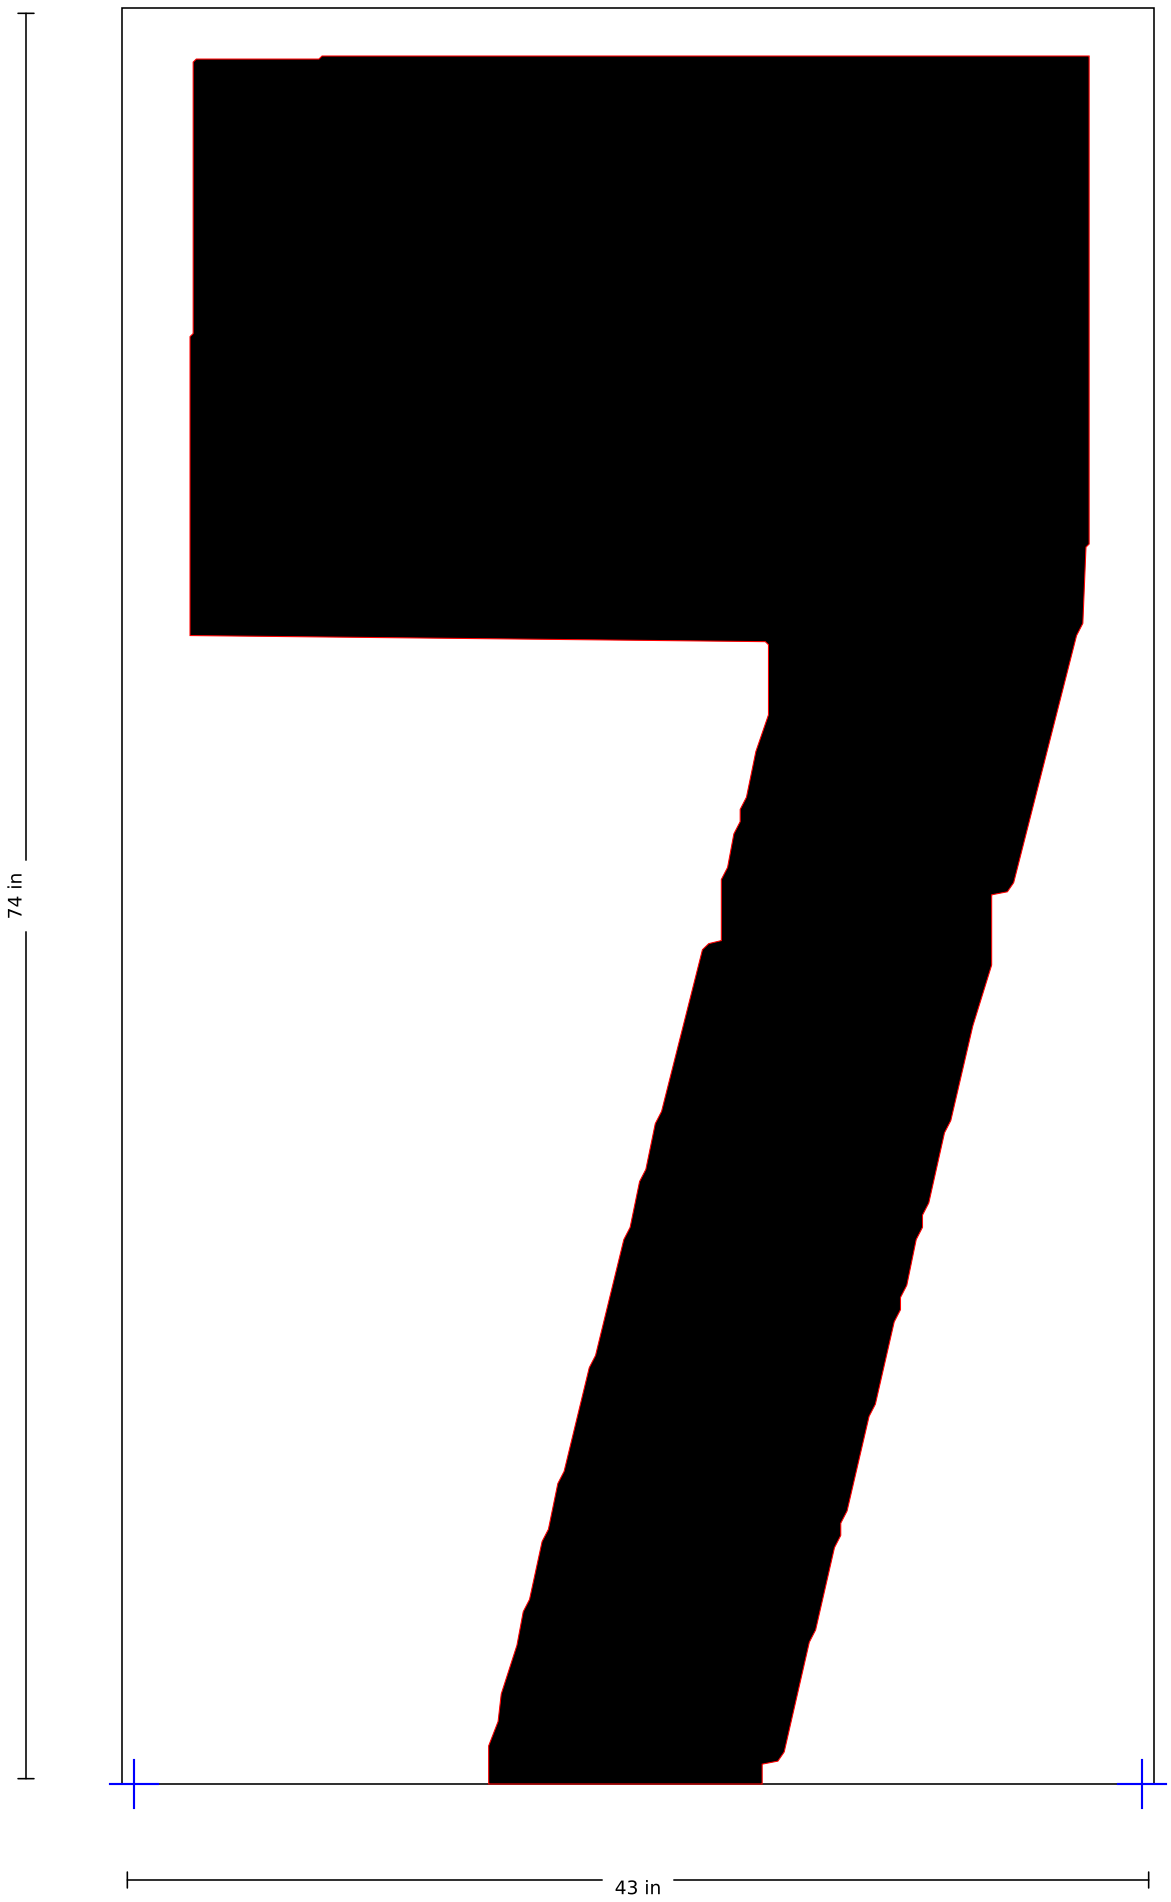

SSS-FAA-144-03-1

144" FAA Airport "1" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 15 W x 144 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

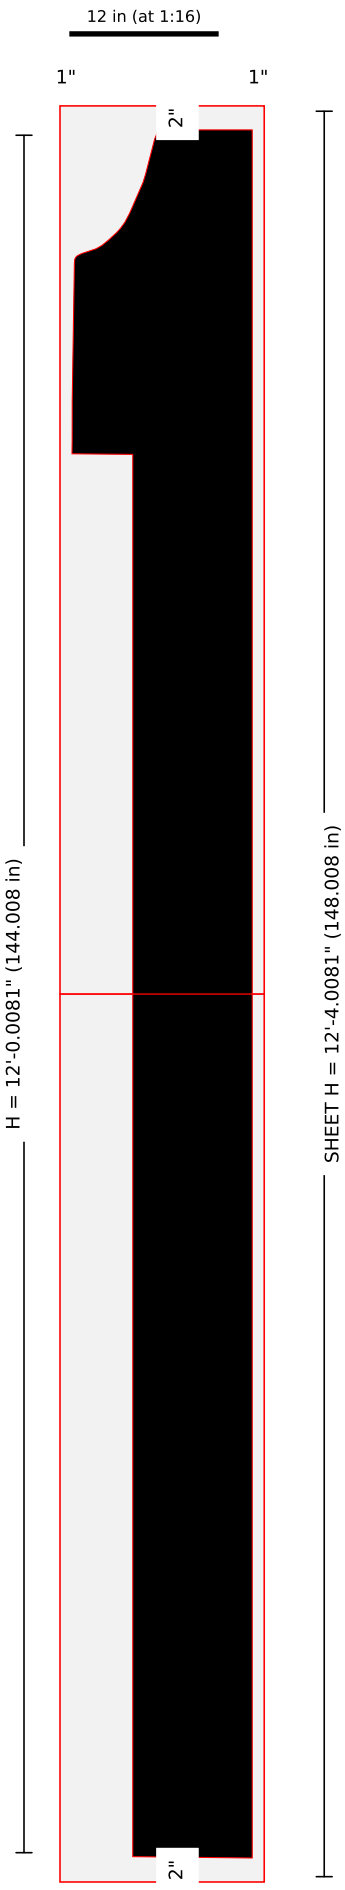


W = 1'-3.0192" (15.0192 in)

SHEET W = 1'-5.0192" (17.0192 in)

Pieces: 2 (1 x 2); blanks (in): 17.019 x 74.004, 17.019 x 74.004 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1441-144in-FAA-Airport-Number-1-157x60-2.jpg: width = 1-800 image width label 15 in (image-scale 14.36); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-1 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

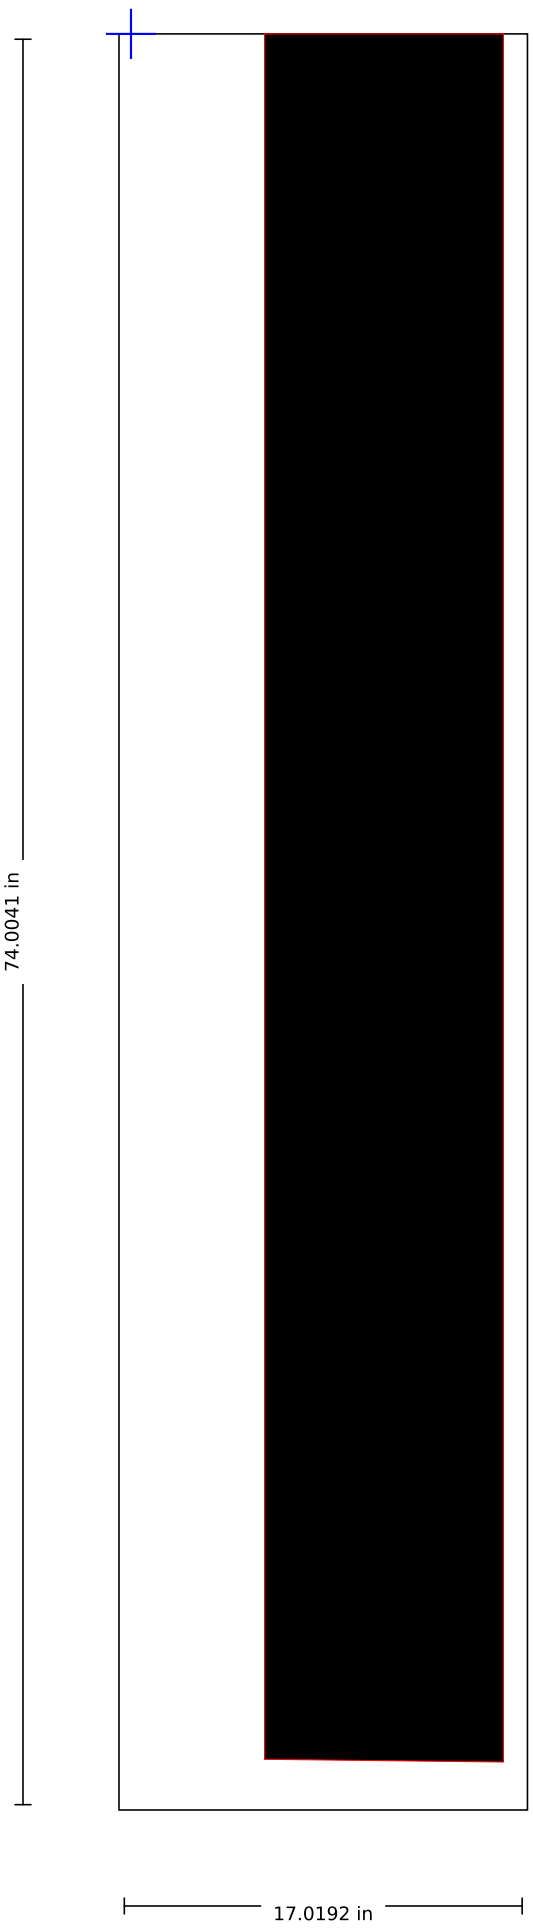

SSS-FAA-144-03-1 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

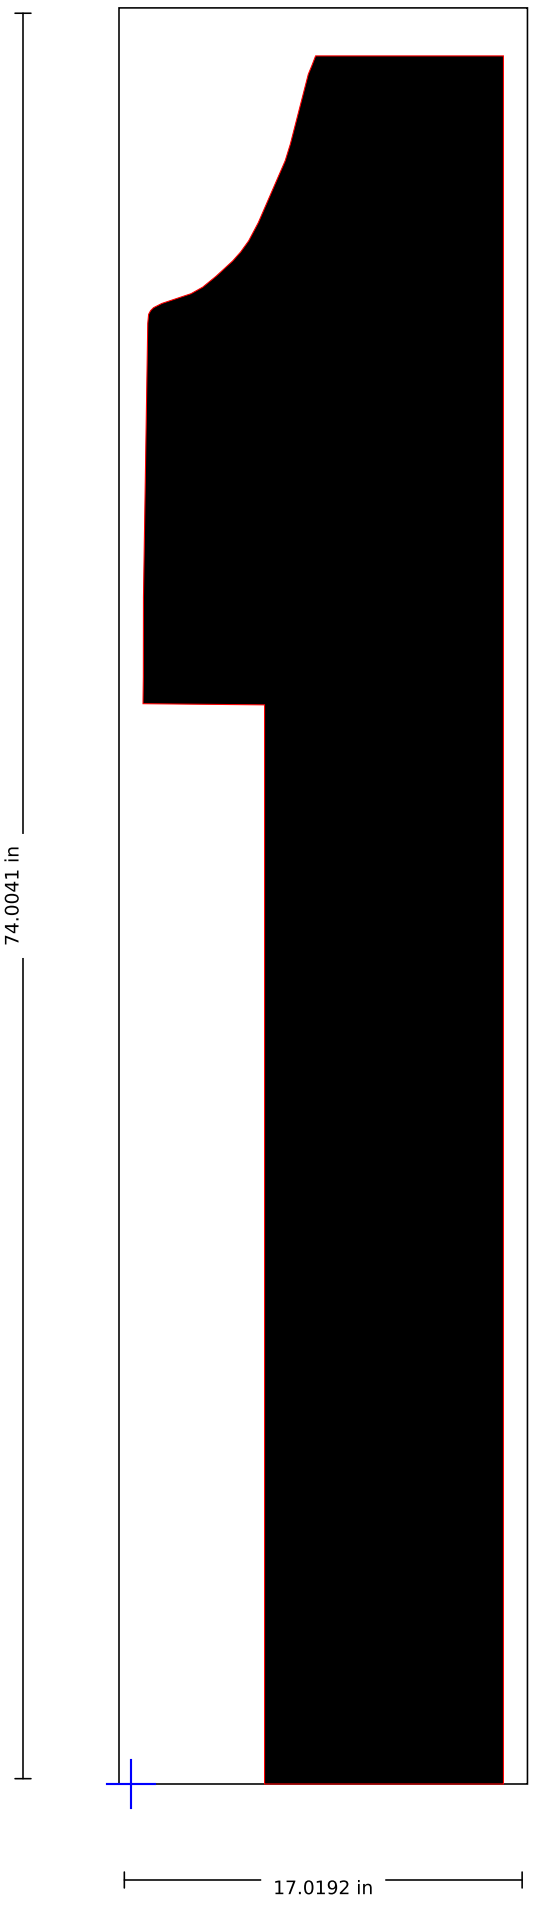

SSS-FAA-144-03-2

144" FAA Airport "2" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 40 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

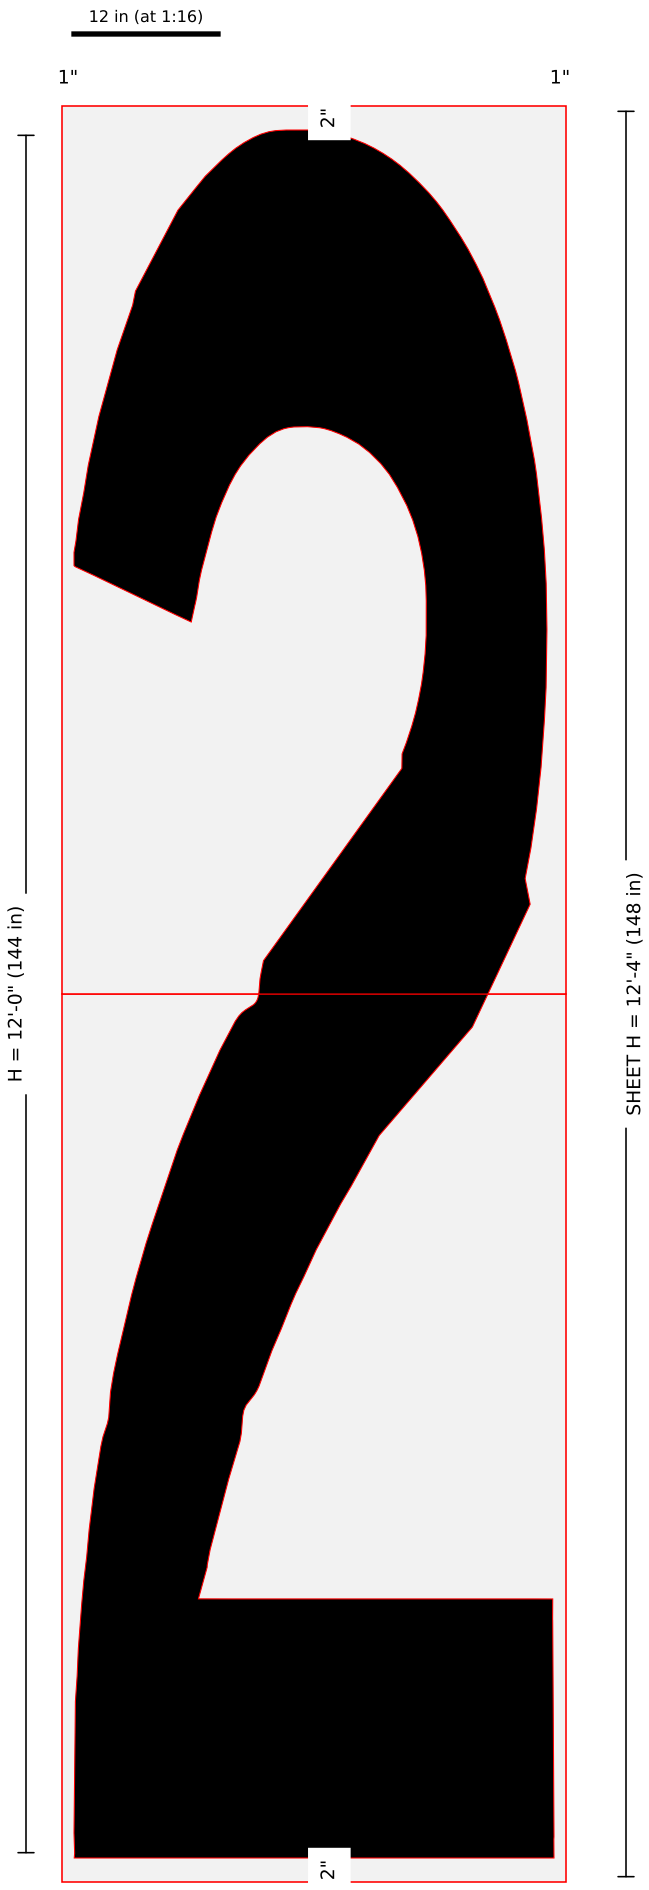

Pieces: 2 (1 x 2); blanks (in): 42 x 74, 42 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1442-144in-FAA-Airport-Number-2-157x60-2.jpg: width = 1-800 image width label 40 in (image-scale 39.21); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 4 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-2 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

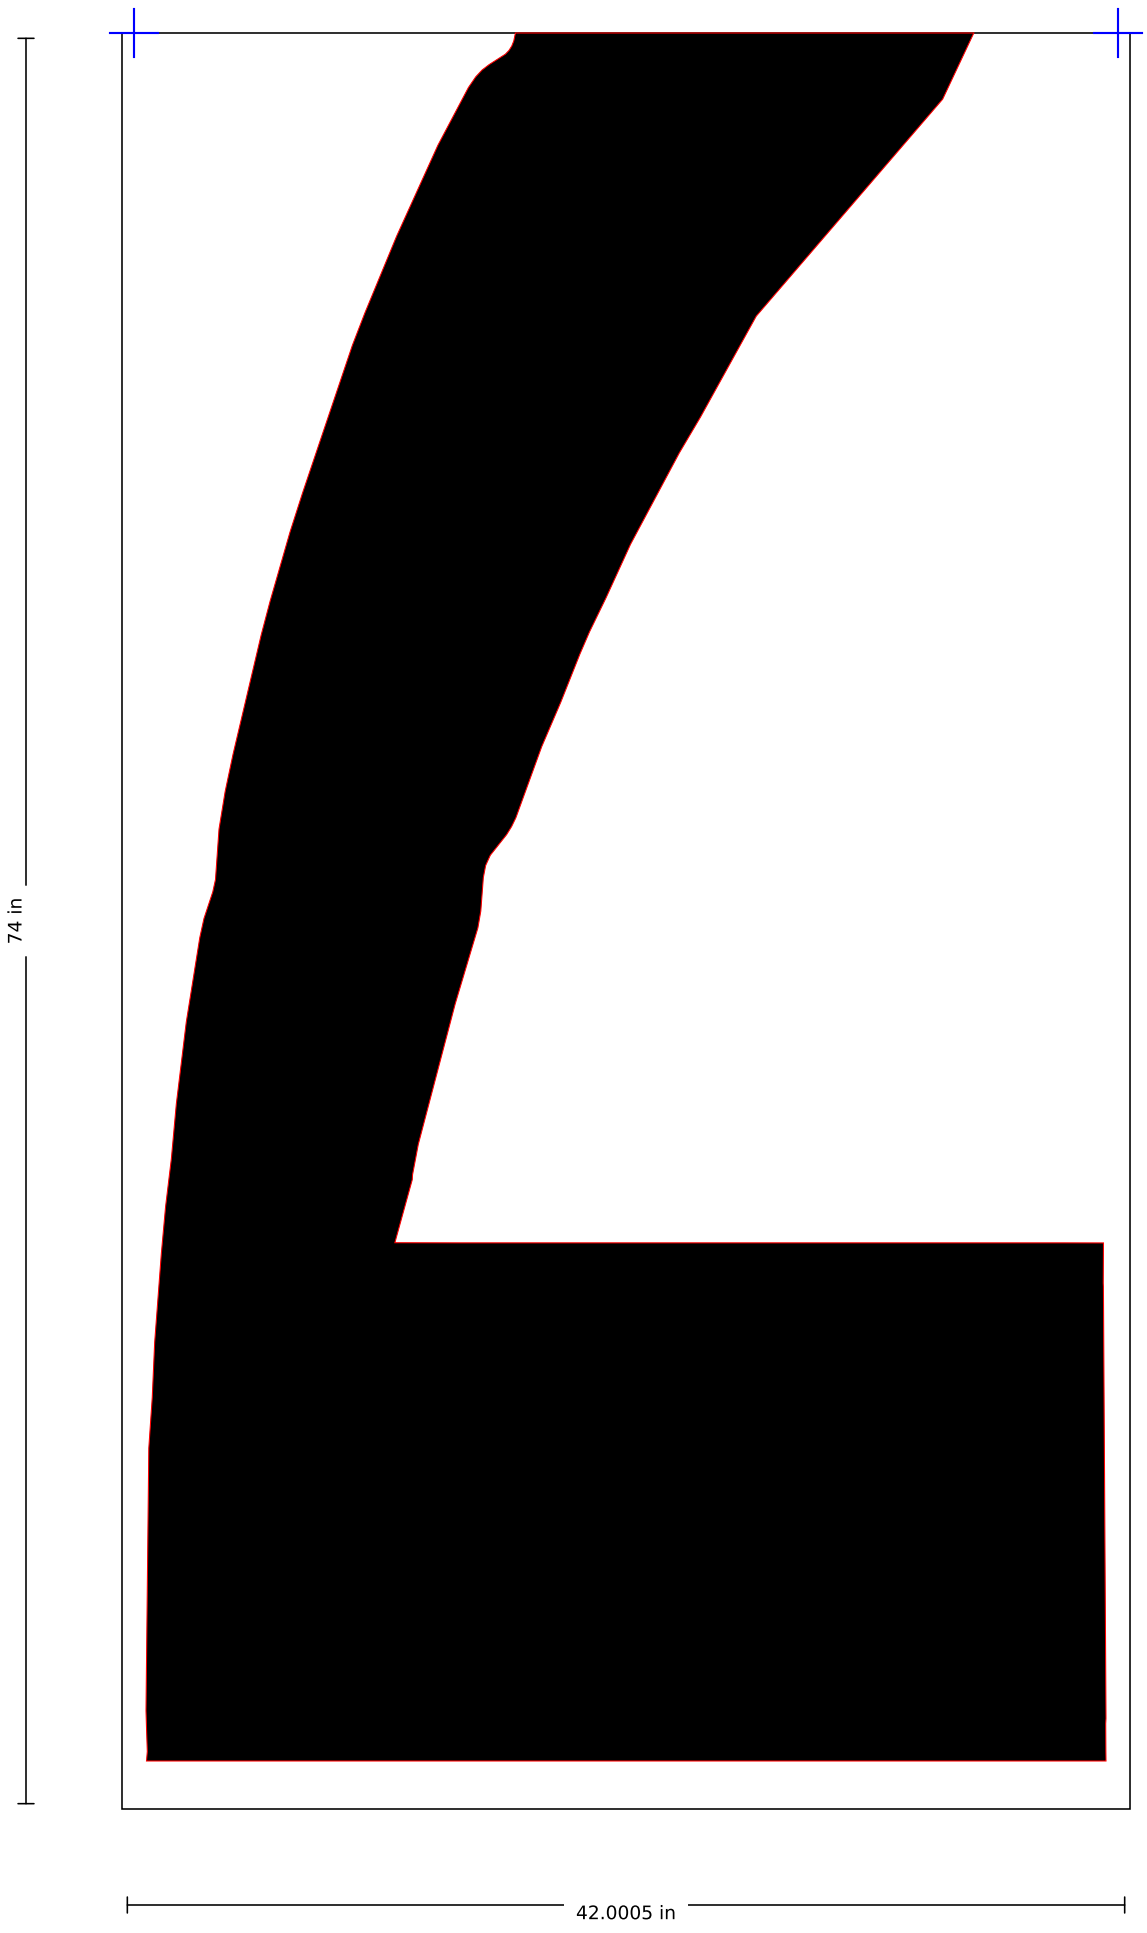

SSS-FAA-144-03-2 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

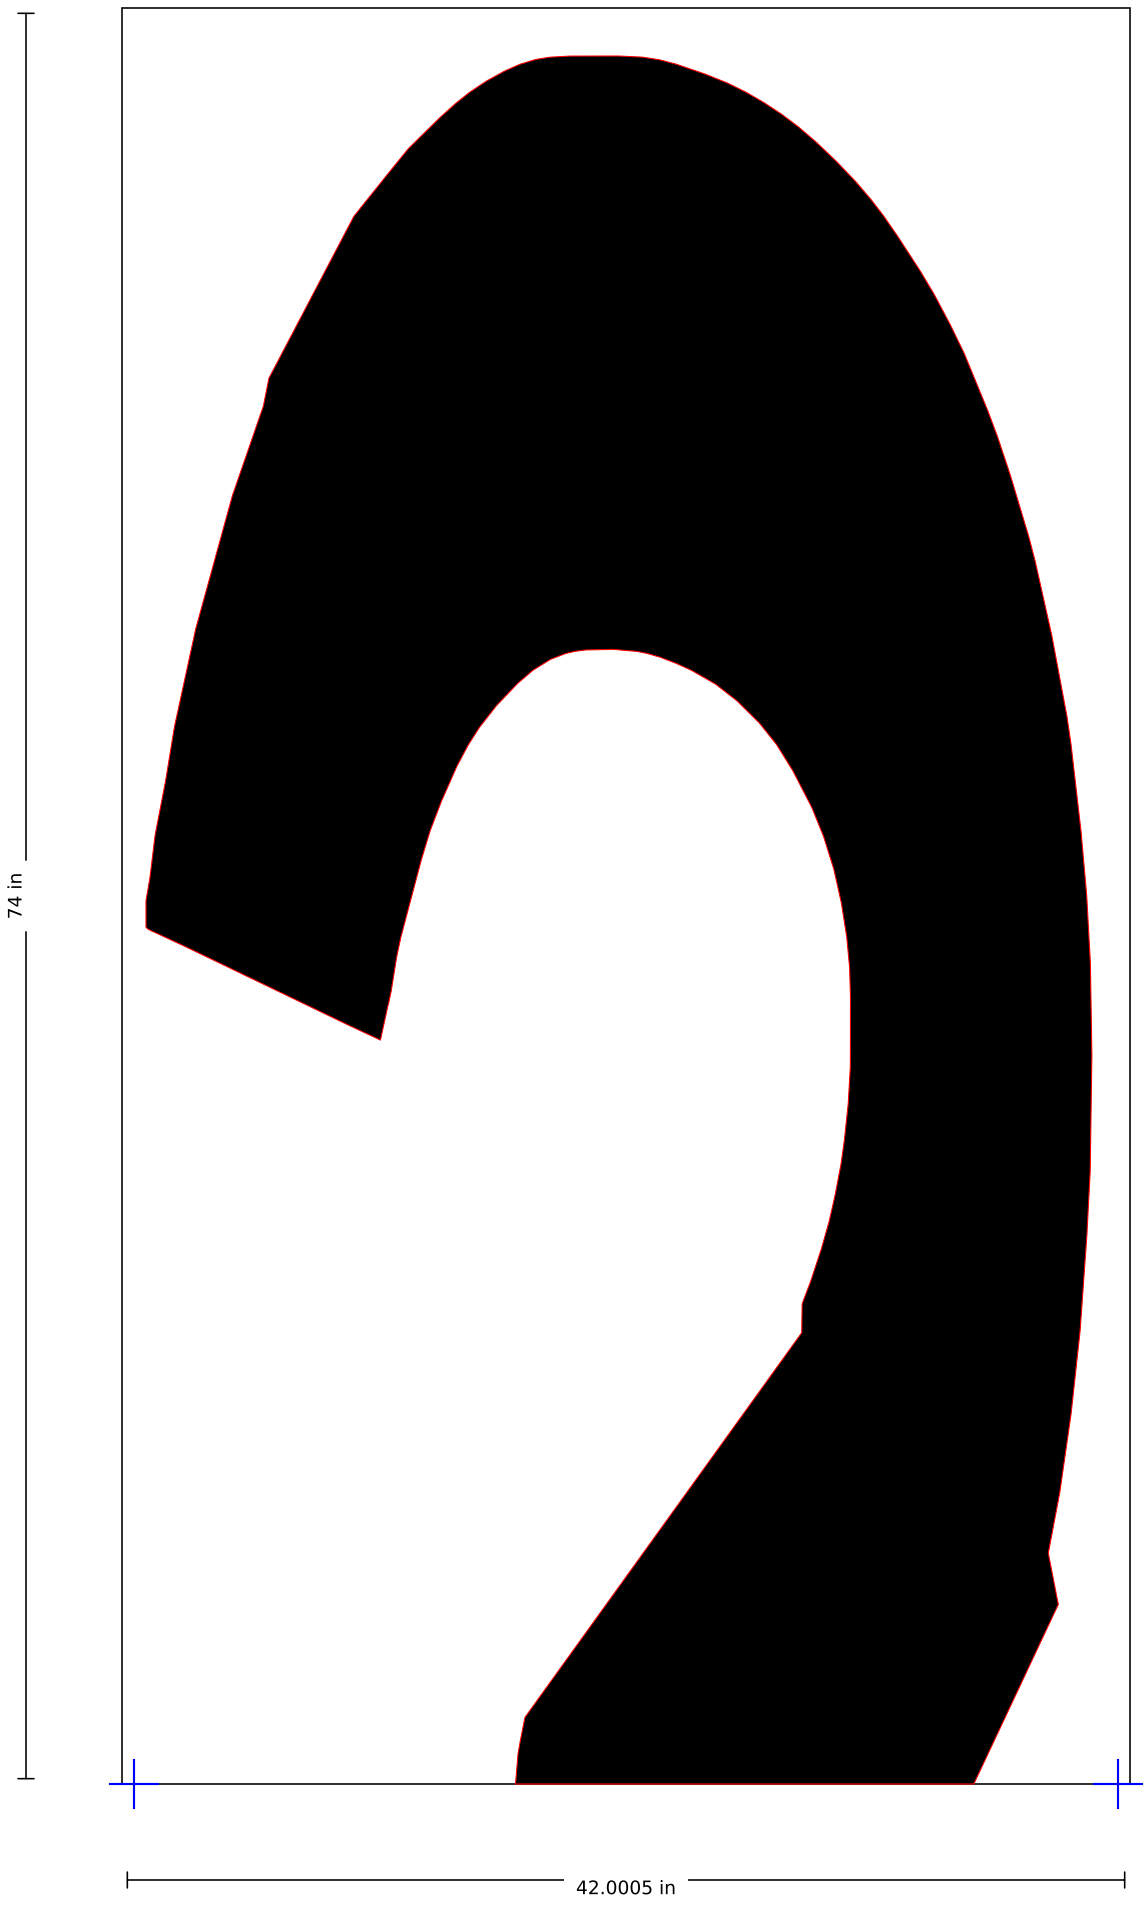

SSS-FAA-144-03-5

144" FAA Airport "5" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 40 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

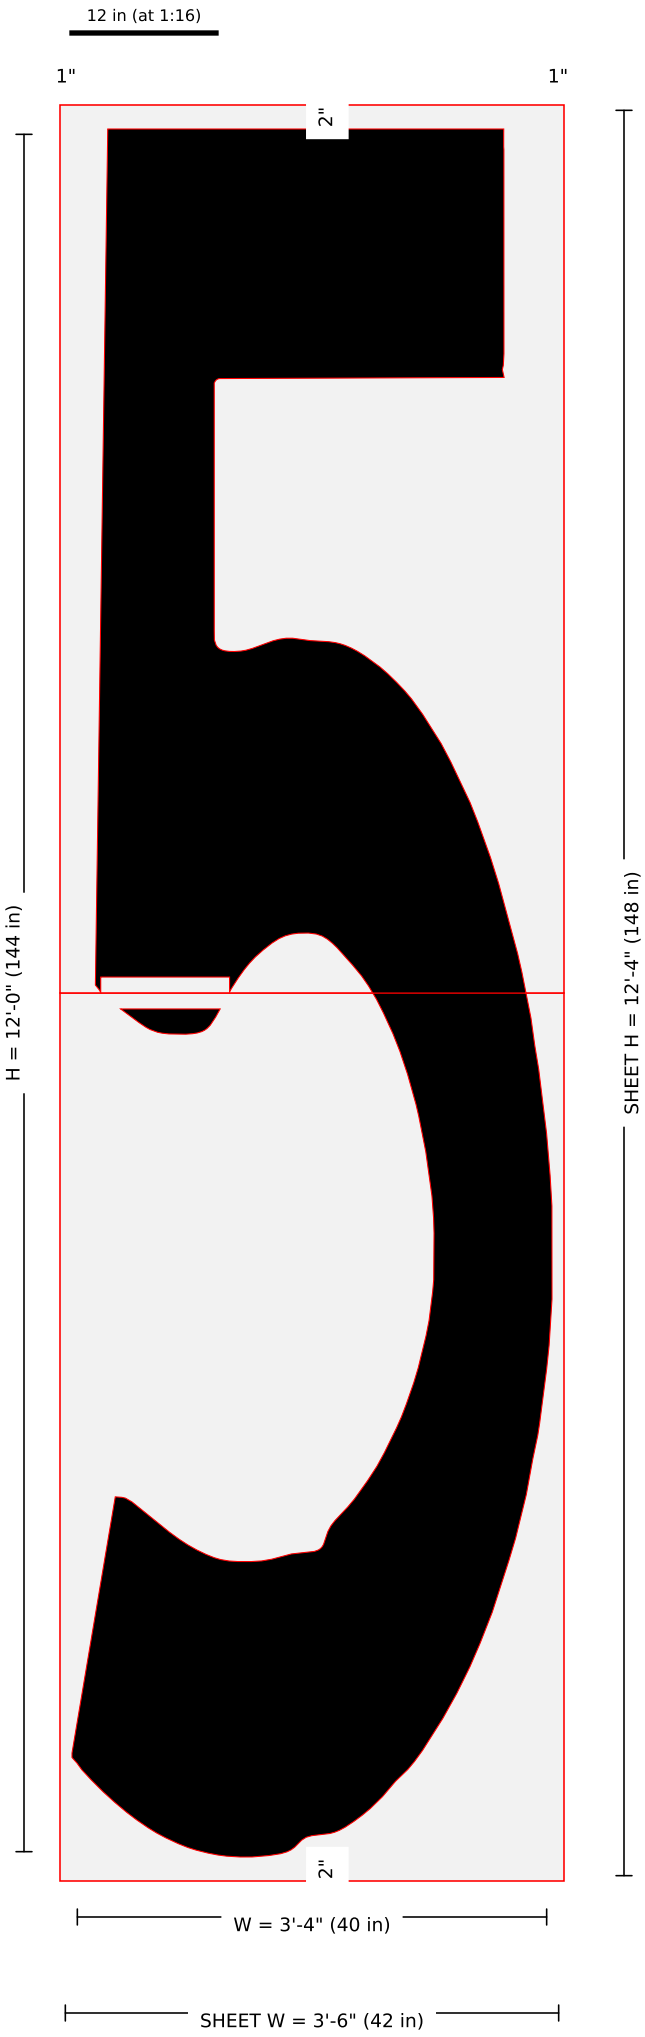

Pieces: 2 (1 x 2); blanks (in): 42 x 74, 42 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F1445-144in-FAA-Airport-Number-5-157x60-2.jpg: width = 1-800 image width label 40 in (image-scale 39.27); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-5 · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

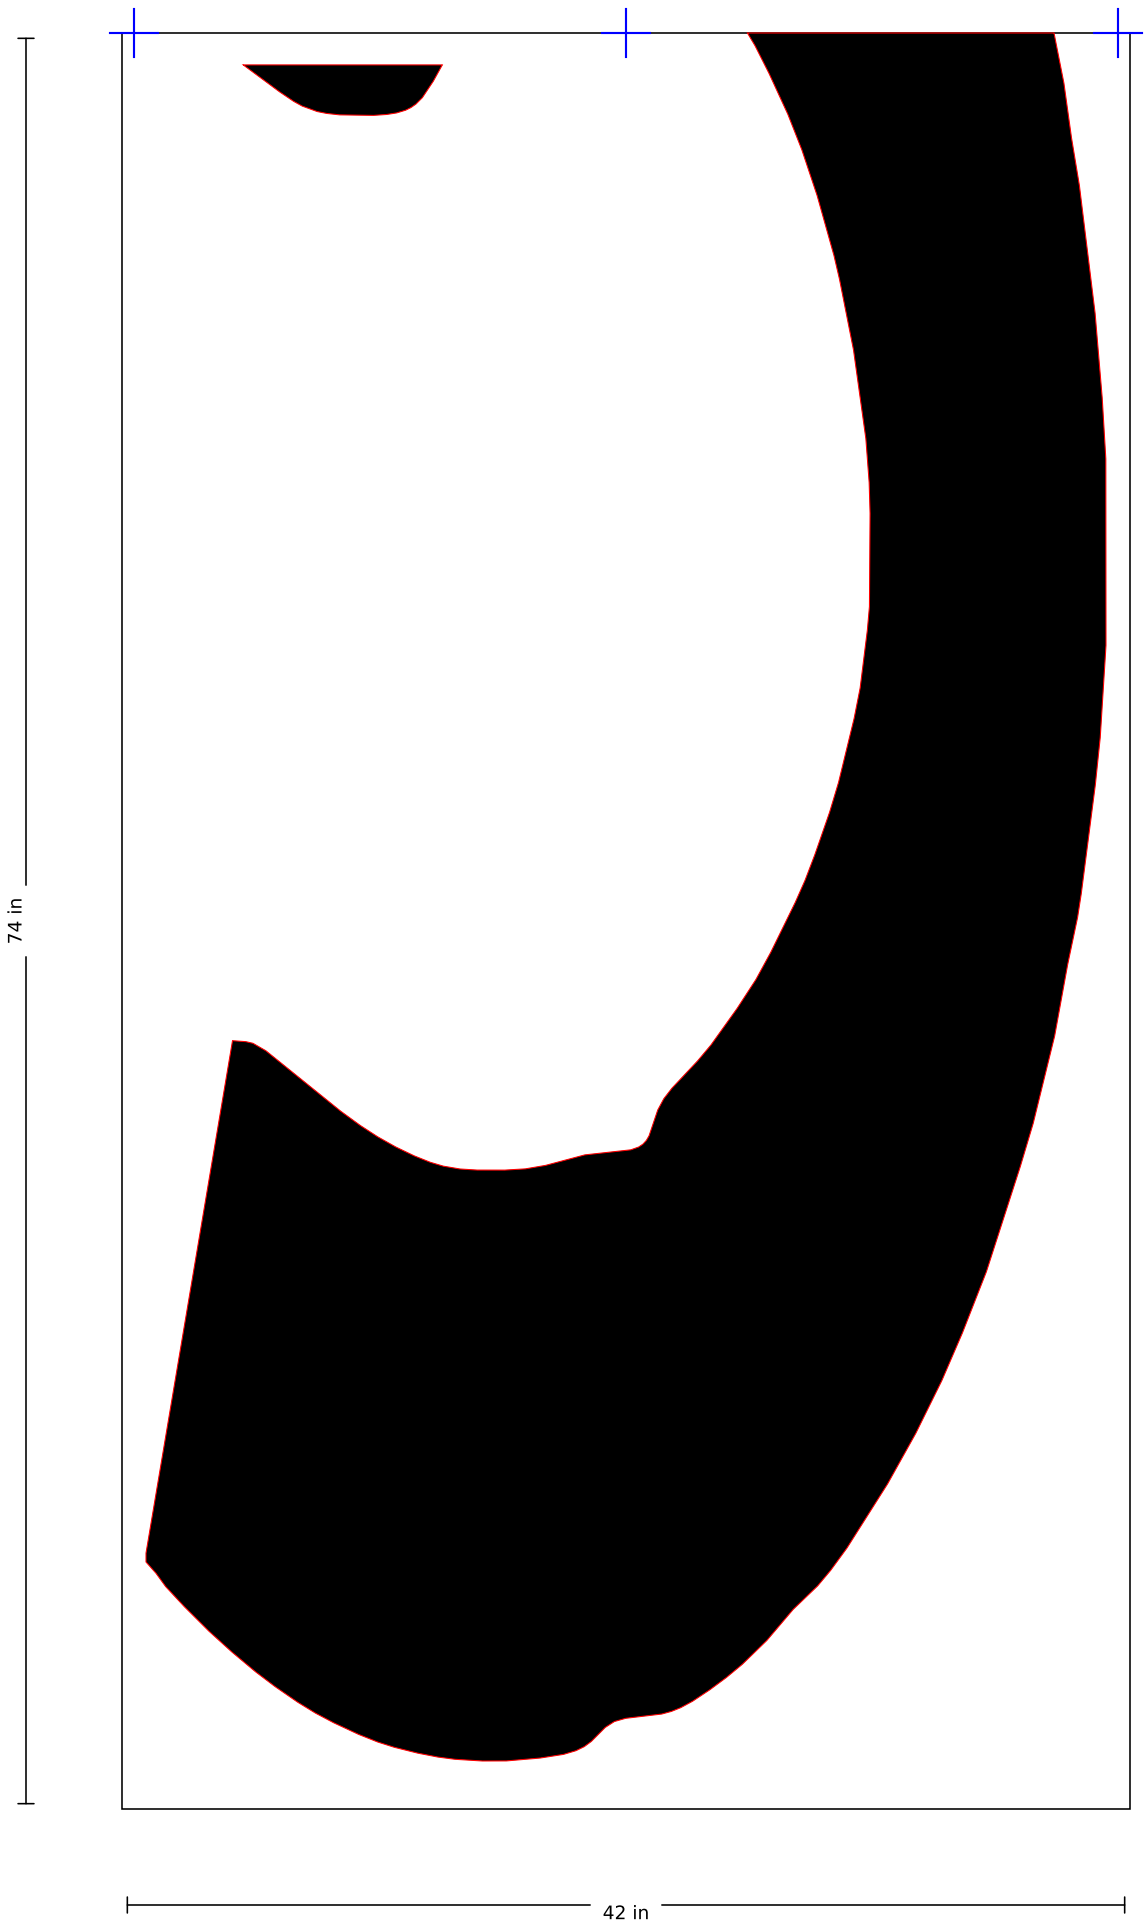

SSS-FAA-144-03-5 · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

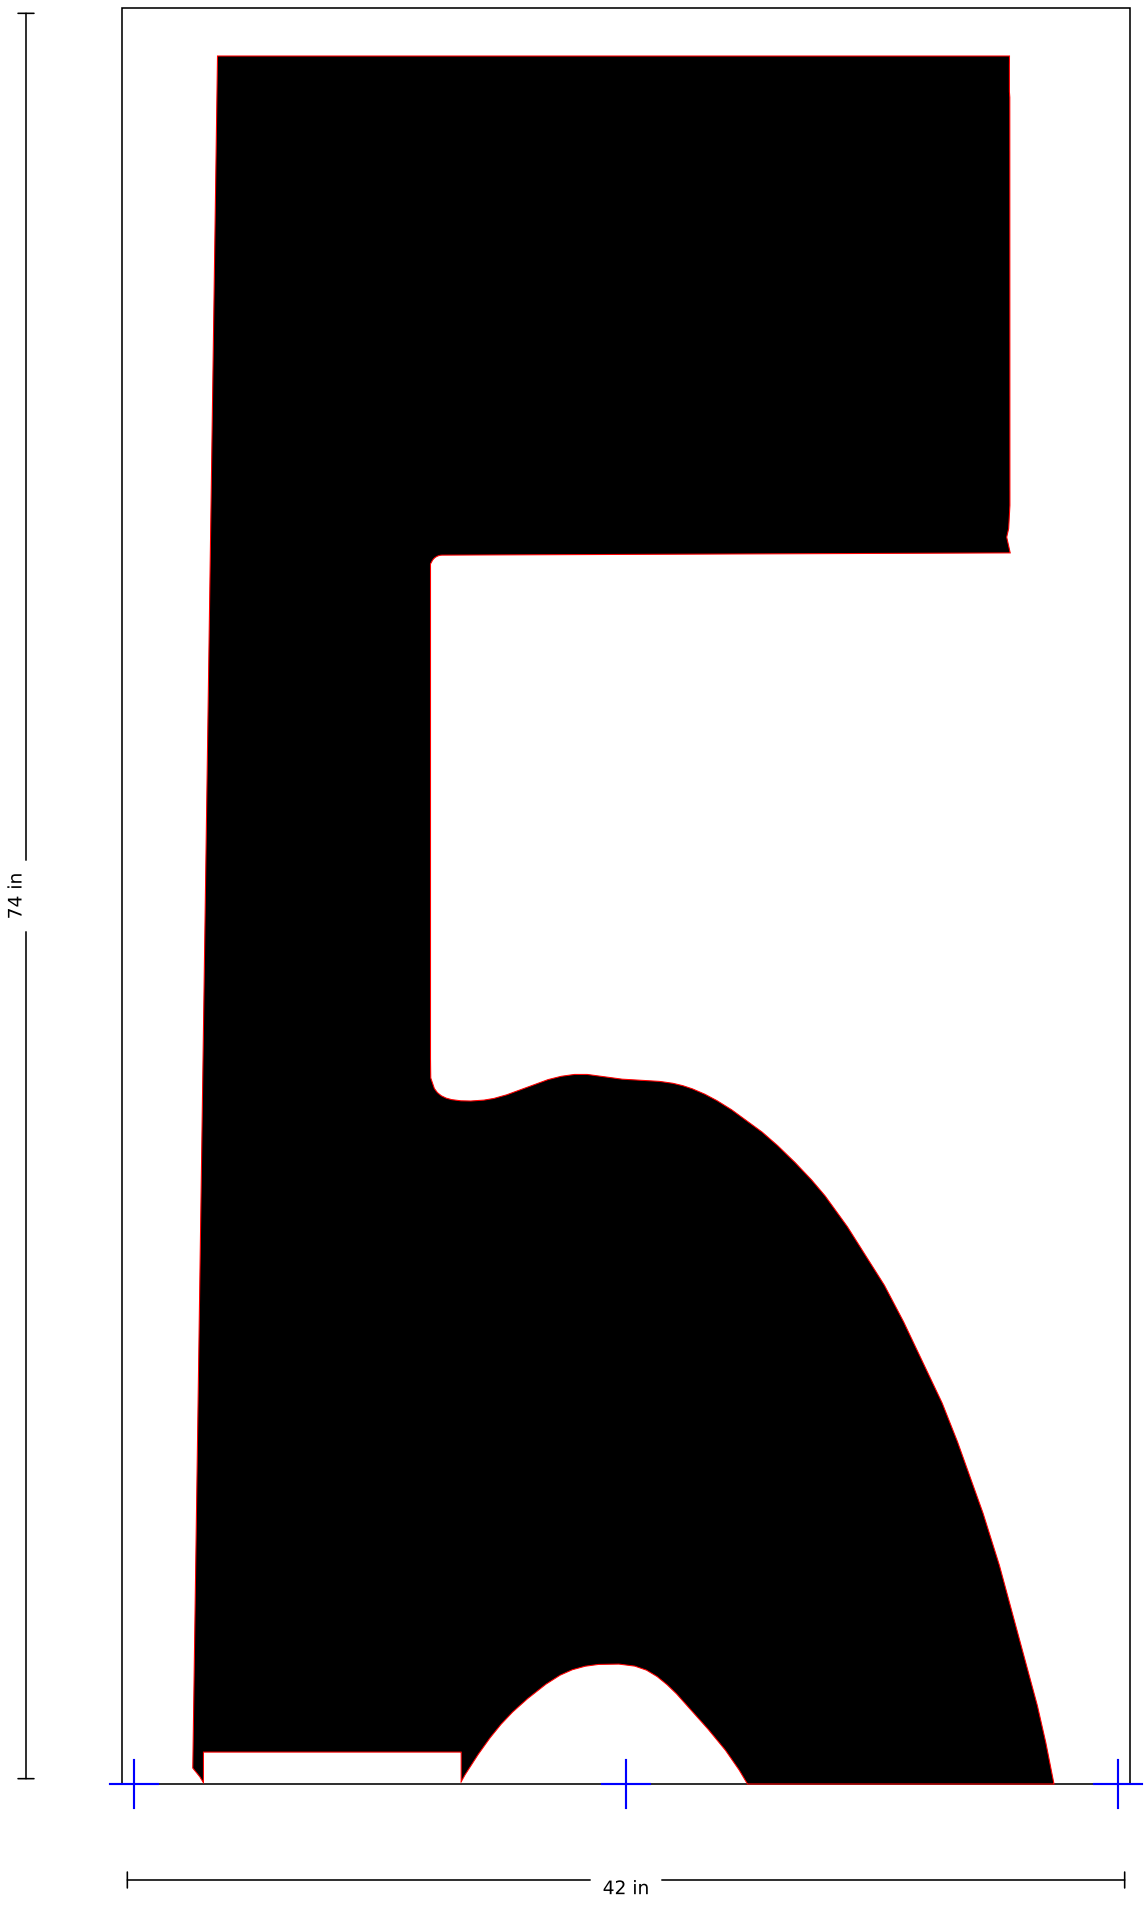

SSS-FAA-144-03-B

144" FAA Airport "B" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 38 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

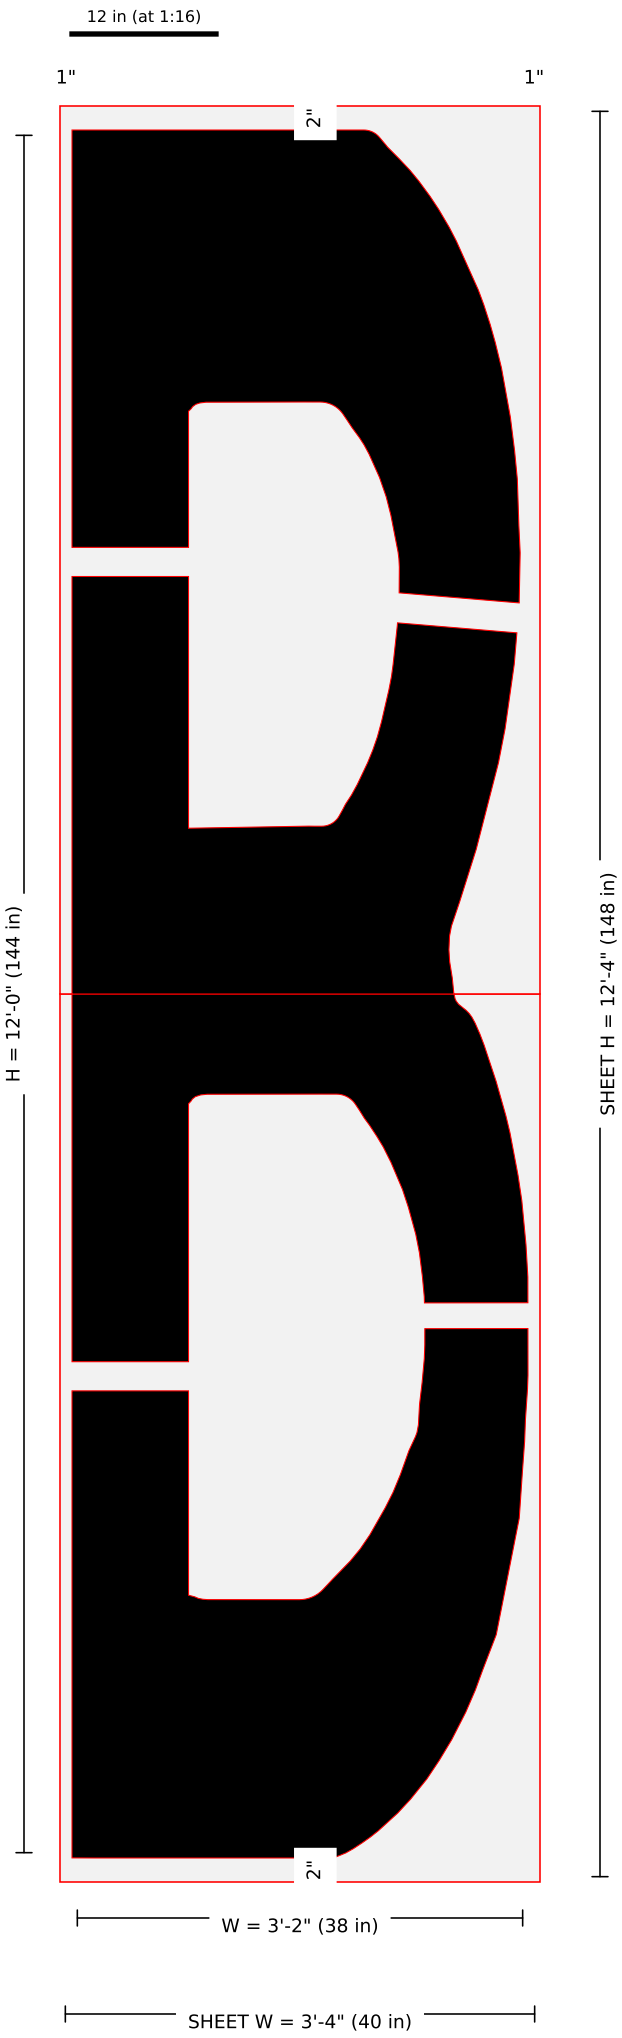

Pieces: 2 (1 x 2); blanks (in): 40 x 74, 40 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144B-144in-FAA-Airport-Letter-B-157x60-2.jpg: width = 1-800 image width label 38 in (image-scale 38.96); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
CORNERS REBUILT (corner triage r5, 2026-11-04): 16 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
ISLAND BRIDGES (2026-11-04): (33.7,45.19) stroke 8.59" w=2.147"; (4.86,40.14) stroke 9.712" w=2.428"; (4.86,108.01) stroke 9.712" w=2.428"; (32.19,103.76) stroke 10.006" w=2.502" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-B · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

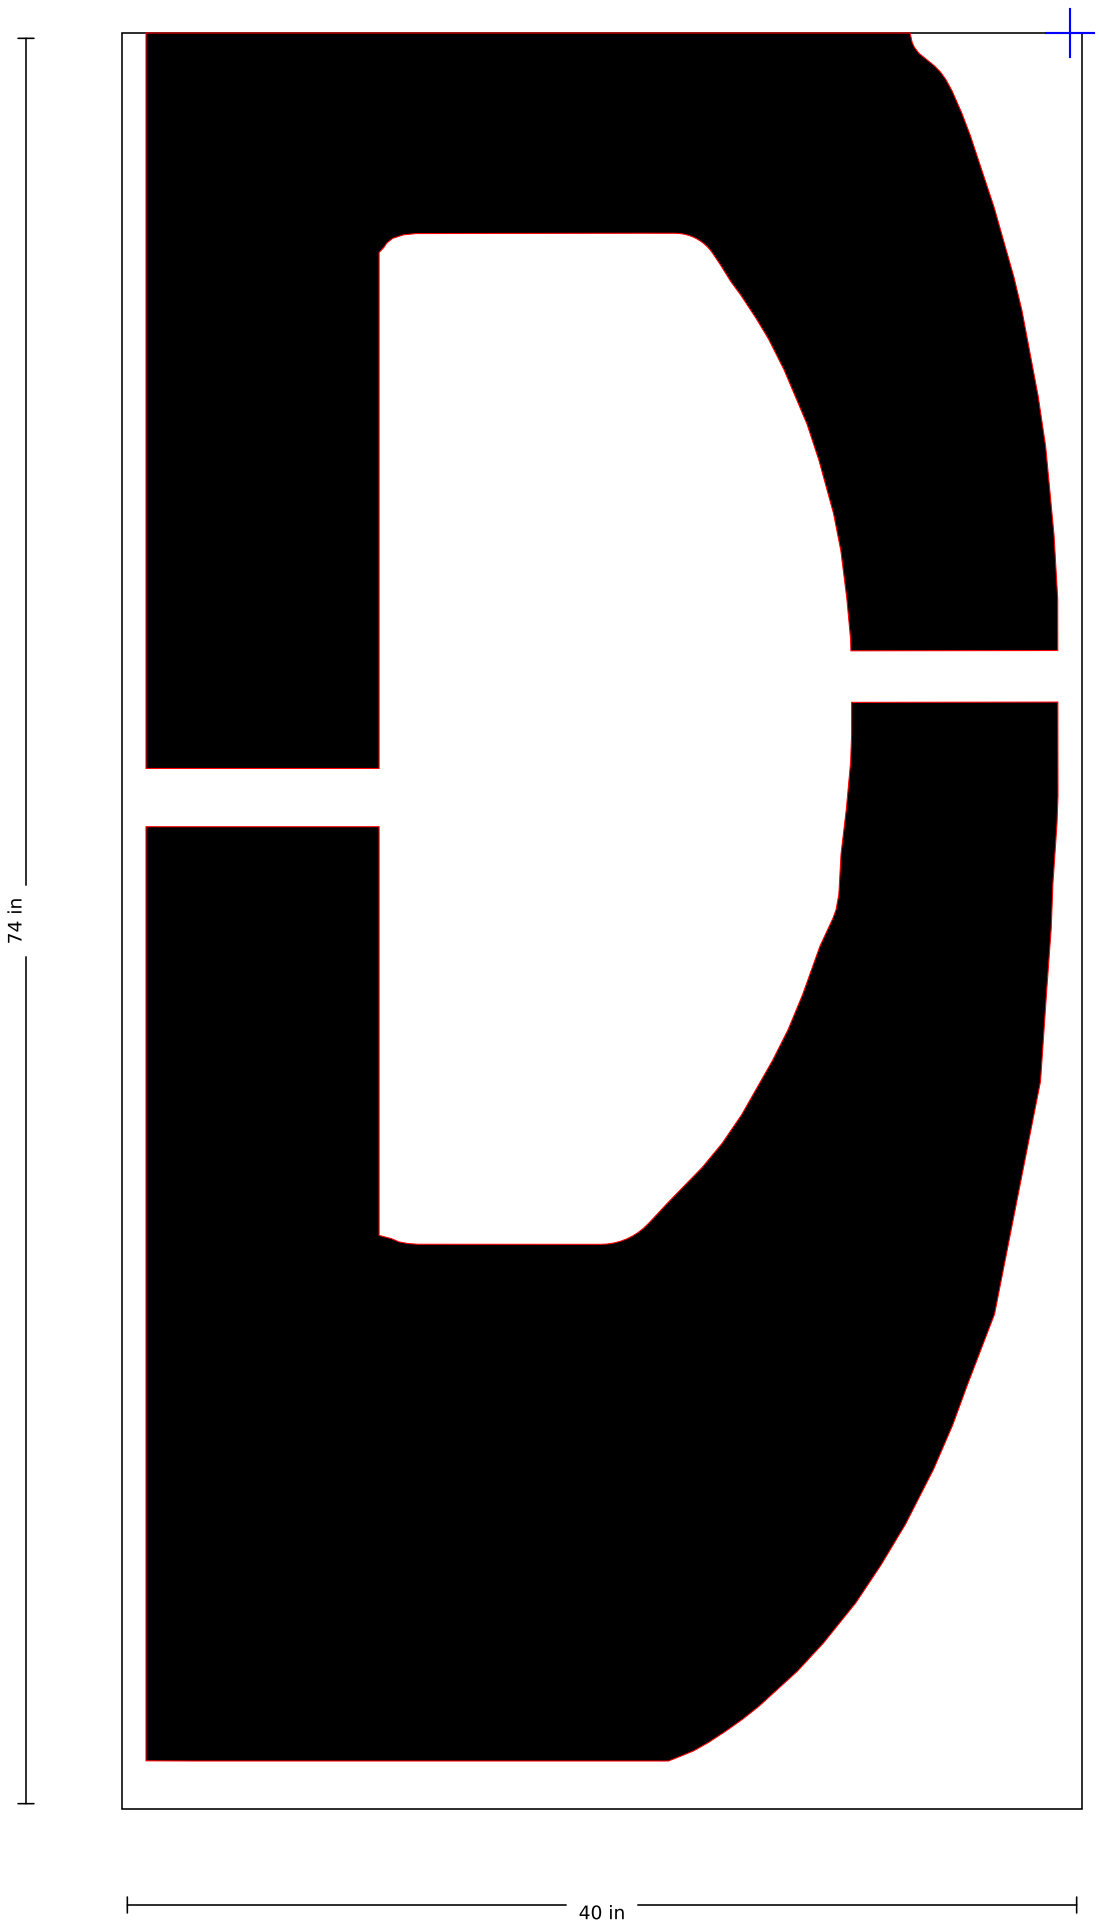

SSS-FAA-144-03-B · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

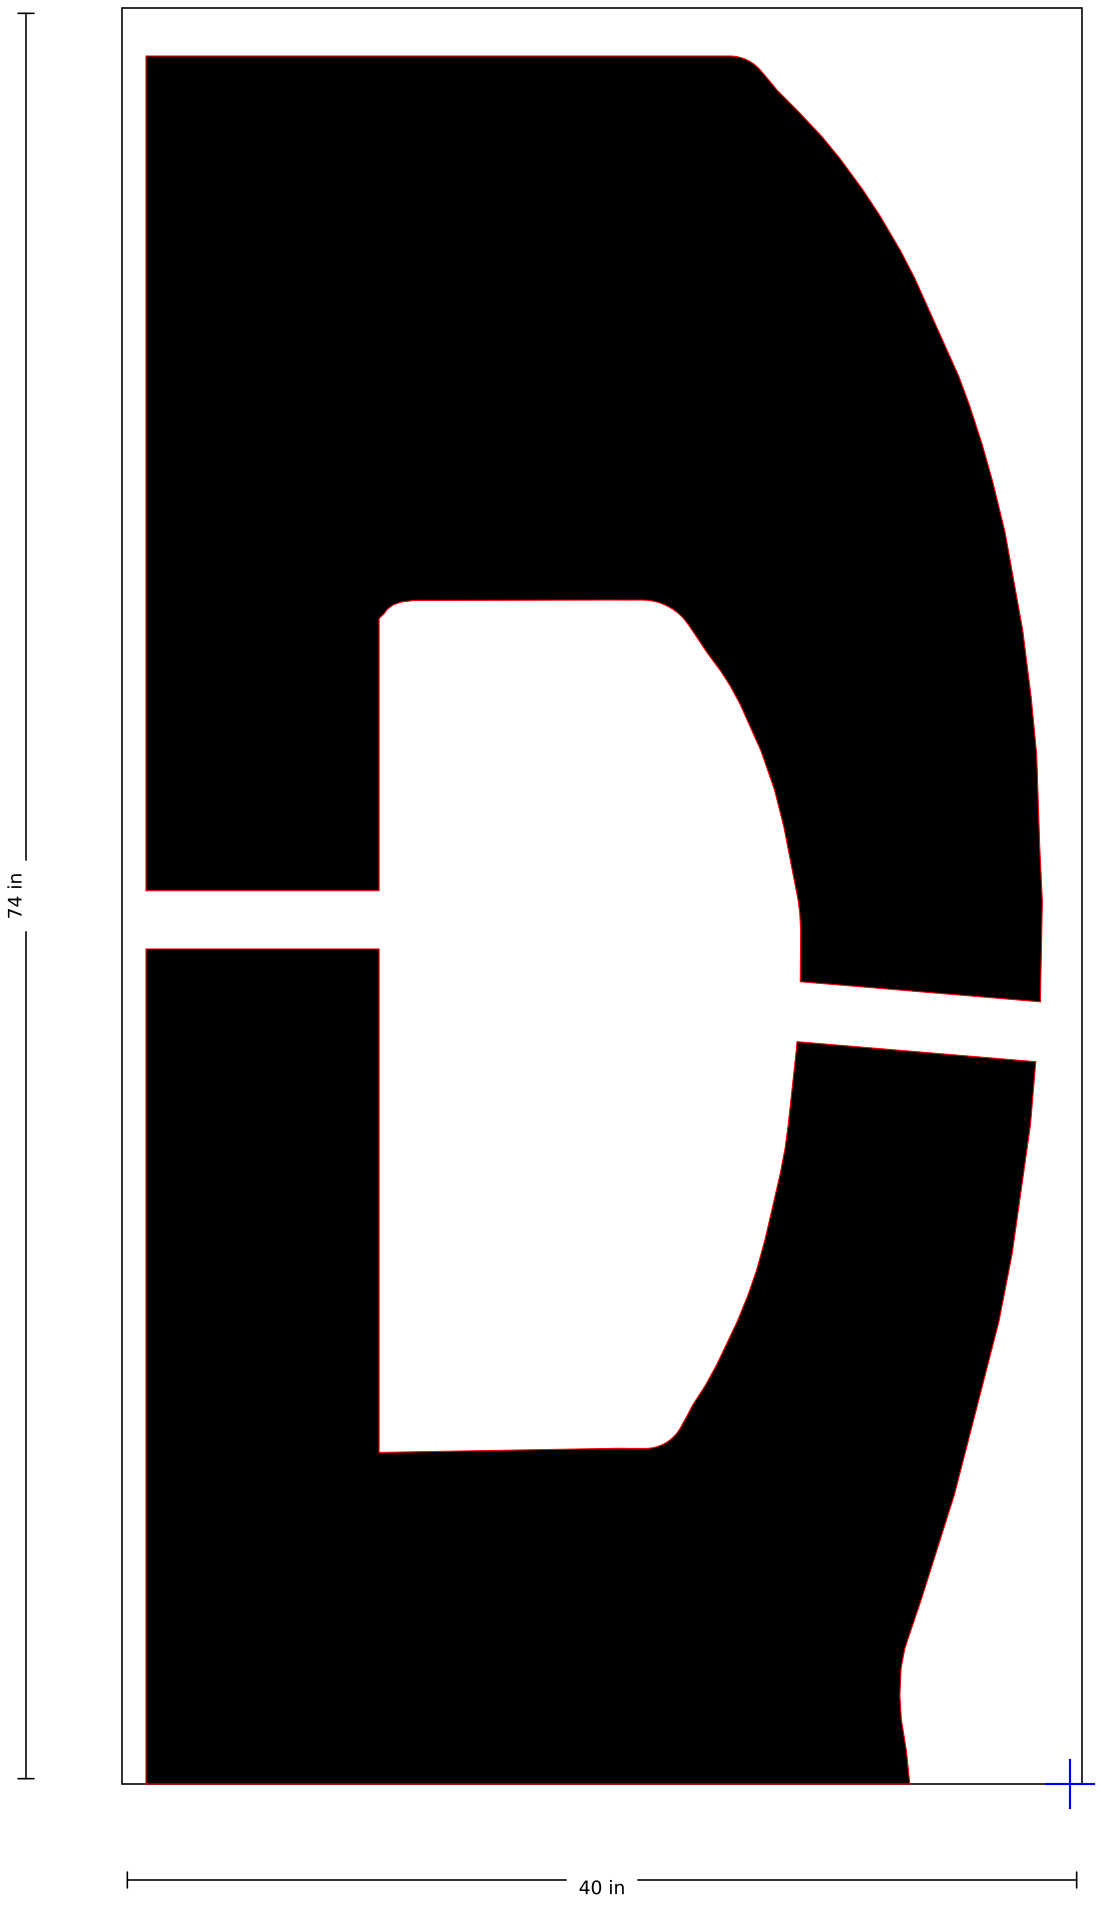

SSS-FAA-144-03-C

144" FAA Airport "C" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 40 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

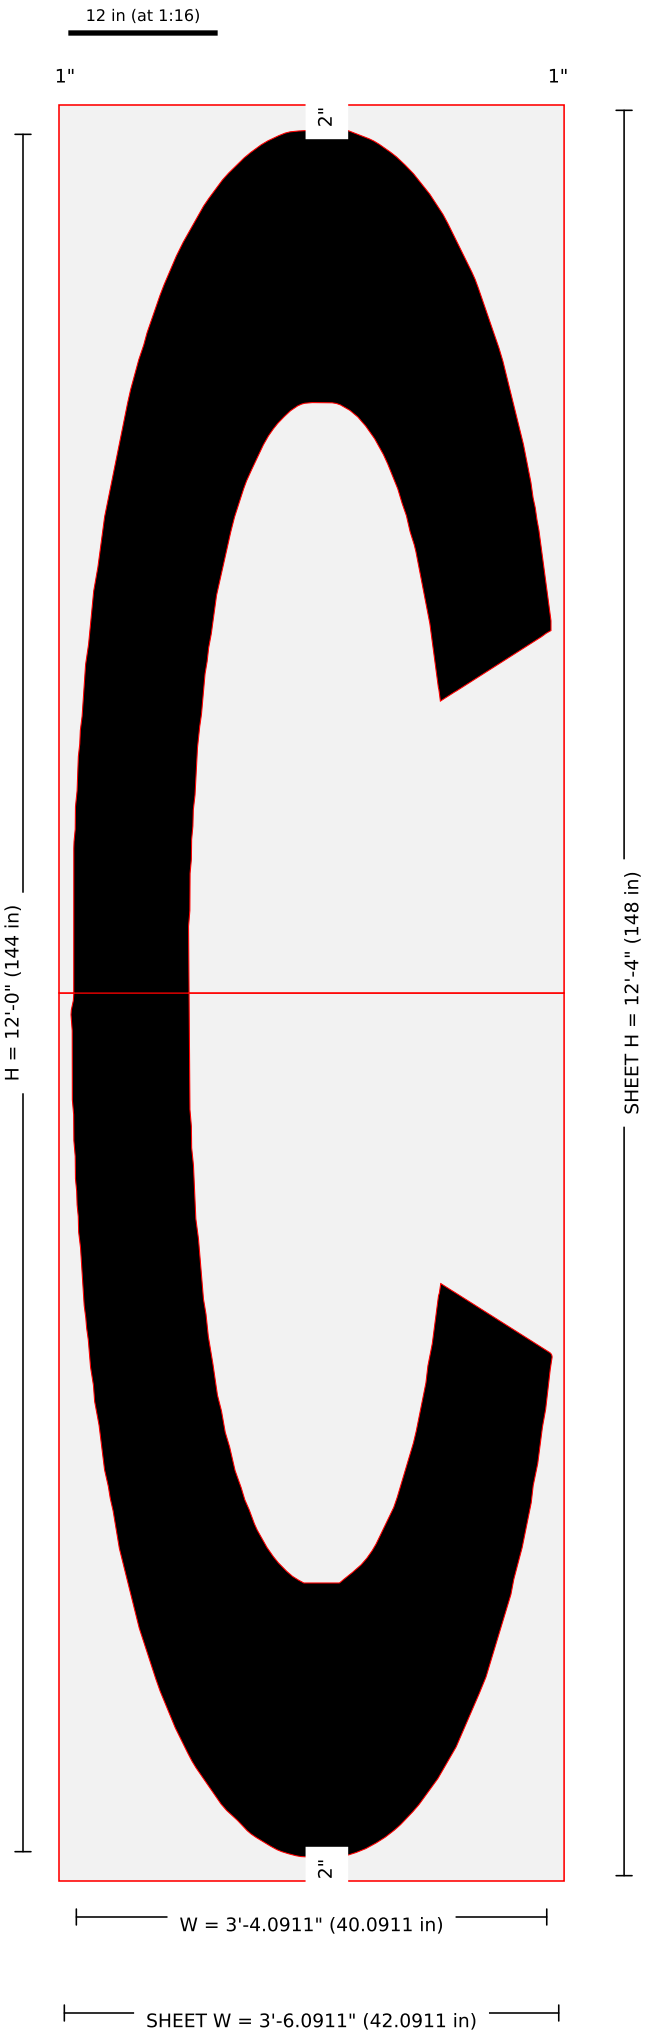

Pieces: 2 (1 x 2); blanks (in): 42.091 x 74, 42.091 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144C-144in-FAA-Airport-Letter-C-157x60-2.jpg: width = 1-800 image width label 40 in (image-scale 39.54); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-C · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

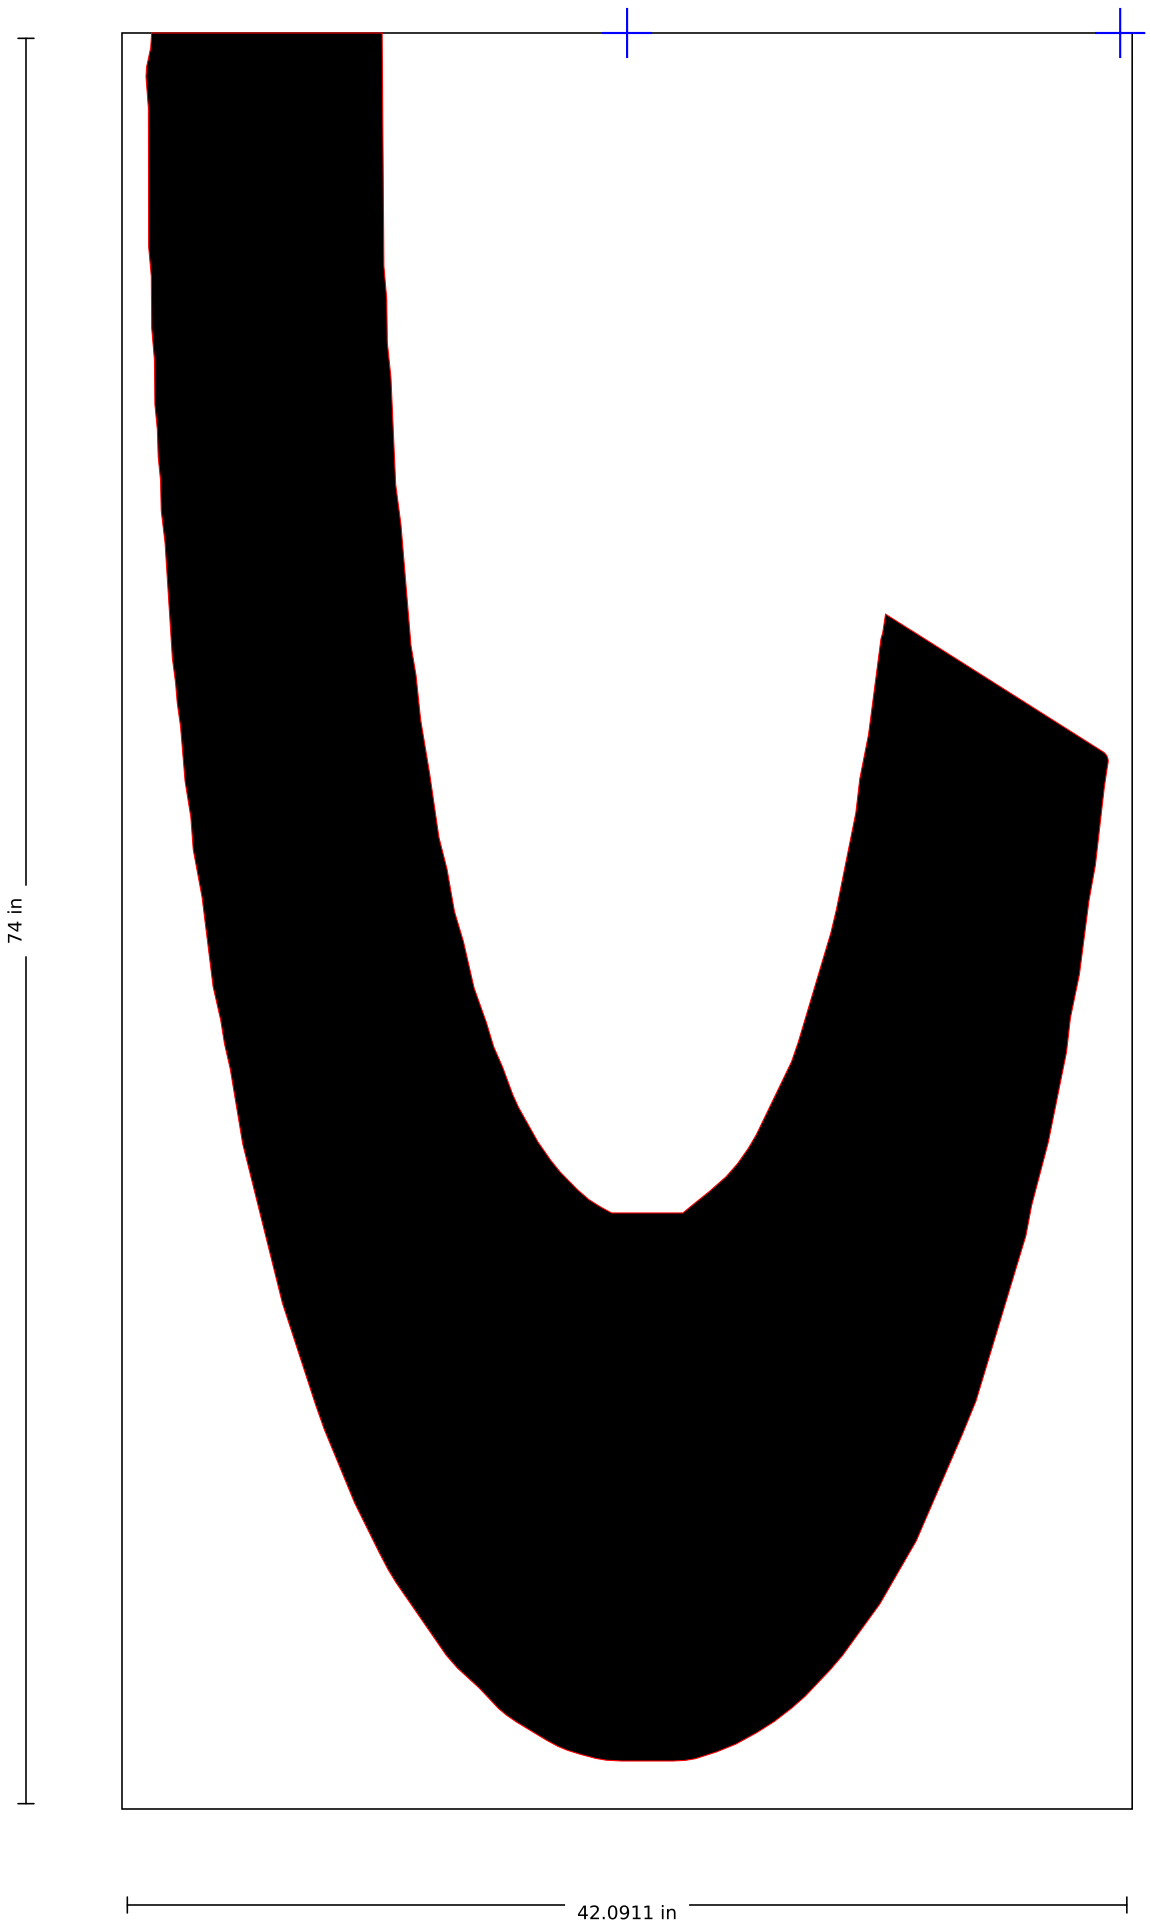

SSS-FAA-144-03-C · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

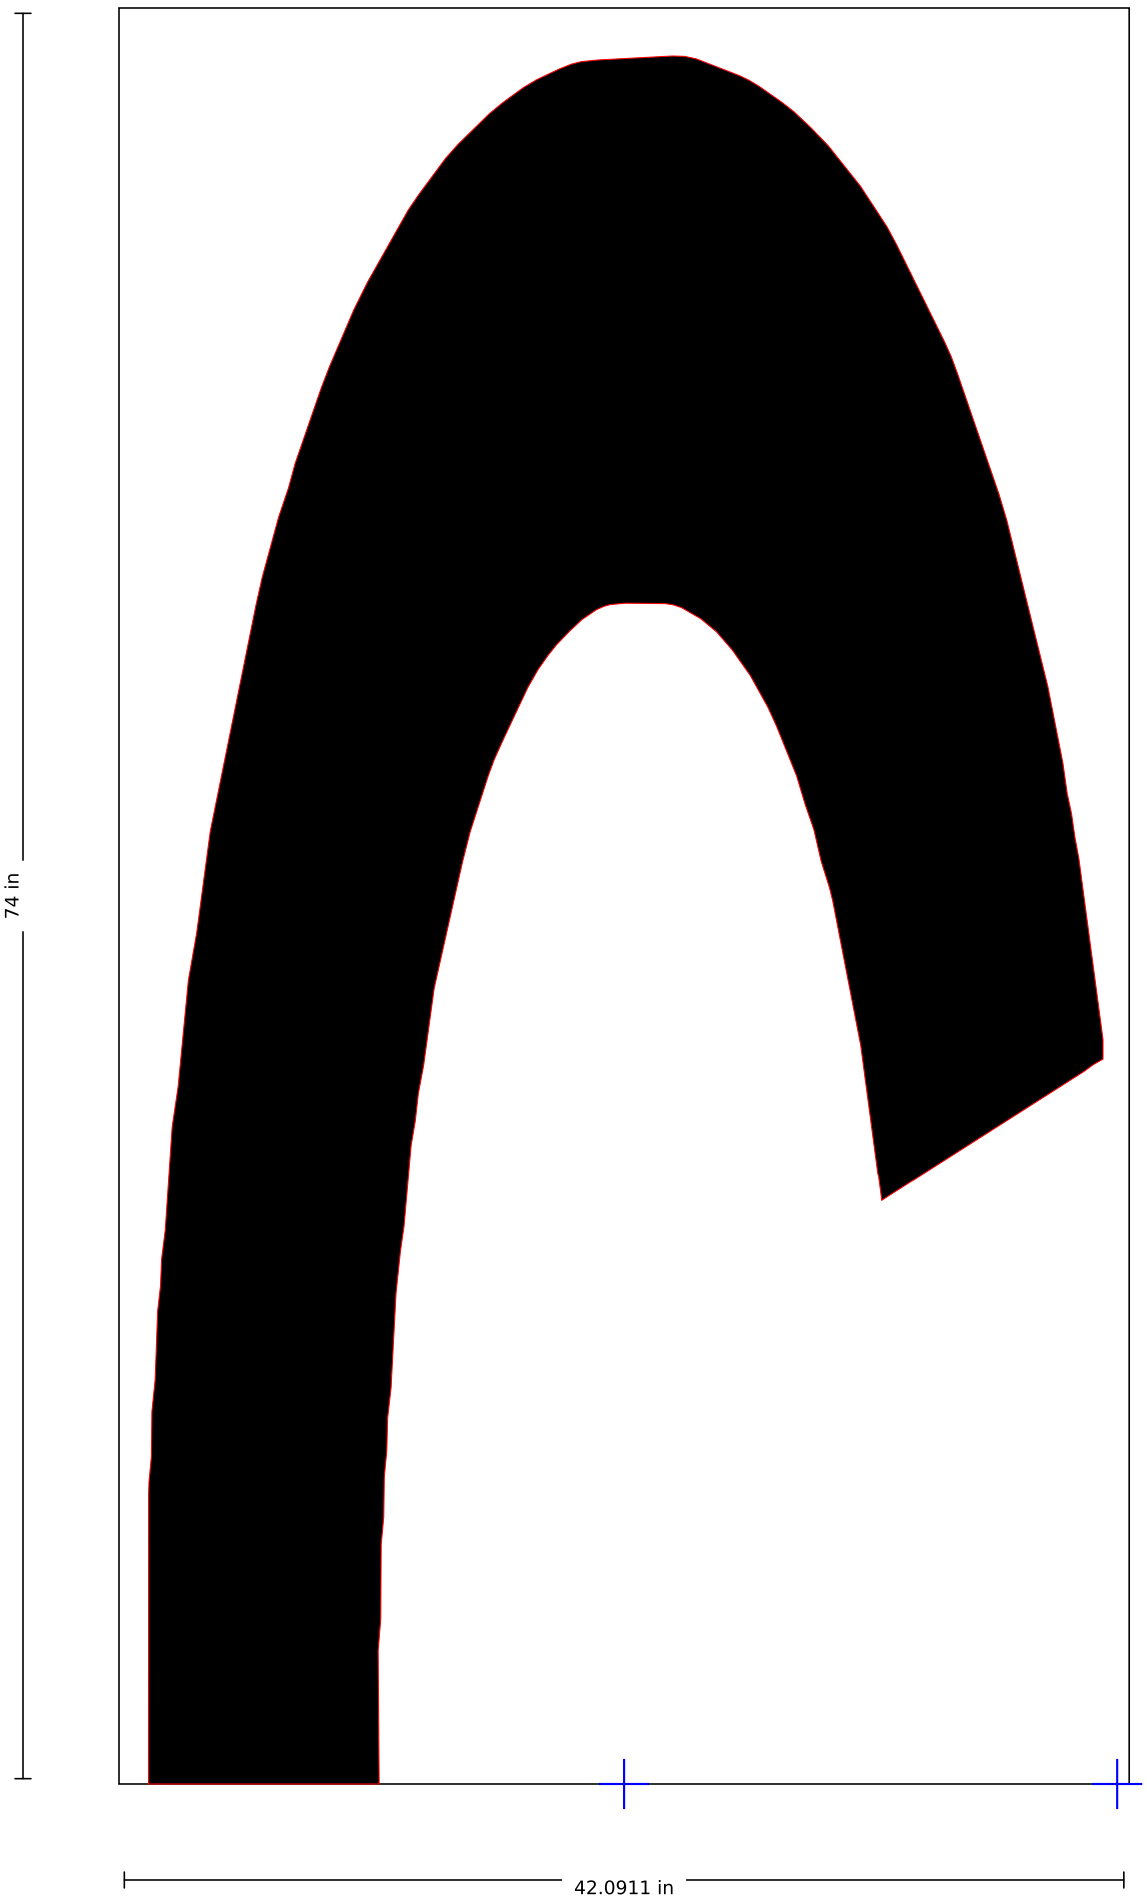

SSS-FAA-144-03-D

144" FAA Airport "D" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 40 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

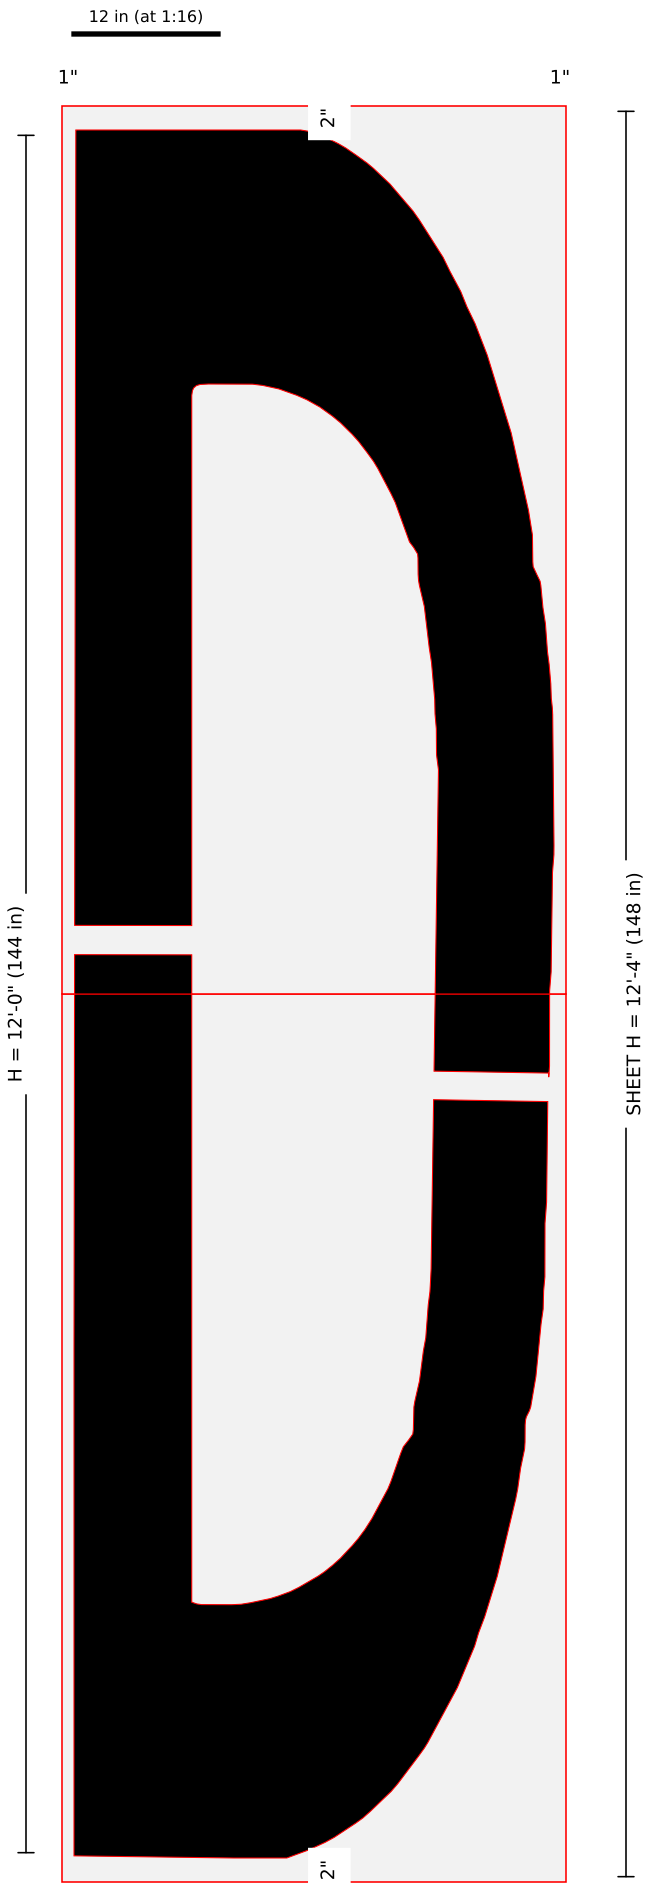

Pieces: 2 (1 x 2); blanks (in): 42 x 74, 42 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144D-144in-FAA-Airport-Letter-D-157x60-2.jpg: width = 1-800 image width label 40 in (image-scale 39.91); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (34.74,64.3) stroke 9.511" w=2.378"; (4.93,76.49) stroke 9.76" w=2.44" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-D · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

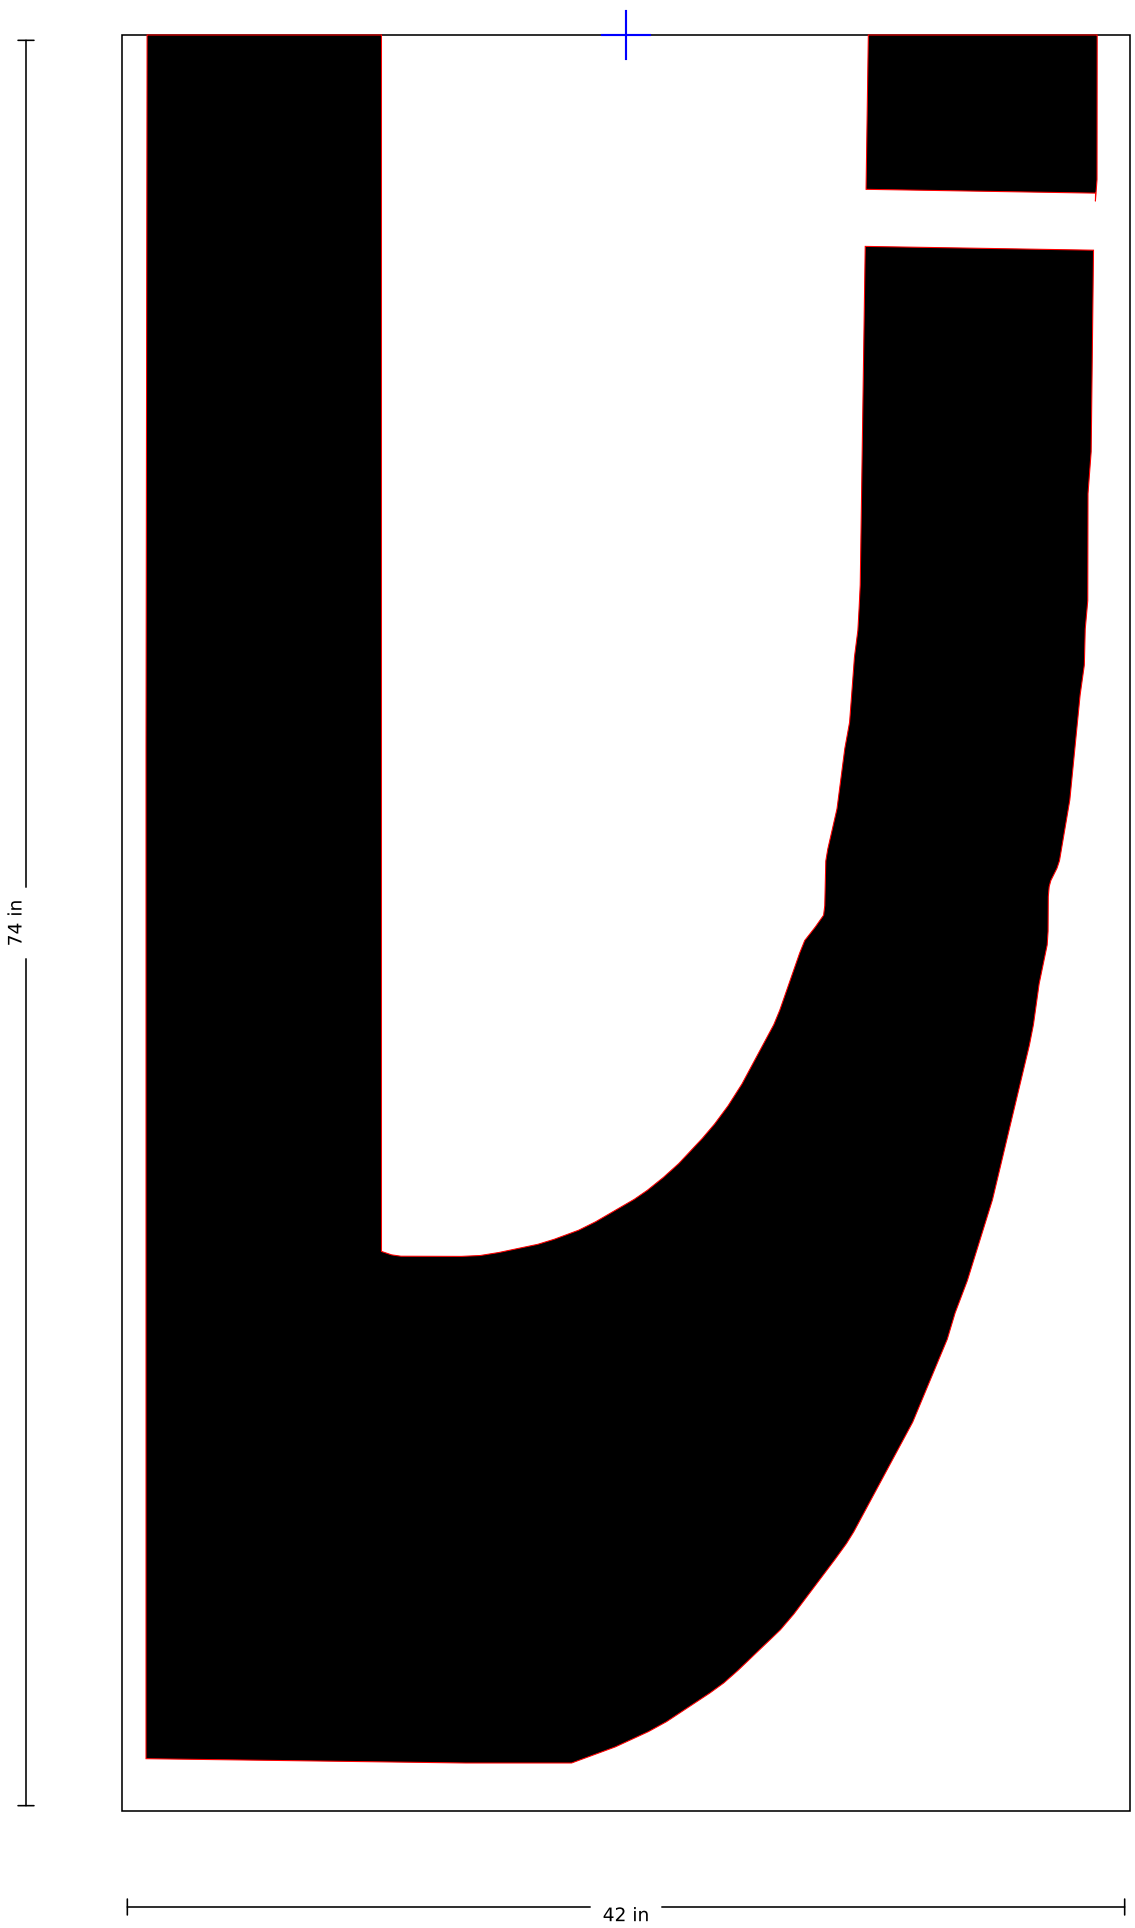

SSS-FAA-144-03-D · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

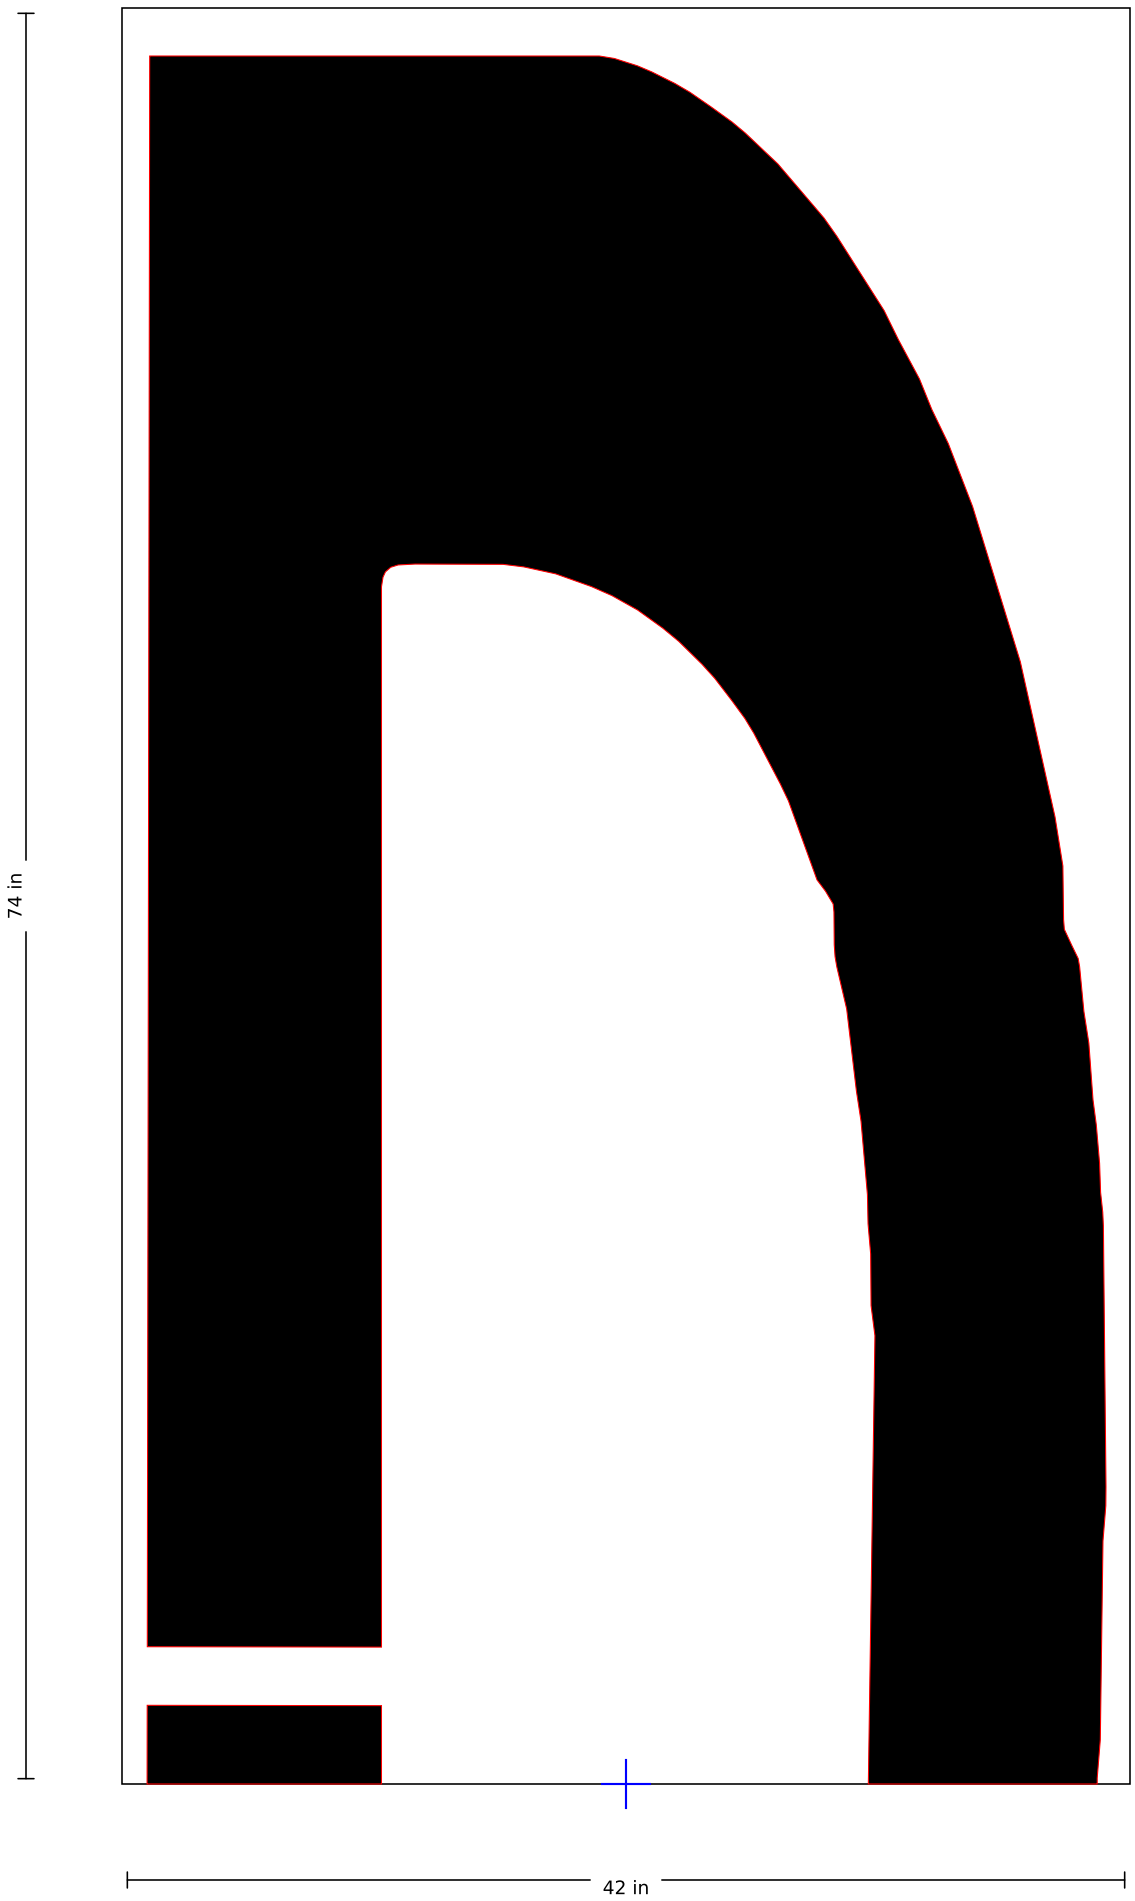

SSS-FAA-144-03-I

144" FAA Airport "I" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 10 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

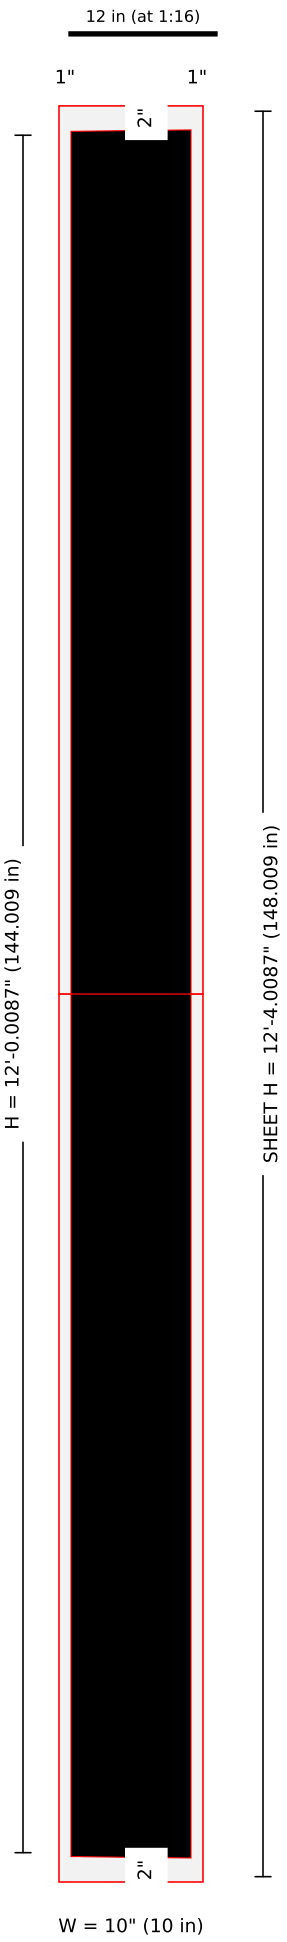

Pieces: 2 (1 x 2); blanks (in): 12 x 74.004, 12 x 74.004 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144I-144in-FAA-Airport-Letter-I-157x60-2.jpg: width = 1-800 image width label 10 in (image-scale 9.53); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-I · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

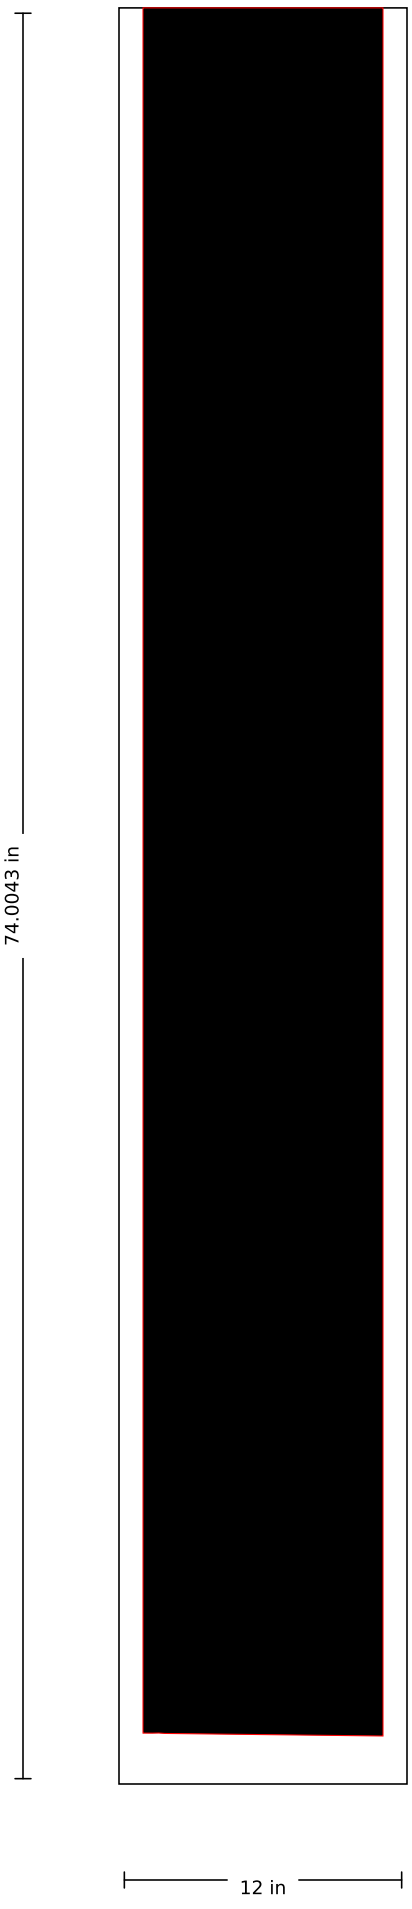

SSS-FAA-144-03-I · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

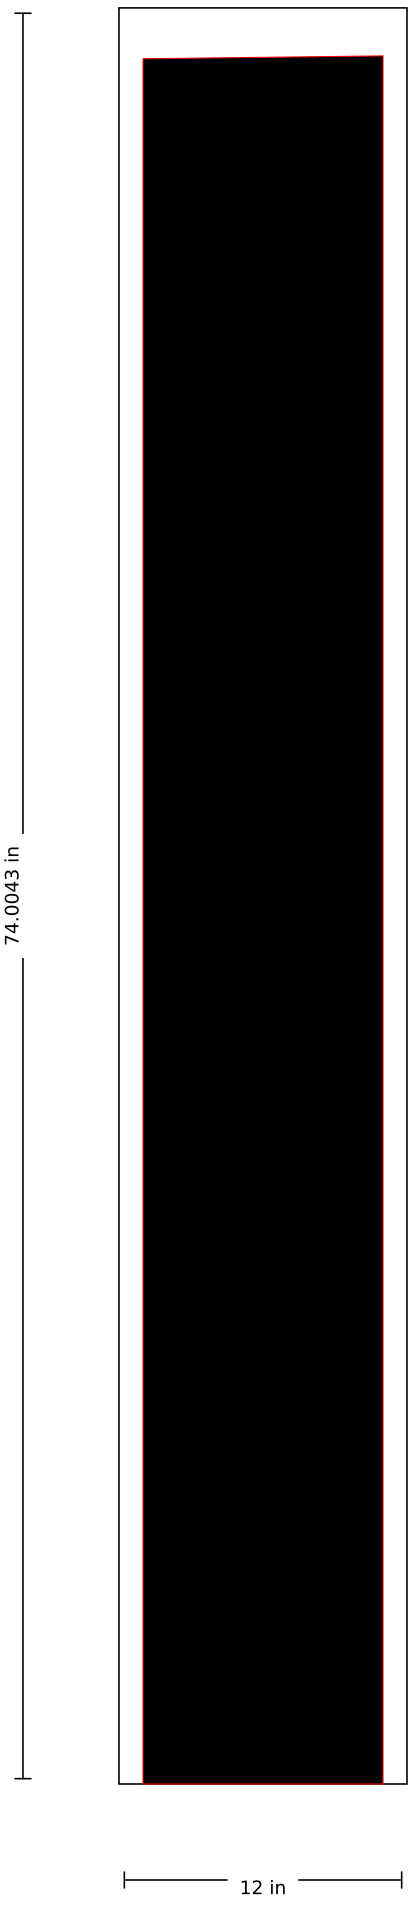

SSS-FAA-144-03-J

144" FAA Airport "J" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 38 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

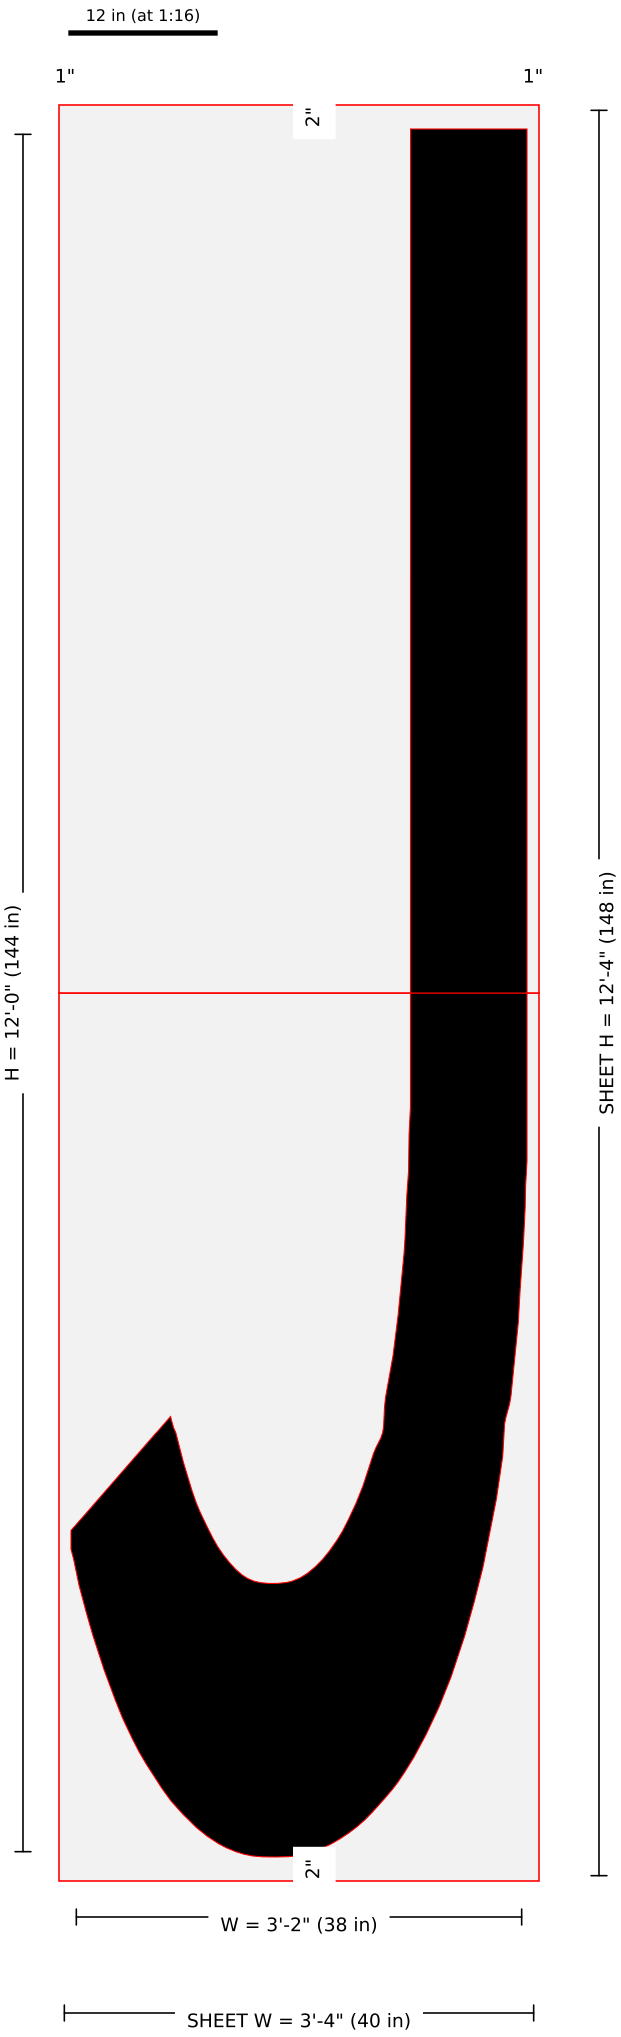

Pieces: 2 (1 x 2); blanks (in): 40 x 74, 40 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144J-144in-FAA-Airport-Letter-J-157x60-2.jpg: width = 1-800 image width label 38 in (image-scale 37.53); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-J · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

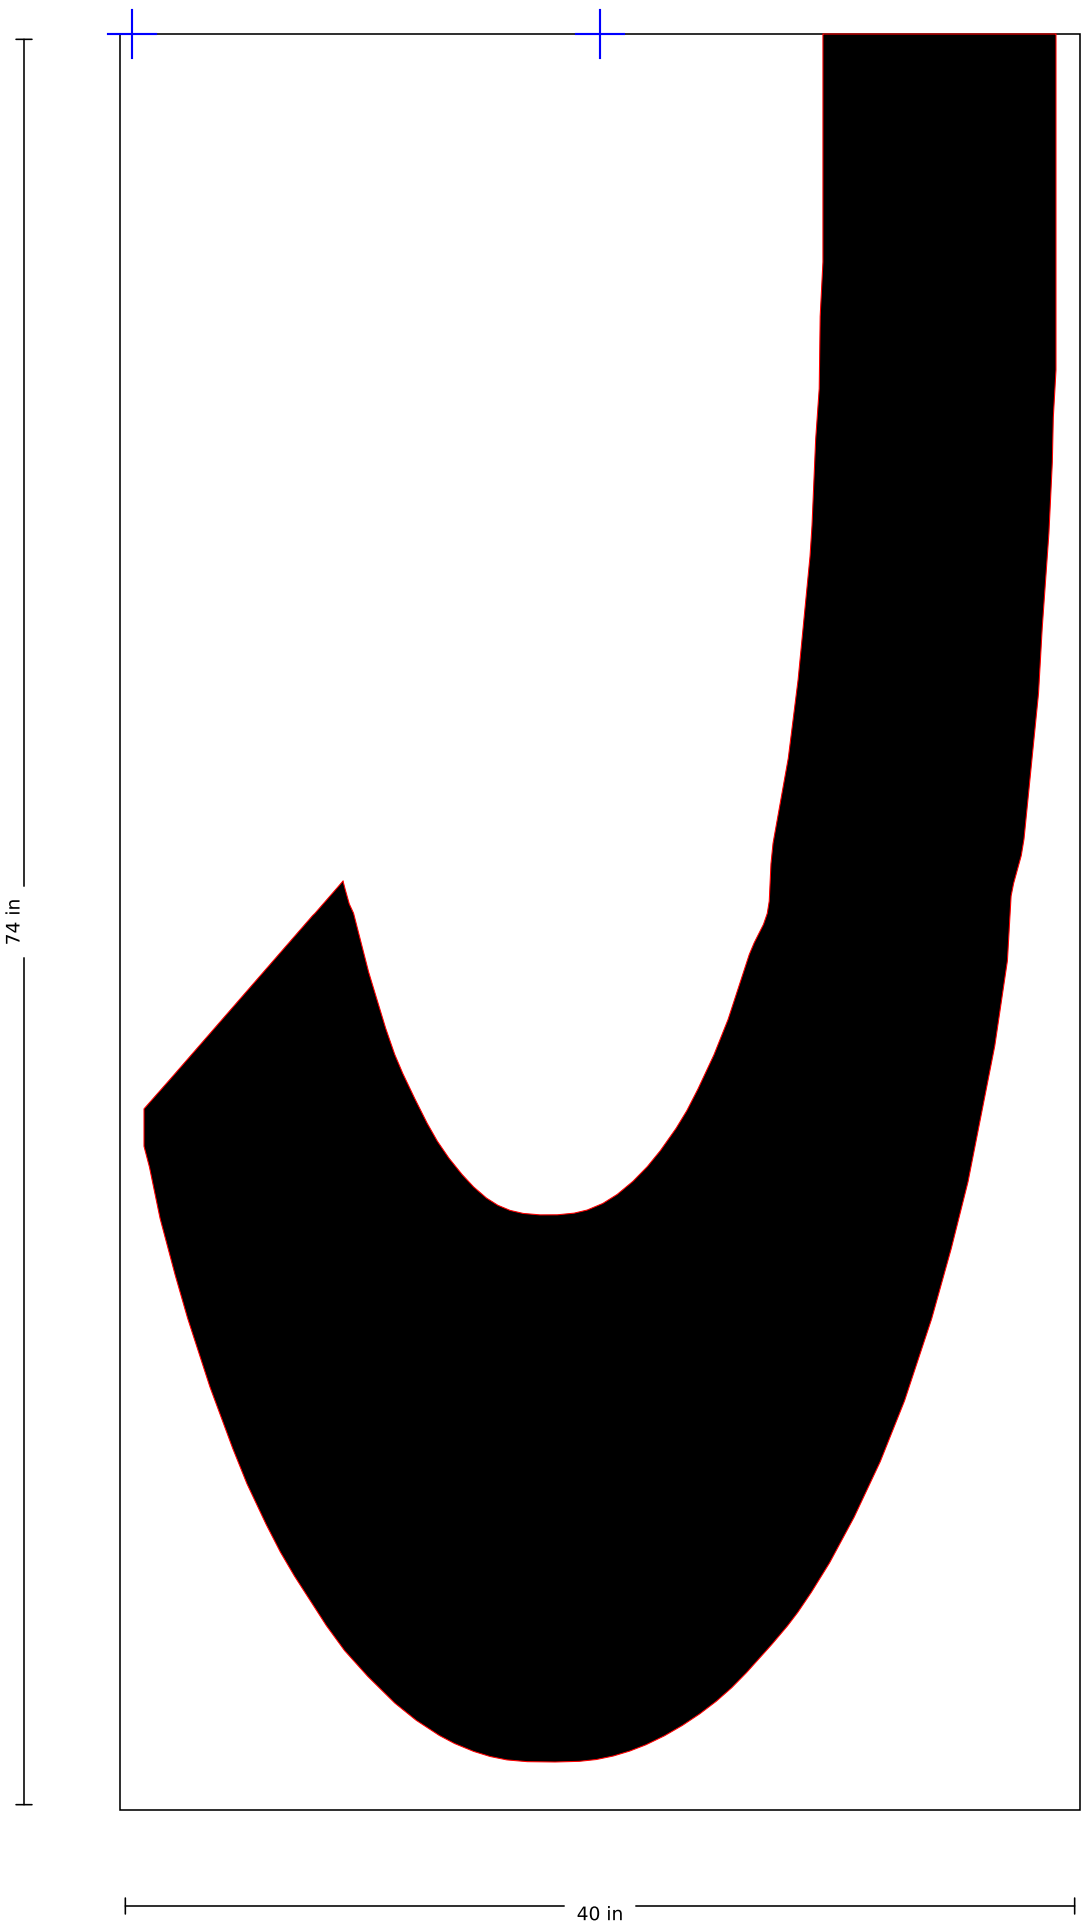

SSS-FAA-144-03-J · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

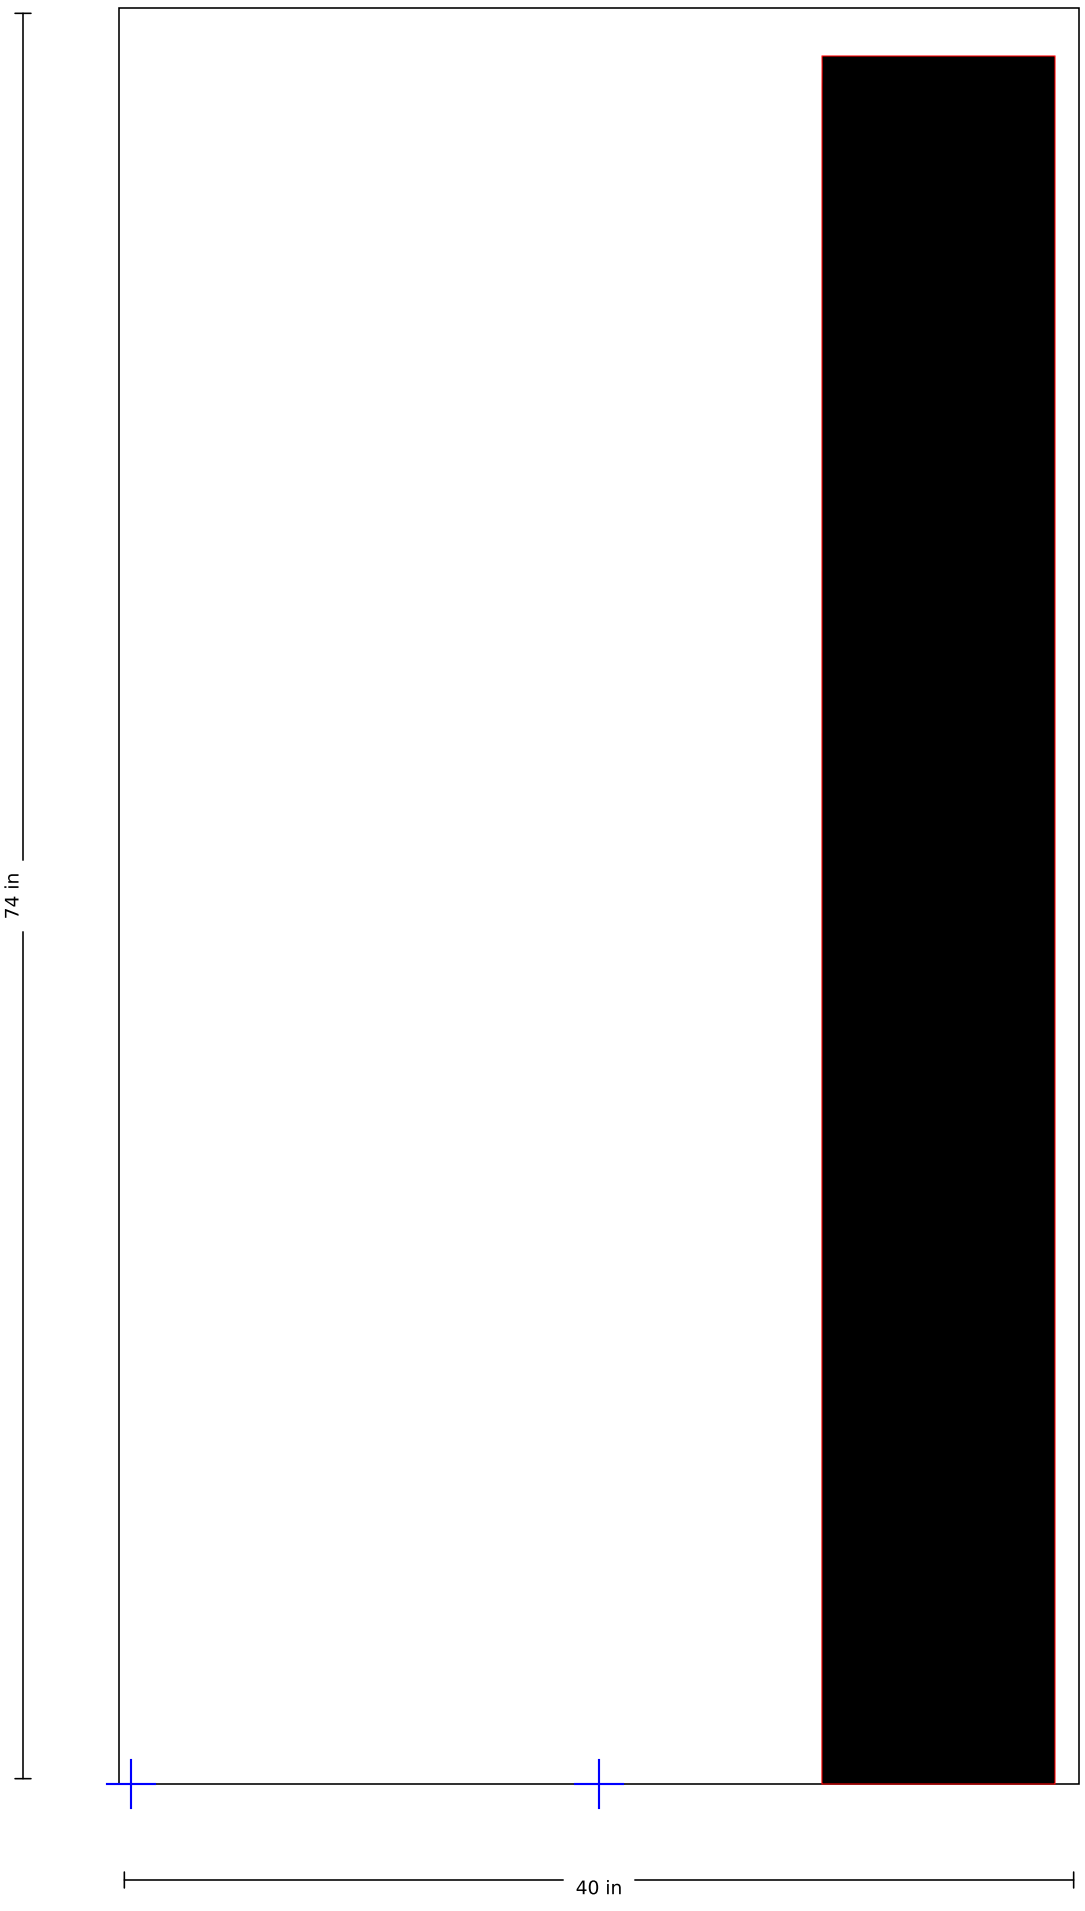

SSS-FAA-144-03-K

144" FAA Airport "K" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 43 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

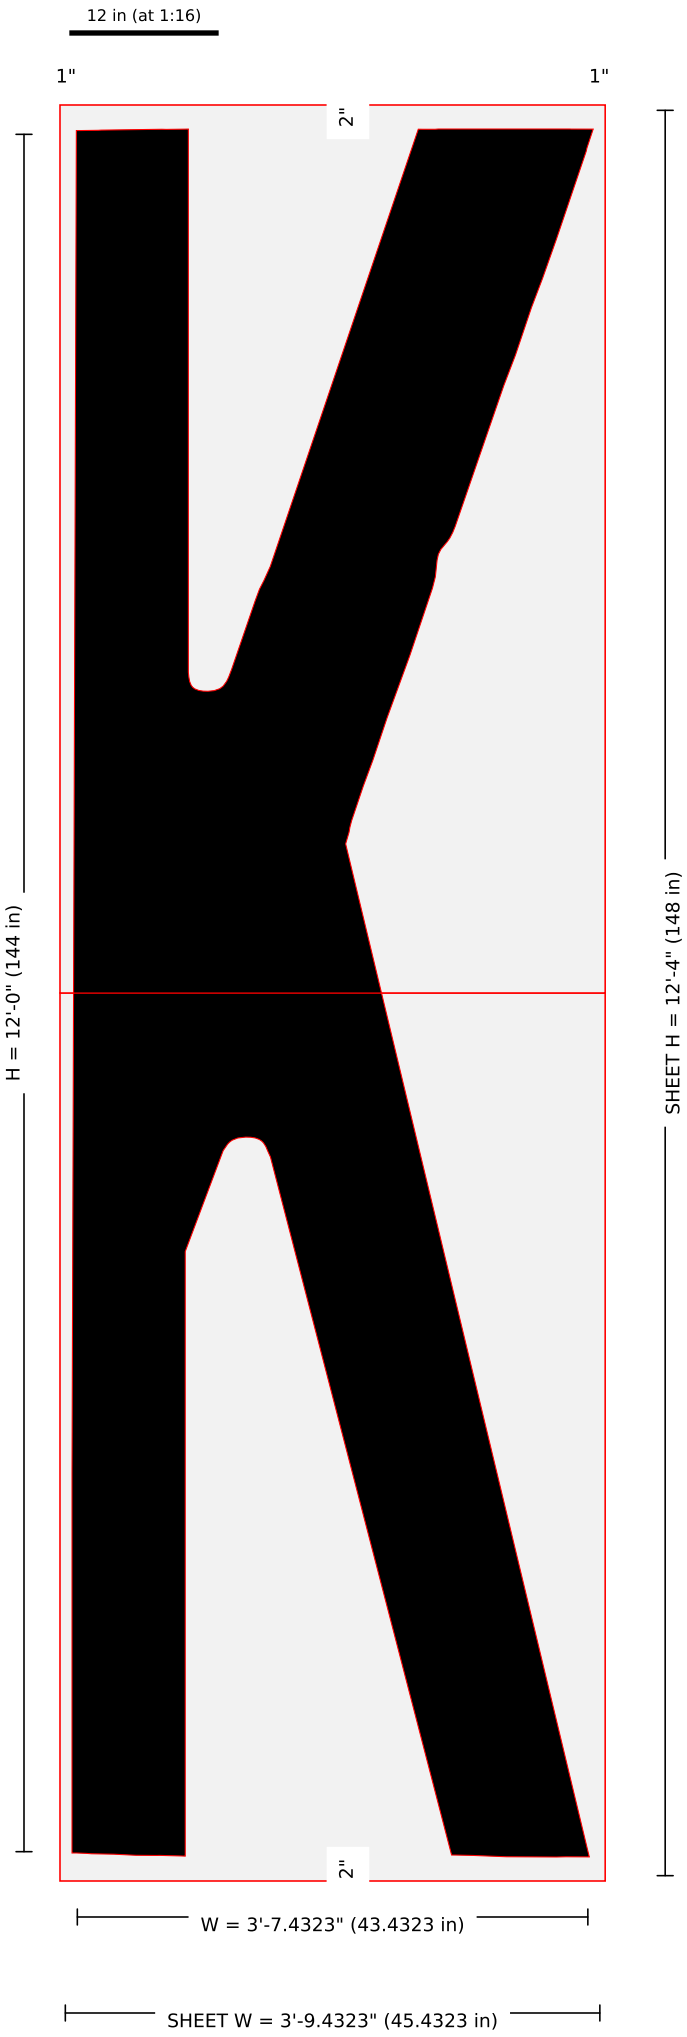

Pieces: 2 (1 x 2); blanks (in): 45.432 x 74, 45.432 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144K-144in-FAA-Airport-Letter-K-157x60-2.jpg: width = 1-800 image width label 43 in (image-scale 42.56); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-K · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

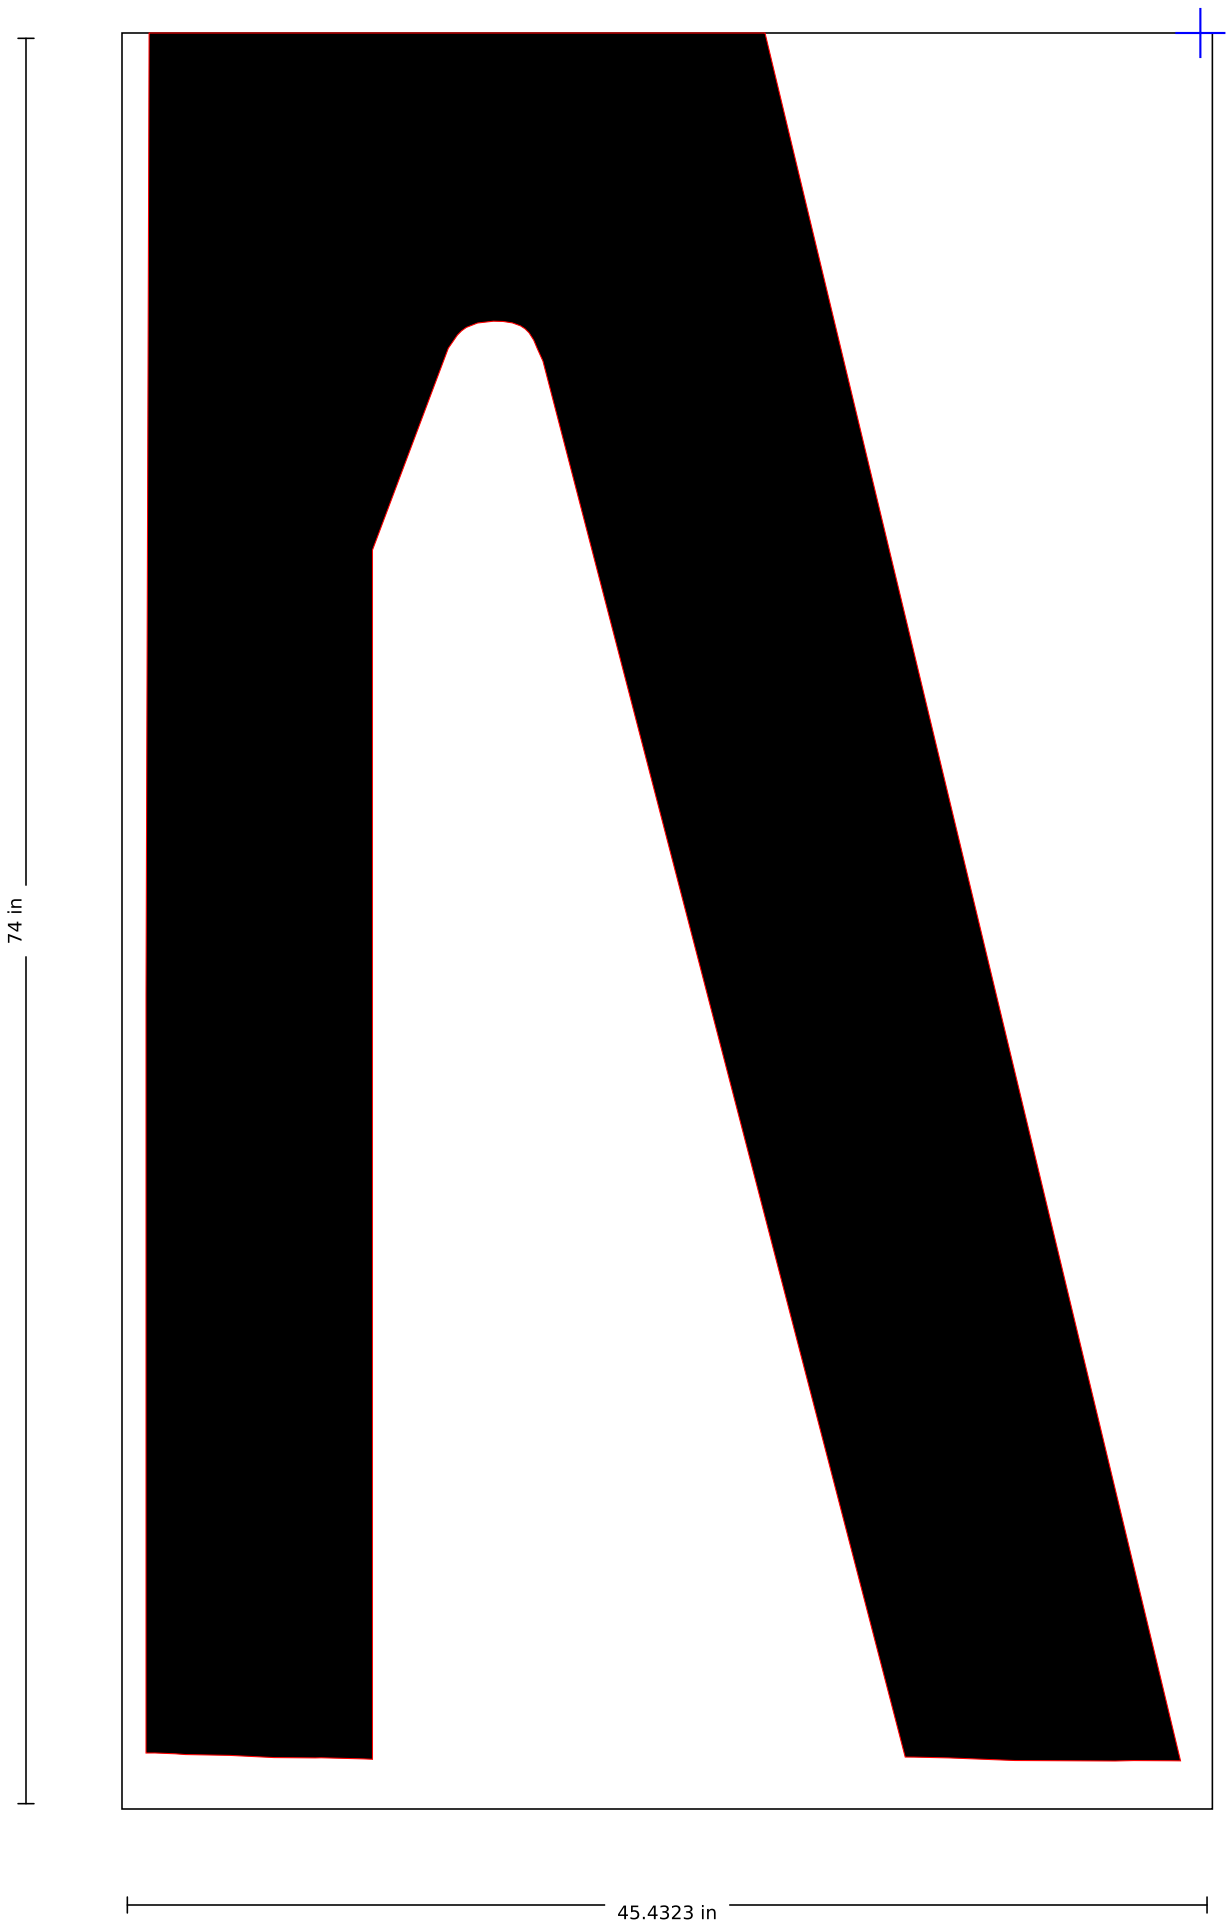

SSS-FAA-144-03-K · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

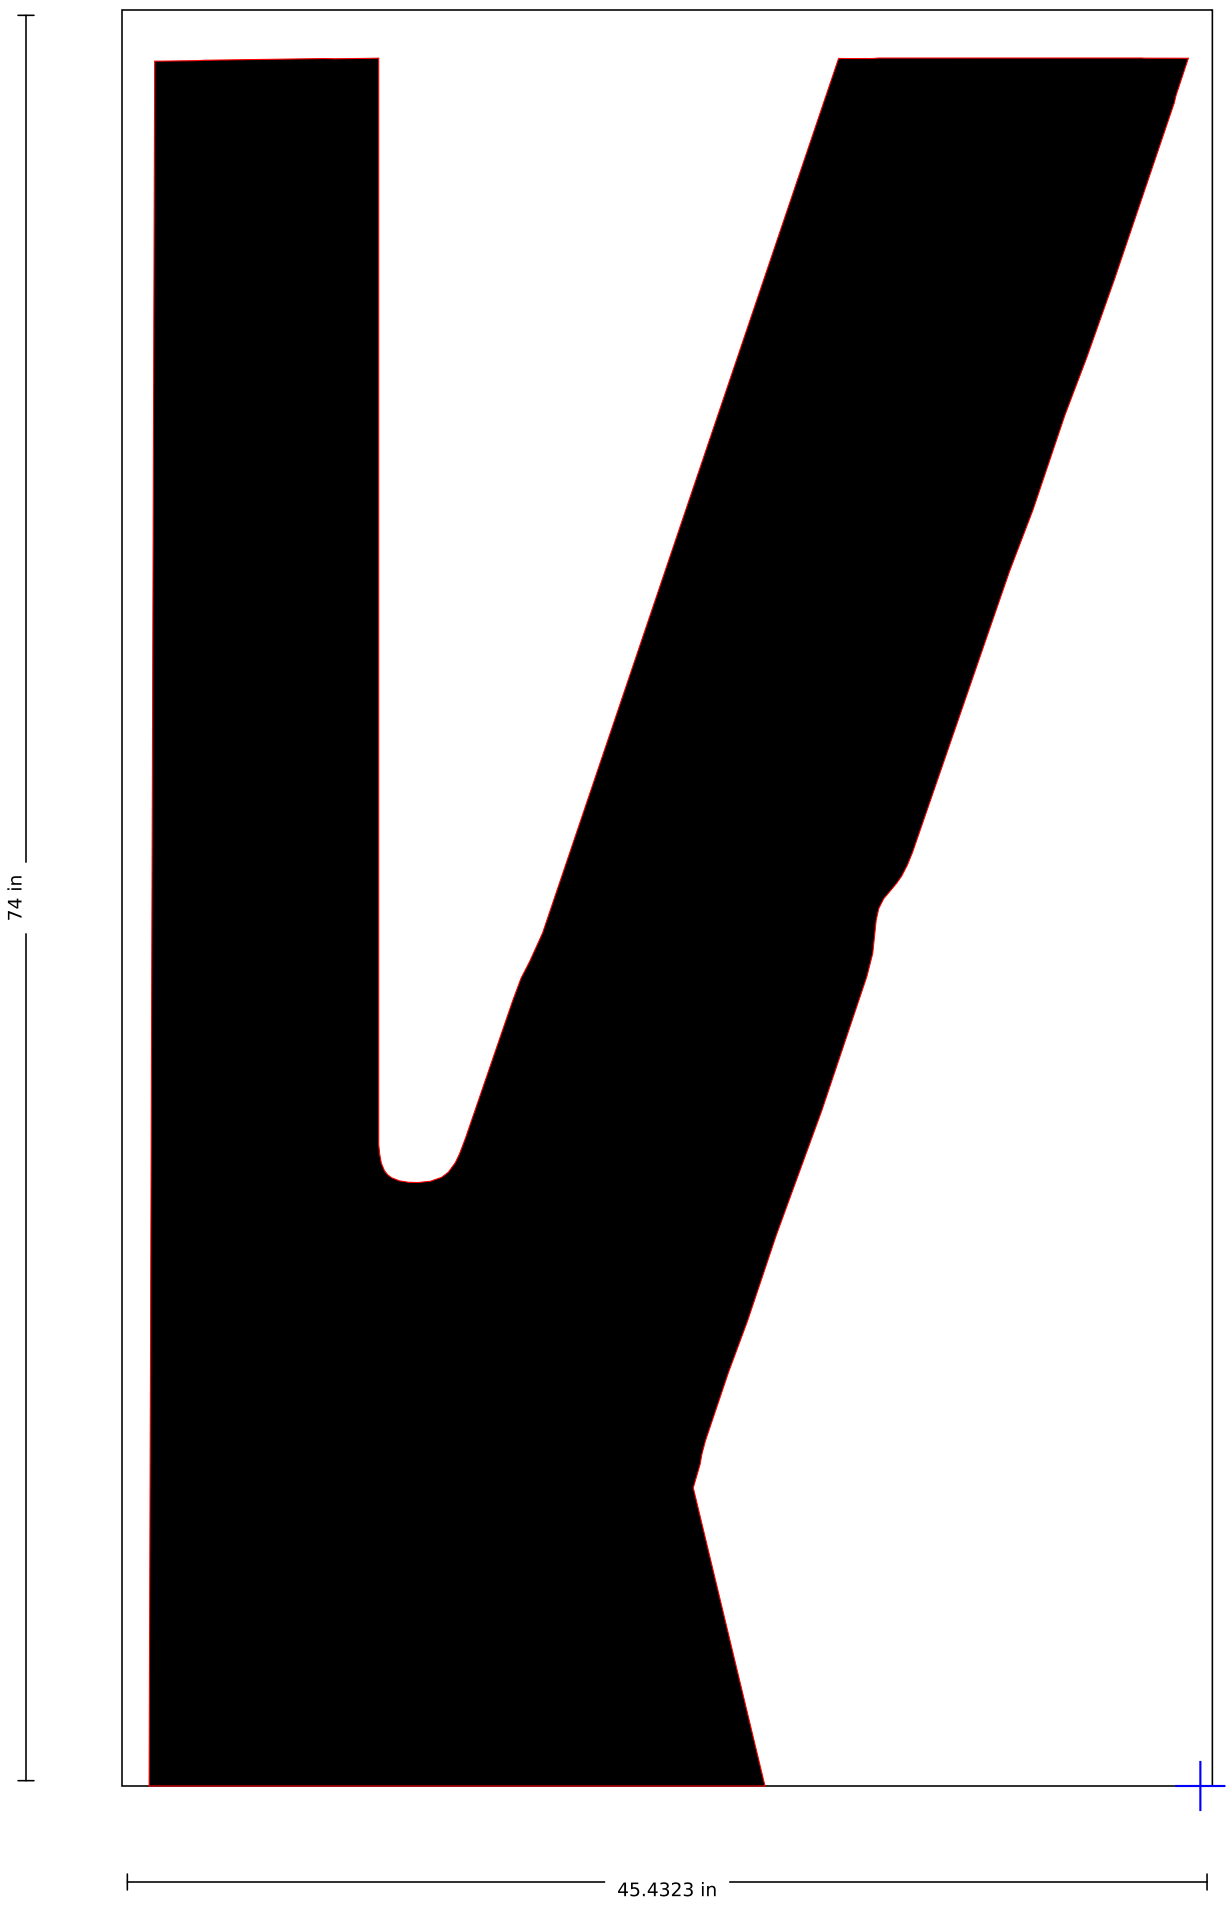


SSS-FAA-144-03-M

144" FAA Airport "M" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 47 W x 144 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

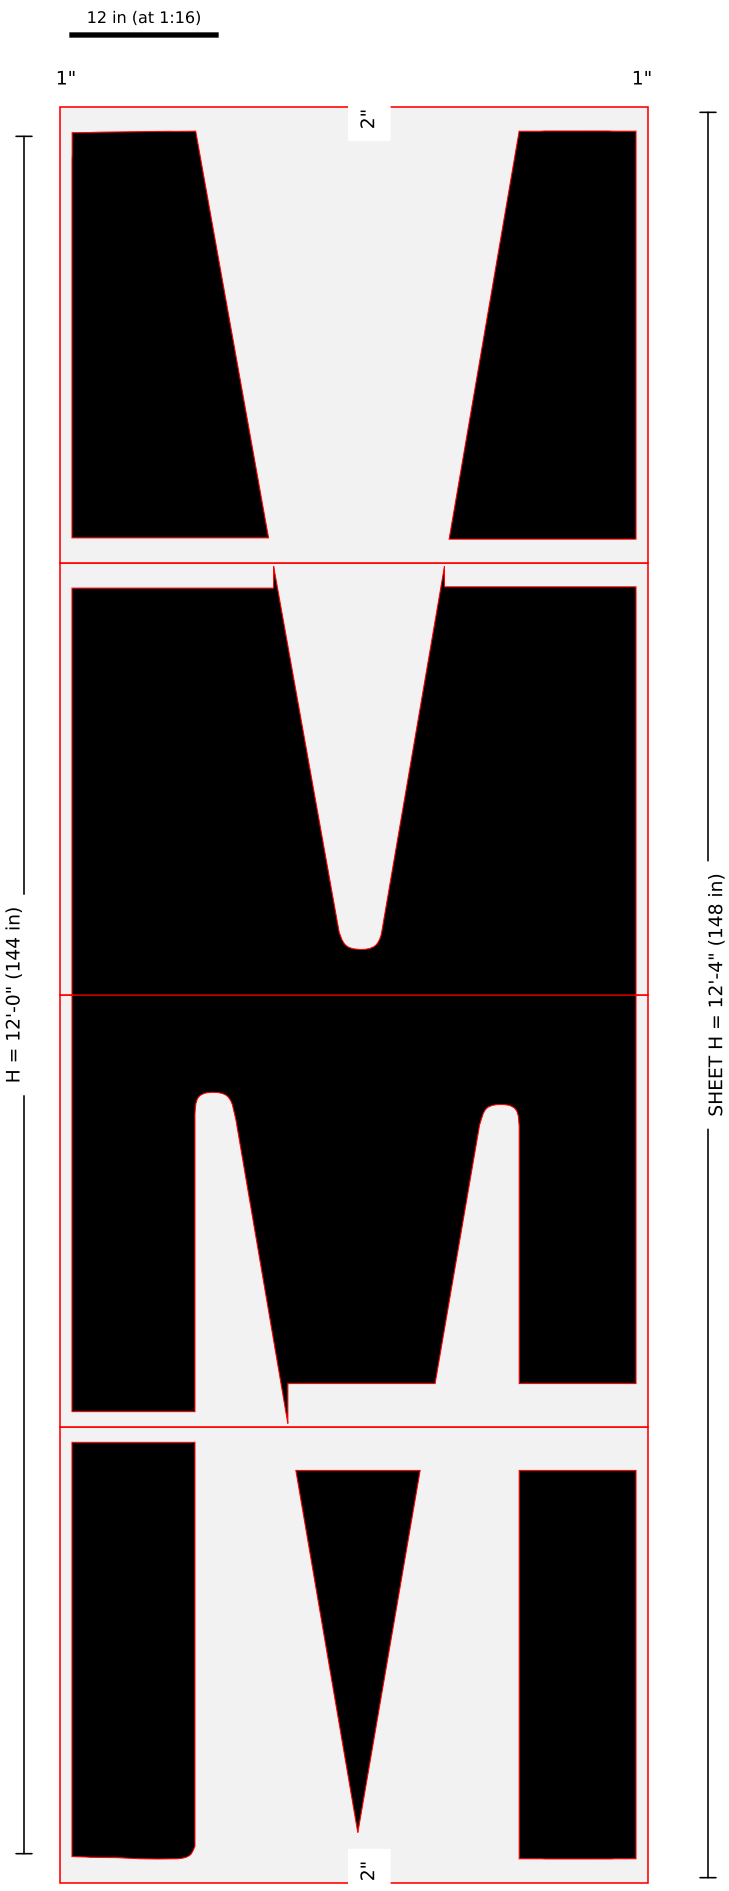


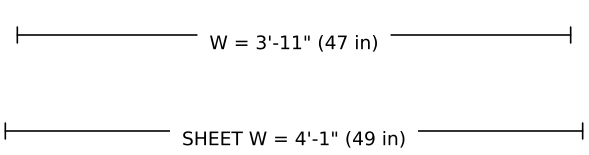

Pieces: 4 (1 x 4); blanks (in): 49 x 38, 49 x 36, 49 x 36, 49 x 38 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144M-144in-FAA-Airport-Letter-M-157x60-2.jpg: width = 1-800 image width label 47 in (image-scale 46.64); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 5 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-M · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

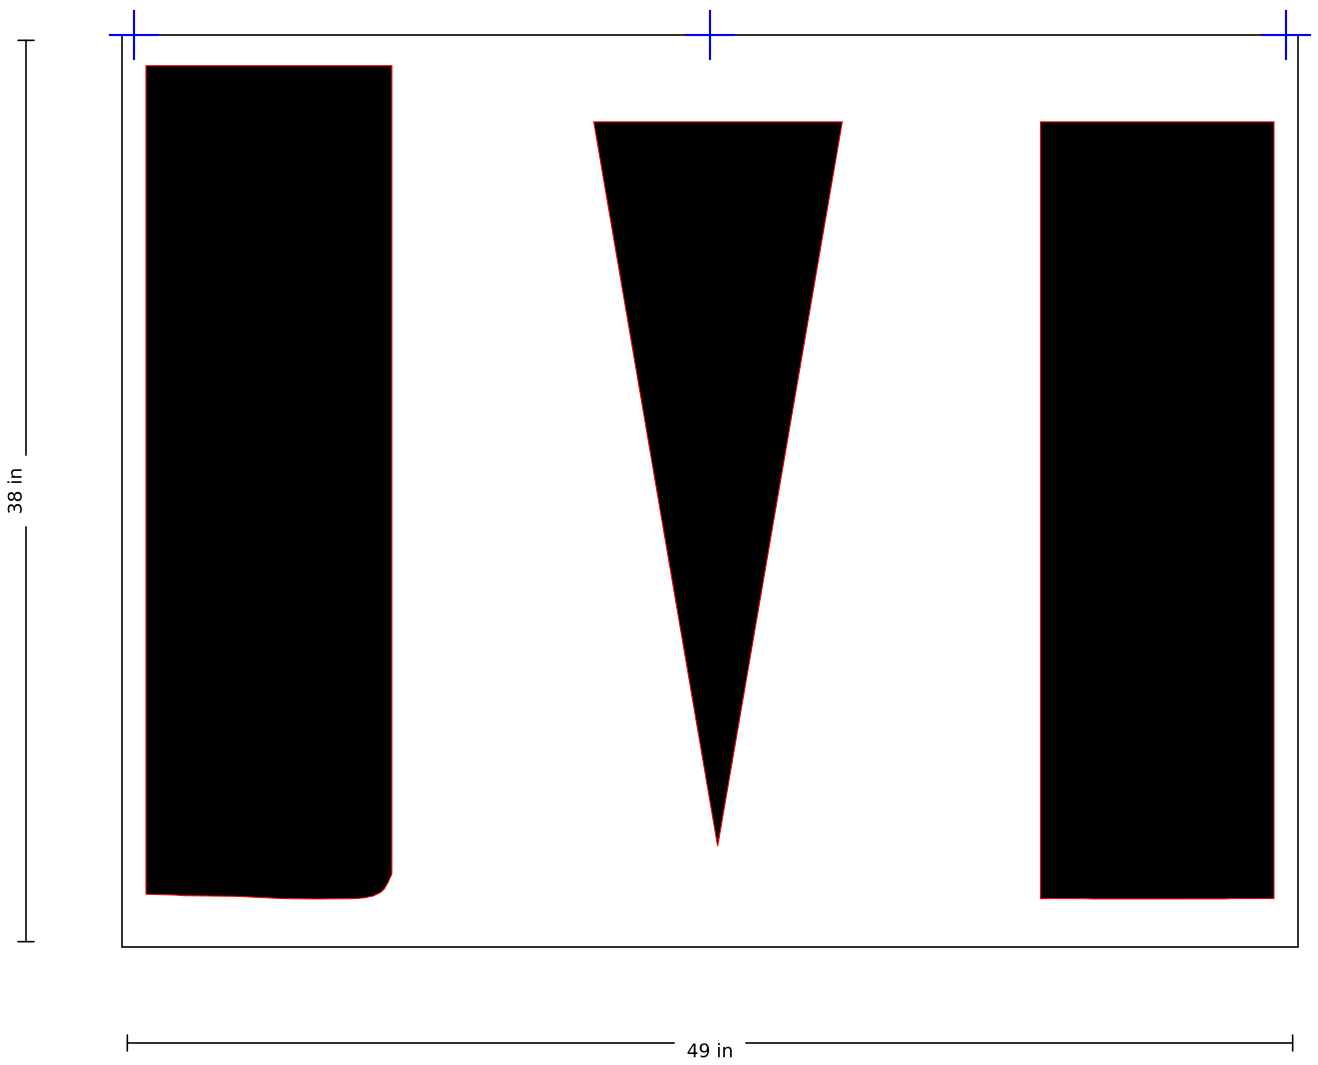


SSS-FAA-144-03-M · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

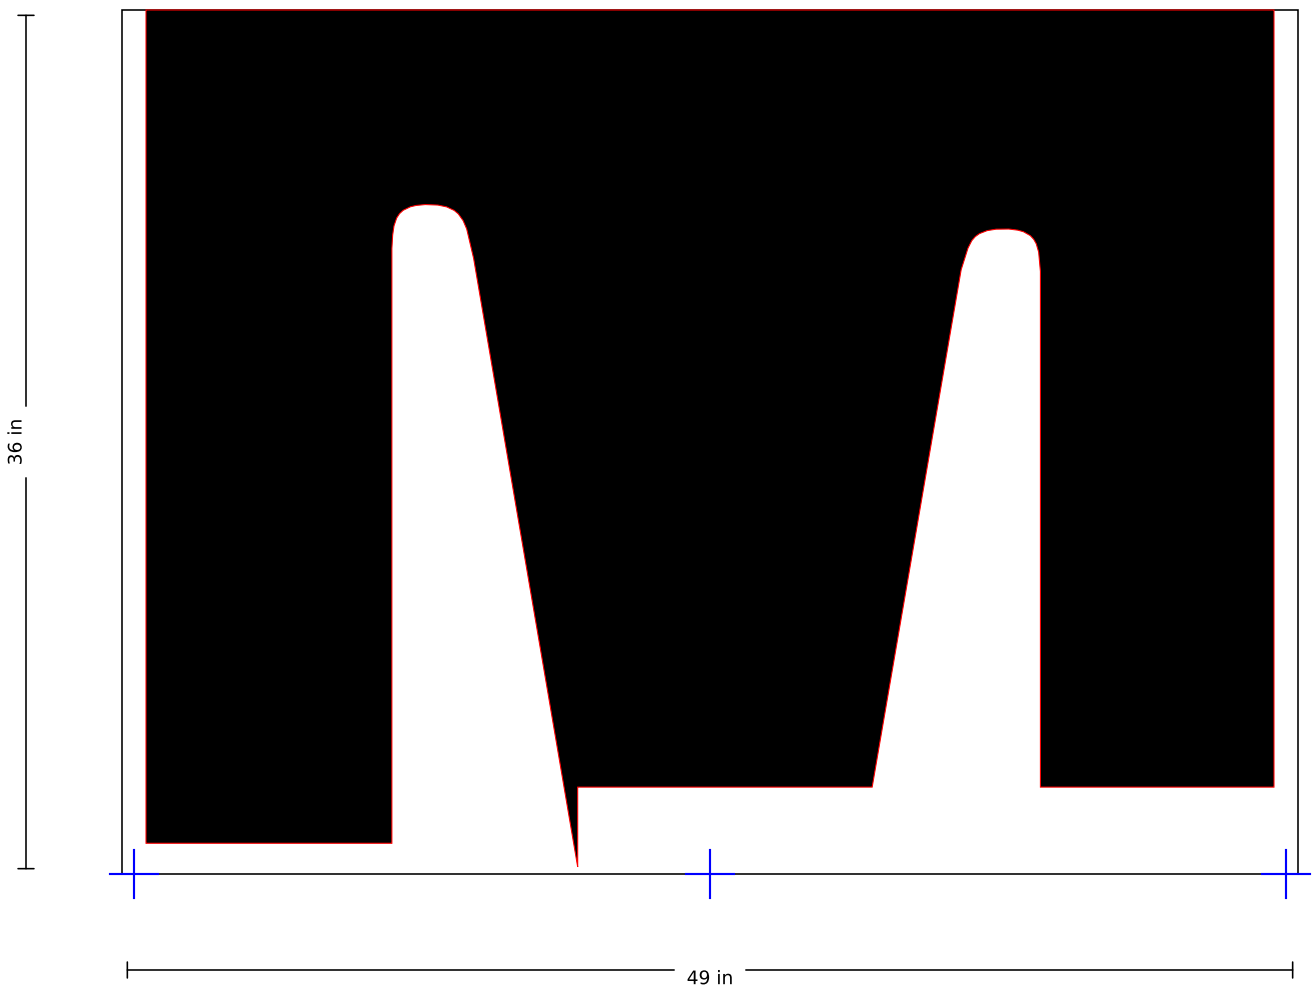


SSS-FAA-144-03-M · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

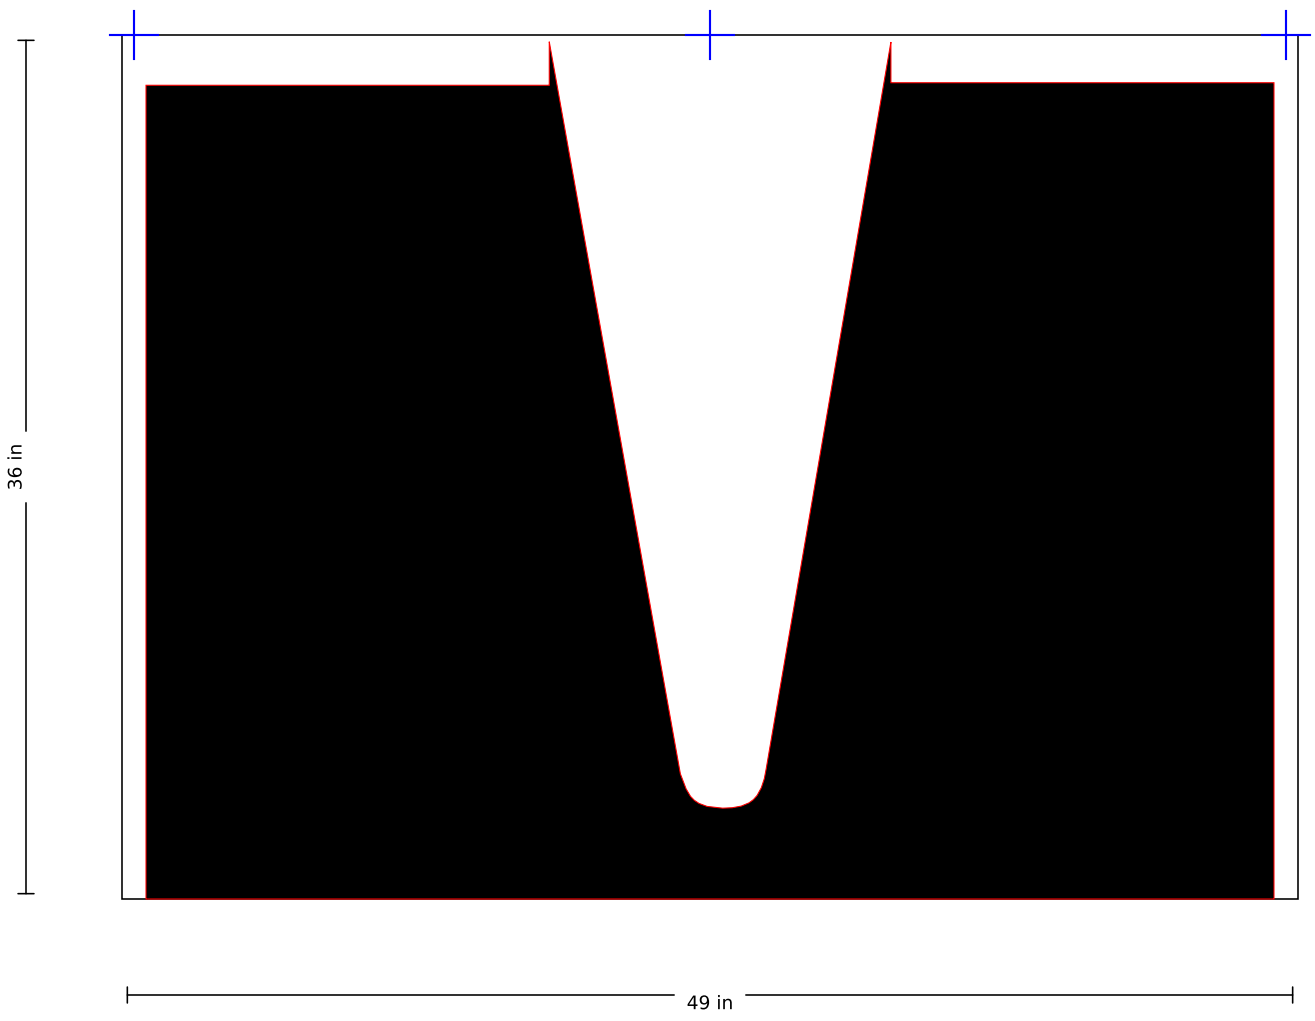

SSS-FAA-144-03-M · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

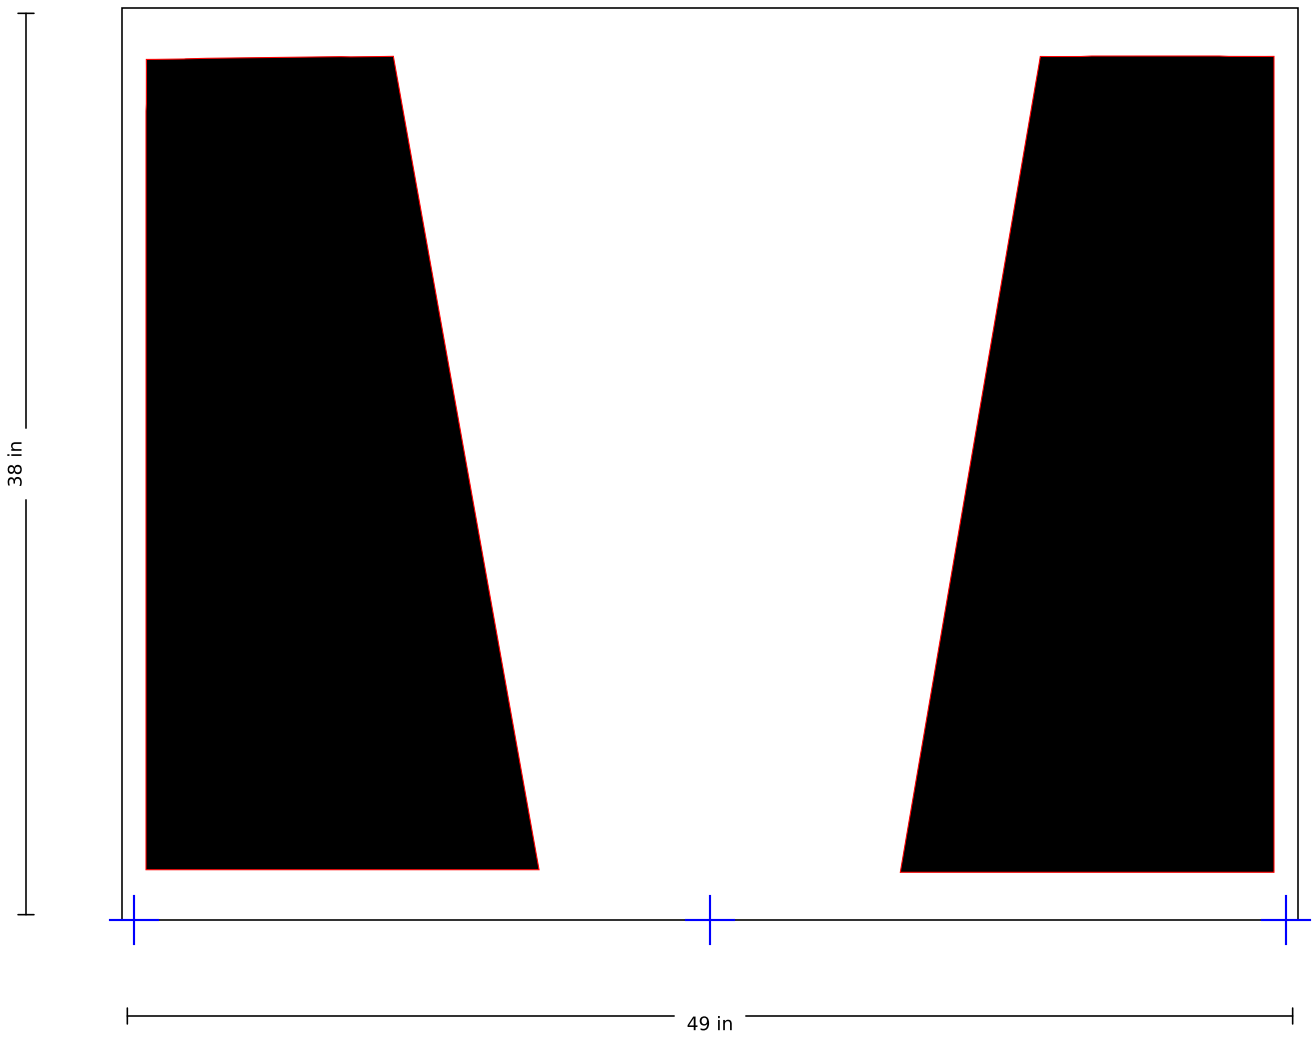

SSS-FAA-144-03-N

144" FAA Airport "N" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 42 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

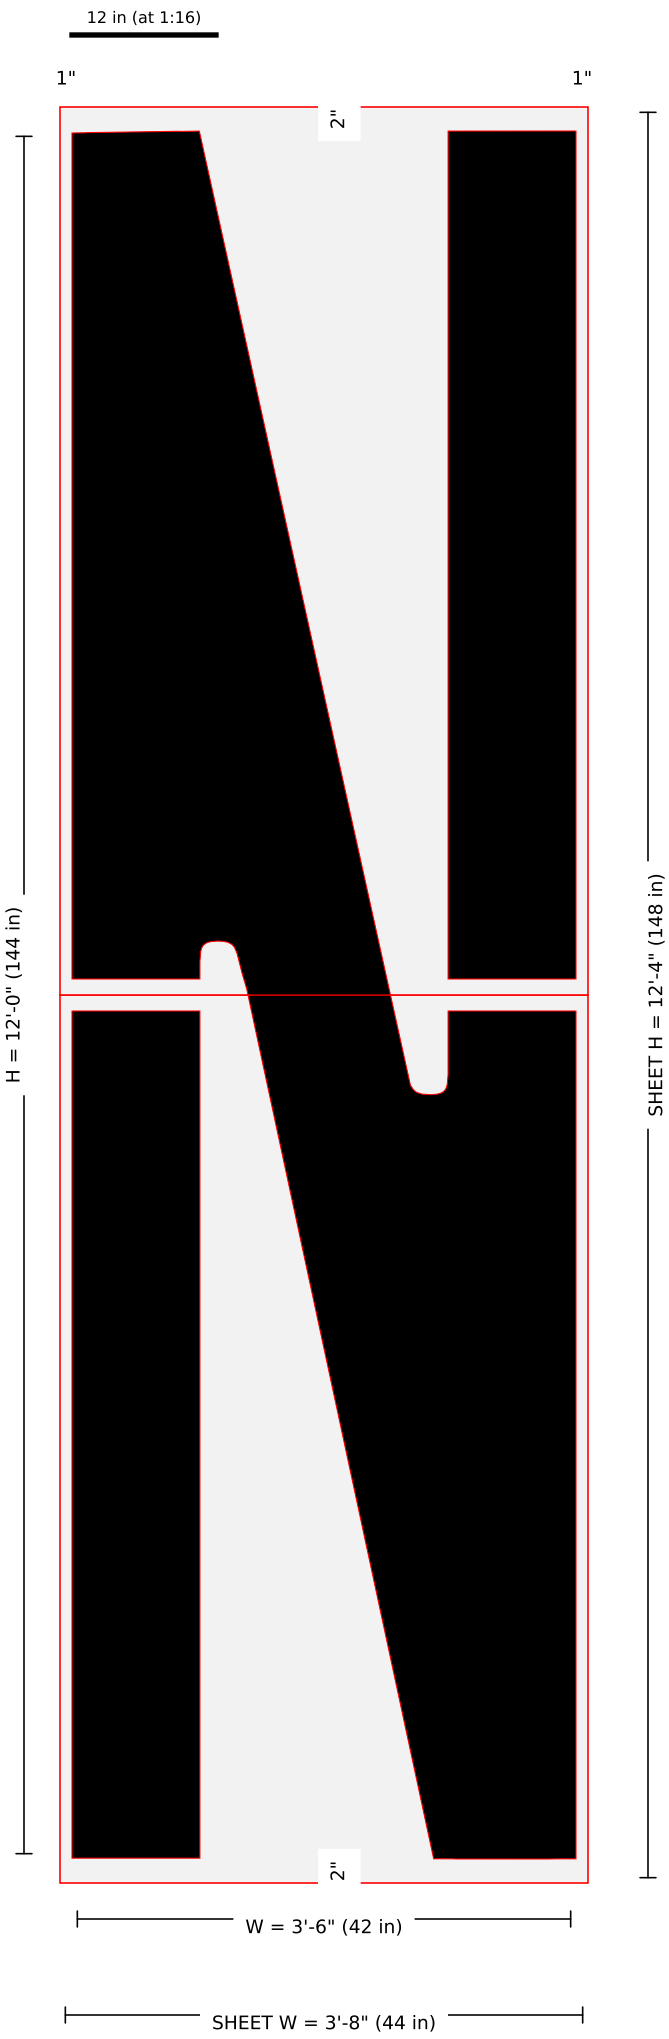

Pieces: 2 (1 x 2); blanks (in): 44 x 74, 44 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144N-144in-FAA-Airport-Letter-N-157x60-2.jpg: width = 1-800 image width label 42 in (image-scale 42.07); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.51 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 2 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-N · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

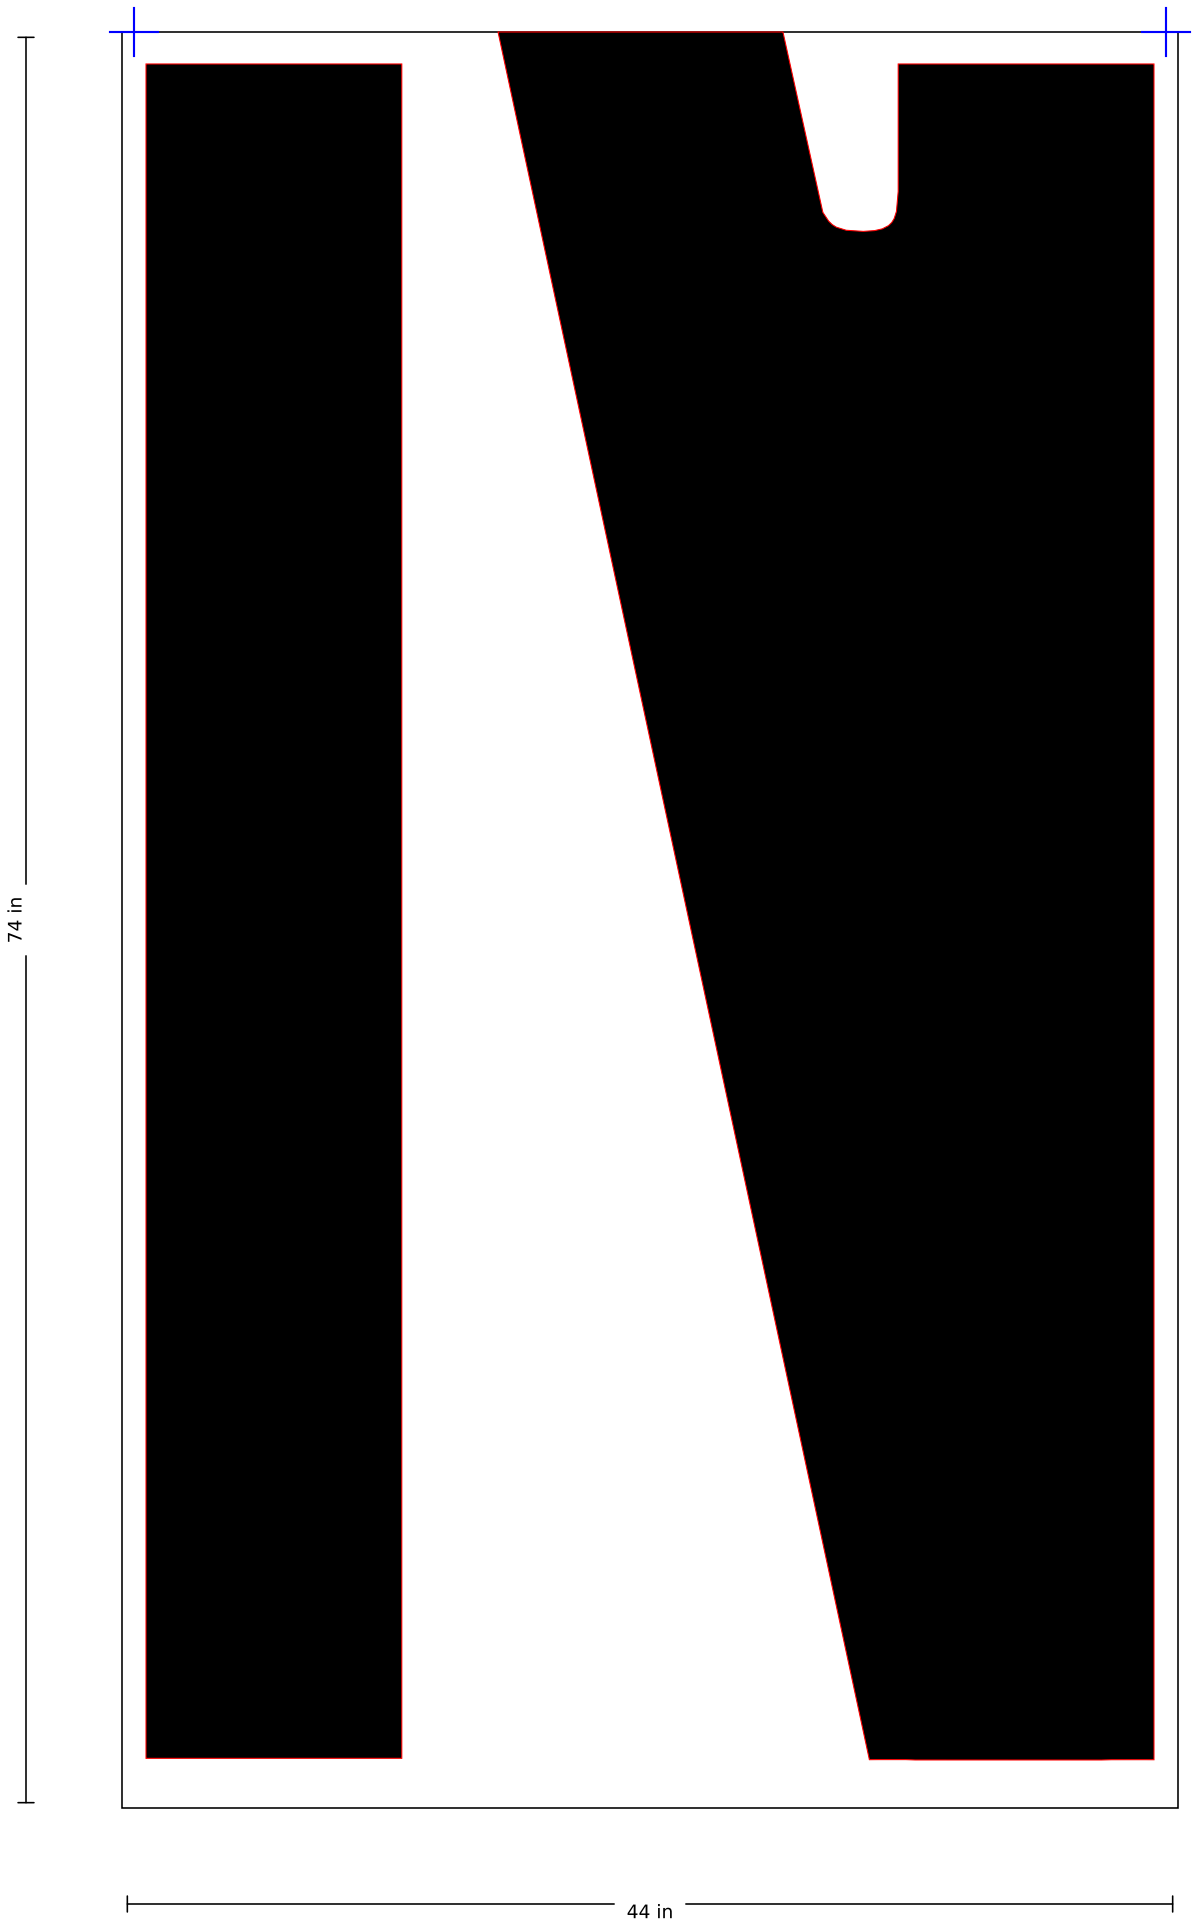

SSS-FAA-144-03-N · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

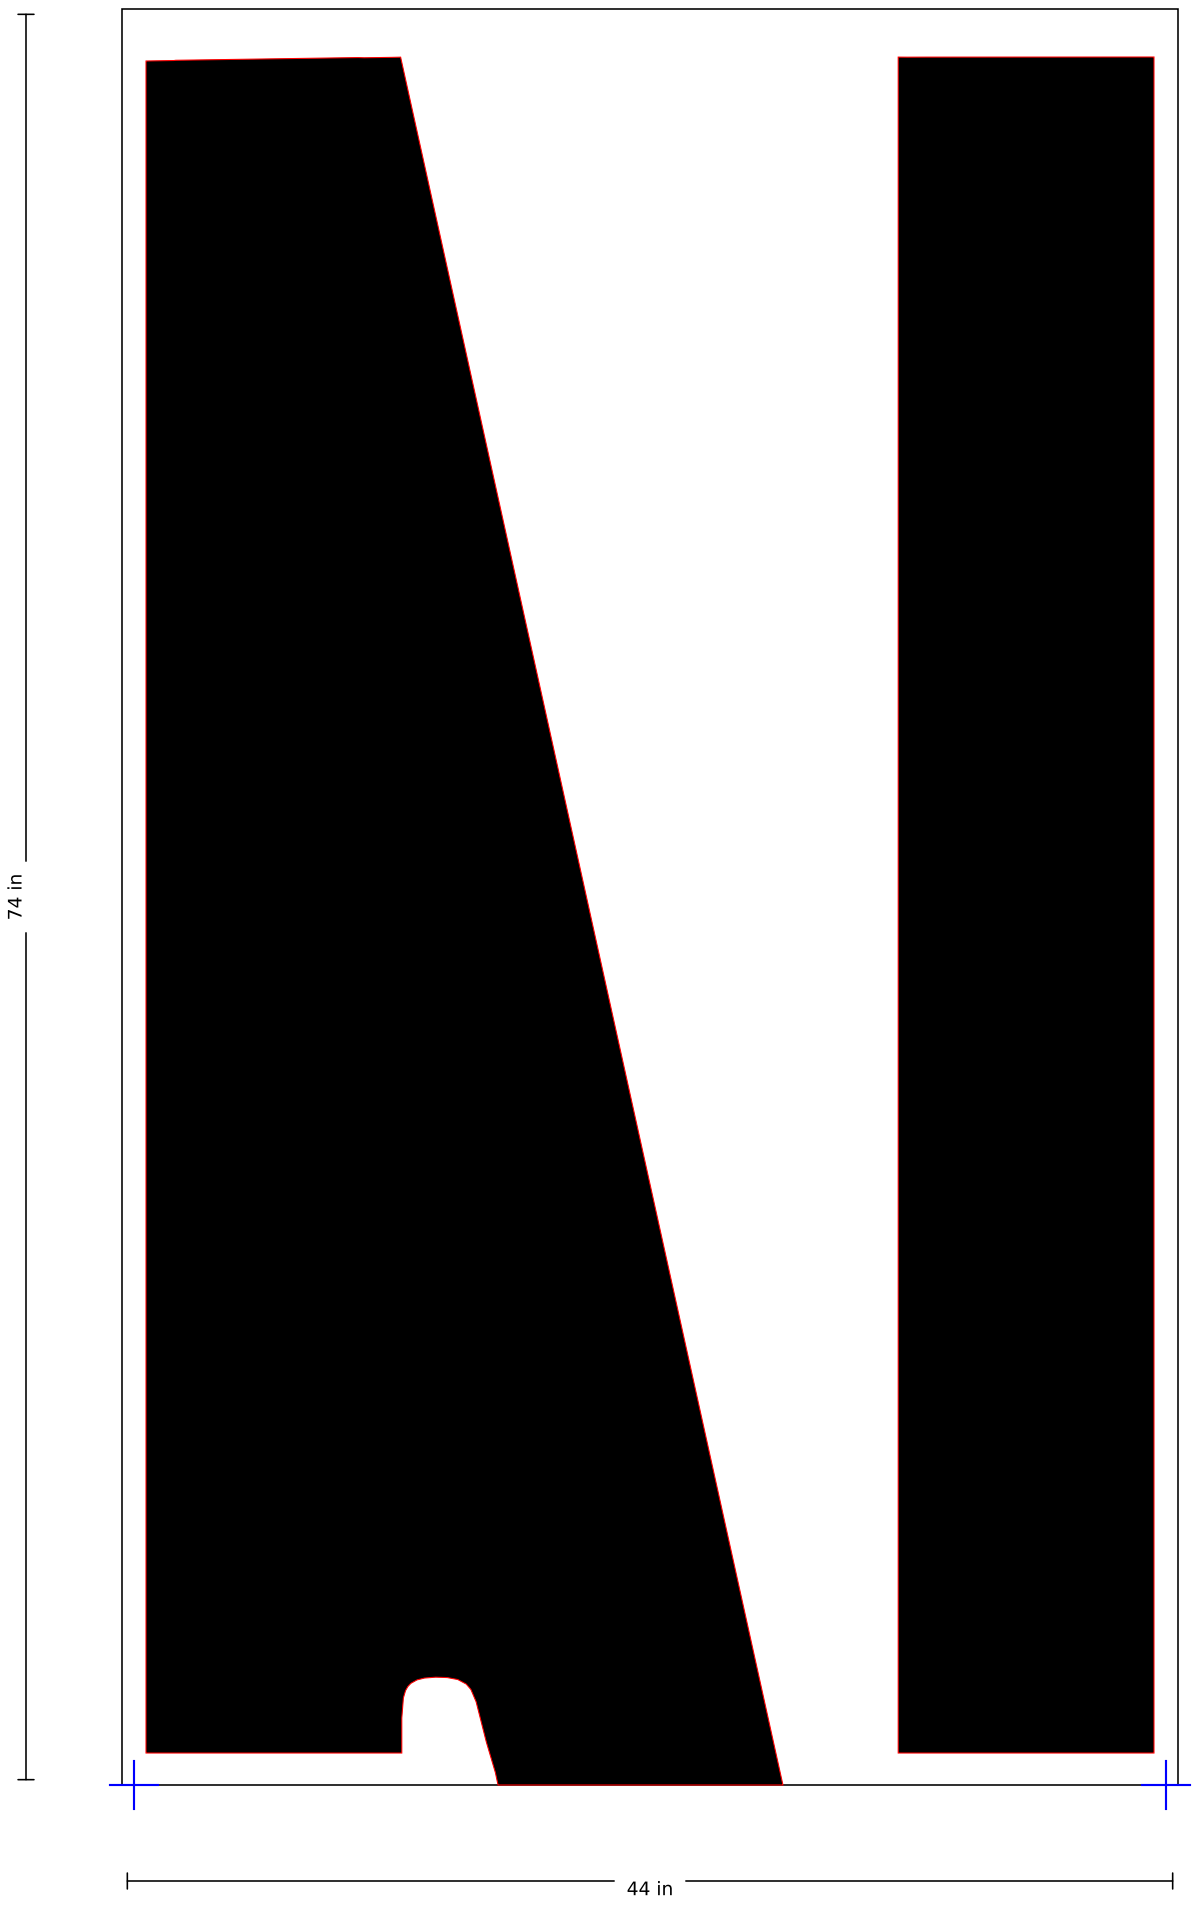

SSS-FAA-144-03-P

144" FAA Airport "P" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 42 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

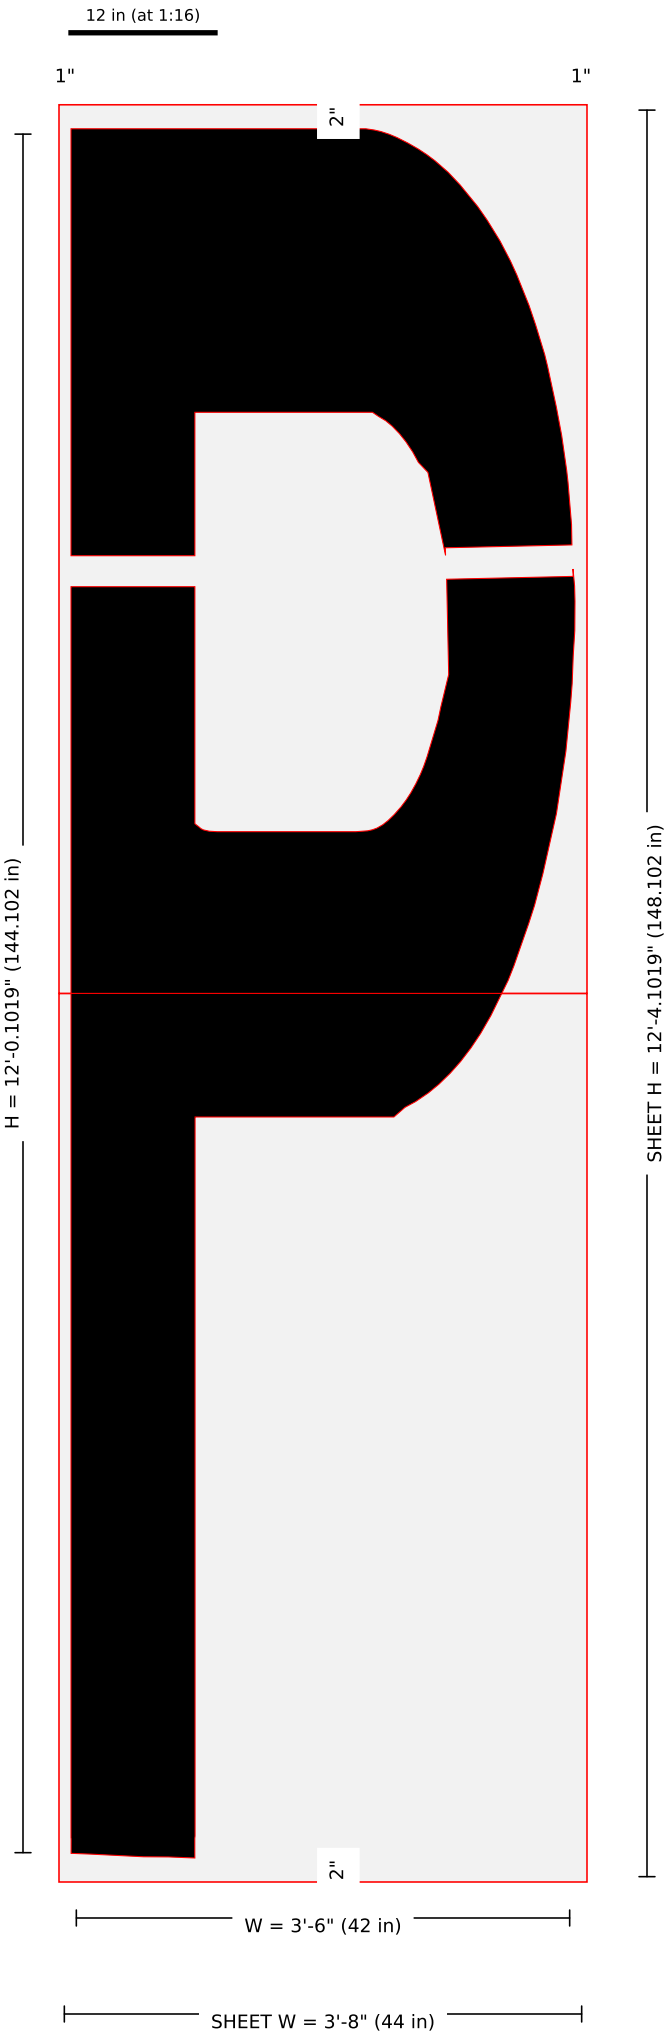

Pieces: 2 (1 x 2); blanks (in): 44 x 74.051, 44 x 74.051 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144P-144in-FAA-Airport-Letter-P-157x60-2.jpg: width = 1-800 image width label 42 in (image-scale 41.81); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (5.16,107.13) stroke 10.324" w=2.581"; (36.52,107.89) stroke 10.492" w=2.623" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-P · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

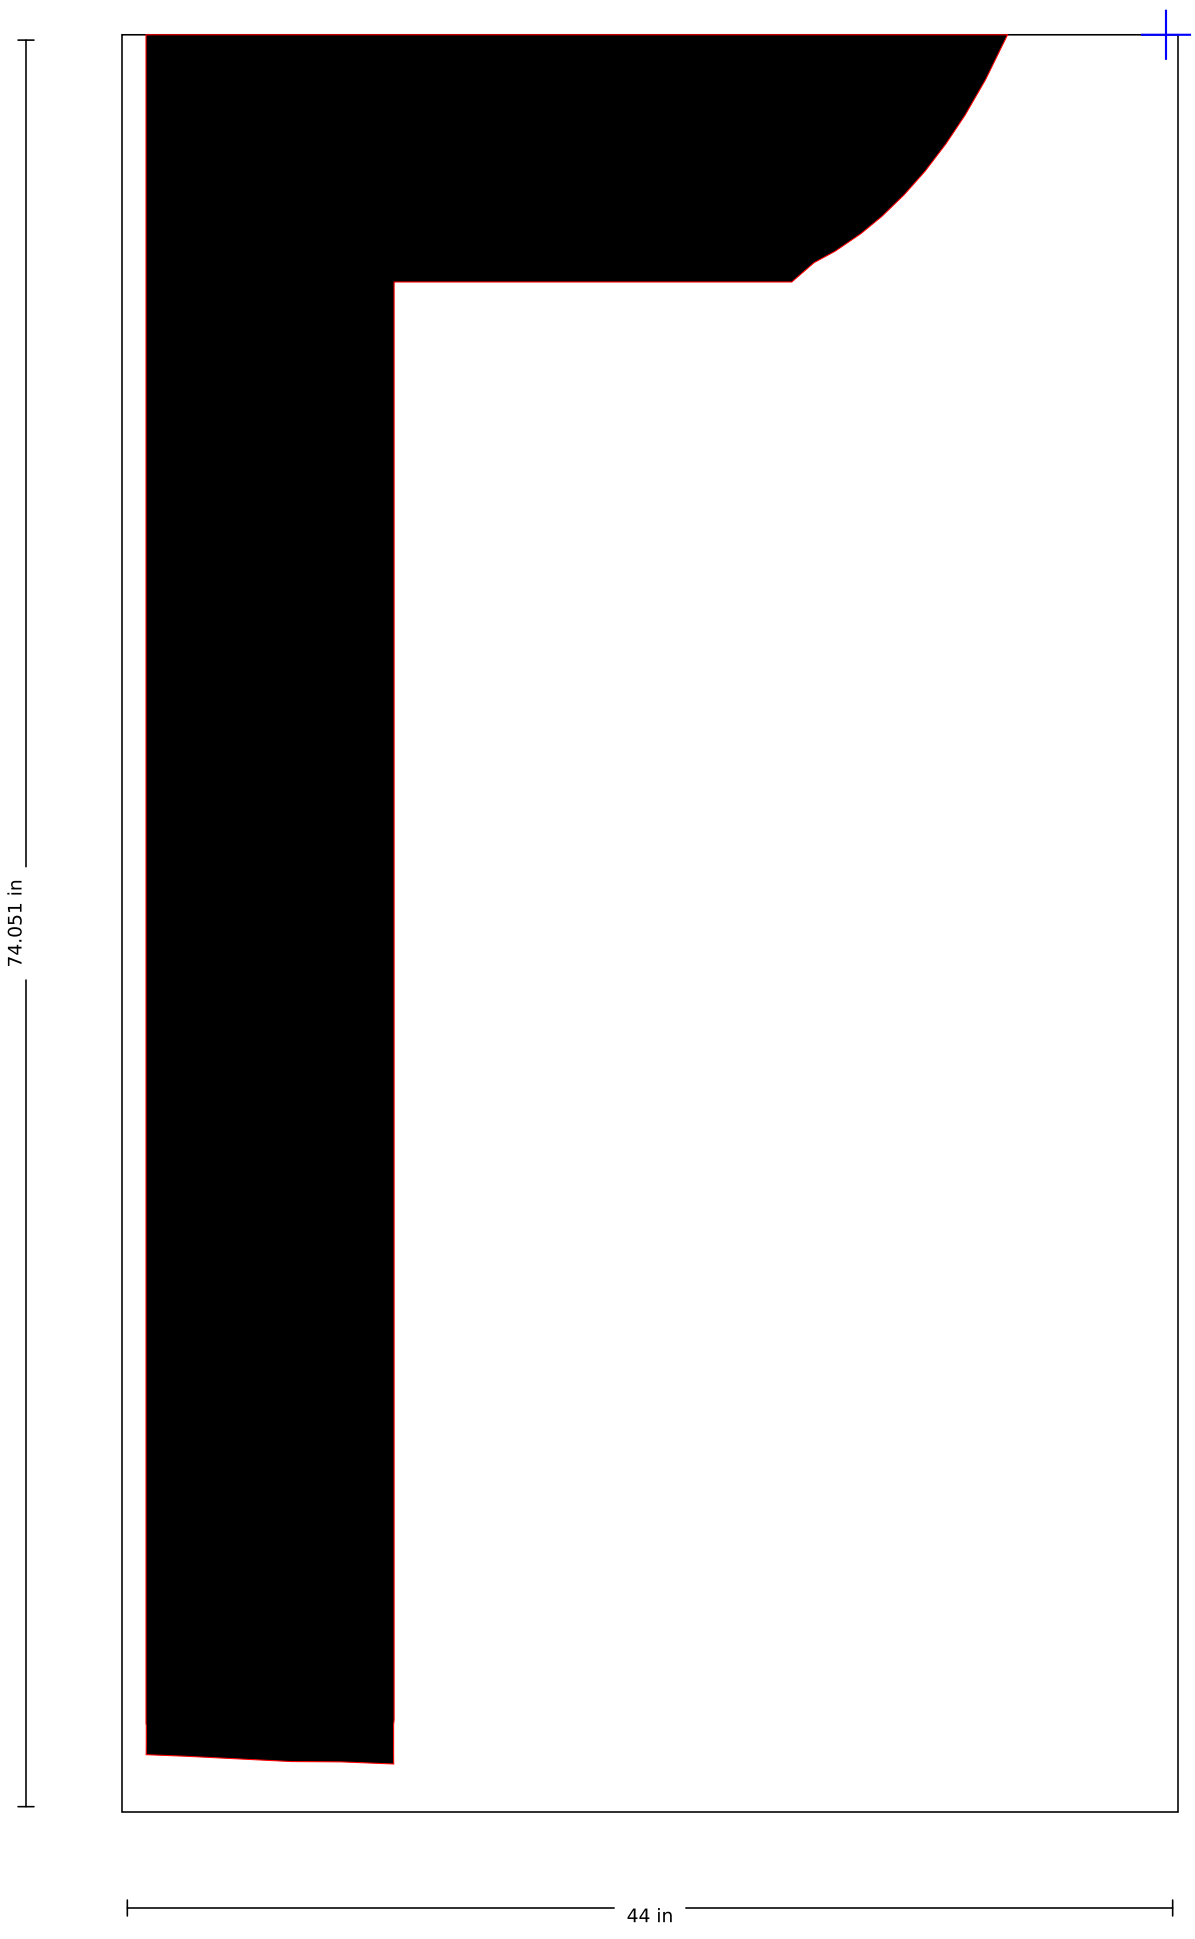

SSS-FAA-144-03-P · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

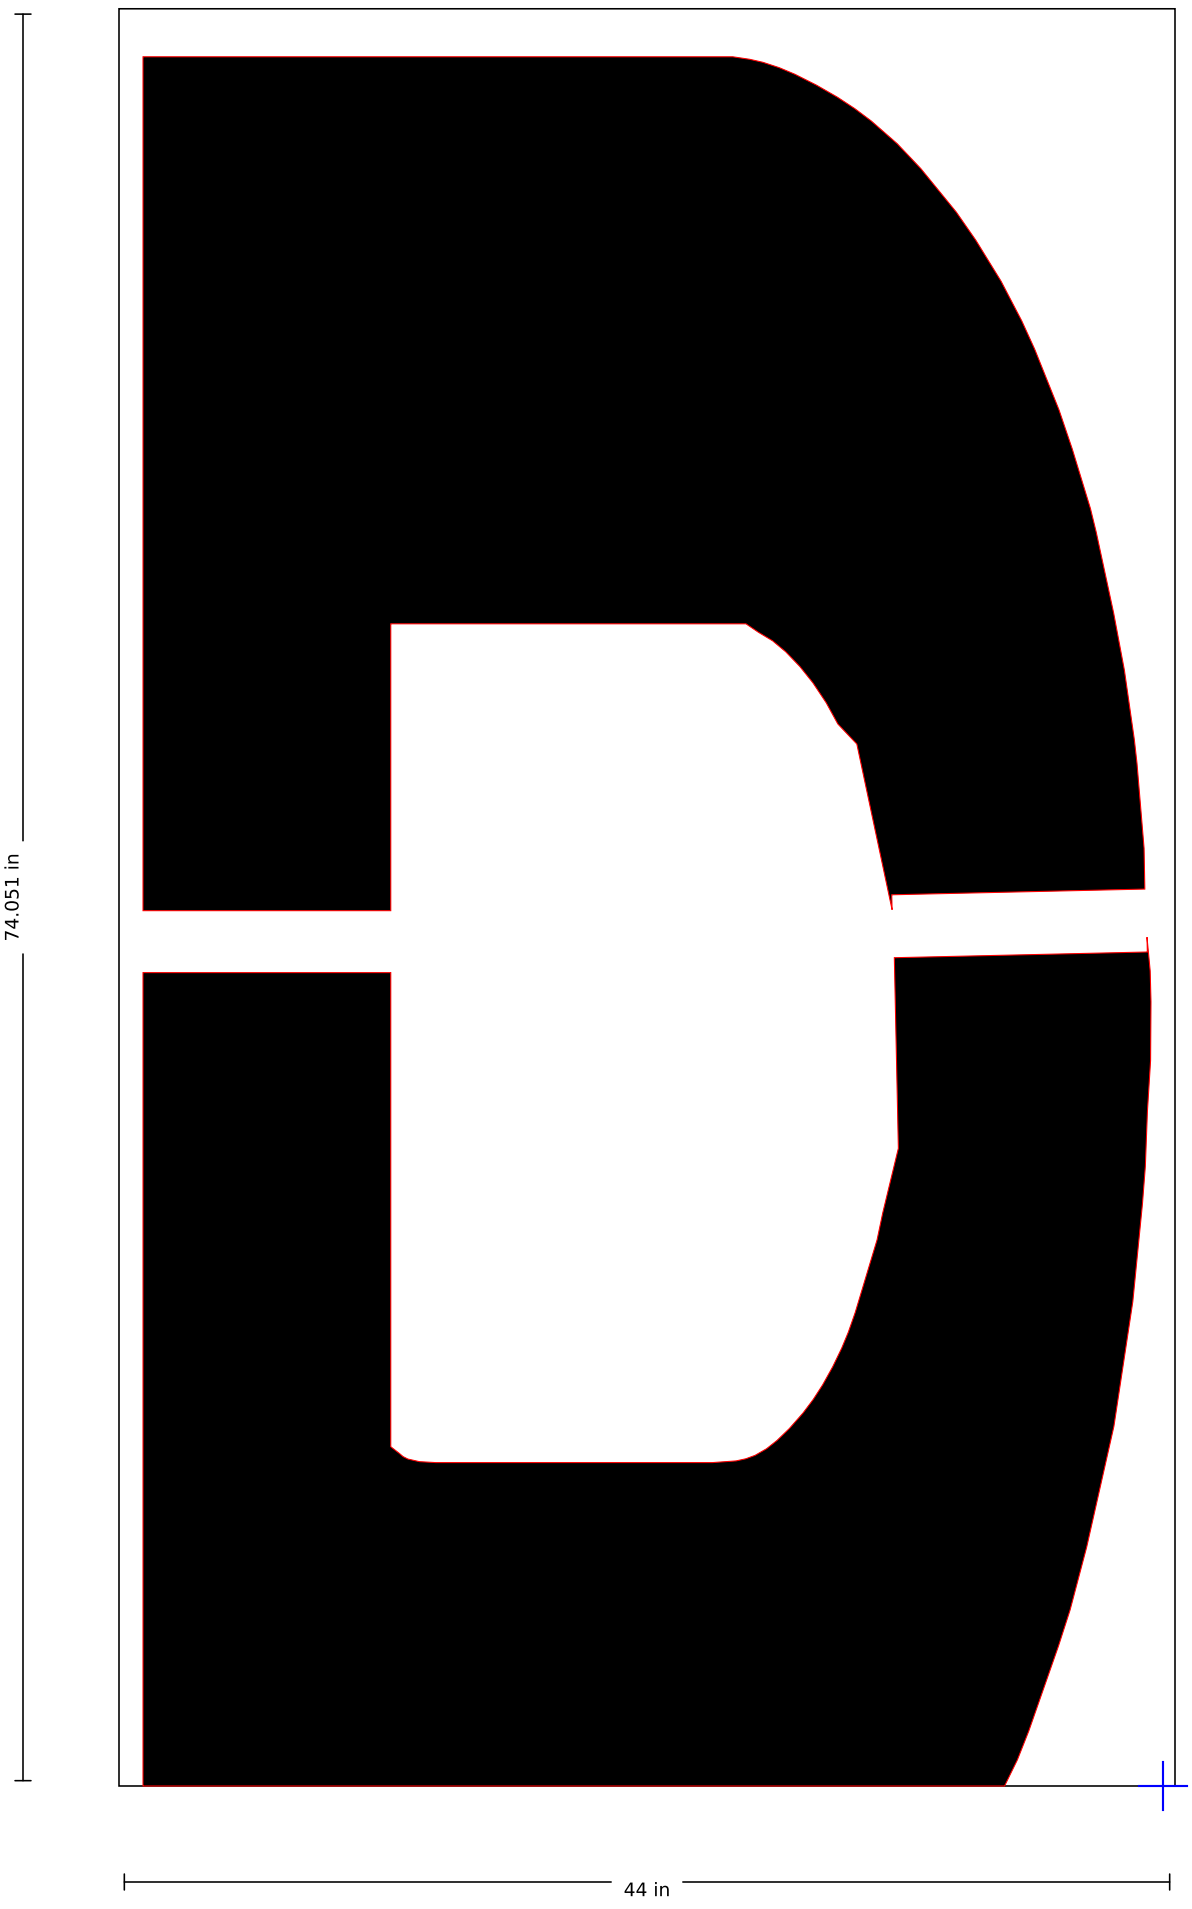

SSS-FAA-144-03-Q

144" FAA Airport "Q" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 43 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

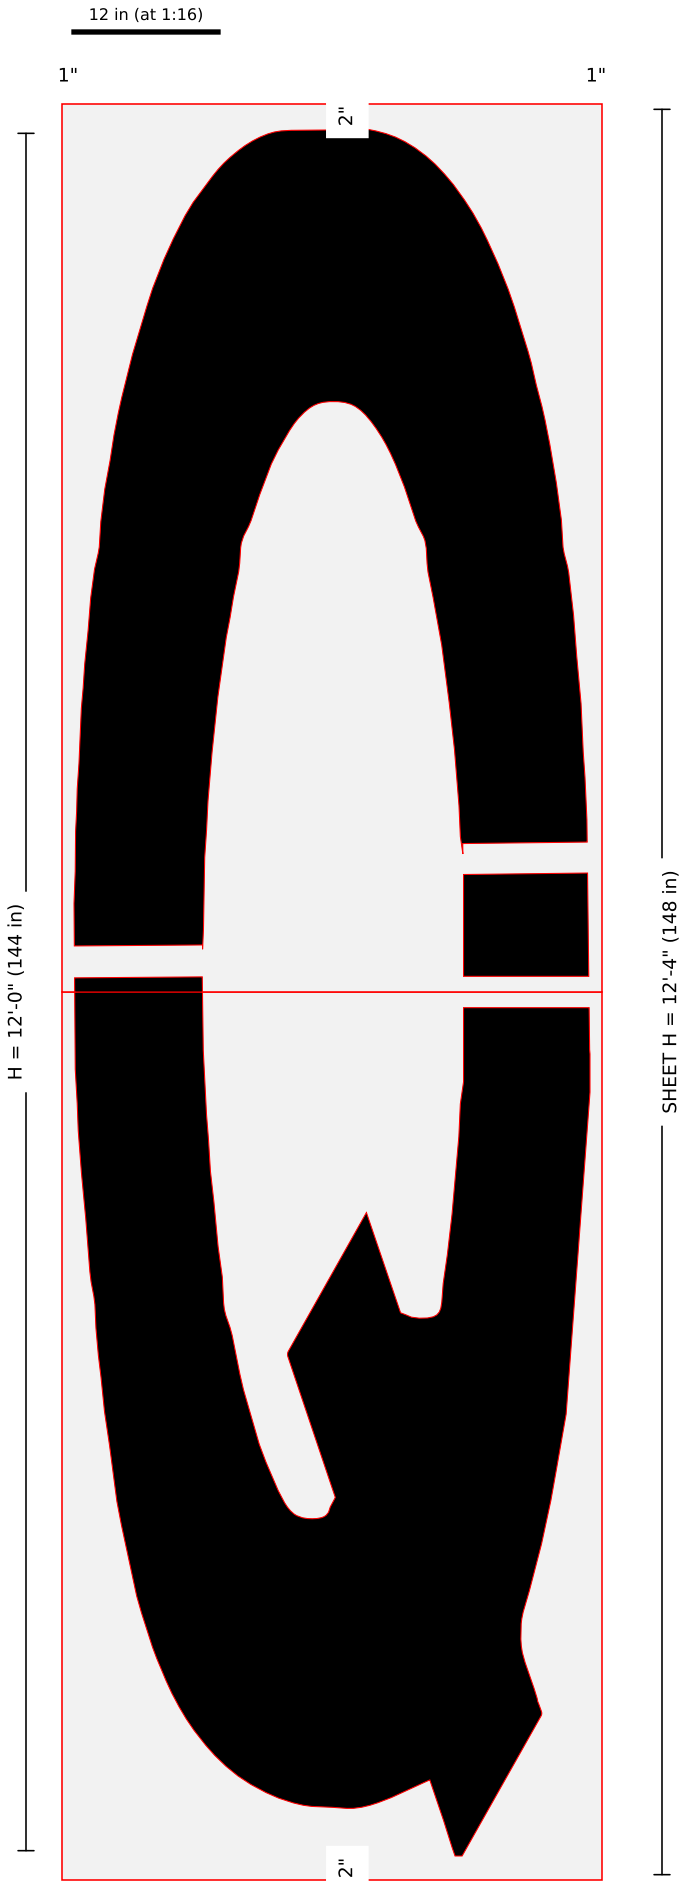

Pieces: 2 (1 x 2); blanks (in): 45 x 74, 45 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144Q-144in-FAA-Airport-Letter-Q-157x60-2.jpg: width = 1-800 image width label 43 in (image-scale 42.73); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
CORNERS REBUILT (corner triage r5, 2026-11-04): 8 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
ISLAND BRIDGES (2026-11-04): (37.62,83.14) stroke 10.32" w=2.58"; (5.35,74.55) stroke 10.635" w=2.659" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-Q · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

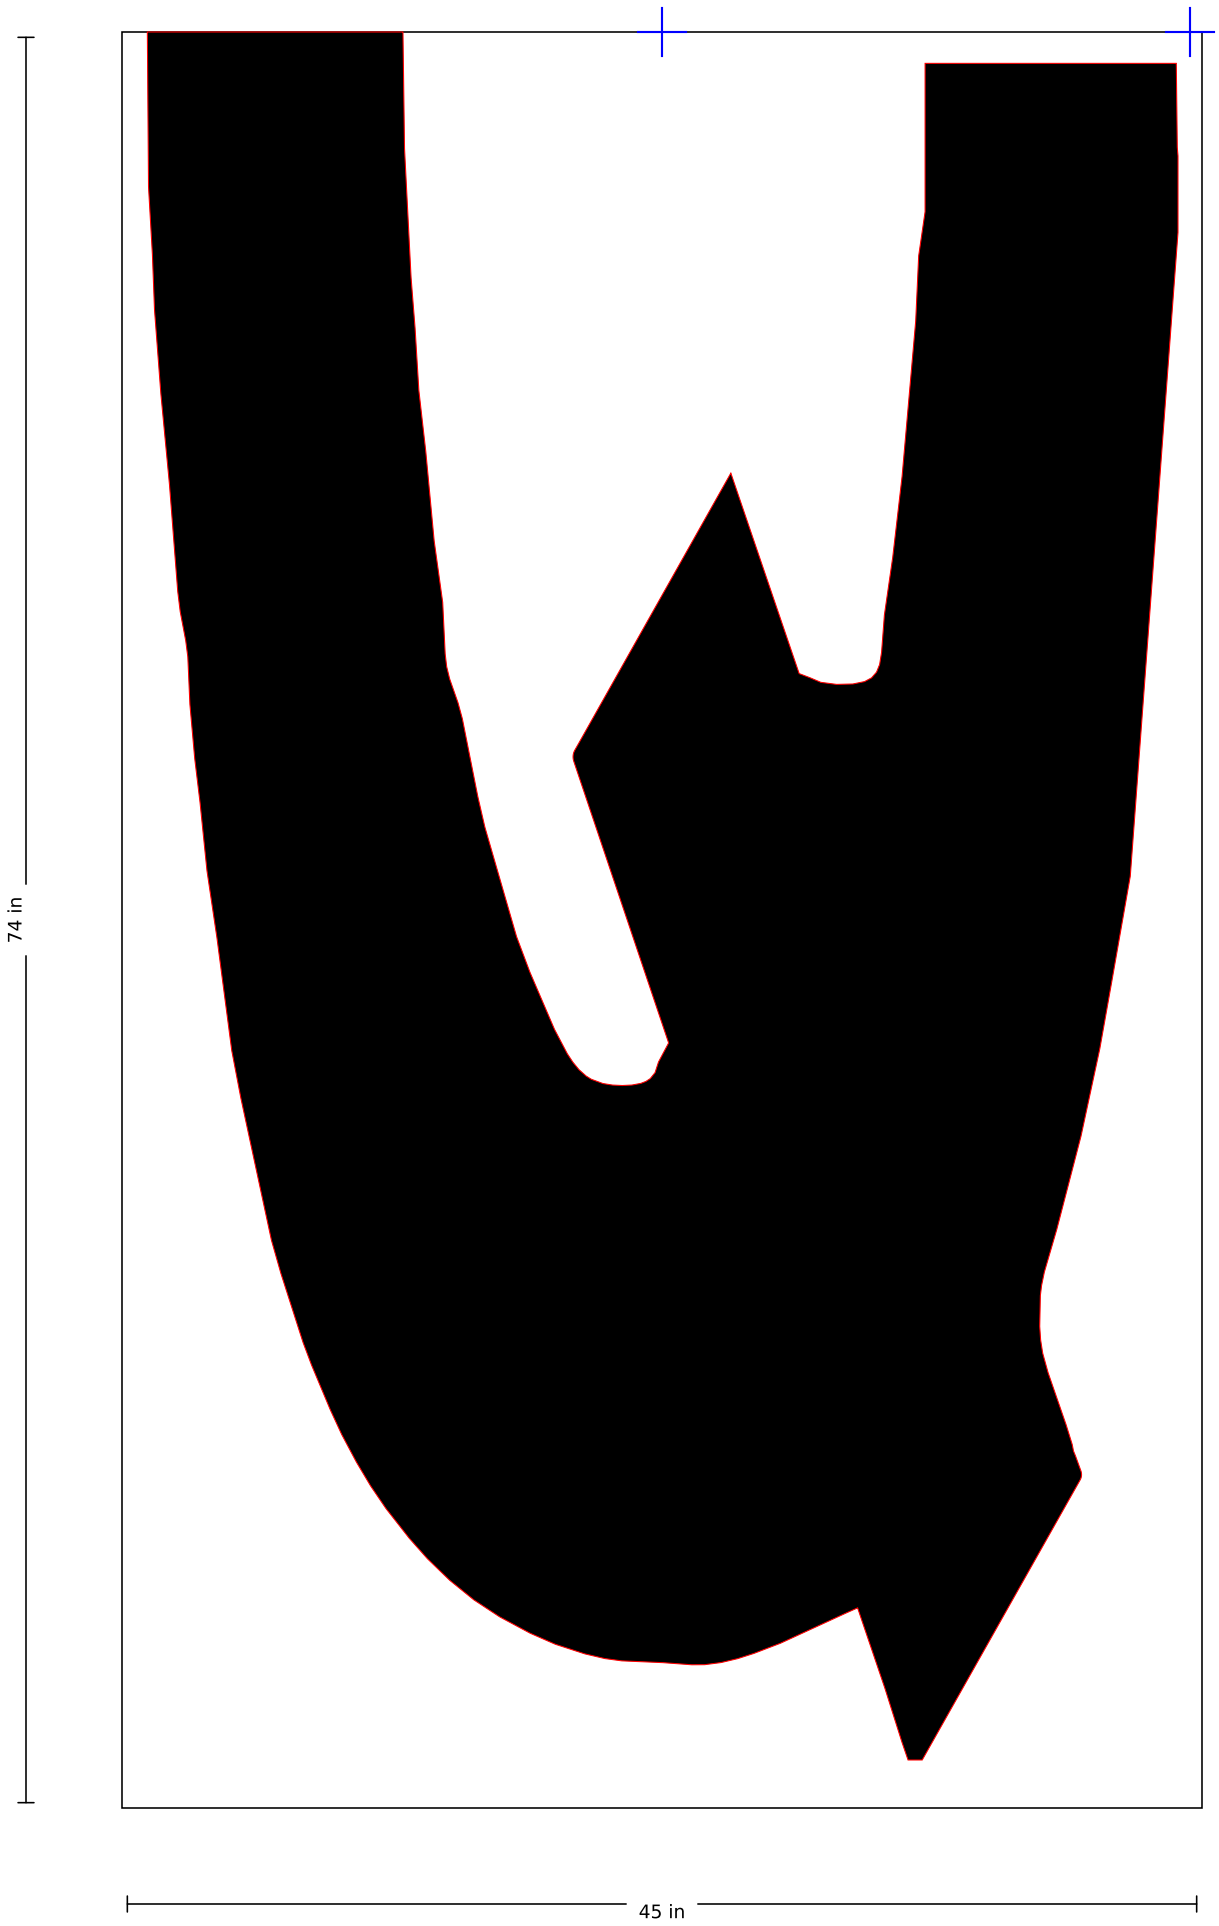

SSS-FAA-144-03-Q · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

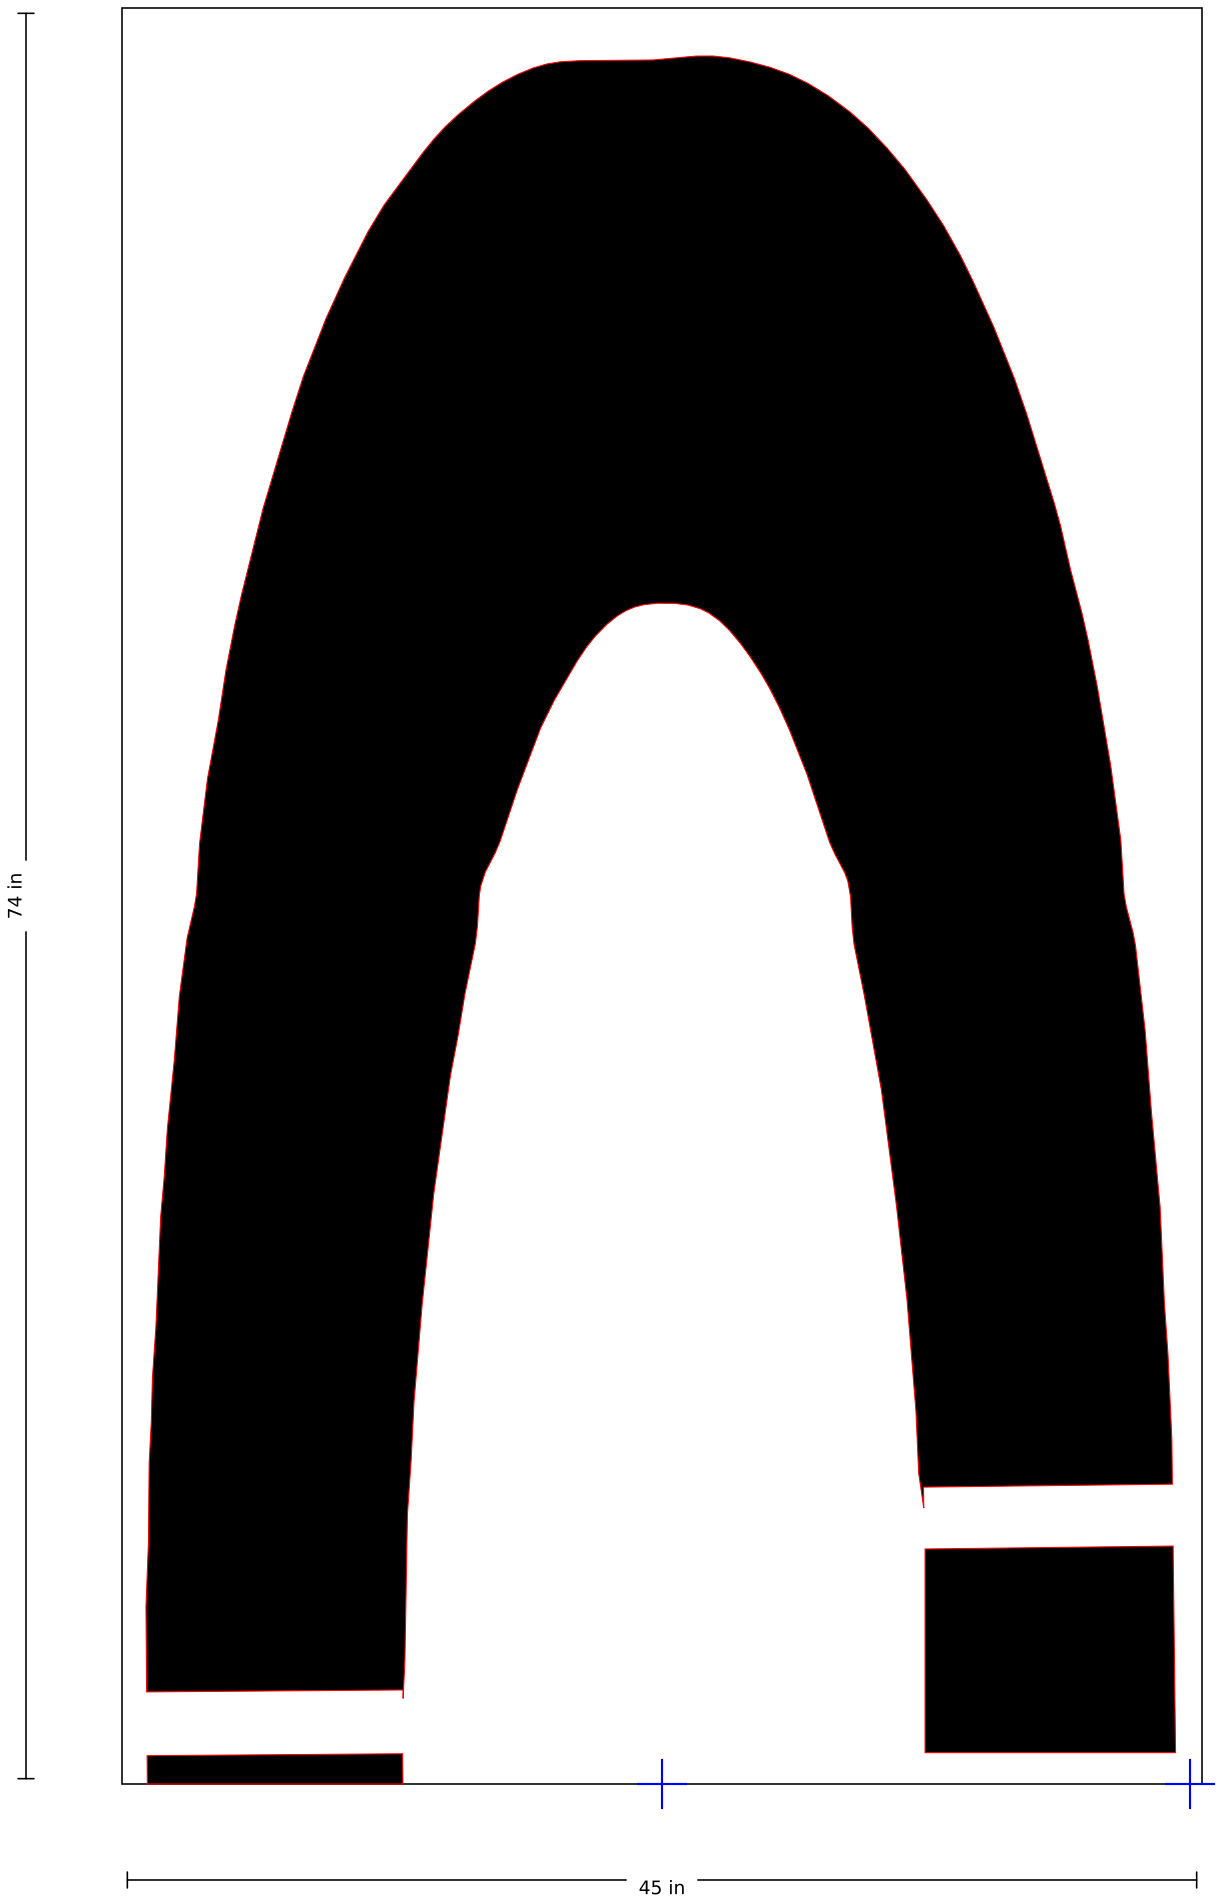

SSS-FAA-144-03-T

144" FAA Airport "T" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 38 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

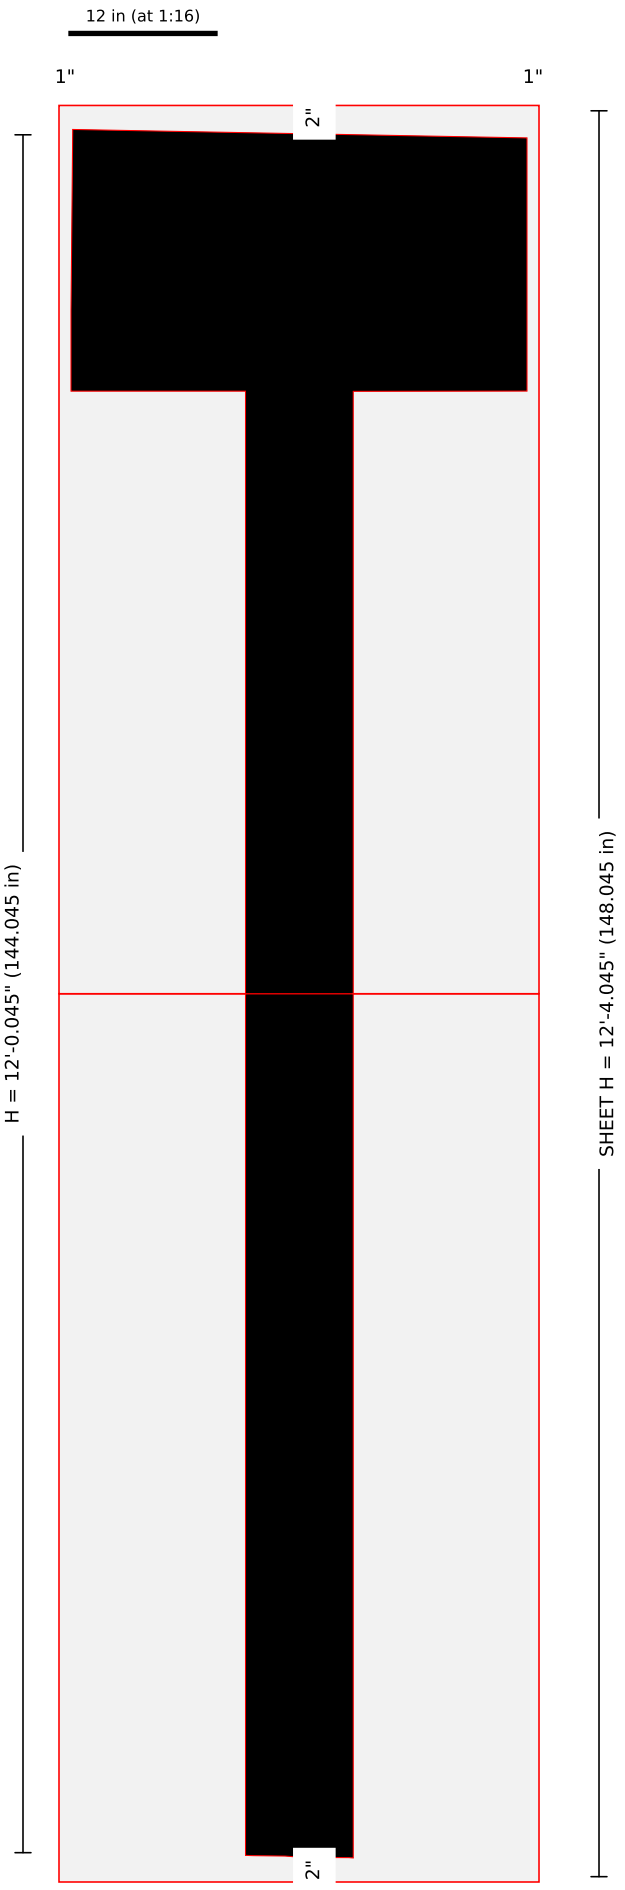

Pieces: 2 (1 x 2); blanks (in): 40.001 x 74.022, 40.001 x 74.022 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144T-144in-FAA-Airport-Letter-T-157x60-2.jpg: width = 1-800 image width label 38 in (image-scale 38.26); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.29 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-144-03-T · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

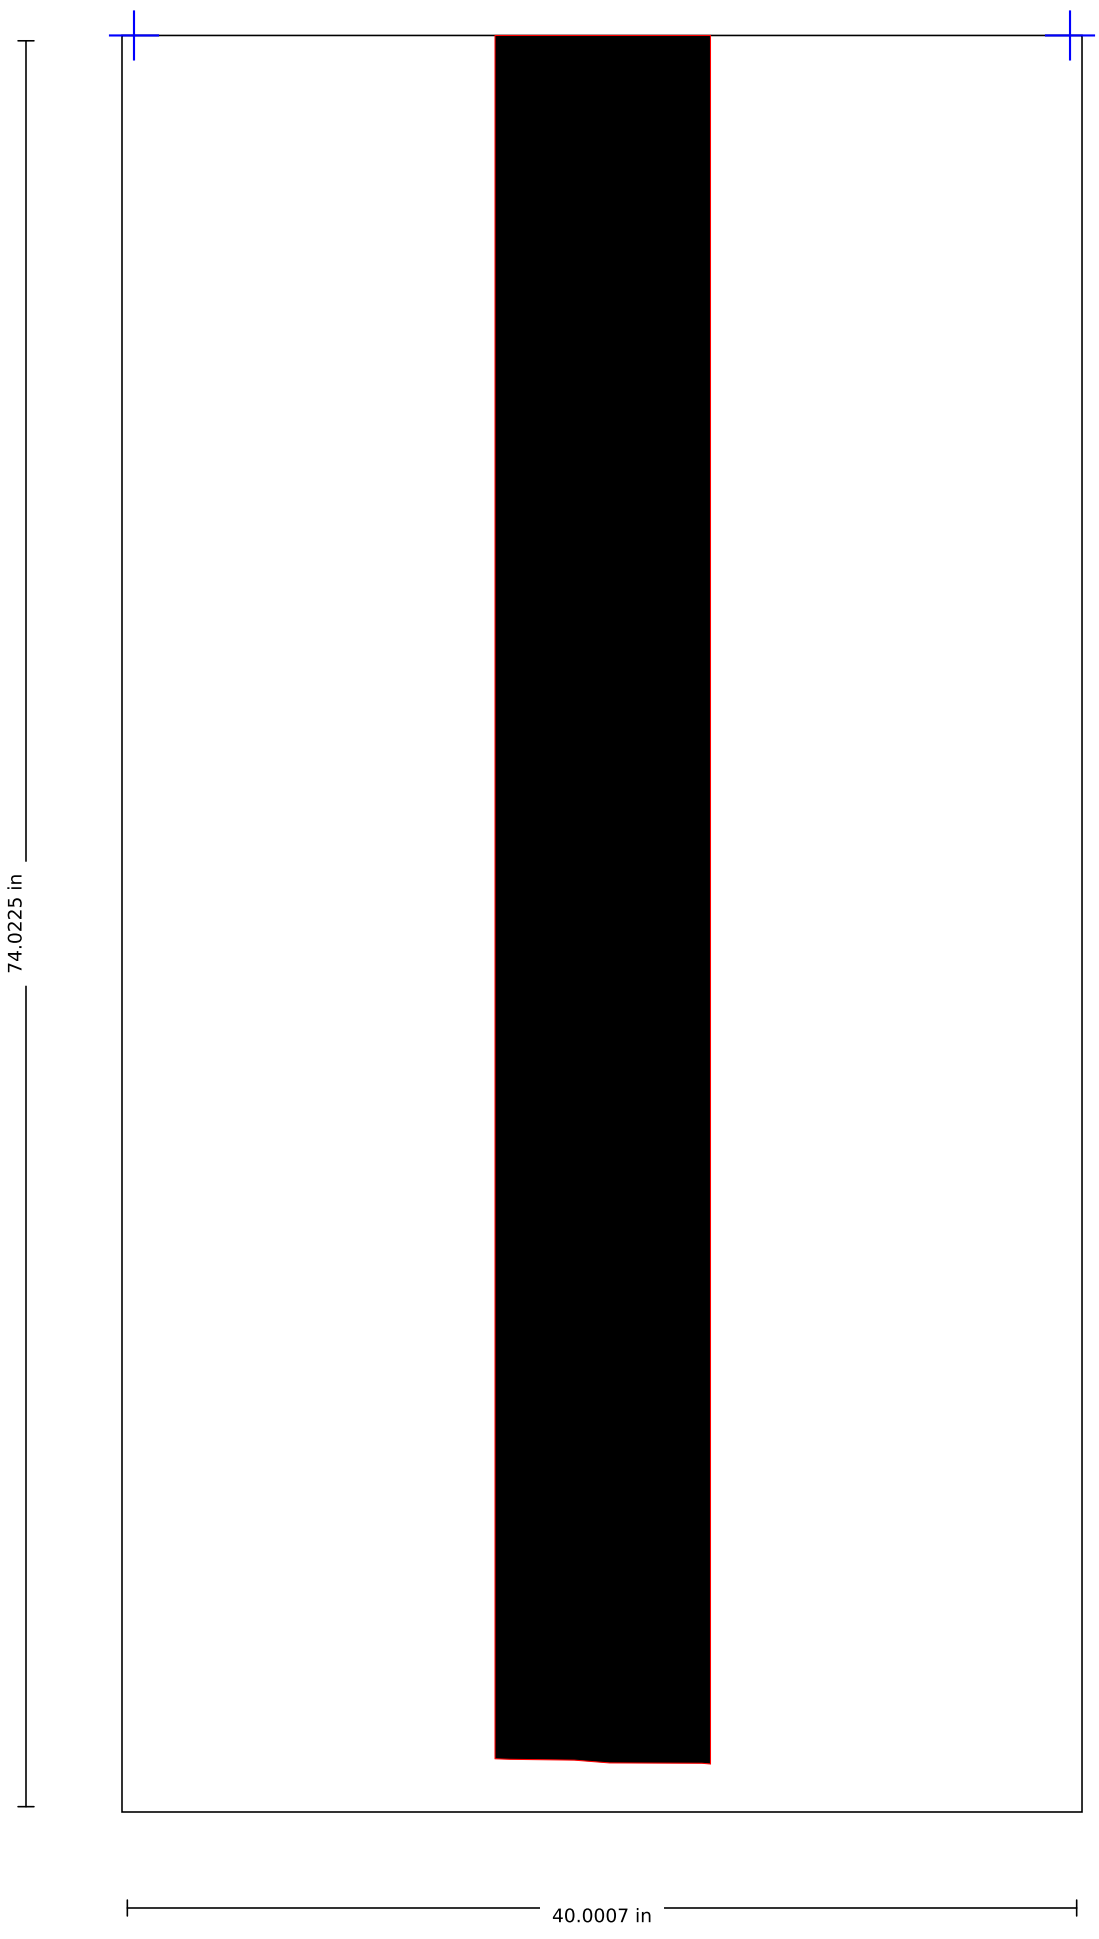

SSS-FAA-144-03-T · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

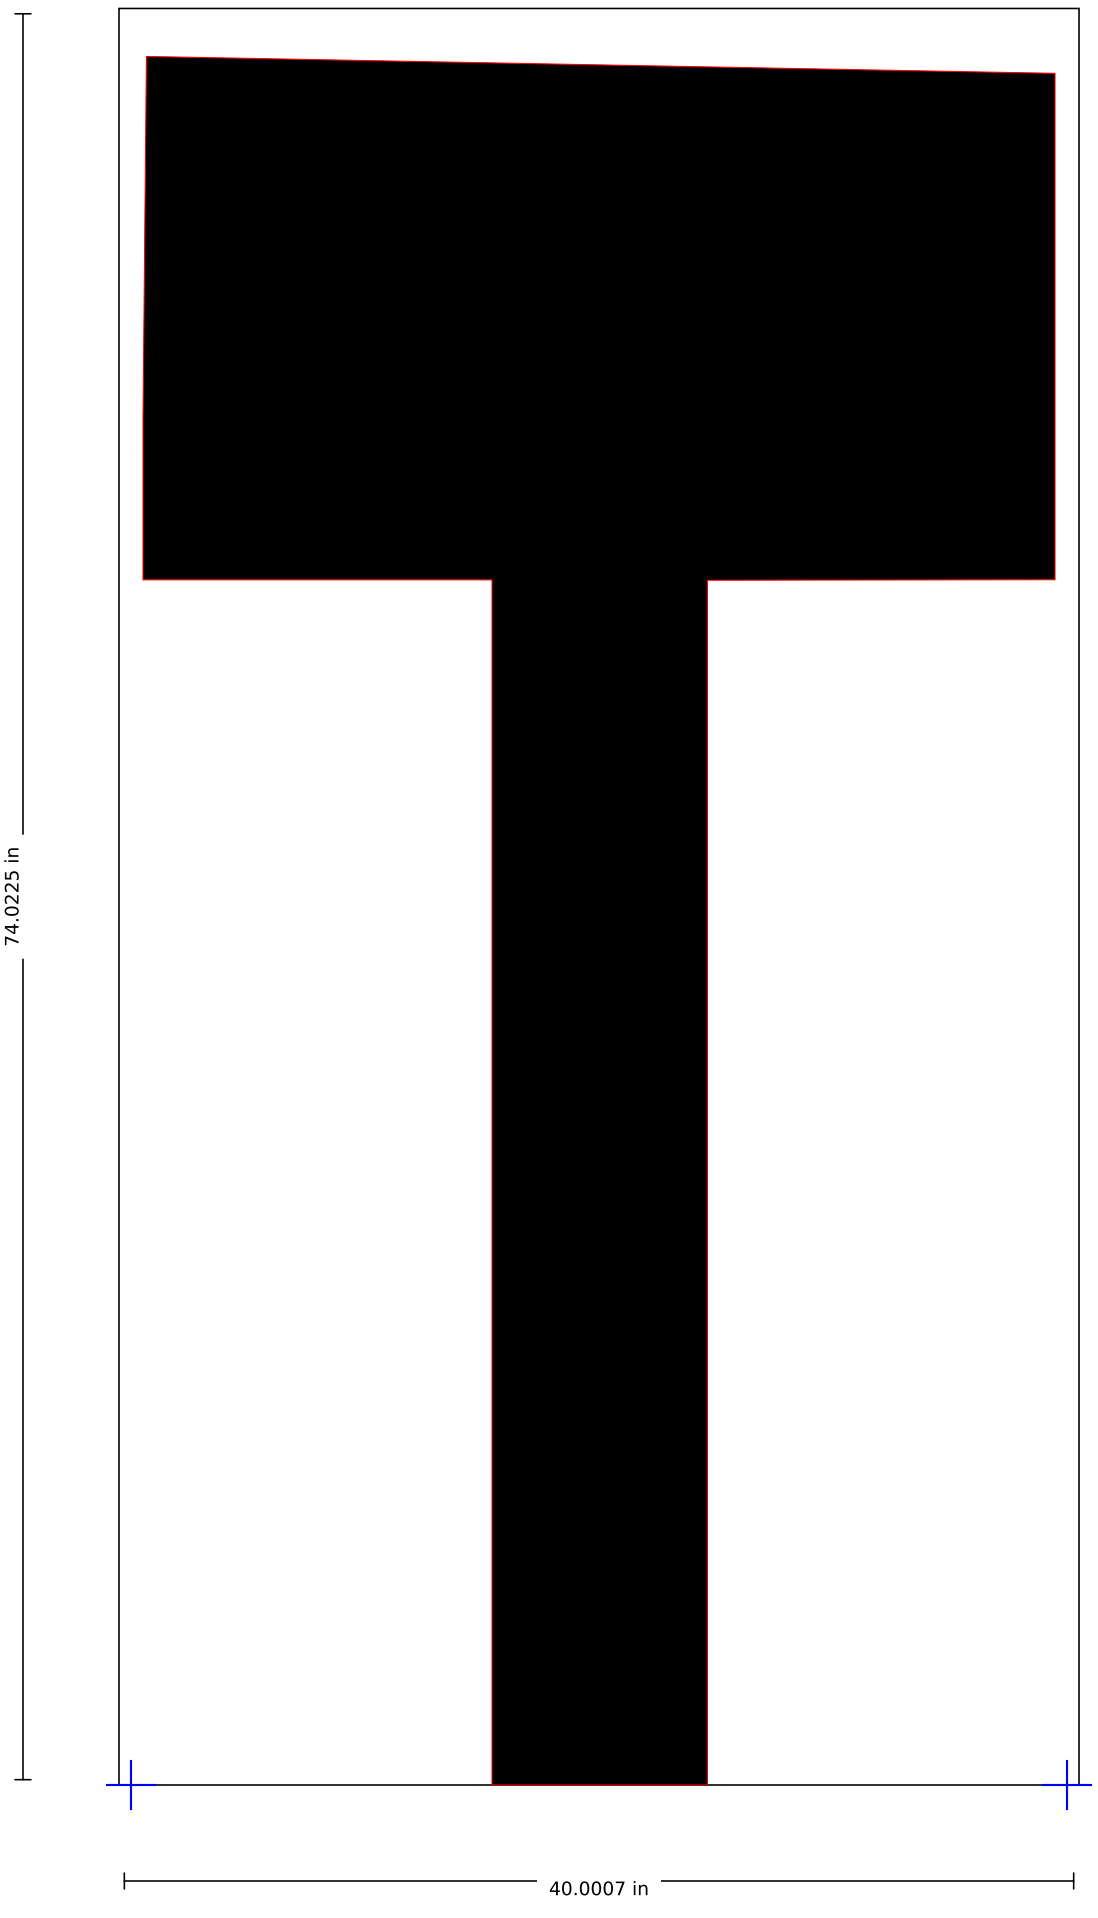

SSS-FAA-144-03-U

144" FAA Airport "U" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 45 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

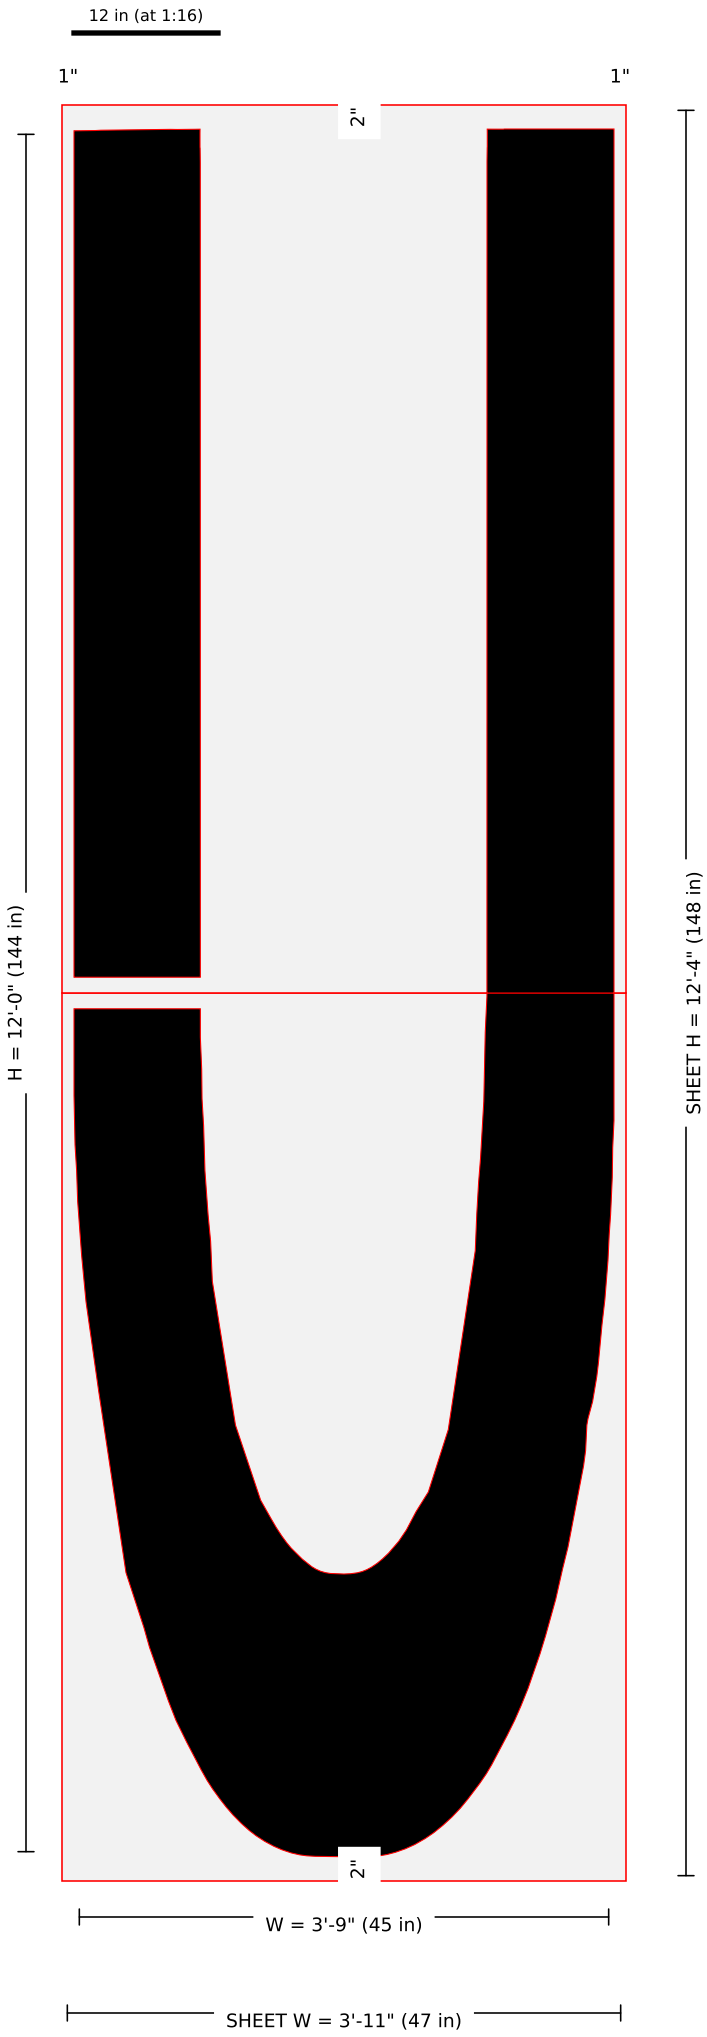

Pieces: 2 (1 x 2); blanks (in): 47 x 74, 47 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144U-144in-FAA-Airport-Letter-U-157x60-2.jpg: width = 1-800 image width label 45 in (image-scale 44.48); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 1 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-U · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

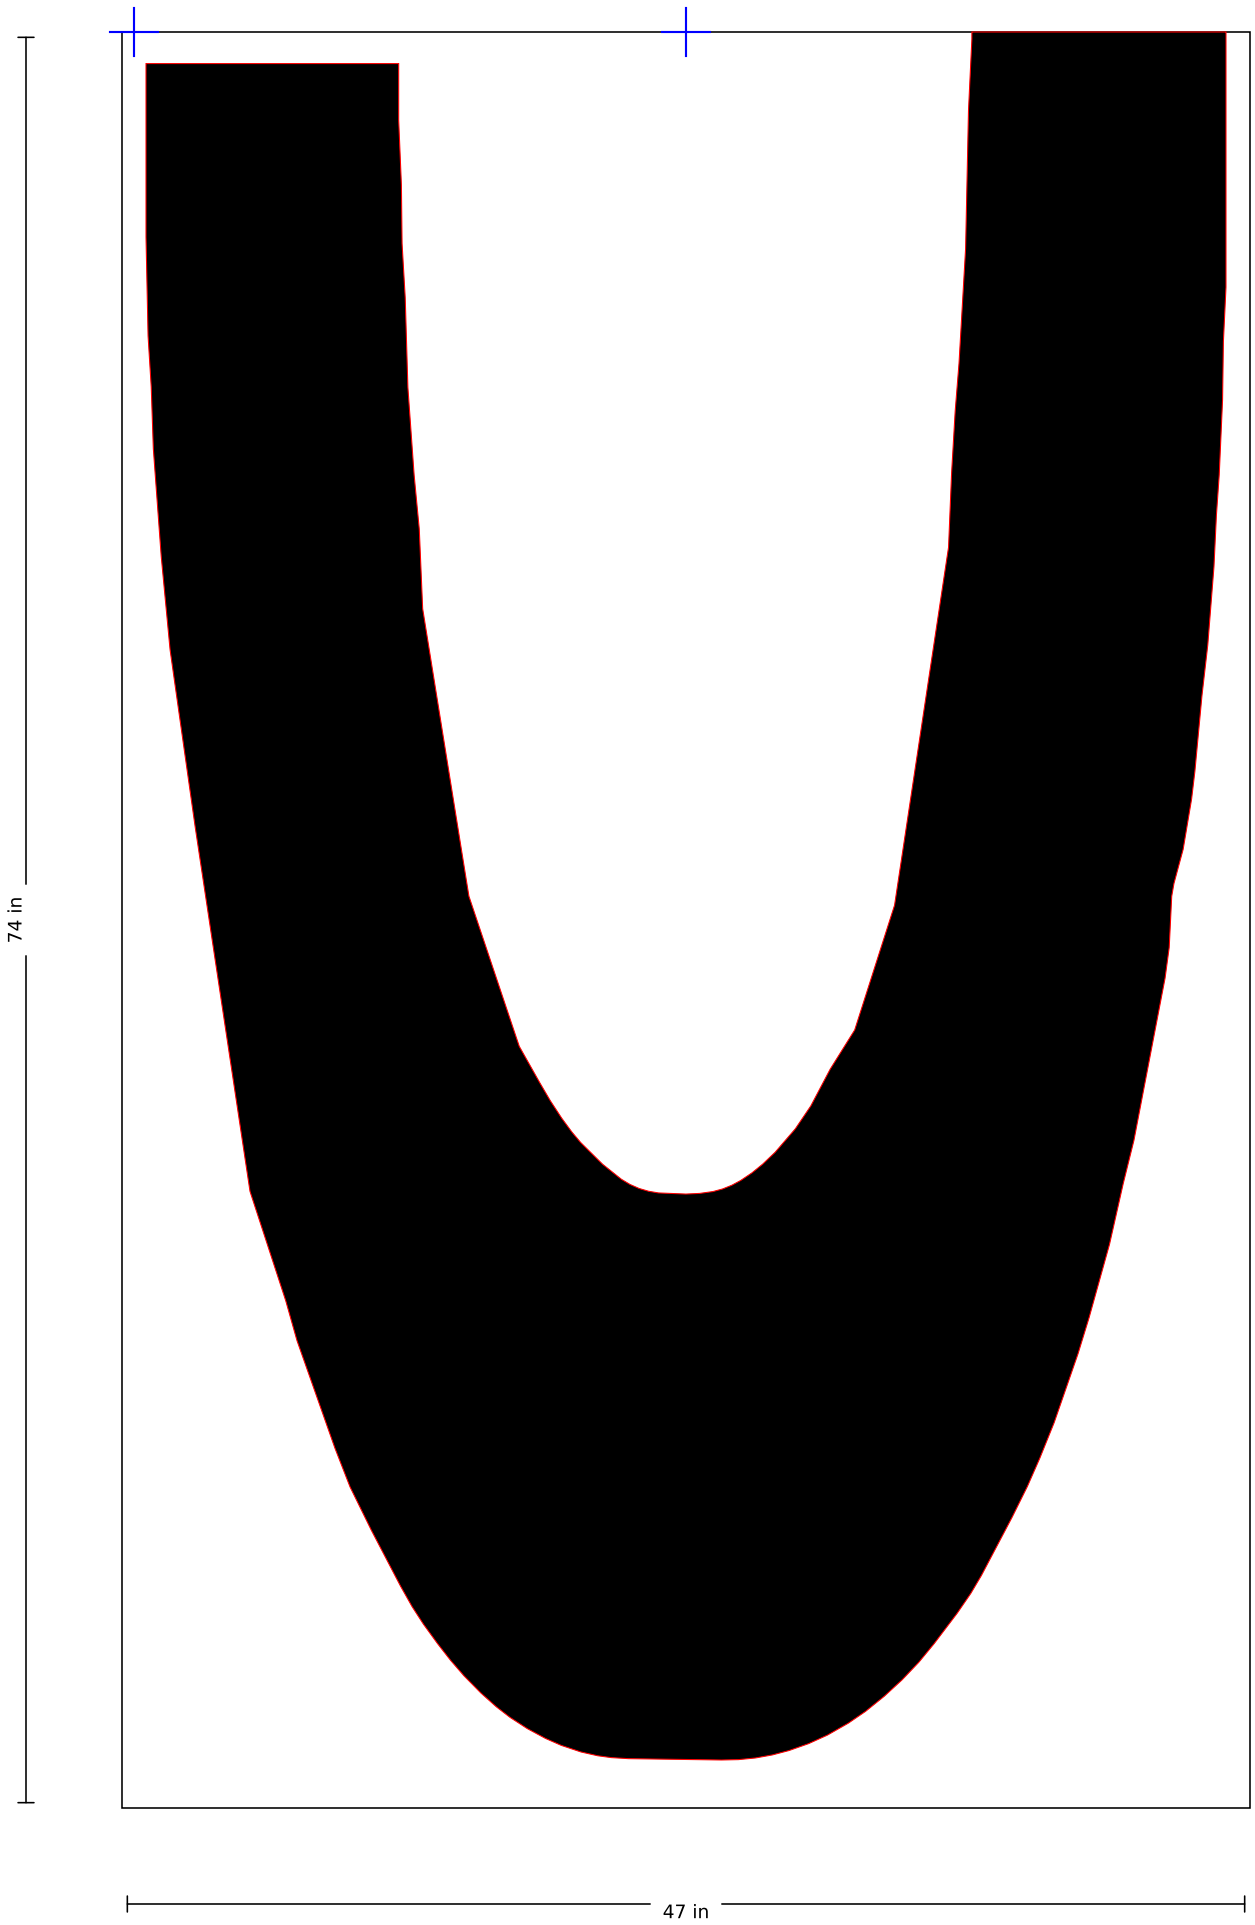

SSS-FAA-144-03-U · piece 2 of 2 (col 1, row 2 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

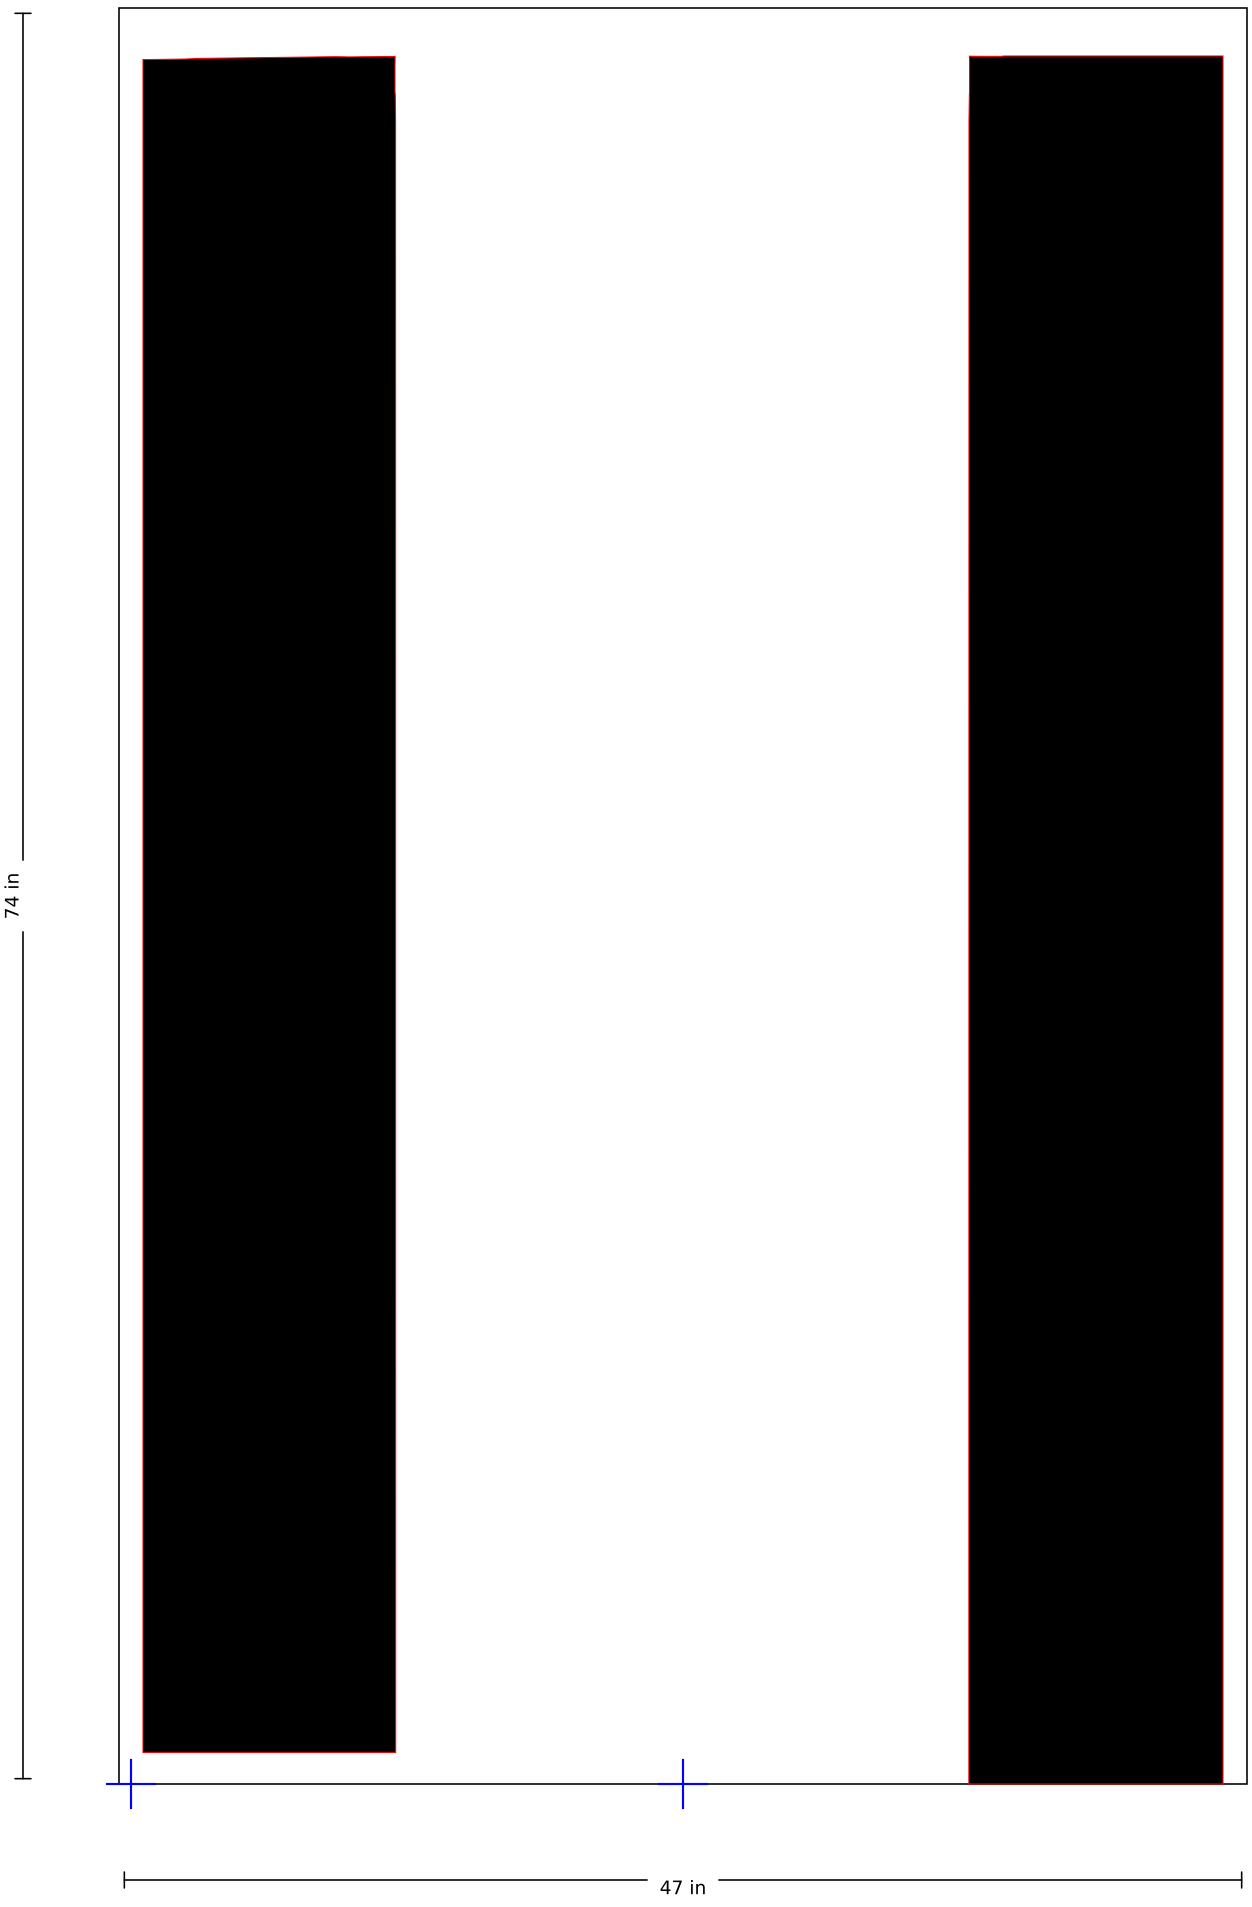

SSS-FAA-144-03-V

144" FAA Airport "V" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 49 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

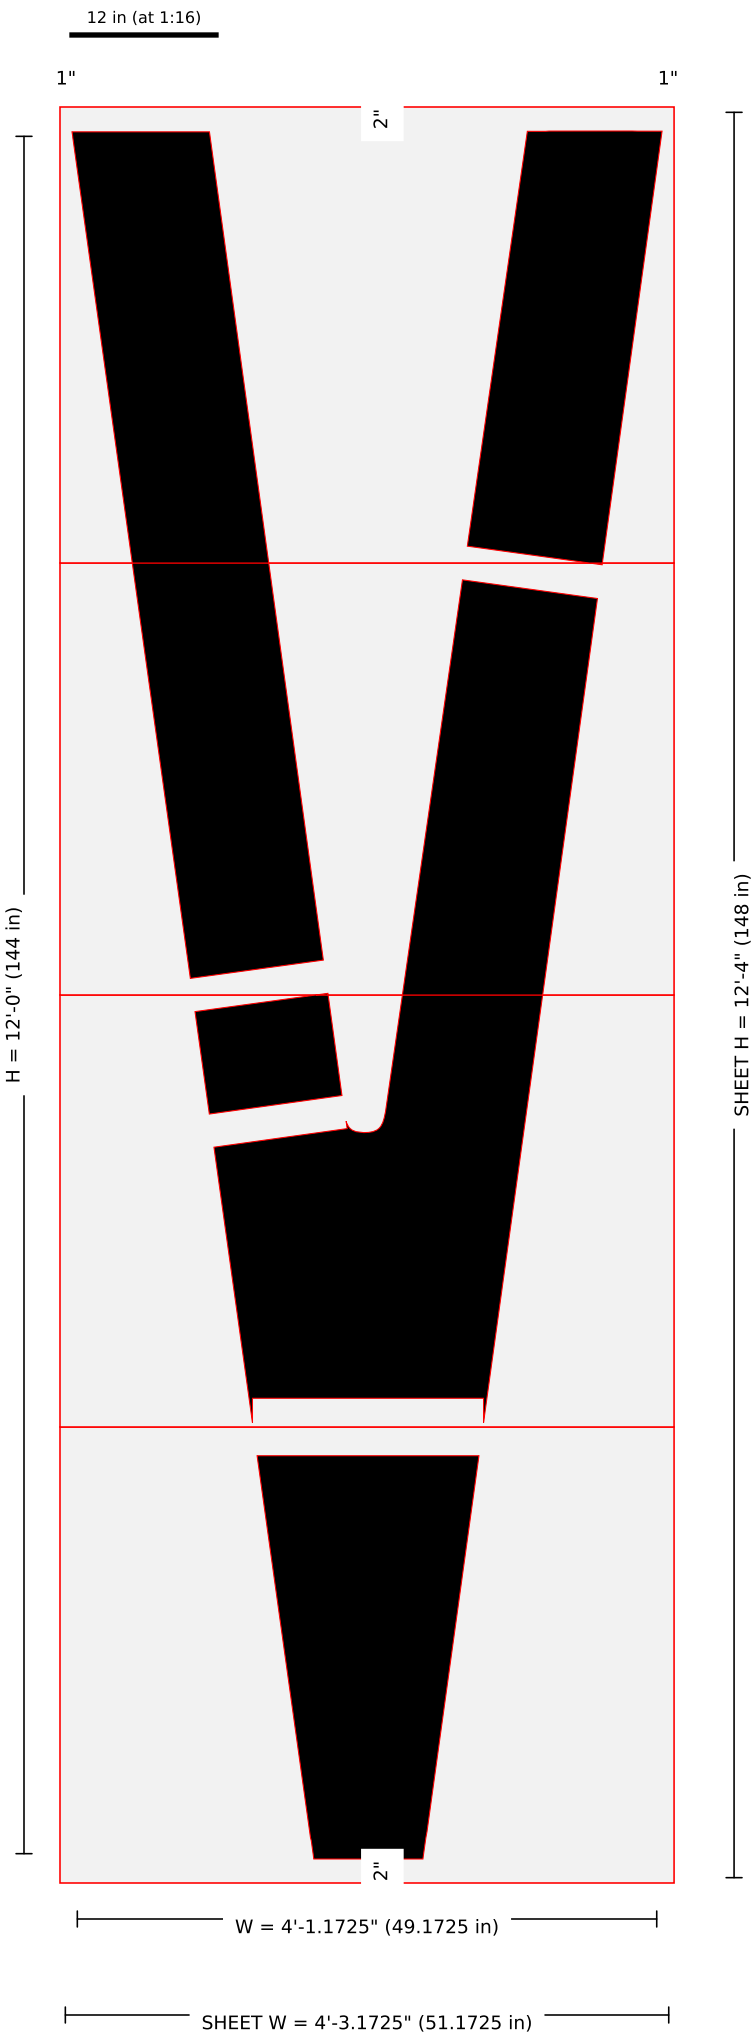

Pieces: 4 (1 x 4); blanks (in): 51.172 x 38, 51.172 x 36, 51.172 x 36, 51.172 x 38 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144V-144in-FAA-Airport-Letter-V-157x60-2.jpg: width = 1-800 image width label 49 in (image-scale 48.42); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 4 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-V · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

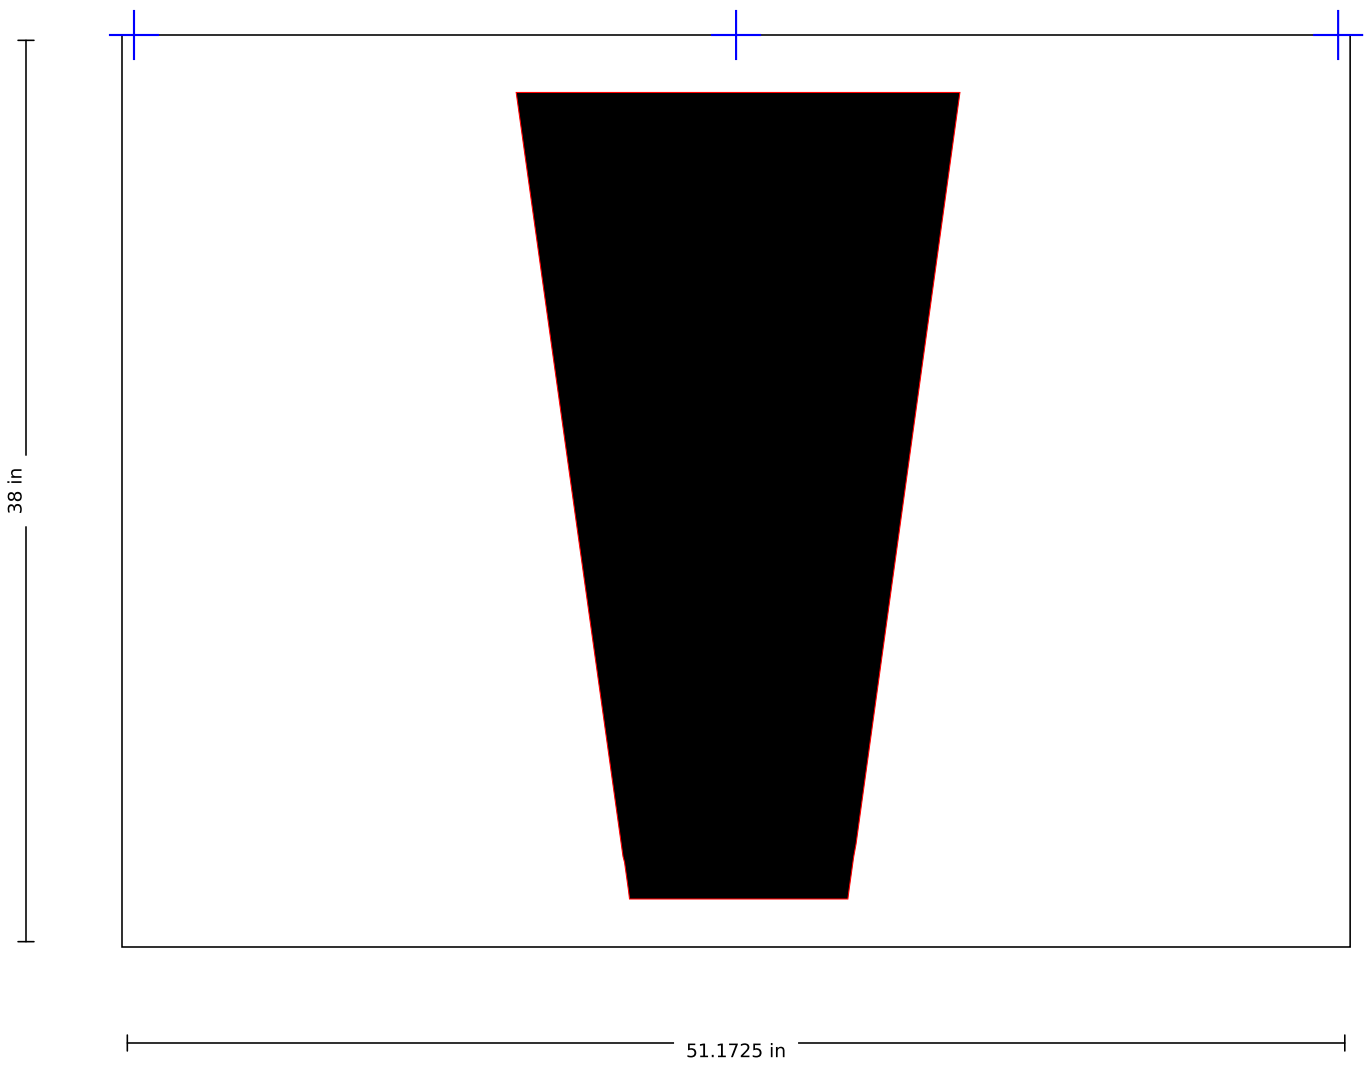


SSS-FAA-144-03-V · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

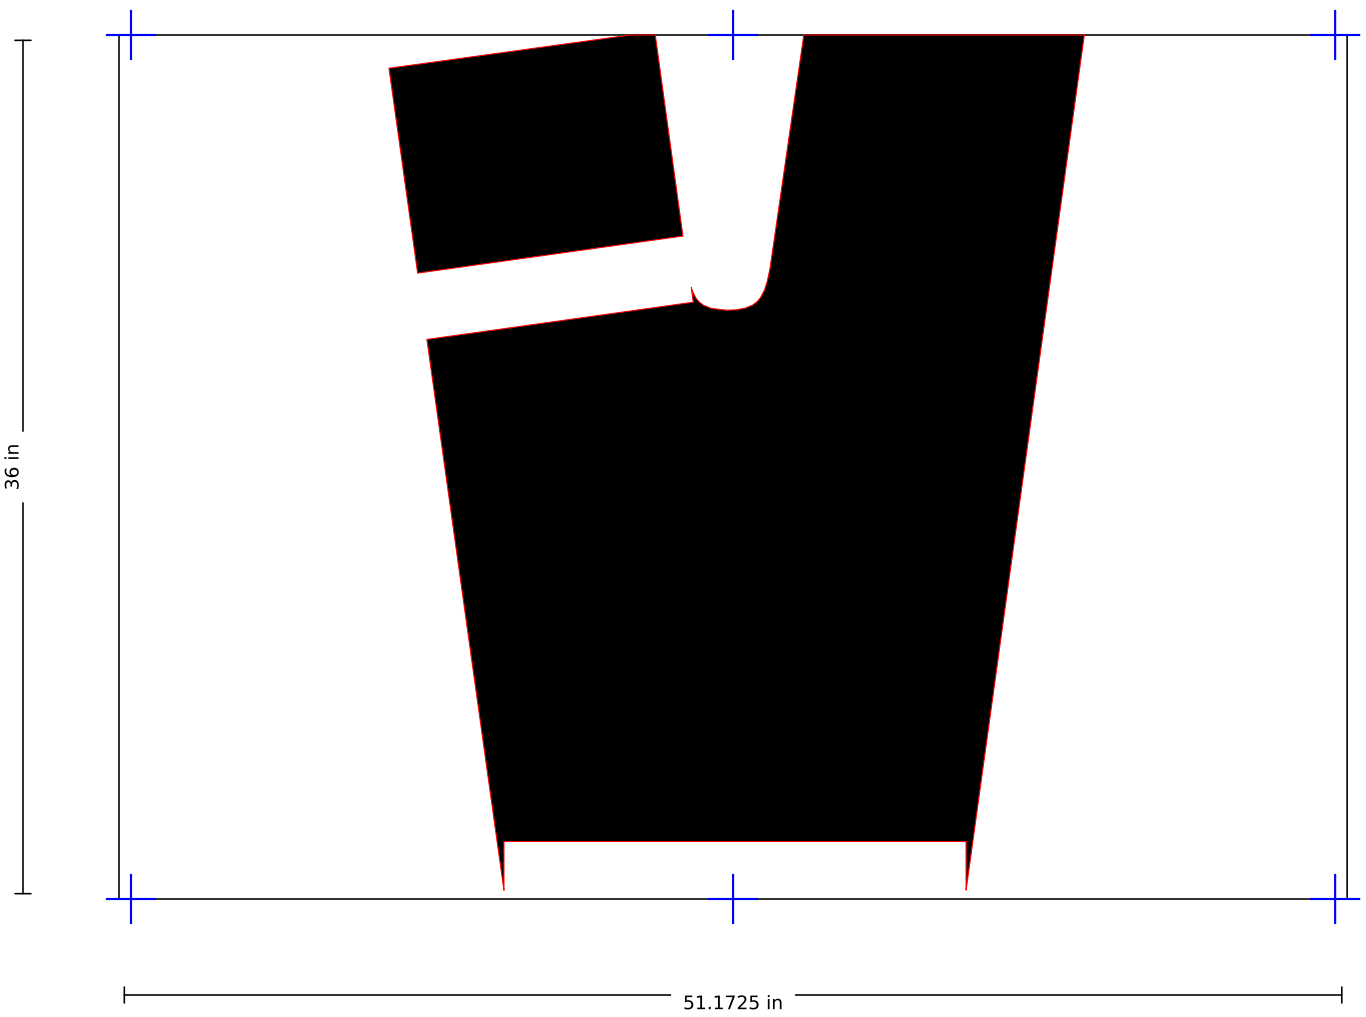


SSS-FAA-144-03-V · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

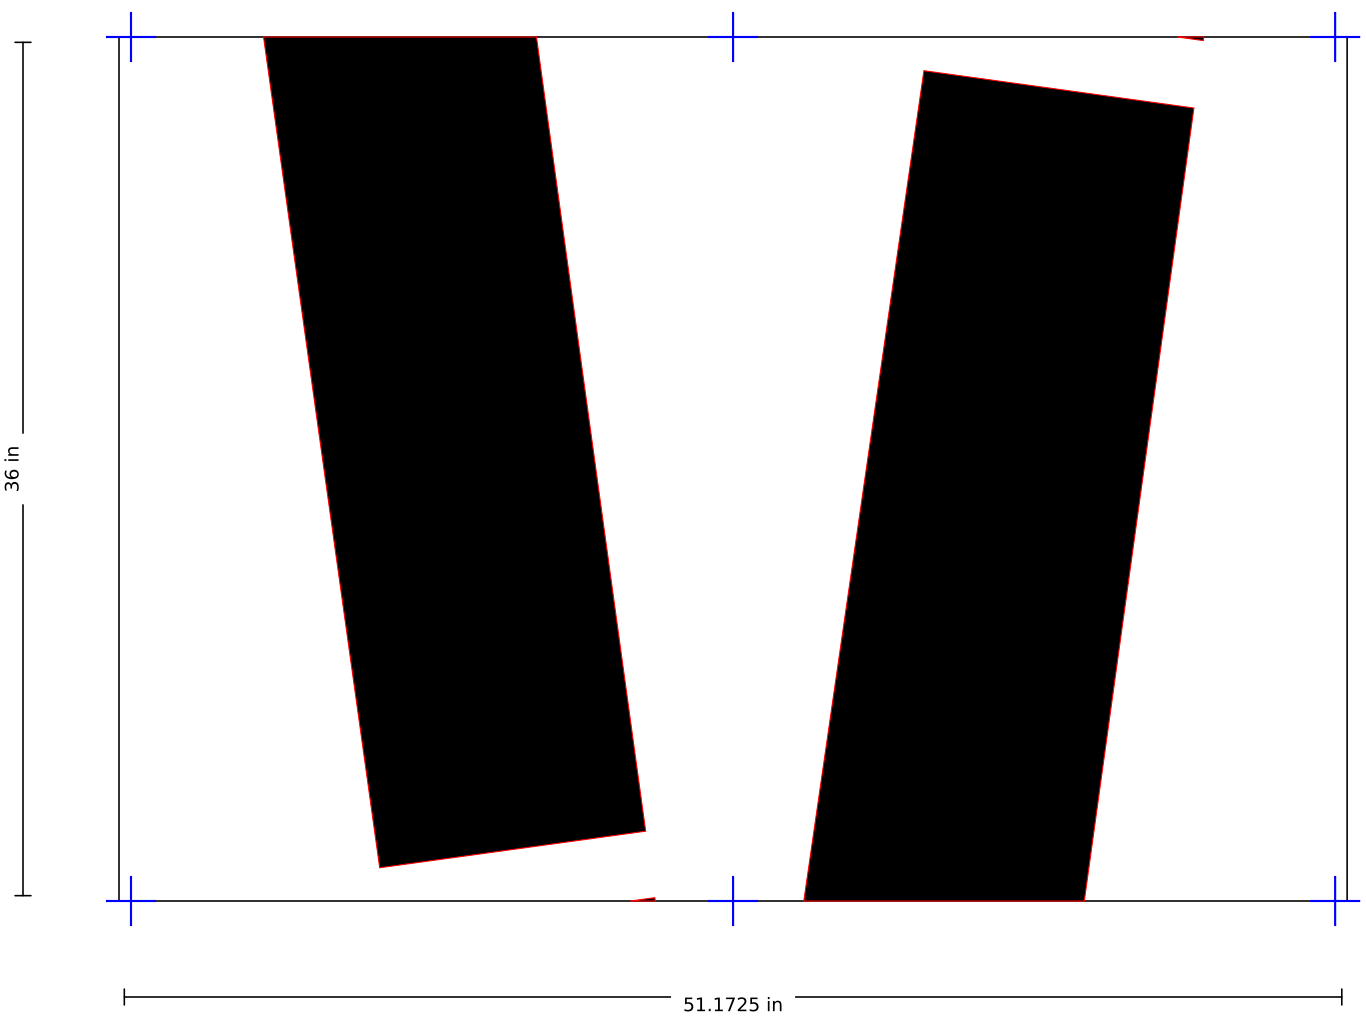

SSS-FAA-144-03-V · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:8 on 11x17 · blue crosses = REG marks on seams

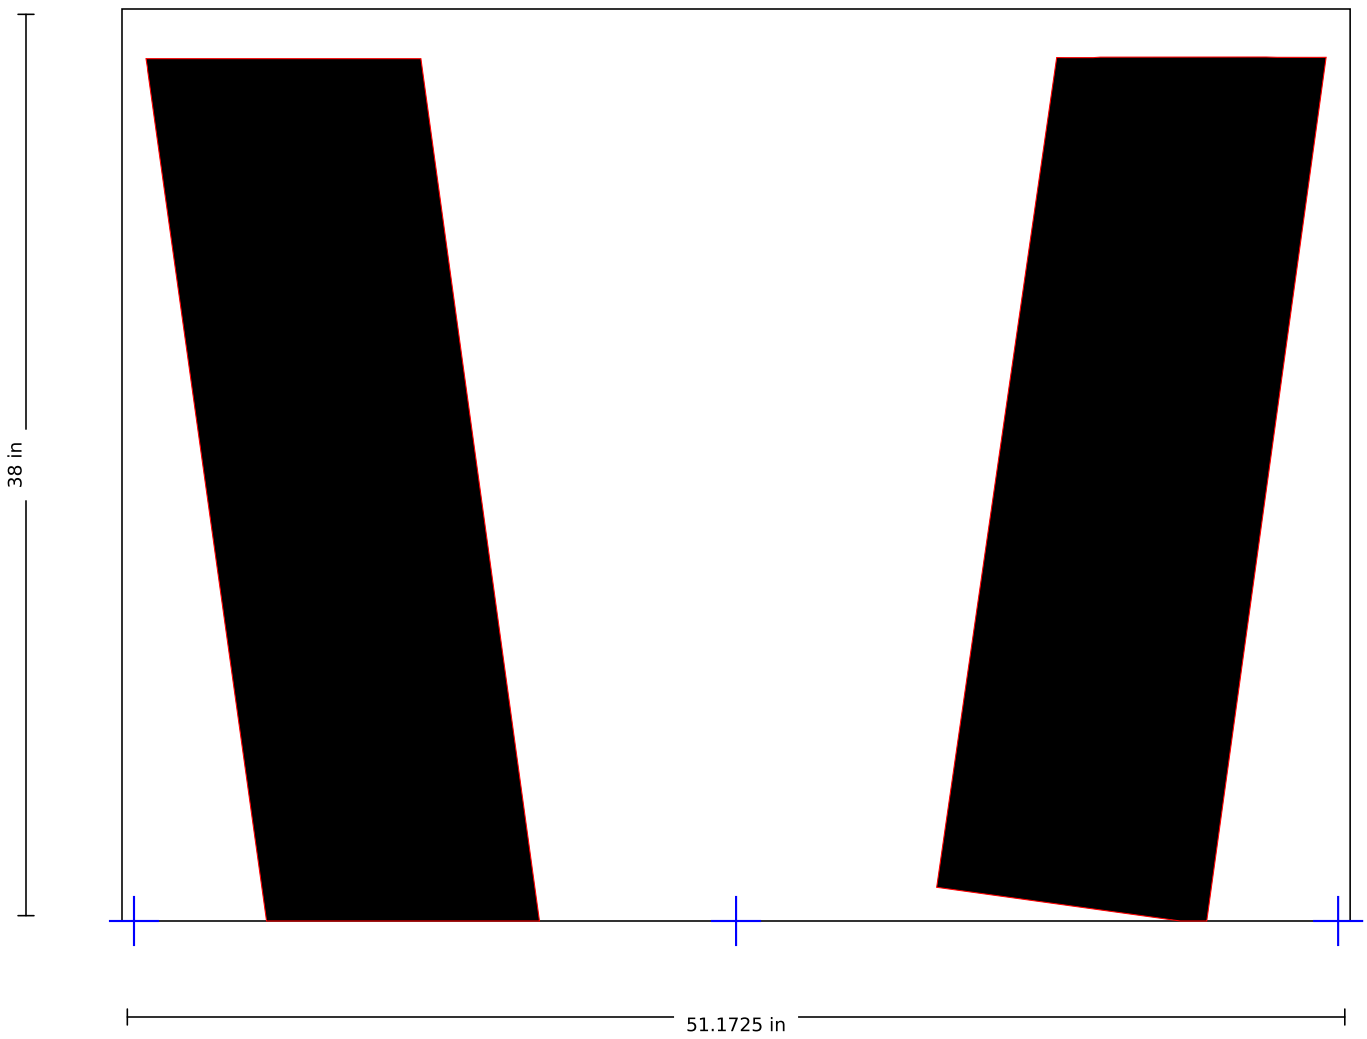

SSS-FAA-144-03-W

144" FAA Airport "W" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 53 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

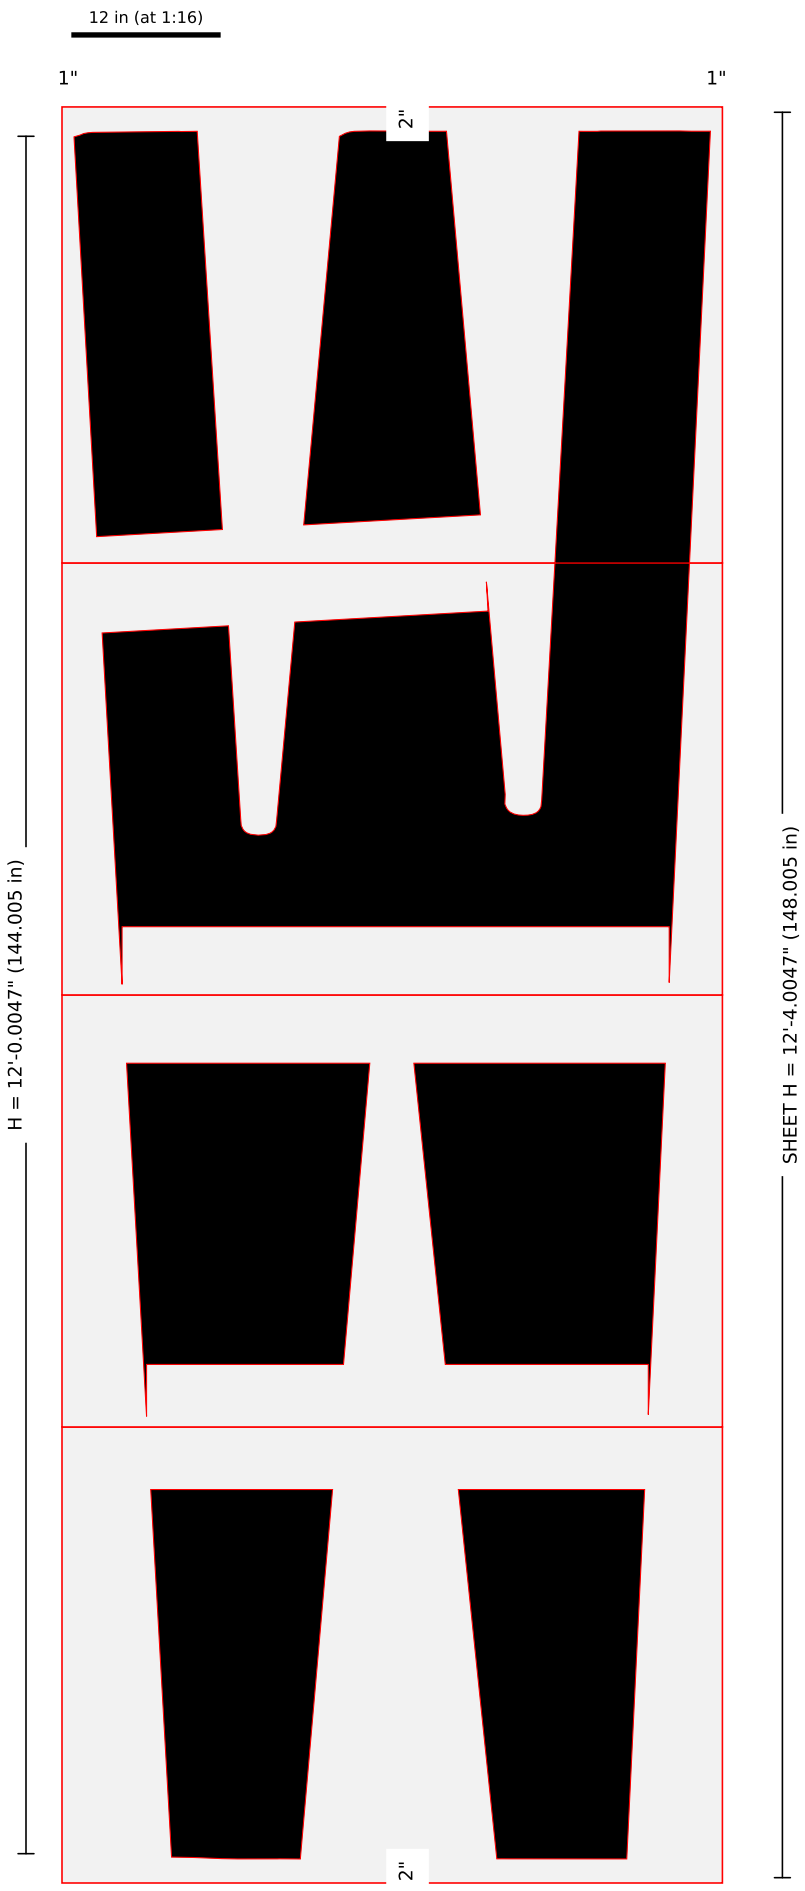

Pieces: 4 (1 x 4); blanks (in): 55.034 x 38.001, 55.034 x 36.001, 55.034 x 36.001, 55.034 x 38.001 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
REG marks)
REG marks)
Matches 1-800-Stencil per-character image 1800-F144W-144in-FAA-Airport-Letter-W-157x60-2.jpg: width = 1-800 image width label 53 in (image-scale 52.49); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.
SEAM BRIDGES (2026-11-04): 5 short bridges added where the 48x120 split left loose material.


SSS-FAA-144-03-W · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

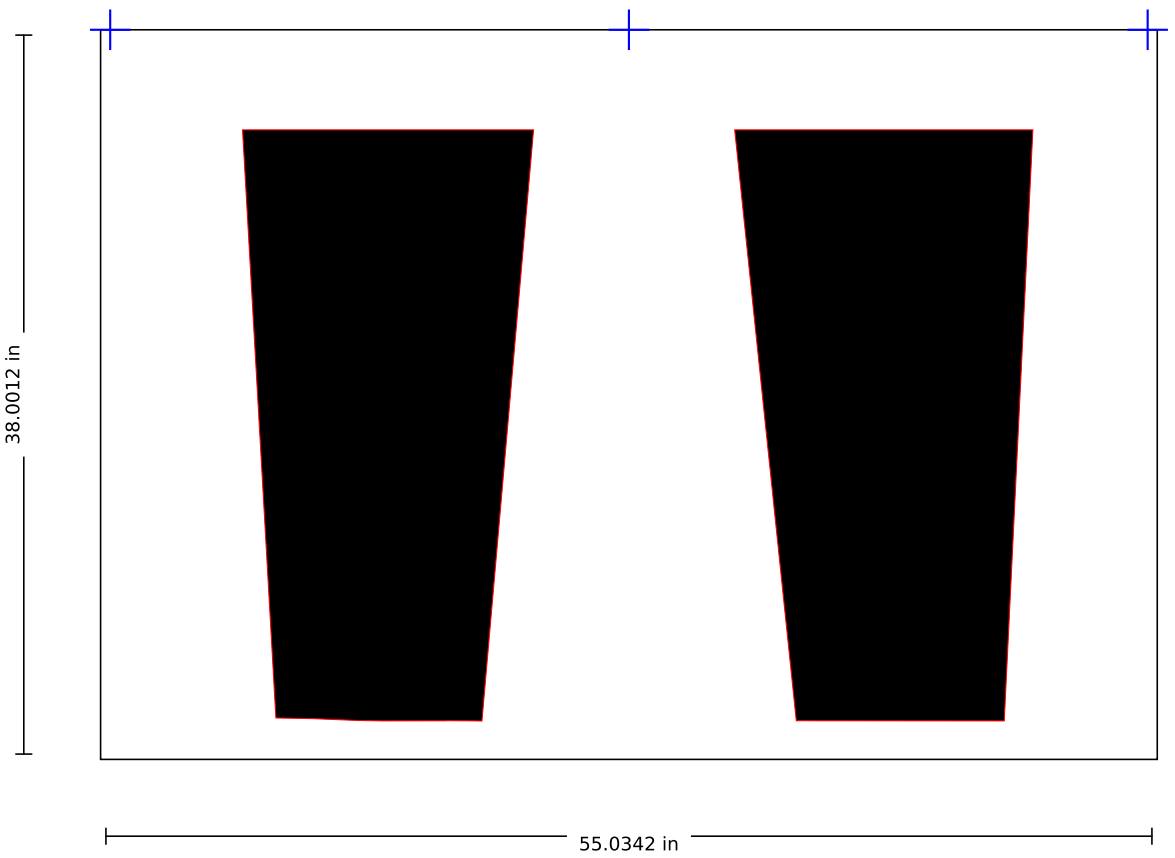


SSS-FAA-144-03-W · piece 2 of 4 (col 1, row 2 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

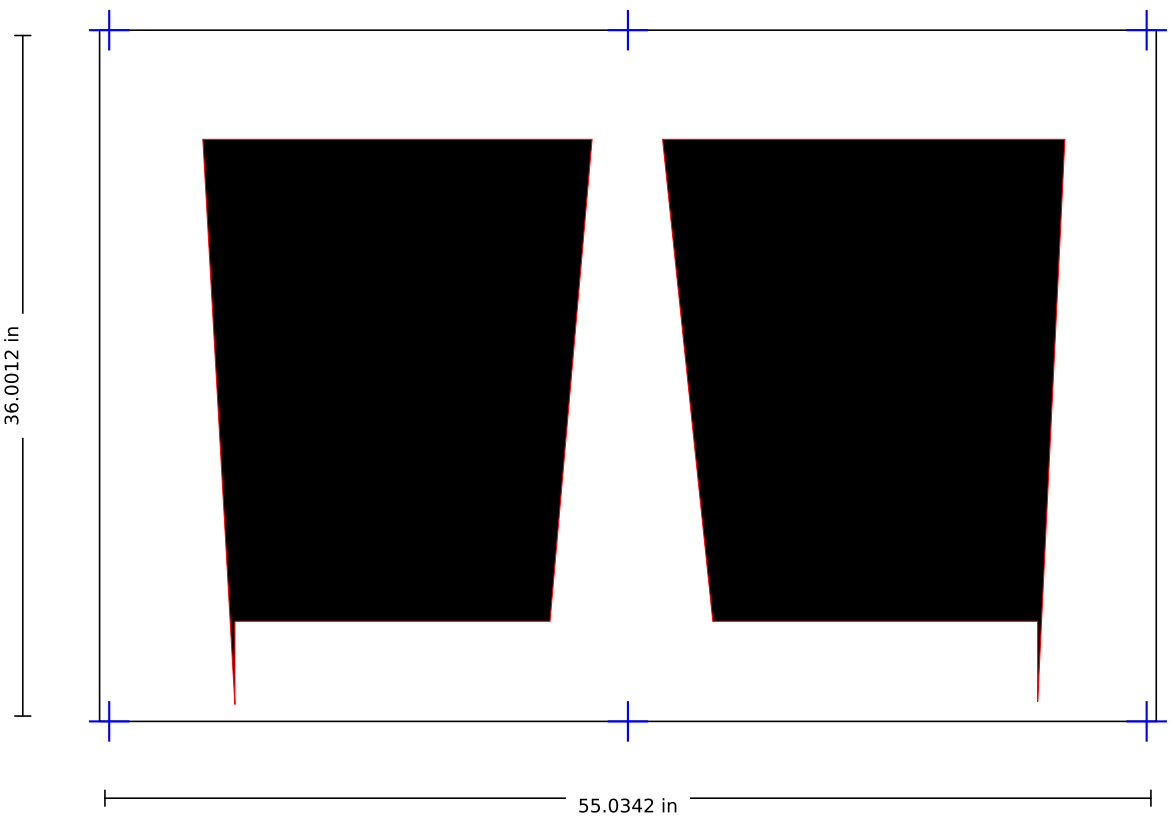


SSS-FAA-144-03-W · piece 3 of 4 (col 1, row 3 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

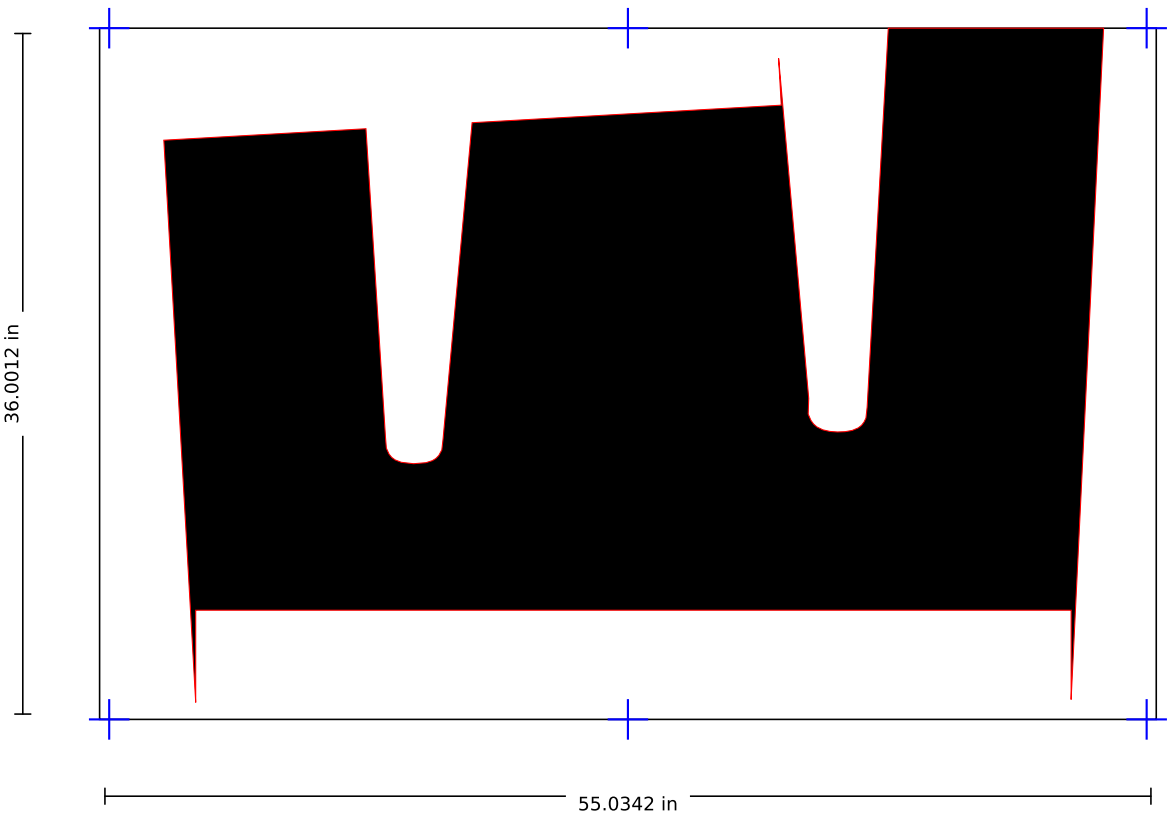

SSS-FAA-144-03-W · piece 4 of 4 (col 1, row 4 from bottom-left)


Scale 1:10 on 11x17 · blue crosses = REG marks on seams

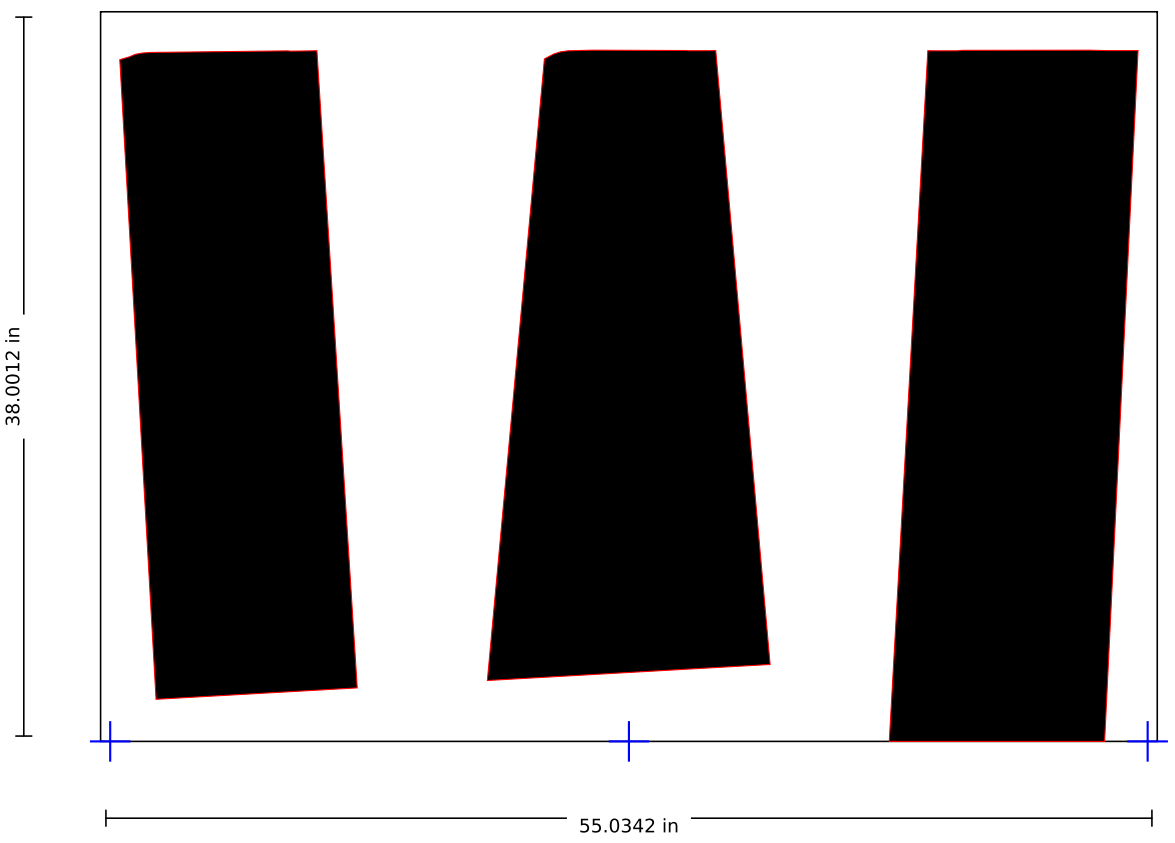

SSS-FAA-144-03-Z

144" FAA Airport "Z" - kit SSS-FAA-144-03, traced from 1-800-Stencil image, 37 W x 144 H


Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

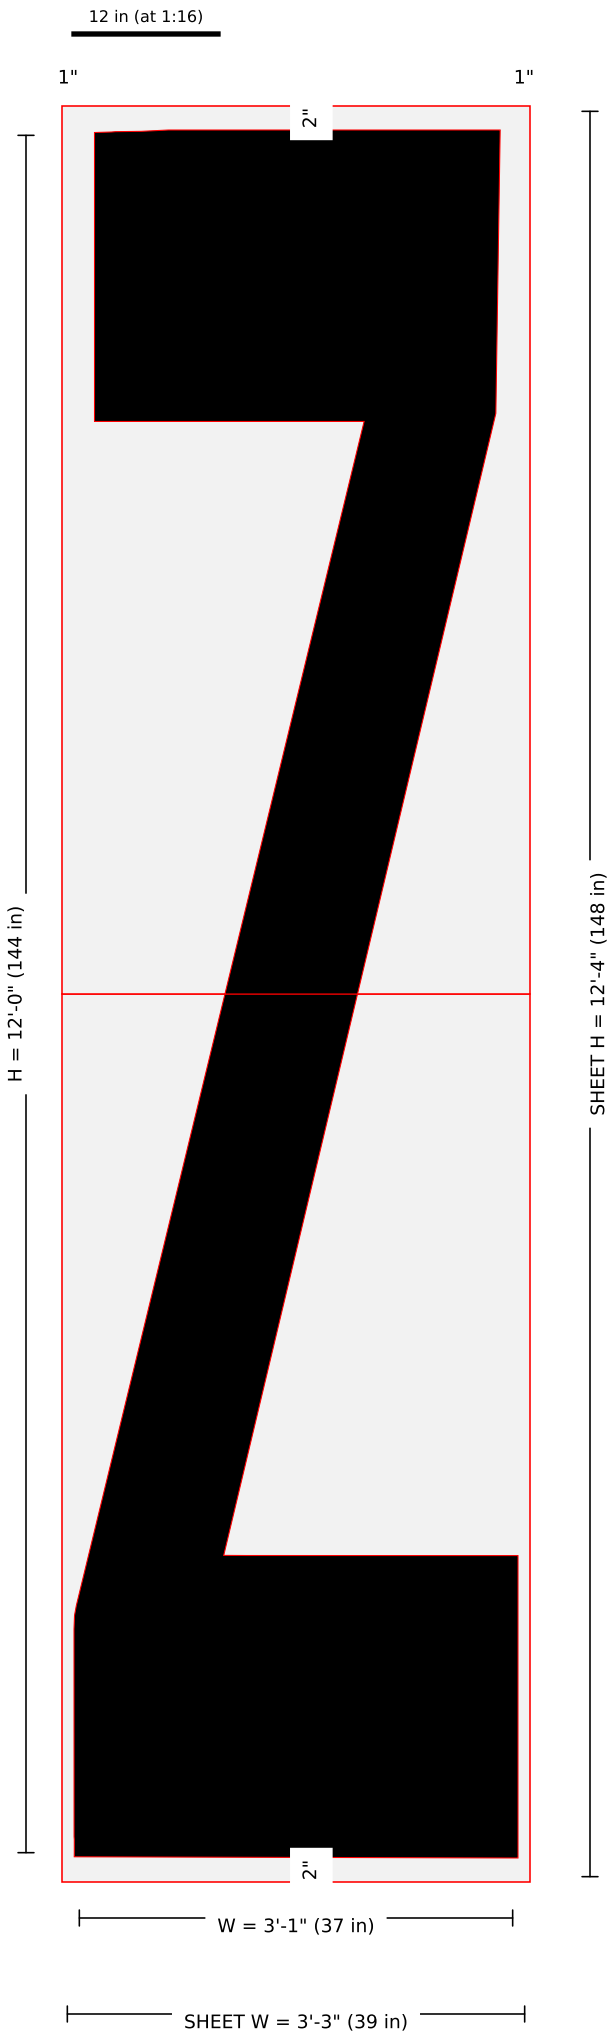

Pieces: 2 (1 x 2); blanks (in): 39 x 74, 39 x 74 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
Matches 1-800-Stencil per-character image 1800-F144Z-144in-FAA-Airport-Letter-Z-157x60-2.jpg: width = 1-800 image width label 37 in (image-scale 39.78); kit sheet 60 x 157 (side margin 9.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.58 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-144-03-Z · piece 1 of 2 (col 1, row 1 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

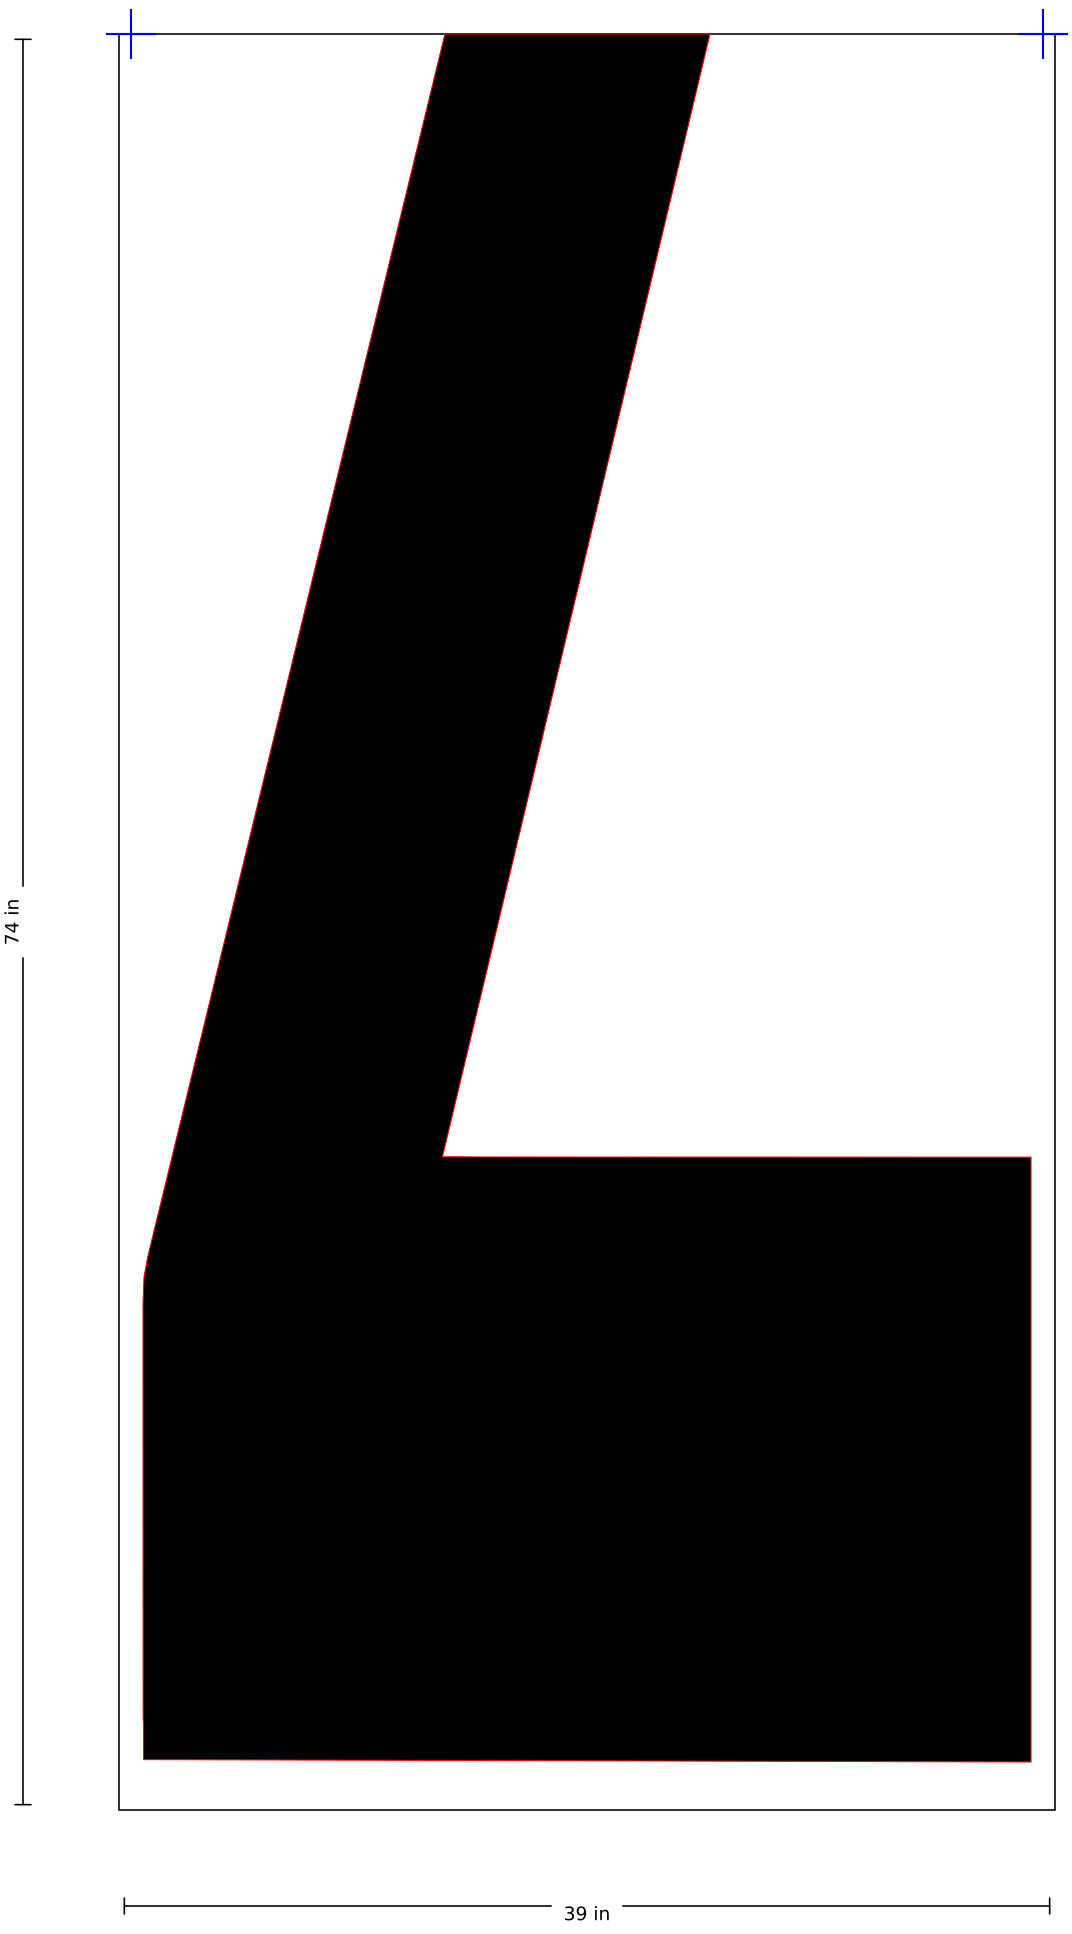

SSS-FAA-144-03-Z · piece 2 of 2 (col 1, row 2 from bottom-left)

Scale 1:8 on 11x17 · blue crosses = REG marks on seams

