SSS-WRD-096-100

SSS-WRD-096-100 on confirmed 1-800 sheet 68x102


Scale 1:12 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut



Pieces: 4 (4 x 1); blanks (in): 17 x 102, 17 x 102, 17 x 102, 17 x 102 · 3 in margin on outer edges; seam edges have 0 margin (butt joint, align REG marks)
SHEETFIX 05: zero side border accepted by Josh.
sheetfix06 Josh visual: restore smooth B from it1; keep K crotch + R0.19; square E stem at x=92.24; flatten E arm wobble. Soft corner at (11.11,37.79) left in place: sharpening it extends the facing span of the 0.99in slot above and trips bridge_audit (0.99 vs rule 1.157).


SSS-WRD-096-100 · piece 1 of 4 (col 1, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

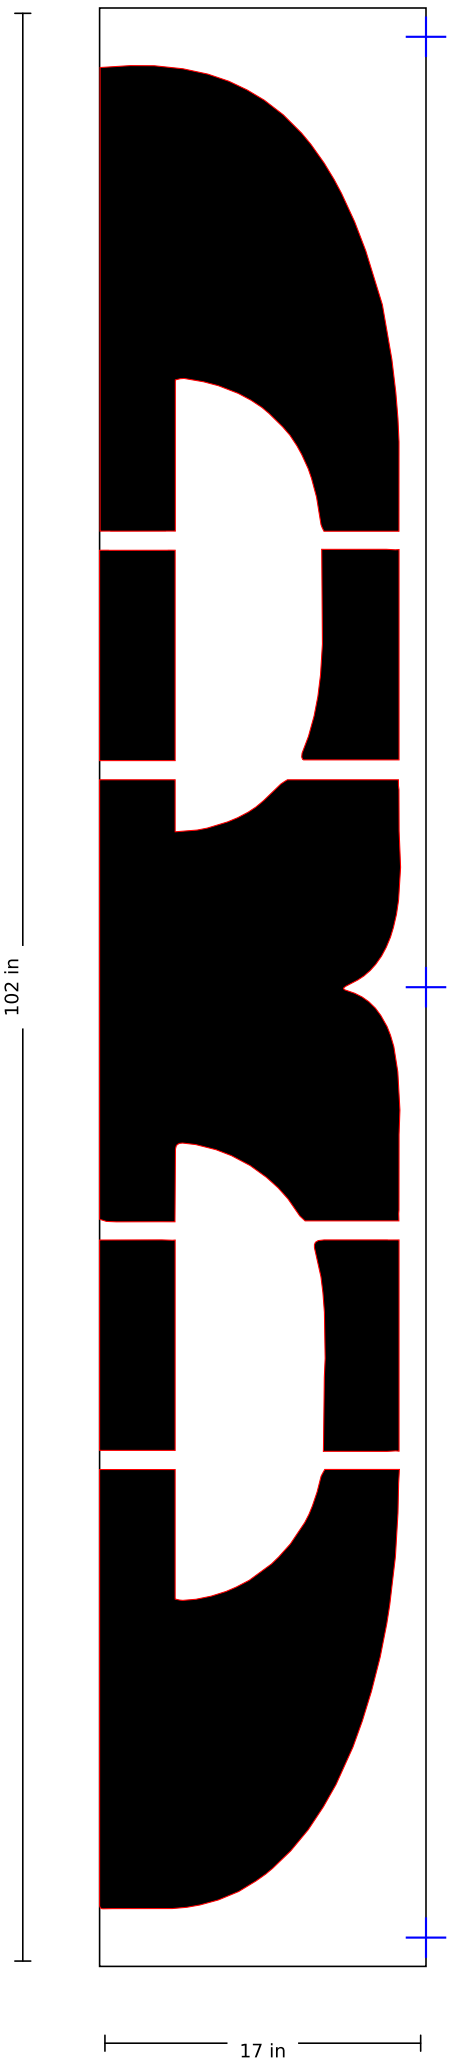


SSS-WRD-096-100 · piece 2 of 4 (col 2, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

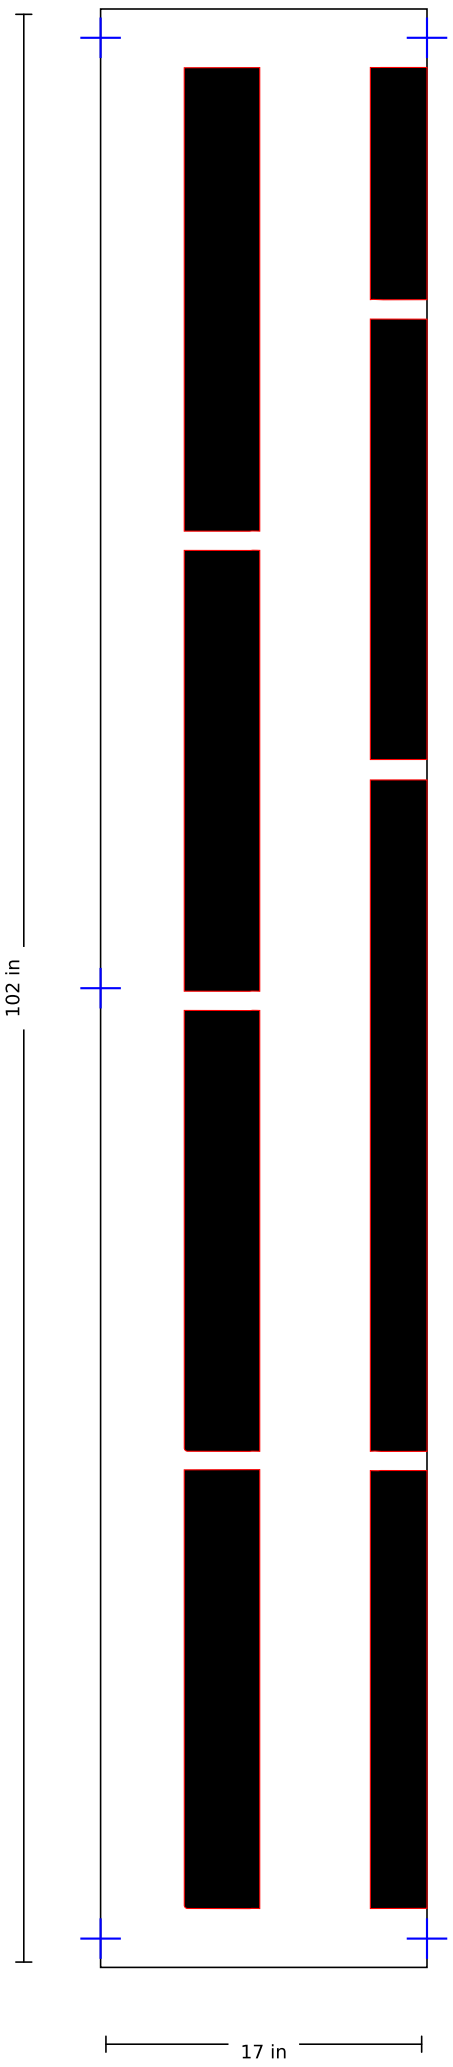

SSS-WRD-096-100 · piece 3 of 4 (col 3, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

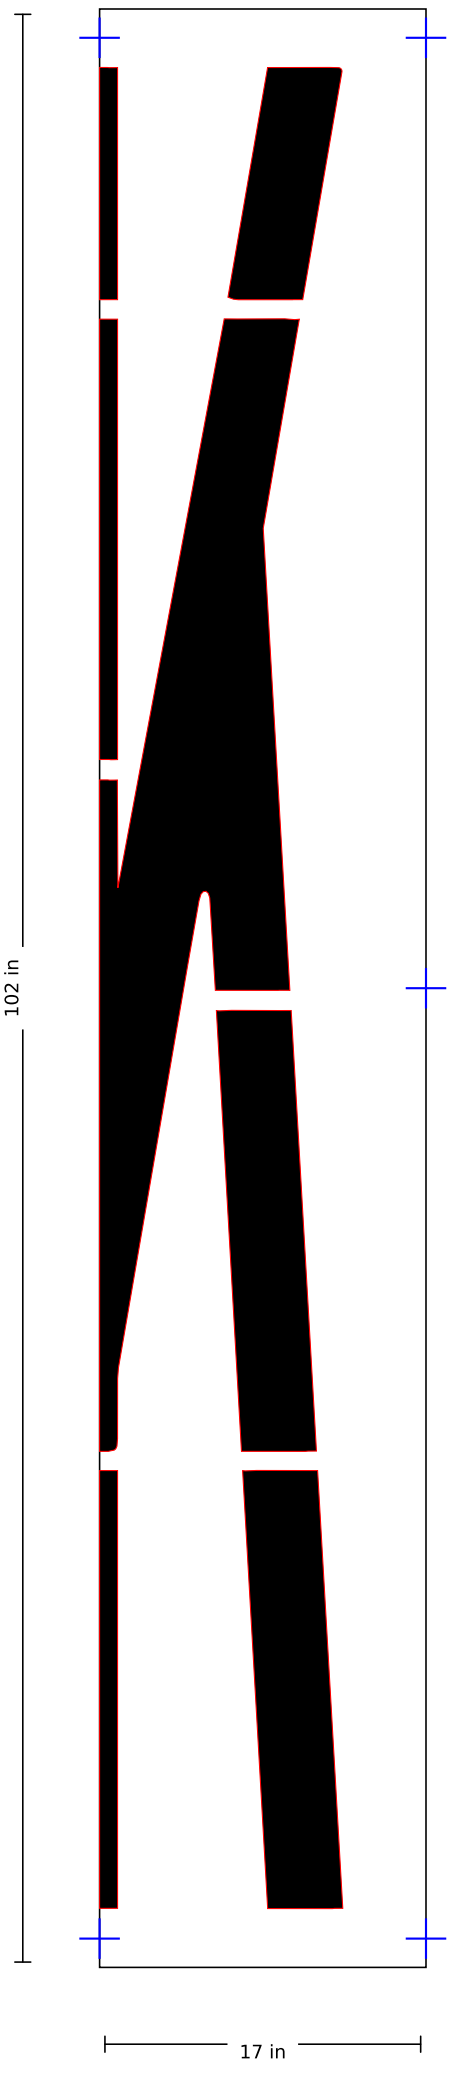

SSS-WRD-096-100 · piece 4 of 4 (col 4, row 1 from bottom-left)

Scale 1:10 on 11x17 · blue crosses = REG marks on seams

