SSS-ARW-072-12

SSS-ARW-072-12 72" Georgia DOT Bike Lane Straight Arrow Stencil - matched to 1-800-Stencil image, 24 W x 72 H

Scale 1:10 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

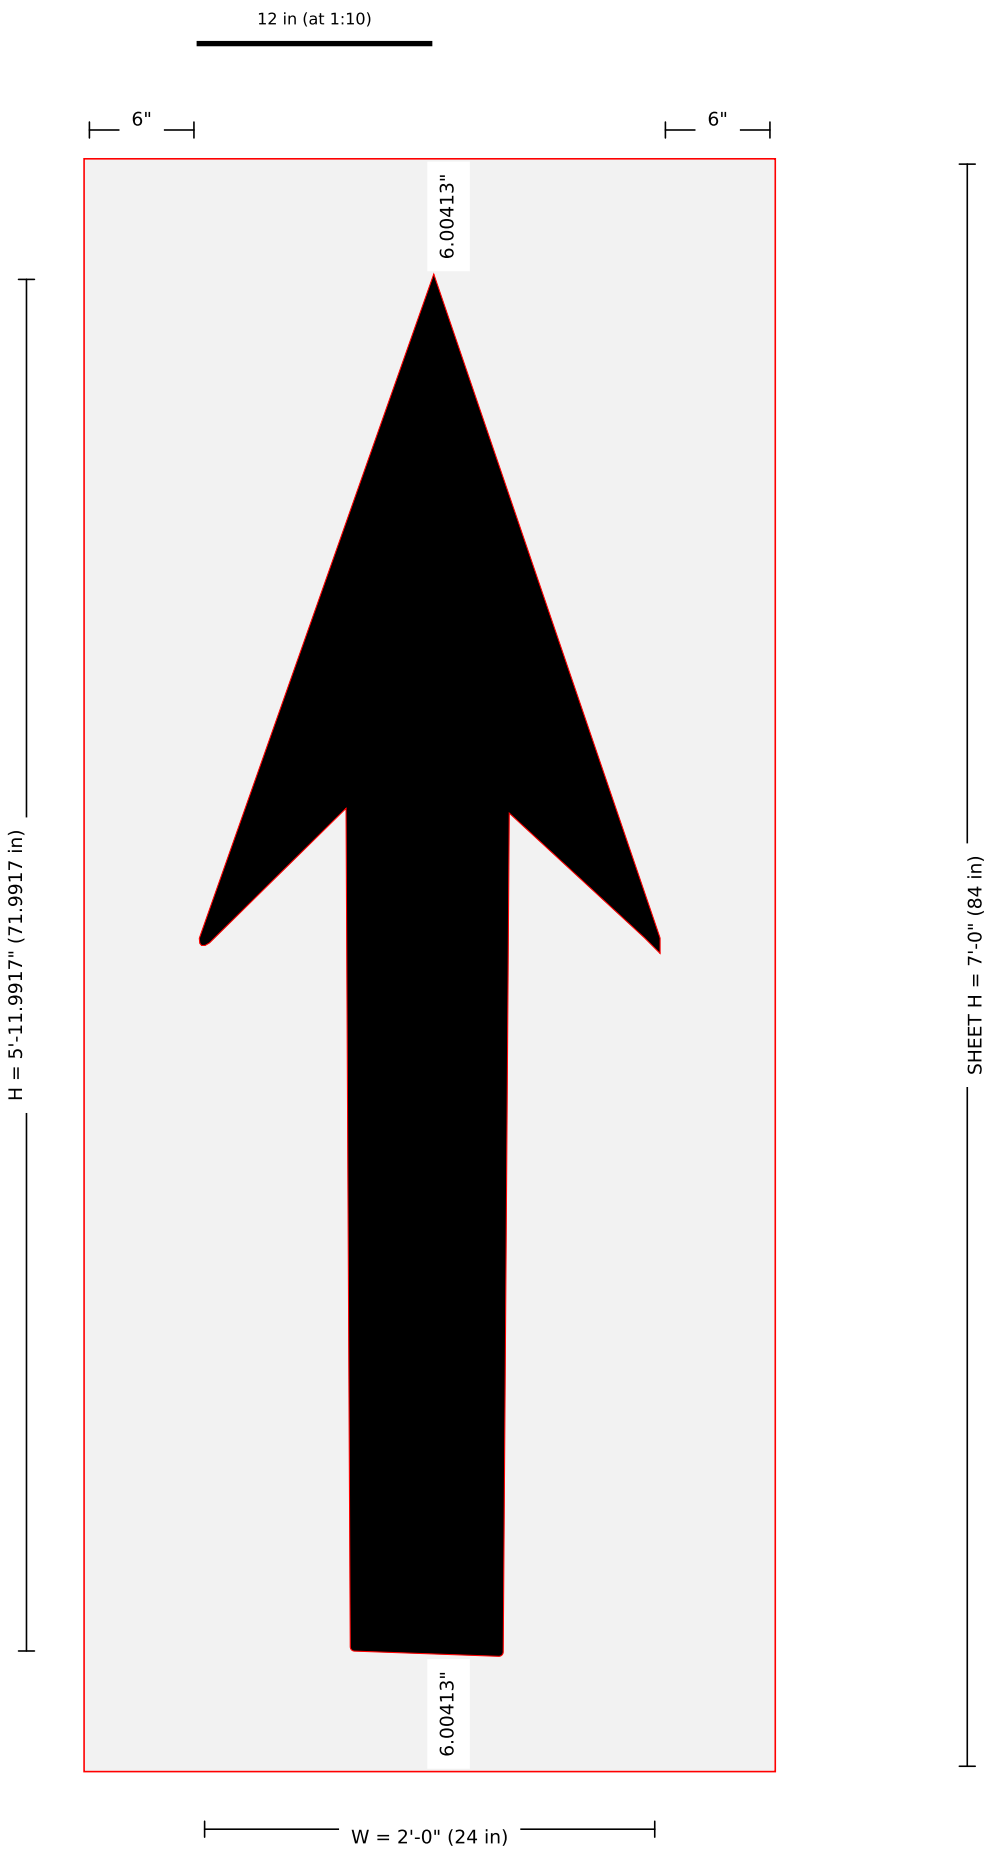

Pieces: 1 · sheet 36 x 84 in (border L/R/B/T 6/6/6/6 in), sheet outline on CUT
Size per 1-800-Stencil listing/image 24 W x 72 H (governs); sheet 36 x 84, pieces n/s.
Shape TRACED FROM 1-800 IMAGE 1800-5GA21-72in-Georgia-DOT-Bike-Lane-Arrow-Stencil-1.jpg incl. their bridge gaps (kept as-is). Image px 415 x 1272; aspect check -2.12%.
1-800 image shows the arrow horizontal; rotated -90 deg to point up (listing W x H is upright).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; published sheet 36 x 84 in (ref_index sheet_size); border L/R/B/T 6/6/6/6 in.