SSS-NUM-003-02-8

3" 3-Digit Number Kit Standard (100-pc) 100-199, 200-299, etc. - character "8" (1 of 10 in kit)

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

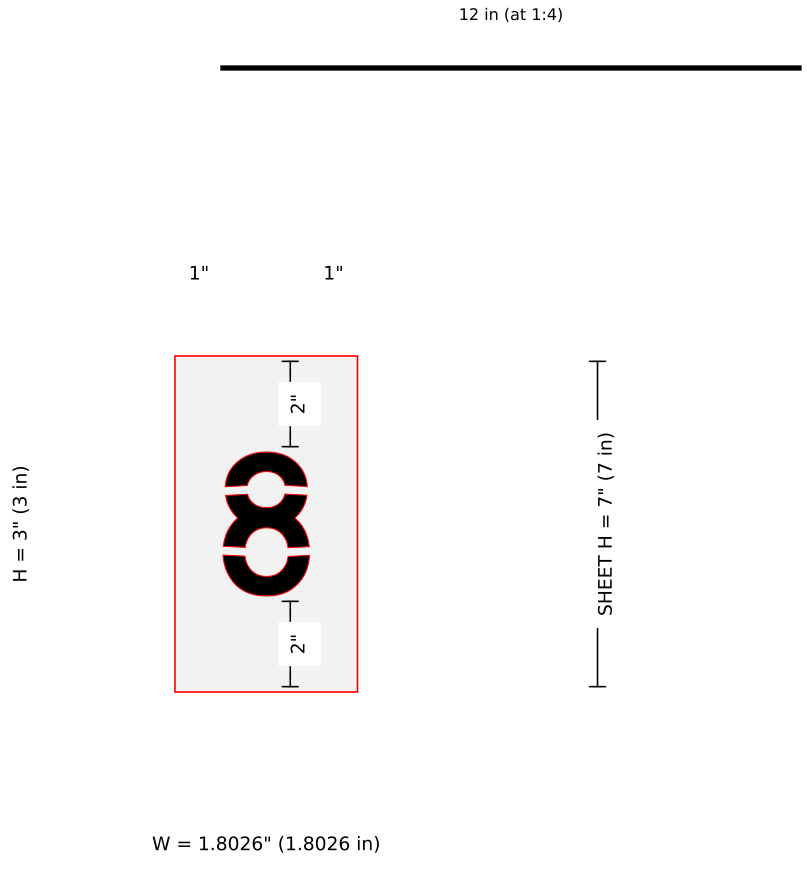

Pieces: 1 · sheet 3.803 x 7 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
REVIEWED by Josh 2026-11-04 (small-kit review, josh_audit/review_smallkits/pass.csv). 1-800 piece count: 100 (our 48x120 split kept; one file per character).
Interim default: standard FHWA/DOT letterform (FHWA Series C via Roadgeek 2014, MIT), no 1-800 image traced. Kit scaled so the widest character = W 2 in, every character height = H 3 in. This char 1.803 x 3.000 in.
KIT REBUILT 2026-11-04: outline from the TrueType quadratic curves, flattened at chord error <= 0.002 in; stencil bridges = SMALL-KIT RULE (Matt approved 2026-11-04, kits under 4 in): width 40% of stroke clamped 0.125-0.36 in; one bridge per enclosed opening, two per opening on 0/O/8; placement per 1-800-Stencil (O top/bottom, 0/8 left/right mid-height, bowls stem-to-bowl).
DOT/FHWA spacing (Series C side bearings, scaled): 0.39 in to next character. 1-800 sells pre-joined 3-digit pieces (listing 6 x 3 = 3 digits); we cut single digits at 2.00 W (6/3) so any number can be assembled.
Bridges (center x,y / stroke crossed / width / angle): (0.27,2.2) 0.455" w=0.183" -176.8deg; (1.53,2.2) 0.458" w=0.183" -3.0deg; (0.23,0.93) 0.454" w=0.183" 177.1deg; (1.58,0.93) 0.441" w=0.183" 2.8deg