SSS-NEW-020-O

3" Alphabet Kit for Curbs Stencil - character "O" (1 of 26 in kit)

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

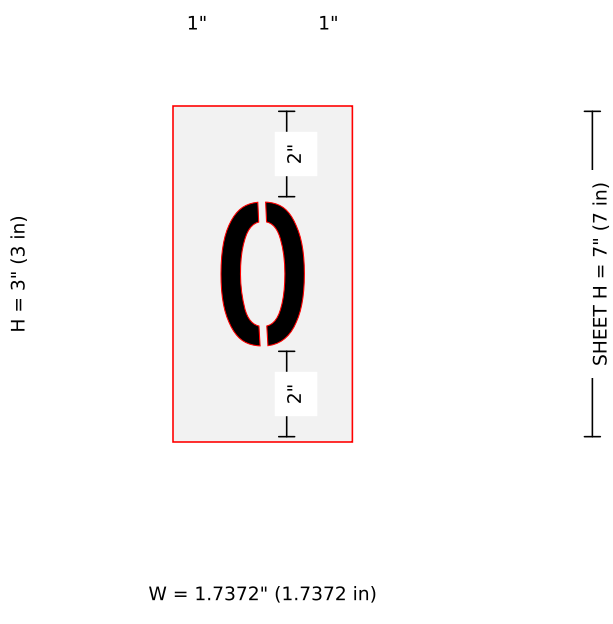

SHEET W = 3.7372" (3.7372 in)

Pieces: 1 · sheet 3.737 x 7 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
REVIEWED by Josh 2026-11-04 (small-kit review, josh_audit/review_smallkits/pass.csv). 1-800 piece count: 29 (our 48x120 split kept; one file per character).
Interim default: standard FHWA/DOT letterform (FHWA Series C via Roadgeek 2014, MIT), no 1-800 image traced. Kit scaled so the widest character = W 2.25 in, every character height = H 3 in. This char 1.737 x 3.000 in.
KIT REBUILT 2026-11-04: outline from the TrueType quadratic curves, flattened at chord error <= 0.002 in; stencil bridges = SMALL-KIT RULE (Matt approved 2026-11-04, kits under 4 in): width 40% of stroke clamped 0.125-0.36 in; one bridge per enclosed opening, two per opening on 0/O/8; placement per 1-800-Stencil (O top/bottom, 0/8 left/right mid-height, bowls stem-to-bowl).
DOT/FHWA spacing (Series C side bearings, scaled): 0.53 in to next character. Height-only listing: H 3 from name; no listed width, widest-char W 2.25 = 1-800 typical width for this height (0.75 x H).
Bridges (center x,y / stroke crossed / width / angle): (0.86,2.8) 0.409" w=0.164" 92.6deg; (0.88,0.2) 0.408" w=0.164" -86.7deg