

Flanges for 1" diameter [Ø25] Shower Curtain Rod, End Flanges (pair)

Shower/Tub Accessories

MasterFormat Section 10 28 13











MR 4.1 (1) MR 6 (1) EQ 4.2 (1) MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

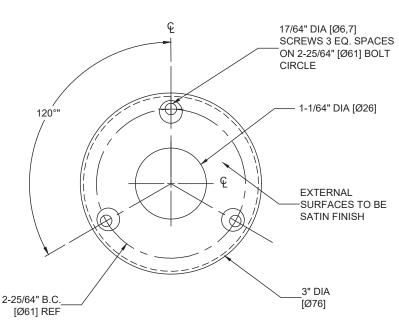

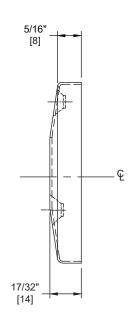

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Flanges are fabricated of type 304 stainless steel alloy 18-8. Flanges have three (3) dimpled 17/64" diameter [Ø7] holes to accept either 1/4 [M6] or #10 [M5] oval head screws (provided by others). Flanges only.

KEY FEATURES & SPECIFICATIONS

- Designed to accept 1" Dia. [Ø25] rod
- Type 304 Stainless Steel Satin Finish
- 20 gauge Thick Material
- Surface Mounted

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#1214-1 Revision: R2 Issued: 11/1/2021 Revised: 4/23/2025

CSI: 10 28 13 Toilet Accessories Page: 1 of 2

OPERATION & MAINTENANCE

Rod is held captive by flanges when installed properly. Rod may rotate in flanges if turned by hand. Correctly installed rod and flanges will support specified shower curtain(s) hung on hooks 1200-SHU or others (by others). Rod will bend and pull from flanges if significant body weight is suspended.

| TECHNICAL INFORMATION / PRODUCT PROPERTIES | |
|--|--|
| Property | Value |
| Dimensions | 3" [Ø76] Diameter flange x 1" Dia. Rod [Ø25] x 17/32" [13] |
| Construction | Type 304 Stainless Steel - Satin Finish 20 gauge Thick Material |
| Mounting | Surface Mounted |
| Materials | 20 gauge (.0356" [0.9] thick) type 304 stainless steel. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. |

INSTALLATION

Install rod in straight section between two (2) mounting flanges with no more than 1/4" [6] total wall clearance. Rods longer than 72" [1829] require ceiling hanger Model #1224-C18. For use with standard shower curtain Model #1200 or #1200-V having 72" [1829] length and standard hooks (Model #1200-SHU) install unit with rod centerline 74-1/2" [1892] maximum above finished floor (MAX AFF) or 67" [1702] above tub rim to obtain 6" [152] bottom overlap. Seal screw holes in walls under flange to prevent any sprayed water from possibly infiltrating the wall structure.

ADDITIONAL INFORMATION

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#1214-1

Revision: R2 Issued: 11/1/2021 Revised: 4/23/2025