

Foam Soap Dispenser 6" Spout – 34 oz. – Vanity Mounted

Soap Dispensers

MasterFormat Section 10 28 13




Scan for
Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

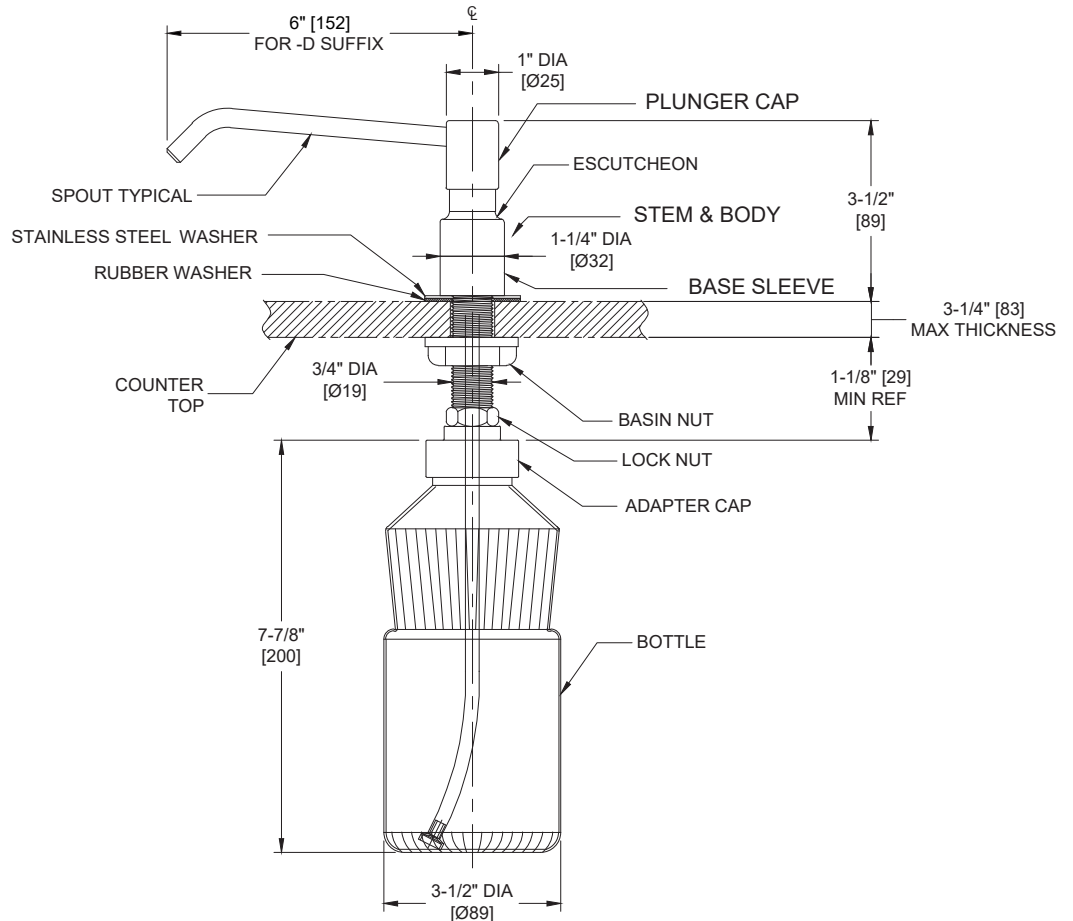

PRODUCT OVERVIEW

Vanity Mounted Manual Foam Soap Dispenser shall dispense 34 oz. (1L) of liquid soaps having a pH in range 7 ± 1.5 and viscosity in range 1-100 cP (mPa•s). Dispenser Plunger Cap, Stem & Body, Spout, Escutcheon and Base Sleeve shall be shiny bright finish stainless steel with rubber “duck bill” check valves and O-ring seals. Valve body, internal parts, basin nut, threaded shank shall be molded plastic. Spring, escutcheon washer, stem retainer collar and screw shall be stainless steel. Soap container shall be translucent, shatter-resistant HDPE. Valve operation shall comply with 2010 ADA Accessibility Standards by requiring no more than 5 lbf (22.2 Newtons) of pressure to actuate without grasping or twisting by operator. Soaps containing reportable salts, chlorides and alcohols should be avoided.

KEY FEATURES & SPECIFICATIONS

- Manual Pump Action Dispensing
- 6" Spout
- Type 304 Stainless Steel - Satin Finish
- Vanity Mounted
- Manual
- Foam Soap - 34 oz. (1.0 L) Capacity

OPERATION & MAINTENANCE

Soap is manually dispensed by pushing down on the Plunger Cap. Dispenser is refilled by either unscrewing the Stem & Body to expose the internal fill opening or by removing the tank from under vanity. Soap will continue to feed properly until soap level is below top of intake bottom fitting. Soap supply is replenished manually on a schedule determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

| Property | Value |
|--------------|---|
| Dimensions | 3-1/2" x 15-3/4" [89 x 372] (max height) - Spout Projection: 6" [152] |
| Construction | Type 304 Stainless Steel - Satin Finish |
| Mounting | Surface Mounted |
| Options | N/A |

INSTALLATION

Unit is typically located adjacent to a flush mounted lavatory, through 7/8" diameter [22 dia.] cut out (by others) in counter top. The threaded shank allows for installation in counter tops up to 3-1/4" [83] thick.

WARRANTY

One (1) Year from date of Invoice