



We create chemistry

Acronal® 4924

High Performance for
Eco-Friendly Mortar and
Cement Formulations



Acronal 4924

High Performance for Eco-Friendly Mortar and Cement Formulations

Acronal 4924 is an aqueous all-acrylic, very low odor dispersion copolymer designed for modifying mortar compositions for patching and repair. Mortars formulated with Acronal 4924 are very workable with good pot life, even at elevated temperatures. The absence of added ammonia, ethylene glycol and APEO surfactant makes Acronal 4924 the clear choice for interior applications and green construction.

Benefits of Mortar Modification

- Extended set time
- Reduced spalling
- Crack mitigation
- Increased bond and tensile strength
- Impermeability
- Increased freeze thaw and abrasion resistance

Product Features

- Non-ammonia and non-APEO
- Non-ethylene glycol
- Low foaming
- Low odor and low VOCs
- Freeze thaw stable
- Excellent mortar appearance

Properties

Solid content, weight %	ca. 47
pH	ca. 9.5
Viscosity, mPa-s	ca.40
Glass transition temp., Tg °C	ca.10
Bulk density, lbs/gal.	ca. 8.8
Dispersion type	Acrylic
Freeze/thaw stability (-18C)	4 to 5 cycles

Performance Expectations

Modified mortars should demonstrate consistent color, appearance, and performance properties of the final product. Compared to unmodified mortars, Acronal 4924 modified mortars provides enhanced water resistance, increased flexural and compressive strengths, and increased adhesion to old concrete, masonry, and other substrates such as brick, wood, and EPS foam. Due to Acronal 4924's all-acrylic backbone, mortars modified with this polymer also have excellent resistance to yellowing after weathering exposure.

Acronal 4924 improves the physical properties of mortar strength, providing both the application and field performance advantage that are required from modified mortars.

Excellent Mortar Appearance

Mortar mixes formulated with Acronal 4924 have a similar uniform gray color on the surface and throughout the underlying mixture when in both wet and dried (cured) states.

**Picture to the right shows wet mortar appearance*

Low Foaming – Ease of Use


In a cylinder shake test, Acronal 4924 generates very minimal foam relative to other common dispersions used to modify mortar mixes.

This reduced foaming tendency, important in product pumping and container filling operations, provides a key “ease of use” benefit when using Acronal 4924.



Acronal 4924

Competitive
Latex

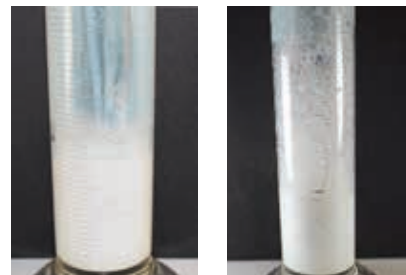

Acronal 4924

Competitive
Latex


Acronal 4924

Properties in Mortar Mix Formula

Suggested Mortar Mix Formulation

Ingredient	Weight	Ratio
Type I/II Portland Cement (C)	100.0	--
Graded sand (S)	275.0	2.75 S/C
Acronal 4924 polymer modifier (P)	159.7	0.15 P/C
Water	110.0	--

Compressive Strength (psi)

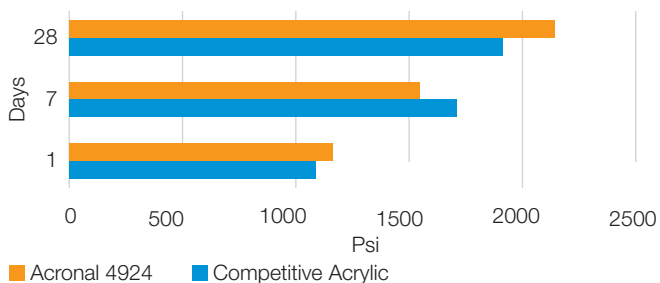

Characteristic – Typical Property Grey type I/II cement

Mortar appearance (wet)	Uniform grey
Foaming tendency	Low
Vicat - Initial / Final set-time	2:30 hrs – 4:47 hrs
Comparable working time at elevated temperature (100° F)	> 60 min
Mortar cube water uptake	11%*
Compressive strength	See chart
Shrinkage	0.07%
UV stability color change white mortar	none
Pull-off bond strength, psi	ca. 250

* Compared to 50+% without polymer

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care and wearing of protective goggles.

Material Safety Data Sheet

Please refer to the most current version of the Material Safety Data Sheet that can be found on-line at www.basf.us/sds

Storage and Handling Recommendations

Acronal 4924 has a shelf life of six months from delivery date, provided it is stored in accordance with the “Handling and Storage of polymer dispersions” brochure. Technical information regarding the storage of BASF polymer dispersion products is available upon request.

About the Dispersions & Resins Business

The Dispersions & Resins business of BASF develops, produces, and markets a range of high-quality resins, additives, colorants, and polymer dispersions worldwide. These raw materials are used in formulations for coatings and paints, printing and packaging products, construction coatings, adhesives, cellulose and composites, and paper manufacturing. With a comprehensive product portfolio and extensive knowledge of the industries we serve, our customers benefit from innovative and sustainable solutions to help them advance their formulations through chemistry. For further information about the Dispersions & Resins business in North America, please visit <http://www.basf.us/dpsolutions>.

About BASF

At BASF, we create chemistry for a sustainable future. We combine economic success with environmental protection and social responsibility. The more than 115,000 employees in the BASF Group work on contributing to the success of our customers in nearly all sectors and almost every country in the world. Our portfolio is organized into six segments: Chemicals, Materials, Industrial Solutions, Surface Technologies, Nutrition & Care and Agricultural Solutions. BASF generated sales of more than €60 billion in 2017. BASF shares are traded on the stock exchanges in Frankfurt (BAS), London (BFA) and Zurich (BAS). Further information at www.basf.com.

United States and Canada

BASF Corporation
11501 Steele Creek Road Charlotte, NC 28273
Phone: 800-251-0612
Fax: 704-587-8224
E-mail: dpsolutions@basf.com
Web: www.basf.us/ConstructionSolutions

Mexico

BASF Mexicana, S.A. de C.V. Av. Insurgentes Sur 975
Col. Ciudad de los Deportes 03710 Mexico, D.F.
Phone: 52-55-5325-2600
Fax: 52-55-5723-3011
E-mail: contactoed@basf.com
Web: www.basf.com.mx

THE DESCRIPTIONS, DESIGNS, DATA AND INFORMATION CONTAINED HEREIN ARE PRESENTED IN GOOD FAITH, AND ARE BASED ON BASF'S CURRENT KNOWLEDGE AND EXPERIENCE. THEY ARE PROVIDED FOR GUIDANCE ONLY, AND DO NOT CONSTITUTE THE AGREED CONTRACTUAL QUALITY OF THE PRODUCT OR A PART OF BASF'S TERMS AND CONDITIONS OF SALE. BECAUSE MANY FACTORS MAY AFFECT PROCESSING OR APPLICATION/USE OF THE PRODUCT, BASF RECOMMENDS THAT THE READER CARRY OUT ITS OWN INVESTIGATIONS AND TESTS TO DETERMINE THE SUITABILITY OF A PRODUCT FOR ITS PARTICULAR PURPOSE PRIOR TO USE. IT IS THE RESPONSIBILITY OF THE RECIPIENT OF PRODUCT TO ENSURE THAT ANY PROPRIETARY RIGHTS AND EXISTING LAWS AND LEGISLATION ARE OBSERVED. **NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH HEREIN, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS.** ANY DESCRIPTIONS, DESIGNS, DATA AND INFORMATION GIVEN IN THIS PUBLICATION MAY CHANGE WITHOUT PRIOR INFORMATION. THE DESCRIPTIONS, DESIGNS, DATA, AND INFORMATION FURNISHED BY BASF HEREUNDER ARE GIVEN GRATIS AND BASF ASSUMES NO OBLIGATION OR LIABILITY FOR THE DESCRIPTIONS, DESIGNS, DATA OR INFORMATION GIVEN OR RESULTS OBTAINED, ALL SUCH BEING GIVEN AND ACCEPTED AT THE READER'S RISK.