

# Irganox<sup>®</sup> 1010

## Product Description


Irganox1010 is a highly effective, non-discoloring, sterically hindered primary phenolic antioxidant stabilizer that protects organic substrates against thermo-oxidative degradation.

## Key Features & Benefits

- Good compatibility
- High resistance to extraction
- Low volatility
- Odorless
- Can be used in combination with other additives
- Manufactured using a tin-free process

## Chemical Composition

Pentaerythritol tetrakis(3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate)

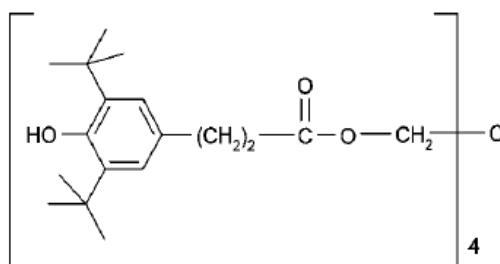

## Properties

### Typical Properties

Appearance	white, free-flowing powder
CAS number	6683-19-8
Molecular weight	1,178 g/mol
Melting range	110 – 125°C
Flash point	297°C
Vapor pressure at 20°C	7 E-10 Pa (extrapolated)
Density at 20°C	1.15 g/ml
Density (bulk)	530 – 630 g/l

### Solubility at 20°C (g/100 g solution)

Acetone	47
Chloroform	71
Ethanol	1.5
Ethyl acetate	47
n-Hexane	0.3
Methanol	0.9
Methylene chloride	63

These typical values should not be interpreted as specifications.

### Resins

Modified and unmodified natural resins; these are added as solutions or dispersions

### Pigments

Adhesives can be colored with the water-dispersable Dispers<sup>®</sup> or Luconyl<sup>®</sup> preparations

\* These typical values should not be interpreted as specifications.

## Applications

Irganox1010 is used in polyolefins such as polyethylene, polypropylene, polybutene, as well as, in olefin co-polymers such as ethylene vinyl acetate co-polymers. It is also recommended for the processing of polymers such as polyacetals, polyamides, and polyurethanes, polyesters, PVC, styrene homo- and co-polymers, ABS, elastomers such as butyl rubber (IIR), SBS, SEBS, EPM, and EPDM, other synthetic rubbers, adhesives, natural and synthetic tackifiers resins, and other organic substrates.

It has good compatibility, high resistance to extraction, low volatility, and odorless. Irganox1010 can be used in combination with other additives such as co-stabilizers (thioethers, phosphites, phosphonites), light stabilizers, and other functional stabilizers.

Irganox1010 is recommended for applications such as:

- Solvent-based coating applications
- Tackifier resins
- Hot-melt adhesives

### **Recommended Concentrations**

The amount of Irganox1010 required for optimum performance should be determined in trials covering a concentration range. Concentrations up to several percent may be used depending on the substrate, processing conditions, requirements of the end application, and long term thermal stability requirements.

0.05 – 0.1% ppm of Irganox1010 provides long term thermal stability to the polymer.

<u>Application</u>	<u>Concentration</u>
Polyolefins	0.05 – 0.4%
Hot melt adhesives	0.2 – 1%
Synthetic tackifier resins	0.1 – 0.5%
Solvent-based coatings	0.2 – 1.0%

---

## Important

WHILE THE DESCRIPTIONS, DESIGNS, DATA AND INFORMATION CONTAINED HEREIN ARE PRESENTED IN GOOD FAITH AND BELIEVED TO BE ACCURATE, THEY ARE PROVIDED FOR GUIDANCE ONLY. BECAUSE MANY FACTORS MAY AFFECT PROCESSING OR APPLICATION/USE, BASF RECOMMENDS THAT THE READER MAKE TESTS TO DETERMINE THE SUITABILITY OF A PRODUCT FOR A PARTICULAR PURPOSE PRIOR TO USE. NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, INFORMATION, DATA OR DESIGNS PROVIDED BE CONSIDERED A PART OF BASF'S TERMS AND CONDITIONS OF SALE. FURTHER, THE DESCRIPTIONS, DESIGNS, DATA, AND INFORMATION FURNISHED BY BASF HEREUNDER ARE GIVEN GRATIS AND BASF ASSUMES NO OBLIGATION OR LIABILITY FOR THE DESCRIPTIONS, DESIGNS, DATA OR INFORMATION GIVEN OR RESULTS OBTAINED, ALL SUCH BEING GIVEN AND ACCEPTED AT THE READER'S RISK.

*Irganox is a registered trademark of BASF Group.*

© BASF Corporation, 2022



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: [www.basf.us/responsiblecare\\_usa](http://www.basf.us/responsiblecare_usa)

Canada: [www.basf.us/responsiblecare\\_canada](http://www.basf.us/responsiblecare_canada)

México: [www.basf.us/responsiblecare\\_mexico](http://www.basf.us/responsiblecare_mexico)

### **BASF Corporation**

Dispersions and Resins

11501 Steele Creek Road

Charlotte, North Carolina 28273

Phone: (800) 251 – 0612

Email: [CustCare-Charlotte@basf.com](mailto:CustCare-Charlotte@basf.com)

[www.basf.us/dpsolutions](http://www.basf.us/dpsolutions)