


DIMENSIONS (mm) :

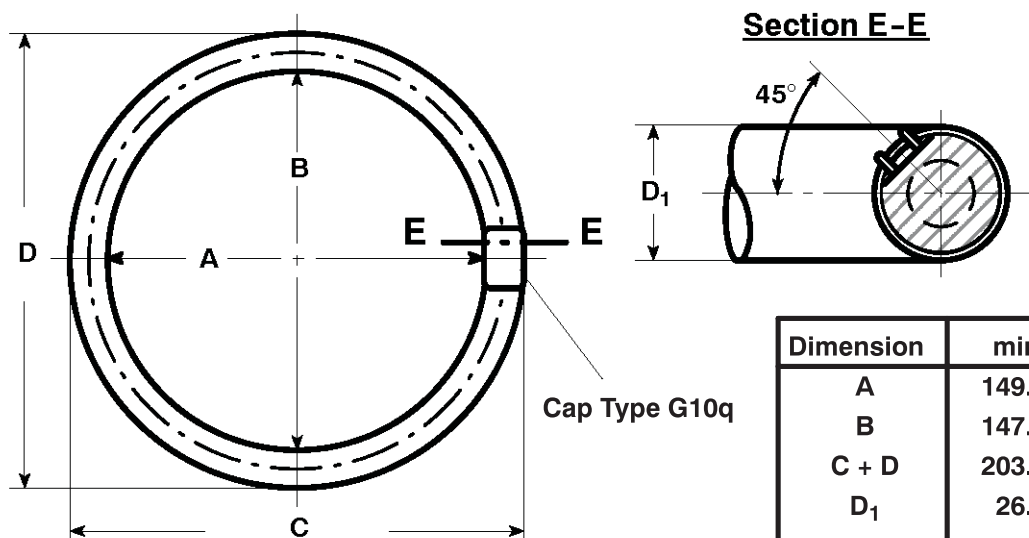

Dimension	min.	max.
A	149.1	155.6
B	147.6	157.2
C + D	203.2	215.9
D ₁	26.2	30.9

Cap: G13 (IEC61-1 sheet 7004-51-8)

ELECTRICAL DATA

		NOMINAL VALUE	MIN.	MAX.
Frequency	(Hz) :	50/60		
Lamp nominal wattage	(W) :	22		
Lamp rated wattage	single operation (W) :	22.0	20.4	23.6
	series operation (W) :			
Lamp operating voltage	(r.m.s.) (V) :	62.0	55.0	69.0
Lamp current	single operation (mA) :	400		
	series operation (mA) :			
Preheat current	single operation (mA) :			
	series operation (mA) :			

OPERATING CONDITIONS

		NOMINAL VALUE	MIN.	MAX.
Lamp ambient temperature	(°C) :		-20	
Ballast	single operation (Ω/V) :	540/220, 580/230, 610/240		
	series operation (Ω/V) :	390/220, 420/230, 452/240		
Starter	single operation :	FS-11, FS-22, COP-22, COP-11		
	series operation :	FS-22, COP-22		
Burning position	:	any		

LAMP LIFE *

Average life (50% failure rate)	(h) :	8000
Individual life	(h) :	

ATTENTION:

This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
Lamps comply with the requirements of EN 60081 and EN 61195, respectively.
Starter and ballast must comply with EN 60155 and EN 60921, respectively.
* Life test according to EN 60081, Annex C.

Issued by : Marcom
Date : 23.11.2011
Revision Date :

DATA SHEET

Specification No.: 51P-5927-00456
Supersedes :
Page 1 of 3



<u>PHOTOMETRIC DATA:</u>	CONDITIONS	MIN	NOM	Max	UNIT
Rated Lumen	0hr	110	120		lm
Rated Lumen	100hr	105	114		lm
Color Point X,Y	100hr	X 0.221 / Y 0.238			
Color Rendering Index	100hr	20	25		
Peak wave Length			370		nm
Average Wave			374		nm
UV parameter UVA+UVB			1.75		mW/klm
Average Life			8,000		hrs
COLOUR	UV-A irradiance 1m distance bare lamp (315-400nm) ($\mu\text{W}/\text{cm}^2$)	UV-B irradiance 1m distance bare lamp (280-315nm) ($\mu\text{W}/\text{cm}^2$)		ILCOS-Code	
BLACKLIGHT average at 0 h	35,8	0,05		XUV/FC22-E-G10q-29	

ATTENTION:


This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
Lamps comply with the requirements of EN 60081 and EN 61195, respectively.
Starter and ballast must comply with EN 60155 and EN 60921, respectively.
* Life test according to EN 60081, Annex C.

Issued by : Marcom
Date : 23.11.2011
Revision Date :

DATA SHEET

Specification No.: 51P-5927-00456
Supersedes :
Page 2 of 3

Evaluation acc. EN60335-2-59

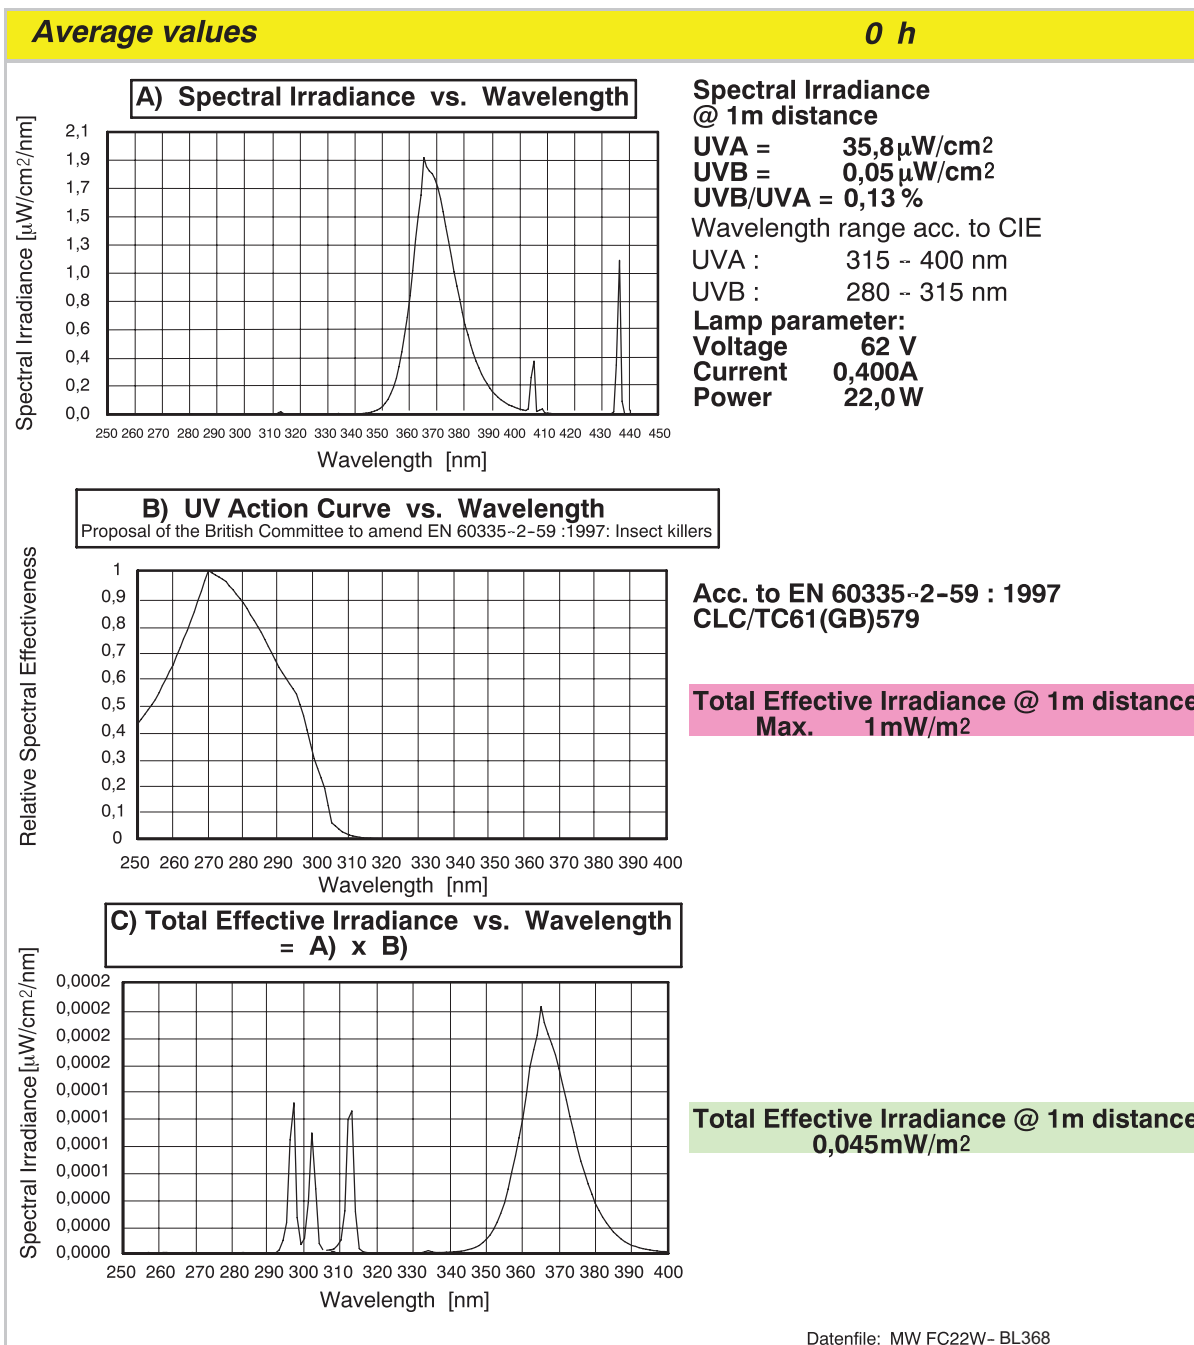

ATTENTION:

This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
 Lamps comply with the requirements of EN 60081 and EN 61195, respectively.
 Starter and ballast must comply with EN 60155 and EN 60921, respectively.
 * Life test according to EN 60081, Annex C.

Issued by : Marcom
 Date : 23.11.2011
 Revision Date :

DATA SHEET

Specification No.: 51P-5927-00456
 Supersedes :
 Page 3 of 3