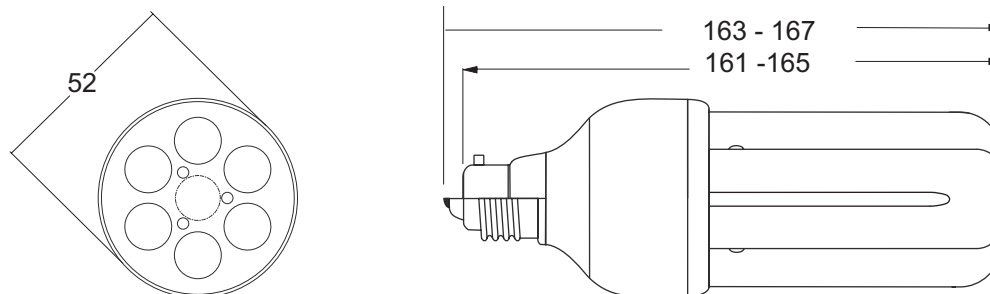


DIMENSIONS (mm)

Cap Type: E27 -IEC60061-1 sheet -7004-21

Cap Type: B22d -IEC60061-1 sheet -7004-10

ELECTRICAL DATA ¹

		Nominal Value	Min.	Max.
Lamp rated wattage	(W) :	20W	17.0W	22.0W
Lamp operating voltage (rms)	(V) :	230-240V		
Lamp current	(mA) :	160 mA		
Power Factor	:		0.55	

OPERATING CONDITIONS:

Cap Rim temperature	(°C) :			80
Lamp Ambient Temperature	(°C) :	25	-10	50
Operating Position	:	Unrestricted		
Weight	(g) :	120g		

PERFORMANCE SPECIFICATIONS :

Starting time at 25°C	(s) :			0.3
² Switching Cycles (to 50% Failure)	:		8000	30

LAMP LIFE ³

Average Electrical life (IEC cycle)	(h) :	8000		
-------------------------------------	-------	------	--	--

UV OUTPUT DATA:

Peak Intensity at 350 nm

UV-A	(315 - 400 nm)	:	<	2000	$\mu\text{W}/\text{cm}^2$	at 100 mm
UV-B	(280 - 315 nm)	:	<	60	$\mu\text{W}/\text{cm}^2$	at 100 mm
UV-C	(260 - 280 nm)	:	<	12	$\mu\text{W}/\text{cm}^2$	at 100 mm

APPLICATION: UV Irradiation in industrial and commercial applications.**Attention:**

This UV-A energy source emits UV radiation. Avoid exposure to skin and eyes.

This product must be used with suitable operating equipment and in accordance with the specified data.

Photometric characteristics are not specified as these lamps are not intended for general lighting applications.

Lamps comply with EN 60 968 (Safety Requirements) and EN 60 969 (Performance Requirements) and CE Regulation.

This product is in accordance with relevant IEC standards.

¹ Measured according to EN 60 969, at 50 Hz, lamp aged 100h.² Switching Cycle ON time 60s; OFF time 180s, at rated Voltage.³ Life test according to EN 60 969NOT SUITABLE
FOR HOUSEHOLD
ROOM ILLUMINATION

Issued by : R & D Noida
Date : 15.03.2012
Revision Date :

DATA SHEET

Specification No. : N5558
Supersedes :
Page : 1 of 3




Evaluation acc. EN60335-2-59

Mini Lynx 20W BL368

E6864 Gr. : A 1

100 h

A) Spectral Irradiance vs. Wavelength

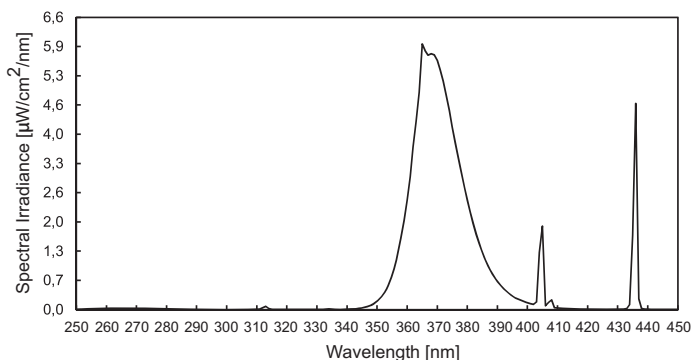Spectral Irradiance
@ 0,5 m distance


UVA = 117,8 $\mu\text{W}/\text{cm}^2$
 UVB = 0,16 $\mu\text{W}/\text{cm}^2$
 UVB/UVA = 0,14 %
 Wavelength range acc. to CIE
 UVA : 315 - 400 nm
 UVB : 280 - 315 nm

Lamp parameter:

Voltage 229,9 V
 Current 0,160 A
 Power 20,5 W


B) UV Action Curve vs. Wavelength

Proposal of the British Committee to amend EN 60335-2-59 :1997: Insect killers

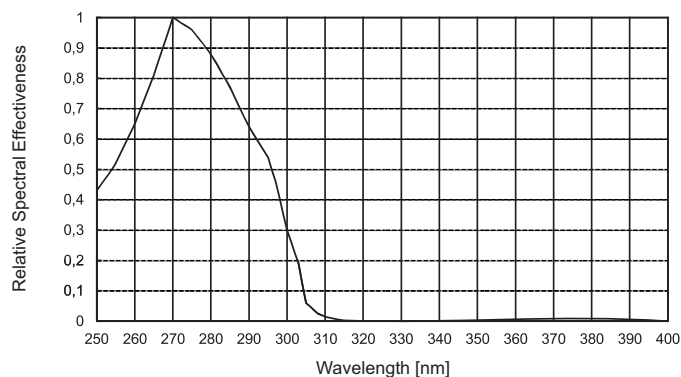

Acc. to EN 60335-2-59 : 1997
 CLC/TC61(GB)579

Total Effective Irradiance @ 0,5 m distance
 Max. 1 mW/m^2

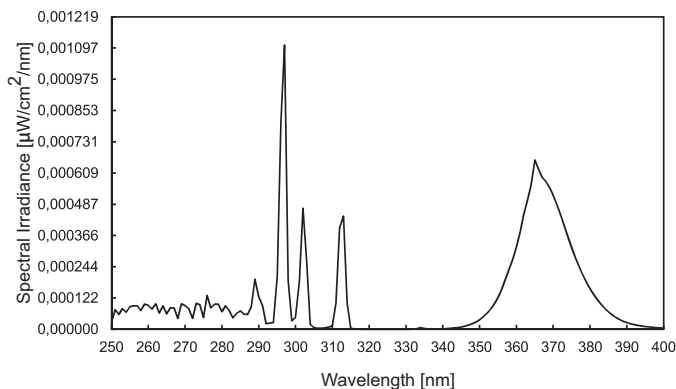C) Total Effective Irradiance vs. Wavelength
= A) x B)

Total Effective Irradiance @ 0,5 m distance
 0,190 mW/m^2

Datenfile: IUUV25745.DAT

Actual Measured "UV Irradiance" Limited External communication



Issued by : R & D Noida
 Date : 15.03.2012
 Revision Date :

DATA SHEET

Specification No. : N5558
 Supersedes :
 Page : 2 of 3



Light Test Report
✓ CIE Color Parameters
ID= x = 0.2306 , y = 0.2425
ID= u' = 0.1693 , v' = 0.4005
ID= Tc = 100000K
ID= Ld = 479.1nm
ID= Purity = 43.1%
ID= Lp = 380.0nm
ID= HW = 5.7nm
ID= Red Ratio = 0.9 %
ID= Green Ratio = 96.0 %
ID= Blue Ratio = 3.1 %
+ ID= Rendering Index Ra = 16.7
✓ Photo Parameters
ID= Flux = 124.50 lm
ID= Fe = 1.4664 W
✓ Electrical Parameters
✓ Status
ID= Scan Range = 380.0-800.0nm
ID= Scan Interval = 5.0nm[0]

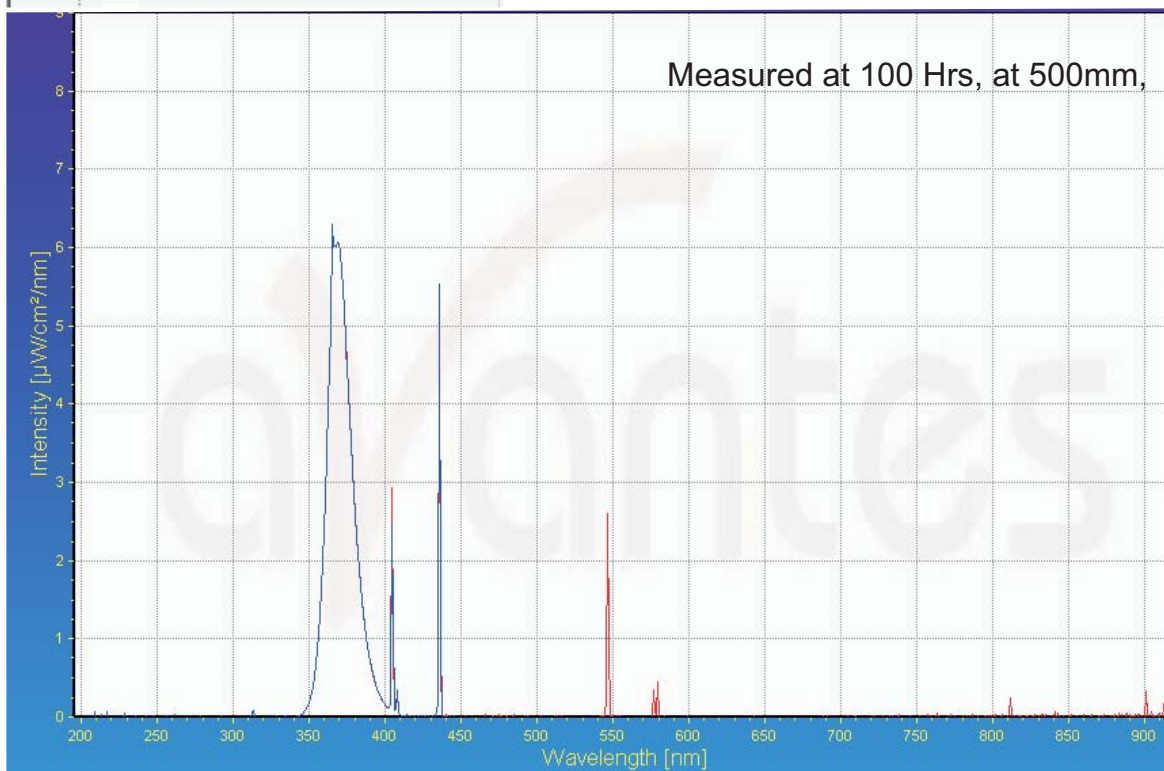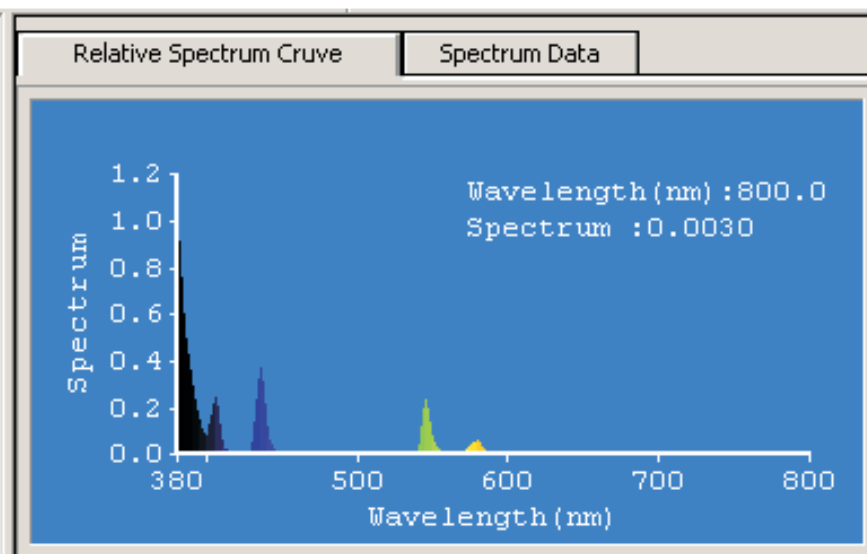

Actual Measured "UV Irradiance" Limited External communication

Issued by : R & D Noida
Date : 15.03.2012
Revision Date :

DATA SHEET

Specification No. : N5558
Supersedes :
Page : 3 of 3