
## Micro M8N GPS module

PIN OUT

## **Bottom View**

GND TXD TXD SSV SSDA SCL

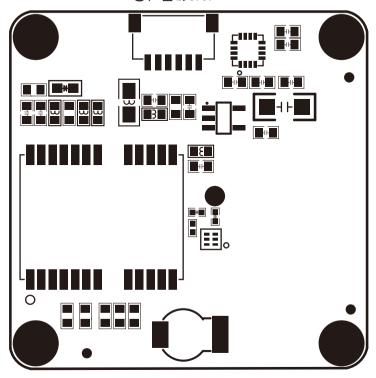

## **FEATURES**

- · Industry leading -167 dBm navigation sensitivity
- · Navigation update rate up to 10 Hz
- · Cold starts: 26s
- · LNA MAX2659ELT+
- 25 x 25 x 4 mm ceramic patch antenna
- Rechargeable 3V lithium backup battery
- · Low noise 3.3V regulator
- · Power and fix indicator LEDs
- Protective case
- 15cm PIXFALCON&microAPM compatible 6-pin cable included
- . Dimension: 38\*38\*11mm
- . Weight: 20.6g with case.

## PACKAGE INCLUDED

- Micro M8N GPS \* 1
- 6P Cable \*1