US 20250260301A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2025/0260301 A1**

Dwivedi et al. (43) **Pub. Date: Aug. 14, 2025**

(54) **CURRENT RECONSTRUCTORS AND ASSOCIATED SYSTEMS AND METHODS**

(71) Applicant: **Analog Devices International Unlimited Company**, Limerick (IE)

(72) Inventors: **Abhishek Dwivedi**, Dublin (IE); **Pietro Filoramo**, Dublin (IE); **Marwan Elfleet**, Glasgow (GB)

(21) Appl. No.: **18/438,211**

(22) Filed: **Feb. 9, 2024**

Publication Classification

(51) **Int. Cl.**

H02M 1/00 (2007.01)

H02M 3/158 (2006.01)

(52) **U.S. Cl.**

CPC ***H02M 1/0009*** (2021.05); ***H02M 1/0025*** (2021.05); ***H02M 3/158*** (2013.01)

(57) **ABSTRACT**

A method for generating an inductor current signal representing magnitude of current flowing through an inductor of a switching power converter includes (i) applying a first current signal to a first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope, (ii) applying a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal, and (iii) adjusting the first slope to reduce a phase error in a voltage of the first capacitive device.

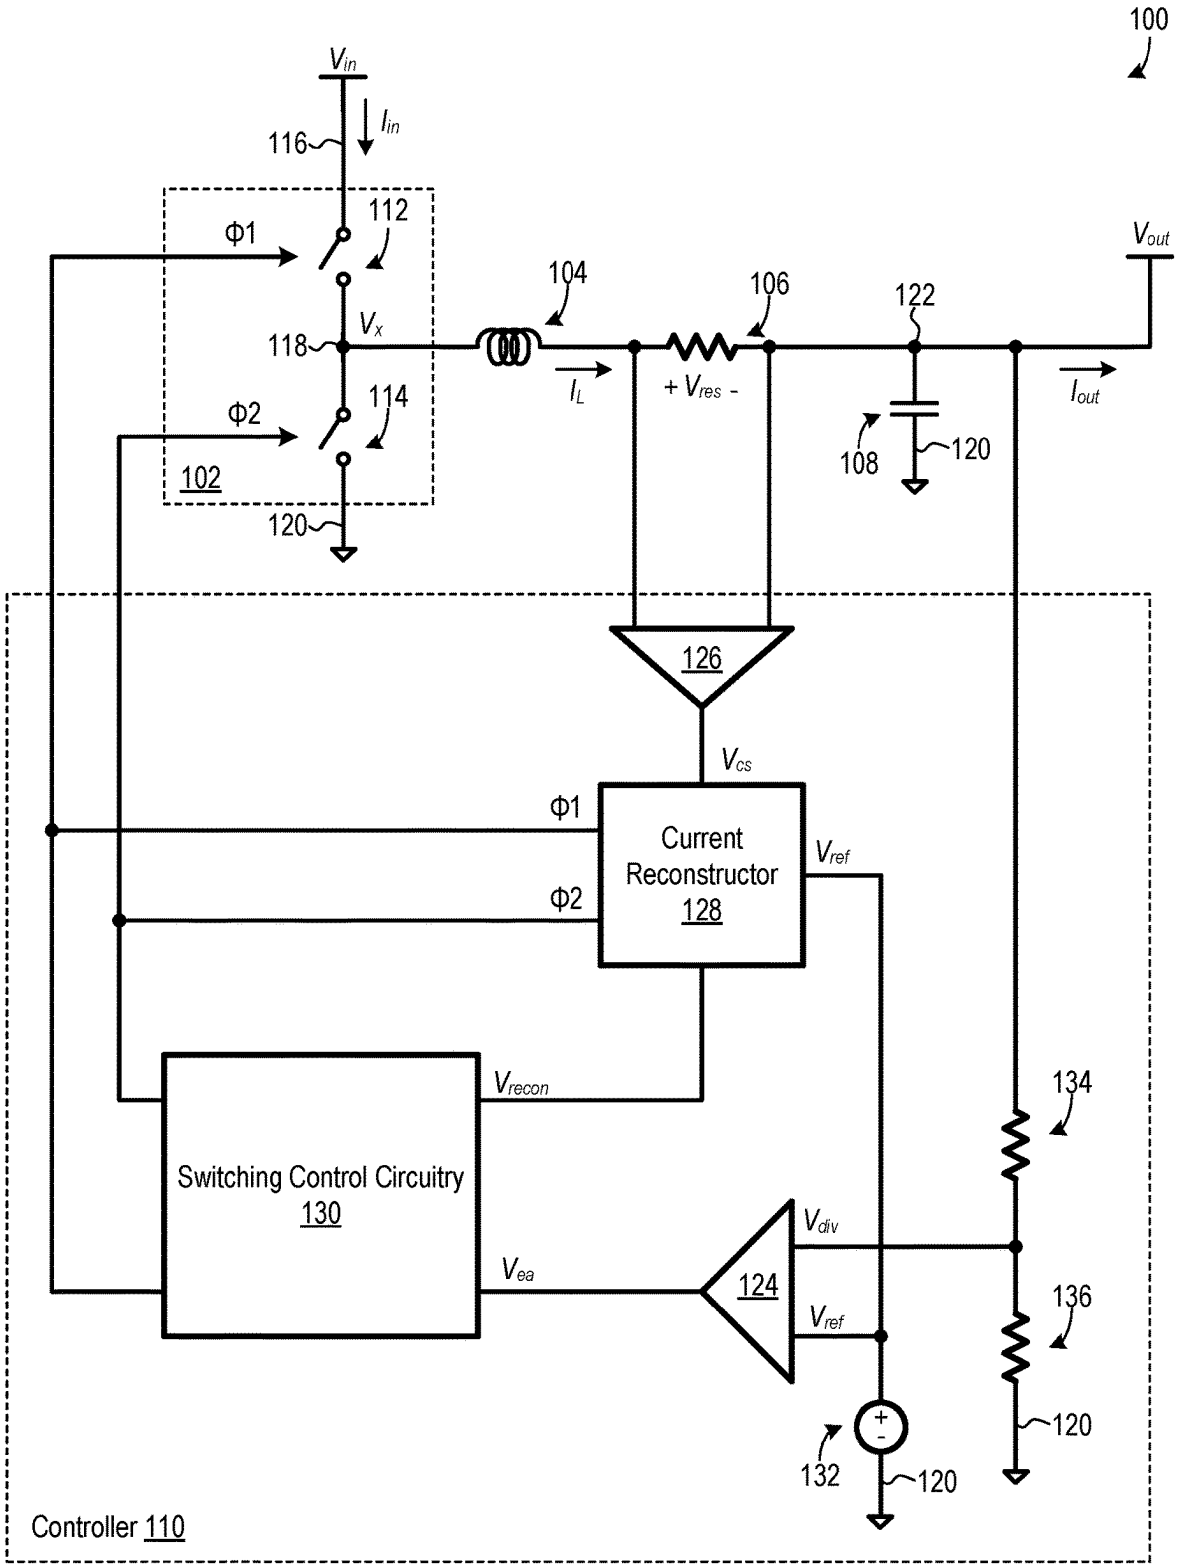
100
V_{in}
I_{in}
116
112
Φ1
V_{out}
104
106
122
V_x
118
I_L
+ V_{res} -
I_{out}
Φ2
114
108
120
102
120
126
V_{cs}
Φ1
Current Reconstructor 128
V_{ref}
Φ2
V_{recon}
134
Switching Control Circuitry 130
V_{div}
V_{ea}
124
V_{ref}
136
120
132
120
Controller 110

FIG. 1

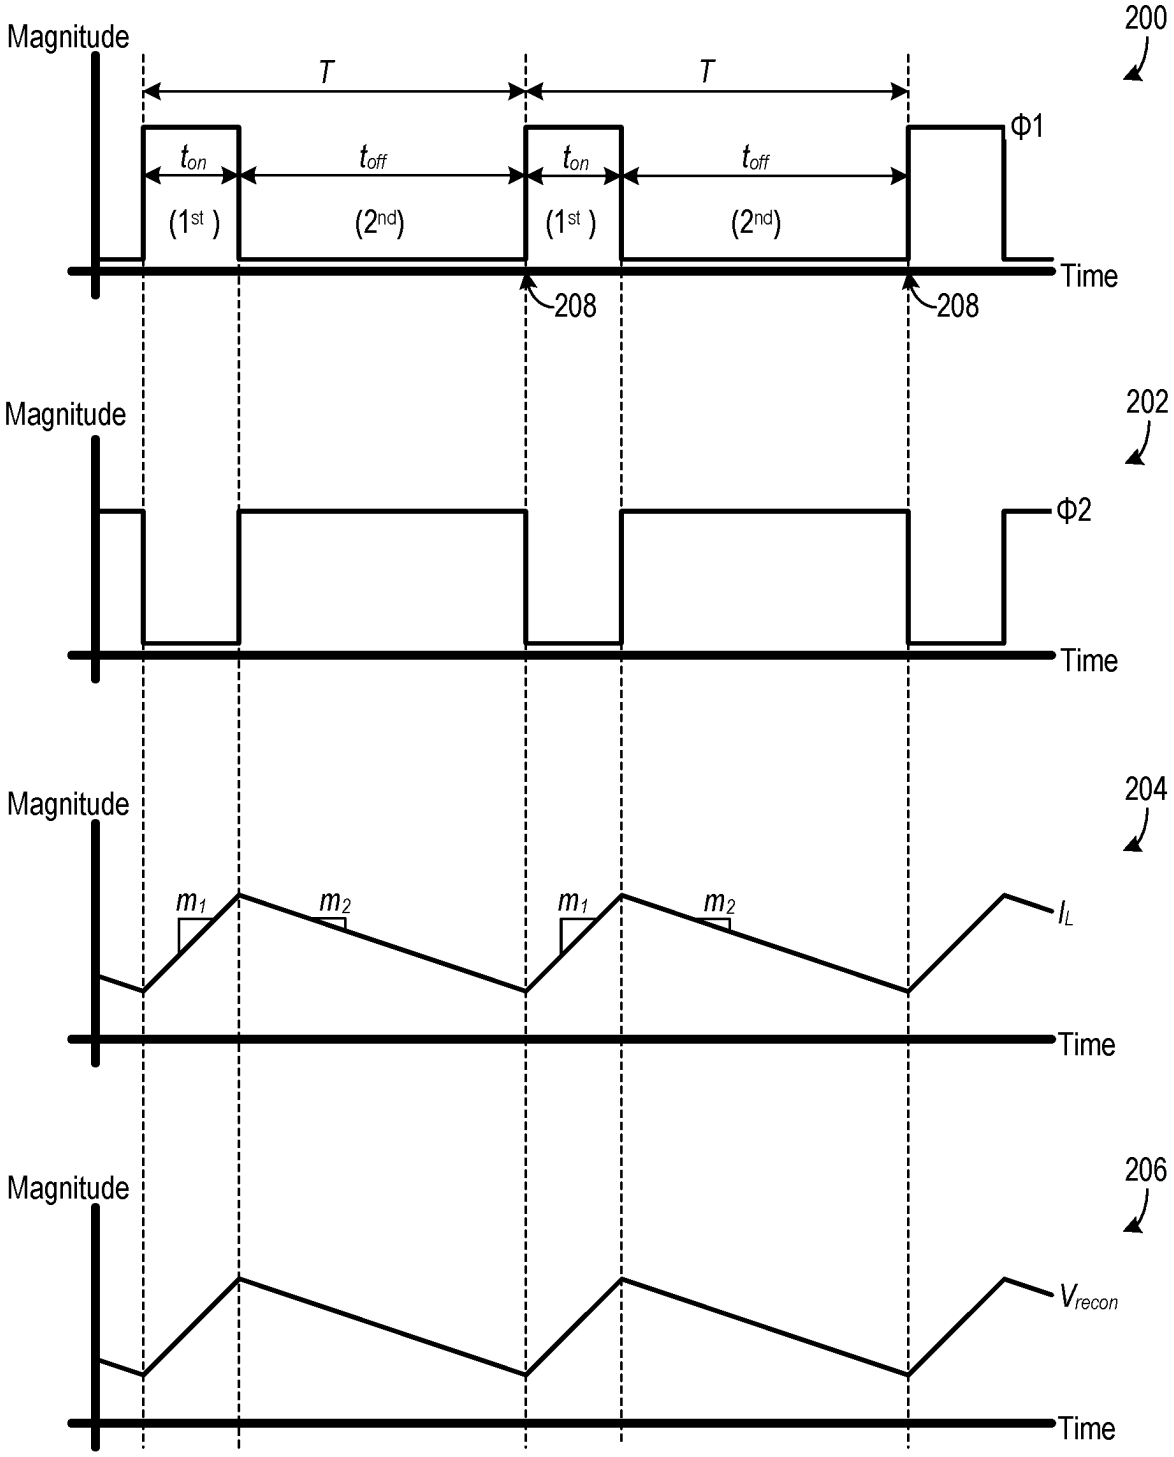
200
Magnitude
T
T
Φ1
t_{on}
t_{off}
t_{on}
t_{off}
(1st)
(2nd)
(1st)
(2nd)
Time
208
208
202
Magnitude
Φ2
Time
204
Magnitude
m_1
m_2
m_1
m_2
I_L
Time
206
Magnitude
V_{recon}
Time

FIG. 2

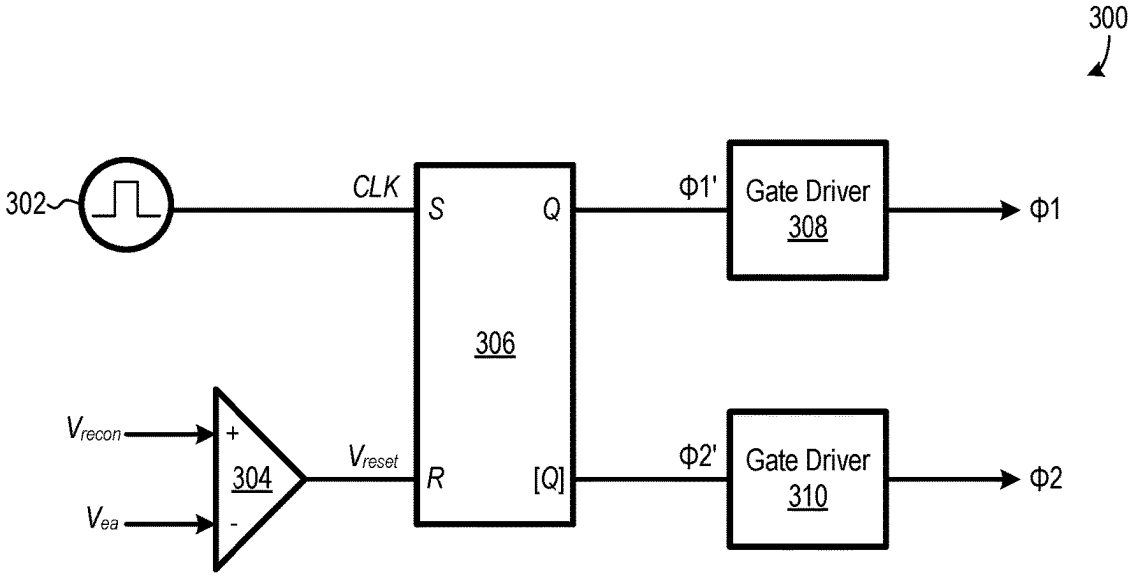
300
302
CLK
S
Q
Φ1'
Gate Driver
308
Φ1
306
V_{recon}
+
304
-
V_{reset}
R
[Q]
Φ2'
Gate Driver
310
Φ2
V_{ea}

FIG. 3

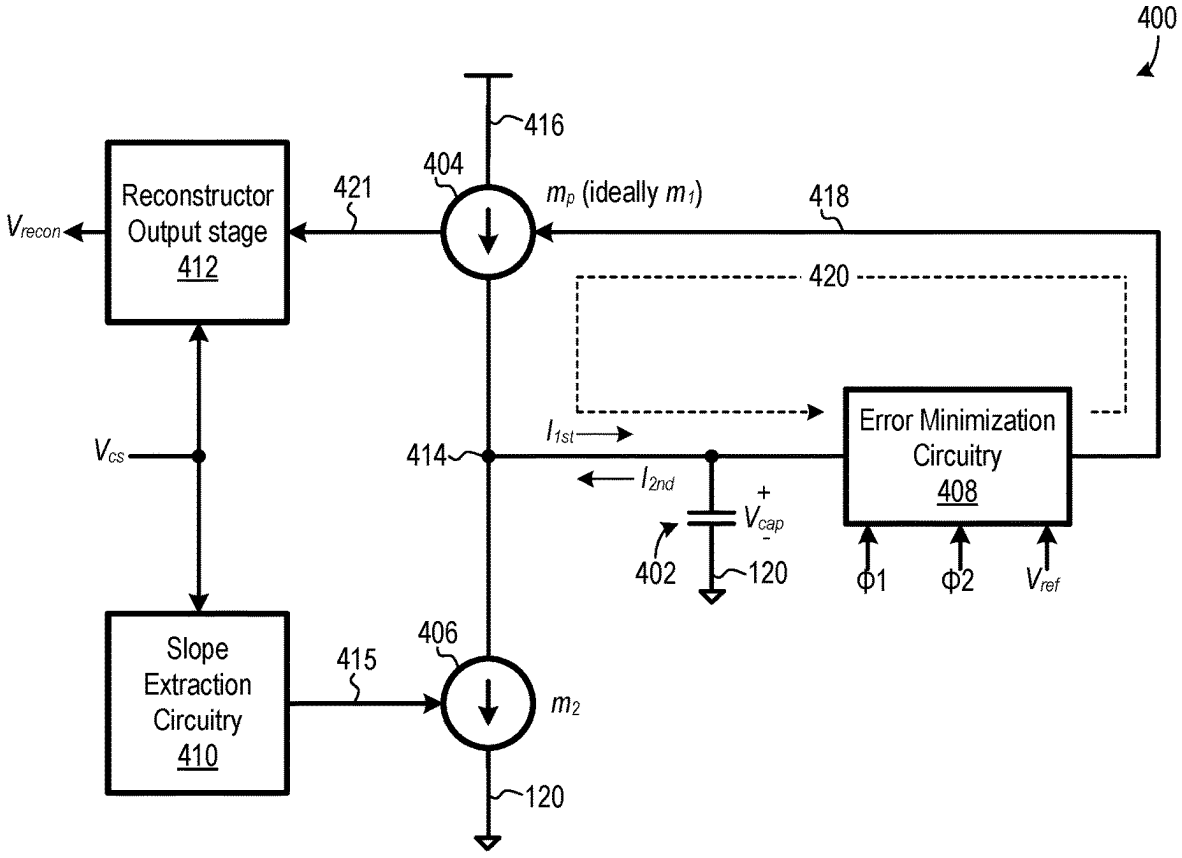
400
416
404
421
m_p (ideally m_1)
418
Reconstructor
Output stage
412
V_{recon}
420
Error Minimization
Circuitry
408
I_{1st}
V_{cs}
414
I_{2nd}
+
V_{cap}
-
402
120
Φ1
Φ2
V_{ref}
Slope
Extraction
Circuitry
410
406
415
m_2
120

FIG. 4

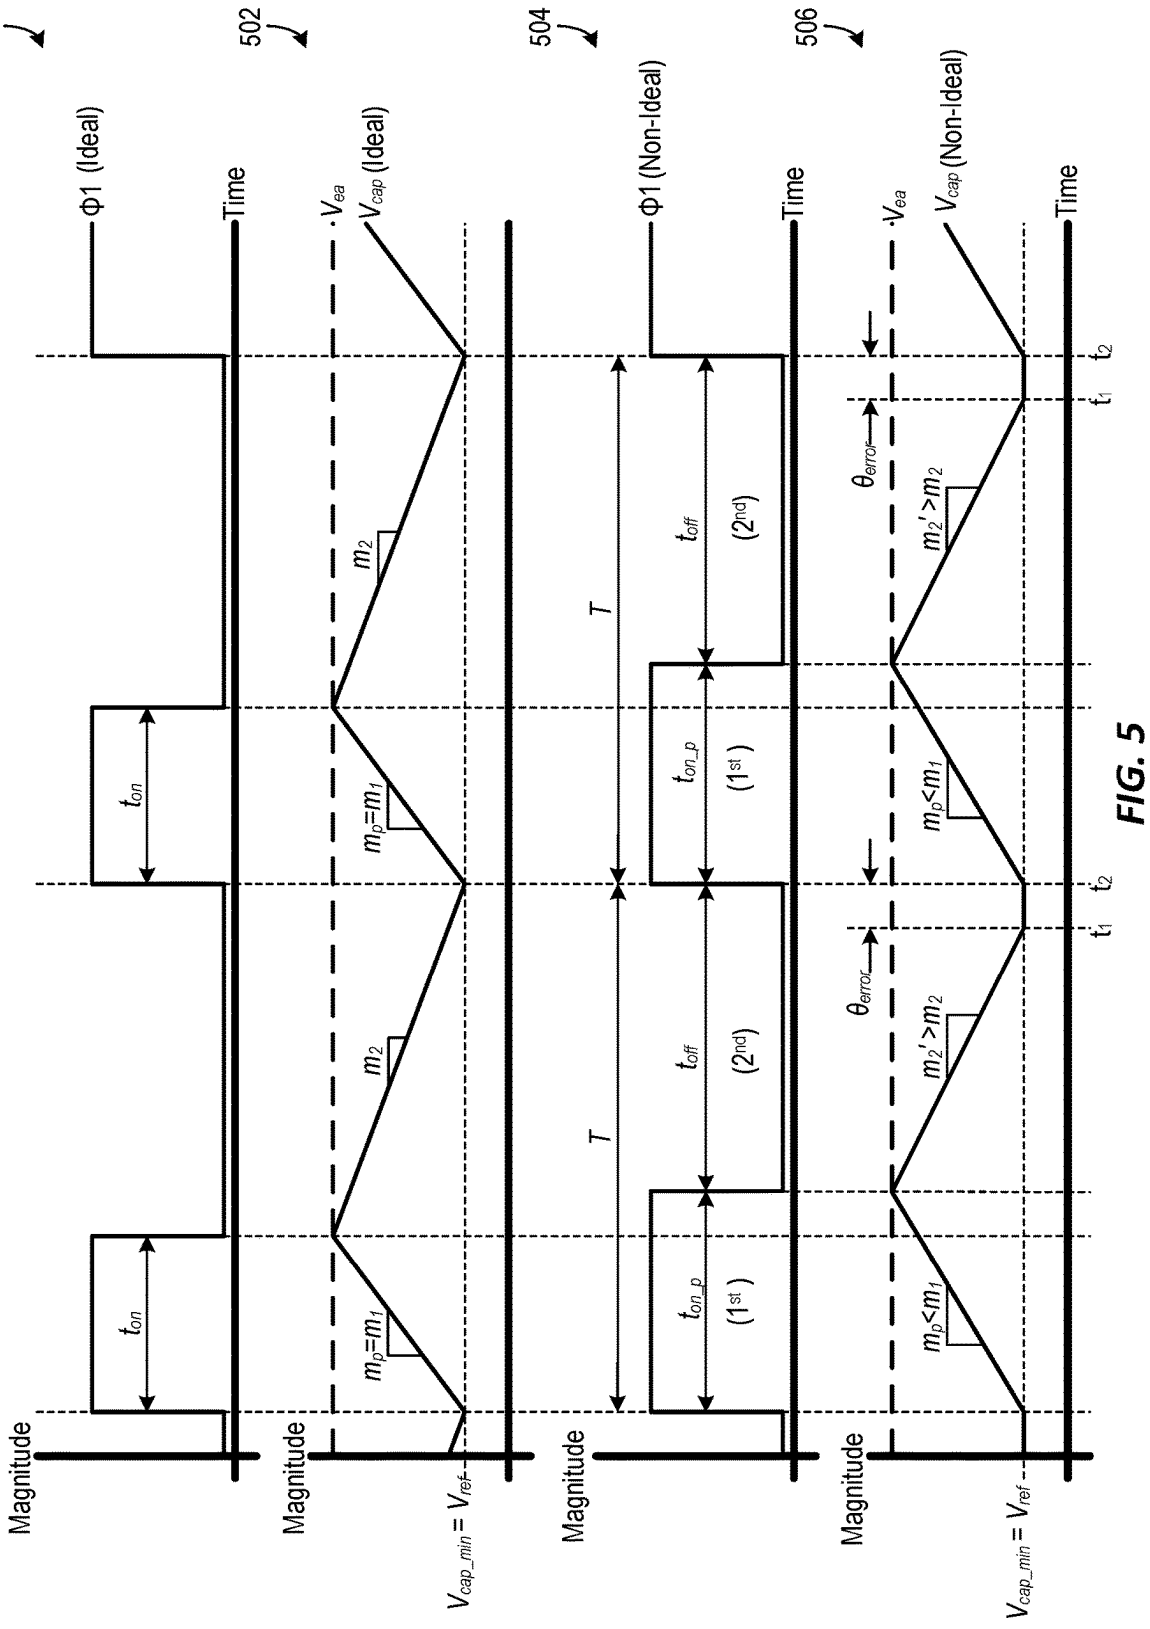
500
502
504
506
Φ1 (Ideal)
Time
V_{ea}
V_{cap} (Ideal)
t_{on}
$m_p=m_1$
m_2
Magnitude
$V_{cap_min} = V_{ref}$
Φ1 (Non-Ideal)
V_{cap} (Non-Ideal)
T
t_{off}
t_{on_p}
(1st)
(2nd)
θ_{error}
$m_2'>m_2$
$m_p<m_1$
t_1
t_2

FIG. 5

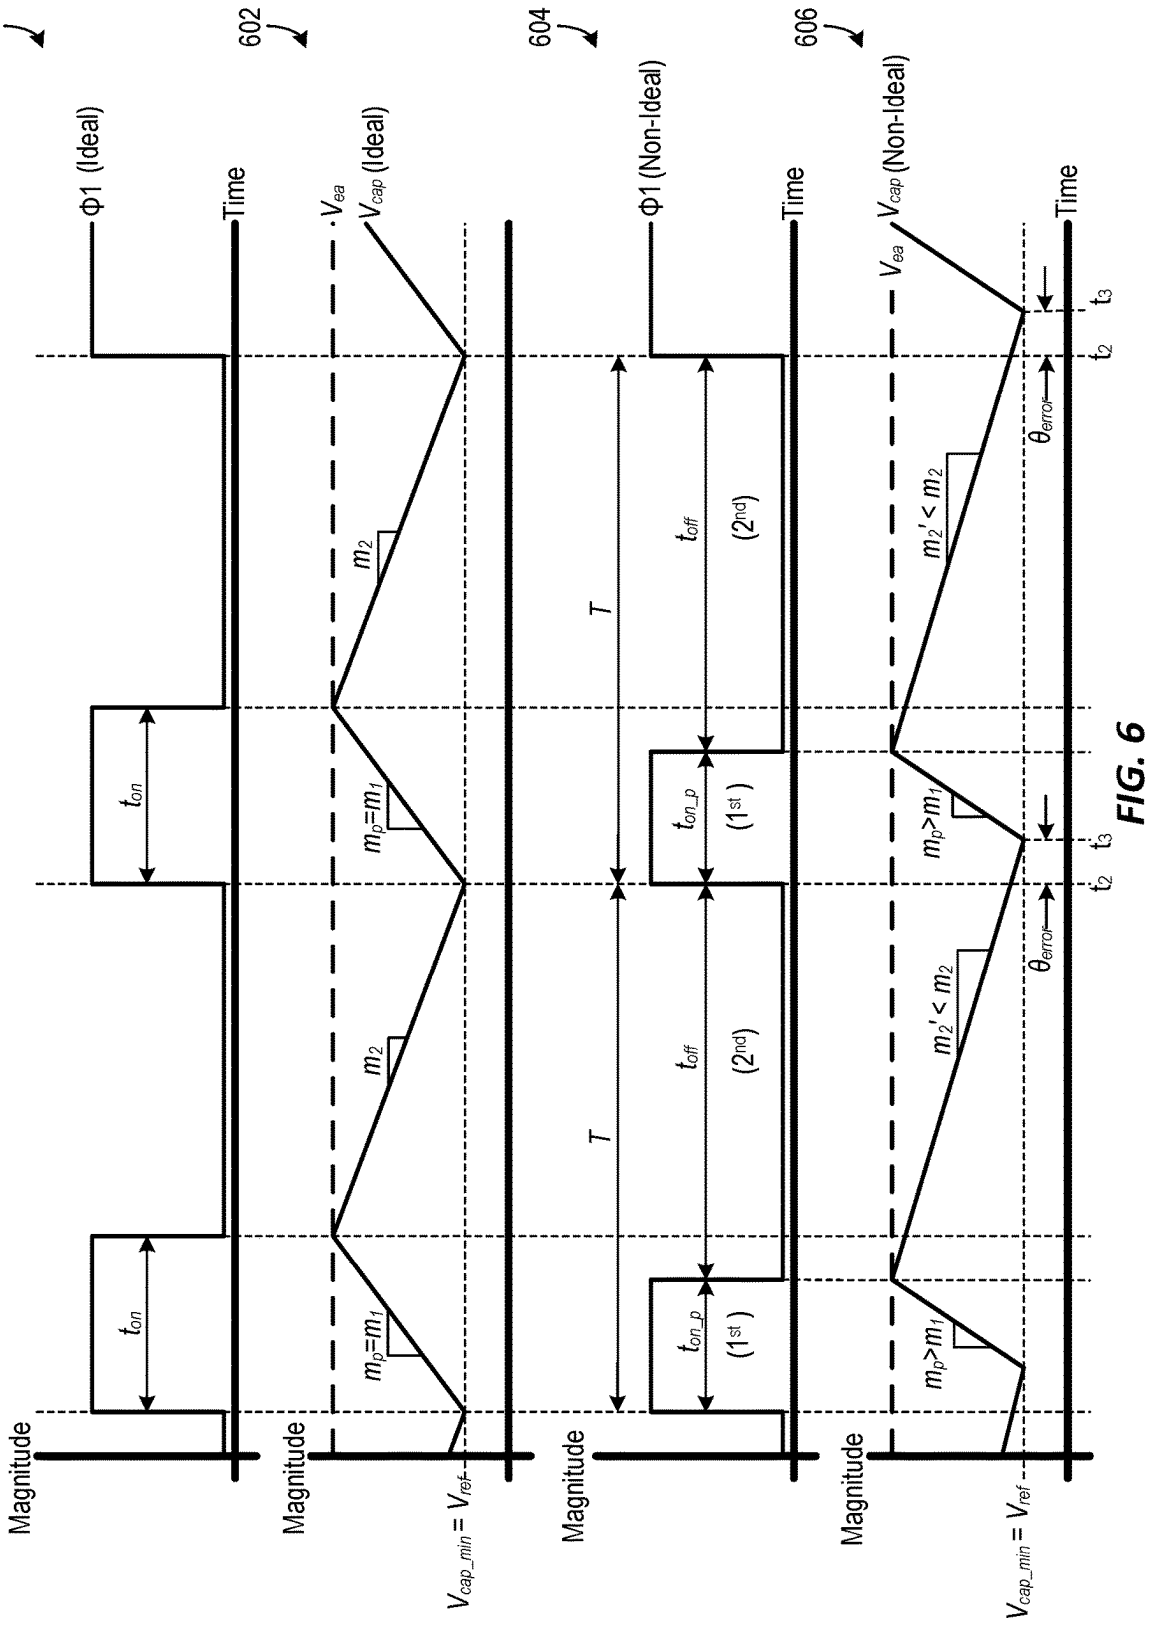
600
602
604
606
Φ1 (Ideal)
Time
Magnitude
t_{on}
V_{ea}
V_{cap} (Ideal)
m_2
$m_p=m_1$
$V_{cap_min} = V_{ref}$
Φ1 (Non-Ideal)
V_{cap} (Non-Ideal)
T
t_{off}
(2nd)
t_{on_p}
(1st)
$m_2' < m_2$
$m_p>m_1$
θ_{error}
t_2
t_3

FIG. 6

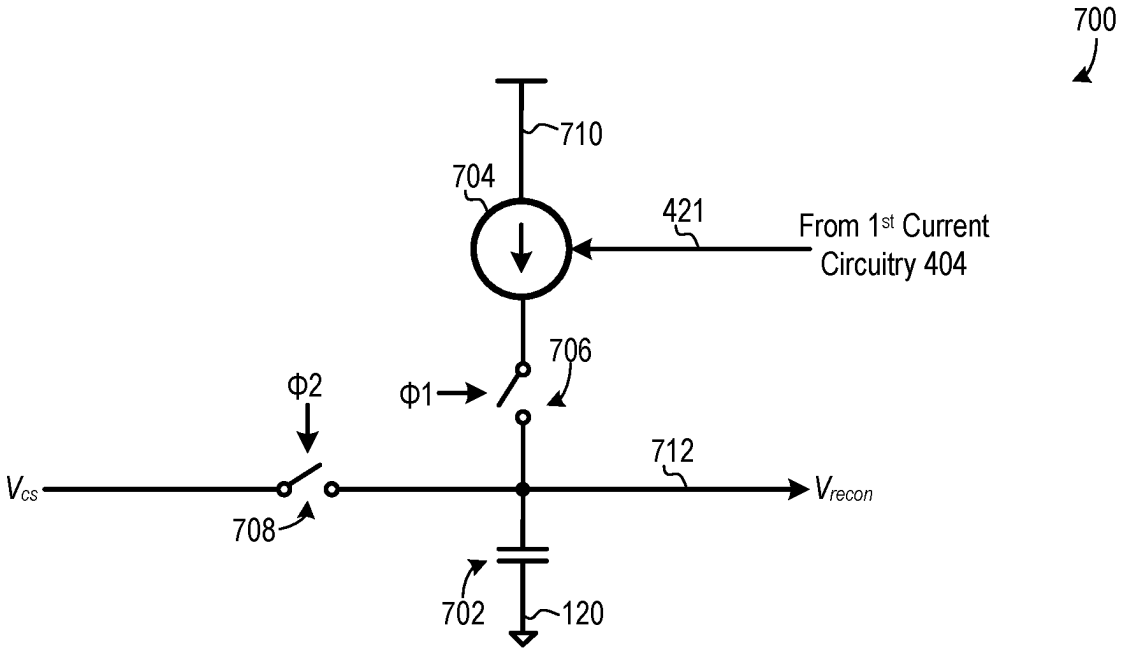
700
710
704
421
From 1st Current Circuitry 404
706
Φ2
Φ1
712
V_{cs}
V_{recon}
708
702
120

FIG. 7

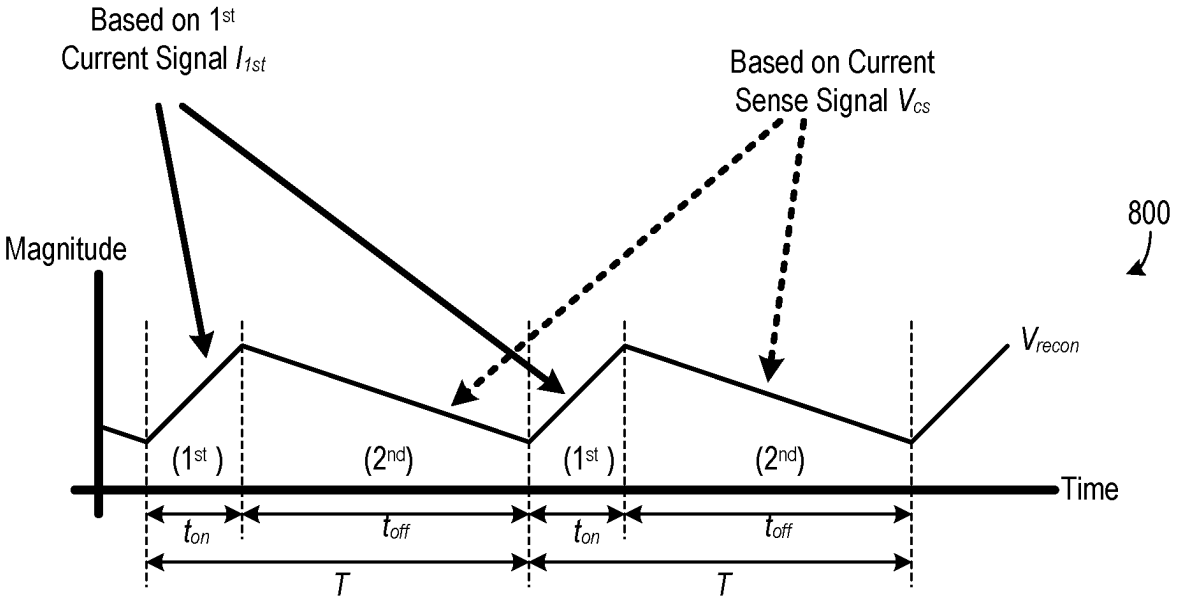
Based on 1st Current Signal I_{1st}
Based on Current Sense Signal V_{cs}
800
Magnitude
V_{recon}
(1st)
(2nd)
(1st)
(2nd)
Time
t_{on}
t_{off}
t_{on}
t_{off}
T
T

FIG. 8

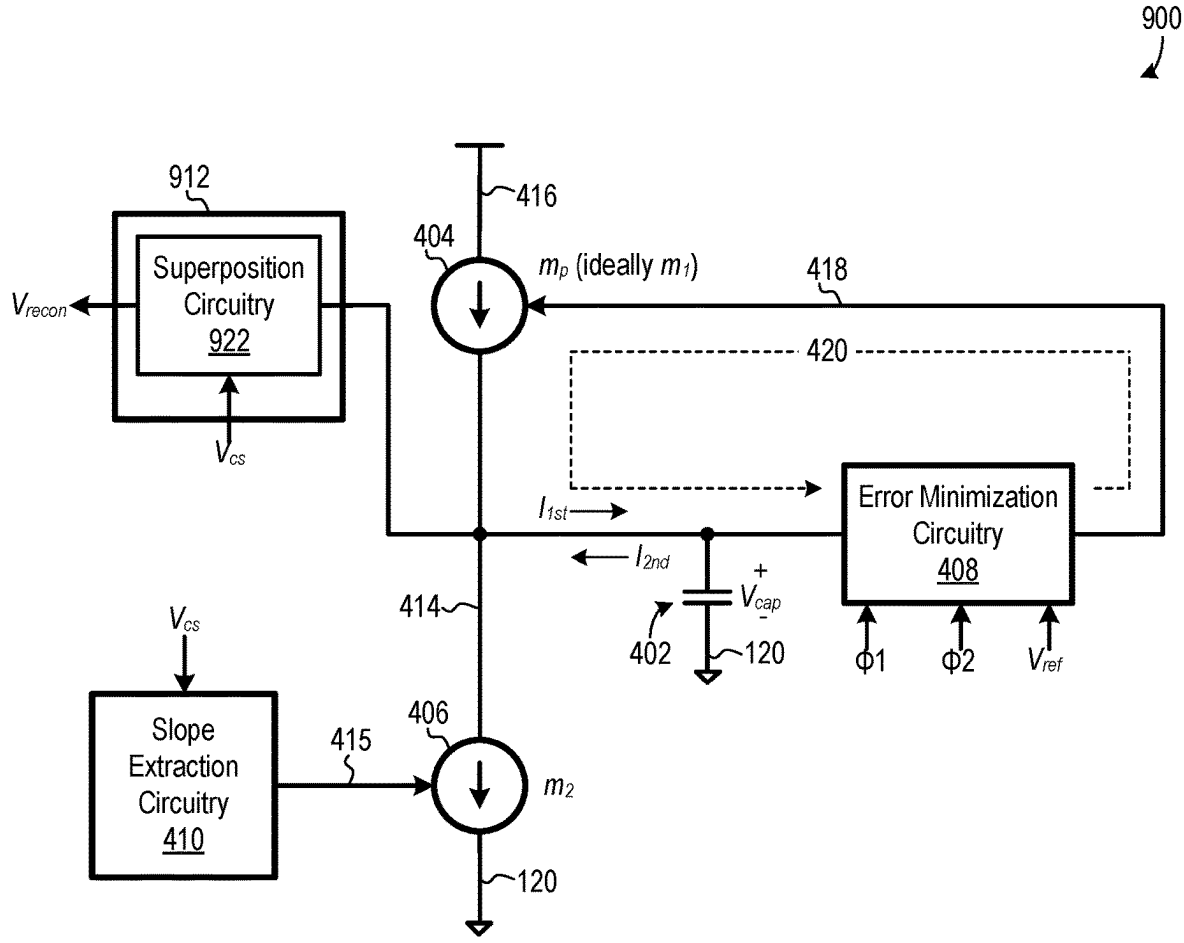
900
912
Superposition Circuitry 922
V_{recon}
V_{cs}
416
404
m_p (ideally m_1)
418
420
I_{1st}
I_{2nd}
Error Minimization Circuitry 408
+
V_{cap}
-
402
120
414
$\phi 1$
$\phi 2$
V_{ref}
V_{cs}
Slope Extraction Circuitry 410
406
415
m_2
120

FIG. 9

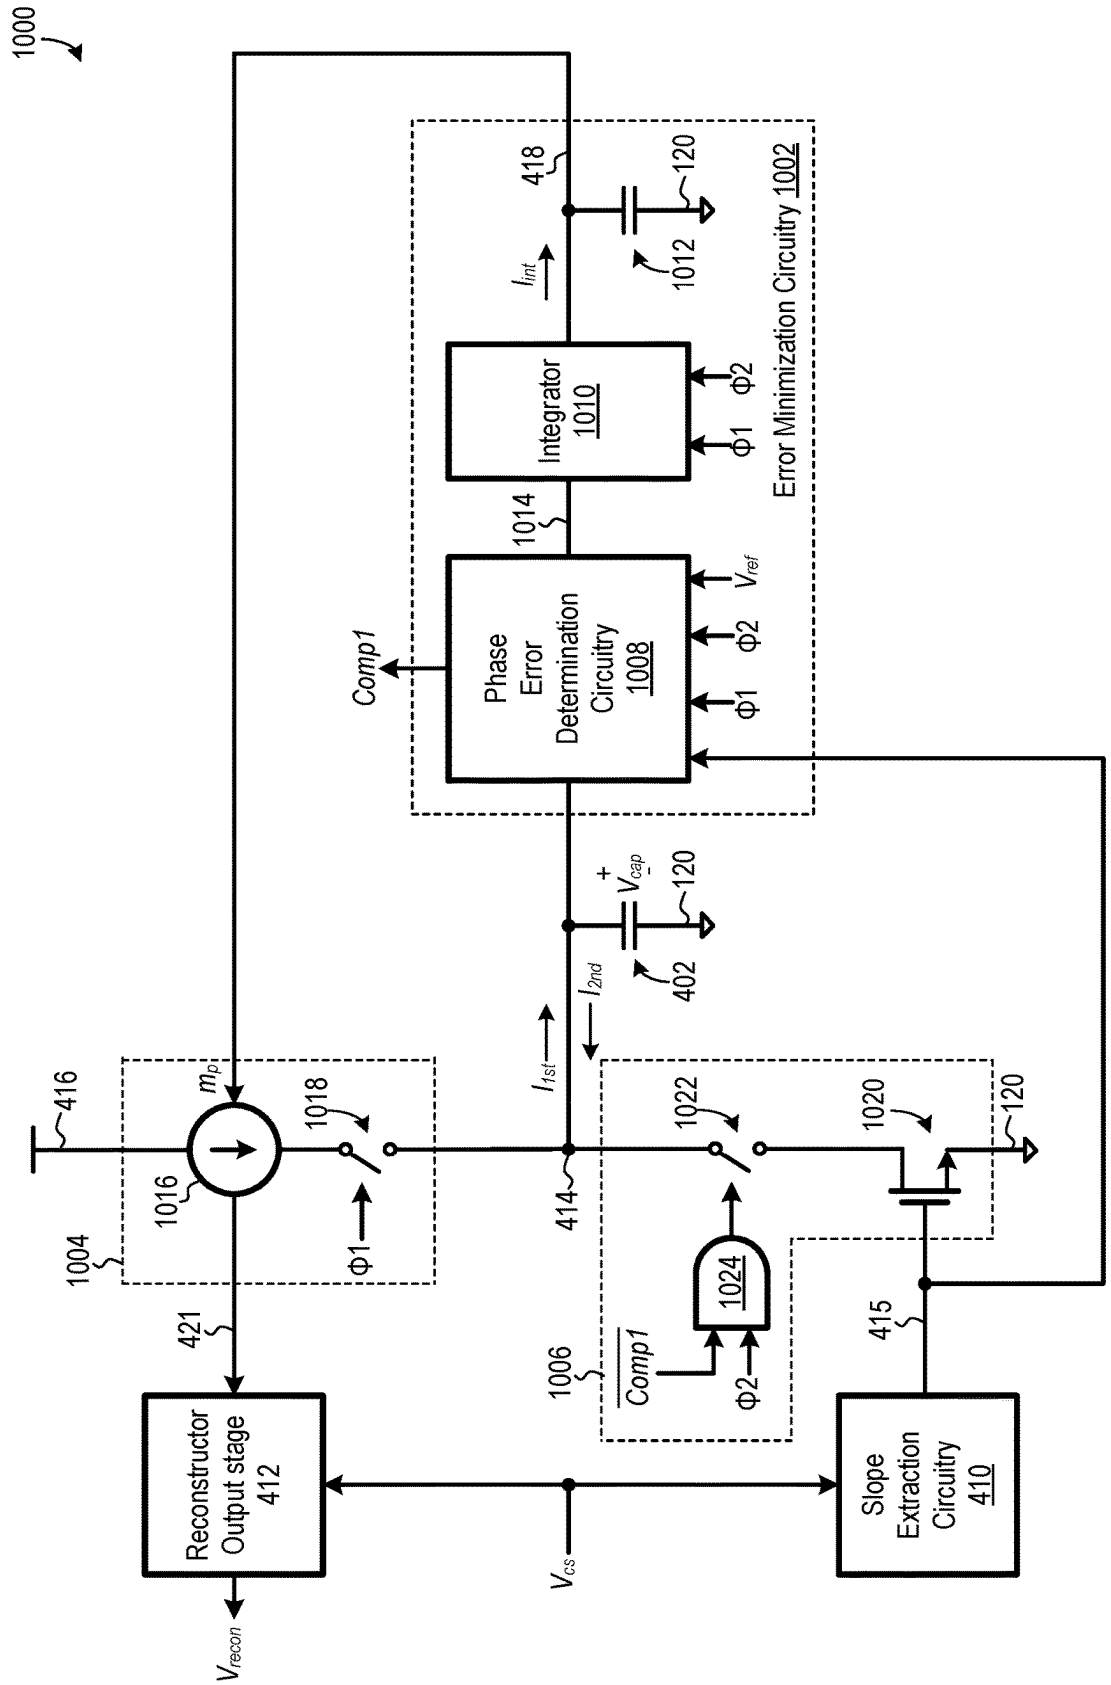
1000
Error Minimization Circuitry 1002
418
120
1012
I_{int}
Integrator 1010
Φ2
Φ1
1014
Phase Error Determination Circuitry 1008
V_{ref}
Comp1
V_{cap}
402
I_{2nd}
I_{1st}
416
m_p
1018
1016
1004
Φ1
414
1022
1020
1024
$\overline{Comp1}$
1006
Φ2
415
421
Reconstructor Output stage 412
Slope Extraction Circuitry 410
V_{cs}
V_{recon}

FIG. 10

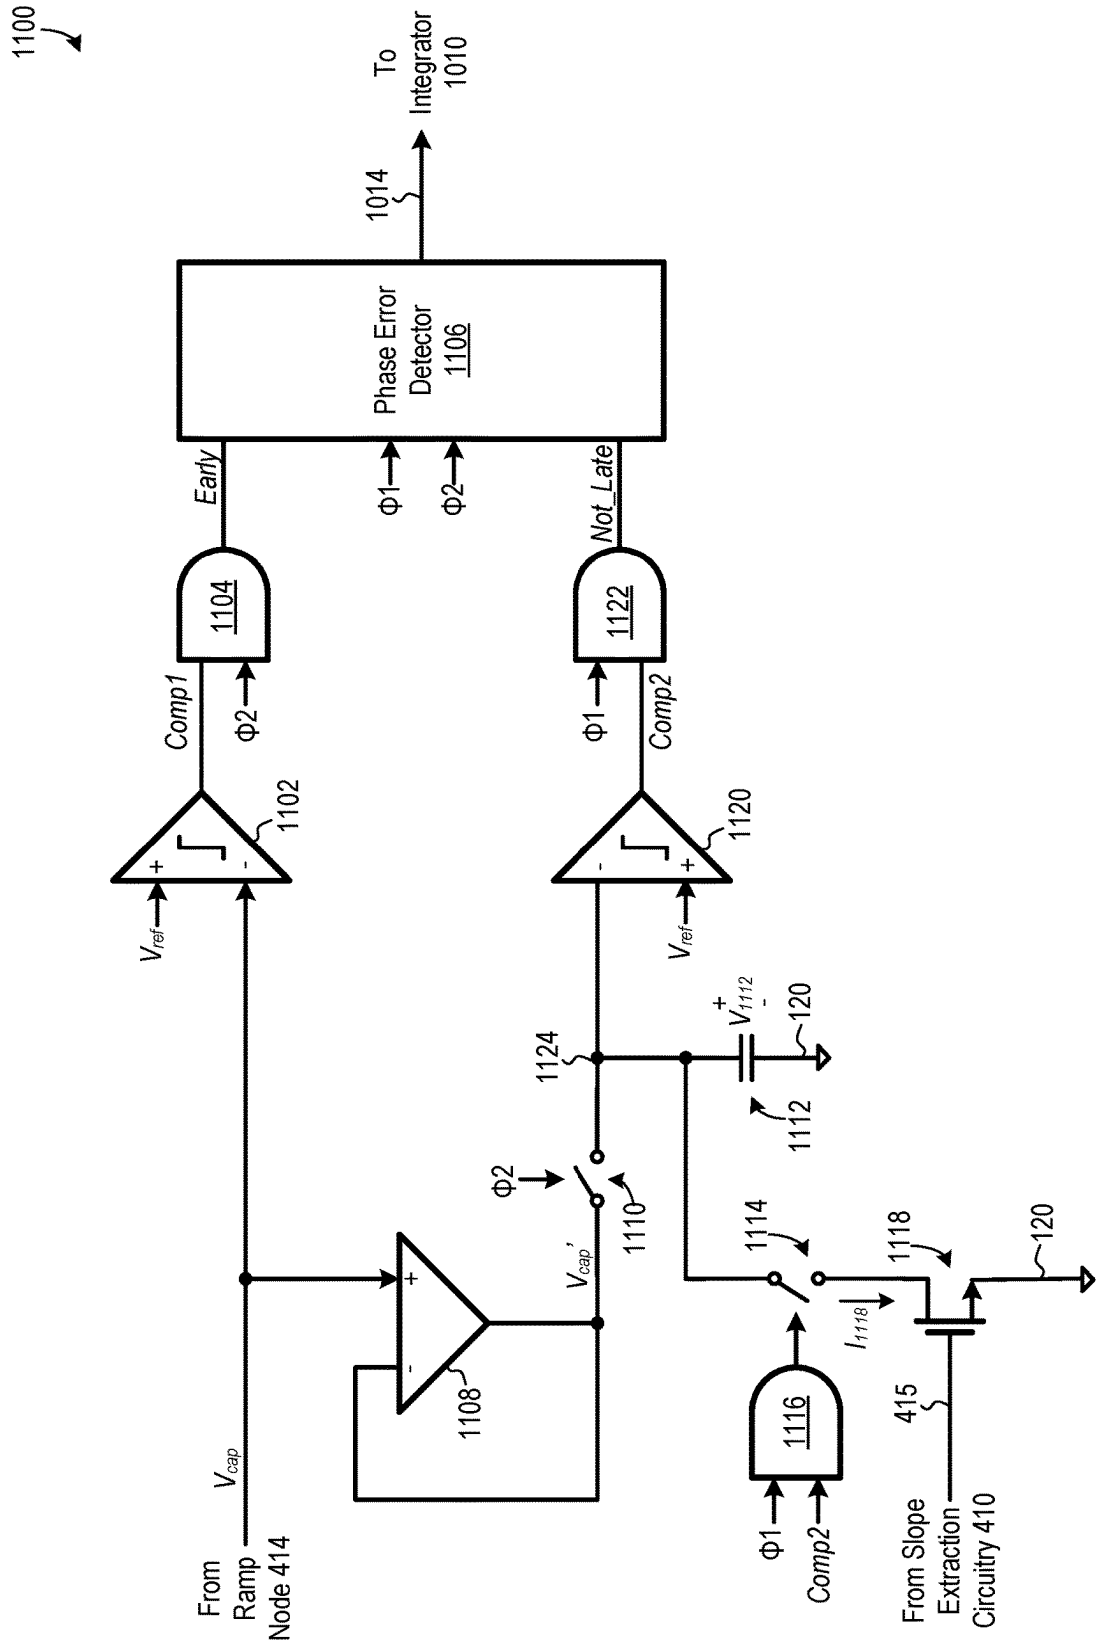
1100
To Integrator 1010
1014
Phase Error Detector 1106
Early
Not_Late
Φ1
Φ2
1104
1122
Comp1
Comp2
1102
1120
Vref
Vref
1124
V1112
120
1112
Φ2
1110
Vcap'
1114
1118
120
I1118
1108
1116
Vcap
From Ramp Node 414
Φ1
Comp2
415
From Slope Extraction Circuitry 410

FIG. 11

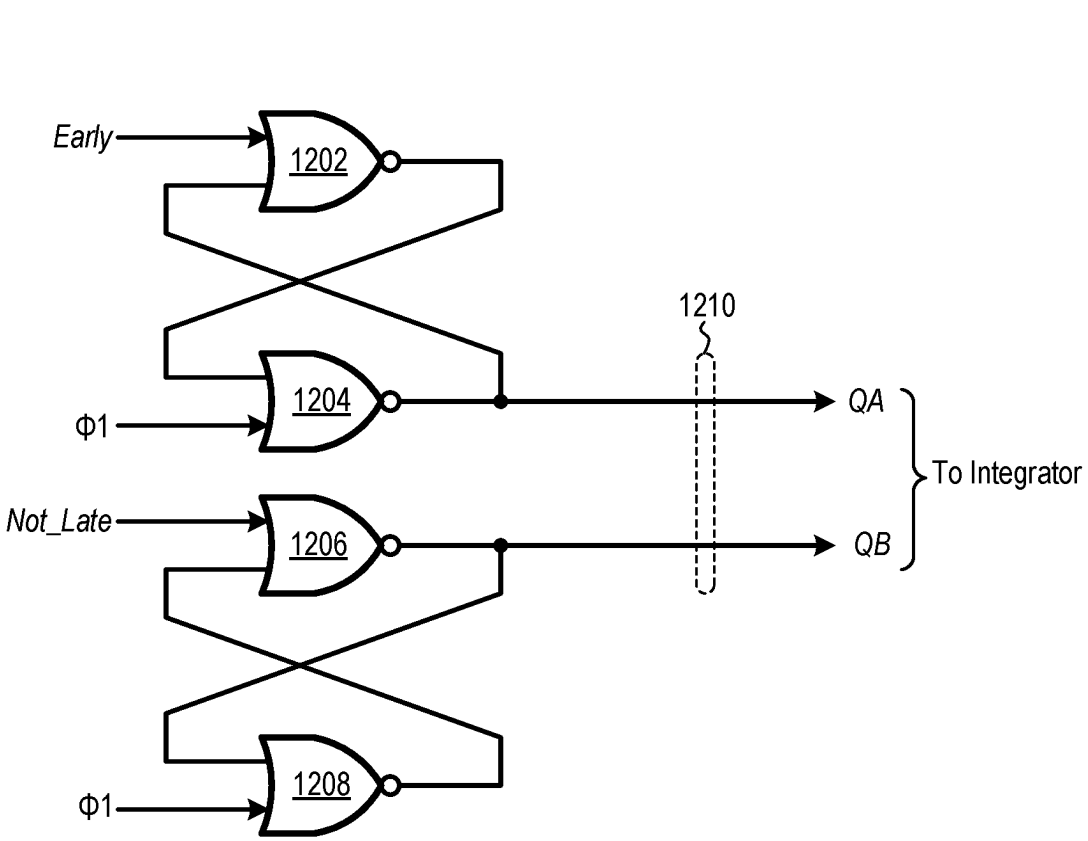
1200
Early
1202
1210
1204
Φ1
QA
To Integrator
Not_Late
1206
QB
1208
Φ1

FIG. 12

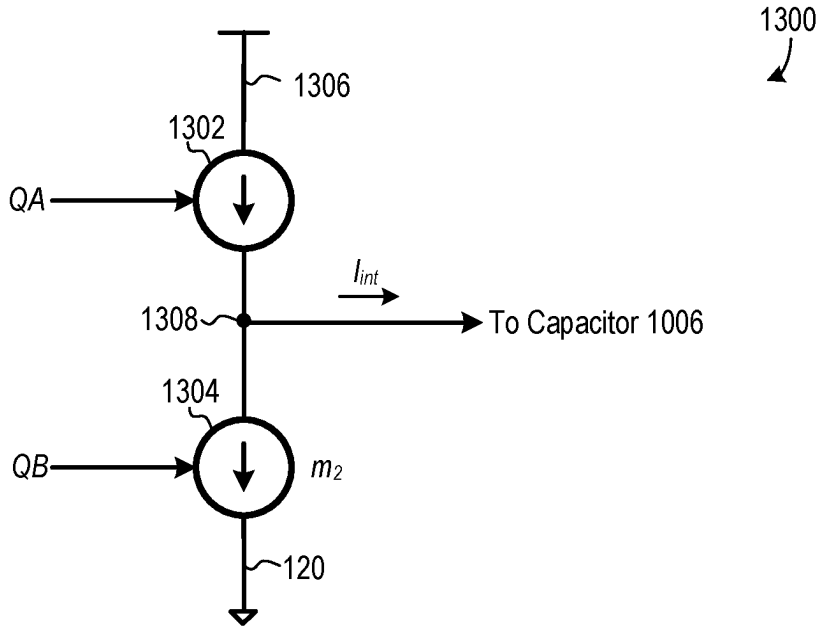
1300
1306
1302
QA
I_{int}
1308
To Capacitor 1006
1304
QB
m_2
120

FIG. 13

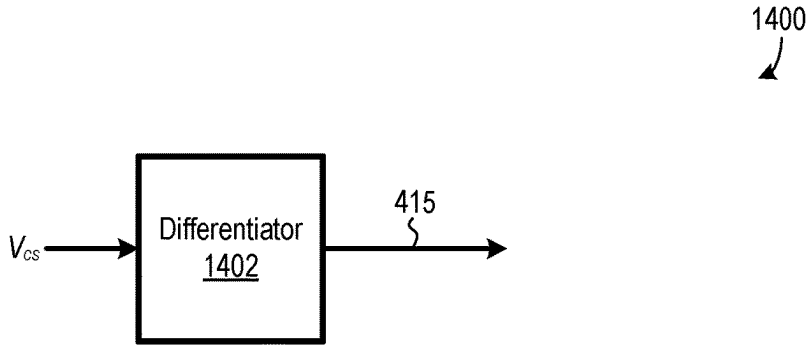
1400
V_{CS}
Differentiator
1402
415

FIG. 14

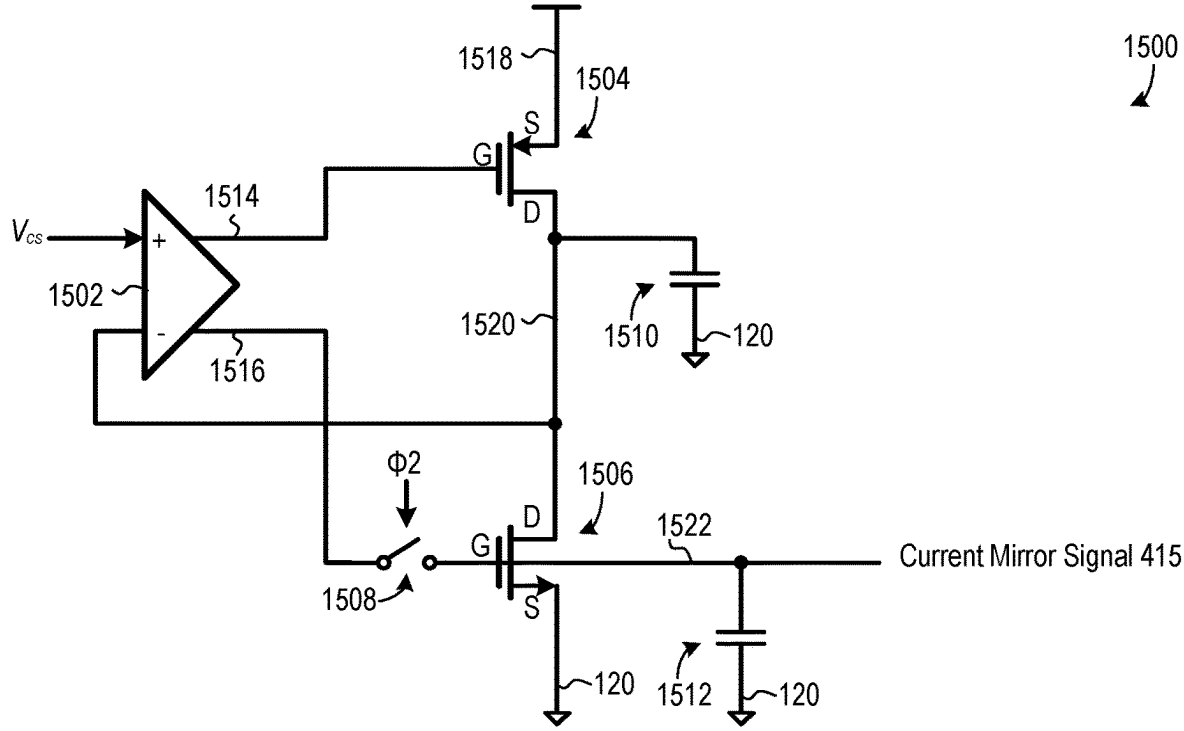
1500
1518
1504
S
G
D
1514
V_{CS}
+
1502
-
1516
1520
1510
120
Φ2
1506
D
G
1522
Current Mirror Signal 415
1508
S
120
1512
120

FIG. 15

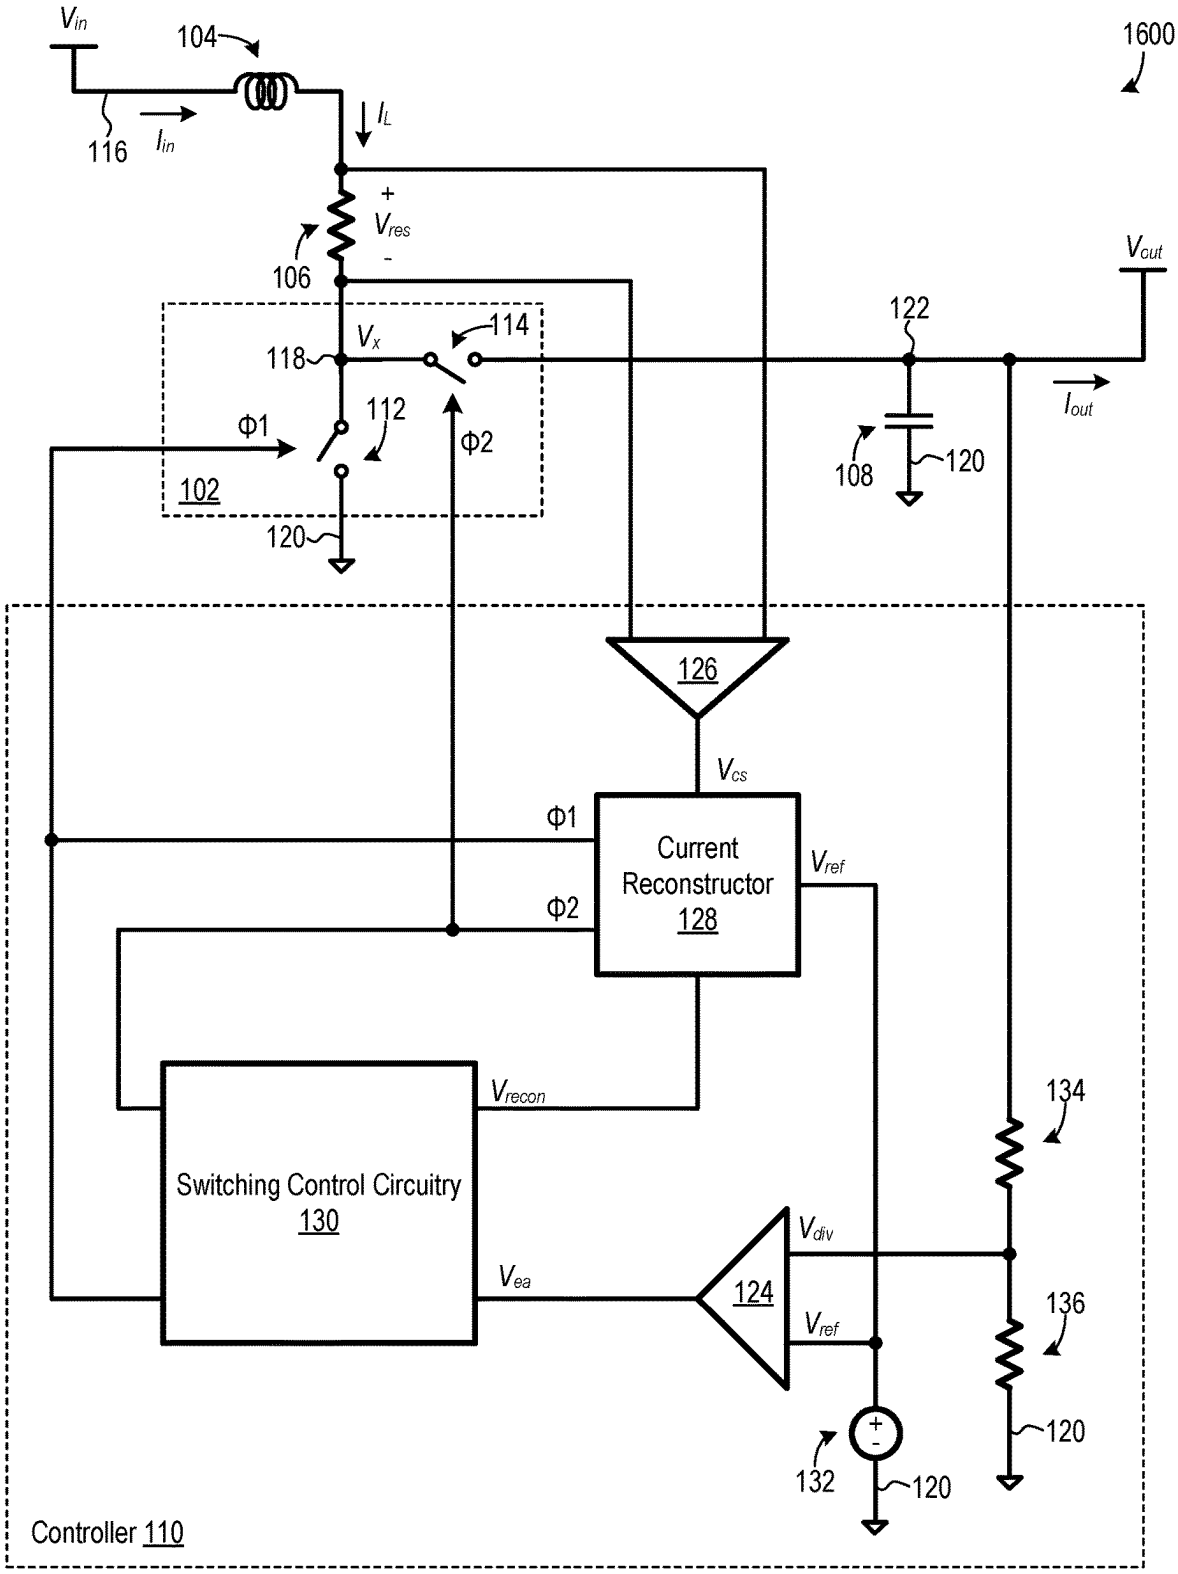
V_{in}
104
1600
116
I_{in}
I_L
+
V_{res}
-
106
V_{out}
122
V_x
114
118
112
Φ1
Φ2
I_{out}
102
108
120
126
V_{cs}
Current Reconstructor 128
V_{ref}
V_{recon}
134
Switching Control Circuitry 130
V_{div}
V_{ea}
124
136
132
Controller 110

FIG. 16

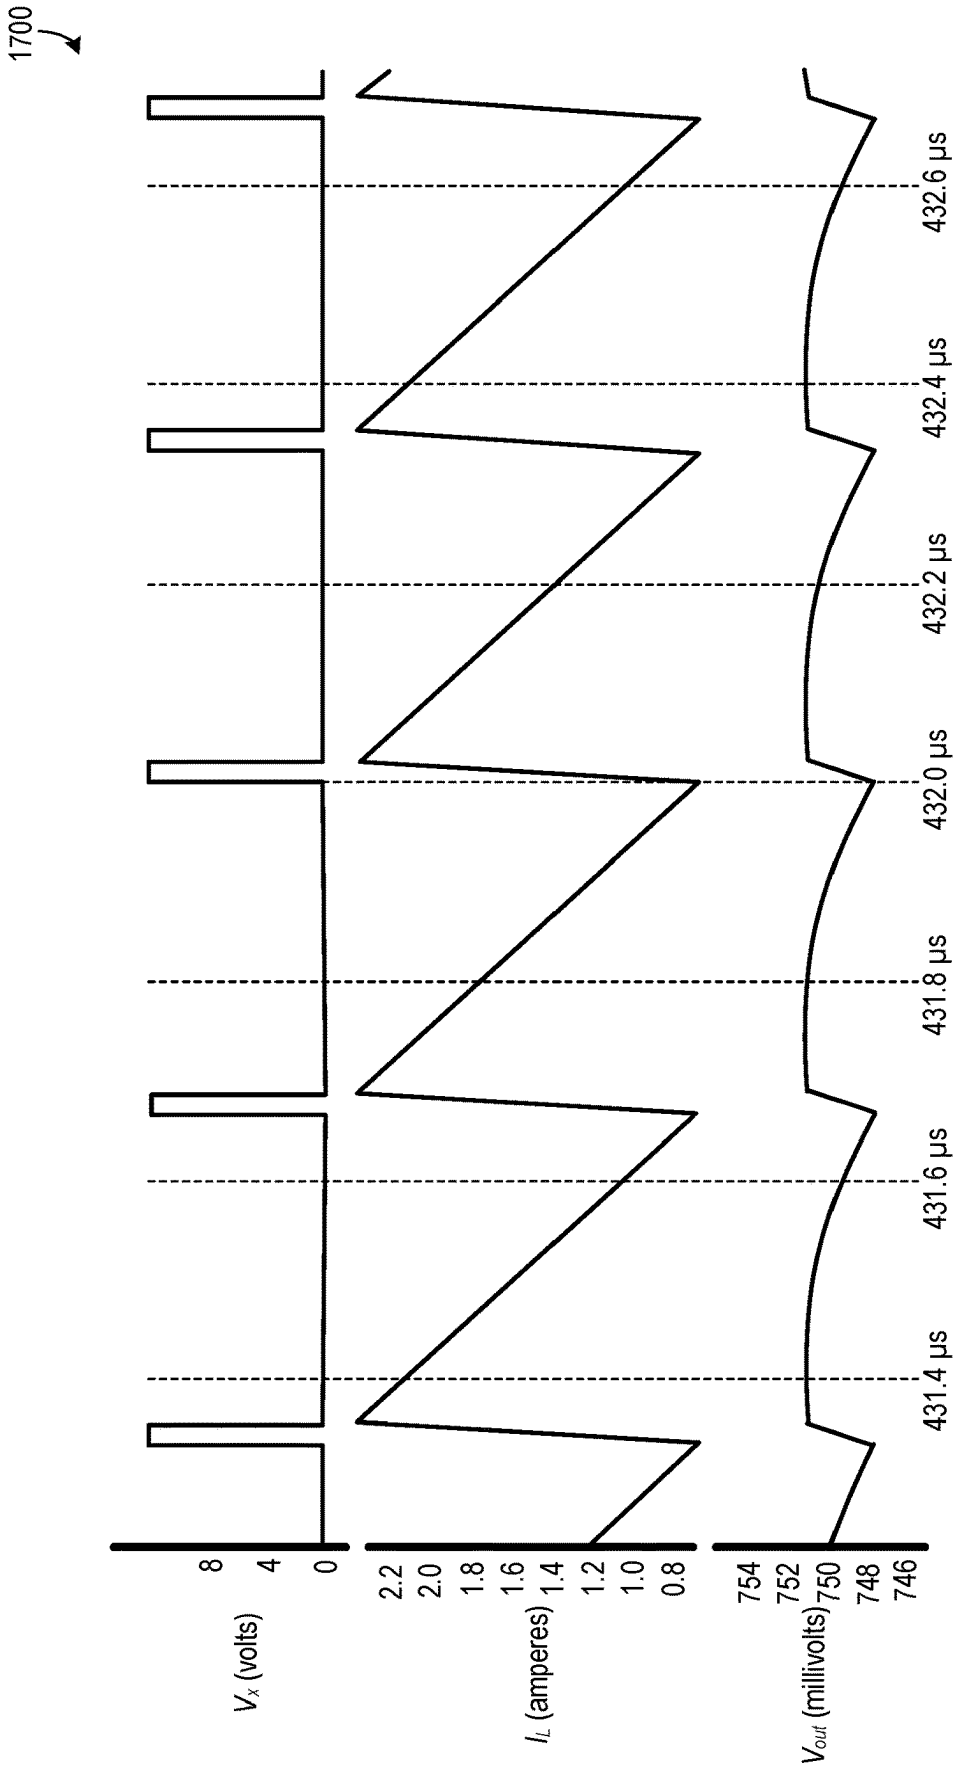
1700
8
4
0
V_X (volts)
2.2
2.0
1.8
1.6
1.4
1.2
1.0
0.8
I_L (amperes)
754
752
750
748
746
V_{out} (millivolts)
431.4 µs
431.6 µs
431.8 µs
432.0 µs
432.2 µs
432.4 µs
432.6 µs

FIG. 17

CURRENT RECONSTRUCTORS AND ASSOCIATED SYSTEMS AND METHODS

BACKGROUND

[0001] Switching power converters are widely used in electronic devices, such as to provide a regulated electric power source. A switching power converter is configured such that its solid-state power switching devices do not continuously operate in their active states; instead, the power switching devices repeatedly switch between their on-states and off-states. Inductors are commonly used for energy storage in switching power converters.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] FIG. **1** is a schematic diagram of a switching power converter including a current reconstructor, according to an embodiment.

[0003] FIG. **2** includes four graphs illustrating one example of operation of the FIG. **1** switching power converter.

[0004] FIG. **3** is a schematic diagram of one embodiment of switching control circuitry of the FIG. **1** switching power converter, where the switching control circuitry uses a peak current mode control technique.

[0005] FIG. **4** is a schematic diagram of one embodiment of the current reconstructor of the FIG. **1** switching power converter.

[0006] FIG. **5** includes four graphs illustrating an example of operation of the FIG. **4** current reconstructor comparing (i) operation when predicted slope is equal to actual slope to (ii) operation when predicted slope is less than actual slope.

[0007] FIG. **6** includes four graphs illustrating an example of operation of the FIG. **4** current reconstructor comparing (i) operation when predicted slope is equal to actual slope to (ii) operation when predicted slope is greater than actual slope.

[0008] FIG. **7** is schematic diagram of one possible embodiment of a reconstructor output stage of the FIG. **4** current reconstructor.

[0009] FIG. **8** is a graph illustrating one example of a reconstructed current signal generated by the FIG. **7** reconstructor output stage.

[0010] FIG. **9** is a schematic diagram of an alternate embodiment of the FIG. **4** current reconstructor.

[0011] FIG. **10** is a schematic diagram of an embodiment of the FIG. **4** current reconstructor where error minimization circuitry includes phase error determination circuitry, an integrator, and a capacitor.

[0012] FIG. **11** is a schematic diagram of one embodiment of phase error determination circuitry of the FIG. **10** current reconstructor.

[0013] FIG. **12** is a schematic diagram on one embodiment of a phase error detector of the FIG. **11** phase error determination circuitry.

[0014] FIG. **13** is schematic diagram of one embodiment of the integrator of the FIG. **10** current reconstructor.

[0015] FIG. **14** is a schematic diagram of one embodiment of the slope extraction circuitry of the FIG. **4** current reconstructor.

[0016] FIG. **15** is a schematic diagram of another embodiment of the slope extraction circuitry of the FIG. **4** current reconstructor.

[0017] FIG. **16** is a schematic diagram of an alternate embodiment of the FIG. **1** switching power converter having a boost topology instead of a buck topology.

[0018] FIG. **17** is a graph illustrated simulated operation of an embodiment of the FIG. **1** switching power converter.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0019] A switching power converter commonly includes at least one switching stage, at least one inductor, and controller, where the controller causes the switching stage to switch a terminal of the inductor between at least two electrical nodes, to perform power conversion. The switching stage includes at least a control switching device, which is a switching device that the controller modulates to regulate one or more parameters of the switching power converter. For example, a controller in a switching power converter is typically configured to control duty cycle of the switching power converter, which is a ratio of on-time of a control switching device to a switching period of the switching power converter, to regulate one or more parameters of the switching power converter, such as input or output voltage magnitude or input or output current magnitude. It may sometimes be necessary for a switching power converter to operate at a low duty cycle, such as in applications where there is a large difference between input voltage magnitude and output voltage magnitude.

[0020] A controller of a switching power converter may implement current mode control, which is a control technique where switching stage operation is at least partially a function of magnitude of current flowing through an inductor of the switching power converter. For example, one current mode control technique is peak current mode control (PCMC), where on-time of a control switching device is terminated in response to a signal representing current flowing through the inductor of the switching power converter reaching a control loop error signal.

[0021] Current flowing through an inductor is conventionally sensed by using a current sense amplifier to amplify a voltage across a current sense resistor in series with the inductor, to generate a current sense signal that is proportional to magnitude of current flowing through the inductor. A conventional current sense amplifier, though, is not capable of reliably generating a current sense signal when a control switching device is in its on-state for a short time duration, e.g., 40 nanoseconds or less, during a switching period. For example, a conventional current sense amplifier typically includes noise blanking circuitry to block transmission of switching noise to its output current sense signal, and this noise blanking circuitry may cause the current sense signal to omit a significant portion of sensed current information when the control switching device on-time is small. As another example, bandwidth limitations of a conventional current sense amplifier limit the current sense amplifier's ability to sense current when control switching device on-time is small. As such, a conventional controller implementing current mode control may be unstable during operation with short control switching device on-time, such as when operating at a small duty cycle. It should be noted that control switching device on-time may be particularly short at high switching frequencies due to switching periods being short at high switching frequencies.

[0022] Disclosed herein are current reconstructors and associated systems and methods which may at least partially

overcome one or more of the aforementioned problems. The new current reconstructors are used, for example, in a controller of a switching power converter to reliably generate a signal proportional to magnitude of current flowing through an inductor, or other switching power converter element, even when control switching device on-time is short. Particular embodiments of the new current reconstructors are configured to (i) sense slope of current flowing through an inductor of a switching power converter when a control switching device connected to the inductor is in its off-state and (ii) use a negative feedback closed loop control technique to predict slope of inductor current during on-time of the control switching device, thereby generating a signal that is proportional to current flowing through the inductor. Accordingly, the new current reconstructors and associated system and methods may enable current mode control, such as peak current mode control, in switching power converter applications that would not be feasible using conventional current sense techniques.

[0023] FIG. **1** is a schematic diagram of a switching power converter **100**, which includes an embodiment of the new current reconstructors discussed herein. Switching power converter **100** includes a switching stage **102**, an inductor **104**, a current sense resistor **106**, an output capacitor **108**, and a controller **110**. Switching stage **102** include a control switching device **112** and a freewheeling switching device **114**. Each of control switching device **112** and freewheeling switching device **114** includes, for example, one or more transistors, such as field effect transistors (FETs), bipolar junction transistors (BJTs), and insulated gate bipolar junction transistors (IGBTs). Control switching device **112** is electrically coupled between an input power node **116** and a switching node **118**, and freewheeling switching device **114** is electrically coupled between switching node **118** and a reference node **120**. Switching stage **102** is configured to switch a terminal of inductor **104** connected to switching node **118** between input power node **116** and reference node **120** under the command of controller **110**. Reference node **120** is depicted as being a ground node, such as an earth ground node or a chassis ground node. It is understood, though, that reference node **120** needs not be a ground node, and reference node **120** accordingly could be at a different electrical potential than an earth ground or a chassis ground.

[0024] Inductor **104** and current sense resistor **106** are electrically coupled in series between switching node **118** and an output power node **122**. While FIG. **1** illustrates the relative topological locations of inductor **104** and current sense resistor **106** being such that current flowing from switching node **118** to output power node **122** flows through inductor **104** before flowing through current sense resistor **106**, the relative topological locations of inductor **104** and current sense resistor **106** could be swapped. In some embodiments, current sense resistor **106** is a discrete element, and in some other embodiments, current sense resistor **106** is parasitic resistance of an electrical conductor, such as parasitic resistance of a printed circuit board (PCB) trace. Additionally, in some alternate embodiments, current sense resistor **106** is replaced with parasitic resistance of inductor **104**, and switching power converter **100** includes additional components to separate a resistive component of a voltage across inductor **104** from an inductive component of a voltage across inductor **104**.

[0025] Output capacitor **108** is electrically coupled between output power node **122** and reference node **120**, and a load (not shown) is optionally electrically coupled to output power node **122**. Output capacitor **108**, for example, absorbs ripple current generated by switching of switching power converter **100** and/or helps supports transient loads powered by switching power converter **100**. Output capacitor **108** could be omitted or replaced with multiple capacitors without departing from the scope hereof. Switching power converter **100** has an input voltage V_{in} on input power node **116** and an output voltage V_{out} on output power node **122**. An input current I_{in} flows into switching power converter **100** from input power node **116**, and an output current I_{out} flows out of switching power converter **100** at output power node **122** to a load electrically coupled to output power node **122**. A polarity of input current I_{in} and output current I_{out} could be either positive or negative, depending on the operating conditions of switching power converter **100**.

[0026] Controller **110** includes an error amplifier **124**, a current sense amplifier **126**, a current reconstructor **128**, switching control circuitry **130**, a voltage reference **132**, a first resistor **134**, and a second resistor **136**. Error amplifier **124** is configured to generate an error amplifier signal V_{ea} representing a difference between an actual output voltage V_{out} of switching power converter **100** and a desired output voltage of switching power converter **100**, to enable switching power converter **100** to regulate magnitude of output voltage Vow. Specifically, first resistor **134** and second resistor **136** collectively divide a magnitude of output voltage V_{out} down to a divider voltage V_{div}, and error amplifier **124** amplifies a difference between divider voltage V_{div} and a reference voltage V_{ref} of voltage reference **132** to generate error amplifier signal V_{ea}. Respective resistances of resistors R_{134} and R_{136} are chosen to comply with EQN. **1** below, where V_{des} is desired magnitude of voltage of V_{out}, R_{134} is resistance of first resistor **134**, and R_{136} is resistance of second resistor **136**. It should be noted that first resistor **134** and second resistor **136** may be omitted in embodiments where V_{des} is equal to V_{ref}.

$$\frac{V_{des}}{V_{ref}} = \frac{(R_{134} + R_{136})}{R_{136}} \quad \text{(EQN. 1)}$$

[0027] Current I_L flowing through inductor **104** generates a voltage V_{res} when flowing through current sense resistor **106** such that magnitude of voltage V_{res} is proportional to magnitude of current I_L. Current sense amplifier **126** amplifies voltage V_{res} to generate current sense signal V_{cs}, which is generally proportional to magnitude of current I_L. However, bandwidth limitations of current sense amplifier **126**, as well as noise blanking circuitry within current sense amplifier **126**, impair ability of current sense amplifier **126** to generate current sense signal V_{cs} when control switching device **112** operates in its on-state for a short duration, e.g., 40 nanoseconds of less, during each switching period of switching power converter **100**. Consequently, current sense signal V_{cs} may not accurately represent magnitude of current I_L during on-time of control switching device **112** when such on-time is of short duration.

[0028] However, current reconstructor **128** at least partially overcomes the above discussed drawbacks of current sense amplifier **126** by generating a reconstructed current signal V_{recon} that is proportional to magnitude of current I_L even during operation of switching power converter **100**

with short on-time of control switching device **112**. As discussed further below, particular embodiments of current reconstructor **128** generate reconstructed current signal V_{recon} at least partially by sensing slope of current I_L when control switching device **112** is in its off-state (and freewheeling switching device **114** is in its on-state) and (ii) predicting slope of current I_L while control switching device **112** is in its on-state.

[0029] Switching control circuitry **130** is configured to use a current mode control technique to generate control signals **ϕ1** and **ϕ2** to control switching device **112** and freewheeling switching device **114**, respectively, at least partially based on error amplifier signal V_{ea} and reconstructed current signal V_{recon}. Specifically, switching control circuitry **130** generates control signal **ϕ1** to modulate control switching device **112** by causing control switching device **112** to switch between its on-state and off-state at a duty cycle which minimizes magnitude of error amplifier signal V_{ea}, such as using a pulse width modulation (PWM) technique or a pulse frequency modulation (PFM) technique, thereby regulating magnitude of output voltage V_{out}. Additionally, switching control circuitry **130** generates control signal **ϕ2** to control switching of freewheeling switching device **114** such that freewheeling switching device **114** provides a path for current I_L when control switching device **112** is in its off-state. In this document, a switching device is in its on-state when it is operating in its conductive state, and the switching device is in its off-state when it is operating in its non-conductive state, neglecting effects of a body diode (if present), or any other parasitic element, of the switching device. Switching power converter **100** could be modified to regulate a parameter of switching power converter **100** other than output voltage V_{out} magnitude, such as magnitude of input voltage V_{in}, magnitude of input current I_{in}, or magnitude of output current I_{out}, with appropriate changes to error amplifier **124** and/or associated circuitry.

[0030] FIG. **2** includes four graphs **200**, **202**, **204**, and **206** having a common time base and illustrating one example of operation of switching power converter **100**. Graphs **200**, **202**, **204**, and **206** assume that switching power converter **100** is operating under steady state conditions such that the waveforms of graphs **200**, **202**, **204**, and **206** are periodic. Graph **200** is magnitude of control signal **ϕ1** versus time, graph **202** is magnitude of control signal **ϕ2** versus time, graph **204** is magnitude of current I_L versus time, and graph **206** is magnitude of reconstructed current signal V_{recon} versus time. The FIG. **2** graphs assume that (i) each of control signals **ϕ1** and **ϕ2** is asserted when in a logic high state, (ii) control switching device **112** operates in its on-state when control signal **ϕ1** is asserted, (iii) control switching devices **112** operates in off-state when control signal **ϕ1** is de-asserted, (iv) freewheeling switching device **114** operates in its on-state when control signal **ϕ2** is asserted, and (v) freewheeling switching device **114** operates in its off-state when control signal **ϕ2** is de-asserted. However, control signals **11** and **ϕ2** could have other polarities, and control switching device **112** and freewheeling switching device **114** could be configured to react to respective control signals **11** and **ϕ2** in a different manner, without departing from the scope hereof. Additionally, while the FIG. **2** graphs assume that switching power converter **100** is operating in a continuous current conduction mode, switching power converter **100** could alternately operate in a discontinuous current conduction mode with appropriate modifications, e.g., with addition of circuitry configured to (i) detect zero crossing of current I_L and (ii) provide a signal to current reconstructor **128** indicating that current I_L has crossed zero. Furthermore, while FIG. **2** illustrates control signal **ϕ2** being complementary to control signal **ϕ1**, some embodiments of switching control circuitry **130** are configured to introduce deadtime between assertion of control signal **ϕ1** and assertion of control signal **ϕ2**, and vice versa, to prevent "shoot-through," i.e., simultaneous conduction of control switching device **112** and freewheeling switching device **114**. Finally, in some alternate embodiments, freewheeling switching device **114** is replaced with a diode, and in these alternate embodiments, switching control circuitry **130** need not be capable of generating control signal **ϕ2**.

[0031] Control switching device **112** has an on-time of t_{on} and an off-time of t_{off}, in each switching period T of switching power converter **100**, as illustrated in FIG. **2**. Accordingly, duty cycle D of switching power converter **100** is equal to t_{on}/T. In this document, switching power converter **100** is considered to operate in a first switching state, designated by "(1^{st})" in the present figures, during t_{on} of each switching period T, and switching power converter **100** is considered to operate in a second switching state, designated by "(2^{nd})" in the present figures, during t_{off} of each switching period T. FIG. **2** illustrates a time **208** during each switching period T when switching power converter **100** transitions from the second switching state to the first switching state. Current I_L has a slope of m_1 during the first switching state of switching power converter **100**, current I_L has a slope of m_2 during the second switching state of switching power converter **100**. Duration of t_{on} will vary according to operating conditions, such as ratio of V_{out}/V_{in}, of switching power converter **100**. Additionally, switching period T duration, and its reciprocal switching frequency of switching power converter **100**, are a design choice. For example, a short switching period T duration may be selected to promote low ripple current magnitude, while a large switching period T duration may be selected to promote low switching losses. It should be noted that magnitude of reconstructed current signal V_{recon} is proportional to magnitude of current I_L, as collectively illustrated in graphs **204** and **206**. Additionally, as discussed above, current reconstructor **128** is advantageously capable of generating reconstructed current signal V_{recon} such that it is proportional to magnitude of current I_L even when duration of time t_{on} is short.

[0032] Referring again to FIG. **1**, particular embodiments of switching control circuitry **130** are configured to use a peak current mode control technique to generate control signals **ϕ1** and **ϕ2**. For example, FIG. **3** is a schematic diagram of switching control circuitry **300**, which is one possible embodiment of switching control circuitry **130** that is configured to use a peak current mode control technique. Switching control circuitry **300** includes a clock **302**, a comparator **304**, a S-R flip-flop **306**, a first gate driver **308**, and a second gate driver **310**. Clock **302** is configured to generate a clock signal CLK at a switching frequency of switching power converter **100**, and clock signal CLK sets S-R flip-flop **306**. Comparator **304** compares error amplifier signal V_{ea} to reconstructed current signal V_{recon}, and comparator **304** asserts an output signal V_{reset} in response to reconstructed current signal V_{recon} reaching error amplifier signal V_{ea}, which occurs at each time switching power converter **100** transitions from its first switching state to its second switching state. S-R flip-flop **306** is reset in response

to comparator output signal V_{reset} being asserted. Non-inverting output Q of S-R flip-flop **306** is asserted when S-R flip-flop **306** is set, and non-inverting output Q of S-R flip-flop **306** is de-asserted when S-R flip-flop **306** is reset. Conversely, inverting output [Q] of S-R flip-flop **306** is de-asserted when S-R flip-flop **306** is set, and inverting output [Q] of S-R flip-flop **306** is asserted when S-R flip-flop **306** is reset. A signal **ϕ1'** from non-inverting output Q of S-R flip-flop **306** is conditioned by first gate driver **308** to obtain control signal **ϕ1**, and a signal **ϕ2'** from inverting output [Q] of S-R flip-flop **306** is conditioned by second gate driver **310** to obtain control signal **ϕ2**. Each of first gate driver **308** and second gate driver **310** performs conditioning of its respective signal, for example, by performing level shifting and/or amplification of the signal.

[0033] Switching control circuitry **300** assumes that each of control switching device **112** and freewheeling switching device **114** includes one or more respective transistors with gates, such as FETs or IGBTs. However, first gate driver **308** and second gate driver **310** could be replaced by respective base driver circuitry in embodiments where each of control switching device **112** and freewheeling switching device **114** includes one or more BJTs instead of transistors with gates. Additionally, first gate driver **308** and second gate driver **310** could be omitted in embodiments where S-R flip-flop **306** is capable of directly generating control signal **ϕ1** and control signal **ϕ2** that are suitable for driving control switching device **112** and freewheeling switching device **114**, respectively.

[0034] As illustrated in FIG. **1**, particular embodiments of current reconstructor **128** are configured to generate reconstructed current signal V_{recon} at least partially based on current sense signal V_{cs}, reference voltage V_{ref}, and one or both of control signal **ϕ1** and control signal **ϕ2**. For example, FIG. **4** is a block diagram of a current reconstructor **400**, which is one possible embodiment of current reconstructor **128**. Current reconstructor **400** includes a capacitive device **402**, first current circuitry **404**, a second current circuitry **406**, error minimization circuitry **408**, slope extraction circuitry **410**, and a reconstructor output stage **412**. Capacitive device **402** is electrically coupled between a ramp node **414** and reference node **120**. First current circuitry **404** is electrically coupled between a power node **416** and ramp node **414**, and second current circuitry **406** is electrically between ramp node **414** and reference node **120**.

[0035] First current circuitry **404** is configured to apply a first current signal I_{1st} to capacitive device **402** during the first switching state of switching power converter **100**, i.e., during t_{on} of each switching period T. First current signal I_{1st} flows into capacitive device **402**, such that first current signal I_{1st} charges capacitive device **402**. First current circuitry **404** is controlled by a control signal **418** generated by error minimization circuitry **408**, and first current signal I_{1st} has a slope m_p. Slope m_p is a predicted slope of current I_L during the first switching state of switching power converter **100**, and predicted slope m_p is ideally equal to actual slope m_1 of current I_L during the first switching state of switching power converter **100**. Duration of the first switching state of switching power converter **100** is related to slope of current I_L during the first switching state. For example, duration of the first switching state duration decreases with increasing slope, and vice versa. Therefore, predicted duration of the first switching state of switching power converter **100** can be derived from predicted slope m_p, and vice versa. First current circuitry **404** is further configured to generate a current mirror signal **421** for use by reconstructor output stage **412**, where current mirror signal **421** mirrors first current signal I_{1st}.

[0036] Second current circuitry **406** is configured to apply a second current signal I_{2nd} to capacitive device **402** during the second switching state of switching power converter **100**, where second current signal I_{2nd} has a polarity that is opposite of a polarity of the first current signal I_{1st}. Accordingly, second current signal I_{2nd} flows out of capacitive device **402** such that second current signal I_{2nd} discharges capacitive device **402**. As such, a voltage V_{cap} of capacitive device **402** has a triangular shape, i.e., voltage V_{cap} ramps upward during the first switching state of switching power converter **100**, and voltage V_{cap} ramps downward during the second switching state of switching power converter **100**. Slope extraction circuitry **410** receives current sense signal V_{cs} as an input, and slope extraction circuitry **410** extracts slope m_2 of current I_L during the second switching state of switching power converter **100**, i.e., during t_{off} of each switching period T, to generate a current mirror signal **415**. Second current circuitry **406** mirrors current I_L during the second switching state of switching power converter **100** in response to current mirror signal **415**, such that second current signal I_{2nd} has a slope of m_2.

[0037] Error minimization circuitry **408** is configured to adjust predicted slope m_p of first current signal I_{1st} via control signal **418** to minimize a difference between predicted slope m_p of current I_L and actual slope m_1 of current I_L during the first switching state of switching power converter **100**. In particular, error minimization circuitry **408** implements a negative feedback closed control loop, symbolically shown by dashed lines **420** in FIG. **4**, to minimize a phase error in voltage V_{cap} and thereby minimize a difference between predicted slope m_p of current I_L and actual slope m_1 of current I_L during the first switching state of switching power converter **100**. Phase error in voltage V_{cap} represents a difference between (a) a time when voltage V_{cap} reaches a minimum value and (b) a time when switching power converter **100** transitions from its second switching state to its first switching state, e.g., time **208** (FIG. **2**), in each switching period T. Minimizing difference between predicted slope m_p of current I_L and actual slope m_1 of current I_L during the first switching state of switching power converter **100** also inherently reduces a difference between predicted and actual duration of the first switching state of switching power converter **100**.

[0038] For example, consider FIG. **5**, which includes four graphs **500**, **502**, **504**, and **506** comparing one example of operation of current reconstructor **400** (*i*) where predicted slope m_p is equal to actual slope m_1 and (ii) where predicted slope m_p is less than actual slope m_1. Graphs **500**, **502**, **504**, and **506** assume that (i) switching control circuitry **130** (FIG. **1**) implements peak current mode control and (ii) switching power converter **100** is operating under steady state conditions such that the waveforms of graphs **500**, **502**, **504**, and **506** are periodic. Graphs **500** and **502** illustrate operation of current reconstructor **400** under ideal conditions, i.e., where predicted slope m_p is equal to actual slope m_1. Specifically, graph **500** is of magnitude of control signal **ϕ1** versus time under ideal conditions, and graph **502** is of each of voltage V_{cap} of capacitive device **402** and error amplifier voltage V_{ea} versus time under ideal conditions. As evident from graph **502**, voltage V_{cap} of capacitive device **402** is a sawtooth

waveform having a minimum value V_{cap_min} equal to V_{ref} and a maximum value equal to error amplifier signal V_{ea}.

[0039] Graphs **504** and **506**, in contrast, illustrate an example of operation of current reconstructor **400** under the same conditions as that of graphs **500** and **502** but under non-ideal conditions where predicted slope m_p is smaller than actual slope m_1. Such small value of slope m_p cause a predicted duration (t_{on_p}) of the first switching state in each switching period T to be greater than ideal duration (t_{on}) of the first switching state in each switching period T, as evident when comparing graphs **500** and **504**. Such long predicted duration of the first switching state t_{on_p} causes slope m_2' of voltage V_{cap} to be greater than slope m_2 under ideal conditions, which causes voltage V_{cap} to reach its minimum value V_{cap_min} early in each switching period T. Specifically, voltage V_{cap} reaches its minimum value V_{cap_min} at a time t_1 before a time t_2 when switching power converter **100** transitions from its second switching state to its first switching state. A difference between time t_1 and time t_2 in each switching period is T is a phase error θ_{error} in voltage V_{cap} of capacitive device **402**, which is proportional to error in each of (i) predicted slope m_p and (ii) predicted duration t_{on} of the first switching state of switching power converter **100**. In the event current reconstructor **400** is operating as depicted in graphs **504** and **506**, error minimization circuitry **408** adjusts operation of first current circuitry **404** via control signal **418** to increase slope of first current signal I_{1st} to minimize phase error θ_{error} and thereby cause current reconstructor **400** to move toward the ideal operating state depicted in graphs **500** and **502**.

[0040] FIG. **6**, on the other hand, includes four graphs **600**, **602**, **604**, and **606** comparing one example of operation of current reconstructor **400** (*i*) where predicted slope m_p is equal to actual slope m_1 and (ii) where predicted slope m_p is greater than actual slope m_1. Graphs **600**, **602**, **604**, and **606** assume that (i) switching control circuitry **130** (FIG. **1**) implements peak current mode control and (ii) switching power converter **100** is operating under steady state conditions such that the waveforms of graphs **600**, **602**, **604**, and **606** are periodic. Graphs **600** and **602** illustrate operation of current reconstructor **400** under ideal conditions, i.e., where predicted slope m_p is equal to actual slope m_1. Specifically, graph **600** is of magnitude of control signal **ϕ1** versus time under ideal conditions, and graph **602** is of each of voltage V_{cap} of capacitive device **402** and error amplifier voltage V_{ea} versus time under ideal conditions. As evident from graph **602**, voltage V_{cap} of capacitive device **402** is a sawtooth waveform having a minimum value V_{cap_min} equal to V_{ref} and a maximum value equal to error amplifier signal V_{ea}.

[0041] Graphs **604** and **606**, in contrast, illustrate an example of operation of current reconstructor **400** under the same conditions as that of graphs **600** and **602** but under non-ideal conditions where predicted slope m_p is greater than actual slope m_1. Such large value of slope m_p cause a predicted duration (t_{on_p}) of the first switching state in each switching period T to be shorter than ideal duration (t_{on}) of the first switching state in each switching period T, as evident when comparing graphs **600** and **604**. Such short predicted duration of the first switching state t_{on_p} causes slope m_2' of voltage V_{cap} to be less than slope m_2 under ideal conditions, which causes voltage V_{cap} to reach its minimum value V_{cap_min} late i.e., after the end of its respective switching period T. Specifically, voltage V_{cap} reaches its minimum value V_{cap_min} at a time t_3 after a time t_2 when switching power converter **100** transitions from its second switching state to its first switching state. A difference between time t_3 and time t_2 in each switching period T is a phase error θ_{error} in voltage V_{cap}, which is proportional to error in each of (i) predicted slope m_p and (ii) predicted duration t_{on_p} of the first switching state of switching power converter **100**. In the event current reconstructor **400** is operating as depicted in graphs **604** and **606**, error minimization circuitry **408** adjusts operation of first current circuitry **404** via control signal **418** to decrease slope of first current signal I_{1st} to minimize phase error f_{error} and thereby cause current reconstructor **400** to move toward to the ideal operating state depicted in graphs **600** and **602**.

[0042] Referring again to FIG. **4**, reconstructor output stage **412** is configured to generate reconstructed current signal V_{recon} based on both current sense signal V_{cs} and current mirror signal **421** mirroring first current signal I_{st}. Specifically, reconstructor output stage **412** generates reconstructed current signal V_{recon} such that (i) reconstructed current signal V_{recon} is proportional to first current signal I_{1st} during the first switching state of switching power converter and (ii) reconstructed current signal V_{recon} is proportional to current sense signal V_{cs} during the second switching state of switching power converter. Accordingly, current reconstructor **400** is capable of generating reconstructed current signal V_{recon} such that is accurately reflects current I_L even when duration of the first switching state is short.

[0043] FIG. **7** is a schematic diagram of a reconstructor output stage **700** which is one possible embodiment of reconstructor output stage **412**, although it is understood that reconstructor output stage **412** could be embodied in other manners without departing from the scope hereof. Reconstructor output stage **700** includes a capacitor **702**, a current source **704**, a switching device **706**, and a switching device **708**. Current source **704** and switching device **706** are electrically coupled in series between a power node **710** and a reconstructor output node **712**, and capacitor **702** is electrically coupled between reconstructor output node **712** and reference node **120**. Switching device **708** is electrically coupled between a source of current sense signal V_{cs}, i.e., an output of current sense amplifier **126** (not shown in FIG. **7**), and reconstructor output node **712**. Switching device **706** is controlled by control signal **ϕ1**, such that switching device **706** is closed in the first switching state of switching power converter **100** and switching device **706** is open in the second switching state of switching power converter **100**. Additionally, current source **704** is configured to mirror first current signal I_{1st} of current reconstructor **400** (FIG. **4**) in response to current mirror signal **421**, and current flowing through current source **704** therefore has a slope of m_p. Additionally, capacitor **702** has the same capacitance as capacitive device **402** (FIG. **4**). Therefore, voltage on reconstructor output node **712**, which is equal to reconstructed current signal V_{recon}, is proportional to voltage V_{cap} of capacitive device **402** (FIG. **4**) during the first switching state of switching power converter. Switching device **708** is closed when control signal **ϕ2** is asserted, and switching device **708** is open when control signal **ϕ2** is de-asserted. Therefore, reconstructed current signal V_{recon} tracks current sense signal V_{cs} during the second switching state of switching power converter **100**.

[0044] FIG. **8** is graph **800** of magnitude versus time illustrating one example of reconstructed current signal V_{recon} as generated by reconstructor output stage **700**. As

shown in graph **800**, reconstructed current signal V_{recon} is based off of first current signal I_{1st} from first current circuitry **404** during each first switching state of switching power converter **100**, and reconstructed current signal V_{recon} is based off of current sense signal V_{cs} during each second switching state of switching power converter **100**.

[0045] Referring again to FIG. **4**, current reconstructor **400** could be modified to replace reconstructor output stage **412** with a different reconstructor output stage. For example, reconstructor output stage **412** could be replaced with a reconstructor output stage configured to (i) generate reconstructed current signal V_{recon} solely based on current sense signal V_{cs} when duration of the first switching state of switching power converter **100** is at least a first threshold value and (ii) generate reconstructed current signal V_{recon} at least partially based on one or more signals generated within current reconstructor **400** when duration of the first switching state is less than the first threshold value. For example, in some alternate embodiments, current reconstructor output stage **412** is replaced with a reconstructor output stage that is configured to (i) generate reconstructed current signal V_{recon} solely based on current sense signal V_{cs} when duration of the first switching state of switching power converter **100** is at least 40 nanoseconds and (ii) generate reconstructed current signal V_{recon} at least partially based on one or more signals generated within current reconstructor **400**, e.g., at least partially based on first current signal I_{1st}, when the duration of the first switching state of switching power converter **100** is less than 40 nanoseconds. As another example, reconstructor output stage **412** could be replaced with a reconstructor output stage configured to generate reconstructed current signal V_{recon} based on voltage V_{cap} of capacitive device **402** and current sense signal Vcs.

[0046] For instance, FIG. **9** is a schematic diagram of a current reconstructor **900**, which is an alternate embodiment of current reconstructor **400** (FIG. **4**) that is modified to replace reconstructor output stage **412** with a reconstructor output stage **912** including superposition circuitry **922** configured to generate reconstructed current signal V_{recon} based on voltage V_{cap} of capacitive device **402** and current sense signal V_{cs}. Specifically, superposition circuitry **922** is configured to generate reconstructed current signal V_{recon} at least partially by superimposing a signal proportional to voltage V_{cap} of capacitive device **402** and a signal representing a valley of current I_L obtained from current sense signal V_{cs}.

[0047] FIG. **10** is a schematic diagram of a current reconstructor **1000**, which is one embodiment of current reconstructor **400** (FIG. **4**) where (i) error minimization circuitry **408** is embodied by error minimization circuitry **1002**, (ii) first current circuitry **404** is embodied by first current circuitry **1004**, and (iii) second current circuitry **406** is embodied by second current circuitry **1006**. Error minimization circuitry **1002** includes phase error determination circuitry **1008**, an integrator **1010**, and a capacitor **1012**. Phase error determination circuitry **1008** is configured to generate a phase error signal **1014** representing phase error, such as phase error θ_{error} or of FIG. **5** or phase error θ_{error} of FIG. **6**, in voltage V_{cap} of the capacitive device **402** (FIG. **4**). In particular embodiments, phase error determination circuitry **1008** receives as inputs voltage V_{cap}, reference voltage V_{ref}, control signal ϕ**1**, control signal ϕ**2**, and current mirror signal **415** from slope extraction circuitry **410**. FIG. **11**, discussed below, illustrates one possible embodiment of phase error determination circuitry **1008**. Integrator **1010** is configured to integrated phase error signal **1014** to generate an integrated signal I_{int}, and capacitor **1012** is charged and discharged by integrated signal I_{int}, to generate control signal **418** for controlling first current circuitry **1004**. FIG. **13**, discussed below, illustrates one possible embodiment of integrator **1010**.

[0048] First current circuitry **1004** includes a current source **1016** and a switching device **1018** electrically coupled in series between power node **416** and ramp node **414**. Current source **1016** is configured to generate first current signal I_{int} in accordance with control signal **418** generated by error minimization circuitry **1002**. Switching device **1018** operates in its on-state when control signal ϕ**1** is asserted, and switching device **1018** operates in its off-state when control signal ϕ**1** is de-asserted. Accordingly, first current circuitry **1004** applies first current signal I_{int} to capacitive device **402** only during the first switching state of switching power converter **100**.

[0049] Second current circuitry **1006** includes a FET **1020**, a switching device **1022**, and an AND gate **1024**. Switching device **1022** and FET **1020** are electrically coupled in series between ramp node **414** and reference node **120**. FET **1020** is configured to mirror current I_L during the second switching state of switching power converter **100** and thereby generate second current signal I_{2nd}, in response to current mirror signal **415** generated by slope extraction circuitry **410**. Switching device **1022** is controlled by an output of AND gate **1024**, and AND gate **1024** receives an inputs an inverted version of a signal Comp1 and control signal ϕ**2**. Phase error determination circuitry **1008** generates signal Comp1 such that signal Comp1 is asserted for a duration of the second switching state of switching power converter **100** after voltage V_{cap} reaches its minimum value. As such, switching device **1022** is on during the second switching state of switching power converter **100** as long as voltage V_{cap} has not reached its minimum value.

[0050] FIG. **11** is a schematic diagram of phase error determination circuitry **1100**, which is one possible embodiment of phase error determination circuitry **1008** of FIG. **10**. Phase error determination circuitry **1100** includes a comparator **1102**, an AND gate **1104**, a phase error detector **1106**, an amplifier **1108**, a switching device **1110**, a capacitor **1112**, a switching device **1114**, an AND gate **1116**, a FET **1118**, a comparator **1120**, and an AND gate **1122**. Comparator **1102** is configured to compare voltage V_{cap} from ramp node **414** to reference voltage V_{ref}, and comparator **1102** is configured to assert signal Comp1 in response to voltage V_{cap} falling to reference voltage V_{ref}. Therefore, comparator **1102** asserts signal Comp1 in response to voltage V_{cap} falling to its minimum value. AND gate **1104** compares signal Comp1 to control signal ϕ**2**, and AND gate **1104** asserts a signal Early when both signal Comp1 and control signal ϕ**2** are asserted. Accordingly, assertion of signal Early indicates that voltage V_{cap} has fallen to its minimum value before switching power converter **100** has transitioned from its second switching state to its first switching state, such as illustrated in graph **506** of FIG. **5**.

[0051] Amplifier **1108** is configured to buffer voltage V_{cap} to generate a buffered voltage V_{cap}' on its output. Switching device **1110** is electrically coupled between the output of amplifier **1108** and a comparator node **1124**, and switching device **1110** (*i*) operates in its on-state when control signal ϕ**2** is asserted and (ii) operates in its off-state when control

signal ϕ**2** is de-asserted. Accordingly, voltage on comparator node **1124** is equal to buffered voltage V_{cap}' during the second switching state of switching power converter **100**. Capacitor **1112** is electrically coupled between comparator node **1124** and reference node **120**, and voltage on comparator node **1124** is accordingly equal to a voltage V_{1112} across capacitor **1112** when switching power converter **100** is in its first switching state. Comparator **1120** is configured to compare voltage on comparator node **1124** to reference voltage V_{ref}, and comparator **1120** is configured to assert a signal Comp2 in response to voltage on comparator node **1124** falling to reference voltage V_rg. AND gate **1122** compares signal Comp2 to control signal ϕ**1**, and AND gate **1122** asserts a signal Not_Late when both signal Comp2 and control signal ϕ**1** are asserted. Accordingly, assertion of signal Not_Late indicates that voltage V_{cap} has fallen to its minimum value no later than when switching power converter **100** has transitioned from its second switching state to its first switching state.

[0052] Switching device **1114** and FET **1118** are electrically coupled in series between comparator node **1124** and reference node **120**. FET **1118** is configured to mirror current I_L during the second switching state of switching power converter **100** in response to current mirror signal **415**, such that current I_{1118} flowing through FET **1118** has a slope of m_2. AND gate **1116** controls switching device **1114**, and AND gate **1116** compares signal ϕ**1** to signal Comp2. Accordingly, switching device **1114** is in its on-state, and FET **1118** thereby discharges capacitor **1112**, solely when (i) signal ϕ**1** is asserted and (ii) voltage on comparator node **1124** is greater than reference voltage V_{ref}.

[0053] Phase error detector **1106** is configured to generate phase error signal **1014** based on control signals ϕ**1** and ϕ**2** and signal Early and signal Not_Late. FIG. **12** is a schematic diagram of a phase error detector **1200**, which is one possible embodiment of phase error detector **1106**. Phase error detector **1200** includes four NOR gates **1202**, **1204**, **1206**, and **1208**. NOR gate **1202** is configured such that signal Early and an output of NOR gate **1204** are inputs to NOR gate **1202**. NOR gate **1204** is configured such that control signal ϕ**1** and an output of NOR gate **1202** are inputs to NOR gate **1204**. NOR gate **1206** is configured such that signal Not_Late and an output of NOR gate **1208** are inputs to NOR gate **1206**. NOR gate **1208** is configured such that control signal ϕ**1** and an output of NOR gate **1206** are inputs to NOR gate **1208**. Phase error detector **1200** generates a phase error signal **1210**, which is an embodiment of phase error signal **1014** (FIGS. **10** and **11**) and includes two components, i.e., a component QA and a component QB. Component QA is an output of NOR gate **1204**, and component QB is an output of AND gate **1206**.

[0054] FIG. **13** is a schematic diagram of an integrator **1300**, which is one possible embodiment of integrator **1010** (FIG. **10**) when phase error detector **1106** (FIG. **11**) is embodied as phase error detector **1200** (FIG. **12**). Integrator **1300**, which is configured as a charged pump integrator, includes a charge pump current source **1302** and a charge pump current source **1304**. Charge pump current source **1302** is electrically coupled between a power node **1306** and an integrator node **1308**, and charge pump current source **1304** is electrically coupled between integrator node **1308** and reference node **120**. Charge pump current source **1302** is controlled by component QA of phase error signal **1210** (FIG. **12**). Specifically, charge pump current source **1302** is enabled when component QA is asserted, and charge pump current source **1302** is disabled when component QA is de-asserted. Charge pump current source **1304** is controlled by component QB of phase error signal **1210** (FIG. **12**). Specifically, charge pump current source **1304** is enabled when component QB is asserted, and charge pump current source **1304** is disabled when component QB is de-asserted. Integrator signal I_{int} flows from integrator node **1308** to capacitor **1012**.

[0055] FIG. **14** is a block diagram of slope extraction circuitry **1400**, which is one possible embodiment of slope extraction circuitry **410** (FIGS. **4**, **9**, and **10**). Slope extraction circuitry **1400** includes a differentiator **1402** which is configured to receive current sense signal V_{cs} and generate current mirror signal **415** in voltage form representing slope of current I_L solely during the second switching state of switching power converter **100**.

[0056] FIG. **15** is a block diagram of slope extraction circuitry **1500**, which is another possible embodiment of slope extraction circuitry **410** (FIGS. **4**, **9**, and **10**). Slope extraction circuitry **1500** includes an amplifier **1502** a P-channel FET **1504**, an N-channel FET **1506**, a switching device **1508**, a capacitor **1510**, and a capacitor **1512**. Amplifier **1502** includes a positive output **1514** and a negative output **1516**. Each of P-channel FET **1504** and N-channel FET **1506** includes a respective gate (G), drain (D), and source (S). The source of P-channel FET **1504** is electrically coupled to a power node **1518**, and the drain of P-channel FET **1504** is electrically coupled to a differentiation node **1520**. The drain of N-channel FET **1506** is electrically coupled to differentiation node **1520**, and the source of N-channel FET **1506** is electrically coupled to reference node **120**. Capacitor **1510** is electrically coupled between differentiation node **1520** and reference node **120**, and positive output **1514** of amplifier **1502** is electrically coupled to the gate of P-channel FET **1504**. Switching device **1508** is electrically coupled between negative output **1516** of amplifier **1502** and a mirror signal output node **1522**, and the gate of N-channel FET **1506** is also electrically coupled to mirror signal output node **1522**. Capacitor **1512** is electrically coupled between mirror signal output node **1522** and reference node **120**.

[0057] Amplifier **1502**, P-channel FET **1504**, and N-channel FET **1506** collectively form a voltage follower, such that voltage at differentiation node **1520** follows voltage of current sense signal V_{cs}. Current flowing through capacitor **1510** represents the slope of signal V_{cs}, and voltage on mirror signal output node **1522** represents slope of current I_L. Accordingly, amplifier **1502** generates current mirror signal **415** on mirror signal output node **1522**. Switching device **1508**, which is on solely in the second switching state of switching power converter **100**, limits slope extraction circuitry **1500** to providing current mirror signal **415** solely during the second switching state of switching power converter **100**.

[0058] Referring again to FIG. **1**, while switching power converter **100** has a buck-topology, the new current reconstructors and associated systems and methods are not limited to use with buck switching power converters. Instead, the new current reconstructors could be used with other switching power converter topologies, including but not limited to, switching power converters with a boost topology or a buck-boost topology, with appropriate changes to controller configuration. For example, FIG. **16** is a schematic diagram

of a switching power converter **1600**, which is an alternate embodiment of switching power converter **100** configured to have a boost topology. In switching power converter **1600**, inductor **104** and current sense resistor **106** are electrically coupled in series between input power node **116** and switching node **118**. Additionally, control switching device **112** is electrically coupled between switching node **118** and reference node **120**, and freewheeling switching device **114** is electrically coupled between switching node **118** and output power node **122**.

[0059] The new current reconstructors and associated systems and methods could also be used in switching power converters having multiple power stages electrically coupled in parallel, such as a "multi-phase" switching power converter having two or more power stages electrically coupled in parallel where the power stages switch out-of-phase with respect to each other. Furthermore, the new current reconstructors and associated systems and methods could be used in switching power converters having multiple power stages electrically coupled in series, such as two or more power stages having a daisy chain configuration.

Experimental Results

[0060] FIG. **17** is a graph **1700** illustrating a simulated operation of an embodiment of switching power converter **100** where (i) V_{in}=12 volts, (ii) V_{out}=750 millivolts, (iii) switching frequency=3 Megahertz, (iv) duration of the first switching state=21 nanoseconds per switching period, and (v) delay of current sense amplifier **126** exceeds 30 nanoseconds. Graph **1700** illustrates each of switching node voltage V_x, inductor current I_L, and output voltage V_{out} as a function of time. As evident from the waveforms of FIG. **17**, the simulated switching power converter operated in a stable manner, e.g., both output voltage ripple and t_{on} were consistent among switching cycles, even though first switching state duration was very small and current sense amplifier delay was significant.

Combinations of Features

[0061] Features described above may be combined in various ways without departing from the scope hereof. The following examples illustrate some possible combinations.

[0062] (A1) A method for generating an inductor current signal representing magnitude of current flowing through an inductor of a switching power converter includes (1) applying a first current signal to a first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope, (2) applying a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal, and (3) adjusting the first slope to reduce a phase error in a voltage of the first capacitive device, the phase error in the voltage of the first capacitive device representing a difference between (a) a time when the voltage of the first capacitive device reaches a minimum value and (b) a time when the switching power converter transitions from its second switching state to its first switching state.

[0063] (A2) The method denoted as (A1) may further include generating the inductor current signal such that the inductor current signal is proportional to the voltage of the first capacitive device or the first current signal, during at least the first switching state of the switching power converter.

[0064] (A3) In either one of the methods denoted as (A1) or (A2), (1) the first switching state of the switching power converter may be at least partially characterized by a control switching device of the switching power converter operating in an on-state, and (2) the second switching state of the switching power converter may be at least partially characterized by the control switching device of the switching power converter operating in an off-state.

[0065] (A4) In any one of the methods denoted as (A1) through (A3), adjusting the first slope to reduce the phase error in the voltage of the first capacitive device may include (1) generating a phase error signal representing the phase error in the voltage of the first capacitive device, (2) integrating the phase error signal to generate an integrated signal, and (3) controlling first current circuitry at least partially based on the integrated signal, the first current circuitry generating the first current signal.

[0066] (A5) In any one of the methods denoted as (A1) through (A4), adjusting the first slope to reduce the phase error in the voltage of the first capacitive device may include increasing the first slope in response to the time when the voltage of the first capacitive device reaches the minimum value being before the time when the switching power converter transitions from its second switching state to its first switching state.

[0067] (A6) In any one of the methods denoted as (A1) through (A4), adjusting the first slope to reduce the phase error in the voltage of the first capacitive device may include decreasing the first slope in response to the time when the voltage of the first capacitive device reaches the minimum value being after the time when the switching power converter transitions from its second switching state to its first switching state.

[0068] (A7) Any one of the methods denoted as (A1) through (A6) may further include generating the second current signal by mirroring current flowing through the inductor of the switching power converter during the second switching state of the switching power converter.

[0069] (A8) In any one of the methods denoted as (A1) through (A7), (1) the polarity of the first current signal may be such that the first current signal flows into the first capacitive device, and (2) the polarity of the second current signal may be such that the second current signal flows out of the first capacitive device.

[0070] (A9) Any one of the methods denoted as (A1) through (A8) may further include at least partially controlling operation of the switching power converter using a peak current mode control technique at least partially characterized by comparing the inductor current signal to an error amplifier signal, the error amplifier signal representing an error in a magnitude of an output voltage of the switching power converter.

[0071] (A10) Any one of the methods denoted as (A1) through (A9) may further include (1) generating the inductor current signal during the first switching state of the switching power converter such that the inductor current signal is proportional to the first current signal and (2) generating the inductor current signal during the second switching state of the switching power converter by sensing current flowing through the inductor.

[0072] (B1) A current reconstructor configured to generate an inductor current signal representing magnitude of current flowing through an inductor of a switching power converter includes (1) a first capacitive device, (2) first current circuitry configured to apply a first current signal to the first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope, (3) second current circuitry configured to apply a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal, and (4) error minimization circuitry configured to adjust the first slope to reduce a phase error in a voltage of the first capacitive device, the phase error in the voltage of the first capacitive device representing a difference between (a) a time when the voltage of the first capacitive device reaches a minimum value and (b) a time when the switching power converter transitions from its second switching state to its first switching state.

[0073] (B2) The current reconstructor denoted as (B1) may be configured to generate the inductor current signal at least partially based on the first current signal.

[0074] (B3) The current reconstructor denoted as (B1) may be configured to generate the inductor current signal at least partially based on the voltage of the first capacitive device.

[0075] (B4) In any one of the current reconstructors denoted as (B1) through (B3), the error minimization circuitry may include (1) phase error determination circuitry configured to generate a phase error signal representing the phase error in the voltage of the first capacitive device and (2) an integrator configured to integrate the phase error signal to generate an integrated signal for controlling the first current circuitry.

[0076] (B5) In any one of the current reconstructors denoted as (B1) through (B4), the second current circuitry may be configured to mirror current flowing through the inductor of the switching power converter during the second switching state of the switching power converter.

[0077] (C1) A switching power converter includes an inductor and a current reconstructor configured to generate an inductor current signal representing magnitude of current flowing through the inductor. The current reconstructor includes (1) a first capacitive device, (2) first current circuitry configured to apply a first current signal to the first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope, (3) second current circuitry configured to apply a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal, and (4) error minimization circuitry configured to adjust the first slope to reduce a phase error in a voltage of the first capacitive device, the phase error in the voltage of the first capacitive device representing a difference between (a) a time when the voltage of the first capacitive device reaches a minimum value and (b) a time when the switching power converter transitions from its second switching state to its first switching state.

[0078] (C2) In the switching power converter denoted as (C1), the second current circuitry may be configured to mirror current flowing through the inductor during the second switching state of the switching power converter.

[0079] (C3) Either one of the switching power converters denoted as (C1) or (C2) may further include a switching stage electrically coupled to the inductor.

[0080] (C4) Any one of the switching power converters denoted as (C1) through (C3) may further include switching control circuitry configured to control operation of the switching stage to regulate at least one parameter of the switching power converter.

[0081] (C5) In any one of the switching power converters denoted as (C1) through (C4), the switching control circuitry may be configured to control operation of the switching stage at partially based on one of (a) a signal representing voltage at the first capacitive device and (b) a signal representing the first current signal.

[0082] Changes may be made in the above methods, devices, and systems without departing from the scope hereof. It should thus be noted that the matter contained in the above description and shown in the accompanying drawings should be interpreted as illustrative and not in a limiting sense. The following claims are intended to cover generic and specific features described herein, as well as all statements of the scope of the present method and system, which as a matter of language, might be said to fall therebetween.

What is claimed is:

1. A method for generating an inductor current signal representing magnitude of current flowing through an inductor of a switching power converter, the method comprising:

applying a first current signal to a first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope;

applying a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal; and

adjusting the first slope to reduce a phase error in a voltage of the first capacitive device, the phase error in the voltage of the first capacitive device representing a difference between (a) a time when the voltage of the first capacitive device reaches a minimum value and (b) a time when the switching power converter transitions from its second switching state to its first switching state.

2. The method of claim **1**, further comprising generating the inductor current signal such that the inductor current signal is proportional to the voltage of the first capacitive device or the first current signal, during at least the first switching state of the switching power converter.

3. The method of claim **1**, wherein:

the first switching state of the switching power converter is at least partially characterized by a control switching device of the switching power converter operating in an on-state; and

the second switching state of the switching power converter is at least partially characterized by the control switching device of the switching power converter operating in an off-state.

4. The method of claim **1**, wherein adjusting the first slope to reduce the phase error in the voltage of the first capacitive device comprises:

generating a phase error signal representing the phase error in the voltage of the first capacitive device;

integrating the phase error signal to generate an integrated signal; and

controlling first current circuitry at least partially based on the integrated signal, the first current circuitry generating the first current signal.

5. The method of claim **1**, wherein adjusting the first slope to reduce the phase error in the voltage of the first capacitive device comprises increasing the first slope in response to the time when the voltage of the first capacitive device reaches the minimum value being before the time when the switching power converter transitions from its second switching state to its first switching state.

6. The method of claim **1**, wherein adjusting the first slope to reduce the phase error in the voltage of the first capacitive device comprises decreasing the first slope in response to the time when the voltage of the first capacitive device reaches the minimum value being after the time when the switching power converter transitions from its second switching state to its first switching state.

7. The method of claim **1**, further comprising generating the second current signal by mirroring current flowing through the inductor of the switching power converter during the second switching state of the switching power converter.

8. The method of claim **1**, wherein:

the polarity of the first current signal is such that the first current signal flows into the first capacitive device; and

the polarity of the second current signal is such that the second current signal flows out of the first capacitive device.

9. The method of claim **1**, further comprising at least partially controlling operation of the switching power converter using a peak current mode control technique at least partially characterized by comparing the inductor current signal to an error amplifier signal, the error amplifier signal representing an error in a magnitude of an output voltage of the switching power converter.

10. The method of claim **1**, further comprising:

generating the inductor current signal during the first switching state of the switching power converter such that the inductor current signal is proportional to the first current signal; and

generating the inductor current signal during the second switching state of the switching power converter by sensing current flowing through the inductor.

11. A current reconstructor configured to generate an inductor current signal representing magnitude of current flowing through an inductor of a switching power converter, the current reconstructor comprising:

a first capacitive device;

first current circuitry configured to apply a first current signal to the first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope;

second current circuitry configured to apply a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal; and

error minimization circuitry configured to adjust the first slope to reduce a phase error in a voltage of the first capacitive device, the phase error in the voltage of the first capacitive device representing a difference between (a) a time when the voltage of the first capacitive device reaches a minimum value and (b) a time when the switching power converter transitions from its second switching state to its first switching state.

12. The current reconstructor of claim **11**, wherein the current reconstructor is configured to generate the inductor current signal at least partially based on the first current signal.

13. The current reconstructor of claim **11**, wherein the current reconstructor is configured to generate the inductor current signal at least partially based on the voltage of the first capacitive device.

14. The current reconstructor of claim **11**, wherein the error minimization circuitry comprises:

phase error determination circuitry configured to generate a phase error signal representing the phase error in the voltage of the first capacitive device; and

an integrator configured to integrate the phase error signal to generate an integrated signal for controlling the first current circuitry.

15. The current reconstructor of claim **11**, wherein the second current circuitry is configured to mirror current flowing through the inductor of the switching power converter during the second switching state of the switching power converter.

16. A switching power converter, comprising:

an inductor; and

a current reconstructor configured to generate an inductor current signal representing magnitude of current flowing through the inductor, the current reconstructor including:

a first capacitive device,

first current circuitry configured to apply a first current signal to the first capacitive device during a first switching state of the switching power converter, the first current signal having a first slope,

second current circuitry configured to apply a second current signal to the first capacitive device during a second switching state of the switching power converter, the second current signal having a polarity that is opposite of a polarity of the first current signal, and

error minimization circuitry configured to adjust the first slope to reduce a phase error in a voltage of the first capacitive device, the phase error in the voltage of the first capacitive device representing a difference between (a) a time when the voltage of the first capacitive device reaches a minimum value and (b) a time when the switching power converter transitions from its second switching state to its first switching state.

17. The switching power converter of claim **16**, wherein the second current circuitry is configured to mirror current flowing through the inductor during the second switching state of the switching power converter.

18. The switching power converter of claim **16**, further comprising a switching stage electrically coupled to the inductor.

19. The switching power converter of claim **18**, further comprising switching control circuitry configured to control operation of the switching stage to regulate at least one parameter of the switching power converter.

20. The switching power converter of claim **19**, wherein the switching control circuitry is configured to control operation of the switching stage at partially based on one of (a) a signal representing voltage at the first capacitive device and (b) a signal representing the first current signal.

* * * * *