



US 20250248483A1

(19) **United States**(12) **Patent Application Publication****Campos, II et al.**(10) **Pub. No.: US 2025/0248483 A1**(43) **Pub. Date: Aug. 7, 2025**(54) **SOLE STRUCTURE FOR ARTICLE OF FOOTWEAR**(52) **U.S. Cl.**CPC **A43B 13/206** (2013.01)(71) Applicant: **NIKE, Inc.**, Beaverton, OR (US)

(57)

ABSTRACT(72) Inventors: **Fidencio Campos, II**, Dallas, OR (US);
Wesley K. Chan, Portland, OR (US)


A sole structure for an article of footwear includes a bladder and a cushioning member. The bladder includes a first fluid-filled segment including a first and second terminal ends disposed on opposite ends of the first fluid-filled segment along a first longitudinal axis of the first fluid-filled segment. The first longitudinal axis extends in a first direction from a heel region of the article of footwear to a forefoot region of the article of footwear. A second fluid-filled segment is spaced apart from the first fluid-filled segment in a second direction transverse to the first direction and includes a third and fourth terminal ends disposed on opposite ends of the second fluid-filled segment along a second longitudinal axis of the second fluid-filled segment. A third fluid-filled segment extends in the second direction between the first fluid-filled segment and the second fluid-filled segment. The bladder is received in the cushioning member.


(73) Assignee: **NIKE, Inc.**, Beaverton, OR (US)(21) Appl. No.: **19/184,314**(22) Filed: **Apr. 21, 2025****Related U.S. Application Data**

(63) Continuation of application No. 16/825,363, filed on Mar. 20, 2020, now Pat. No. 12,295,453.

Publication Classification(51) **Int. Cl.****A43B 13/20**

(2006.01)

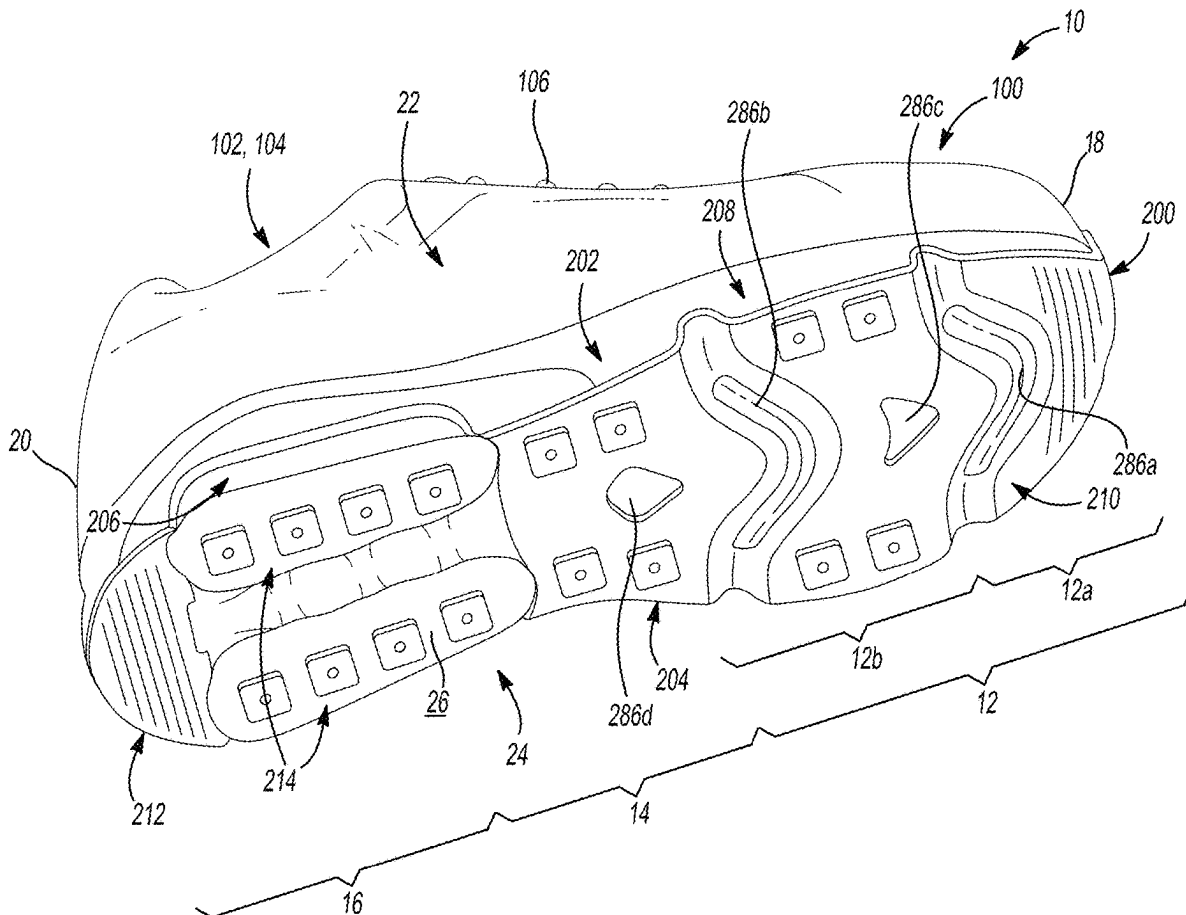

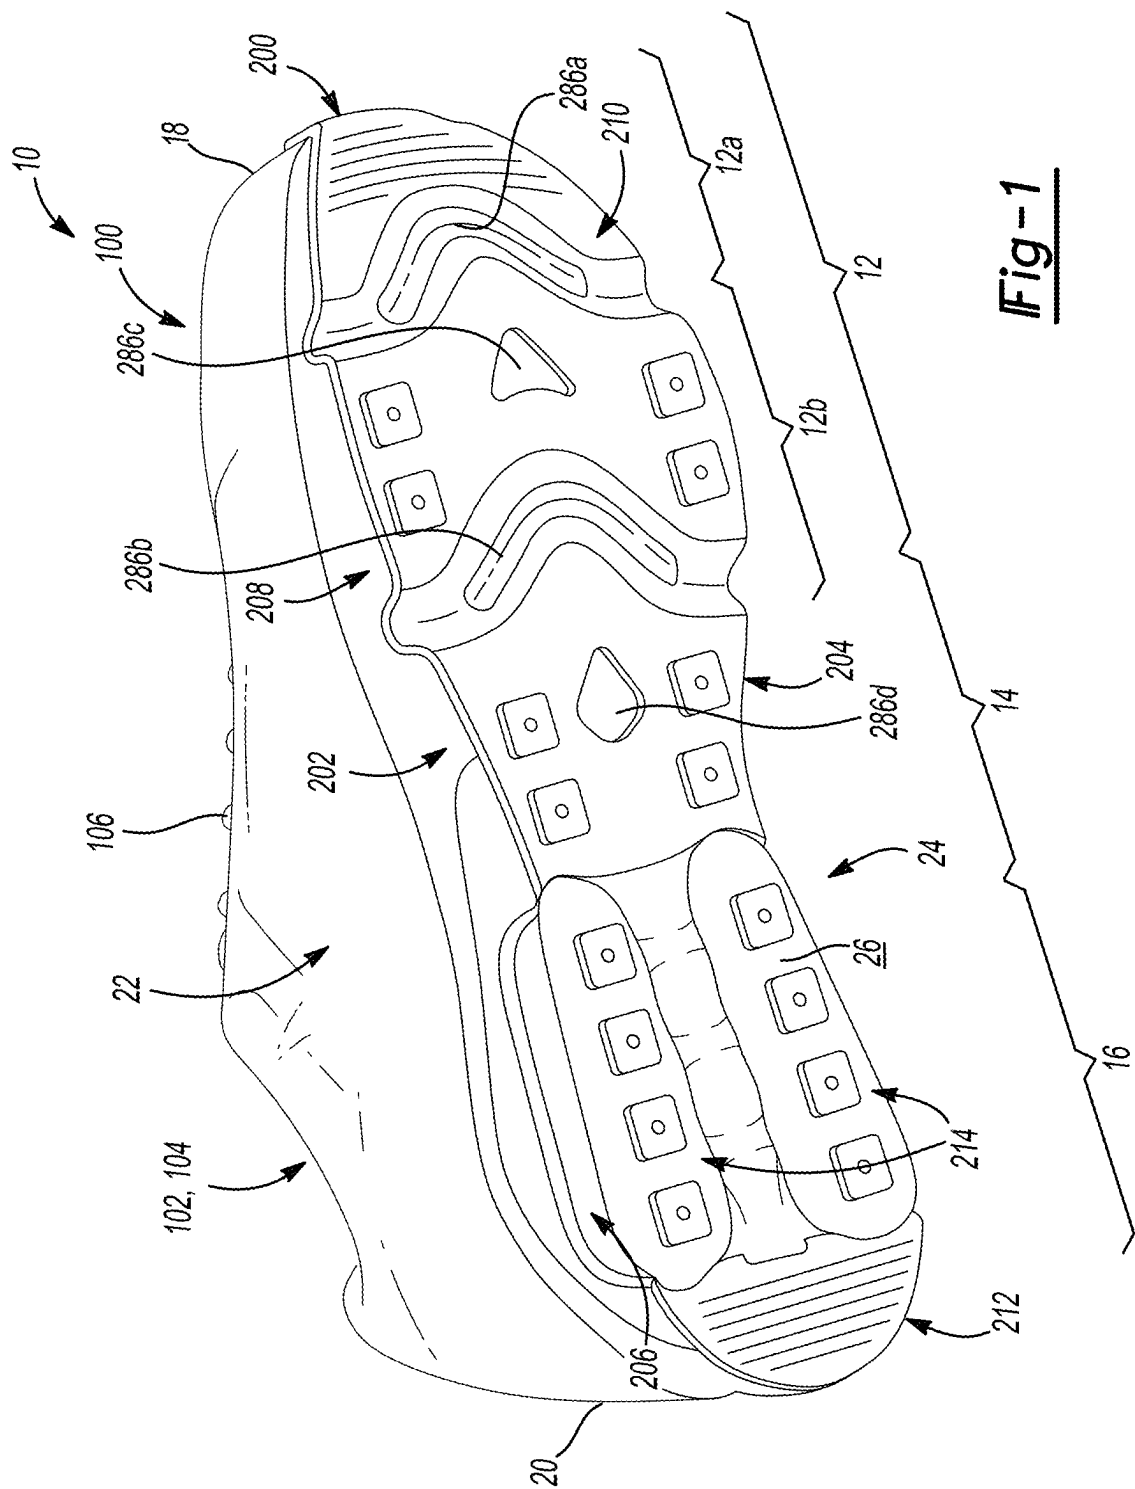

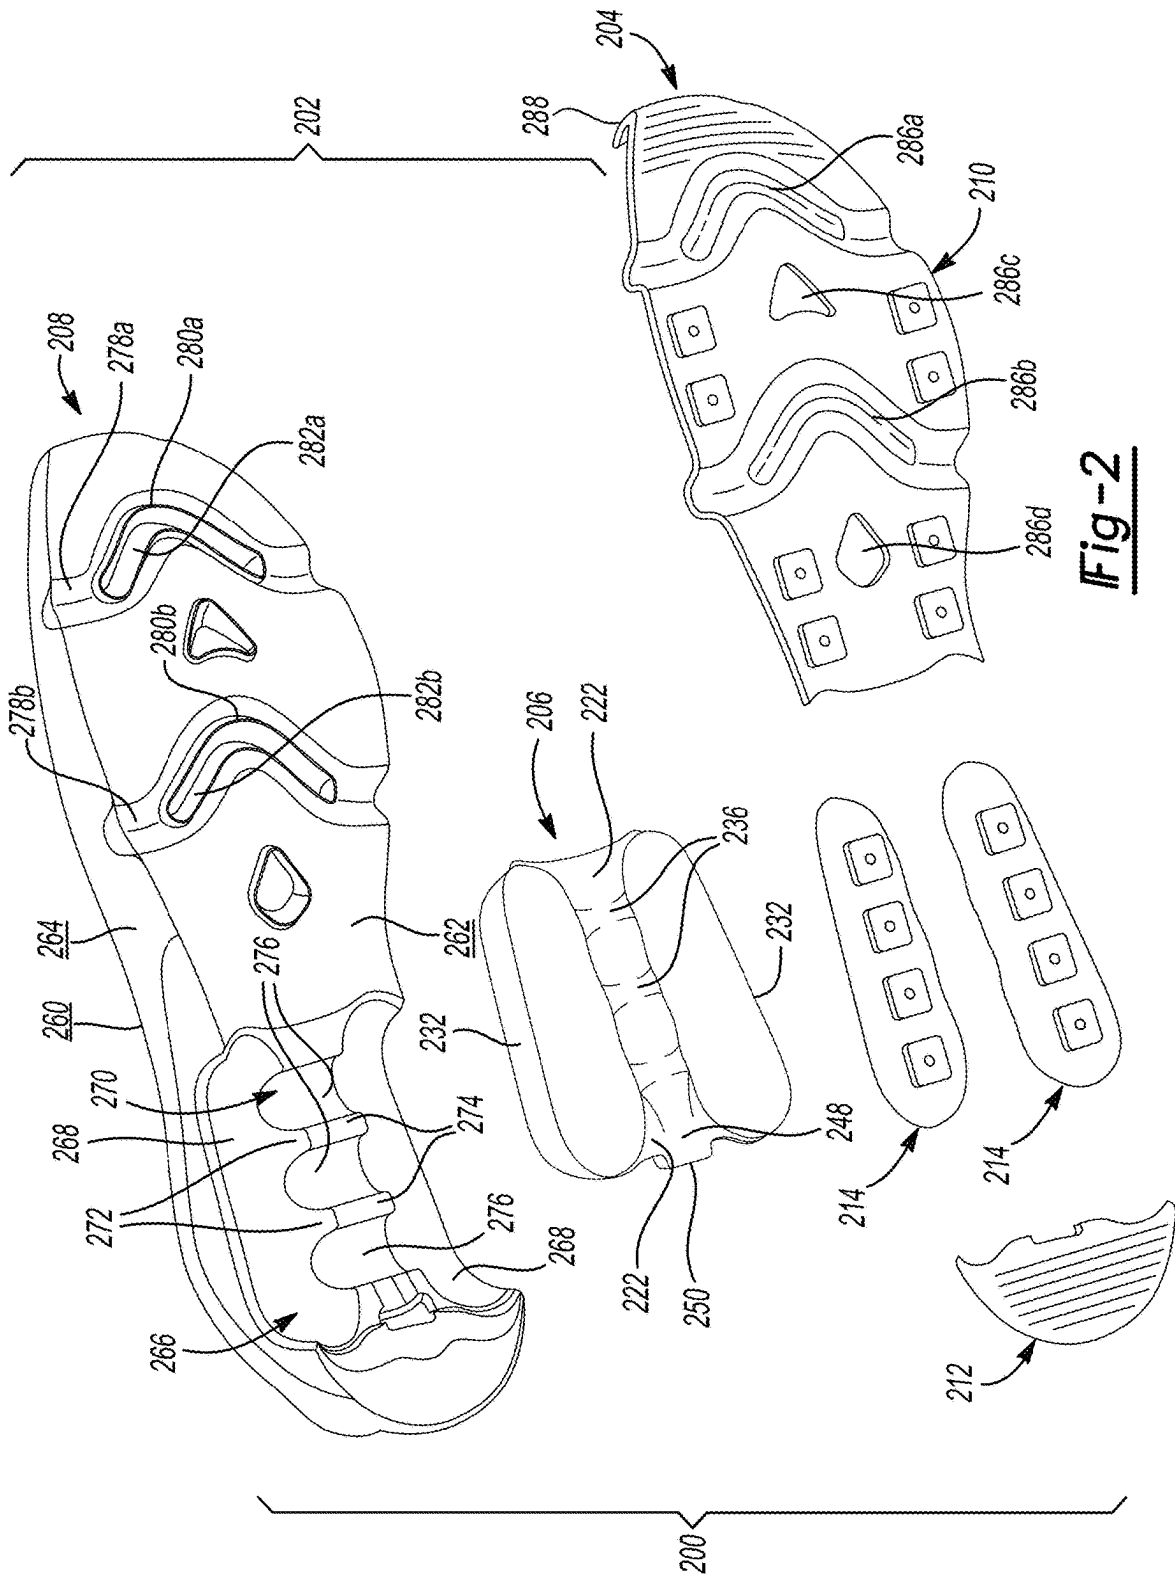


Fig-2

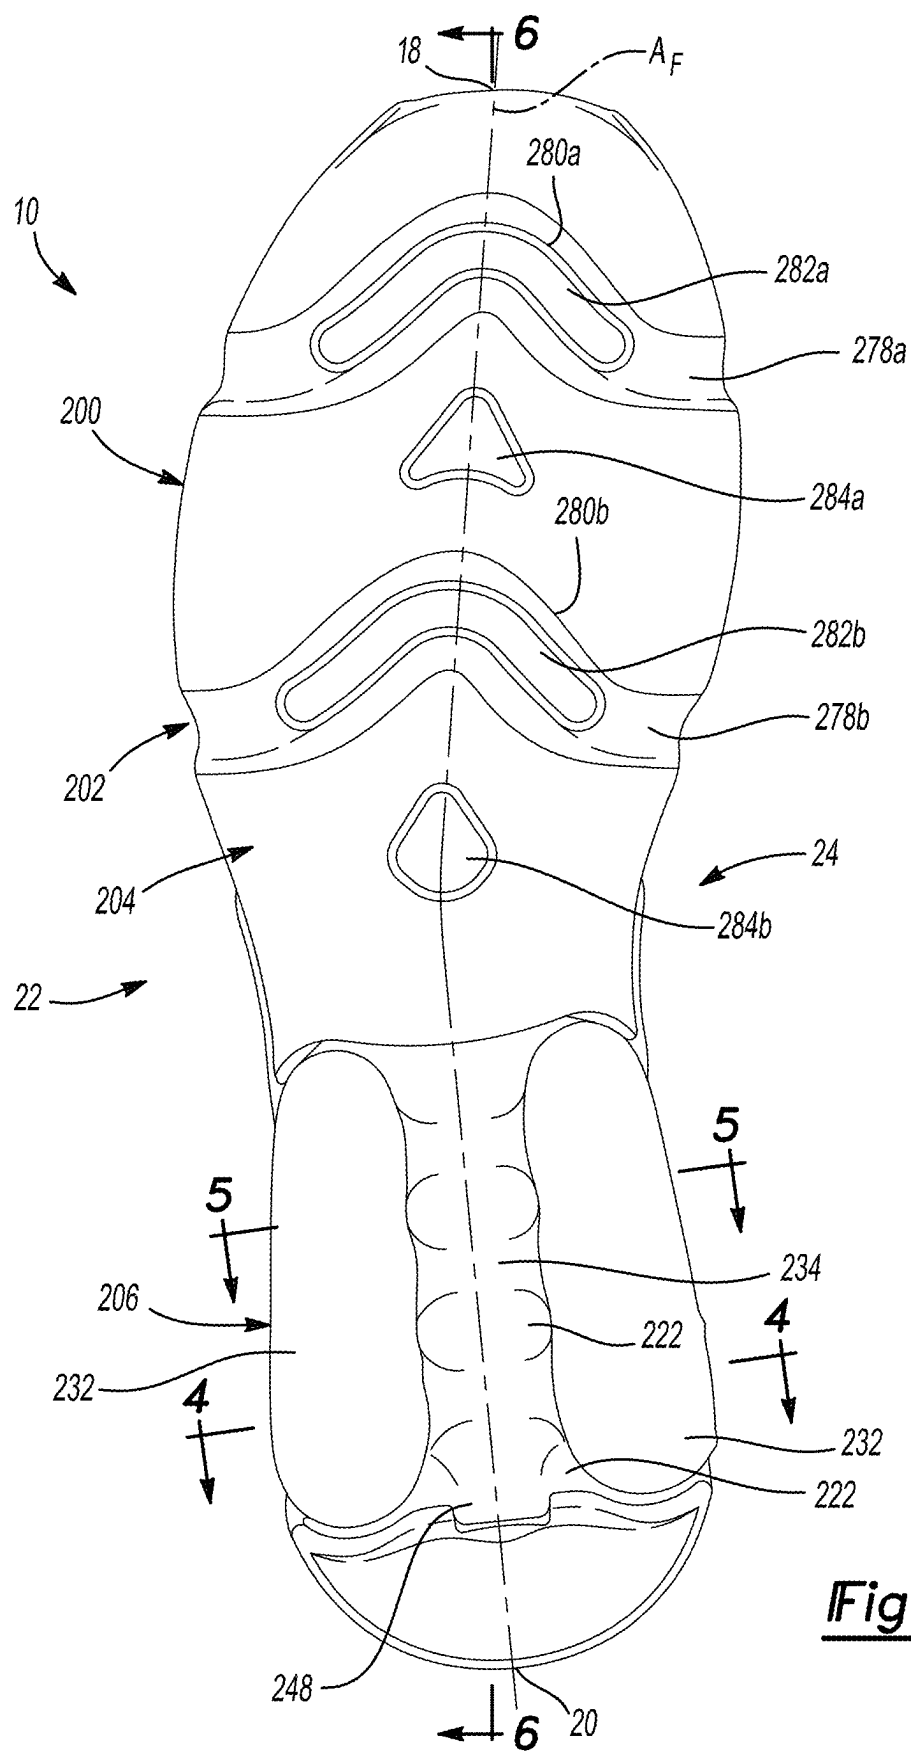
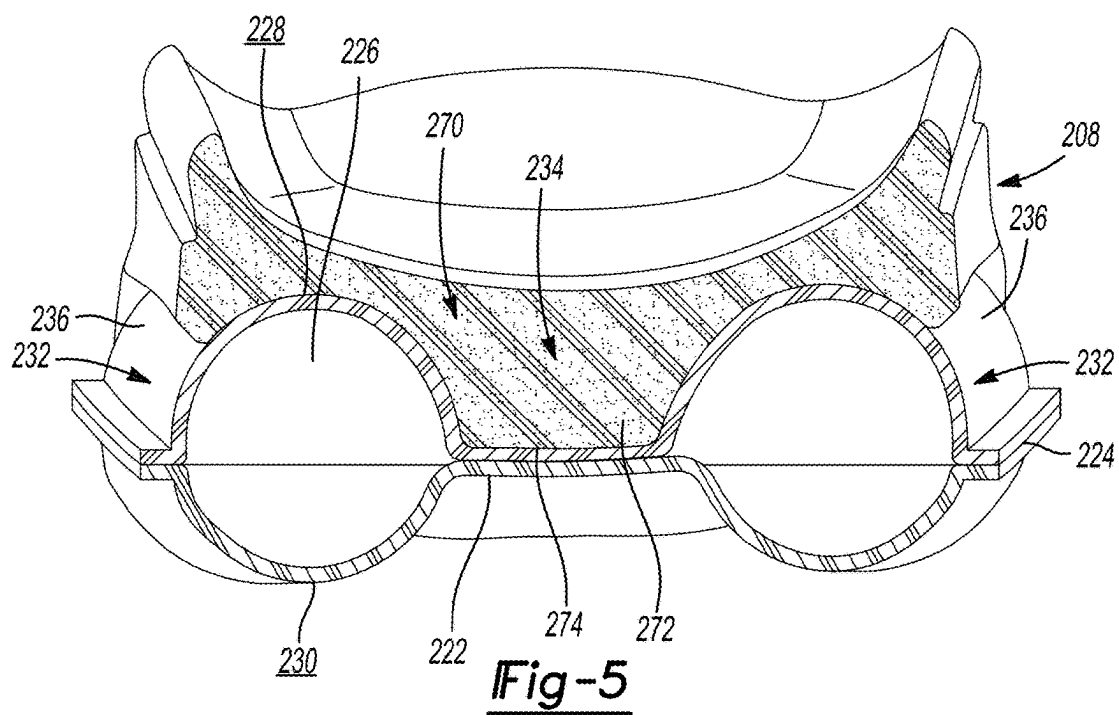
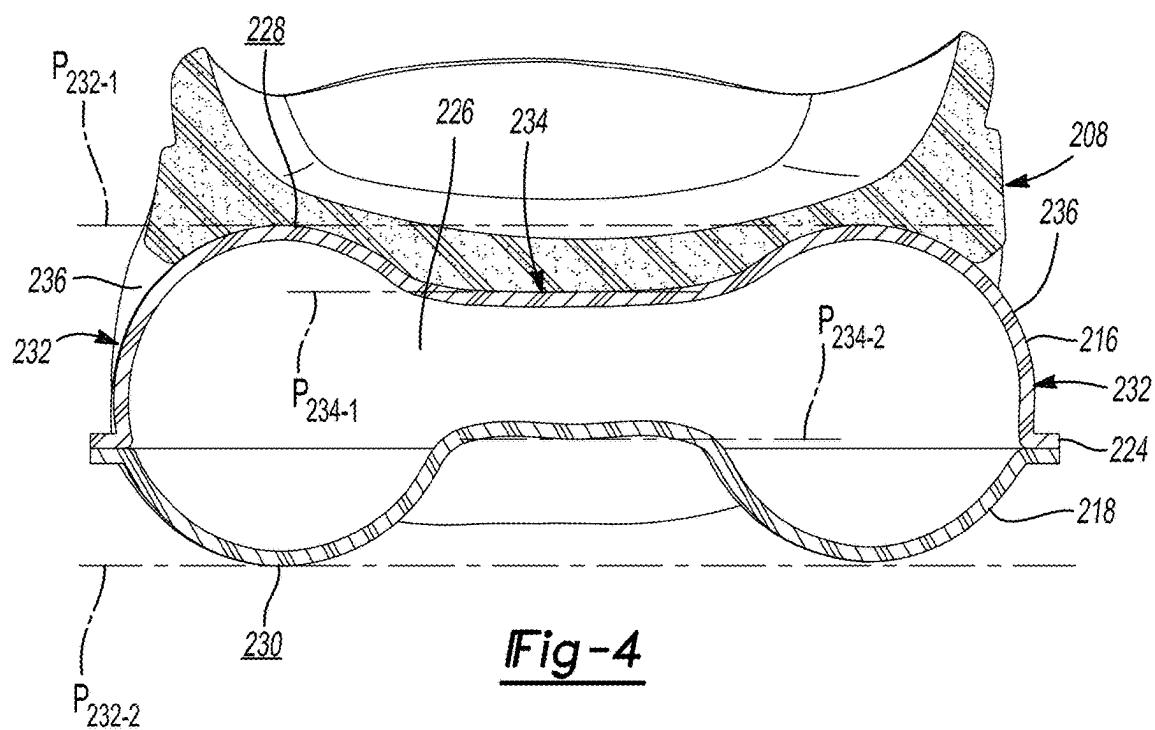


Fig-3



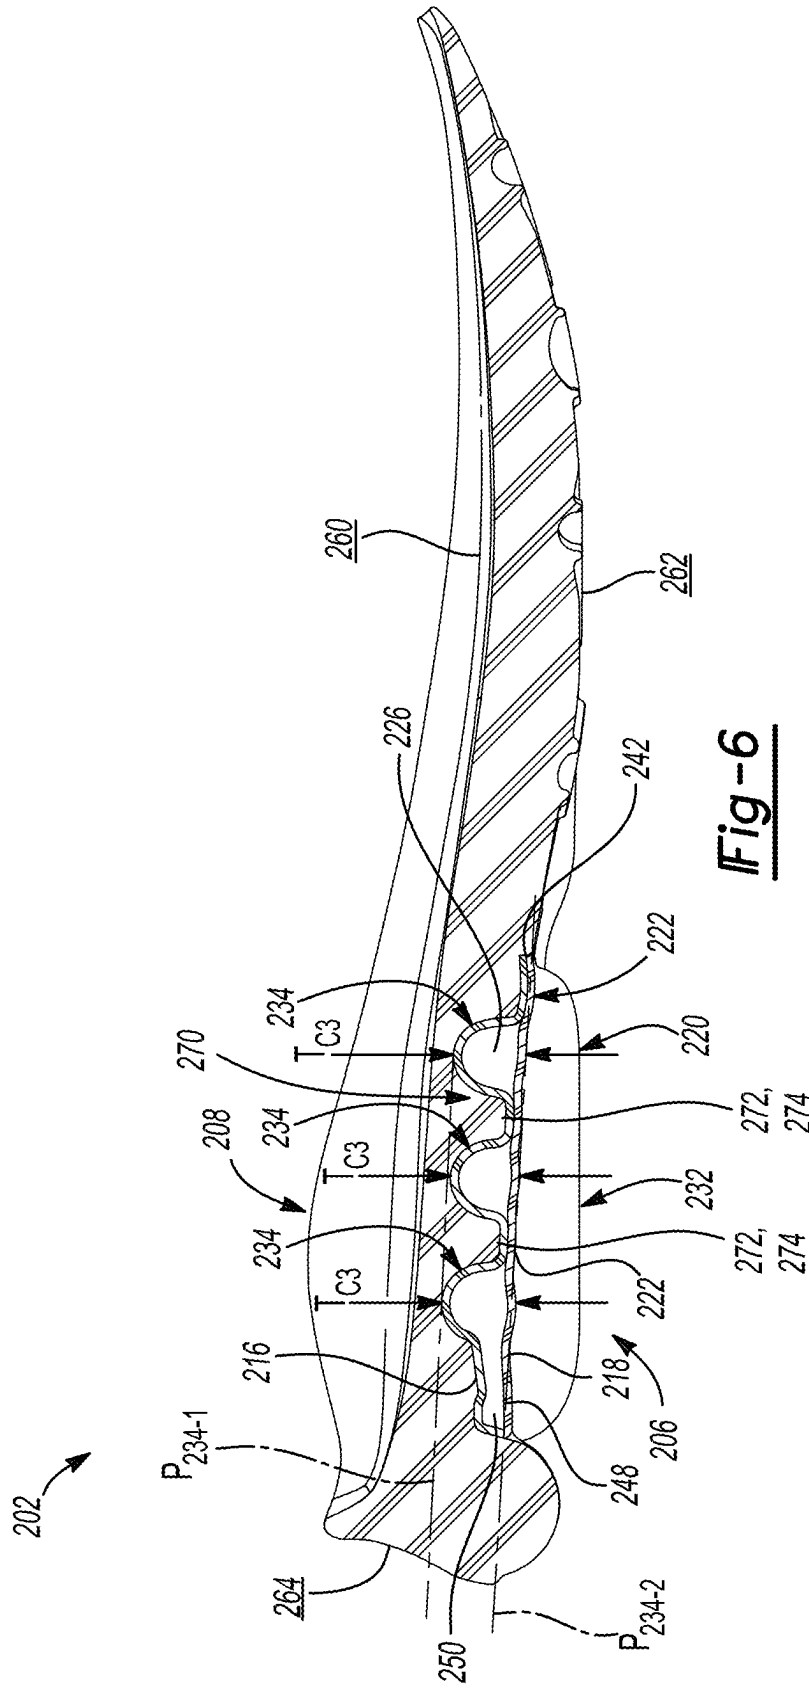


Fig-6

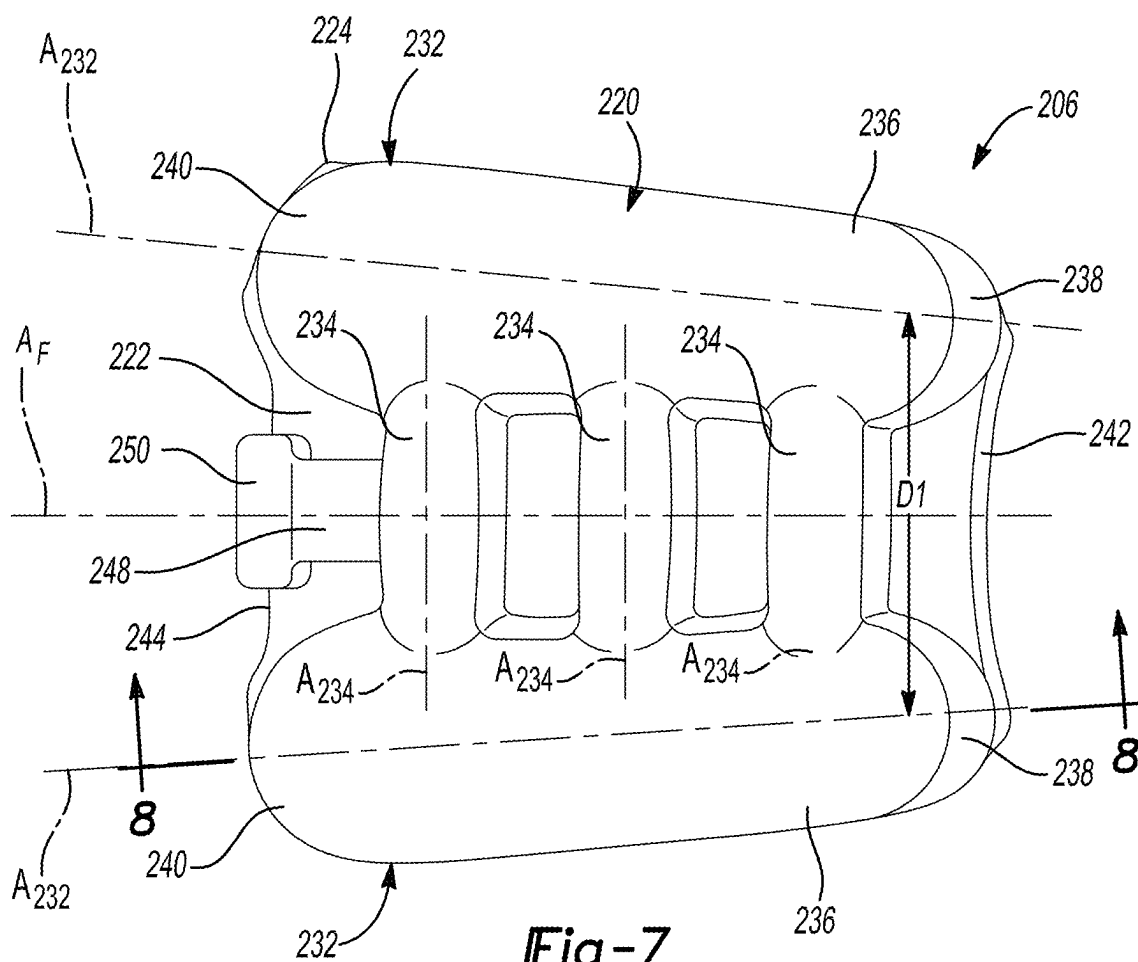


Fig-7

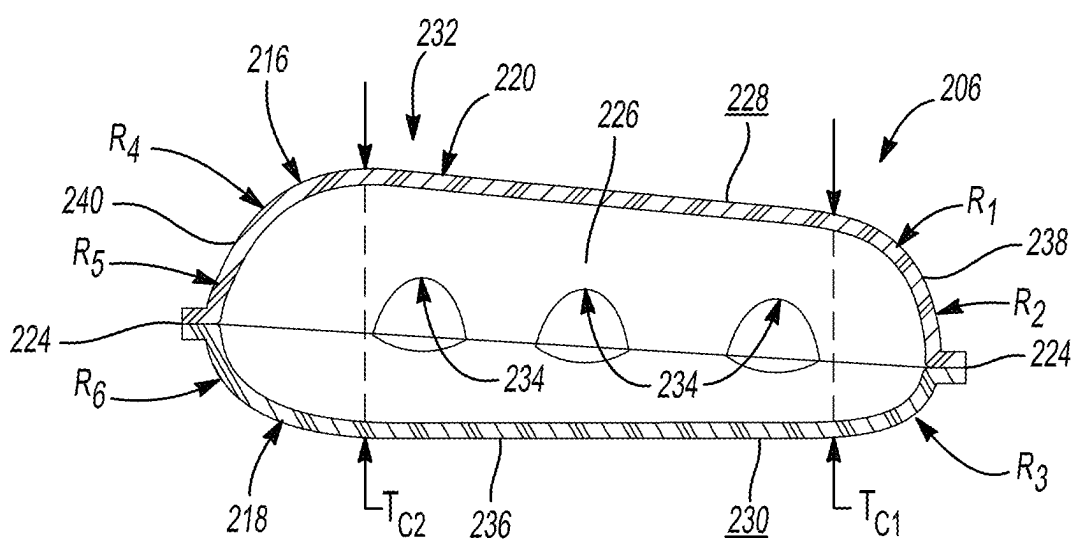


Fig-8

SOLE STRUCTURE FOR ARTICLE OF FOOTWEAR

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 16/825,363, filed Mar. 20, 2020, which claims priority under 35 U.S.C. § 119 (e) to U.S. Provisional Application No. 62/825,098, filed on Mar. 28, 2019. The disclosures of these prior applications are considered part of the disclosure of this application and are hereby incorporated by reference in their entirety.

FIELD

[0002] The present disclosure relates generally to sole structures for articles of footwear and more particularly to sole structures incorporating a fluid-filled bladder.

BACKGROUND

[0003] This section provides background information related to the present disclosure which is not necessarily prior art.

[0004] Articles of footwear conventionally include an upper and a sole structure. The upper may be formed from any suitable material(s) to receive, secure, and support a foot on the sole structure. The upper may cooperate with laces, straps, or other fasteners to adjust the fit of the upper around the foot. A bottom portion of the upper, proximate to a bottom surface of the foot, attaches to the sole structure.

[0005] Sole structures generally include a layered arrangement extending between a ground surface and the upper. One layer of the sole structure includes an outsole that provides abrasion-resistance and traction with the ground surface. The outsole may be formed from rubber or other materials that impart durability and wear-resistance, as well as enhance traction with the ground surface. Another layer of the sole structure includes a midsole disposed between the outsole and the upper. The midsole provides cushioning for the foot and may be partially formed from a polymer foam material that compresses resiliently under an applied load to cushion the foot by attenuating ground-reaction forces. The midsole may additionally or alternatively incorporate a fluid-filled bladder to increase the durability of the sole structure, as well as to provide cushioning to the foot by compressing resiliently under an applied load to attenuate ground-reaction forces. Sole structures may also include a comfort-enhancing insole or a sockliner located within a void proximate to the bottom portion of the upper and a strobrel attached to the upper and disposed between the midsole and the insole or sockliner.

[0006] Midsoles employing fluid-filled bladders typically include a bladder formed from two barrier layers of polymer material that are sealed or bonded together. The fluid-filled bladders are pressurized with a fluid such as air, and may incorporate tensile members within the bladder to retain the shape of the bladder when compressed resiliently under applied loads, such as during athletic movements. Generally, bladders are designed with an emphasis on balancing support for the foot and cushioning characteristics that relate to responsiveness as the bladder resiliently compresses under an applied load.

DRAWINGS

[0007] The drawings described herein are for illustrative purposes only of selected configurations and are not intended to limit the scope of the present disclosure.

[0008] FIG. 1 is a bottom perspective view of an article of footwear in accordance with principles of the present disclosure;

[0009] FIG. 2 is an exploded view of a sole structure of the article of footwear of FIG. 1, showing a sole structure having a midsole and an outsole;

[0010] FIG. 3 is a bottom plan view of the midsole of FIG. 2;

[0011] FIG. 4 is a cross-sectional view of the midsole of FIG. 3, taken along line 4-4 of FIG. 3;

[0012] FIG. 5 is a cross-sectional view of the midsole of FIG. 3, taken along line 5-5 of FIG. 3;

[0013] FIG. 6 is a cross-sectional view of the midsole of FIG. 3, taken along line 6-6 of FIG. 3;

[0014] FIG. 7 is a top plan view of a bladder of the article of footwear of FIG. 1; and

[0015] FIG. 8 is a cross-sectional view of the bladder of FIG. 7, taken along line 8-8 of FIG. 7.

[0016] Corresponding reference numerals indicate corresponding parts throughout the drawings.

DETAILED DESCRIPTION

[0017] Example configurations will now be described more fully with reference to the accompanying drawings. Example configurations are provided so that this disclosure will be thorough, and will fully convey the scope of the disclosure to those of ordinary skill in the art. Specific details are set forth such as examples of specific components, devices, and methods, to provide a thorough understanding of configurations of the present disclosure. It will be apparent to those of ordinary skill in the art that specific details need not be employed, that example configurations may be embodied in many different forms, and that the specific details and the example configurations should not be construed to limit the scope of the disclosure.

[0018] The terminology used herein is for the purpose of describing particular exemplary configurations only and is not intended to be limiting. As used herein, the singular articles “a,” “an,” and “the” may be intended to include the plural forms as well, unless the context clearly indicates otherwise. The terms “comprises,” “comprising,” “including,” and “having,” are inclusive and therefore specify the presence of features, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, steps, operations, elements, components, and/or groups thereof. The method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. Additional or alternative steps may be employed.

[0019] When an element or layer is referred to as being “on,” “engaged to,” “connected to,” “attached to,” or “coupled to” another element or layer, it may be directly on, engaged, connected, attached, or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being “directly on,” “directly engaged to,” “directly connected to,” “directly attached to,” or “directly coupled to” another

element or layer, there may be no intervening elements or layers present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., “between” versus “directly between,” “adjacent” versus “directly adjacent,” etc.). As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0020] The terms first, second, third, etc. may be used herein to describe various elements, components, regions, layers and/or sections. These elements, components, regions, layers and/or sections should not be limited by these terms. These terms may be only used to distinguish one element, component, region, layer or section from another region, layer or section. Terms such as “first,” “second,” and other numerical terms do not imply a sequence or order unless clearly indicated by the context. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the example configurations.

[0021] One aspect of the disclosure provides a bladder for a sole structure for an article of footwear. The bladder includes a first fluid-filled segment including a first terminal end and a second terminal end disposed on opposite ends of the first fluid-filled segment along a first longitudinal axis of the first fluid-filled segment. The bladder also includes a second fluid-filled segment including a third terminal end and a fourth terminal end disposed on opposite ends of the second fluid-filled segment along a second longitudinal axis of the second fluid-filled segment. The second fluid-filled segment is (i) spaced apart from the first fluid-filled segment in a first direction transverse to the first longitudinal axis and the second longitudinal axis and (ii) is convergent with the first fluid-filled segment.

[0022] Implementations of the disclosure may include one or more of the following optional features. In some examples, the bladder includes a third fluid-filled segment extending between the first fluid-filled segment and the second fluid-filled segment. Here, the third fluid-filled segment may fluidly couple the first fluid-filled segment and the second fluid-filled segment. Optionally, the third fluid-filled segment may be disposed transverse to the first longitudinal axis and the second longitudinal axis.

[0023] In some implementations, a fourth fluid-filled segment and a fifth fluid-filled segment are disposed on opposite sides of the third fluid-filled segment in a direction extending along the first longitudinal axis and the second longitudinal axis. Here, the fourth fluid-filled segment and the fifth fluid-filled segment may fluidly couple the first fluid-filled segment and the second fluid-filled segment. The bladder may include a web area extending between the third fluid-filled segment and the fourth fluid-filled segment and between the third fluid-filled segment and the fifth fluid-filled segment. Here, the web area may be recessed from a plane extending tangent to a first outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a first side of the bladder. Optionally, the web area is recessed from a plane extending tangent to a second outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a second side of the bladder, the second side of the bladder being formed on an opposite side of the bladder than the first side.

[0024] In some configurations, the bladder is formed from a first barrier sheet and a second barrier sheet. The first barrier sheet and the second barrier sheet may be formed from the same material. Optionally, the first barrier sheet and the second barrier sheet may be formed from different materials. One of the first barrier sheet and the second barrier sheet may be substantially transparent and the other of the first barrier sheet and the second barrier sheet may be opaque.

[0025] In some implementations, the first fluid-filled segment may taper in a direction along the first longitudinal axis and the second fluid-filled segment may taper in a direction along the second longitudinal axis.

[0026] In some examples, the bladder is incorporated into the sole structure for the article of footwear. Here, the first fluid-filled segment and the second fluid-filled segment may converge in a direction from a heel region to a forefoot region of the sole structure.

[0027] In some examples, the bladder is incorporated into an article of footwear. Here, the first fluid-filled segment and the second fluid-filled segment may converge in a direction from a heel region to a forefoot region of the article of footwear. Additionally or alternatively, the first fluid-filled segment and the second fluid-filled segment may be exposed at a ground-contacting surface of the article of footwear. The first fluid-filled segment may be exposed at one of a medial side and a lateral side of a sole structure of the article of footwear and the second fluid-filled segment may be exposed at the other of the medial side and the lateral side of the sole structure of the article of footwear.

[0028] Another aspect of the disclosure provides an article of footwear. The article of footwear includes a bladder. The bladder includes a first fluid-filled segment including a first terminal end and a second terminal end disposed on opposite ends of the first fluid-filled segment along a first longitudinal axis of the first fluid-filled segment. The first longitudinal axis extends in a first direction from a heel region of the article of footwear to a forefoot region of the article of footwear. A second fluid-filled segment is spaced apart from the first fluid-filled segment in a second direction transverse to the first direction and includes a third terminal end and a fourth terminal end disposed on opposite ends of the second fluid-filled segment along a second longitudinal axis of the second fluid-filled segment. The bladder further includes a third fluid-filled segment extending in the second direction between the first fluid-filled segment and the second fluid-filled segment.

[0029] Implementations of this aspect of the disclosure may include one or more of the following optional features. In some implementations, the first fluid-filled segment and the second fluid-filled segment are convergent. The first fluid-filled segment and the second fluid-filled segment may converge in a direction from the heel region to the forefoot region. The third fluid-filled segment may fluidly couple the first fluid-filled segment and the second fluid-filled segment. A fourth fluid-filled segment and a fifth fluid-filled segment may be disposed on opposite sides of the third fluid-filled segment in the first direction. The fourth fluid-filled segment and the fifth fluid-filled segment may fluidly couple the first fluid-filled segment and the second fluid-filled segment. A web area may extend between the third fluid-filled segment and the fourth fluid-filled segment and between the third fluid-filled segment and the fifth fluid-filled segment. The web area may be recessed from a plane extending tangent to

a first outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a first side of the bladder. Optionally, the web area may be recessed from a plane extending tangent to a second outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a second side of the bladder, the second side of the bladder being formed on an opposite side of the bladder than the first side.

[0030] In some configurations, the bladder is formed from a first barrier sheet and a second barrier sheet. Here, the first barrier sheet and the second barrier sheet may be formed from the same material or the first barrier sheet and the second barrier sheet may be formed from different materials. One of the first barrier sheet and the second barrier sheet may be substantially transparent and the other of the first barrier sheet and the second barrier sheet may be opaque. Here, the other of the first barrier sheet and the second barrier sheet may form a ground-contacting surface of the article of footwear.

[0031] In some examples, the first fluid-filled segment tapers in a direction along the first longitudinal axis and the second fluid-filled segment tapers in a direction along the second longitudinal axis. The first fluid-filled segment and the second fluid-filled segment may be exposed at a ground-contacting surface of the article of footwear. Optionally, the first fluid-filled segment may be exposed at one of a medial side and a lateral side of a sole structure of the article of footwear and the second fluid-filled segment may be exposed at the other of the medial side and the lateral side of the sole structure of the article of footwear.

[0032] Referring to FIGS. 1-8, an article of footwear **10** includes an upper **100** and a sole structure **200**. The article of footwear **10** may be divided into one or more regions. The regions may include a forefoot region **12**, a mid-foot region **14**, and a heel region **16**. The forefoot region **12** may be subdivided into a toe portion **12T** corresponding with phalanges, and a ball portion **12B** associated with metatarsal bones of a foot. The mid-foot region **14** may correspond with an arch area of the foot, and the heel region **16** may correspond with rear portions of the foot, including a calcaneus bone. The footwear **10** may further include an anterior end **18** associated with a forward-most point of the forefoot region, and a posterior end **20** associated with a rearward-most point of the heel region **16**. A longitudinal axis A_F of the footwear **10** extends along a length of the footwear **10** from the anterior end **18** to the posterior end **20**, and generally divides the footwear **10** into a lateral side **22** and a medial side **24**. Accordingly, the lateral side **22** and the medial side **24** respectively correspond with opposite sides of the footwear **10** and extend through the regions **12**, **14**, **16**.

[0033] The upper **100** includes interior surfaces that define an interior void **102** configured to receive and secure a foot for support on sole structure **200**. The upper **100** may be formed from one or more materials that are stitched or adhesively bonded together to form the interior void **102**. Suitable materials of the upper may include, but are not limited to, mesh, textiles, foam, leather, and synthetic leather. The materials may be selected and located to impart properties of durability, air-permeability, wear-resistance, flexibility, and comfort.

[0034] In some examples, the upper **100** includes a strobrel having a bottom surface opposing the sole structure **200** and an opposing top surface defining a footbed of the interior void **102**. Stitching or adhesives may secure the strobrel to

the upper **100**. The footbed may be contoured to conform to a profile of the bottom surface (e.g., plantar) of the foot. Optionally, the upper **100** may also incorporate additional layers such as an insole or sockliner that may be disposed upon the strobrel and reside within the interior void **102** of the upper **100** to receive a plantar surface of the foot to enhance the comfort of the article of footwear **10**. An ankle opening **104** in the heel region **16** may provide access to the interior void **102**. For example, the ankle opening **104** may receive a foot to secure the foot within the void **102** and facilitate entry and removal of the foot from and to the interior void **102**.

[0035] In some examples, one or more fasteners **106** extend along the upper **100** to adjust a fit of the interior void **102** around the foot and to accommodate entry and removal of the foot therefrom. The fasteners **106** may include laces, straps, cords, hook-and-loop, or any other suitable type of fastener. The upper **100** may include a tongue portion that extends between the interior void **102** and the fasteners.

[0036] With reference to FIG. 2, the sole structure **200** includes a midsole **202** configured to provide cushioning characteristics to the sole structure **200**, and an outsole **204** configured to provide a ground-engaging surface **26** of the article of footwear **10**. Unlike conventional sole structures, each of the midsole **202** and the outsole **204** are formed compositely, whereby each is formed of multiple subcomponents. For example, the midsole **202** includes a bladder **206** and a cushioning member **208** configured to receive the bladder **206**. Likewise, the outsole **204** includes a forefoot segment **210**, a heel segment **212**, and a pair of bladder segments **214**. The subcomponents **206**, **208**, **210**, **212**, **214** are assembled and secured to each other using various methods of bonding, including adhesively bonding and melding, for example.

[0037] With reference to FIGS. 4-8, the bladder **206** of the midsole **202** includes an opposing pair of barrier layers **216**, **218**, which can be joined to each other at discrete locations to define a chamber **220**, a web area **222**, and a peripheral seam **224**. In the illustrated embodiment, the barrier layers **216**, **218** include a first, upper barrier layer **216** and a second, lower barrier layer **218**. Alternatively, the chamber **220** can be produced from any suitable combination of one or more barrier layers.

[0038] As used herein, the term “barrier layer” (e.g., barrier layers **216**, **218**) encompasses both monolayer and multilayer films. In some embodiments, one or both of barrier layers **216**, **218** are each produced (e.g., thermoformed or blow molded) from a monolayer film (a single layer). In other embodiments, one or both of barrier layers **216**, **218** are each produced (e.g., thermoformed or blow molded) from a multilayer film (multiple sublayers). In either aspect, each layer or sublayer can have a film thickness ranging from about 0.2 micrometers to about 1 millimeter. In further embodiments, the film thickness for each layer or sublayer can range from about 0.5 micrometers to about 500 micrometers. In yet further embodiments, the film thickness for each layer or sublayer can range from about 1 micrometer to about 100 micrometers.

[0039] The lower barrier layer **218** may have a greater thickness than the upper barrier layer **216**, whereby the lower barrier layer **218** is configured to provide a portion of the ground-contacting surface **26** of the article of footwear.

As discussed in greater detail below, the bladder segments **214** of the outsole **204** may be integrally formed as part of the lower barrier layer **218**.

[0040] One or both of barrier layers **216**, **218** can independently be transparent, translucent, and/or opaque. For example, the upper barrier layer **216** may be transparent, while the lower barrier layer **218** is opaque. As used herein, the term “transparent” for a barrier layer and/or a fluid-filled chamber means that light passes through the barrier layer in substantially straight lines and a viewer can see through the barrier layer. In comparison, for an opaque barrier layer, light does not pass through the barrier layer and one cannot see clearly through the barrier layer at all. A translucent barrier layer falls between a transparent barrier layer and an opaque barrier layer, in that light passes through a translucent layer but some of the light is scattered so that a viewer cannot see clearly through the layer.

[0041] Barrier layers **216**, **218** can each be produced from an elastomeric material that includes one or more thermoplastic polymers and/or one or more cross-linkable polymers. In an aspect, the elastomeric material can include one or more thermoplastic elastomeric materials, such as one or more thermoplastic polyurethane (TPU) copolymers, one or more ethylene-vinyl alcohol (EVOH) copolymers, and the like.

[0042] As used herein, “polyurethane” refers to a copolymer (including oligomers) that contains a urethane group ($-\text{N}(\text{C}=\text{O})\text{O}-$). These polyurethanes can contain additional groups such as ester, ether, urea, allophanate, biuret, carbodiimide, oxazolidinyl, isocyanurate, uretdione, carbonate, and the like, in addition to urethane groups. In an aspect, one or more of the polyurethanes can be produced by polymerizing one or more isocyanates with one or more polyols to produce copolymer chains having ($-\text{N}(\text{C}=\text{O})\text{O}-$) linkages.

[0043] Examples of suitable isocyanates for producing the polyurethane copolymer chains include diisocyanates, such as aromatic diisocyanates, aliphatic diisocyanates, and combinations thereof. Examples of suitable aromatic diisocyanates include toluene diisocyanate (TDI), TDI adducts with trimethylolpropane (TMP), methylene diphenyl diisocyanate (MDI), xylene diisocyanate (XDI), tetramethylxylene diisocyanate (TMXDI), hydrogenated xylene diisocyanate (HXXDI), naphthalene 1,5-diisocyanate (NDI), 1,5-tetrahydronaphthalene diisocyanate, para-phenylene diisocyanate (PPDI), 3,3'-dimethyldiphenyl-4,4'-diisocyanate (DDDI), 4,4'-dibenzyl diisocyanate (DBDI), 4-chloro-1,3-phenylene diisocyanate, and combinations thereof. In some embodiments, the copolymer chains are substantially free of aromatic groups.

[0044] In particular aspects, the polyurethane polymer chains are produced from diisocyanates including HMDI, TDI, MDI, H12 aliphatics, and combinations thereof. In an aspect, the thermoplastic TPU can include polyester-based TPU, polyether-based TPU, polycaprolactone-based TPU, polycarbonate-based TPU, polysiloxane-based TPU, or combinations thereof.

[0045] In another aspect, the polymeric layer can be formed of one or more of the following: EVOH copolymers, poly(vinyl chloride), polyvinylidene polymers and copolymers (e.g., polyvinylidene chloride), polyamides (e.g., amorphous polyamides), amide-based copolymers, acrylonitrile polymers (e.g., acrylonitrile-methyl acrylate copolymers), polyethylene terephthalate, polyether imides, poly-

acrylic imides, and other polymeric materials known to have relatively low gas transmission rates. Blends of these materials as well as with the TPU copolymers described herein and optionally including combinations of polyimides and crystalline polymers, are also suitable.

[0046] The barrier layers **216**, **218** may include two or more sublayers (multilayer film) such as shown in Mitchell et al., U.S. Pat. No. 5,713,141 and Mitchell et al., U.S. Pat. No. 5,952,065, the disclosures of which are incorporated by reference in their entirety. In embodiments where the barrier layers **216**, **218** include two or more sublayers, examples of suitable multilayer films include microlayer films, such as those disclosed in Bonk et al., U.S. Pat. No. 6,582,786, which is incorporated by reference in its entirety. In further embodiments, barrier layers **216**, **218** may each independently include alternating sublayers of one or more TPU copolymer materials and one or more EVOH copolymer materials, where the total number of sublayers in each of barrier layers **216**, **218** includes at least four (4) sublayers, at least ten (10) sublayers, at least twenty (20) sublayers, at least forty (40) sublayers, and/or at least sixty (60) sublayers.

[0047] The chamber **220** can be produced from barrier layers **216**, **218** using any suitable technique, such as thermoforming (e.g. vacuum thermoforming), blow molding, extrusion, injection molding, vacuum molding, rotary molding, transfer molding, pressure forming, heat sealing, casting, low-pressure casting, spin casting, reaction injection molding, radio frequency (RF) welding, and the like. In an aspect, barrier layers **216**, **218** can be produced by co-extrusion followed by vacuum thermoforming to produce an inflatable chamber **220**, which can optionally include one or more valves (e.g., one way valves) that allows the chamber **220** to be filled with the fluid (e.g., gas).

[0048] The chamber **220** can be provided in a fluid-filled (e.g., as provided in footwear **10**) or in an unfilled state. The chamber **220** can be filled to include any suitable fluid, such as a gas or liquid. In an aspect, the gas can include air, nitrogen (N_2), or any other suitable gas. In other aspects, the chamber **220** can alternatively include other media, such as pellets, beads, ground recycled material, and the like (e.g., foamed beads and/or rubber beads). The fluid provided to the chamber **220** can result in the chamber **220** being pressurized. Alternatively, the fluid provided to the chamber **220** can be at atmospheric pressure such that the chamber **220** is not pressurized but, rather, simply contains a volume of fluid at atmospheric pressure.

[0049] The chamber **220** desirably has a low gas transmission rate to preserve its retained gas pressure. In some embodiments, the chamber **220** has a gas transmission rate for nitrogen gas that is at least about ten (10) times lower than a nitrogen gas transmission rate for a butyl rubber layer of substantially the same dimensions. In an aspect, the chamber **220** has a nitrogen gas transmission rate of 15 cubic-centimeter/square-meter-atmosphere-day ($\text{cm}^3/\text{m}^2\cdot\text{atm}\cdot\text{day}$) or less for an average film thickness of 500 micrometers (based on thicknesses of barrier layers **216**, **218**). In further aspects, the transmission rate is 10 $\text{cm}^3/\text{m}^2\cdot\text{atm}\cdot\text{day}$ or less, 5 $\text{cm}^3/\text{m}^2\cdot\text{atm}\cdot\text{day}$ or less, or 1 $\text{cm}^3/\text{m}^2\cdot\text{atm}\cdot\text{day}$ or less.

[0050] In some implementations, the upper barrier layer **216** and the lower barrier layer **218** cooperate to define a geometry (e.g., thicknesses, width, and lengths) of the chamber **220**. For example, the web area **222** and the

peripheral seam 224 may cooperate to bound and extend around the chamber 220 to seal the fluid (e.g., air) within the chamber 220. Thus, the chamber 220 is associated with an area of the bladder 206 where interior surfaces of the upper and lower barrier layers 216, 218 are not joined together and, thus, are separated from one another.

[0051] As shown in FIGS. 4-6 and 8, a space formed between opposing interior surfaces of the upper and lower barrier layers 216, 218 defines an interior void 226 of the chamber 220. Similarly, exterior surfaces of the upper and lower barrier layers 216, 218 define an exterior profile of the chamber 220. Accordingly, the upper and lower barrier layers 216, 218 define respective upper and lower surfaces 228, 230 of the bladder 206. Thicknesses T_C of the chamber 220 are defined by the distance between the upper and lower surfaces 228, 230 of the bladder 206, as discussed in greater detail below.

[0052] Referring to FIGS. 2-8, the chamber 220 includes a plurality of segments 232, 234 that cooperate to provide characteristics of responsiveness and support to the midsole 202. Particularly, the segments 232, 234 may be described as including a pair of cushions 232 that are connected (i.e., in fluid communication) with each other by one or more conduits 234. When assembled to in the sole structure 200, the cushions 232 of the chamber 220 are configured to be at least partially exposed along a peripheral edge of the sole structure 200.

[0053] Referring to FIG. 7, each of the cushions 232 includes tubular body 236, a first terminal end 238 disposed at a first end of the tubular body 236, and a second terminal end 240 disposed at an opposite end of the tubular body 236 from the first terminal end 238. The tubular body 236 defines a substantially circular cross section that extends along a longitudinal axis A_{232} of the cushion 232. As shown, the thickness T_C of the tubular body 236 increases continuously along the longitudinal axis A_{232} from a first thickness T_{C1} at the first terminal end 238 to a second thickness T_{C2} at the second terminal end 240. Thus, the thickness T_C of the tubular body 236 may be described as tapering along the direction from the second terminal end 240 to the first terminal end 238.

[0054] The first terminal end 238 and the second terminal end 240 of each cushion 232 are substantially dome-shaped, and each includes compound curvatures associated with the respective upper and lower barrier layers 216, 218. For example, the first terminal end 238 of each cushion 232 is formed where an end portion of the upper barrier layer 216 converges with and is joined to the lower barrier layer 218 at the peripheral seam 224 to enclose an anterior end of the tubular body 236. As shown, the upper barrier layer 216 has a first portion extending from the tubular body 236 and having a first radius R1, and a second portion extending between the first portion and the peripheral seam 224 and having a second radius R2. The lower barrier layer 218 has a third portion extending between the tubular body 236 and the peripheral seam 224 and having a third radius R3. The second radius R2 is greater than the first radius R1 and the third radius R3, whereby the second radius R2 provides a relatively flat-faced profile to an intermediate portion of the first terminal end 238. The third radius R3 may be less than the first radius R1.

[0055] Referring still to FIG. 8, the second terminal end 240 of each cushion 232 is formed where another end portion of the upper barrier layer 216 converges with and is

joined to the lower barrier layer 218 at the peripheral seam 224 to enclose the opposite end of the tubular body 236. As shown, at the second terminal end 240 the upper barrier layer 216 includes a fourth portion having a fourth radius R4 extending from the tubular body 236 and a fifth portion having a fifth radius R5 between the fourth portion and the peripheral seam 224. The lower barrier layer 218 includes a sixth portion having a sixth radius R6 extending between the tubular body 236 and the peripheral seam 224. The fifth radius R5 is greater than the fourth radius R4 and the sixth radius R6, whereby the fifth radius R5 provides a relatively flat-faced profile to an intermediate portion of the second terminal end 240. The sixth radius R6 may be less than the fourth radius R4.

[0056] As provided above, each of the cushions 232 defines a respective longitudinal axis A_{232} that extends from the first terminal end 238 to the second terminal end 240. As best shown in FIG. 7, the cushions 232 are spaced apart from each other along a direction transverse to the longitudinal axes A_{232} of each of the cushions 232. More particularly, when the bladder 206 is assembled within the sole structure 200, the cushions 232 are spaced apart from each other along a lateral direction of the article of footwear 10, substantially perpendicular to the longitudinal axis A_F of the article of footwear 10. Furthermore, the longitudinal axes A_{232} of the cushions 232 converge with each other and with the longitudinal axis A_F of the article of footwear 10 along the direction from the posterior end 20 to the anterior end 18. Accordingly, a lateral distance D1 between the cushions 232 is greater at the second terminal ends 240 than at the first terminal ends 238.

[0057] With continued reference to FIGS. 2-8, the chamber 220 further includes at least one conduit 234 extending between and fluidly coupling the cushions 232. In the illustrated example, the chamber 220 includes a plurality of the conduits 234 connecting the tubular bodies 236 of the cushions 232 to each other. The conduits 234 each extend along respective longitudinal axes A_{234} that are transverse to the longitudinal axes A_{232} of the cushions 232. As best shown in FIGS. 7 and 8, the conduits 234 include a first conduit 234 extending between the tubular bodies 236 of the cushions 232 adjacent to the first terminal ends 238, a second conduit 234 extending between the tubular bodies 236 of the cushions 232 adjacent to the second terminal ends 240, and a third conduit 234 disposed between the first conduit 234 and the second conduit 234 and connecting intermediate portions of the tubular bodies 236. Accordingly, the first conduit 234 and the second conduit 234 are disposed on opposite sides of the third conduit 234.

[0058] As best shown in FIGS. 6 and 8, the conduits 234 are defined by the cooperation of the upper barrier layer 216 and the lower barrier layer 218. As shown in FIG. 6, the upper barrier layer 216 and the lower barrier layer 218 are formed to provide a plurality of semi-cylindrically shaped conduits 234, each having a substantially similar third thickness T_{C3} that is less than the first thickness T_{C1} and the second thickness T_{C2} of the cushions 232. A profile of each of the conduits 234 is substantially imparted by the upper barrier layer 216, whereby the upper barrier layer 216 is molded to define a curved upper portion of each conduit 234 while the lower barrier layer 218 is provided as substantially flat lower portion of each of the conduits 234. Although the lower barrier layer 216 is initially provided in a substantially flat state, the lower barrier layer 218 may bulge from the web

area **222** when the interior void **226** of the chamber **220** is pressurized and the lower barrier layer **218** is biased apart from the upper barrier layer **216**, as illustrated in FIG. 6.

[0059] The top-most portions of each of the conduits **234**, defined by the upper barrier layer **216**, are aligned with each other along a first conduit plane P_{234-1} . Likewise, the bottom-most portions of each of the conduits **234**, defined by the lower barrier layer **218**, are aligned with each other along a second conduit plane P_{234-1} . As discussed in greater detail below, the web area **222** of the bladder **206** may be recessed from each of the first conduit plane P_{234-1} and the second conduit plane P_{234-2} . Furthermore, the first and second conduit planes P_{234-1} , P_{234-2} are recessed from first and second cushion planes P_{232-1} , P_{232-2} formed by the upper-most and lower-most surfaces of the cushions **232**, as best shown in FIG. 4.

[0060] With reference to FIGS. 5-7, the web area **222** is formed at a bonded region of the upper barrier layer **216** and the lower barrier layer **218**, and extends between and connects each of the segments **232**, **234** of the chamber **220**. Particularly, the web area **222** includes an anterior portion extending between and connecting the first terminal ends **238** of the respective cushions **232**, and defining a first terminal edge **242** at an anterior end of the bladder **206**. A posterior portion of the web area **222** extends between and connects the second terminal ends **240** of the cushions **232** and forms a second terminal edge **244** at a posterior end of the bladder **206**. Intermediate portions of the web area **222** extend between and connect adjacent ones of the conduits **234** and the cushions **232**. Accordingly, the intermediate portions of the web area **222** may be completely surrounded by the chamber **220**. In the illustrated example, the web area **222** is disposed vertically intermediate with respect to the thickness T_C of the fluid-filled chamber **220**. Put another way, the web area **222** is recessed from the cushion planes P_{232-1} , P_{232-2} and the conduit planes P_{234-1} , P_{234-2} .

[0061] The web area **222** includes an inflation conduit **248** configured to provide a fluid passage between a mold cavity (not shown) and the interior of the chamber **220**. The inflation conduit **248** extends from an inlet **250** formed adjacent to the posterior, second terminal edge **244** of the web area **222** to the posterior-most one of the conduits **234** of the fluid-filled chamber **220**.

[0062] In some implementations, the upper and lower barrier layers **216**, **218** are formed by respective mold portions each defining various surfaces for forming depressions and pinched surfaces corresponding to locations where the web area **222** and/or the peripheral seam **224** are formed when the upper barrier layer **216** and the lower barrier layer **218** are joined and bonded together. In some implementations, adhesive bonding joins the upper barrier layer **216** and the lower barrier layer **218** to form the web area **222** and the peripheral seam **224**. In other implementations, the upper barrier layer **216** and the lower barrier layer **218** are joined to form the web area **222** and the peripheral seam **224** by thermal bonding. In some examples, one or both of the barrier layers **216**, **218** are heated to a temperature that facilitates shaping and melding. In some examples, the barrier layers **216**, **218** are heated prior to being located between their respective molds. In other examples, the mold may be heated to raise the temperature of the barrier layers **216**, **218**. In some implementations, a molding process used to form the fluid-filled chamber **220** incorporates vacuum ports within mold portions to remove air such that the upper

and lower barrier layers **216**, **218** are drawn into contact with respective mold portions. In other implementations, fluids such as air may be injected into areas between the upper and lower barrier layers **216**, **218** such that pressure increases cause the barrier layers **216**, **218** to engage with surfaces of their respective mold portions.

[0063] As shown in FIGS. 2-6, the cushioning member **208** includes a top surface **260** and a bottom surface **262** formed on an opposite side of the cushioning member **208** from the top surface **260**. A peripheral surface **264** extends between the top surface **260** and the bottom surface **262**, and forms an outer periphery of the sole structure **200**. The top surface **260** of the cushioning member **208** defines a profile of the footbed, and may be contoured to correspond to a shape of the foot.

[0064] With reference to FIG. 2, the bottom surface **262** of the cushioning member **208** is configured to cooperate with the bladder **206**, whereby the bottom surface **262** includes a pocket **266** formed in the heel region **16** and configured to interface with the upper barrier layer **216** of the bladder **206**. As shown, the pocket **266** includes a pair of recesses **268** extending along opposite sides of the cushioning member **208**, which are configured to receive the cushions **232** of the bladder **206**. The recesses **268** may extend through the peripheral surface **264** on the medial side **24** and the lateral side **22** of the cushioning member **208**, whereby the cushions **232** of the bladder **206** are exposed and partially protrude from the peripheral surface **264** of the cushioning member **208**.

[0065] With continued reference to FIG. 2, the pocket **266** may be formed with a central spine **270** extending continuously between the recesses **268** along the direction of the longitudinal axis A_F of the article of footwear **10**. As shown, the spine **270** includes a plurality of fingers **272** configured to extend into the recessed portions of the bladder **206** defined by the web area **222**. Accordingly, a distal end **274** of each of the fingers **272** opposes and interfaces with the upper barrier layer **216** in the web area **222** of the bladder **206**, as best shown in FIGS. 5 and 6. The spine **270** further defines a plurality of channels **276** extending along a lateral direction, transverse to the longitudinal axis A_F of the article of footwear **10**, and configured to receive the portions of the conduits **234** formed by the upper barrier layer **216** of the bladder **206**. The cooperation of the spine **270**, the web area **222**, and the conduits **234** provides a desired degree of flexibility along the heel region **16** of the sole structure **200**.

[0066] Referring again to FIG. 2, the cushioning member **208** includes a pair of grooves **278a**, **278b** formed in the bottom surface **262** and extending along the lateral direction from the peripheral surface **264** on the lateral side **22** to the peripheral surface **264** on the medial side **24**. Each of the grooves **278a**, **278b** includes a chevron-shaped intermediate portion **280a**, **280b**, which includes a cavity **282a**, **282b** formed therein. Accordingly, the cavity **282a**, **282b** formed in the intermediate portion **280a**, **280b** of each groove **278a**, **278b** may be recessed further within the bottom surface **262** than the remainder of the groove **278a**, **278b**. As shown, a first one of the grooves **278a** is formed along the intersection between the toe portion **12T** and the ball portion **12B** of the forefoot region **12**, while a second one of the grooves **278b** is formed along the intersection of the forefoot region **12** and the mid-foot region **14**.

[0067] The cushioning member **208** may further include one or more depressions **284a**, **284b** formed in the bottom

surface **262**. As shown, the depressions **284a**, **284b** are centrally disposed between the lateral side **22** and the medial side **24** of the cushioning member **208**. A first one of the depressions **284a** is longitudinally disposed between the first groove **278a** and the second groove **278b**, and has a substantially triangular or arrowhead-like shape. A second one of the depressions **284b** is longitudinally disposed between the second groove **278b** and the pocket **266**, and has a substantially diamond-like shape.

[0068] As described above, the cushioning member **208** is formed of a resilient polymeric material, such as foam or rubber, to impart properties of cushioning, responsiveness, and energy distribution to the foot of the wearer. Example resilient polymeric materials for the cushioning member **208** may include those based on foaming or molding one or more polymers, such as one or more elastomers (e.g., thermoplastic elastomers (TPE)). The one or more polymers may include aliphatic polymers, aromatic polymers, or mixtures of both; and may include homopolymers, copolymers (including terpolymers), or mixtures of both.

[0069] In some aspects, the one or more polymers may include olefinic homopolymers, olefinic copolymers, or blends thereof. Examples of olefinic polymers include polyethylene, polypropylene, and combinations thereof. In other aspects, the one or more polymers may include one or more ethylene copolymers, such as, ethylene-vinyl acetate (EVA) copolymers, EVOH copolymers, ethylene-ethyl acrylate copolymers, ethylene-unsaturated mono-fatty acid copolymers, and combinations thereof.

[0070] In further aspects, the one or more polymers may include one or more polyacrylates, such as polyacrylic acid, esters of polyacrylic acid, polyacrylonitrile, polyacrylic acetate, polymethyl acrylate, polyethyl acrylate, polybutyl acrylate, polymethyl methacrylate, and polyvinyl acetate; including derivatives thereof, copolymers thereof, and any combinations thereof.

[0071] In yet further aspects, the one or more polymers may include one or more ionomeric polymers. In these aspects, the ionomeric polymers may include polymers with carboxylic acid functional groups, sulfonic acid functional groups, salts thereof (e.g., sodium, magnesium, potassium, etc.), and/or anhydrides thereof. For instance, the ionomeric polymer(s) may include one or more fatty acid-modified ionomeric polymers, polystyrene sulfonate, ethylene-methacrylic acid copolymers, and combinations thereof.

[0072] In further aspects, the one or more polymers may include one or more styrenic block copolymers, such as acrylonitrile butadiene styrene block copolymers, styrene acrylonitrile block copolymers, styrene ethylene butylene styrene block copolymers, styrene ethylene butadiene styrene block copolymers, styrene ethylene propylene styrene block copolymers, styrene butadiene styrene block copolymers, and combinations thereof.

[0073] In further aspects, the one or more polymers may include one or more polyamide copolymers (e.g., polyamide-polyether copolymers) and/or one or more polyurethanes (e.g., crosslinked polyurethanes and/or thermoplastic polyurethanes). Examples of suitable polyurethanes include those discussed above for barrier layers **216**, **218**. Alternatively, the one or more polymers may include one or more natural and/or synthetic rubbers, such as butadiene and isoprene.

[0074] When the resilient polymeric material is a foamed polymeric material, the foamed material may be foamed

using a physical blowing agent which phase transitions to a gas based on a change in temperature and/or pressure, or a chemical blowing agent which forms a gas when heated above its activation temperature. For example, the chemical blowing agent may be an azo compound such as azodicarbonamide, sodium bicarbonate, and/or an isocyanate.

[0075] In some embodiments, the foamed polymeric material may be a crosslinked foamed material. In these embodiments, a peroxide-based crosslinking agent such as dicumyl peroxide may be used. Furthermore, the foamed polymeric material may include one or more fillers such as pigments, modified or natural clays, modified or unmodified synthetic clays, talc glass fiber, powdered glass, modified or natural silica, calcium carbonate, mica, paper, wood chips, and the like.

[0076] The resilient polymeric material may be formed using a molding process. In one example, when the resilient polymeric material is a molded elastomer, the uncured elastomer (e.g., rubber) may be mixed in a Banbury mixer with an optional filler and a curing package such as a sulfur-based or peroxide-based curing package, calendared, formed into shape, placed in a mold, and vulcanized.

[0077] In another example, when the resilient polymeric material is a foamed material, the material may be foamed during a molding process, such as an injection molding process. A thermoplastic polymeric material may be melted in the barrel of an injection molding system and combined with a physical or chemical blowing agent and optionally a crosslinking agent, and then injected into a mold under conditions which activate the blowing agent, forming a molded foam.

[0078] Optionally, when the resilient polymeric material is a foamed material, the foamed material may be a compression molded foam. Compression molding may be used to alter the physical properties (e.g., density, stiffness and/or durometer) of a foam, or to alter the physical appearance of the foam (e.g., to fuse two or more pieces of foam, to shape the foam, etc.), or both.

[0079] The compression molding process desirably starts by forming one or more foam preforms, such as by injection molding and foaming a polymeric material, by forming foamed particles or beads, by cutting foamed sheet stock, and the like. The compression molded foam may then be made by placing the one or more preforms formed of foamed polymeric material(s) in a compression mold, and applying sufficient pressure to the one or more preforms to compress the one or more preforms in a closed mold. Once the mold is closed, sufficient heat and/or pressure is applied to the one or more preforms in the closed mold for a sufficient duration of time to alter the preform(s) by forming a skin on the outer surface of the compression molded foam, fuse individual foam particles to each other, permanently increase the density of the foam(s), or any combination thereof. Following the heating and/or application of pressure, the mold is opened and the molded foam article is removed from the mold.

[0080] Referring now to FIGS. **1** and **2**, the outsole **204** includes the forefoot segment **210** and the heel segment **212** attached to the bottom surface **262** of the cushioning member **208**, and the bladder segments **214** attached to the lower barrier layer **218** of the bladder **206**. As shown, the forefoot segment **210** of the outsole **204** includes a plurality of cutouts **286a-286d** corresponding to the cavities **282a**, **282b** and the depressions **284a**, **284b** of the cushioning member

208. Particularly, shapes of the cutouts **286a-286d** correspond to the shapes of the cavities **282a, 282b** and the depressions **284a, 284b** such that the cavities **282a, 282b** and the depressions **284a, 284b** are exposed to the ground surface through the cutouts **286a-286d**. The forefoot segment **210** of the outsole **204** may further include a toe cap **288** configured to extend over and protect the anterior end **18** of the upper **100**.

[0081] The outsole segments **210, 212, 214** are formed of resilient materials configured to impart properties of abrasion resistance and traction to the sole structure **200**. One or more of the outsole segments **210, 212, 214** may be formed of a first material having a higher durometer than the others of the outsole segments **210, 212, 214**. For example, the bladder segments **214** may be formed of a rubber material having a first durometer, while the forefoot segment **210** and the heel segment **212** is formed of a foam material having a second durometer, less than the first durometer. In some examples, the bladder segments **214** may be integrally formed or overmolded with the cushions **232** of the bladder **206**, such that the bladder segments **214** are part of the cushions **232** and the cushions **232** are exposed through the bottom surface **262** of the cushioning member **208**.

[0082] The following Clauses provide an exemplary configuration for an article of footwear described above.

[0083] Clause 1: A bladder comprising a first fluid-filled segment including a first terminal end and a second terminal end disposed on opposite ends of the first fluid-filled segment along a first longitudinal axis of the first fluid-filled segment, and a second fluid-filled segment including a third terminal end and a fourth terminal end disposed on opposite ends of the second fluid-filled segment along a second longitudinal axis of the second fluid-filled segment, the second fluid-filled segment being (i) spaced apart from the first fluid-filled segment in a first direction transverse to the first longitudinal axis and the second longitudinal axis and (ii) convergent with the first fluid-filled segment.

[0084] Clause 2: The bladder of Clause 1, further comprising a third fluid-filled segment extending between the first fluid-filled segment and the second fluid-filled segment.

[0085] Clause 3: The bladder of Clause 2, wherein the third fluid-filled segment fluidly couples the first fluid-filled segment and the second fluid-filled segment.

[0086] Clause 4: The bladder of Clause 2, wherein the third fluid-filled segment is disposed transverse to the first longitudinal axis and the second longitudinal axis.

[0087] Clause 5: The bladder of Clause 2, further comprising a fourth fluid-filled segment and a fifth fluid-filled segment disposed on opposite sides of the third fluid-filled segment in a direction extending along the first longitudinal axis and the second longitudinal axis.

[0088] Clause 6: The bladder of Clause 5, wherein the fourth fluid-filled segment and the fifth fluid-filled segment fluidly couple the first fluid-filled segment and the second fluid-filled segment.

[0089] Clause 7: The bladder of Clause 5, further comprising a web area extending between the third fluid-filled segment and the fourth fluid-filled segment and between the third fluid-filled segment and the fifth fluid-filled segment.

[0090] Clause 8: The bladder of Clause 7, wherein the web area is recessed from a plane extending tangent to

a first outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a first side of the bladder.

[0091] Clause 9: The bladder of Clause 8, wherein the web area is recessed from a plane extending tangent to a second outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a second side of the bladder, the second side of the bladder being formed on an opposite side of the bladder than the first side.

[0092] Clause 10: The bladder of Clause 1, wherein the bladder is formed from a first barrier sheet and a second barrier sheet.

[0093] Clause 11: The bladder of Clause 10, wherein the first barrier sheet and the second barrier sheet are formed from the same material.

[0094] Clause 12: The bladder of Clause 10, wherein the first barrier sheet and the second barrier sheet are formed from different materials.

[0095] Clause 13: The bladder of Clause 10, wherein one of the first barrier sheet and the second barrier sheet is substantially transparent and the other of the first barrier sheet and the second barrier sheet is opaque.

[0096] Clause 14: The bladder of Clause 1, wherein the first fluid-filled segment tapers in a direction along the first longitudinal axis and the second fluid-filled segment tapers in a direction along the second longitudinal axis.

[0097] Clause 15: A sole structure incorporating the bladder of Clause 1.

[0098] Clause 16: The sole structure of Clause 15, wherein the first fluid-filled segment and the second fluid-filled segment converge in a direction from a heel region to a forefoot region of the sole structure.

[0099] Clause 17: An article of footwear incorporating the bladder of Clause 1.

[0100] Clause 18: The article of footwear of Clause 17, wherein the first fluid-filled segment and the second fluid-filled segment converge in a direction from a heel region to a forefoot region of the article of footwear.

[0101] Clause 19: The article of footwear of Clause 17, wherein the first fluid-filled segment and the second fluid-filled segment are exposed at a ground-contacting surface of the article of footwear.

[0102] Clause 20: The article of footwear of Clause 19, wherein the first fluid-filled segment is exposed at one of a medial side and a lateral side of a sole structure of the article of footwear and the second fluid-filled segment is exposed at the other of the medial side and the lateral side of the sole structure of the article of footwear.

[0103] Clause 21: An article of footwear comprising a bladder comprising a first fluid-filled segment including a first terminal end and a second terminal end disposed on opposite ends of the first fluid-filled segment along a first longitudinal axis of the first fluid-filled segment, the first longitudinal axis extending in a first direction from a heel region of the article of footwear to a forefoot region of the article of footwear, a second fluid-filled segment spaced apart from the first fluid-filled segment in a second direction transverse to the first direction and including a third terminal end and a fourth terminal end disposed on opposite ends of the second fluid-filled segment along a second longitudinal

axis of the second fluid-filled segment, and a third fluid-filled segment extending in the second direction between the first fluid-filled segment and the second fluid-filled segment.

[0104] Clause 22: The article of footwear of Clause 21, wherein the first fluid-filled segment and the second fluid-filled segment are convergent.

[0105] Clause 23: The article of footwear of Clause 22, wherein the first fluid-filled segment and the second fluid-filled segment converge in a direction from the heel region to the forefoot region.

[0106] Clause 24: The article of footwear of Clause 21, wherein the third fluid-filled segment fluidly couples the first fluid-filled segment and the second fluid-filled segment.

[0107] Clause 25: The article of footwear of Clause 22, further comprising a fourth fluid-filled segment and a fifth fluid-filled segment disposed on opposite sides of the third fluid-filled segment in the first direction.

[0108] Clause 26: The article of footwear of Clause 25, wherein the fourth fluid-filled segment and the fifth fluid-filled segment fluidly couple the first fluid-filled segment and the second fluid-filled segment.

[0109] Clause 27: The article of footwear of Clause 25, further comprising a web area extending between the third fluid-filled segment and the fourth fluid-filled segment and between the third fluid-filled segment and the fifth fluid-filled segment.

[0110] Clause 28: The article of footwear of Clause 27, wherein the web area is recessed from a plane extending tangent to a first outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a first side of the bladder.

[0111] Clause 29: The article of footwear of Clause 28, wherein the web area is recessed from a plane extending tangent to a second outer surface of the third fluid-filled segment, the fourth fluid-filled segment, and the fifth fluid-filled segment on a second side of the bladder, the second side of the bladder being formed on an opposite side of the bladder than the first side.

[0112] Clause 30: The article of footwear of Clause 21, wherein the bladder is formed from a first barrier sheet and a second barrier sheet.

[0113] Clause 31: The article of footwear of Clause 30, wherein the first barrier sheet and the second barrier sheet are formed from the same material.

[0114] Clause 32: The article of footwear of Clause 30, wherein the first barrier sheet and the second barrier sheet are formed from different materials.

[0115] Clause 33: The article of footwear of Clause 30, wherein one of the first barrier sheet and the second barrier sheet is substantially transparent and the other of the first barrier sheet and the second barrier sheet is opaque.

[0116] Clause 34: The article of footwear of Clause 33, wherein the other of the first barrier sheet and the second barrier sheet forms a ground-contacting surface of the article of footwear.

[0117] Clause 35: The article of footwear of Clause 21, wherein the first fluid-filled segment tapers in a direction along the first longitudinal axis and the second fluid-filled segment tapers in a direction along the second longitudinal axis.

[0118] Clause 36: The article of footwear of Clause 21, wherein the first fluid-filled segment and the second fluid-filled segment are exposed at a ground-contacting surface of the article of footwear.

[0119] Clause 37: The article of footwear of Clause 21, wherein the first fluid-filled segment is exposed at one of a medial side and a lateral side of a sole structure of the article of footwear and the second fluid-filled segment is exposed at the other of the medial side and the lateral side of the sole structure of the article of footwear.

[0120] The foregoing description has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the disclosure. Individual elements or features of a particular configuration are generally not limited to that particular configuration, but, where applicable, are interchangeable and can be used in a selected configuration, even if not specifically shown or described. The same may also be varied in many ways. Such variations are not to be regarded as a departure from the disclosure, and all such modifications are intended to be included within the scope of the disclosure.

What is claimed is:

1. A sole structure for an article of footwear, the sole structure comprising:

a fluid-filled bladder including a first segment extending along a medial side of the sole structure, a second segment extending along a lateral side of the sole structure, and a first conduit extending between and fluidly coupling the first segment and the second segment; and

a cushioning member including a pocket having a first recess extending along the medial side of the sole structure and receiving the first segment of the fluid-filled bladder, a second recess extending along the lateral side of the sole structure and receiving the second segment of the fluid-filled bladder, and a first channel extending between the first recess and the second recess and receiving the first conduit of the fluid-filled bladder.

2. The sole structure of claim 1, wherein the cushioning member comprises a polymer foam material.

3. The sole structure of claim 1, wherein the fluid-filled bladder includes a second conduit extending between and fluidly coupling the first segment and the second segment.

4. The sole structure of claim 3, wherein the second conduit is spaced apart from the first conduit along a length of the sole structure.

5. The sole structure of claim 4, wherein the cushioning member includes a second channel extending between the first recess and the second recess and receives the second conduit of the fluid-filled bladder.

6. The sole structure of claim 5, wherein the cushioning member includes a projection extending between the first channel and the second channel.

7. The sole structure of claim 6, wherein the projection includes a distal end in contact with a web area of the fluid-filled bladder, the web area extending between and separating the first segment of the fluid-filled bladder and the second segment of the fluid-filled bladder.

8. The sole structure of claim 1, wherein the first segment of the fluid-filled bladder extends along a first longitudinal axis and the second segment of the fluid-filled bladder

extends along a second longitudinal axis, the first longitudinal axis being convergent with the second longitudinal axis.

9. The sole structure of claim 1, wherein the first recess extends along a first longitudinal axis and the second recess extends along a second longitudinal axis, the first longitudinal axis being convergent with the second longitudinal axis.

10. The sole structure of claim 1, wherein the first segment of the fluid-filled bladder and the second segment of the fluid-filled bladder converge in a direction from a heel region of the sole structure to a forefoot region of the sole structure.

11. A sole structure for an article of footwear, the sole structure comprising:

a fluid-filled bladder including a first segment extending along a medial side of the sole structure and a second segment extending along a lateral side of the sole structure, the first segment being convergent with the second segment; and

a cushioning member including a pocket having a first recess extending along the medial side of the sole structure and receiving the first segment of the fluid-filled bladder and a second recess extending along the lateral side of the sole structure and receiving the second segment of the fluid-filled bladder, the first recess being convergent with the second recess.

12. The sole structure of claim 11, wherein the cushioning member comprises a polymer foam material.

13. The sole structure of claim 11, wherein the fluid-filled bladder includes a first conduit extending between and fluidly coupling the first segment and the second segment

and a second conduit extending between and fluidly coupling the first segment and the second segment.

14. The sole structure of claim 13, wherein the second conduit is spaced apart from the first conduit along a length of the sole structure.

15. The sole structure of claim 13, wherein the first conduit and the second conduit are substantially parallel to one another.

16. The sole structure of claim 13, wherein the cushioning member includes a projection extending between the first conduit and the second conduit.

17. The sole structure of claim 16, wherein the projection includes a distal end in contact with a web area of the fluid-filled bladder, the web area extending between and separating the first segment of the fluid-filled bladder and the second segment of the fluid-filled bladder.

18. The sole structure of claim 11, further comprising a first outsole attached to the first segment of the fluid-filled bladder on an opposite side of the first segment than the first recess, the first outsole defining a first ground-contacting surface of the sole structure.

19. The sole structure of claim 18, further comprising a second outsole attached to the second segment of the fluid-filled bladder on an opposite side of the second segment than the second recess, the second outsole defining a second ground-contacting surface of the sole structure.

20. An article of footwear incorporating the sole structure of claim 11.

* * * * *