



US 20250254407A1

(19) **United States**

(12) **Patent Application Publication**
Woodman et al.

(10) **Pub. No.: US 2025/0254407 A1**

(43) **Pub. Date: Aug. 7, 2025**

(54) **REMOTE IMAGE CAPTURE AND
MOUNTING ECOSYSTEM**

Publication Classification

(71) Applicant: **GoPro, Inc.**, San Mateo, CA (US)

(72) Inventors: **Nicholas D. Woodman**, Big Sky, MT
(US); **Daniel J. Coster**, Oakura (NZ);
Joshua T. Druker, Redwood City, CA
(US)

(21) Appl. No.: **19/183,143**

(22) Filed: **Apr. 18, 2025**

(51) **Int. Cl.**

H04N 23/50 (2023.01)

G03B 17/56 (2021.01)

H04N 23/51 (2023.01)

H04N 23/661 (2023.01)

(52) **U.S. Cl.**

CPC **H04N 23/50** (2023.01); **G03B 17/561**

(2013.01); **H04N 23/51** (2023.01); **H04N**

23/661 (2023.01); **G03B 2206/00** (2013.01);

H04N 2201/0056 (2013.01); **H04N 2201/0058**

(2013.01)

Related U.S. Application Data

(63) Continuation of application No. 17/480,810, filed on Sep. 21, 2021, now Pat. No. 12,309,469, which is a continuation of application No. 16/462,738, filed on May 21, 2019, now Pat. No. 11,134,181, filed as application No. PCT/US2018/012183 on Jan. 3, 2018.

(60) Provisional application No. 62/557,332, filed on Sep. 12, 2017, provisional application No. 62/441,799, filed on Jan. 3, 2017.

(57)

ABSTRACT

This disclosure describes a system including an imaging device. The imaging device includes an imaging unit with a lens that focuses light onto an image sensor that produces image data, wherein the image data is only stored by the imaging device for transfer to and processing by an external device. The imaging device includes a control interface that provides commands to the imaging unit. The system also includes a mount with a wall that releasably secures the imaging device and provides access to the control interface and a securing structure that secures the mount to a variety of locations.

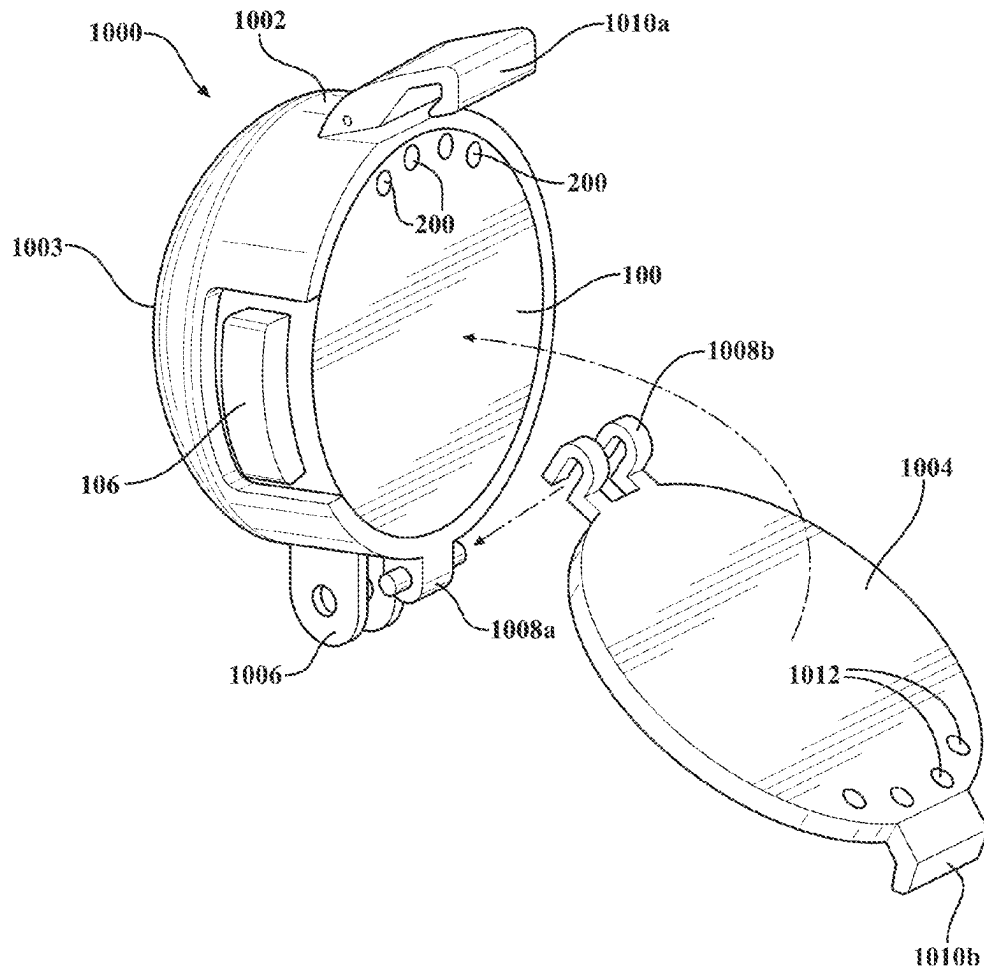


FIG. 1

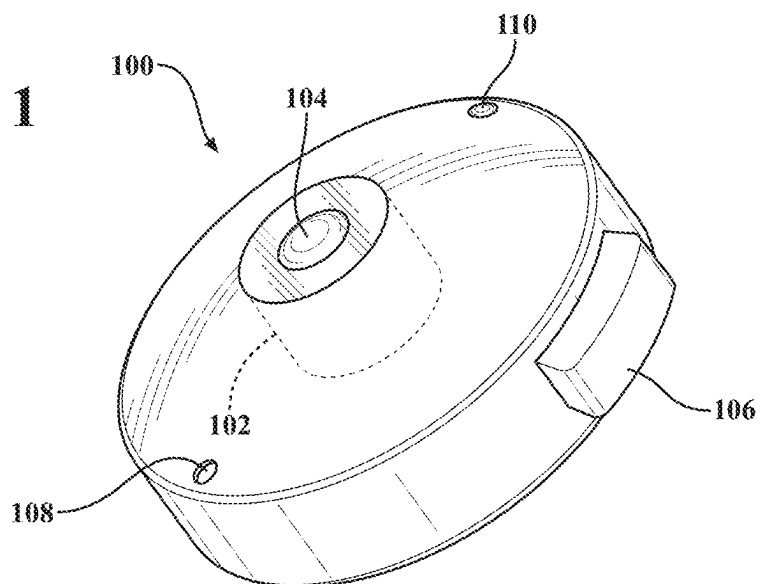


FIG. 2

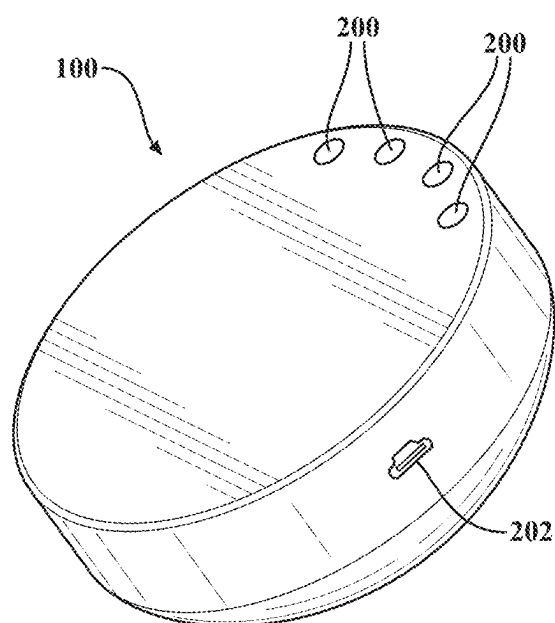


FIG. 3

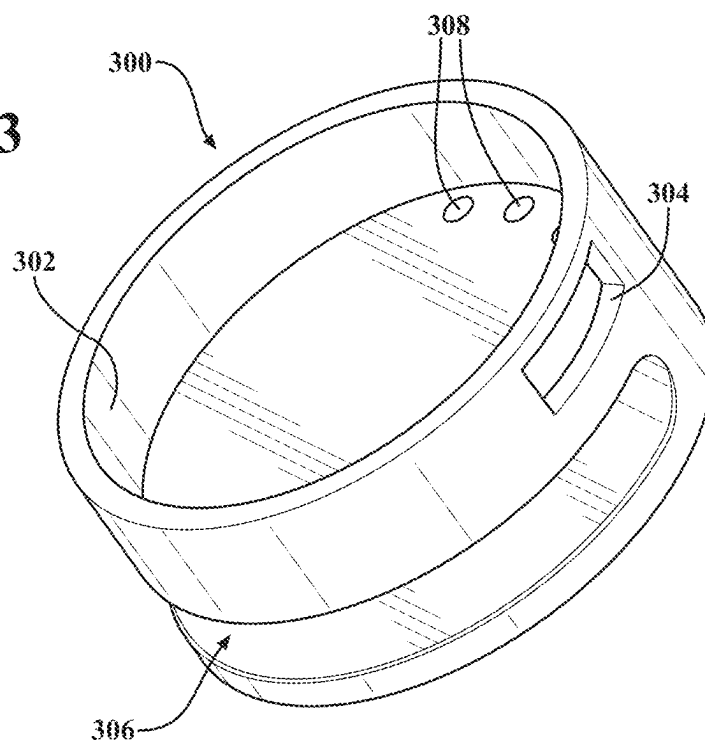


FIG. 4

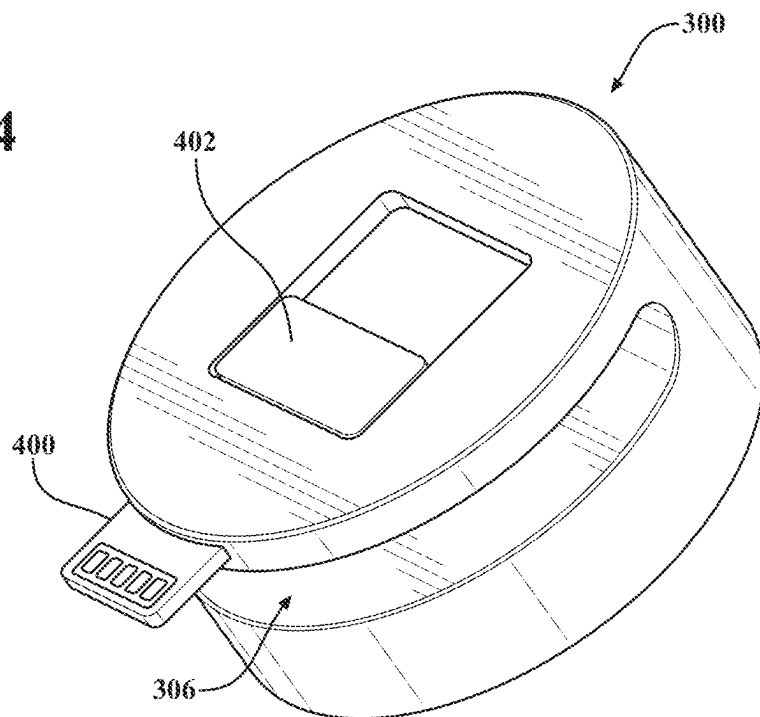


FIG. 5

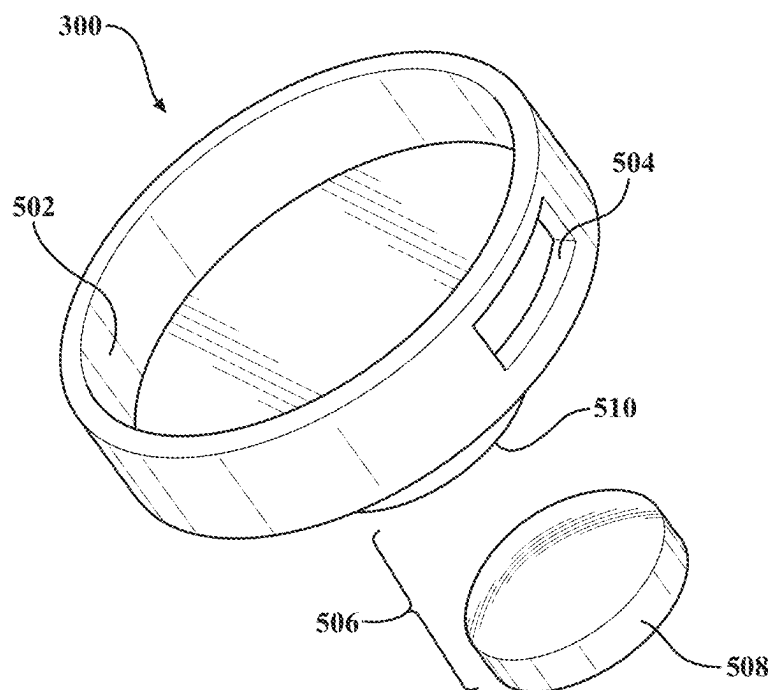


FIG. 6

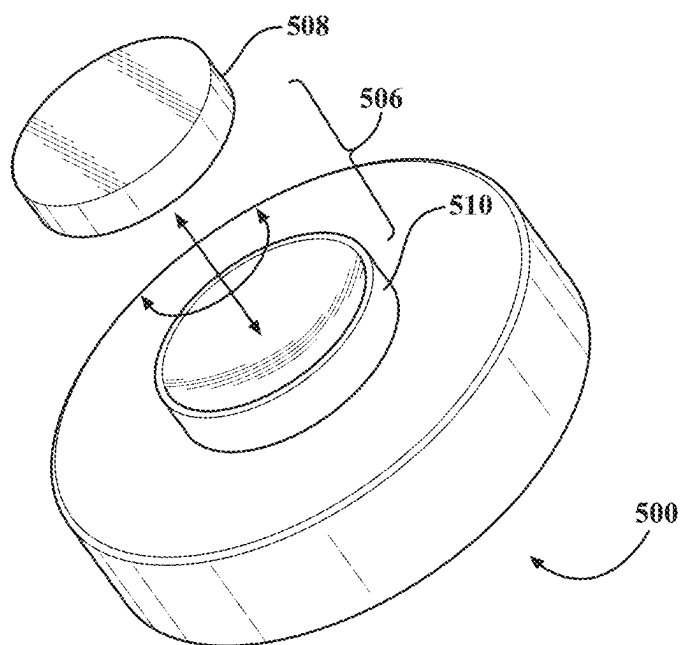


FIG. 7

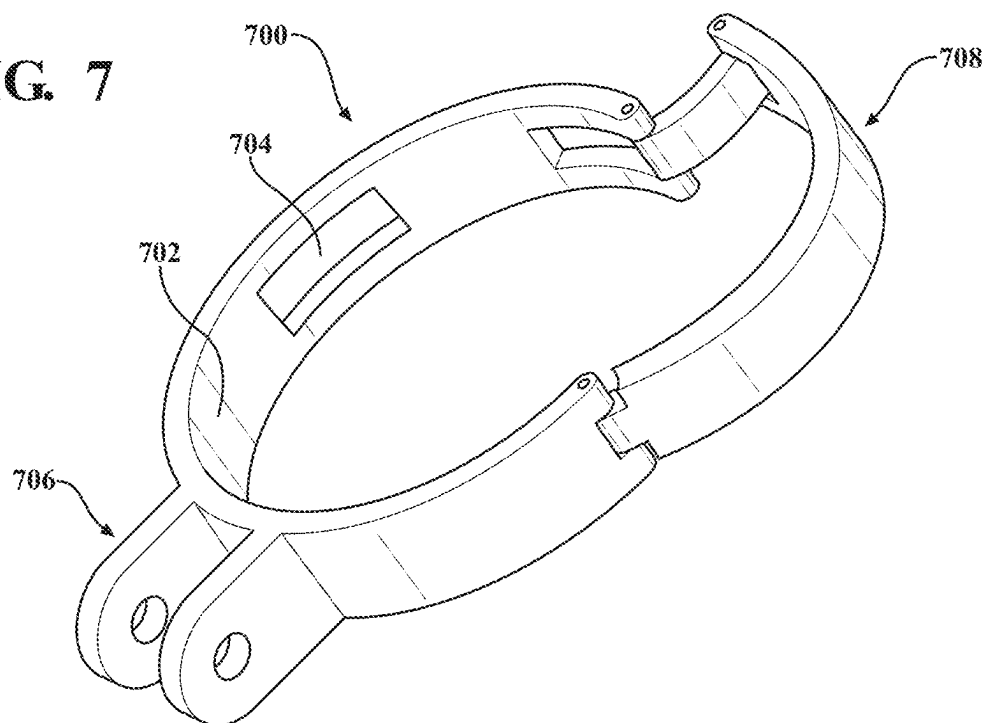
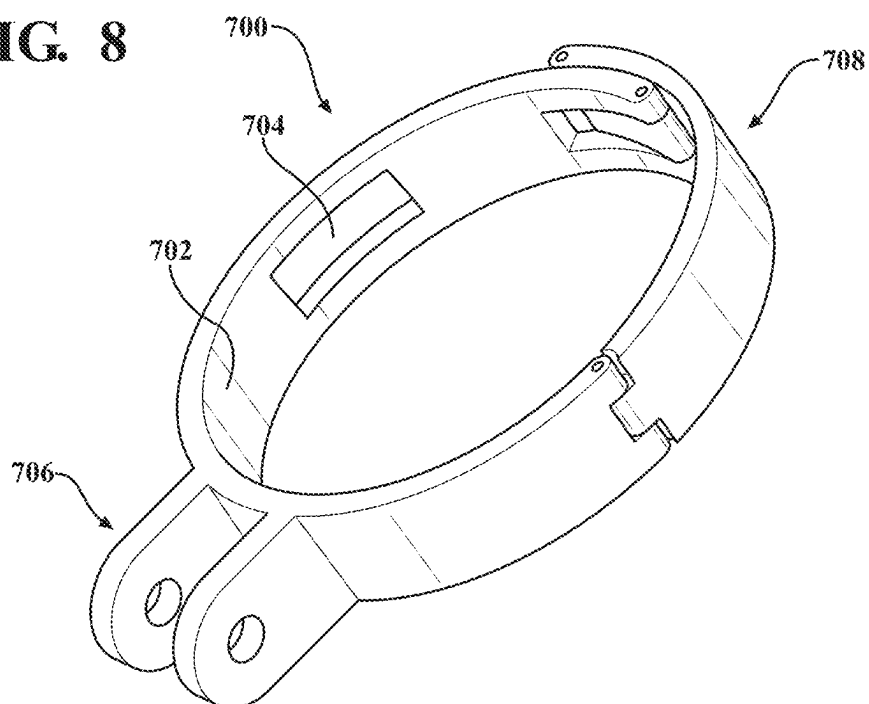


FIG. 8



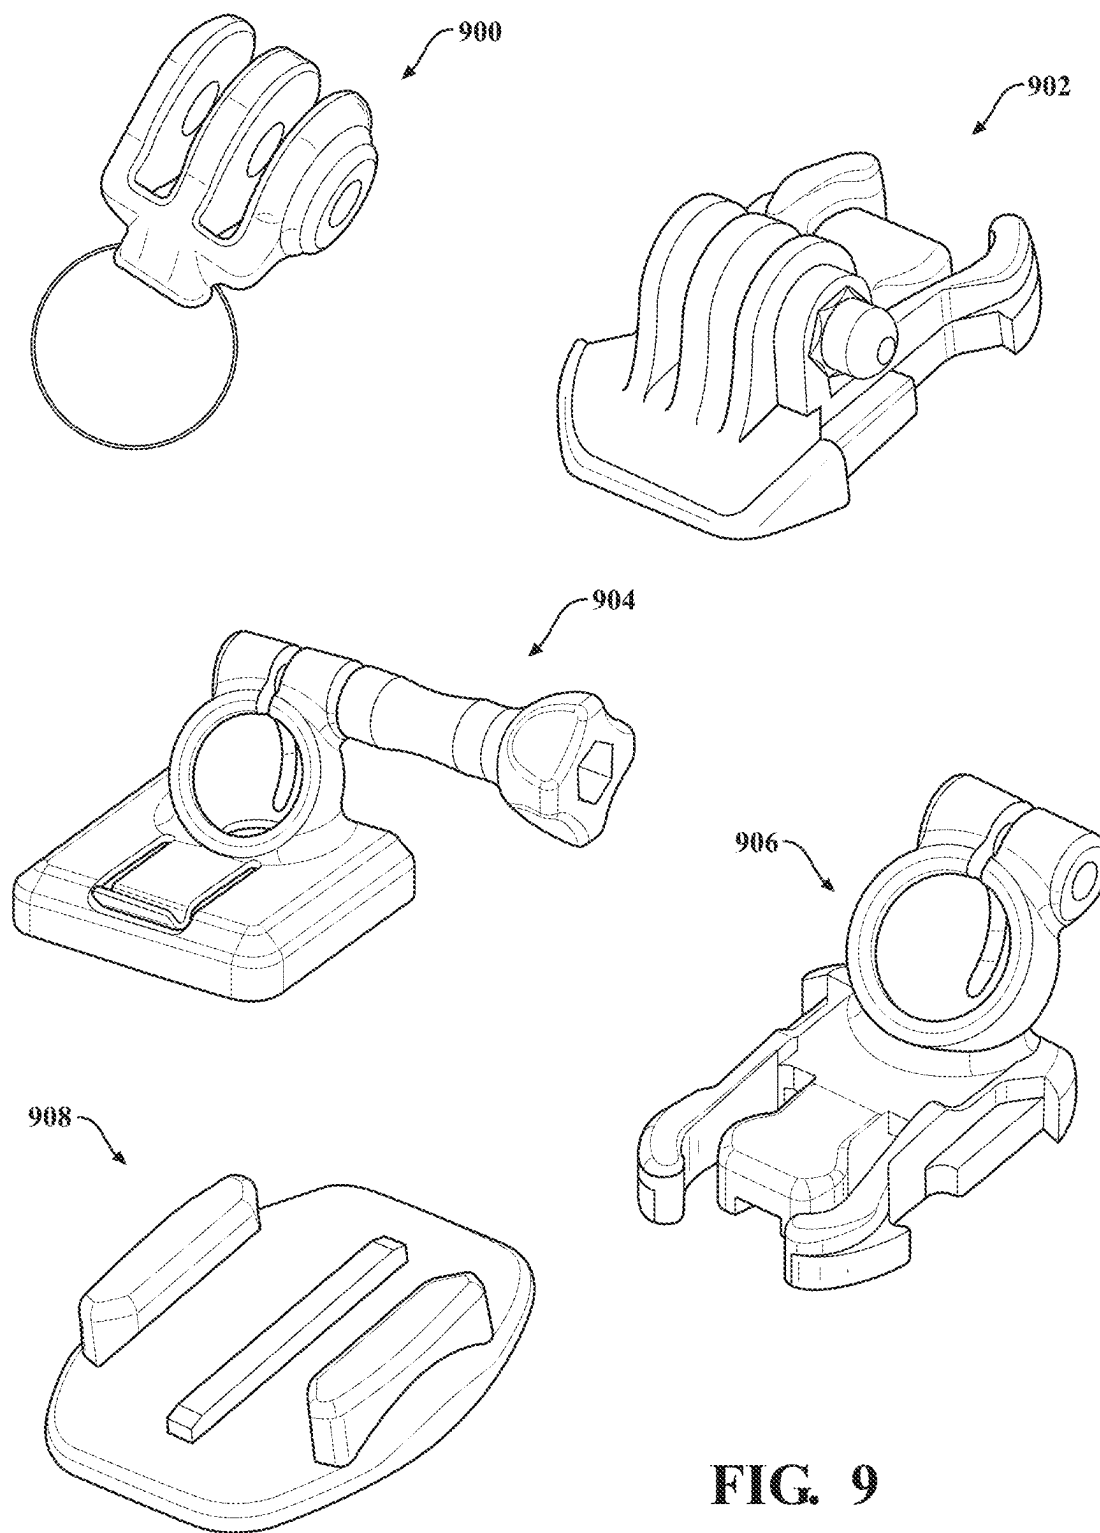


FIG. 9

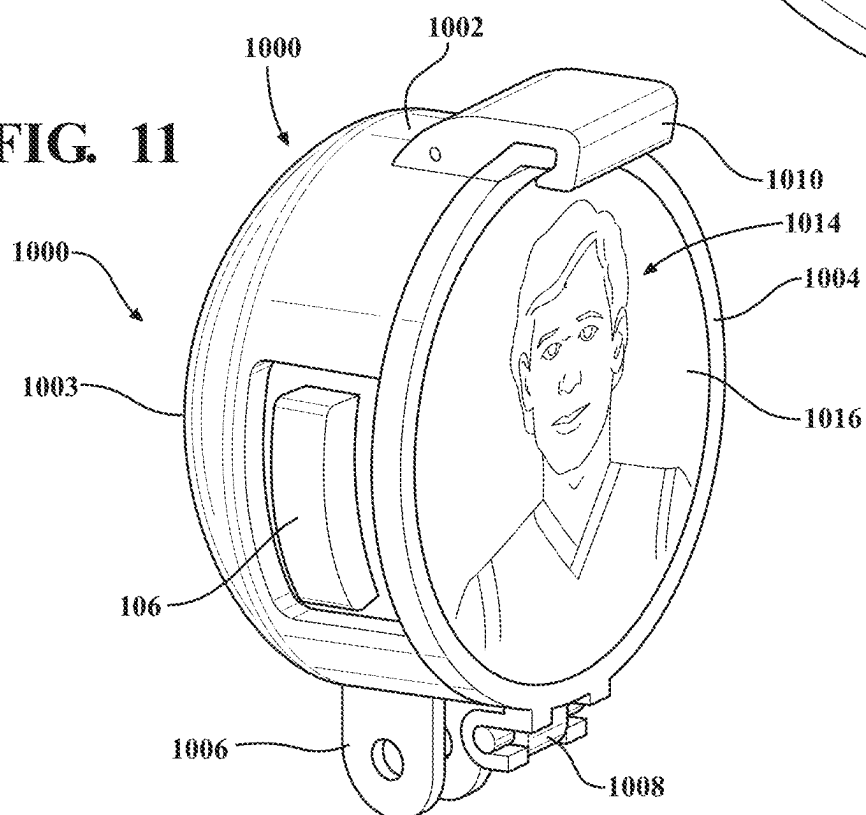


FIG. 12

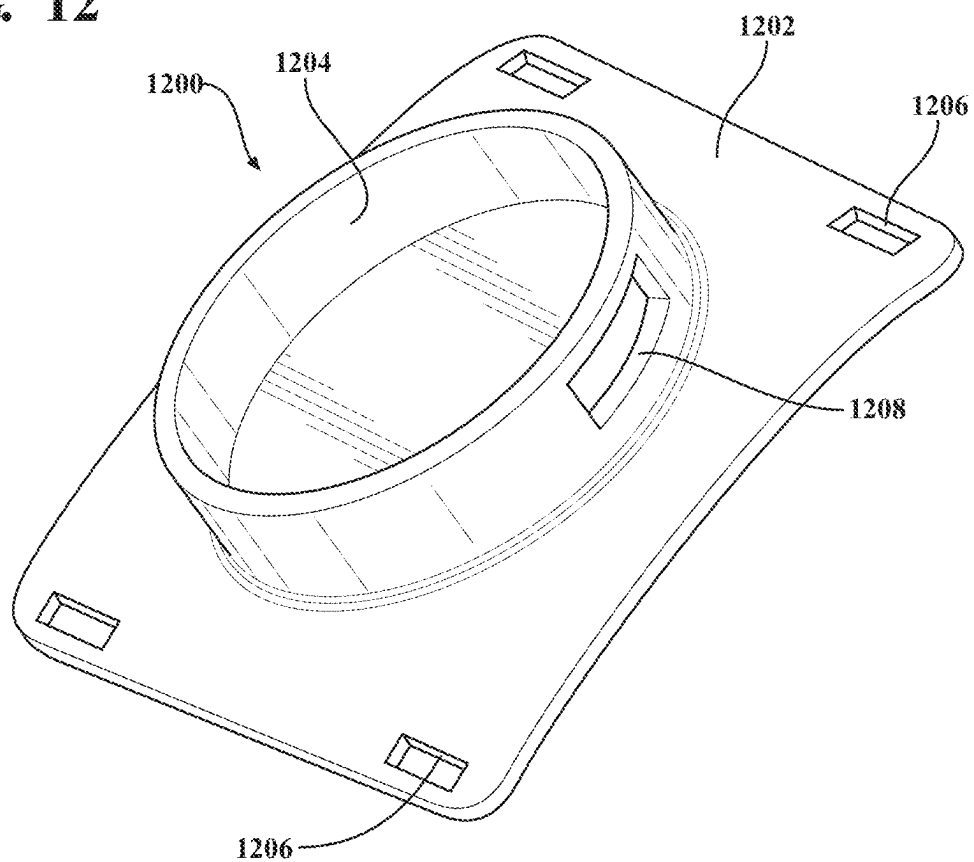


FIG. 13

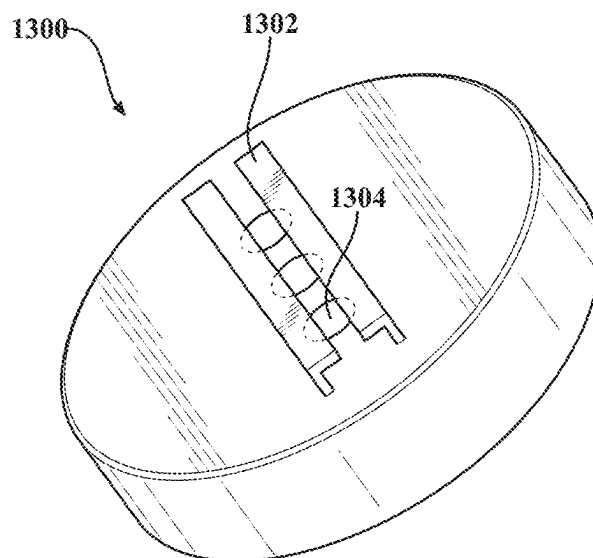


FIG. 14

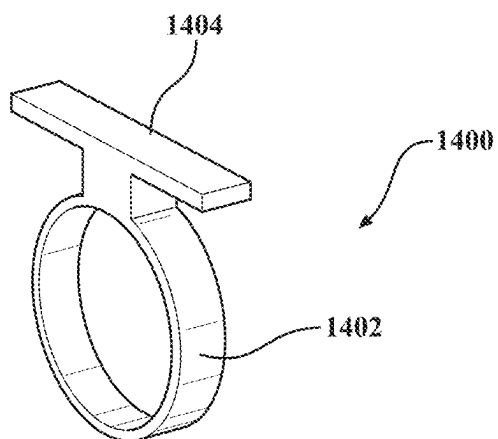


FIG. 15

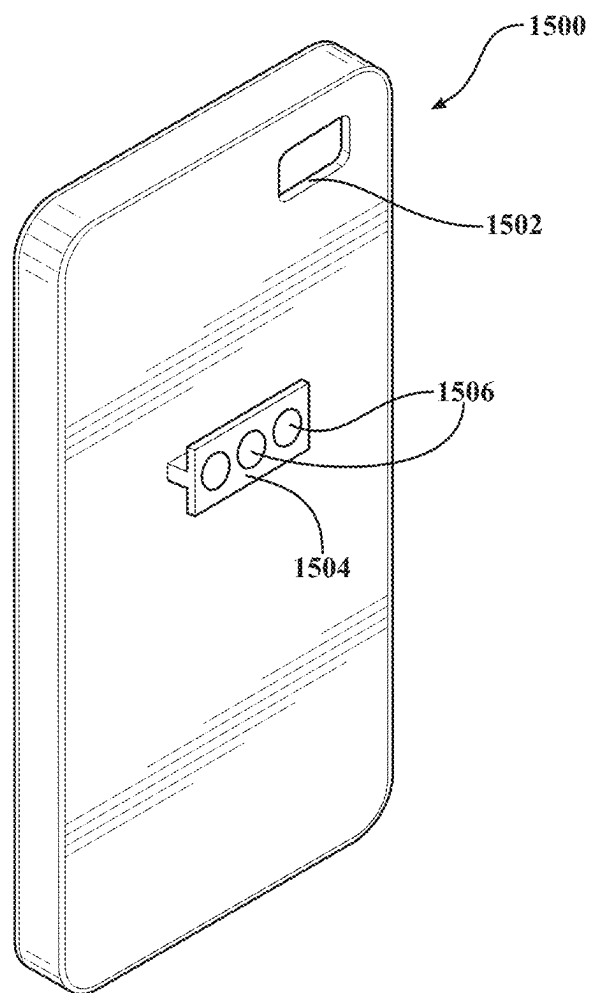


FIG. 17

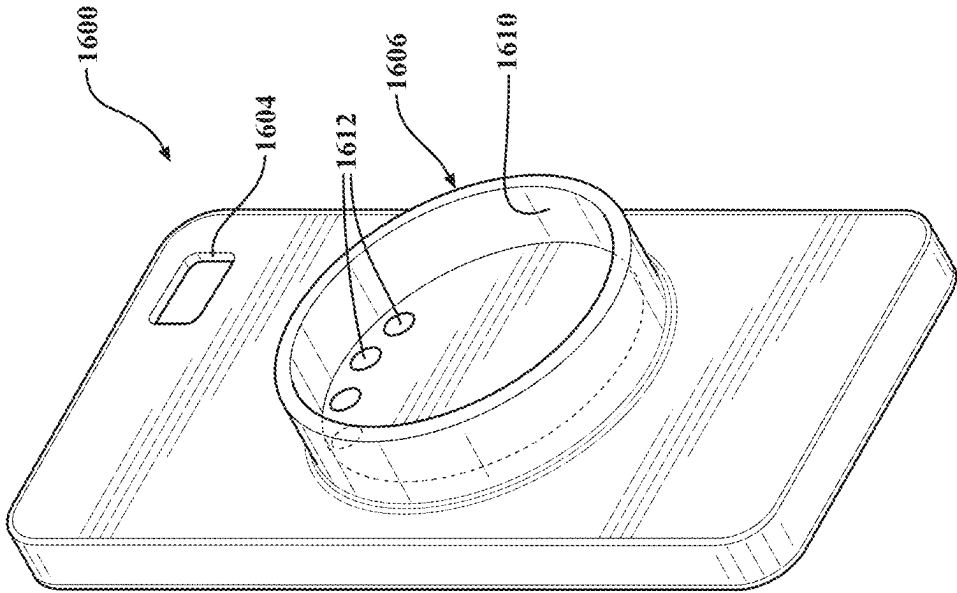


FIG. 16

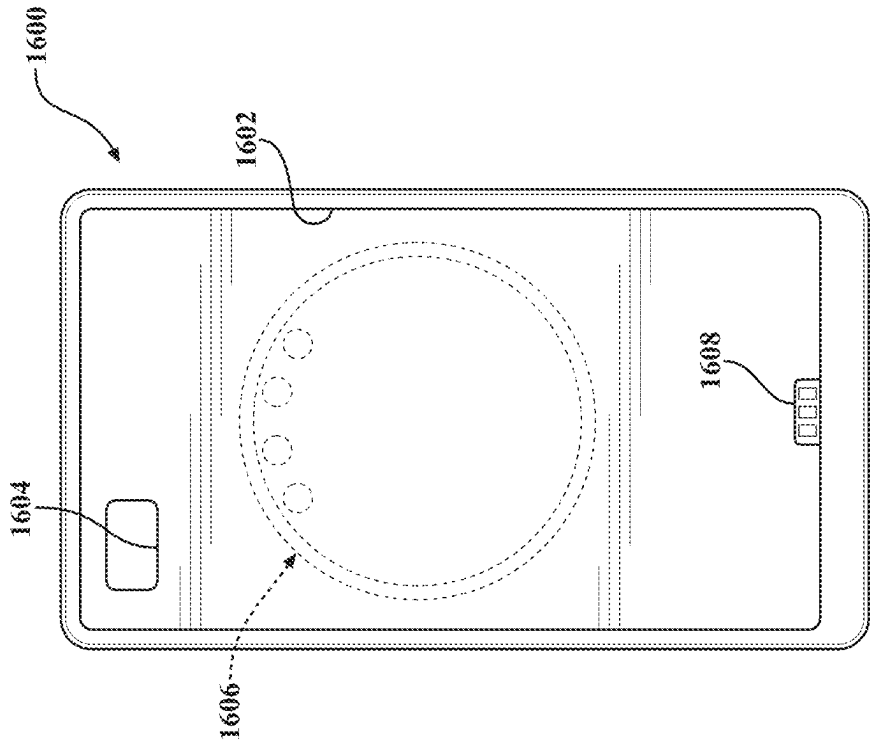


FIG. 18

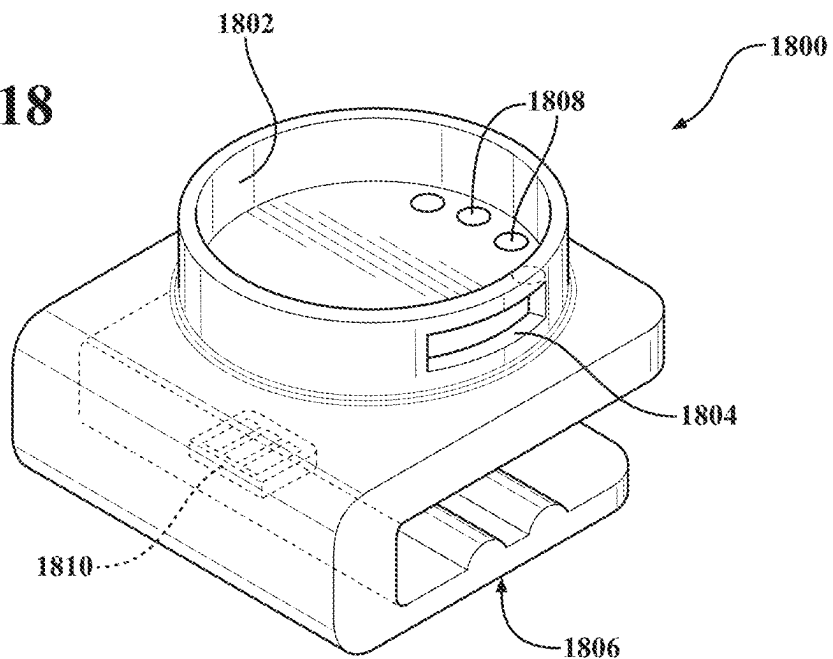


FIG. 19

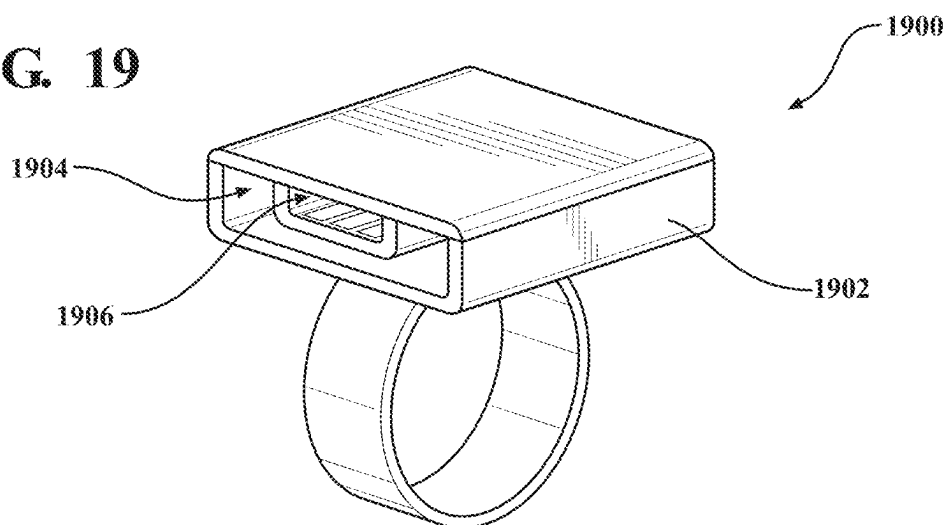


FIG. 20


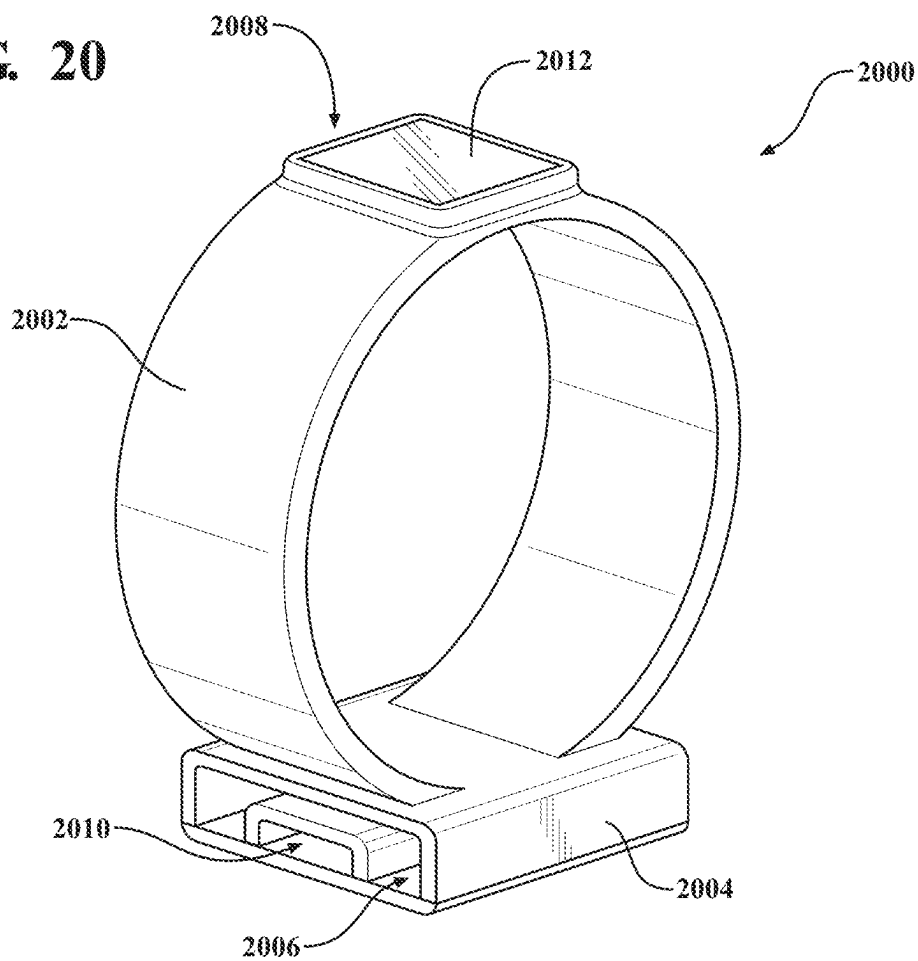


FIG. 21

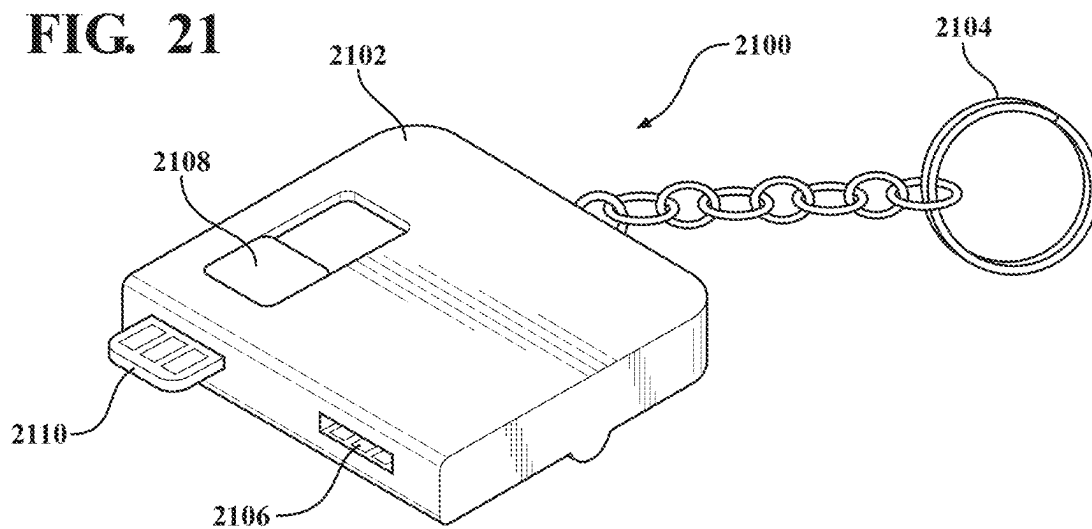

12/13

FIG. 22




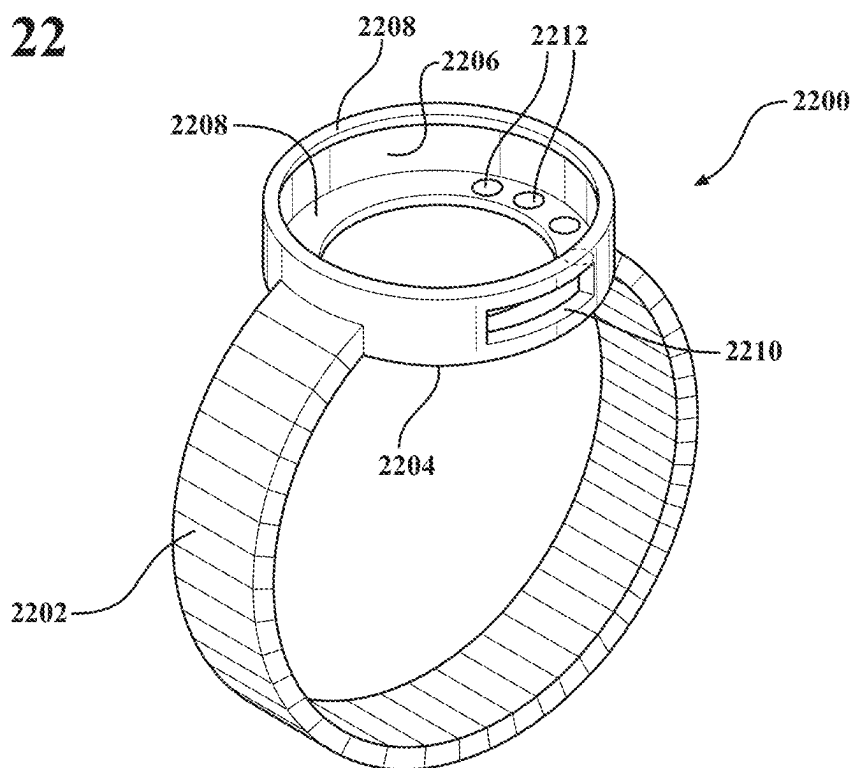


FIG. 23

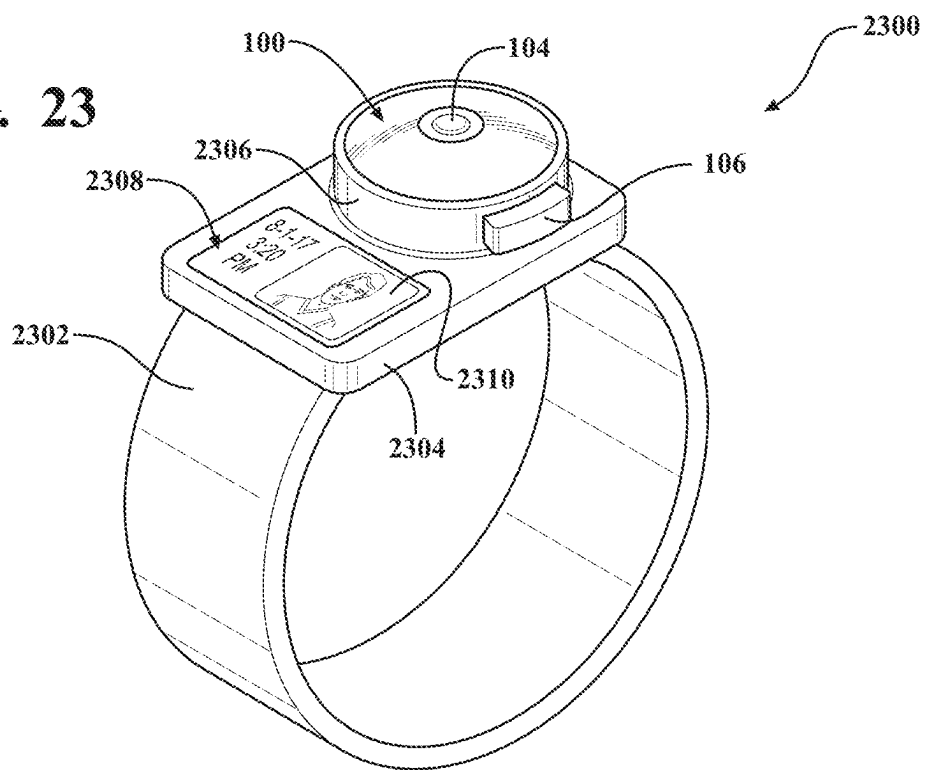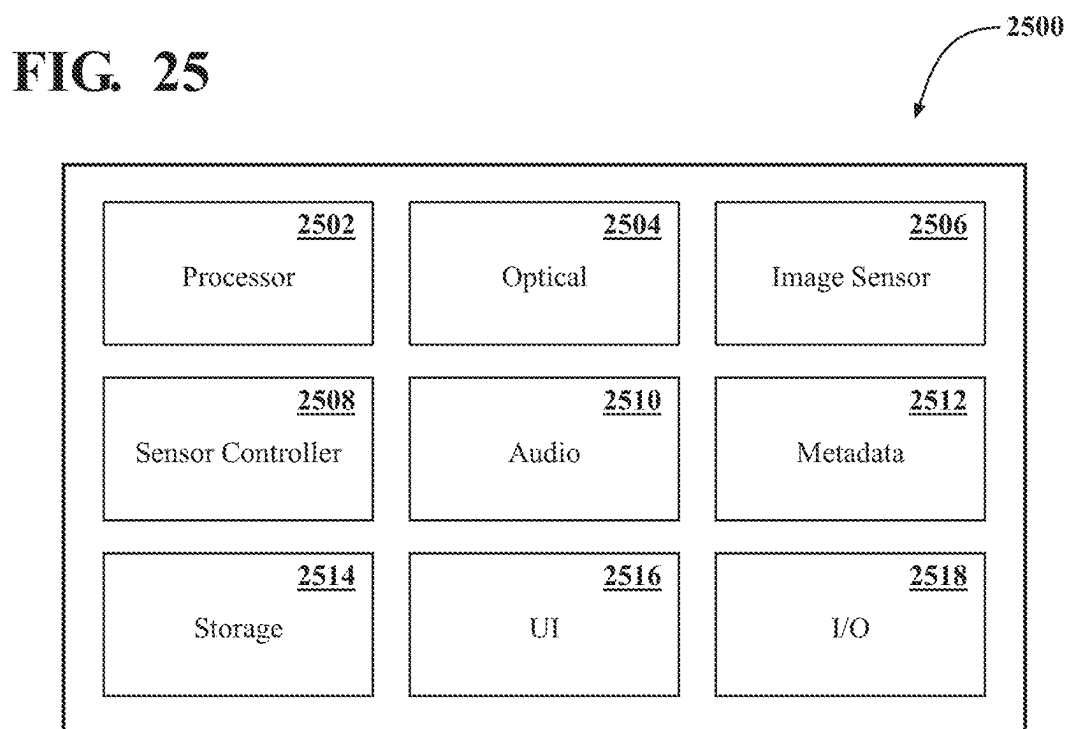

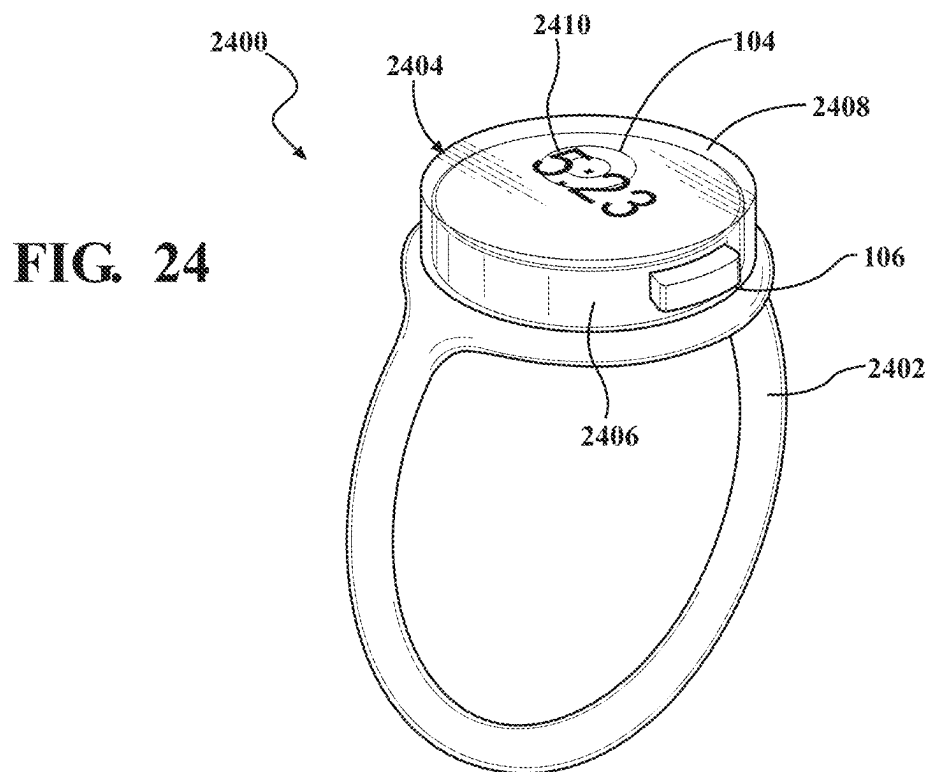

REMOTE IMAGE CAPTURE AND MOUNTING ECOSYSTEM

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] This application is a continuation of U.S. patent application Ser. No. 17/480,810, filed Sep. 21, 2021, which is a continuation of U.S. patent application Ser. No. 16/462,738, filed May 21, 2019, now U.S. Pat. No. 11,134,181, which is a U.S. National Stage (371) Application of International Application Patent Serial No. PCT/US2018/012183, filed Jan. 3, 2018, which claims priority to U.S. Provisional Application Patent Ser. No. 62/557,332, filed Sep. 12, 2017, and U.S. Provisional Application Patent Ser. No. 62/441,799, filed Jan. 3, 2017, the entire disclosures of which are hereby incorporated by reference.

COPYRIGHT

[0002] A portion of the disclosure of this patent document contains material that is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyright rights whatsoever.

TECHNICAL FIELD

[0003] The present disclosure relates generally to digital image and/or video capture, and more particularly to mounting and capturing images and/or video with a remote imaging device.

BACKGROUND

[0004] Imaging devices capture images and videos using one or more lenses that gather light to be focused onto an image sensor. Ease of use and convenience of mounting or carrying imaging devices is important to users that record both day-to-day and high-intensity activities. Smaller devices with simpler interfaces may attract a wider number of users. However, providing extensive processing, storage, and/or capability to smaller imaging devices may be difficult with tight packaging constraints and limited interface options. An imaging device that is easy to mount in a variety of ways, that is small and unobtrusive, that includes an easy-to-use interface, and that provides for remote control and processing capabilities can beneficially improve a user's experience with the imaging device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 shows a top perspective view of a remote imaging device.
 [0006] FIG. 2 shows a bottom perspective view of the remote imaging device of FIG. 1.
 [0007] FIG. 3 shows a top perspective view of a mount for use with the remote imaging device of FIGS. 1 and 2.
 [0008] FIG. 4 shows a bottom perspective view of the mount of FIG. 3.
 [0009] FIG. 5 shows a top perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2.
 [0010] FIG. 6 shows a bottom perspective view of the mount of FIG. 5.

[0011] FIG. 7 shows a perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2 in an open position.

[0012] FIG. 8 shows a perspective view of the mount of FIG. 7 in a closed position.

[0013] FIG. 9 shows a mounting ecosystem for use with the mount of FIGS. 7 and 8.

[0014] FIG. 10 shows a perspective view of a housing with an expansion module for use with the remote imaging device of FIGS. 1 and 2 in an open position.

[0015] FIG. 11 shows a perspective view of the housing with the expansion module of FIG. 10 in a closed position.

[0016] FIG. 12 shows a perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2.

[0017] FIG. 13 shows a rear perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2.

[0018] FIG. 14 shows a perspective view of a mount for use with the mount of FIG. 13.

[0019] FIG. 15 shows a rear view of a case for use with the mount of FIG. 13.

[0020] FIG. 16 shows a front view of another case for use with the remote imaging device of FIGS. 1 and 2.

[0021] FIG. 17 shows a rear perspective view of the case of FIG. 16.

[0022] FIG. 18 shows a perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2.

[0023] FIG. 19 shows a perspective view of a supporting device for use with the mount of FIG. 18.

[0024] FIG. 20 shows a perspective view of another supporting device for use with the mount of FIG. 18.

[0025] FIG. 21 shows a perspective view of another supporting device for use with the mount of FIG. 18.

[0026] FIG. 22 shows a perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2.

[0027] FIG. 23 shows a perspective view of another mount for use with the remote imaging device of FIGS. 1 and 2.

[0028] FIG. 24 shows a perspective view of another mount for use with the remote imaging device 100 of FIGS. 1 and 2.

[0029] FIG. 25 is a functional block diagram illustrating electronic components used for operation of and interface with a remote imaging device.

[0030] All Figures disclosed herein are © Copyright 2017 GoPro Inc. All rights reserved.

DETAILED DESCRIPTION

[0031] Implementations of the present technology will now be described in detail with reference to the drawings, which are provided as illustrative examples so as to enable those skilled in the art to practice the technology. Notably, the figures and examples below are not meant to limit the scope of the present disclosure to a single implementation or embodiment, but other implementations and embodiments are possible by way of interchange of or combination with some or all of the described or illustrated elements. Wherever convenient, the same reference numbers will be used throughout the drawings to refer to same or like parts.

[0032] A remote imaging device, small in size, light in weight, and easily portable, is described for use with a variety of mounting systems that enable seamless capture of high quality images in situations that would otherwise require a more complicated process, for example, of retrieving a smart phone, unlocking the smart phone, launching a

camera application on the smart phone, and capturing an image or recording a video. The remote imaging device may be designed to couple with various separate devices through use of the mounting systems, allowing automatic offload of captured image content as well as image processing.

[0033] FIG. 1 shows a top perspective view of a remote imaging device 100 with a body having a disc-like shape. The remote imaging device 100 may be smaller in size and lighter in weight, having, for example, a height between 15 mm and 25 mm and a diameter between 30 mm and 40 mm such that the remote imaging device 100 is highly portable. The remote imaging device 100 may include an imaging unit 102. The imaging unit 102 may include an optical element such as a lens 104 that captures light for the imaging unit 102. The lens 104 in this example is located on an upper, curved surface of the remote imaging device 100 as shown. The lens 104 may be a standard lens, a macro lens, a zoom lens, a special-purpose lens, a telephoto lens, a prime lens, an achromatic lens, an apochromatic lens, a process lens, a wide-angle lens, an ultra-wide-angle lens, a fisheye lens, an infrared lens, an ultraviolet lens, a perspective control lens, another lens, and/or another optical element.

[0034] The lens 104 of the imaging unit 102 may focus captured light onto one or more image sensors (not shown). The image sensors may include one or more of a charge-coupled device (CCD) sensor, an active pixel sensor (APS), a complementary metal-oxide semiconductor (CMOS) sensor, an N-type metal-oxide-semiconductor (NMOS) sensor, and/or another image sensor. The image sensor may capture light waves gathered by the lens 104 to produce image data based, for example, on control signals from the imaging unit 102. The imaging unit 102 may also include an integrated and/or removable battery (not shown) and a limited, integrated and/or removable electronic storage (not shown) that may store image data produced by the image sensor.

[0035] In some examples, the imaging unit 102 may communicate with a remote device in order to send and/or receive commands, send and/or receive image information, and/or perform imaging operations. For example, the remote imaging device 100 can include wireless (or wired) communication capabilities to interface with a smart phone, tablet, smart watch, etc. in order to use camera applications, social media applications, gaming applications, messaging applications, fitness or monitoring applications, settings applications, etc. The imaging unit 102 may include the ability to both capture and transfer still images and short video clips for use with the above applications. Transfer may occur wirelessly, for example, using WiFi or BTLE.

[0036] The remote imaging device 100 may include a control interface 106, such as a button. The control interface 106 in the example of FIG. 1 is disposed on a side surface of the body of the remote imaging device 100, though other locations for the control interface 106, such as the top surface of the remote imaging device 100, are also possible. The control interface 106 may be used to provide commands to the imaging unit 102, such as to capture an image, start and/or stop capturing video, start and/or stop charging, start and/or stop data transfer, or other commands, for example, taking the form of various combinations of presses or taps against the control interface 106. Though the control interface 106 is shown here as a button, other interfaces such as audio interfaces, sliders, touch pads, capacitive sensors, heat sensors, and/or other interfaces may be used to receive commands from a user for the imaging unit 102.

[0037] The remote imaging device 100 may include one or more sensors 108, for example, disposed on an upper surface of the remote imaging device 100 or in communication with the imaging unit 102 and/or the control interface 106. The sensors 108 may be configured to capture audio information (e.g., using a microphone to capture voice commands), biometric information (e.g., using a proximity sensor, a heart rate sensor, a heat detection sensor, and/or a sensor that determines gaze direction), or any other information useful for the imaging unit 102 to configure operation of the remote imaging device 100. For example, the sensors 108 may include an accelerometer and/or gyroscope configured to determine user interaction with the remote imaging device 100 representative of intended recording or capture by the remote imaging device 100 (e.g., placing the remote imaging device 100 in one of the below described mounts or cases). In this example, the imaging unit 102 may be configured to begin image capture such that buffered information is available in memory prior to receipt of an indication to record through the control interface 106. In some embodiments, the buffer may be saved in response to a record indication received through the control interface 106 and may be overwritten if a record indication is not received within a predetermined time.

[0038] The remote imaging device 100 may include an indicator 110, for example, in the form of a light-emitting device (e.g., LED) or an audio speaker, as shown in this example as disposed on a top surface of the remote imaging device 100. The indicator 110 may be used to provide a mode indication, a power indication, a connection indication, or other information relevant to operation of the remote imaging device 100 to the user and/or to other individuals nearby the user.

[0039] In the case where the indicator 110 is a light-emitting device, different colors or different patterns of light may be emitted in order to represent various modes, power states, or connection statuses. In one example, the indicator 110 may blink in a specific color sequence or pattern to indicate that image capture has occurred or is ongoing. The indicator 110 may be designed to avoid interference with image capture by the imaging unit 102. In the case where the indicator 110 is a speaker, various patterns of beeps or haptic vibratory buzzes may be emitted in order to represent various modes, power states, or connection statuses. For example, the indicator 110 may be configured to emit a quieter series of beeps to indicate stopping and/or starting of image capture.

[0040] FIG. 2 shows a bottom perspective view of the remote imaging device 100 of FIG. 1. The remote imaging device 100 includes an input/output (I/O) module 200 formed of several electronic contact locations suitable to couple an external device (not shown). The external device may be set adjacent to, press fit, and/or otherwise coupled to the I/O module 200 so as to use the external device to provide communication with the imaging unit 102 within the remote imaging device 100. Though the I/O module 200 of FIG. 2 is shown as including electronic contact locations, other types of I/O modules are possible.

[0041] The remote imaging device 100 may include another I/O module 202. The I/O module 202 may include a wired interface (e.g., USB, USB-C, HDMI, and/or other interfaces) configured to communicate to one or more external devices. For example, the I/O module 202 may include a wired power interface to an external energy source (e.g., a

battery, a DC electrical source, and/or other energy sources) that supplies charge to the imaging unit **102**. Though the I/O modules **200**, **200** are shown on bottom and side surfaces of the remote imaging device **100**, other locations (or swapped locations) are also possible.

[0042] The remote imaging device **100** of FIGS. **1** and **2** is small in size, light in weight, and simple in construction, including basic components as described above within the imaging unit **102** that are sufficient to capture and store a predetermined amount of image and video data with limited user interaction, for example, through the control interface **106**. For example, the remote imaging device **100** may be configured to provide a lower resolution broadcast video stream for a predetermined amount of time, for example, in 10 second clips or 30 second clips. The remote imaging device **100** is intended to operate independently for at least a predetermined period of time, for example, 15 to 45 minutes, without requiring an interface to separate components that provide, for example, processing, display, data transfer, and/or charging capabilities.

[0043] Though shown as having a round or cylindrical shape, the remote imaging device **100** may alternatively have a cubic shape, spherical shape, pyramidal shape, and/or any other shape suitable both for easy portability and for image capture by the imaging unit **102**. The remote imaging device **100** may be water resistant and/or waterproof to a specified depth (e.g., between 1 m to 5 m) such that the remote imaging device **100** may be used to capture images and video in wet or moist environments. The imaging unit **102** may also be configured to automatically adjust image capture based on the presence of water detected, for example, by the image sensor as present on the lens **104**.

[0044] In some embodiments, various functions of the remote imaging device **100** described in respect to FIGS. **1-2** may be physically combined with the various mounts and cases described, for example, in FIGS. **3-8** and FIGS. **12-24**.

[0045] FIG. **3** shows a top perspective view of a housing or mount **300** for use with the remote imaging device **100** of FIGS. **1** and **2**. The mount **300** of FIG. **3** is round in shape with a vertically-extending wall **302** designed to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner to releasably secure the remote imaging device **100** within the mount **300**. The wall **302** may form a cavity that receives the remote imaging device **100**. The mount **300** may have a small form factor (e.g., a diameter between 35 mm and 45 mm and a depth between 25 mm and 50 mm) and may be lightweight as well. The mount **300** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as leather, vinyl, neoprene, etc.

[0046] The wall **302** of the mount **300** may define an opening **304** that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. In another example (not shown), the opening **304** may be covered with a thin and/or pliable material to allow the user to indirectly manipulate the control interface **106** of the remote imaging device **100**. The mount **300** may be configured for use in various environments. For example, the mount **300** may itself be waterproof and/or include a waterproof enclosure (not shown) that protects the remote imaging device **100** from water when used, for example, while surfing or scuba diving.

[0047] The mount **300** may include a securing structure **306** for securing the mount **300** to a variety of locations. In

the example of FIG. **3**, the securing structure **306** has a slot and a clamp- or clip-type mechanism used, for example, to slidably and compressibly secure the mount **300** to items such as backpacks, clothing, window treatments, etc. The securing structure **306** may include opposed magnets, a spring-based hinge, a mechanical clamp, or any other mechanism suitable to slide and then secure opposing sides of the mount **300** to a location desired by the user.

[0048] The mount **300** may include an I/O module **308** formed of several electronic contact locations suitable to couple the remote imaging device **100** of FIGS. **1** and **2**. For example, the electronic contact locations of the I/O module **200** of the remote imaging device **100** may be aligned and press fit against the electronic contact locations of the I/O module **308** in the mount **300** such that the remote imaging device **100** and the mount **300** are electrically coupled when the mount **300** secures the remote imaging device **100**. Though the I/O module **308** of FIG. **3** is shown as including electronic contact locations, other types of I/O modules for use in an interface to the remote imaging device **100** are also possible.

[0049] FIG. **4** shows a bottom perspective view of the mount **300** of FIG. **3**. Another I/O module **400** is disposed on a bottom surface of the securing structure **306**. The I/O module **400** may include a wired and/or wireless communications interface (e.g., WiFi, Bluetooth, USB, HDMI, Wireless USB, and/or other interfaces) configured to allow the coupled remote imaging device **100** of FIGS. **1** and **2** to communicate with one or more external devices (not shown) when secured within the mount **300**. The I/O module **400** may also include a wired and/or wireless power interface to an external energy source (e.g., a battery, a DC electrical source, and/or other energy sources) that supplies a charge to the imaging unit **102** of the remote imaging device **100** when secured within the mount **300**.

[0050] The mount **300** also includes an adjustment mechanism **402** that allows the I/O module **400** to move in and out of the bottom surface of the securing structure **306**. In this example, the adjustment mechanism **402** is a slider mechanism that allows the I/O module **400** to extend and retract from a slot within a lower portion of the securing structure **306**. By retracting the I/O module **400** when not in use, connection components of the I/O module **400** can be protected during use of the mount **300**.

[0051] FIG. **5** shows a top perspective view of another mount **500** for use with the remote imaging device **100** of FIGS. **1** and **2**. The mount **500** is round in shape with a vertically-extending wall **502** designed to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner so as to releasably secure the remote imaging device **100** within the mount **500**. The wall **502** may form a cavity that receives the remote imaging device **100**. The mount **500** may have a small form factor (e.g., a diameter between 35 mm and 45 mm and a depth between 25 mm and 35 mm) and may be lightweight as well. The mount **500** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as leather, vinyl, neoprene, etc.

[0052] The wall **502** of the mount **500** may define an opening **504** that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. In another example (not shown), the opening **504** may be covered with a thin and/or pliable material to allow the user to indirectly manipulate the control interface **106** of the

imaging device 100. The mount 500 may be configured for use in various environments. For example, the mount 500 may itself be waterproof and/or include a waterproof enclosure (not shown) that protects the imaging device 100 from water when used, for example, while surfing or scuba diving.

[0053] The mount 500 may include a securing structure 506 for securing the mount 500 to a variety of locations in a variety of positions. In the example of FIG. 5, the securing structure 506 includes two parts or halves: a domed structure 508 to be secured either fixedly or removably in a variety of locations and a cupped structure 510 to be seated against the domed structure 508 in a variety of adjustable positions. One part of the securing structure 506 (that is, either the domed structure 508 or the cupped structure 510) may be magnetic while the other part (that is, the other of the domed structure 508 and the cupped structure 510) may be metallic so as to be attractable to the magnetic part. The domed structure 508 may include other mounting features, such as a suction cup (not shown), for positioning the domed structure 508 on various surfaces.

[0054] FIG. 6 shows a bottom perspective view of the mount 500 of FIG. 5. The concavity of the cupped structure 510 is shown as shaped to receive a domed surface of the domed structure 508. A curved bi-directional arrow located between the spaced domed structure 508 and the cupped structure 510 represents potential positions of the cupped structure 510 in reference to the domed structure 508. A straight bi-directional arrow extending between the spaced domed structure 508 and the cupped structure 510 represents mounting and dismounting the separate halves of the securing structure 506.

[0055] The domed structure 508 can include an adhesive (not shown) or other securing mechanism on a flat surface (that opposes the domed surface) to aid in positioning the domed structure 508 on a variety of different surfaces such as tables, walls, etc. In one example, magnetic attraction between the domed structure 508 and the cupped structure 510 may be such that a thinner piece of paper, fabric, or other material may be placed between the domed structure 508 and the cupped structure 510 when secured. Attaching the opposing halves of the securing structure 506 to opposing sides of paper, fabric, or other material allows the mount 500 to be secured, for example, to a pocket of a user or curtains covering a window. For example, the user may place the domed structure 508 inside a shirt pocket and couple the cupped structure 510 to the outside of the shirt pocket to be held in place by the domed structure 508, the pocket being sandwiched between the domed structure 508 and the cupped structure 510.

[0056] FIG. 7 shows a perspective view of another mount 700 for use with the remote imaging device 100 of FIGS. 1 and 2. The mount 700 has a ring-like shape formed by a frame or wall 702 designed to capture sides of the remote imaging device 100. The mount 700 may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as vinyl, neoprene, etc. The mount 700 may have a small form factor (e.g., a diameter between 35 mm and 45 mm and a depth between 15 mm and 35 mm) and may be lightweight as well.

[0057] The wall 702 of the mount 700 may define an opening 704 that allows a user to directly manipulate the control interface 106 of the imaging device 100. In another example (not shown), the opening 704 may be covered with a thin and/or pliable material to allow the user to indirectly

manipulate the control interface 106 of the imaging device 100. The mount 700 may be configured for use in various environments. For example, the mount 700 may itself be waterproof and/or include a waterproof enclosure (not shown) that protects the imaging device 100 from water when used, for example, while surfing or scuba diving.

[0058] The mount 700 may include a securing structure 706 for securing the mount 700 to another securing structure (not shown). The securing structure 706 in FIG. 7 includes a pair of protrusions, each including an opening configured to receive a coupling mechanism, for instance, a rod or screw, used to pivotally couple the securing structure 706 to another securing structure including a plurality of reciprocal protrusions and openings. Various reciprocal securing structures are further described in reference to FIG. 9. For example, the securing structure 706 may be a ball and socket structure.

[0059] The mount 700 may include another securing structure 708 for releasably securing the remote imaging device 100 within the wall 702 of the mount 700 such as those described in, e.g., U.S. patent application Ser. No. 13/949,160 entitled “CAMERA HOUSING,” filed on Jul. 23, 2013, now U.S. Pat. No. 8,837,928, the foregoing being incorporated herein by reference in its entirety. The securing structure 708 in FIG. 7 is in an open position such that the remote imaging device 100 can be easily inserted or removed from within the wall 702 of the mount 700. In other words, with the securing structure 708 in the open position, the mount 700 would not retain the remote imaging device 100 in place within the wall 702.

[0060] FIG. 8 shows a perspective view of the mount 700 of FIG. 7 in a closed position. That is, the securing structure 708 in FIG. 8 is shown as clamped or closed such that the remote imaging device 100 would be securely held within the wall 702 of the mount 700 with the wall 702 abutting side surfaces of the remote imaging device 100. The materials used for the securing structure 708 may include hinges, pins, clips, clamps, or other adjustment mechanisms such that the wall 702 of the mount may expand and retract to release and hold the remote imaging device 100 as needed.

[0061] FIG. 9 shows a mounting ecosystem for use with the securing structure 706 of the mount 700 of FIGS. 7 and 8 such as the ecosystem described in, e.g., U.S. patent application Ser. No. 14/922,157 entitled “QUICK-RELEASE BALL-AND-SOCKET JOINT CAMERA MOUNT,” filed on Oct. 25, 2015, now U.S. Pat. No. 9,423,673, the foregoing being incorporated herein by reference in its entirety.

[0062] The protrusions on the securing structure 706 of FIGS. 7 and 8 may be coupled to complementary protrusions on a top portion of securing structure 900 and/or securing structure 902 as shown in the mounting ecosystem of FIG. 9. The ball-shaped lower portion of the securing structure 900 may be coupled to the concave ball-receiving portion of securing structure 904 and/or securing structure 906. The clip-shaped lower portion of the securing structure 902 and/or the securing structure 906 may be slideably engaged with securing structure 908. Each of the securing structures 900, 902, 904, 906, 908 allow for a variety of mounting possibilities for the mount 700 shown in FIGS. 7 and 8.

[0063] FIG. 10 shows a perspective view of another mount in the form of a housing 1000 for use with the remote imaging device 100 of FIGS. 1 and 2, such as the housings described in, e.g., U.S. patent application Ser. No. 12/498,

890 entitled “CAMERA HOUSING WITH INTEGRATED EXPANSION MODULE,” filed on Jul. 7, 2009, now U.S. Pat. No. 8,199,251, the foregoing being incorporated herein by reference in its entirety.

[0064] The housing **1000** of FIG. **10** includes two housing portions **1002**, **1004**. The first housing portion **1002** includes walls that define a cavity that receives the remote imaging device **100**. The second housing portion **1004** detachably couples with the first housing portion **1002** opposite a front face of the first housing portion **1002**. The first housing portion **1002** and the second housing portion **1004** are collectively structured to enclose the remote imaging device **100** within the cavity of the first housing portion **1002** when the second housing portion **1004** is secured to the first housing portion **1002** in a closed position (see FIG. **11**). The first and second housing portions **1002**, **1004** can be formed of rigid, substantially rigid, pliable, or substantially pliable materials such as plastic, metal, fiberglass, leather, vinyl, neoprene, etc.

[0065] The walls of the first housing portion **1002** may include an opening that allows a user to directly manipulate the control interface **106** of the imaging device **100**. The location of the control interface **106** is shown in FIG. **10** as disposed in the opening of the first housing portion **1002**. The housing **1000** may be configured for use in various environments. For example, the housing **1000** may be waterproof when in a closed position to protect the remote imaging device **100** from water when used, for example, while surfing or scuba diving.

[0066] The first housing portion **1002** may define an opening or cover **1003** to align with the lens **104** of the remote imaging device **100**. The cover **1003** may be adapted for use with additional lenses to supplement the lens **104** of the remote imaging device **100** such as a wide-angle lens or any other specialized camera lens. The cover **1003** may be removably attachable to the first housing portion **1002** and thus form a third portion of the housing **1000**. The cover **1003** may include a waterproof seal so as to maintain the waterproof aspect of the housing **1000**. Alternatively, the cover **1003** may be permanently fixed to the first housing portion **1002**.

[0067] The first housing portion **1002** may include a securing structure **1006** for securing the housing **1000** to another securing structure such as the securing structures **900**, **902** of FIG. **9**. The securing structure **1006** shown in FIG. **10** includes a pair of protrusions, each including an opening configured to receive a coupling mechanism, for instance, a rod or screw, used to pivotally couple the securing structure **1006** to another securing structure including a plurality of reciprocal protrusions and openings.

[0068] The second housing portion **1004** opens and closes in respect to the first housing portion **1002** so that the remote imaging device **100** may be removed from the housing **1000**. For example, the first and second housing portions **1002**, **1004** may each include halves or portions of securing structures **1008a,b**, **1010a,b**. The securing structure **1008a,b** (collectively, **1008**) is a hinge-type mechanism allowing rotation of the second housing portion **1004** in relation to the first housing portion **1002**. The securing structure **1010a,b** (collectively **1010**) is a clasp-type mechanism locking the second housing portion **1004** to the first housing portion **1002**. In other examples, the securing structures **1008**, **1010** can include buttons, buckles, clips, hooks, magnets, adhesives, or any other type of securing mechanism.

[0069] The second housing portion **1004** may include an I/O module **1012** formed of several electronic contact locations. The electronic contact locations of the I/O module **200** of the remote imaging device **100** may be aligned to and press fit against the electronic contact locations of the I/O module **1012** on the second housing portion **1004**. That is, the remote imaging device **100** and the second housing portion **1004** may be electrically coupled when the housing **1000** secures the remote imaging device **100**. Other types of I/O modules for use in an interface to the remote imaging device **100** are also possible.

[0070] FIG. **11** shows a perspective view of the housing **1000** of FIG. **10** in a closed position. The housing **1000** includes a display module **1014** with a display screen **1016** (e.g., a Liquid Crystal Display (LCD)) externally viewable from a back surface of the second housing portion **1004**. The display module **1014** may include display control logic for adding display functions to the remote imaging device **100** since the remote imaging device **100** does not include a built-in or native display screen. For example, the display module **1014** may digitally display an image of an object currently in a field of view of the lens **104** of the remote imaging device **100** on the display screen **1016**. This provides the user with a preview image before capturing images or recording video and allows the user to experience a field of view of the remote imaging device **100** without a native viewfinder. Additionally, the display module **1014** may allow the user to view previously captured and/or stored images or video.

[0071] FIG. **12** shows a perspective view of another mount **1200** for use with the remote imaging device **100** of FIGS. **1** and **2**. The mount **1200** includes a base **1202** and wall **1204** extending generally perpendicularly from the base **1202**. The mount **1200** may have a small form factor and may be lightweight. The mount **1200** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0072] The base **1202** may be rectangular as shown or take any of a variety of shapes suitable to support the wall **1204**. The wall **1204** may capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner so as to releasably secure the remote imaging device **100** within the mount **1200**. The base **1202** and the wall **1204** may together form a cavity that receives the remote imaging device **100**.

[0073] The base **1202** of the mount **1200** may define one or more openings **1206** that allow a user to attach the mount **1200** to various surfaces. For example, the openings **1206** may be used to aid in securing the mount **1200** to an article of clothing or a backpack using thread, string, staples, pins, clips, or other attachment means. Though four openings **1206** are shown as located at corners of the base **1202**, the base **1202** may include, for example, two slot-shaped openings (not shown) suitable for sliding the mount **1200** along a strap or a belt.

[0074] The wall **1204** of the mount **1200** may define another opening **1208** that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. In another example (not shown), the opening **1208** may be covered with a thin and/or pliable material to allow the user to indirectly manipulate the control interface **106** of the imaging device **100**. The mount **1200** may be configured for use in various environments. For example, the mount **1200**

may itself be waterproof and/or include a waterproof enclosure (not shown) that protects the imaging device **100** from water when used, for example, while surfing or scuba diving.

[0075] FIG. **13** shows a rear perspective view of another mount **1300** for use with the remote imaging device **100** of FIGS. **1** and **2**. The front of the mount **1300** (not shown) may include a vertically-extending wall similar to the walls **302**, **502**, **1204** of FIGS. **3**, **5**, and **12** and an opening similar to the openings **304**, **504**, **1208** of FIGS. **3**, **5**, and **12**. The mount **1300** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0076] The mount **1300** may include a securing mechanism in the form of a slot **1302** shaped to receive a rail, for example, in sliding, press-fit, or magnetic engagement. Here, the slot **1302** is straight, short in length, has a t-shape, and extends across a bottom surface of the round mount **1300**. Additional shapes and lengths for the slot **1302** are also possible.

[0077] The mount **1300** may also include an I/O module **1304** formed of several electronic contact locations suitable to couple the remote imaging device **100** of FIGS. **1** and **2**. For example, the electronic contact locations of the I/O module **200** of the remote imaging device **100** may be aligned and press fit against inside surfaces (not shown) of the electronic contact locations of the I/O module **1304** in the mount **1300**. Thus, the remote imaging device **100** and the mount **1300** may be electrically coupled when the mount **1300** secures the remote imaging device **100**. Though the I/O module **1304** of FIG. **13** is shown as including electronic contact locations, other types of I/O modules for use as an interface between the mount **1300** and the remote imaging device **100** are also possible.

[0078] FIG. **14** shows a perspective view of a mount **1400** for use with the mount **1300** of FIG. **13**. The mount **1400** includes a ring **1402** and a rail **1404** extending generally perpendicularly from the ring **1402**. The mount **1400** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0079] The ring **1402** of the mount **1400** may be worn, for example, on a finger of a user. The rail **1404** on the mount **1400** of FIG. **14** may be aligned and slideably engaged with, for example, the slot **1302** on the mount **1300** of FIG. **13**. By coupling the rail **1404** of the mount **1400** with the slot **1302** of the mount **1300**, the user may carry the remote imaging device **100** on an exterior (or interior) of a hand. In this mounted position, the remote imaging device **100** may be easily positioned based on gestures or other movements of the hand of the user.

[0080] Though shown without an I/O module or a control interface, the mount **1400** may include these features to take advantage, for example, of the I/O module **1304** included on the mount **1300** that electronically couples with the remote imaging device **100**. For example, the mount **1400** may include an independent power source for the remote imaging device **100**, a control interface that may be manipulated by the user to provide commands to the remote imaging device **100**, and/or any other features suitable to provide an interface to the remote imaging device **100**.

[0081] FIG. **15** shows a rear view of a case **1500** for use with the mount **1300** of FIG. **13**. The case **1500** may be shaped to releasably secure, for example, a smart phone,

with the smart phone being press fit or otherwise secured within a cavity (not shown) on a front side of the case **1500**. The case **1500** may be formed of pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0082] The case **1500** may define an opening **1502** suitable to allow a lens of a camera associated with the smart phone to capture light through the case **1500**. The case **1500** may also include a rail **1504** extending substantially perpendicularly from a back of the case **1500**, positioned, for example, below the opening **1502** so as to not obscure the opening **1502**. The rail **1504** may have a t-shape so as to slide within or be press-fit against the slot **1302** of the mount **1300** of FIG. **13** in order to couple the mount **1300** (and hence the remote imaging device **100** secured by the mount **1300**) to the case **1500**. In this manner, storage and/or interface of the remote imaging device **100** with a separate or supporting device (such as a smart phone) secured within the case **1500** is possible.

[0083] The rail **1504** may include an I/O module **1506** formed of several electronic contact locations suitable to couple the I/O module **1304** of the mount **1300** of FIG. **13**. For example, the electronic contact locations of the I/O module **1304** of the mount **1300** may be aligned with the electronic contact locations of the I/O module **1506** of the rail **1504** when the mount **1300** is coupled to the case **1500**. When the remote imaging device **100** is electrically coupled to the mount **1300**, the mount **1300** is electrically coupled to the case **1500**, and a separate or supporting device, such as a smart phone, is electrically coupled to the case **1500**, the remote imaging device **100** may thereby be electrically coupled to the separate or supporting device through the mount **1300** and the case **1500**. Though the I/O module **1506** of FIG. **15** is shown as including electronic contact locations, other types of I/O modules are also possible.

[0084] FIG. **16** shows a front view of another case **1600** for use with the remote imaging device **100** of FIGS. **1** and **2**. The case **1600** may be shaped to releasably secure, for example, a smart phone, with the smart phone being press fit or otherwise secured within a cavity **1602** formed by side walls of the case **1600**. The case **1600** may be formed of pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc. The case **1600** may be configured for use in various environments. For example, the case **1600** may be waterproof and/or include a waterproof enclosure (not shown) that protects the smart phone and/or the remote imaging device **100** from water.

[0085] The case **1600** may define an opening **1604** suitable to allow a lens of a camera associated with the smart phone to capture light through the case **1600**. The case **1600** may also include a mount **1606** extending perpendicularly from a back of the case **1600**, positioned, for example, below the opening **1604** so as to not obscure the opening **1604**. Details of the mount **1606** are further described in respect to FIG. **17** below. Other positions for the mount **1606** on the case **1600** are also possible.

[0086] The case **1600** may include an I/O module **1608** extending within the cavity **1602** from a bottom surface of the case **1600**. The I/O module **1608** may include a communications interface (e.g., USB, HDMI, and/or other interface) configured to electronically couple, for example, a smart phone or other mobile device to the case **1600** and, thereby, to the mount **1606** extending from the back of the case **1600**. The I/O module **1608** may provide, for example,

supplemental power to the smart phone and/or to the mount **1606** from a power source (e.g., a battery, a DC electrical source, and/or other energy source) disposed within and/or associated with the case **1600**. In the example of FIG. **16**, the power source may be positioned below the I/O module **1608** within a thick, lower wall of the case **1600**.

[0087] FIG. **17** shows a rear perspective view of the case **1600** of FIG. **16**. The case **1600** includes the centrally-located mount **1606** having a vertically-extending wall **1610** designed to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner to releasably secure the remote imaging device **100** within the mount **1606**. The wall **1610** may be shorter, for example, than the walls **302**, **502**, **1204** of FIGS. **3**, **5**, and **12** as the mount **1606** may be inset within the case **1600**. The mount **1606** may also include, for example, magnet portions suitable to secure metallic portions of the remote imaging device **100** to the mount **1606**.

[0088] The mount **1606** may include an I/O module **1612** formed of several electronic contact locations suitable to couple the remote imaging device **100** of FIGS. **1** and **2**. For example, the electronic contact locations of the I/O module **200** of the remote imaging device **100** may be aligned and press fit against the electronic contact locations of the I/O module **1612** in the mount **1606** such that the remote imaging device **100** and the case **1600** are electrically coupled when the mount **1606** secures the remote imaging device **100**. Though the I/O module **1612** of FIG. **17** is shown as including electronic contact locations, other types of I/O modules for use in an interface to the remote imaging device **100** are also possible.

[0089] FIG. **18** shows a perspective view of a housing or mount **1800** for use with the remote imaging device **100** of FIGS. **1** and **2**. The mount **1800** of FIG. **18** includes a vertically-extending wall **1802** designed to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner to releasably secure the remote imaging device **100** within the mount **1800**. The wall **1802** may form a cavity that receives the remote imaging device **100**. The mount **1800** may have a small form factor (e.g., a diameter between 35 mm and 45 mm and a depth between 25 mm and 50 mm) and may be lightweight as well. The mount **1800** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as leather, vinyl, neoprene, etc.

[0090] The wall **1802** of the mount **1800** may define an opening **1804** that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. In another example (not shown), the opening **1804** may be covered with a thin and/or pliable material to allow the user to indirectly manipulate the control interface **106** of the remote imaging device **100**. The mount **1800** may be configured for use in various environments. For example, the mount **1800** may itself be waterproof and/or include a waterproof enclosure (not shown) that protects the remote imaging device **100** from water when used, for example, while surfing or scuba diving.

[0091] The mount **1800** includes a securing structure **1806** for mechanically coupling the mount to one or more separate or supporting devices such as a smartphone or various other supporting devices described in respect to FIGS. **19-22**). In the example of FIG. **18**, the securing structure **1806** is a c-shaped channel designed to either clamp around a separate or supporting device or serve as a tab configured to be

received in a slot of a supporting device. In other words, the securing structure **1806** has a clamp-or clip-type mechanism used, for example, to slidably and/or compressibly secure the mount **1800** to items such as smart phones, rings, watches, keychains, etc. The securing structure **1806** may include a spring-based hinge, a mechanical clamp, grip-type ridges for increased interference with various surfaces of a supporting device, or any other mechanism suitable to secure the mount **1800** to a separate or supporting device as desired by the user.

[0092] The mount **1800** may include a first I/O module **1808** formed of several electronic contact locations suitable to couple the remote imaging device **100** of FIGS. **1** and **2**. For example, the electronic contact locations of the I/O module **200** of the remote imaging device **100** may be aligned and press fit against the electronic contact locations of the I/O module **1808** in the mount **1800** such that the remote imaging device **100** and the mount **1800** are electrically coupled when the mount **1800** secures the remote imaging device **100**. Though the first I/O module **1808** of FIG. **18** is shown as including electronic contact locations, other types of I/O modules for use in an interface to the remote imaging device **100** are also possible.

[0093] The mount **1800** may also include a second I/O module **1810** disposed on and/or within a surface of the securing structure **1806**. The I/O module **1810** may include a physical, wired, and/or wireless communications interface (e.g., WiFi, Bluetooth, USB, mini-USB, HDMI, Wireless USB, and/or other interfaces) configured to allow the remote imaging device **100** of FIGS. **1** and **2** to communicate with one or more separate or supporting devices (not shown) when both are secured to the mount **1800**. The I/O module **1810** may also include a wired and/or wireless power interface to an external energy source within the separate or supporting device (e.g., a battery, a DC electrical source, and/or other energy sources) that supplies a charge to the imaging unit **102** of the remote imaging device **100** when the remote imaging device **100** and the separate or supporting device are secured to the mount **1800**.

[0094] In one example, the mount **1800** can releasably capture the remote imaging device **100** of FIGS. **1** and **2** and at the same time be clipped or clamped directly to a separate or supporting device such as a smart phone or a tablet (not shown). In the smart phone example, the first input/output module **1808** of the mount **1800** couples the remote imaging device **100** and the second input/output module **1810** of the mount **1800** couples the smart phone (e.g., using a mini-USB connection). The user may then use the smart phone to operate a software application configured to perform a variety of operations related to camera configuration, image and/or video acquisition, image processing, image display, etc. to interface with the remote imaging device **100**. That is, the smart phone can provide control, processing, and display capability to the remote imaging device **100** through use of the mount **1800** as an interface.

[0095] For either of the mounts **1600**, **1800** described in FIGS. **16**, **17**, and **18**, a wireless connection (e.g., BTLE, WiFi, etc.), may alternatively be used to couple the remote imaging device **100** of FIGS. **1** and **2** and a separate or supporting device such as a smart phone or a tablet. The separate or supporting device may have dedicated memory allocated to the remote imaging device **100**, expanding image data storage potential. The separate or supporting device may allow for automatic, wired, and/or wireless

offload of image data from the remote imaging device **100** to the separate or supporting device based on recognition of the remote imaging device **100** by the separate or supporting device. The separate or supporting device may allow syncing of image data from the remote imaging device **100** with image data from another imaging device associated with the separate or supporting device (e.g., a camera on the smart phone), for example, to allow a user to capture an event from two different vantage points at the same time: the vantage point of the separate or supporting device and the vantage point of the remote imaging device **100**.

[0096] Synchronization of image data from the remote imaging device **100** (first source) and from the imaging device associated with the separate or supporting device (second source) may include matching and/or comparing time stamps, correcting for clock drift, and matching and/or comparing location. Using the separate or supporting device to view, manipulate, and/or process the image data for a specific event from both sources may include, for example, docking the remote imaging device **100** in the mount **1606** of the case **1600** and mounting the separate or supporting device within the case **1600**. In another example, docking the remote imaging device **100** in the mount **1800** and clamping the mount **1800** to the separate or supporting device allows dual image source processing. The process may also include independently recording image data for the event with both the remote imaging device **100** (first source) and the imaging device associated with the separate or supporting device (second source). The process may also include performing a synchronization on the image data captured by both sources using the separate or supporting device, and then viewing, for example, in split screen or cut-between modes on a display associated with the separate or supporting device, synchronized image data streams from both sources.

[0097] In another example, the separate or supporting device may be configured to encode, decode, and/or transfer and share image data captured by the remote imaging device **100**. The separate or supporting device may be configured to extract one or more frames of image data from the remote imaging device **100** and format those frames for viewing on a display of the separate device. Other expanded capabilities for storing, processing, and/or otherwise manipulating the image data from the remote imaging device **100** by the separate or supporting device are also possible.

[0098] FIG. **19** shows a perspective view of a supporting device for use with the mount **1800** of FIG. **18**. In the example of FIG. **19**, the supporting device is a ring **1900**. The ring **1900** includes a housing **1902** extending from and/or along an outer surface of the ring **1900**. The housing **1902** defines an opening or a slot **1904**. The ring **1900** and the housing **1902** may be of unitary construction or separate construction that is joined in any of a variety of mechanical couplings. The ring **1900** and the housing **1902** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0099] The ring **1900** may be worn on a finger of a user with the housing **1902** positioned on either an outer surface or a palm of a hand. The housing **1902** and the slot **1904** defined by the housing **1902** may receive the securing structure **1806** of the mount **1800** of FIG. **18**. For example, the securing structure **1806** may be slideably engaged within the slot **1904** of the housing **1902** disposed on the ring **1900**.

By mechanically coupling the securing structure **1806** with the slot **1904** of the housing **1902**, the user may carry the remote imaging device **100** on an exterior (or interior) of the hand. In this mounted position, the remote imaging device **100** may be easily positioned based on gestures or other movements of the hand of the user.

[0100] An I/O module **1906** may be disposed within the slot **1904** to interface with the second I/O module **1810** disposed on and/or extending from the securing structure **1806** of the mount **1800** in FIG. **18**. In the example shown in FIGS. **18** and **19**, the second I/O module **1810** of the mount **1800** includes a male member and/or tab and the I/O module **1906** in the housing **1902** of the ring **1900** includes a female member and/or slot. In this manner, the first I/O module **1808** included on the mount **1800** electronically couples the remote imaging device **100** and the second I/O module **1810** on the mount **1800** both mechanically and electronically couples the mount **1800** and the ring **1900**.

[0101] The ring **1900** may also include an independent power source (not shown) for the remote imaging device **100**, a control interface (not shown) that may be manipulated by the user to provide commands to the remote imaging device **100**, a storage module (not shown) that may receive and store image data and/or video data from the remote imaging device **100**, and/or any other features suitable to provide an interface to the remote imaging device **100** when the ring **1900**, the mount **1800**, and the remote imaging device **100** are coupled.

[0102] FIG. **20** shows a perspective view of a watch **2000** for use with the mount **1800** of FIG. **18**. The watch **2000** includes a watch band **2002** extending between a housing **2004** that defines an opening or slot **2006** on one side of the watch **2000** and a display module **2008** configured to provide a date, a time, and/or other display features to a user on another side of the watch **2000**. The user can position either the housing **2004** or the display module **2008** on an outer surface of the wrist, and the other of the housing **2004** and the display module **2008** will be located on an inner surface of the wrist when the watch band **2002** is used to fasten the watch **2000** to the wrist. The watch band **2002** can be fastened and/or secured to the wrist of the user in a variety of manners (not shown). The watch band **2002** and the housing **2004** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0103] The housing **2004** and the slot **2006** defined by the housing **2004** may receive the securing structure **1806** of the mount **1800** of FIG. **18**. For example, the securing structure **1806** may be slideably engaged within the slot **2006** of the housing **2004** that forms a portion of the watch **2000**. By mechanically coupling the securing structure **1806** with the slot **2006** of the housing **2004**, the user may carry the remote imaging device **100** on an exterior (or interior) of the wrist. In this mounted position, the remote imaging device **100** may be easily positioned based on gestures or other movements of an arm of the user.

[0104] An I/O module **2010** may be disposed within the slot **2006** to interface with the second I/O module **1810** disposed on and/or extending from the securing structure **1806** of the mount **1800** in FIG. **18**. In the example shown in FIGS. **18** and **20**, the second I/O module **1810** of the mount **1800** includes a male member and/or tab and the I/O module **2010** in the housing **2004** of the watch **2000** includes

a female member and/or slot. In this manner, the first I/O module **1808** included on the mount **1800** electronically couples the remote imaging device **100** and the second I/O module **1810** on the mount **1800** both mechanically and electronically couples the mount **1800** and the watch **2000**.

[0105] The display module **2008** may include a display screen **2012** and display control logic for adding display functions to the remote imaging device **100** since the remote imaging device **100** does not include a built-in or native display screen. For example, the display module **2008** may digitally display an image of an object currently in a field of view of the lens **104** of the remote imaging device **100** on the display screen **2012**. This provides the user with a preview image before capturing images or recording video and allows the user to experience a field of view of the remote imaging device **100** without a native viewfinder. Additionally, the display module **2008** may allow the user to view previously captured and/or stored images or video.

[0106] The watch **2000** may also include an independent power source (not shown) for the remote imaging device **100**, a control interface (not shown) that may be manipulated by the user to provide commands to the remote imaging device **100** and/or the display module **2008**, a storage module (not shown) that may receive and store image data and/or video data from the remote imaging device **100**, and/or any other features suitable to provide an interface to the remote imaging device **100** when the watch **2000**, the mount **1800**, and the remote imaging device **100** are coupled.

[0107] FIG. **21** shows a perspective view of a key chain **2100** for use with the mount **1800** of FIG. **18**. The key chain **2100** may include an adapter or a fob **2102** coupled to a key ring **2104** that can be used to hold, for example, house keys or car keys. The securing structure **1806** of the mount **1800** of FIG. **18** can be clipped, clamped, and/or slidably engaged around a body of the fob **2102** to mechanically couple the mount **1800** to the key chain **2100** so that the user may carry the mount **1800** and the remote imaging device **100** on the key chain **2100**.

[0108] The fob **2102** may include a first I/O module **2106** in the form of a female member or slot disposed within an outer surface of the fob **2102**. In the example shown in FIGS. **18** and **21**, the second I/O module **1810** of the mount **1800** includes a male member and/or tab that engages the female member or slot of the first I/O module **2106** of the fob **2102**. In this manner, the first I/O module **1808** included on the mount **1800** electronically couples the remote imaging device **100** and the second I/O module **1810** included on the mount **1800** both mechanically and electronically couples the mount **1800** and the key chain **2100**.

[0109] The fob **2102** may also include an adjustment mechanism **2108** that allows a second I/O module **2110** present on the key chain **2100** to move in and out of a surface of the fob **2102**. In this example, the adjustment mechanism **2108** is a slider mechanism that allows the second I/O module **2110** to extend and retract from a slot within the fob **2102**. By retracting the second I/O module **2100** when not in use, connection components of the second I/O module **2110** can be protected during use of the key chain **2100**.

[0110] The fob **2102** may also include an independent power source (not shown) for the remote imaging device **100**, a control interface (not shown) that may be manipulated by the user to provide commands to the remote imaging device **100**, a storage module (not shown) that may receive

and store image data and/or video data from the remote imaging device **100**, and/or any other features suitable to provide an interface to the remote imaging device **100** when the fob **2102**, the mount **1800**, and the remote imaging device **100** are coupled. The second I/O module **2110** of the fob **2102** may be used to interface with additional separate or supporting devices (not shown), for example, to allow transfer of information between the fob **2102** and the additional separate or supporting devices.

[0111] FIG. **22** shows a perspective view of a wristband or bracelet **2200** for use with the remote imaging device **100** of FIGS. **1** and **2**. The bracelet **2200** includes a band **2202** for use in securing the bracelet **2200** to a wrist of a user and a housing **2204** that includes a generally cylindrical wall **2206** configured to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner to releasably secure the remote imaging device **100** within the housing **2204** of the bracelet **2200**. The wall **2206** may include retaining lips **2208** that extend from the wall **2206** to form a cavity that receives outer edges of the remote imaging device **100**. The retaining lips **2208** may be different widths on opposing ends of the wall **2206**. The bracelet **2200** may be formed from pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0112] The wall **2206** of the housing **2204** may define an opening **2210** that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. In another example (not shown), the opening **2210** may be covered with a thin and/or pliable material to allow the user to indirectly manipulate the control interface **106** of the remote imaging device **100**. The bracelet **2200** may be configured for use in various environments. For example, the bracelet **2200** may itself be waterproof and/or include a waterproof enclosure (not shown) that protects the remote imaging device **100** from water when used, for example, while surfing or scuba diving.

[0113] Either the wall **2206** or one of the retaining lips **2208** may include an I/O module **2212** formed of several electronic contact locations suitable to couple the remote imaging device **100** of FIGS. **1** and **2**. For example, the electronic contact locations of the I/O module **200** of the remote imaging device **100** may be aligned and press fit against the electronic contact locations of the I/O module **2212** on the lower retaining lip **2208** of the housing **2204** of the bracelet **2200** such that the remote imaging device **100** and the bracelet **2220** are electrically coupled when the bracelet **2200** secures the remote imaging device **100**. Though the I/O module **2212** of FIG. **22** is shown as including electronic contact locations, other types of I/O modules for use in an interface to the remote imaging device **100** are also possible.

[0114] FIG. **23** shows a perspective view of another watch **2300** for use with the remote imaging device **100** of FIGS. **1** and **2**. The watch **2300** includes a watch band **2302** extending from two sides of a housing **2304**. The watch band **2302** can be fastened and/or secured to a wrist of a user in a variety of ways. The watch band **2302** and the housing **2304** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0115] The housing **2304** may include a vertically-extending wall **2306** designed to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit

manner to releasably secure the remote imaging device **100** within the housing **2304**. The wall **2306** may form a cavity that receives the remote imaging device **100**. The wall **2306** may also define an opening (not shown) that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. The watch **2300** may be configured for use in various environments. For example, the watch **2300** may be waterproof and/or include a waterproof enclosure (not shown) that protects the remote imaging device **100** from water when used, for example, while surfing or scuba diving.

[0116] The housing **2304** may include and/or support a display module **2308** configured to provide a date, a time, and/or other display features to a user of the watch **2300**. The display module **2308** may include a display screen **2310** and display control logic for adding display functions to the remote imaging device **100** since the remote imaging device **100** does not include a built-in or native display screen. In the example of FIG. **23**, the display screen **2310** includes an image of an object currently in a field of view of the lens **104** of the remote imaging device **100** (here, a person) as well as a time, “3:20 PM,” and a date “8-1.” The display module **2308** can thus provide the user time and date information, previews of objects within a field of view of the remote imaging device **100**, and recorded or captured images or video previously captured by the remote imaging device **100**.

[0117] The watch **2300** may also include an independent power source (not shown) for the remote imaging device **100**, a control interface (not shown) that may be manipulated by the user to provide commands to the remote imaging device **100** and/or the display module **2308**, a storage module (not shown) that may receive and store image data and/or video data from the remote imaging device **100**, and/or any other features suitable to provide an interface to the remote imaging device **100** and/or the display module **2308** when the watch **2300** and the remote imaging device **100** are coupled.

[0118] FIG. **24** shows a perspective view of another watch **2400** for use with the remote imaging device **100** of FIGS. **1** and **2**. The watch **2400** includes a watch band **2402** extending from two sides of a housing **2404**. The watch band **2402** can be fastened and/or secured to a wrist of a user in a variety of ways. The watch band **2402** and the housing **2404** may be formed from semi-rigid materials such as plastic, metal, fiberglass, etc. or more pliable or substantially pliable materials such as rubber, leather, vinyl, neoprene, etc.

[0119] The housing **2404** may include a vertically-extending wall **2406** designed to capture sides of the remote imaging device **100**, for example, in a flexible, press-fit manner to releasably secure the remote imaging device **100** within the housing **2404**. The wall **2406** may define an opening (not shown) that allows a user to directly manipulate the control interface **106** of the remote imaging device **100**. The housing **2404** may also include a cover **2408** that extends along and across an upper surface of the wall **2406**, the cover **2408** being designed to obscure, seal, restrain, and/or otherwise engage a top or outer surface of the remote imaging device **100**, depending on a configuration or mode of use of the watch **2400** as further described below.

[0120] The cover **2408** may include or support a display module **2410** configured to provide a date, a time, and/or other display features to a user of the watch **2400**. In the

example of FIG. **24**, the display module **2410** is currently being used to display a time, “5:23,” in a manner that at least partially obscures the lens **104** of the remote imaging device **100** from view. In another embodiment (not shown), the display module **2410** may be inactivated or otherwise controlled such that the cover **2408** becomes clear, or mostly permeable to light, allowing full function of the lens **104** of the remote imaging device **100**.

[0121] The display module **2410** may also include display control logic for adding display functions to the remote imaging device **100** since the remote imaging device **100** does not include a built-in or native display screen. For example, the display module **2410** may digitally display previously captured and/or stored images or video associated with the remote imaging device **100** based on user input, for example, using the control interface **106**.

[0122] The watch **2400** may be configured for use in various environments. For example, the watch **2400** may be waterproof and/or the wall **2406** and the cover **2408** may be waterproof and designed to protect the remote imaging device **100** from water when used, for example, while surfing or scuba diving.

[0123] The watch **2400** may also include an independent power source (not shown) for the remote imaging device **100**, a control interface (not shown) that may be manipulated by the user to provide commands to the display module **2410**, a storage module (not shown) that may receive and store image data and/or video data from the remote imaging device **100**, and/or any other features suitable to provide an interface to the remote imaging device **100** and/or the display module **2410** when the watch **2400** and the remote imaging device **100** are coupled.

[0124] FIG. **25** is a functional block diagram illustrating components of an imaging device **2500**. The imaging device **2500** of FIG. **25** may include or interface with a camera configured to capture photo, video, and/or audio content such as the remote imaging device **100** of FIGS. **1-2**. The imaging device **2500** may include one or more processors **2502** (such as a system on a chip (SOC), microcontroller, microprocessor, CPU, DSP, ASIC, GPU, and/or other processors) that control the operation and functionality of the imaging device **2500**.

[0125] The imaging device **2500** may include one or more optical elements **2504**, such as one or more lenses. The one or more lenses may include, by way of non-limiting example, one or more of a standard lens, macro lens, zoom lens, special-purpose lens, telephoto lens, prime lens, achromatic lens, apochromatic lens, process lens, wide-angle lens, ultra-wide-angle lens, fisheye lens, infrared lens, ultra-violet lens, perspective control lens, other lens, and/or other optical element. In some implementations, the optical elements **2504** may implement focus controller functionality configured to control the operation and configuration of the one or more lenses.

[0126] The imaging device **2500** may include at least one image sensor **2506**, such as one or more of a charge-coupled device (CCD) sensor, active pixel sensor (APS), complementary metal-oxide semiconductor (CMOS) sensor, N-type metal-oxide-semiconductor (NMOS) sensor, and/or other image sensor. The image sensor **2506** may be configured to capture light waves gathered by the optical elements **2504** and to produce image data based on control signals from a sensor controller **2508**. The image sensor **2506** may be configured to generate a first output signal conveying first

visual information regarding the object. The visual information may include one or more of an image, a video, and/or other visual information. In some implementations, the image sensor **2506** may include, without limitation, video, audio, capacitive, radio, vibrational, ultrasonic, infrared, radar, LIDAR and/or sonar, and/or other sensory devices. The optical elements **2504** and the one or more image sensors **2506** may be embodied in a housing.

[0127] The imaging device **2500** may include the aforementioned sensor controller **2508**. The sensor controller **2508** may be used to operate the image sensor **2506**. The sensor controller **2508** may receive image or video input from the image sensor **2506** and audio information from one or more audio components **2510**, such as from microphones configured to provide audio information that may be associated with images being acquired by the image sensor **2506** or voice-based commands being provided by a user. In some implementations, audio information may be encoded using, e.g., AAC, AC3, MP3, linear PCM, MPEG-H, and/or other audio coding formats (audio codec). In one or more implementations of spherical video and/or audio, the audio codec may include a 3-dimensional audio codec.

[0128] The imaging device **2500** may include one or more metadata sources **2512** embodied within a housing and/or disposed externally to the imaging device **2500**. The processor **2502** may interface to the sensor controller **2508** and/or the one or more metadata sources **2512**. The metadata sources **2512** may include sensors such as an inertial measurement unit (IMU) including one or more accelerometers and/or gyroscopes, a magnetometer, a compass, a global positioning system (GPS) sensor, an altimeter, an ambient light sensor, a temperature sensor, a pressure sensor, a heart rate sensor, and/or other sensors. The imaging device **2500** may contain one or more other metadata/telemetry sources, e.g., a battery monitor, storage parameters, and/or other information related to camera operation and/or capture of content. The metadata sources **2512** may obtain information related to an environment of the imaging device **2500** and aspects in which the content is captured.

[0129] By way of a non-limiting example, the accelerometer may provide device motion information comprising velocity and/or acceleration vectors representative of motion of the imaging device **2500**; the gyroscope may provide orientation information describing the orientation of the imaging device **2500**; the GPS sensor may provide GPS coordinates, time, and identifying location of the imaging device **2500**; and the altimeter may obtain the altitude of the imaging device **2500**. In some implementations, the metadata sources **2512** may be rigidly coupled to the imaging device **2500** such that any motion, orientation, or change in location experienced by the imaging device **2500** is also experienced by the metadata sources **2512**.

[0130] The sensor controller **2508** and/or the processor **2502** may be operable to synchronize various types of information received from the metadata sources **2512**. For example, timing information may be associated with the sensor data. Using the timing information, metadata information may be related to content (photo/video) captured by the image sensor **2506**. In some implementations, the metadata capture may be decoupled from video/image capture. That is, metadata may be stored before, after, and in-between one or more video clips and/or images. In one or more implementations, the sensor controller **2508** and/or the processor **2502** may perform operations on the received meta-

data to generate additional metadata information. For example, the sensor controller **2508** may integrate the received acceleration information to determine the velocity profile of the imaging device **2500** during the recording of a video. In some implementations, video information may consist of multiple frames of pixels using any applicable encoding method (e.g., H.262, H.264, Cineform, and/or other codec).

[0131] The imaging device **2500** may include an electronic storage **2514**. The electronic storage **2514** may include a system memory module that is configured to store executable computer instructions that, when executed by the processor **2502**, perform various functionalities including those described herein. The electronic storage **2514** may include a storage memory configured to store content (e.g., metadata, images, audio) captured by the imaging device **2500**. The electronic storage **2514** may also be located external to the imaging device **2500**.

[0132] The electronic storage **2514** may include non-transitory memory configured to store configuration information and/or processing code configured to enable, e.g., video information and metadata capture, and/or to produce a multimedia stream comprised of, e.g., a video track and metadata in accordance with the methodologies of the present disclosure. In one or more implementations, the processing configuration may include capture type (e.g., video, still images), image resolution, frame rate, burst setting, white balance, recording configuration (e.g., loop mode), audio track configuration, and/or other parameters that may be associated with audio, video, and/or metadata capture. Additional memory may be available for other hardware/firmware/software needs of the imaging device **2500**. The processor **2502** may interface to the sensor controller **2508** in order to obtain and process sensory information for, e.g., object detection, face tracking, stereo vision, and/or other tasks.

[0133] The imaging device **2500** may interface with a user interface (UI) device **2516**. The UI device **2516** may include virtually any type of device capable of registering inputs from and/or communicating outputs to a user. These may include, without limitation, display, touch, proximity sensitive interface, light, sound receiving/emitting devices, wired/wireless input devices, and/or other devices. In some implementations, the UI device **2516** may correspond to a smartphone, a tablet computer, a phablet, a smart watch, a portable computer, and/or another device configured to receive user input and communicate information with the imaging device **2500**. In some implementations, the imaging device **2500** may be configured to provide image or video content (or a portion thereof) to the UI device **2516** for processing and/or viewing.

[0134] The UI device **2516** may operate a software application configured to perform a variety of operations related to camera configuration, control of video acquisition, image processing, and/or display of video captured by the imaging device **2500**. An application (e.g., GoPro App) may enable a user to create short video clips and share video clips to a cloud service (e.g., Instagram, Facebook, YouTube, Dropbox); perform full remote control of functions of the imaging device **2500**; live preview video being captured for shot framing; mark key moments while recording (e.g., HiLight Tag); View HiLight Tags in GoPro Camera Roll for location and/or playback of video highlights; wirelessly control camera software; and/or perform other functions. Various meth-

odologies may be utilized for configuring the imaging device **2500** and/or processing or displaying the captured information from the imaging device **2500**. Image data transfer and/or stop/start for image capture may be controlled using any of the UI functionalities described, for example, in respect to the control interface **106** of the remote imaging device **100**.

[0135] By way of an illustration, the UI device **2516** may receive a user setting characterizing image resolution (e.g., 3840 pixels by 2160 pixels), frame rate (e.g., 60 frames per second (fps)), and/or other settings (e.g., location) related to the activity (e.g., mountain biking) being captured by the user with the imaging device **2500**. The UI device **2516** may then communicate these settings to the imaging device **2500**.

[0136] A display (not shown) of the UI device **2516** may act as a viewport into content captured by the imaging device **2500**. In some implementations, the UI device **2516** may communicate additional information (e.g., metadata) to the imaging device **2500**. By way of an illustration, the UI device **2516** may provide orientation of the UI device **2516** with respect to a given coordinate system to the imaging device **2500** so as to enable determination of an orientation and/or dimensions for viewing a portion of the captured content provided by the imaging device **2500**.

[0137] The display associated with the UI device **2516** may be configured to provide information related to camera operation mode (e.g., image resolution, frame rate, capture mode, sensor mode, video mode, photo mode), connection status (e.g., connected, wireless, wired connection), power mode (e.g., standby, sensor mode, video mode, battery status), information related to metadata sources (e.g., heart rate, GPS), and/or other information.

[0138] The UI device **2516** may also include one or more UI interface components, such as the control interface **106** of FIGS. 1 and 2, configured to enable the user to start, stop, pause, and/or resume sensor and/or content capture. User commands may be encoded using a variety of approaches including a duration of button press (pulse width modulation), a number of button presses (pulse code modulation), and/or a combination thereof. For example, two short button presses may initiate sensor acquisition mode and a single short button press may be used to communicate (i) initiation of video and/or photo capture and cessation of video and/or photo capture (e.g., toggle mode) or (ii) video and/or photo capture for a given time duration or number of frames (e.g., burst capture). Other user command or communication implementations may also be realized, e.g., short/long button press combinations.

[0139] The imaging device may include an I/O module **2518**. The I/O module **2518** may be configured to synchronize the imaging device **2500** with other cameras and/or with other external devices, such as a remote control, a second capture device, a smartphone, and/or a video server. The I/O module **2518** may be configured to communicate information to/from various I/O components. In some implementations, the I/O module **2518** may include a wired and/or wireless communications interface (e.g., WiFi, Bluetooth, USB, HDMI, Wireless USB, Near Field Communication (NFC), Ethernet, a radio frequency transceiver, and/or other interfaces) configured to communicate to one or more external devices (e.g., UI device **2516** and/or another metadata source). In some implementations, the I/O module **2518** may interface with LED lights, a display, a button, a microphone, speakers, and/or other I/O components. In one

or more implementations, the I/O module **2518** may interface to an energy source, e.g., a battery and/or a DC electrical source.

[0140] The I/O module **2518** of the imaging device **2500** may include one or more connections to external computerized devices to allow for configuration and/or management of either the imaging device **2500** or various remote devices. The I/O module **2518** may include any of the wireless or wireline interfaces discussed above, and further, may include customized or proprietary connections for specific applications. In some implementations, the I/O module **2518** may comprise a component (e.g., a dongle) comprising an infrared sensor, a radio frequency antenna, an ultrasonic transducer, and/or other communications interfaces. In one or more implementations, the I/O module **2518** may include a local (e.g., Bluetooth, Wi-Fi) and/or broad range (e.g., cellular LTE) communications interface configured to enable communications between the imaging device **2500** and a remote device such as the UI device **2516** described above.

[0141] The imaging device **2500** may include a power system (not shown) that may be tailored to the needs of the imaging device **2500**. For example, a small-sized, lower-power action camera may include a wireless power solution, a removable/replaceable battery, a solar cell, an inductive (contactless) power source, rectification, and/or other power supplies.

[0142] Where certain elements of these implementations may be partially or fully implemented using known components, only those portions of such known components that are necessary for an understanding of the present disclosure have been described, and detailed descriptions of other portions of such known components have been omitted so as not to obscure the disclosure.

[0143] In the present specification, an implementation showing a singular component should not be considered limiting; rather, the disclosure is intended to encompass other implementations including a plurality of the same component, and vice-versa, unless explicitly stated otherwise herein.

[0144] Further, the present disclosure encompasses present and future known equivalents to the components referred to herein by way of illustration.

[0145] As used herein, the term “bus” is meant generally to denote all types of interconnection or communication architecture that may be used to communicate data between two or more entities. The “bus” could be optical, wireless, infrared or another type of communication medium. The exact topology of the bus could be for example standard “bus”, hierarchical bus, network-on-chip, address-event-representation (AER) connection, or other type of communication topology used for accessing, e.g., different memories in a system.

[0146] As used herein, the terms “computer,” “computing device,” and “computerized device” include, but are not limited to, personal computers (PCs) and minicomputers, whether desktop, laptop, or otherwise, mainframe computers, workstations, servers, personal digital assistants (PDAs), handheld computers, embedded computers, programmable logic device, personal communicators, tablet computers, portable navigation aids, J2ME equipped devices, cellular telephones, smart phones, personal integrated communication or entertainment devices, or literally any other device capable of executing a set of instructions.

[0147] As used herein, the term “computer program” or “software” is meant to include any sequence or human or machine cognizable steps which perform a function. Such program may be rendered in virtually any programming language or environment including, for example, C/C++, C #, Fortran, COBOL, MATLAB™, PASCAL, Python, assembly language, markup languages (e.g., HTML, SGML, XML, VoXML), and the like, as well as object-oriented environments such as the Common Object Request Broker Architecture (CORBA), Java™ (including J2ME, Java Beans), Binary Runtime Environment (e.g., BREW), and the like.

[0148] As used herein, the terms “connection,” “link,” “transmission channel,” “delay line,” and “wireless” mean a causal link between any two or more entities (whether physical or logical/virtual) which enables information exchange between the entities.

[0149] As used herein, the terms “integrated circuit,” “chip,” and “IC” are meant to refer to an electronic circuit manufactured by the patterned diffusion of trace elements into the surface of a thin substrate of semiconductor material. By way of non-limiting example, integrated circuits may include field programmable gate arrays (e.g., FPGAs), a programmable logic device (PLD), reconfigurable computer fabrics (RCFs), systems on a chip (SoC), application-specific integrated circuits (ASICs), and/or other types of integrated circuits.

[0150] As used herein, the term “memory” includes any type of integrated circuit or other storage device adapted for storing digital data including, without limitation, ROM, PROM, EEPROM, DRAM, Mobile DRAM, SDRAM, DDR/2 SDRAM, EDO/FPMS, RLDRAM, SRAM, “flash” memory (e.g., NAND/NOR), memristor memory, and PSRAM.

[0151] As used herein, the terms “microprocessor” and “digital processor” are meant generally to include digital processing devices. By way of non-limiting example, digital processing devices may include one or more of digital signal processors (DSPs), reduced instruction set computers (RISC), general-purpose (CISC) processors, microprocessors, gate arrays (e.g., field programmable gate arrays (FPGAs)), PLDs, reconfigurable computer fabrics (RCFs), array processors, secure microprocessors, application-specific integrated circuits (ASICs), and/or other digital processing devices. Such digital processors may be contained on a single unitary IC die, or distributed across multiple components.

[0152] As used herein, the term “network interface” refers to any signal, data, and/or software interface with a component, network, and/or process. By way of non-limiting example, a network interface may include one or more of FireWire (e.g., FW400, FW110, and/or other variation.), USB (e.g., USB2), Ethernet (e.g., 10/100, 10/100/1000 (Gigabit Ethernet), 10-Gig-E, and/or other Ethernet implementations), MoCA, Coaxsys (e.g., TVnet™), radio frequency tuner (e.g., in-band or OOB, cable modem, and/or other protocol), Wi-Fi (802.11), WiMAX (802.16), PAN (e.g., 802.15), cellular (e.g., 3G, LTE/LTE-A/TD-LTE, GSM, and/or other cellular technology), IrDA families, and/or other network interfaces.

[0153] As used herein, the term “Wi-Fi” includes one or more of IEEE-Std. 802.11, variants of IEEE-Std. 802.11, standards related to IEEE-Std. 802.11 (e.g., 802.11 a/b/g/n/s/v), and/or other wireless standards.

[0154] As used herein, the term “wireless” means any wireless signal, data, communication, and/or other wireless interface. By way of non-limiting example, a wireless interface may include one or more of Wi-Fi, Bluetooth, 3G (3GPP/3GPP2), HSDPA/HSUPA, TDMA, CDMA (e.g., IS-95A, WCDMA, and/or other wireless technology), FHSS, DSSS, GSM, PAN/802.15, WiMAX (802.16), 802.20, narrowband/FDMA, OFDM, PCS/DCS, LTE/LTE-A/TD-LTE, analog cellular, CDPD, satellite systems, millimeter wave or microwave systems, acoustic, infrared (i.e., IrDA), and/or other wireless interfaces.

[0155] As used herein, the term “robot” may be used to describe an autonomous device, autonomous vehicle, computer, artificial intelligence (AI) agent, surveillance system or device, control system or device, and/or other computerized device capable of autonomous operation.

[0156] As used herein, the term “camera” may be used to refer to any imaging device or sensor configured to capture, record, and/or convey still and/or video imagery which may be sensitive to visible parts of the electromagnetic spectrum, invisible parts of the electromagnetic spectrum (e.g., infrared, ultraviolet), and/or other energy (e.g., pressure waves).

[0157] While certain aspects of the technology are described in terms of a specific sequence of steps of a method, these descriptions are only illustrative of the broader methods of the disclosure and may be modified as required by the particular application. Certain steps may be rendered unnecessary or optional under certain circumstances. Additionally, certain steps or functionality may be added to the disclosed implementations, or the order of performance of two or more steps permuted. All such variations are considered to be encompassed within the disclosure.

[0158] While the above detailed description has shown, described, and pointed out novel features of the disclosure as applied to various implementations, it will be understood that various omissions, substitutions, and changes in the form and details of the devices or processes illustrated may be made by those skilled in the art without departing from the disclosure. The foregoing description is in no way meant to be limiting, but rather should be taken as illustrative of the general principles of the technologies.

EMBODIMENTS

[0159] The present disclosure describes a system comprising an imaging device, comprising: an imaging unit with a lens that focuses light onto an image sensor that produces image data, wherein the image data is only stored by the imaging device for transfer to and processing by an external device; and a control interface that provides commands to the imaging unit; and a mount, comprising: walls that releasably secure the imaging device and provide access to the control interface; and a securing structure that secures the mount to a variety of locations.

[0160] In the system, the imaging device and the mount may each comprise an input/output module to electronically couple the imaging device and the mount when the input/output modules are coupled. The mount may comprise another input/output module to electronically couple the imaging device to the external device.

[0161] In the system, the securing structure may define a slot that slidably and compressibly secures the mount to the variety of locations. The securing structure may comprise a magnetic structure and a metallic structure attractable to the

magnetic structure to magnetically secure the mount to the variety of locations. The securing structure may comprise a plurality of protrusions extending from an outer surface of the mount, each protrusion comprising an opening.

[0162] In the system, the mount may comprise a housing having a first housing portion and a second housing portion, the second housing portion being securable to the first housing portion with another securing structure. The imaging device may comprise an input/output module, and the second housing portion may comprise another input/output module that electronically couples the input/output module of the imaging device when the second housing portion is secured to the first housing portion in contact with imaging device. The second housing portion may comprise a display module having a display screen that digitally displays an image of an object currently in a field of view of the lens of the remote imaging device on the display screen when the input/output modules of the imaging device and the second housing portion are electronically coupled.

[0163] The present disclosure also describes a system, comprising: a mount, comprising: a wall that releasably secures an imaging device; a first input/output module that electronically couples the mount to the imaging device; and a second input/output module that electronically couples the mount to a supporting device, wherein the supporting device is at least one of a smart phone, a watch, a ring, a bracelet, or a keychain.

[0164] In the system, the wall may define an opening that provides access to a control interface of the imaging device. The wall may comprise a magnetic structure that magnetically secures the imaging device to the mount. The mount may comprise a securing structure that mechanically couples the mount to the supporting device. The mount may comprise a tab and the supporting device may comprise a slot slideably receiving the tab when the mount is mechanically coupled to the supporting device.

[0165] In the system, the imaging device may comprise an imaging unit with a lens that focuses light onto an image sensor that produces image data, wherein the image data is only stored by the imaging device for transfer to and processing by an external device. In the system, the external device may be the supporting device.

[0166] The present disclosure also describes a wearable device, comprising: a mount, comprising: a wall that releasably secures an imaging device; an input/output module that electronically couples the imaging device to the mount; and a display module comprising a display screen that displays an image of an object currently in a field of view of a lens of the imaging device in an image capture configuration.

[0167] In the wearable device, the display screen may display at least one of a time, a date, or a timer in a watch configuration. The display screen of the display module may cover the lens of the imaging device when the imaging device is releasably secured within the wall. The display screen of the display module may be spaced from the wall that releasably secures the imaging device.

[0168] The present disclosure also describes a system that includes an imaging device and a mount. The imaging device includes a housing, an imaging unit disposed in the housing, and a control interface disposed on the housing and configured to receive commands from a user to operate the imaging unit. The mount includes a first housing portion that includes walls that define a cavity of the mount, whereby the cavity is configured to receive the imaging device therein.

The mount also includes a second housing portion pivotally coupled to the first housing portion and movable between a first position, in which the second housing portion abuts the first housing portion, and a second position, in which the second housing portion extends away the first housing portion. The second housing portion includes a display that is configured to display an image captured by the imaging unit.

[0169] In the system, the display may be configured to display the image captured by the imaging unit when the second housing portion is located in the first position.

[0170] In the system, the display may be unobstructed by the first housing portion and the imaging device when the second housing portion is located in the first position and the second position.

[0171] In the system, the imaging device may be free of a display.

[0172] In the system, the control interface of the imaging device may be accessible by the user when the imaging device is located in the cavity of the mount. The first housing portion may define an opening that permits the user to directly manipulate the control interface of the imaging device when the imaging device is located in the cavity of the mount. The control interface of the imaging device may be disposed in the opening of the first housing portion when the imaging device is located in the cavity of the mount.

[0173] In the system, the second housing portion may abut a back surface of the first housing portion when the second housing portion is located in the first position such that a lens of the imaging unit remains unobstructed by the second housing portion when the second housing portion is located in the first position. The second housing portion may be coupled to the first housing portion via a securing structure that defines a pivot therebetween. The second housing portion may be configured to pivot away from the back surface of the first housing portion about the pivot to reach the second position.

[0174] In the system, the mount may include one or more electronic contact locations that are configured to be aligned to and press fit against respective electronic contact locations of the imaging device when the imaging device is located in the cavity of the mount.

[0175] In the system, the imaging device may further include an imaging device securing structure disposed on or formed with a back surface of the housing of the imaging device. The first housing portion may include a mount securing structure disposed on an interior surface of the walls of the first housing portion within the cavity of the first housing portion. The mount securing structure may be configured to directly contact and magnetically couple with the imaging device securing structure.

[0176] The present disclosure also described a system that includes a display-less imaging device and a mount configured to releasably receive and secure the display-less imaging device therein. The display-less imaging device includes an imaging unit that includes a lens that focuses light onto an image sensor of the imaging unit. The display-less imaging device also includes a control interface configured to receive commands for the imaging unit from a user. The mount includes a housing defining a cavity therein that is configured to receive the display-less imaging device such that the lens of the imaging unit remains unobstructed by the mount when the display-less imaging device is located in the cavity of the housing. The mount also includes a display

module movably coupled to the housing and configured to display an image captured by the imaging unit when the imaging unit is received within the cavity of the housing. The mount further includes a securing structure configured to releasably secure the mount to a secondary mounting structure, wherein the securing structure is formed with or coupled to the housing.

[0177] In the system, the secondary mounting structure may be a freestanding structure configured to support and position the mount and the display-less imaging device.

[0178] In the system, the secondary mounting structure may be configured to secure the mount and the display-less imaging device to a secondary structure.

[0179] In the system, the housing may include walls that define the cavity of the mount. The securing structure of the mount may be formed with or coupled to an exterior surface of the walls.

[0180] In the system, the display module may be movable between an open position, in which the display module is positioned away from the housing, and a closed position, in which the display module is contacting the housing. The display module may be coextensive with an outer perimeter of the housing when the display module is in the closed position.

[0181] The present disclosure also described a system that includes an imaging device and a wearable mount. The imaging device includes a housing, an imaging unit disposed in the housing and that includes a lens, and a control interface disposed on the housing and configured to receive commands for the imaging unit from a user. The wearable mount includes walls that define a cavity of the wearable mount, whereby the cavity is configured to releasably receive and secure the housing of the imaging device therein. The wearable mount also includes an opening that permits access to the cavity and a mount securing structure for mechanically and releasably coupling the wearable mount to a wearable item. The control interface of the imaging device is configured to be disposed in the opening to permit the user to directly manipulate the control interface of the imaging device. The mount securing structure is configured to couple the wearable mount to the wearable item such that the lens of the imaging unit remains unobstructed by the wearable mount and the wearable item.

[0182] In the system, the imaging device may be free of a display. The wearable item may be an article of clothing made from at least one paper, fabric, or other material.

[0183] In the system, the mount securing structure may be a clamp-type mechanism that defines a channel configured to receive a portion of the wearable item so that the mount securing structure compressibly engages the wearable item therein.

What is claimed is:

1. A system, comprising:

an imaging device, comprising:

a housing;

an imaging unit disposed in the housing;

a control interface disposed on the housing and configured to receive commands from a user to operate the imaging unit; and

a mount, comprising:

a first housing portion that includes walls that define a cavity of the mount, wherein the cavity is configured to receive the imaging device therein; and

a second housing portion pivotally coupled to the first housing portion and movable between a first position, in which the second housing portion abuts the first housing portion, and a second position, in which the second housing portion extends away from the first housing portion, wherein the second housing portion includes a display that is configured to display an image captured by the imaging unit.

2. The system of claim 1, wherein the display is configured to display the image captured by the imaging unit when the second housing portion is located in the first position.

3. The system of claim 1, wherein the display is unobstructed by the first housing portion and the imaging device when the second housing portion is located in the first position and the second position.

4. The system of claim 1, wherein the imaging device is free of a display.

5. The system of claim 1, wherein the control interface of the imaging device is accessible by the user when the imaging device is located in the cavity of the mount.

6. The system of claim 5, wherein the first housing portion defines an opening that permits the user to directly manipulate the control interface of the imaging device when the imaging device is located in the cavity of the mount.

7. The system of claim 6, wherein the control interface of the imaging device is disposed in the opening of the first housing portion when the imaging device is located in the cavity of the mount.

8. The system of claim 1, wherein the second housing portion abuts a back surface of the first housing portion when the second housing portion is located in the first position such that a lens of the imaging unit remains unobstructed by the second housing portion when the second housing portion is located in the first position.

9. The system of claim 8, wherein the second housing portion is coupled to the first housing portion via a securing structure that defines a pivot therebetween, and wherein the second housing portion is configured to pivot away from the back surface of the first housing portion about the pivot to reach the second position.

10. The system of claim 1, wherein the mount includes one or more electronic contact locations that are configured to be aligned to and press fit against respective electronic contact locations of the imaging device when the imaging device is located in the cavity of the mount.

11. The system of claim 1, wherein the imaging device further includes an imaging device securing structure disposed on or formed with a back surface of the housing of the imaging device, the first housing portion includes a mount securing structure disposed on an interior surface of the walls of the first housing portion within the cavity of the first housing portion, and the mount securing structure is configured to directly contact and magnetically couple with the imaging device securing structure.

12. A system, comprising:

a display-less imaging device, comprising:

an imaging unit that includes a lens that focuses light onto an image sensor of the imaging unit;

a control interface configured to receive commands for the imaging unit from a user; and

a mount configured to releasably receive and secure the display-less imaging device therein, the mount comprising:

a housing defining a cavity therein that is configured to receive the display-less imaging device such that the lens of the imaging unit remains unobstructed by the mount when the display-less imaging device is located in the cavity of the housing;

a display module movably coupled to the housing and configured to display an image captured by the imaging unit when the imaging unit is received within the cavity of the housing; and

a securing structure configured to releasably secure the mount to a secondary mounting structure, wherein the securing structure is formed with or coupled to the housing.

13. The system of claim **12**, wherein the secondary mounting structure is a freestanding structure configured to support and position the mount and the display-less imaging device.

14. The system of claim **12**, wherein the secondary mounting structure is configured to secure the mount and the display-less imaging device to a secondary structure.

15. The system of claim **12**, wherein the housing includes walls that define the cavity of the mount, and wherein the securing structure of the mount is formed with or coupled to an exterior surface of the walls.

16. The system of claim **12**, wherein the display module is movable between an open position, in which the display module is positioned away from the housing, and a closed position, in which the display module is contacting the housing.

17. The system of claim **16**, wherein the display module is coextensive with an outer perimeter of the housing when the display module is in the closed position.

18. A system, comprising:

an imaging device, comprising:

a housing;

an imaging unit disposed in the housing and that includes a lens;

a control interface disposed on the housing and configured to receive commands for the imaging unit from a user;

a wearable mount, comprising:

walls that define a cavity of the wearable mount, wherein the cavity is configured to releasably receive and secure the housing of the imaging device therein; and

an opening that permits access to the cavity, wherein the control interface of the imaging device is configured to be disposed in the opening to permit the user to directly manipulate the control interface of the imaging device; and

a mount securing structure for mechanically and releasably coupling the wearable mount to a wearable item, wherein the mount securing structure is configured to couple the wearable mount to the wearable item such that the lens of the imaging unit remains unobstructed by the wearable mount and the wearable item.

19. The system of claim **18**, wherein the imaging device is free of a display, and wherein the wearable item is an article of clothing made from at least one of paper, fabric, or other material.

20. The system of claim **18**, wherein the mount securing structure is clamp-type mechanism that defines a channel configured to receive a portion of the wearable item so that the mount securing structure compressibly engages the wearable item therein.

* * * * *