



US012389151B2

(12) **United States Patent**
Monahan et al.

(10) **Patent No.:** **US 12,389,151 B2**
(45) **Date of Patent:** ***Aug. 12, 2025**

(54) **EARPIECE PASSIVE NOISE ATTENUATING**

H04R 25/02 (2013.01); *H04R 25/652*
(2013.01); *H04R 25/654* (2013.01); *H04R*
25/656 (2013.01)

(71) Applicant: **Bose Corporation**, Framingham, MA
(US)

(72) Inventors: **Michael J. Monahan**, Southborough,
MA (US); **Ryan C. Silvestri**, Franklin,
MA (US); **Eric M. Wallace**, Andover,
MA (US); **Kevin P. Annunziato**,
Medway, MA (US)

(58) **Field of Classification Search**

CPC .. *H04R 1/1016*; *H04R 1/1058*; *H04R 25/652*;
H04R 1/1083; *H04R 25/656*; *A61F 11/08*
USPC 381/380
See application file for complete search history.

(73) Assignee: **Bose Corporation**, Framingham, MA
(US)

(56)

References Cited

U.S. PATENT DOCUMENTS

588,099 A 8/1897 Blount et al.
931,768 A 8/1909 Kirpatrick
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

FOREIGN PATENT DOCUMENTS

CA 2689100 12/2008
CA 2740006 4/2010
(Continued)

(21) Appl. No.: **18/390,028**

(22) Filed: **Dec. 20, 2023**

(65) **Prior Publication Data**

US 2024/0205581 A1 Jun. 20, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/549,318, filed on
Dec. 13, 2021, now Pat. No. 11,889,254, which is a
continuation of application No. 16/450,197, filed on
Jun. 24, 2019, now Pat. No. 11,234,065, which is a
continuation of application No. 16/265,685, filed on
(Continued)

OTHER PUBLICATIONS

[No. Author Listed], "Manual: Bose IE2 Audio Headphones," Bose
Corporation, 2010, 7 pages.

(Continued)

Primary Examiner — Md S Elahee

(74) *Attorney, Agent, or Firm* — Fish & Richardson P.C.

(51) **Int. Cl.**

H04R 1/10 (2006.01)
A61F 11/08 (2006.01)
H04R 25/00 (2006.01)
H04R 25/02 (2006.01)


(52) **U.S. Cl.**

CPC **H04R 1/1016** (2013.01); **A61F 11/08**
(2013.01); **H04R 1/1058** (2013.01); **H04R**
1/105 (2013.01); **H04R 1/1083** (2013.01);

ABSTRACT

An earpiece with structure for positioning and retaining the
earpiece and with structure for sealing against the entrance
to the ear canal to provide passive noise attenuation. The
positioning and retaining structure engages features of the
lateral surface of the ear. The structure for sealing against the
entrance to the ear canal includes a conical structure.

20 Claims, 7 Drawing Sheets

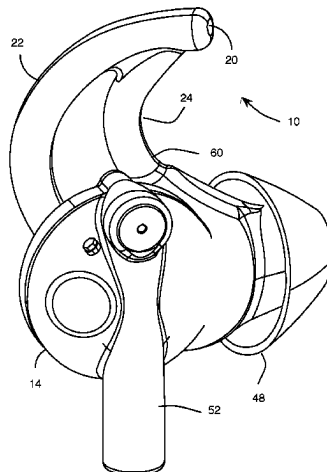

Related U.S. Application Data

Feb. 1, 2019, now Pat. No. 11,218,792, which is a continuation of application No. 15/137,632, filed on Apr. 25, 2016, now Pat. No. 10,334,344, which is a continuation of application No. 14/272,845, filed on May 8, 2014, now Pat. No. 9,398,364, which is a continuation of application No. 13/193,288, filed on Jul. 28, 2011, now Pat. No. 8,737,669.

(56)

References Cited

U.S. PATENT DOCUMENTS

1,564,474	A	12/1925	Fensky	D469,755	S	2/2003	Hlas et al.
1,614,987	A	1/1927	Bernhard et al.	D470,122	S	2/2003	Hlas et al.
1,668,890	A	5/1928	Curran et al.	D470,123	S	2/2003	Hlas et al.
1,688,910	A	10/1928	Winship	D470,128	S	2/2003	Hlas et al.
1,753,817	A	4/1930	Aber	D470,129	S	2/2003	Hlas et al.
1,893,143	A	1/1933	Koch	D471,537	S	3/2003	Ham
1,893,474	A	1/1933	Lieber	D471,890	S	3/2003	Clarkson
1,969,559	A	8/1934	Kelly	D473,204	S	4/2003	Tanio
2,437,490	A	3/1948	Watson et al.	D478,991	S	8/2003	Dyer et al.
2,487,038	A	11/1949	Baum	6,621,905	B1	9/2003	Chun
2,492,183	A	12/1949	Rosenblatt	6,688,421	B2	2/2004	Dyer et al.
2,521,414	A	9/1950	Schier	6,690,807	B1	2/2004	Meyer
2,535,258	A	12/1950	Bland	6,795,718	B2	9/2004	Bae
2,538,339	A	1/1951	Thomas	6,810,987	B1	11/2004	Dekalb
2,545,731	A	3/1951	French	6,819,762	B2	11/2004	Jones et al.
2,595,489	A	5/1952	Rutter et al.	6,820,717	B2	11/2004	Fleming et al.
2,763,334	A	9/1956	Starkey	6,829,362	B1	12/2004	Kadziela et al.
2,863,005	A	12/1958	Knauert	6,868,284	B2	3/2005	Bae
2,904,640	A	9/1959	Dreher et al.	6,879,697	B2	4/2005	Topholm
2,908,343	A	10/1959	Hummert	D505,132	S	5/2005	Linville et al.
3,053,061	A	9/1962	French	6,914,997	B2	7/2005	Macdonald et al.
3,157,245	A	11/1964	Bernstein	6,944,307	B2	9/2005	Berg
3,258,533	A	6/1966	Bredon	D510,574	S	10/2005	Okada
D221,442	S	8/1971	Feingold	6,961,440	B1	11/2005	Schlaegel
4,010,820	A	3/1977	Johnson	D519,109	S	4/2006	Perszyk et al.
4,055,233	A	10/1977	Huntress	7,043,038	B2	5/2006	Bachler et al.
4,091,067	A	5/1978	Kramer et al.	7,050,599	B2	5/2006	Baskerville
4,219,018	A	8/1980	Draper	7,068,803	B2	6/2006	Kuhlmann et al.
D266,590	S	10/1982	Bennett	D525,962	S	8/2006	Elson
4,353,364	A	10/1982	Woods	D538,271	S	3/2007	Kim et al.
4,403,120	A	9/1983	Yoshimi	7,194,102	B2	3/2007	Harvery
D274,814	S	7/1984	Tang	7,233,676	B2	6/2007	Bayer
4,540,063	A	9/1985	Ochi et al.	D554,756	S	11/2007	Sjursen et al.
4,646,872	A	3/1987	Kamon et al.	D558,735	S	1/2008	Carr et al.
4,720,857	A	1/1988	Burris et al.	7,340,075	B2	3/2008	Bayer
4,736,435	A	4/1988	Yokoyama et al.	D566,099	S	4/2008	Komiyama
4,878,560	A	11/1989	Scott	D566,691	S	4/2008	Andre et al.
4,896,679	A	1/1990	St. Pierre	D568,302	S	5/2008	Oh
D316,550	S	4/1991	Sogabe	D569,841	S	5/2008	Chung et al.
D318,670	S	7/1991	Taniguchi	7,394,910	B2	7/2008	Smith et al.
5,048,090	A	9/1991	Geers	D575,277	S	8/2008	Gaarde et al.
5,055,233	A	10/1991	Borland et al.	D575,772	S	8/2008	Schultz et al.
D326,655	S	6/1992	Iribe	7,412,068	B2	8/2008	Bayer
5,142,587	A	8/1992	Kobayashi	D578,507	S	10/2008	Ando
5,222,151	A	6/1993	Nagayoshi et al.	D578,508	S	10/2008	Wang
5,298,692	A	3/1994	Ikeda et al.	D579,006	S	10/2008	Kim et al.
5,548,643	A	8/1996	Dalgleish et al.	D582,389	S	12/2008	Bose et al.
5,625,171	A	4/1997	Marshall	D582,397	S	12/2008	Christopher
5,654,530	A	8/1997	Sauer et al.	D582,398	S	12/2008	Nam et al.
5,659,156	A	8/1997	Mauney et al.	D582,889	S	12/2008	Bose et al.
5,668,354	A	9/1997	Falco	D584,284	S	1/2009	Carr et al.
D388,093	S	12/1997	Frengley	D584,294	S	1/2009	Nam et al.
5,712,453	A	1/1998	Bungardt et al.	D585,881	S	2/2009	Nam et al.
5,727,566	A	3/1998	Leight	D588,099	S	3/2009	Yuyama
5,881,161	A	3/1999	Liu	D589,945	S	4/2009	Esses
5,953,435	A	9/1999	Mullin et al.	7,536,008	B2	5/2009	Howes et al.
5,957,136	A	9/1999	Magidson et al.	D596,164	S	7/2009	Henning
D430,139	S	8/2000	Peters et al.	D601,134	S	9/2009	Elabidi et al.
D430,547	S	9/2000	Yoon	D602,476	S	10/2009	Lee et al.
D430,860	S	9/2000	Yoon	D605,170	S	12/2009	Keinanen
6,122,388	A	9/2000	Feldman	D605,628	S	12/2009	Ando
6,129,175	A	10/2000	Tutor et al.	D607,875	S	1/2010	Pedersen
6,241,041	B1	6/2001	Leight	D618,219	S	6/2010	Burgett et al.
6,449,374	B1	9/2002	Skulley et al.	D618,221	S	6/2010	Fahrendorff et al.
				7,756,284	B2	7/2010	Sjursen et al.
				D620,927	S	8/2010	Li
				D621,817	S	8/2010	Brickstad
				D622,265	S	8/2010	Rye
				D622,704	S	8/2010	Fahrendorff et al.
				7,778,410	B2	8/2010	Liu et al.
				D628,188	S	11/2010	Koch
				7,831,058	B2	11/2010	Chen
				D628,990	S	12/2010	Pedersen
				7,856,111	B2	12/2010	Balke et al.
				D633,481	S	3/2011	Chen
				D634,305	S	3/2011	Hoggarth
				D634,306	S	3/2011	Pedersen
				7,899,200	B2	3/2011	Karamuk et al.
				7,916,888	B2	3/2011	Sapiejewski et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,949,127 B2 5/2011 Pedersen et al.
 D640,670 S 6/2011 Rye
 7,965,855 B1 6/2011 Ham
 D641,008 S 7/2011 Lee et al.
 D641,747 S 7/2011 Gisborne
 7,986,803 B1 7/2011 Dekalb
 D645,458 S 9/2011 Silvestri et al.
 8,059,845 B2 11/2011 Bryant
 8,073,180 B2 12/2011 Bruckhoff
 8,111,854 B2 2/2012 Peng
 8,121,325 B2 2/2012 Atamaniuk et al.
 8,130,942 B2 3/2012 Howes et al.
 8,175,315 B2 5/2012 Tanaka et al.
 8,249,287 B2 8/2012 Silvestri et al.
 8,270,648 B2 9/2012 Murozaki
 8,331,593 B2 12/2012 Slemming et al.
 8,355,522 B2 1/2013 Annunziato et al.
 8,401,218 B2 3/2013 Son et al.
 8,548,186 B2 10/2013 Alwicker et al.
 8,553,923 B2 10/2013 Tiscareno et al.
 8,594,351 B2 11/2013 Harlow et al.
 8,625,834 B2 1/2014 Smith et al.
 8,630,436 B2 1/2014 Berg
 8,666,102 B2 3/2014 Bruckhoff et al.
 8,792,663 B2 7/2014 Cano et al.
 8,879,769 B2 11/2014 Smith et al.
 9,020,181 B2 4/2015 Matsuo et al.
 9,036,852 B2 5/2015 Silvestri et al.
 9,398,364 B2 7/2016 Monahan et al.
 10,334,344 B2 6/2019 Monahan et al.
 11,218,792 B2 1/2022 Monahan et al.
 11,234,065 B2 1/2022 Monahan et al.
 11,889,254 B2 1/2024 Monahan et al.
 2001/0043707 A1 11/2001 Leedom
 2002/0096391 A1 7/2002 Smith et al.
 2002/0131585 A1 9/2002 Jones et al.
 2002/0172386 A1 11/2002 Bayer
 2003/0091210 A1 5/2003 Baskerville
 2003/0174853 A1 9/2003 Howes et al.
 2003/0231783 A1 12/2003 Kah
 2004/0045558 A1 3/2004 Taylor et al.
 2004/0096077 A1 5/2004 Csensich et al.
 2004/0163653 A1 8/2004 Fleming
 2005/0008180 A1 1/2005 Smith et al.
 2005/0244026 A1 11/2005 Nielsen et al.
 2006/0042640 A1* 3/2006 Haussmann A61F 11/08
 128/864
 2006/0067556 A1 3/2006 Bailey et al.
 2006/0177080 A1 8/2006 Smith
 2006/0188122 A1 8/2006 Smith
 2006/0215864 A1 9/2006 Espersen et al.
 2007/0116309 A1 5/2007 Smith
 2007/0183615 A1 8/2007 Wurfel
 2007/0189570 A1 8/2007 Matsuo et al.
 2007/0254725 A1 11/2007 Smith
 2007/0280496 A1 12/2007 Karamuk et al.
 2007/0280497 A1 12/2007 Isberg et al.
 2008/0002835 A1 1/2008 Sapiejewski et al.
 2008/0013774 A1 1/2008 Hosaka et al.
 2008/0037817 A1 2/2008 Ewert et al.
 2008/0085030 A1 4/2008 Smith
 2008/0090622 A1 4/2008 Kim et al.
 2008/0144877 A1 6/2008 Ham et al.
 2008/0159577 A1 7/2008 Smith
 2008/0181441 A1 7/2008 Smith
 2008/0181444 A1 7/2008 Bryant
 2008/0247561 A1 10/2008 Smith
 2008/0253605 A1 10/2008 Smith
 2009/0041284 A1 2/2009 Tanaka et al.
 2009/0052702 A1 2/2009 Murphy et al.
 2009/0092269 A1 4/2009 Nielsen et al.
 2009/0095566 A1 4/2009 Leong et al.
 2009/0101433 A1 4/2009 Stiehl et al.
 2009/0123010 A1 5/2009 Cano et al.
 2009/0141921 A1 6/2009 Perkins et al.

2009/0141923 A1 6/2009 Smith
 2009/0180654 A1 7/2009 Nielsen et al.
 2009/0202094 A1 8/2009 Ammitzboll et al.
 2009/0202097 A1 8/2009 Tiscareno et al.
 2009/0202098 A1 8/2009 Chan et al.
 2009/0214065 A1* 8/2009 Dahl H04R 1/1083
 381/328
 2009/0226025 A1 9/2009 Howes et al.
 2009/0323993 A1 12/2009 Slemming et al.
 2010/0027824 A1 2/2010 Atamaniuk et al.
 2010/0098285 A1 4/2010 Kusuda et al.
 2010/0278364 A1 11/2010 Berg
 2011/0002498 A1 1/2011 Wong et al.
 2011/0123059 A1 5/2011 Hu
 2011/0176699 A1 7/2011 Lin
 2011/0176700 A1 7/2011 Hashimoto
 2011/0182454 A1 7/2011 Larsen et al.
 2011/0255729 A1 10/2011 Tan et al.
 2011/0261988 A1 10/2011 Kromann et al.
 2012/0063622 A1 3/2012 Bruckhoff et al.
 2012/0128192 A1 5/2012 Burgett et al.
 2012/0140967 A1 6/2012 Aubert
 2012/0217087 A1 8/2012 Ambrose et al.
 2012/0237068 A1* 9/2012 Fretz H04R 25/656
 381/328
 2014/0241563 A1 8/2014 Monahan et al.
 2014/0270315 A1 9/2014 Burgett et al.
 2015/0117695 A1 4/2015 Barrentine et al.
 2015/0118961 A1 4/2015 Petit et al.
 2015/0121347 A1 4/2015 Petit et al.
 2015/0215693 A1 7/2015 Sandanger
 2019/0223747 A1 7/2019 Chou
 2022/0201378 A1 6/2022 Monahan et al.

FOREIGN PATENT DOCUMENTS

CN 1173810 2/1998
 CN 2459840 11/2001
 CN 101094760 12/2007
 CN 101297593 10/2008
 CN 102132587 7/2011
 CN 102742296 10/2012
 CN 101523928 11/2012
 CN 101188873 3/2013
 DE 351644 4/1922
 DE 8328154 2/1984
 DE 29718483 2/1999
 DE 202011002165 5/2011
 EP 368125 5/1990
 EP 421681 4/1991
 EP 786241 7/1997
 EP 1355508 10/2003
 EP 1377113 1/2004
 EP 1448014 8/2004
 EP 1594340 11/2005
 EP 1429580 5/2006
 EP 1874080 1/2008
 EP 2071867 11/2017
 FR 2437802 4/1980
 GB 239478 5/1926
 GE 365962 1/1932
 JP 074473 8/1927
 JP S584754 1/1983
 JP S58-104077 7/1983
 JP S60-40187 9/1985
 JP 63-079500 4/1988
 JP H-457991 5/1992
 JP H11-275693 10/1999
 JP 2000-115876 4/2000
 JP 2001-333484 11/2001
 JP 2002-058086 2/2002
 JP 2005-073144 3/2005
 JP 2005-184579 7/2005
 JP 2008-017473 1/2008
 JP 2008-092356 4/2008
 JP 4088841 5/2008
 JP 2009-542056 11/2009
 JP 3159710 5/2010
 JP 2011-524703 9/2011

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	WO 1993025053	12/1993
WO	WO 1996037052	11/1996
WO	WO 1999031935	6/1999
WO	WO 1999039544	8/1999
WO	WO 2001050813	7/2001
WO	WO 2001050993	7/2001
WO	WO 2003075608	9/2003
WO	WO 2004068896	8/2004
WO	WO 2006007541	1/2006
WO	WO 2006104981	10/2006
WO	WO 2007014950	2/2007
WO	WO 2007028659	3/2007
WO	WO 2008041396	4/2008
WO	WO 2008083148	7/2008
WO	WO 2008086286	7/2008
WO	WO 2009018825	2/2009
WO	WO 2009030229	3/2009
WO	WO 2009077145	6/2009
WO	WO 2009086555	7/2009
WO	WO 2009115618	9/2009
WO	WO 2009153221	12/2009
WO	WO 2010031775	3/2010
WO	WO 2010040350	4/2010
WO	WO 2010040351	4/2010
WO	WO 2010040370	4/2010
WO	WO 2010131426	11/2010
WO	WO 2011007448	1/2011
WO	WO 2012024226	2/2012

OTHER PUBLICATIONS

Abel et al., "An investigation of the attenuation provided by the Surefire EP3 Sonic Defender earplug," Defense R&D Canada, May 2008, 36 pages.

ABT Electronics [online], "ABT Electronics: Bose IE2 and MIE2 In Ear Headphone Review," Aug. 25, 2010, retrieved on Apr. 29, 2024, retrieved from URL<https://www.youtube.com/watch?v=C9UHI_eS4Gc>, 28 pages [video submission].

Bauer et al., "Stakeholders forum on hearing enhancement," RESNA Conference, Reno Nevada, 2001.

Bose.com [online], "SoundSport® In-Ear Headphones—Apple Devices," available on or before Aug. 15, 2020, retrieved on Jul. 3, 2024, retrieved from URL<https://www.bose.cn/zh_cn/products/headphones/earphones/soundsport-in-ear-headphones-appledevices.html#v=soundsport_ie_headphones_ii_apple_charcoal>, 11 pages (with Machine Translation).

Bose.com [online], "SoundSport® In-Ear Headphones—Samsung and Android™ Devices," available on or before Sep. 8, 2020, retrieved on Jul. 3, 2024, retrieved from URL<https://www.bose.cn/zh_cn/products/headphones/earphones/soundsport-in-ear-headphones-samsungdevices.html#v=soundsport_ie_headphones_ii_samsung_charcoal>, 12 pages (with Machine Translation).

Chinese Office Action for Appln. No. 2012800375228, mailed Nov. 5, 2015.

Chinese Office Action in Chinese Appln. No. 2016105673488, mailed Aug. 30, 2019, 2 pages (English translation only).

Cnet.com [online], "Bose debuts new in-ear headphones," Aug. 16, 2010, retrieved on Apr. 29, 2024, retrieved from URL<<https://www.cnet.com/culture/bose-debuts-new-in-ear-headphones/>>, 4 pages.

Cyberindian.net [online], "Bose IE2, MIE2 and MIE2i in-ear Headphones Launched; Featuring StayHear Tips," Aug. 25, 2010, retrieved on Jan. 15, 2018, retrieved from URL<<http://www.cyberindian.net/2010/08/25/bose-ie2-mie2-and-mie2i-in-e>>, 2 pages.

EP Extended European Search Report in European Appln. No. 21154253.5, mailed Jun. 17, 2021, 10 pages.

EPO Communication in EP Appln. No. 12741458.9, mailed Jun. 24, 2019, 6 pages.

European Search Report, EP 17 16 8500, mailed Aug. 14, 2017, 8 pages.

Exhibit 1—Preliminary Identification of Exemplary Prior Art to U.S. Pat. No. 8,311,253, 6 pages.

Extended European Search Report in EP Appln. No. 18212433.9-1210, mailed Mar. 22, 2019, 7 pages.

Extended European Search Report in EP Appln. No. 18212436.2-1210, mailed Mar. 20, 2019, 7 pages.

Extended European Search Report in EP Appln. No. 18212439.6, mailed Mar. 20, 2019, 7 pages.

First Chinese Office Action for Chinese Patent Appln. No. 201410423949.2, mailed Mar. 2, 2017, 7 pages.

First Office Action CN Appln. No. 201710358826.9, mailed Oct. 24, 2018, 10 pages (with English Translation).

International Search Report and the Written Opinion of the International Searching Authority for PCT/US2012/047975 mailed Mar. 18, 2013.

International Search Report and Written Opinion International Appln. No. PCT/US2011/048233, mailed on Oct. 27, 2011.

Jabra C100, C150 manual, www.jabra.com, available on or before Jul. 22, 2014.

Jabra ear gels, photographs taken by applicant to document product that was on sale, available on or before Jul. 22, 2014.

Japanese Office Action for Japanese Patent Appln. No. 2013-524913, mailed Dec. 2, 2013.

Japanese Office Action for Japanese Patent Appln. No. 2014-165091, mailed May 7, 2015.

Japanese Office Action for Japanese Patent Appln. No. 2014-522941, mailed Jan. 26, 2015.

Japanese Office Action for Japanese Patent Appln. No. 2015-154126, mailed Jul. 4, 2016.

Jawbone Prime manual, available on or before Jul. 22, 2014.

Notice of Reasons for Rejection JP Appln. No. 2017-074264, mailed Apr. 16, 2018, 9 pages (with English Translation).

Notification of Second Office Action CN Appln. No. 2014104239492, Aug. 29, 2017, 18 pages (English Translation).

Notification of Third Office Action CN Appln. No. 2014104239492, Jan. 24, 2018, 13 pages (English Translation).

Office Action in corresponding EP Appln. No. 17 168 500.1 mailed Jun. 8, 2018, 6 pages.

Office Action in corresponding EP Appln. No. 17 168 520.9 mailed Jun. 7, 2018, 6 pages.

Office Action in Japanese Appln. No. 2018-218137, mailed on Sep. 24, 2019, 8 pages (with Machine Translation).

Petition for Inter Partes Review, *Freebit AS*, Petitioner, v. *Bose Corporation*, Patent Owner, U.S. Pat. No. 9,036,853.

Petition for Inter Partes Review, *Freebit AS*, Petitioner, v. *Bose Corporation*, Patent Owner, U.S. Pat. No. 8,254,621.

Petition for Inter Partes Review, *Freebit AS*, Petitioner, v. *Bose Corporation*, U.S. Pat. No. 8,311,253.

Sempre-audio.at [online], "Bose IE2 Audio Headphone & Bose MIE2 Mobile Headset," Aug. 22, 2019, retrieved on Jan. 15, 2018, retrieved from URL<<https://plus.google.com/u/0/114694607938693346725?rel=author>>, 6 pages.

Surefire EarPro EP3 Sonic Defenders manual, www.surefire.com/hearingprotection, available on or before Jul. 22, 2014.

Techgoodies [online], "Auriculares BOSE IE2 in-ear con tecnología TriPort™ y Stay Hear™," Feb. 28, 2011, retrieved on Apr. 29, 2024, retrieved from URL<<https://www.youtube.com/watch?v=LaQG1GQoQtK>>, 19 pages [video submission].

EPO Communication in EP Appln. No. 21154253.5, mailed Feb. 14, 2025, 3 pages.

* cited by examiner

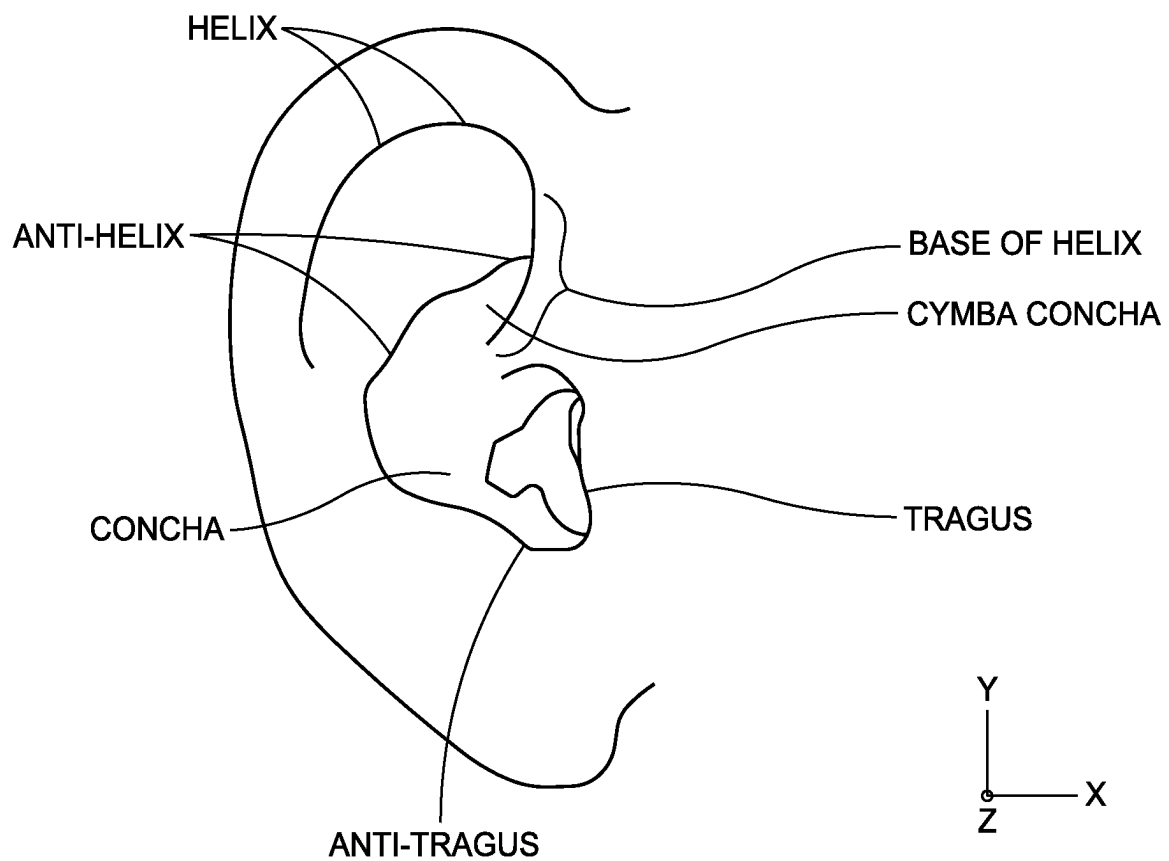


FIG. 1A

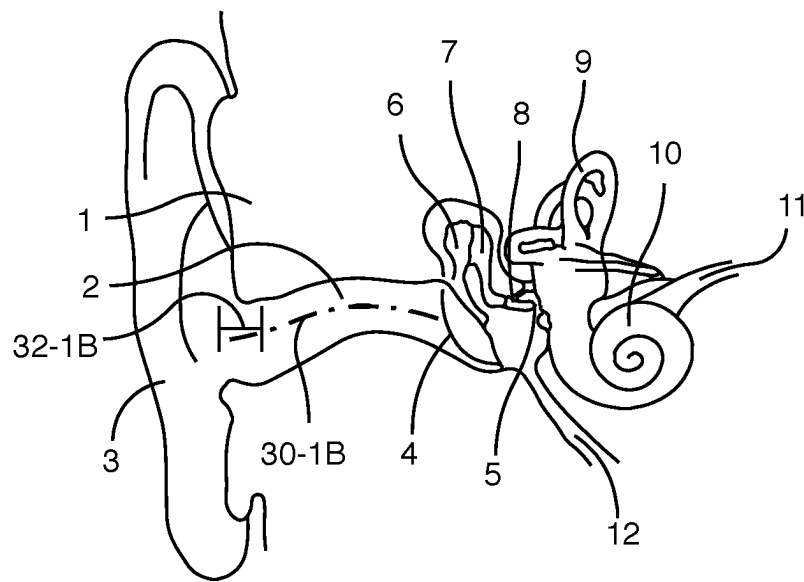


FIG. 1B

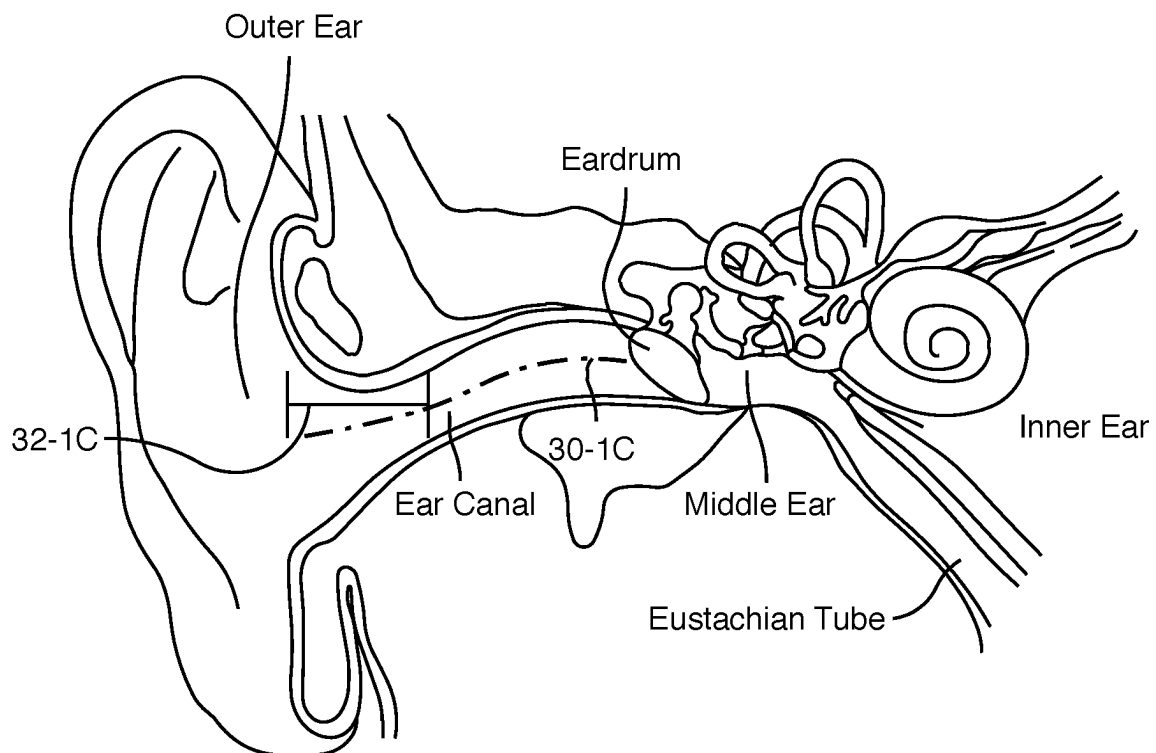


FIG. 1C

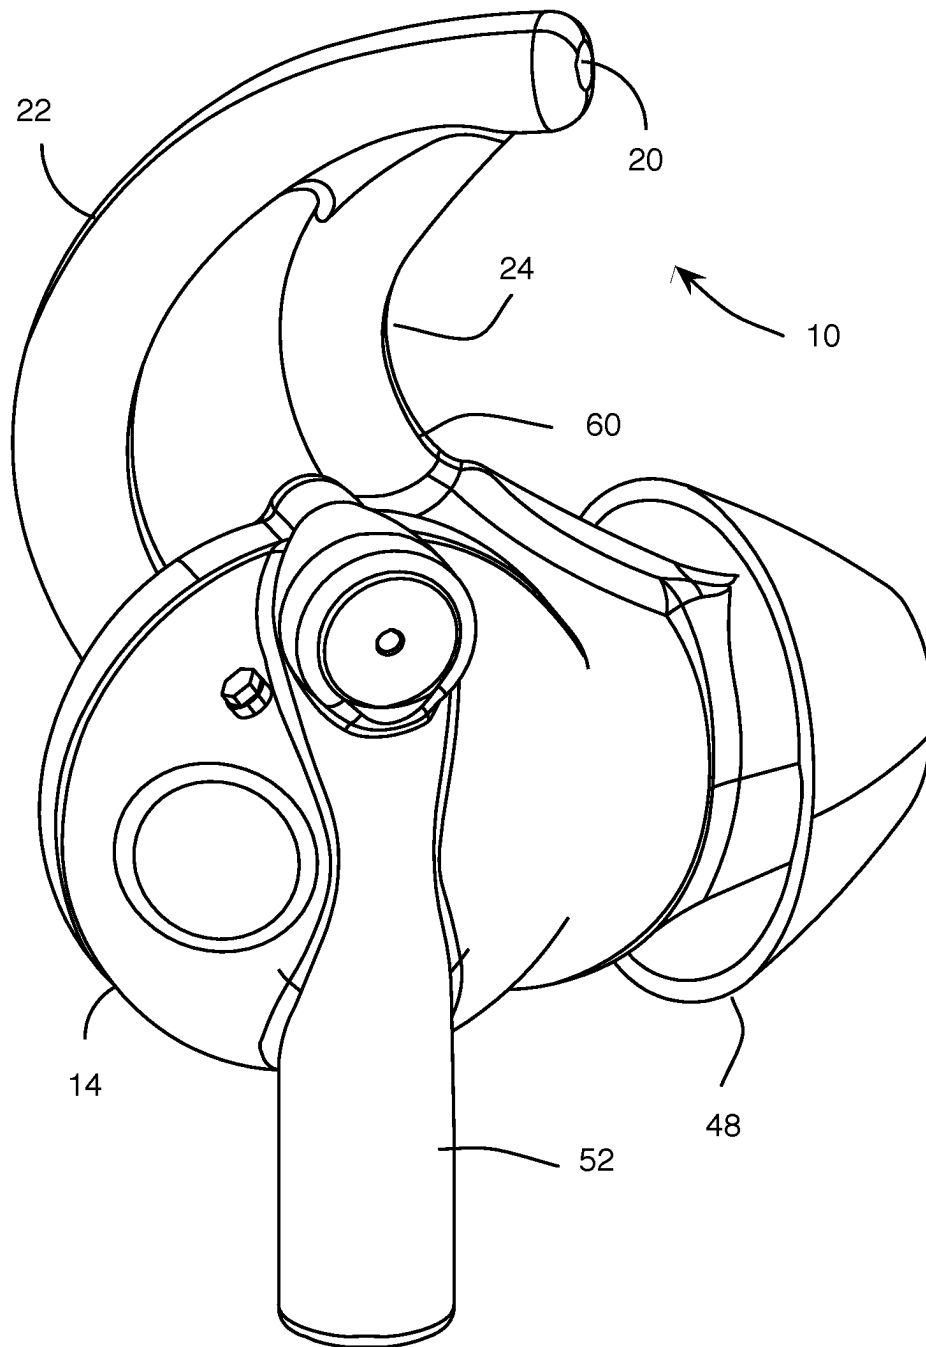


FIG. 2

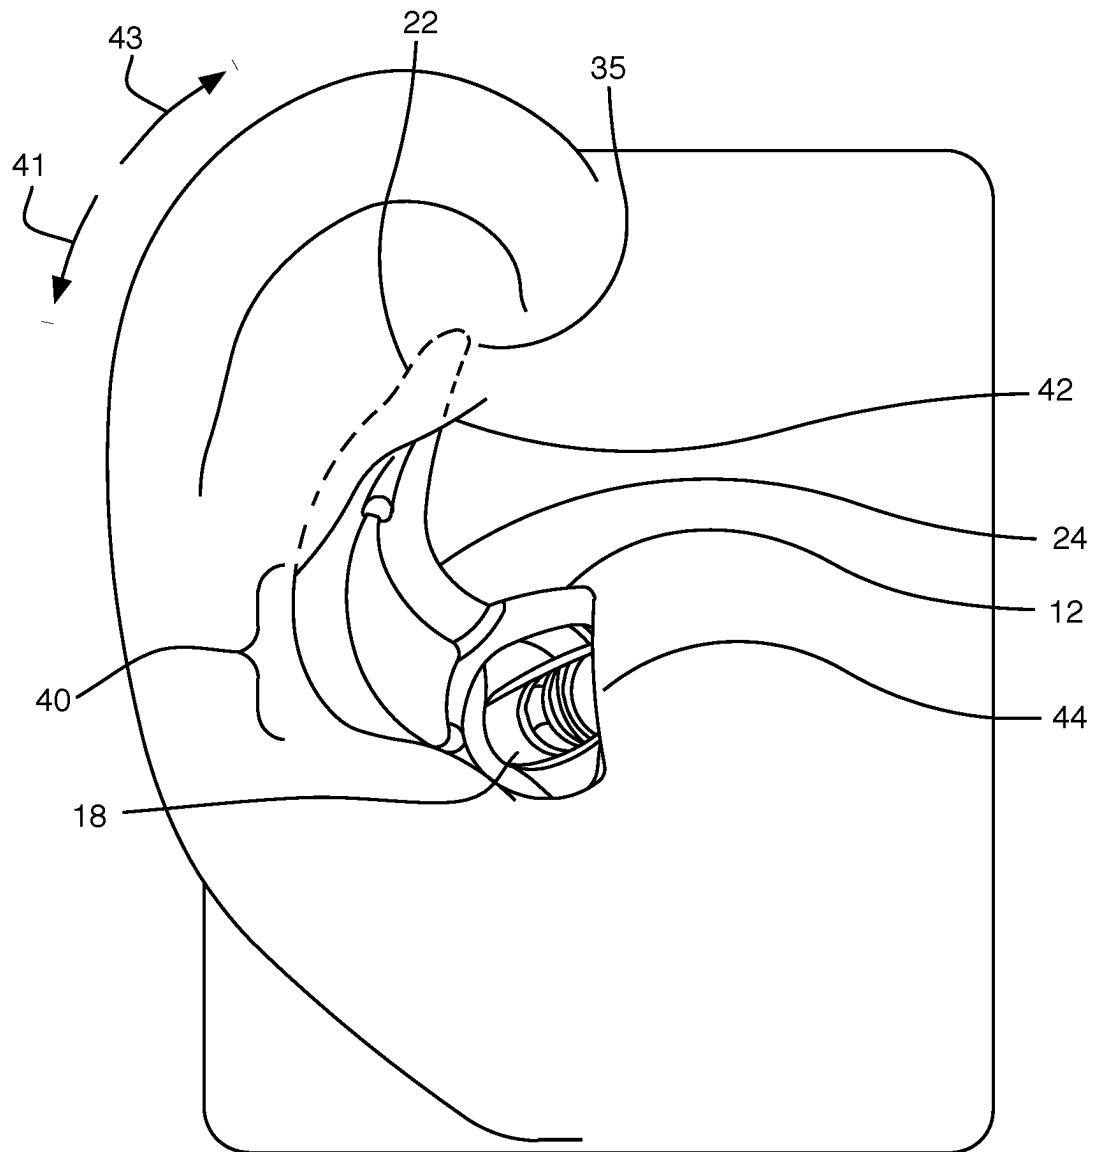


FIG. 3

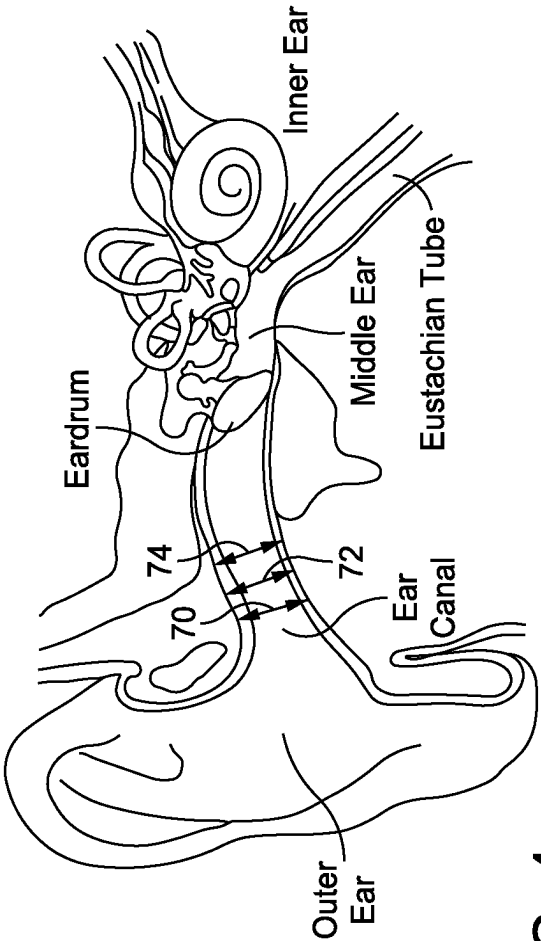


FIG. 4

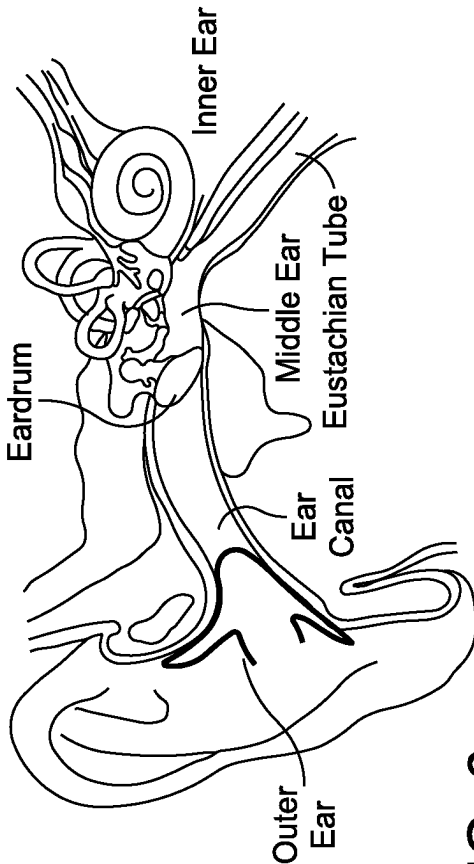
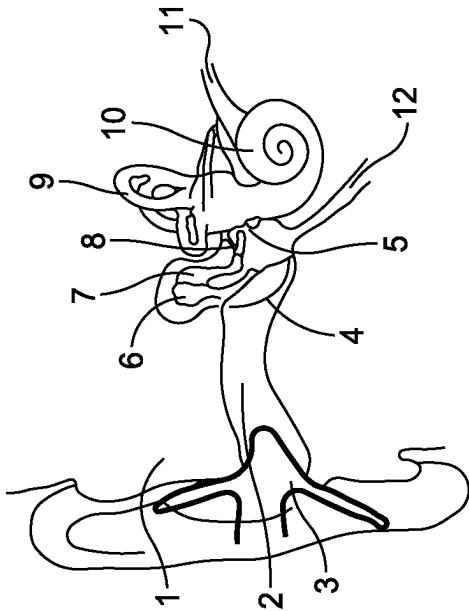
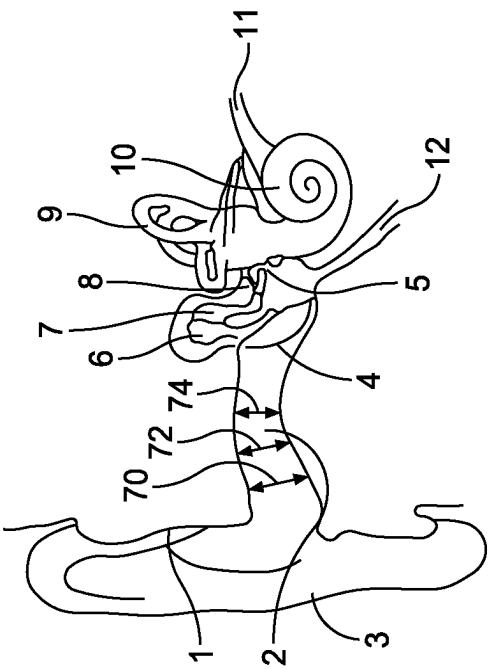


FIG. 6



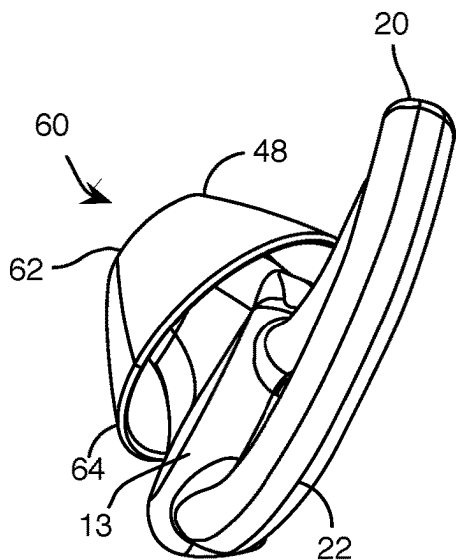


FIG. 5A

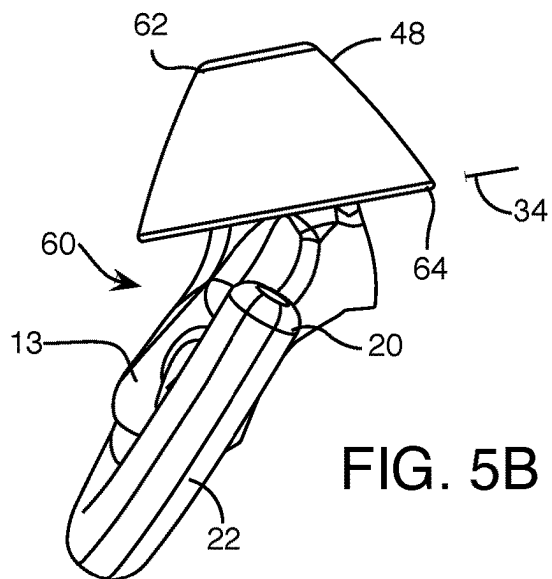


FIG. 5B

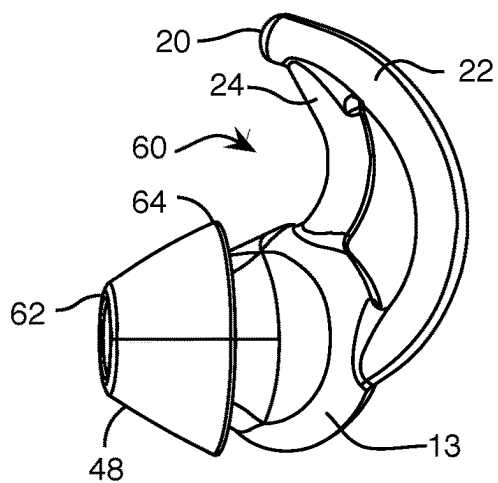


FIG. 5C

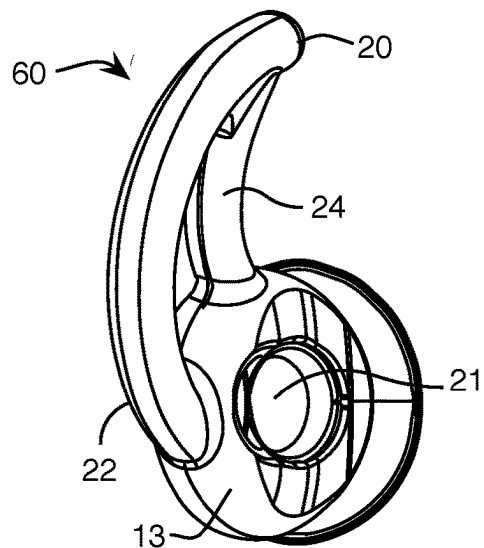


FIG. 5D

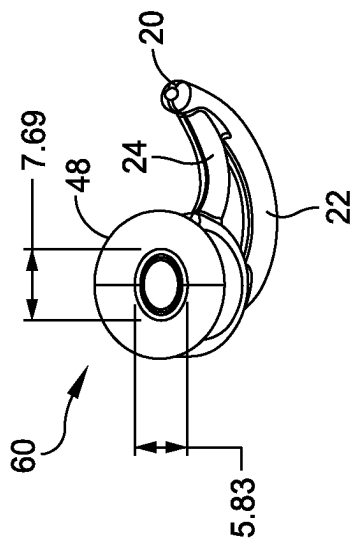


FIG. 7A

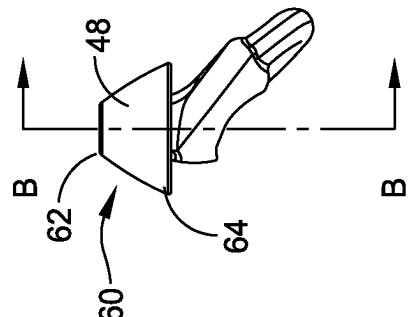


FIG. 7B



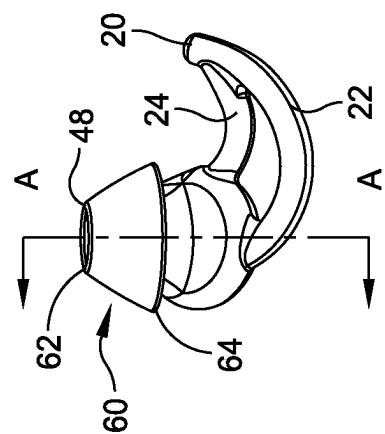


FIG. 7C

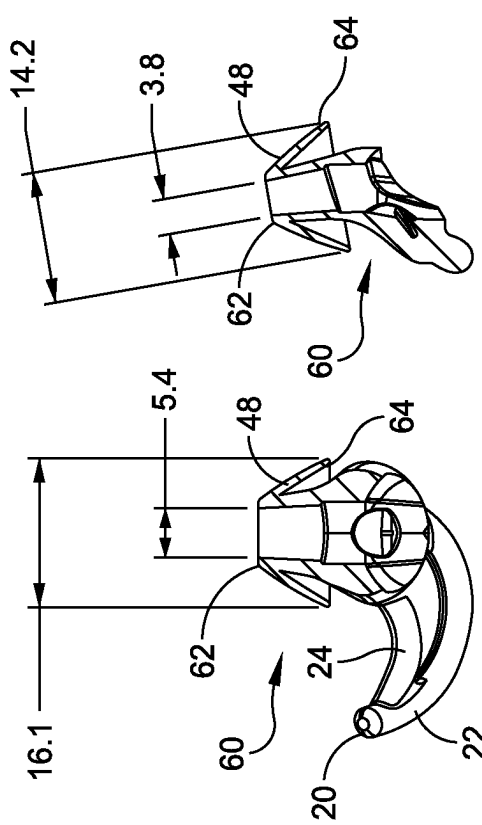

SECTION B-B

FIG. 8A

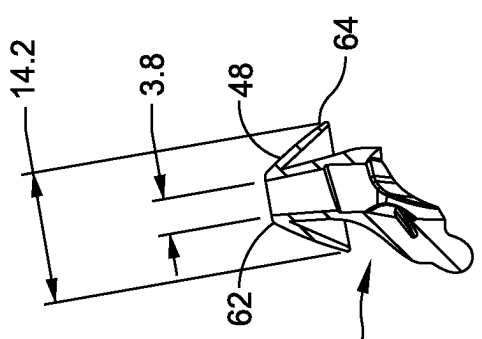

SECTION A-A

FIG. 8B

EARPIECE PASSIVE NOISE ATTENUATING**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a continuation of and claims priority to U.S. patent application Ser. No. 17/549,318, filed on Dec. 13, 2021, which is a continuation and claims priority to U.S. patent application Ser. No. 16/450,197, filed on Jun. 24, 2019 (now U.S. Pat. No. 11,234,065), which is a continuation and claims priority to U.S. patent application Ser. No. 16/265,685, filed on Feb. 1, 2019 (now U.S. Pat. No. 11,218,792), which is a continuation of and claims priority to U.S. patent application Ser. No. 15/137,632 filed Apr. 25, 2016 (now U.S. Pat. No. 10,334,344), which is a continuation of and claims priority to U.S. patent application Ser. No. 14/272,845, filed May 8, 2014 (now U.S. Pat. No. 9,398,364), which is a continuation of and claims priority to U.S. patent application Ser. No. 13/193,288 filed Jul. 28, 2011 (now U.S. Pat. No. 8,737,669), the entire contents of which are incorporated herein by reference.

BACKGROUND

This specification describes a structure for providing passive noise attenuation by an in-ear earpiece and for positioning and retaining the earpiece in the ear.

SUMMARY

In one aspect, an in-ear earpiece includes an acoustic driver; an acoustic passage to conduct sound waves radiated by the acoustic driver to an ear canal of a user; a positioning and retaining structure to engage features of the lateral surface of an ear of the user to position the earpiece and to hold the earpiece in place without any structure external to the earpiece; and a substantially conical structure configured so that the smaller end of the conical structure is smaller than the entrance to an ear canal of a user and so that the larger end of the conical structure is larger than the entrance to the ear canal of the user, formed of material that conforms to the entrance to the ear canal to seal the ear canal. The material may have a hardness of 30 Shore A or less. The material may have a modulus of 2 gf/mm or less. The material may be silicone rubber. The material may be a thermoplastic elastomer. The material may be a thermoplastic polyurethane. The positioning and retaining structure may include a first leg and a second leg attached to each other at an attachment end to form a tip and attached to a body of the earpiece at the other end. The positioning and retaining structure may provide at least three modes for preventing clockwise rotation of the earpiece past a rotational position. The modes may include an extremity of the tip contacting the base of the helix; the extremity of the tip becoming wedged under the anti-helix in the cymba concha region; and the inner leg contacting the base of the helix. The positioning and retaining structure may include an inner leg and an outer leg. The inner leg and the outer leg may be attached at an attachment end to the body and attached at a joined end to each other. With the earpiece in its intended position, the outer leg may be urged against the anti-helix at the rear of the concha, the body engages the ear canal; and at least one of the tip is under the anti-helix; or a portion of at least one of the body and the outer leg are under the anti-tragus. The positioning and retaining structure may include an inner leg and an outer leg attached at attachment end to each other and at a second end to an earpiece body. The inner leg and outer leg may be

arranged to provide at least three modes for preventing clockwise rotation of the earpieces. The modes may include the tip contacts the base of the helix; the tip becomes wedged under the anti-helix; and the inner leg contacts the base of the helix. The inner leg and the outer leg may be further arranged so that with the earpiece in its intended position, the outer leg is urged against the anti-helix at the rear of the concha, the body engages the ear canal; and at least one of the tip is under the anti-helix; or a portion of at least one of the body and the outer leg are under the anti-tragus. The substantially conical structure may include an opening there-through to conduct sound waves from the acoustic driver to the ear canal. The opening may be substantially elliptical in cross-section. The substantially conical structure may taper substantially linearly from the large end to the small end. The substantially conical structure may have a substantially uniform thickness. The material of the positioning and retaining structure of the user may have a different hardness than the substantially conical structure. The material of the structure to conduct sound waves radiated by the acoustic driver to an ear canal of a user may have a different hardness than the material of the positioning and retaining structure of the user and than the material of the substantially conical structure.

In another aspect, an eartip for an in-ear earpiece includes positioning and retaining structure to engage features of the lateral surface of an ear to position the earpiece and to hold the earpiece in place without any structure external to the earpiece and a substantially conical structure configured so that the smaller end of the conical structure is smaller than the entrance to an ear canal of a user and so that the larger end of the conical structure is larger than the entrance to the ear canal of the user, formed of material that conforms to the entrance to the ear canal to seal the ear canal. The positioning and retaining structure and the substantially conical structure may include the same material. The positioning and retaining structure and the substantially conical structure may be a unitary structure.

Other features, objects, and advantages will become apparent from the following detailed description, when read in connection with the following drawing, in which:

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1A is a view of the lateral surface of the human ear; FIGS. 1B and 1C are exemplary cross-sections of the human ear;

FIG. 2 is an isometric view of an earpiece;

FIG. 3 is a lateral view of an earpiece and a human ear; FIG. 4 shows cross-sections of two exemplary human ears;

FIGS. 5A-5D are views of an earpiece;

FIG. 6 shows cross-sections of two exemplary human ears;

FIGS. 7A-7C are views of a portion of the earpiece of FIGS. 2 and 5A-5D; and

FIGS. 8A and 8B are cross-sections of the earpiece portions of FIGS. 7A-7C.

DETAILED DESCRIPTION

This specification describes an in-ear earpiece that is designed to fit in the right ear. An earpiece that is designed to fit in the left ear is a mirror image of the earpiece described below, and operates according to the same principles, and is not described herein.

3

FIG. 1A shows the lateral surface of a human right ear, with some features identified. There are many different ear sizes and geometries. Some ears have additional features that are not shown in FIG. 1A. Some ears lack some of the features that are shown in FIG. 1A. Some features may be more or less prominent than are shown in FIG. 1A. FIGS. 1B and 1C show two exemplary cross-sections of the human ear, with some features identified. The ear canal is an irregularly shaped cylinder with a variable cross sectional area and a centerline that is not straight. Among the features identified is the entrance to the ear canal and the main portion of the ear canal. In this specification the entrance to the ear canal refers to the portion of the ear canal near the concha where the walls of the ear canal are substantially non-parallel to the centerline of the ear canal. The precise structure of the human ear varies widely from individual to individual. For example, in the cross section of FIG. 1B, there is a relatively sharp transition from ear canal walls that are non-parallel to a centerline 30-1B of the ear canal to walls that are substantially parallel to a centerline of the ear canal, so the entrance 32-1B to the ear canal is relatively short. In the cross-section of FIG. 1C, there is a more gradual transition from walls that are non-parallel to a centerline of the ear canal to walls that are substantially parallel to a centerline 30-1C of the ear canal, so the entrance 32-1C to the ear canal is relatively long.

FIG. 2 shows an earpiece 10. The earpiece 10 may include a stem 52 for positioning cabling and the like, an acoustic driver module 14, and a tip 60 (more clearly identified in FIGS. 5A-5D). Some earpieces may lack the stem 52 but may include electronics modules (not shown) for wireless communicating with external devices. Other earpieces may lack the stem and the acoustic driver module and may function as passive earplugs. The tip 60 includes a positioning and retaining structure 20, which in this example includes an outer leg 22 and an inner leg 24. The tip also includes a sealing structure 48.

In operation, the earpiece 10 is placed in the ear and is oriented and held in place by positioning and retaining structure 20 and other portions of the earpiece. The tip 60 includes a passageway to conduct sound waves radiated by an acoustic driver in the acoustic driver module 14 to the ear canal. Extending from the tip 60 is the positioning and retaining structure 20 that holds the earpiece in position, without significant contribution from the portions of the eartip that engage the ear canal and without any structure external to the eartip. The positioning and retaining structure 20 includes at least an outer leg 22 and an inner leg 24 that are joined to other portions of the eartip at one end and are joined to each other at the other end. The outer leg is curved to generally follow the curve of the anti-helix and/or the cymba concha at the rear of the concha. In general, the compliance/stiffness of the entire positioning and retaining structure is more important than the compliance/stiffness of the material from which the positioning and retaining structure is made or the compliance/stiffness of the any one component of the positioning and retaining structure. The outer leg 22 and inner leg 24 may lie in a plane.

Referring now to FIG. 3, the earpiece tip is placed in the ear and pushed gently inward and preferably rotated counter-clockwise as indicated by arrow 43. Pushing the body into the ear causes the outer leg 22 to seat in position underneath the anti-helix, and causes the outlet section of the tip 48 (for convenience, not shown in this view) to enter the ear canal by a small amount, depending on the dimensions and geometry of the entrance to the ear canal.

4

The body is then rotated clockwise as indicated by arrow 41 until a condition occurs so that the body cannot be further rotated. The conditions could include: the extremity 35 of the tip may contact the base of the helix; inner leg 24 may contact the base of the helix; or the extremity 35 may become wedged behind the anti-helix in the cymba concha region. Though the positioning and retaining structure provides all three conditions (hereinafter referred to as “modes”), not all three conditions will happen for all users, but at least one of the modes will occur for most users. Which condition(s) occur(s) is dependent on the size and geometry of the user’s ears.

Rotating the earpiece clockwise also causes the extremity and outer leg to engage the cymba concha region and seat beneath the anti-helix. When the body and positioning and retaining structure 20 are in place, the positioning and retaining structure and/or body contact the ear of most people in at least two, and in many people more, of several ways: a length 40 of the outer leg 22 contacts the anti-helix at the rear of the concha; the extremity 35 of the positioning and retaining structure 20 is underneath the anti-helix; portions of the outer leg 22 or tip 60 (of previous figures) or both are underneath the anti-tragus; and the tip 60 contacts at the entrance to the ear canal under the tragus. The two or more points of contact hold the earpiece in position, providing greater stability. The distributing of the force, and the compliance of the portions of the body and the outer leg that contact the ear lessens pressure on the ear, providing a more comfortable fit.

It is desirable to place the earpiece in the ear so that it is oriented properly, so that it is stable (that is, stays in the ear), so that it is comfortable, and, for some applications so that it provides significant passive attenuation of ambient noise. One way of providing stability and proper orientation is described above and is described more completely in U.S. patent application Ser. No. 12/860,531, incorporated herein by reference in its entirety.

One apparatus for providing significant passive attenuation is a structure (for example a “Christmas tree” structure, as described in U.S. Pat. App. 2004/0163653, a “mushroom” structure, as described by U.S. Pat. No. 5,957,136, or disk shaped flanges, such as described in U.S. Pat. No. 6,129,175, or similar structures) that fit in the main portion of the ear canal and seals to the ear canal itself by exerting radial pressure on the walls of the main portion of the ear canal, as indicated by arrows 70, 72, and 74 of FIG. 4. The radial pressure may result from, or be supplemented by, inward clamping pressure. This apparatus may have some undesirable side effects, such as poor sealing, discomfort, or even pain, because the geometry and size of ear canals vary widely from individual to individual and because the apparatus may intrude farther into the ear canal than desired in some individuals. The main portion of the ear canal, particularly close to the middle ear, is very sensitive, so the farther the structure extends into the ear, the more uncomfortable it is likely to be. Another apparatus for providing significant passive attenuation is structure, apart from the earpiece itself, that provides inward clamping pressure that urges a conformable structure against the side of the head or the side of the ear. Examples include headbands of conventional headphones and yokes of stethoscopes, for example as described in U.S. Pat. No. 4,055,233. However, for in-the-ear earpieces, light weight and small size are desirable features, and headbands and yokes add weight and structure.

The earpiece of FIG. 2 includes a tip that provides orientation, stability, and good sealing to the entrance to the ear canal and to ear structure outside the ear canal, without

5

excessive radial pressure, and without inward clamping pressure provided by a source not included in the earpiece.

FIGS. 5A-5D shows several views of the tip 60. Not all elements of the tip 60 are identified in all of the views. The tip 60 includes positioning and retaining structure 20, a passageway 21, and sealing structure 48. The sealing structure 48 comprises a frusto-conical structure. The frusto-conical structure may have an elliptical or oval cross section (as viewed in FIG. 7A below), with walls that taper (as viewed in FIGS. 7B, 8A and 8B below) substantially linearly. In one implementation, the structure of the sealing structure and the material from which it is made cause the modulus, when measured in the direction of the arrow 34 of FIG. 5B is in the range of 0.2 to 2 gf/mm. Examples of appropriate materials include silicones, TPUs (thermoplastic polyurethanes) and TPEs (thermoplastic elastomers).

The smaller end 62 of the tip is dimensioned so that it fits inside the ear canal of most users by a small amount and so that the sealing structure 48 contacts the entrance to the ear canal but does not contact the inside of the ear canal. The larger end 64 of the tip is dimensioned so that it is larger than the entrance to the ear canal of most users.

The positioning and retaining structure 20 and the sealing structure 48 may be a single piece, made of the same material, for example a very soft silicone rubber, with a hardness of 30 Shore A or less. The walls of the sealing structure 48 may be of a uniform thickness which may be very thin, for example, less than one mm at the thickest part of the wall and may taper to the base of the frusto-conical structure so that the walls deflect easily, thereby conforming easily to the contours of the ear and providing a good seal and good passive attenuation without exerting significant radial pressure on the ear canal. Since the different parts of the earpiece serve different functions, it may be desirable for different portions of the earpiece to be made of different materials, or materials with different hardnesses or moduli. For example, hardness (durometer) of the retaining structure 20 may be selected for comfort (for example 12 Shore A), the hardness of the tip 48 may be slightly higher (for example 20 Shore A) for better fit and seal, and the hardness of the part of the eartip that mechanically couples the eartip to the acoustic module 14 may be higher (for example 70 Shore A) for better retention and seal to the part of the eartip that mechanically couples the eartip to the acoustic module 14 and in some instances so that the passage through which sound waves travel has a more consistent shape and dimensions.

An eartip according to FIGS. 5A-5D seals to the entrance of the ear canal to provide passive attenuation and exerts little radial pressure against the main portion of the ear canal, or does not contact the main portion of the ear canal at all, as shown in FIG. 6

FIGS. 7A-7C show external views and FIGS. 8A and 8B show cross-sectional views, of the tip 60, with dimensions from a typical embodiment. In the implementations of FIGS. 7A-7C and 8A and 8B, the sealing structure 48 is elliptical, with a major axis of 7.69 mm and a minor axis of 5.83 mm at the smaller end, and a major axis of 16.1 mm and a minor axis of 14.2 mm at the larger end. A sealing structure with these dimensions fits into the ear canal of many users so that the smaller end protrudes into the ear canal by a small amount and does not contact the walls of the ear canal, so that the larger end does not fit in the ear canal, and so that the sealing structure 48 engages the entrance to the ear canal. Smaller or larger versions may be used for users with below- or above-averaged-sized ear, including children. Versions with similar overall size but different aspect ratios between

6

major and minor axes may be provided for users with ear canal entrances that are more- or less-circular than average.

Numerous uses of and departures from the specific apparatus and techniques disclosed herein may be made without departing from the inventive concepts. Consequently, the invention is to be construed as embracing each and every novel feature and novel combination of features disclosed herein and limited only by the spirit and scope of the appended claims.

What is claimed is:

1. An ear tip for an earpiece, comprising:
 - a body configured to fit within the concha of a wearer's ear;
 - an outlet extending towards the ear canal of the wearer's ear when the ear tip is placed in the wearer's ear;
 - a sealing structure at an end of the outlet; and
 - a retaining structure coupled to the body and having a first portion configured to engage the antihelix of the wearer's ear, and a second, different portion configured to engage the antitragus of the wearers ear;
 wherein, when the ear tip is placed in the wearer's ear, the retaining structure applies a pressure to the antihelix of the wearer's ear and the antitragus of the wearer's ear to orient the sealing structure so that the sealing structure is positioned at the entrance of the ear canal.
2. The ear tip of claim 1, wherein, when the ear tip is placed in the wearer's ear, the first portion of the retaining structure is positioned underneath at least part of the antihelix of the wearer's ear, or the second portion of the retaining structure is positioned underneath at least part of the antitragus of the wearer's ear.
3. The ear tip of claim 1, wherein clockwise rotation of the ear tip within the wearer's ear causes the retaining structure to engage at least one of the antihelix of the wearer's ear or the antitragus of the wearer's ear.
4. The ear tip of claim 1, wherein the first portion of the retaining structure is shaped to generally follow the antihelix of the wearer's ear, and wherein the second portion of the retaining structure is shaped to generally follow the antitragus of the wearer's ear.
5. The ear tip of claim 1, wherein, when the ear tip is placed in the wearer's ear, the sealing structure forms a substantial seal with the flesh of the entrance of the ear canal of the wearer's ear.
6. The ear tip of claim 1, wherein:
 - the body comprises a generally planar surface that rests against at least a portion of the concha;
 - the outlet extends from the body at a non-right angle relative to a generally planar surface of the body; and
 - the sealing structure extends from the end of the outlet such that a central axis of the sealing structure is substantially the same non-right angle relative to the generally planar surface of the body of the outlet.
7. The ear tip of claim 1, wherein, when the ear tip is placed in the wearer's ear, the body prevents the outlet and the sealing structure from contacting the ear canal beyond the entrance.
8. The ear tip of claim 1, wherein the sealing structure seals the entrance to the ear canal by conforming to the entrance to the ear canal when pressed towards the ear canal.
9. The ear tip of claim 1, wherein:
 - the sealing structure has a frusto-conical shape having a narrow end and a wide end;
 - the sealing structure is joined to the outlet at the narrow end of the frusto-conical shape; and
 - the wide end of the frusto-conical shape is larger than a typical ear canal is wide.

7

10. The ear tip of claim 9, wherein the sealing structure is shaped to taper substantially linearly from the wide end to the narrow end.

11. The ear tip of claim 1, wherein the sealing structure comprises a thin layer of material that at least partially surrounds the outlet.

12. The ear tip of claim 1, wherein:

the body is coupled to an acoustic driver of the earpiece; and

the outlet comprises an acoustic passage that (i) comprises an opening for receiving sound waves from the acoustic driver, and (ii) conducts the sound waves to the ear canal of the wearer's ear.

13. The ear tip of claim 1, wherein the retaining structure comprises a material having a lower hardness than a material of the outlet.

14. An earpiece, comprising:

a body configured to fit within the concha of a wearer's ear;

an outlet extending towards the ear canal of the wearer's ear when the earpiece is placed in the wearer's ear;

a sealing structure extending from an end of the outlet; and

a retaining structure coupled to the body and having a first portion configured to engage the antihelix of the wearer's ear, and a second, different portion configured to engage the antitragus of the wearers ear;

wherein, when the earpiece is placed in the wearer's ear, the retaining structure applies a pressure to the antihelix of the wearer's ear and the antitragus of the wearer's

8

ear to orient the sealing structure so that the sealing structure is positioned at the entrance of the ear canal.

15. The earpiece of claim 14, wherein, when the earpiece is placed in the wearer's ear, the first portion of the retaining structure is positioned underneath at least part of the antihelix of the wearer's ear, or the second portion of the retaining structure is positioned underneath at least part of the antitragus of the wearer's ear.

16. The earpiece of claim 14, wherein clockwise rotation of the earpiece within the wearer's ear causes the retaining structure to engage at least one of the antihelix of the wearer's ear or the antitragus of the wearer's ear.

17. The earpiece of claim 14, wherein the first portion of the retaining structure is shaped to generally follow the antihelix of the wearer's ear, and wherein the second portion of the retaining structure is shaped to generally follow the antitragus of the wearer's ear.

18. The earpiece of claim 17, wherein the sealing structure comprises a thin layer of material that at least partially surrounds the outlet.

19. The earpiece of claim 17, wherein the body prevents the outlet and sealing structure from contacting the ear canal beyond the entrance of the ear canal.

20. The earpiece of claim 14, wherein:

the sealing structure has a frusto-conical shape having a narrow end and a wide end;

the sealing structure is joined to the outlet at the narrow end of the frusto-conical shape; and

the wide end of the frusto-conical shape is larger than a typical ear canal is wide.

* * * * *