



US 20250260808A1

(19) **United States**

(12) **Patent Application Publication**
FILIPPOV et al.

(10) **Pub. No.: US 2025/0260808 A1**

(43) **Pub. Date: Aug. 14, 2025**

(54) **DEVICE AND METHOD FOR
INTRA-PREDICTION**

H04N 19/159 (2014.01)

H04N 19/176 (2014.01)

(71) Applicant: **HUAWEI TECHNOLOGIES CO.,
LTD.**, Shenzhen (CN)

(52) **U.S. Cl.**

CPC *H04N 19/117* (2014.11); *H04N 19/105*
(2014.11); *H04N 19/159* (2014.11); *H04N*
19/176 (2014.11)

(72) Inventors: **Alexey Konstantinovich FILIPPOV**,
Moscow (RU); **Vasily Alexeevich**
RUFITSKIY, Moscow (RU)

(57)

ABSTRACT

(21) Appl. No.: **19/025,767**

(22) Filed: **Jan. 16, 2025**

Related U.S. Application Data

(63) Continuation of application No. 18/067,599, filed on
Dec. 16, 2022, now Pat. No. 12,244,795, which is a
continuation of application No. 17/247,859, filed on
Dec. 28, 2020, now Pat. No. 11,563,939, which is a
continuation of application No. PCT/RU2018/
000432, filed on Jun. 29, 2018.

Publication Classification

(51) **Int. Cl.**

H04N 19/117 (2014.01)

H04N 19/105 (2014.01)

The present application relates to the field of picture processing, for example still picture/image and/or video picture/image coding. In particular, the application relates to a device and corresponding method for intra-predicting a prediction block of a video image. The device is configured to select a directional intra-prediction mode from a set of directional intra-prediction modes, where each directional intra-prediction mode corresponds to a different intra-prediction angle. Further, the device is configured to select a filter from a set of filters based on the selected directional intra-prediction mode. Further, the device is configured to determine, for a prediction sample of the prediction block, a reference sample from a set of reference samples based on the selected directional intra-prediction mode, and apply the selected filter to the determined reference sample.

800

801

Select a directional intra-prediction mode from a set of directional intra-prediction modes, wherein each directional intra-prediction mode corresponds to a different intra-prediction angle

802

Select a filter from a set of filters based on the selected directional intra-prediction mode

803

Determine, for a given prediction sample of the prediction block, a reference sample from a set of reference samples based on the selected directional intra-prediction mode

804

Apply the selected filter to the determined reference sample

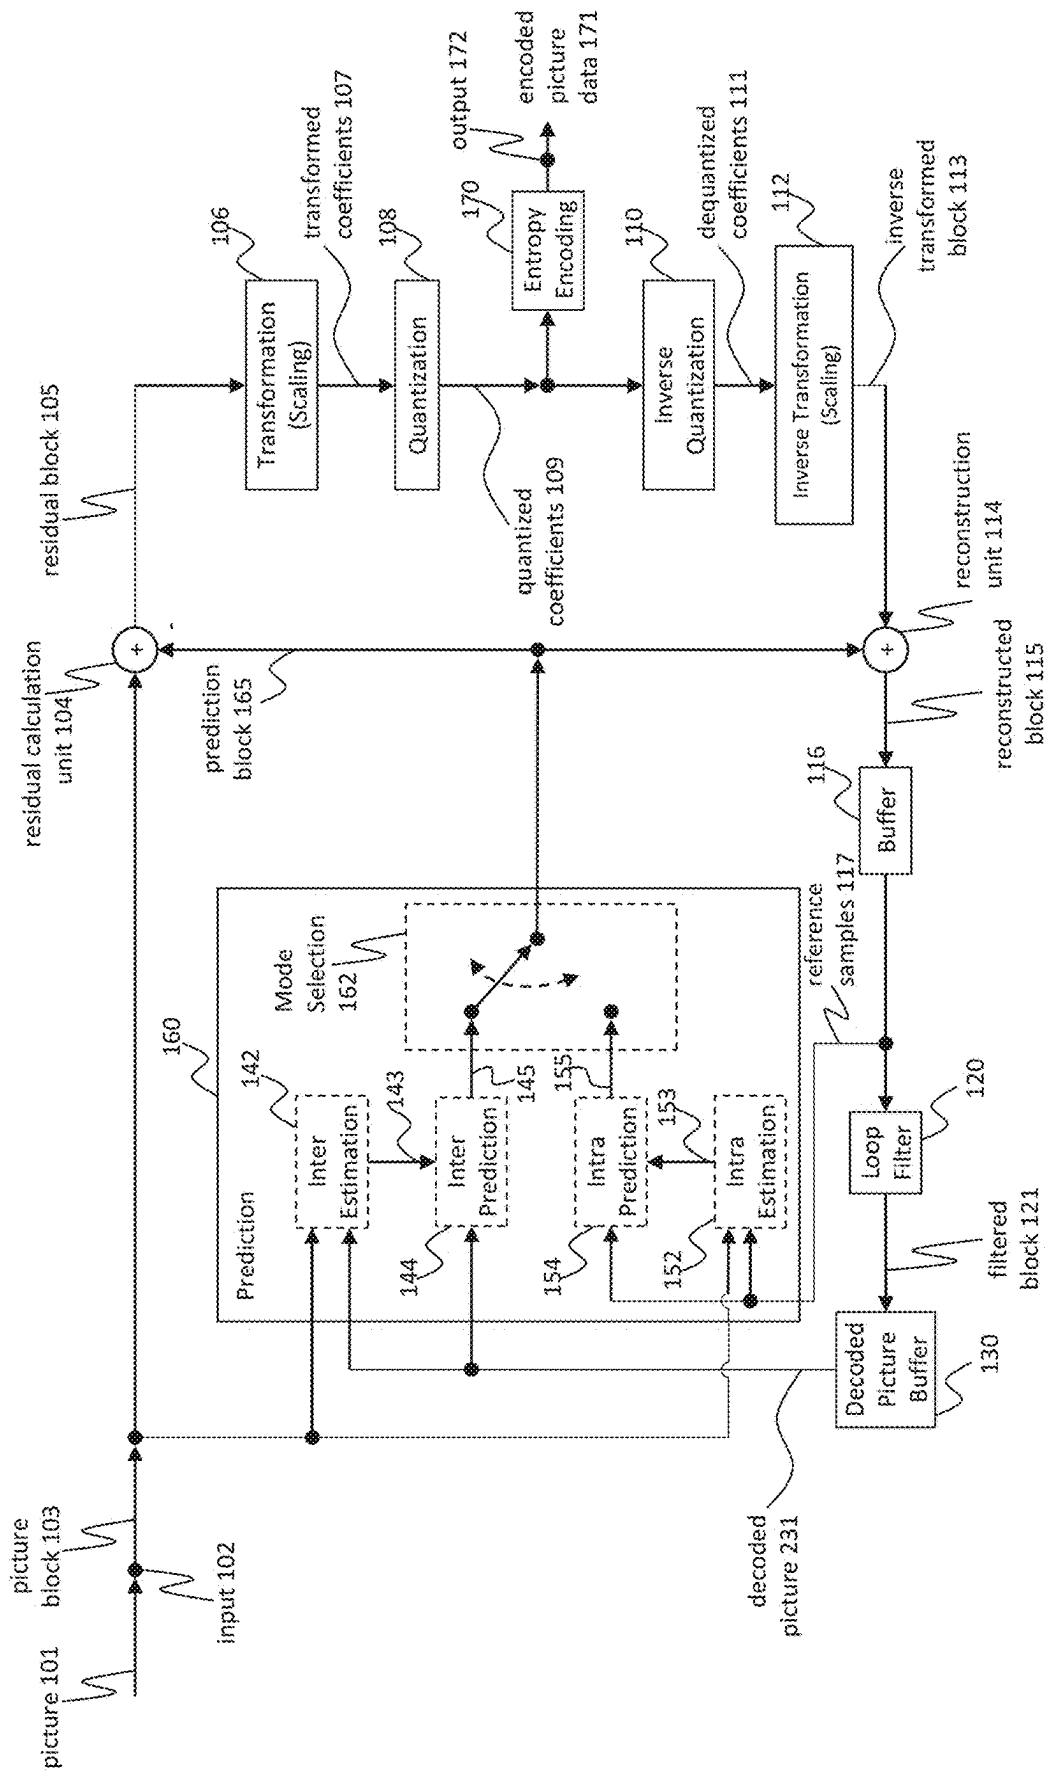


Fig. 1

Encoder 100

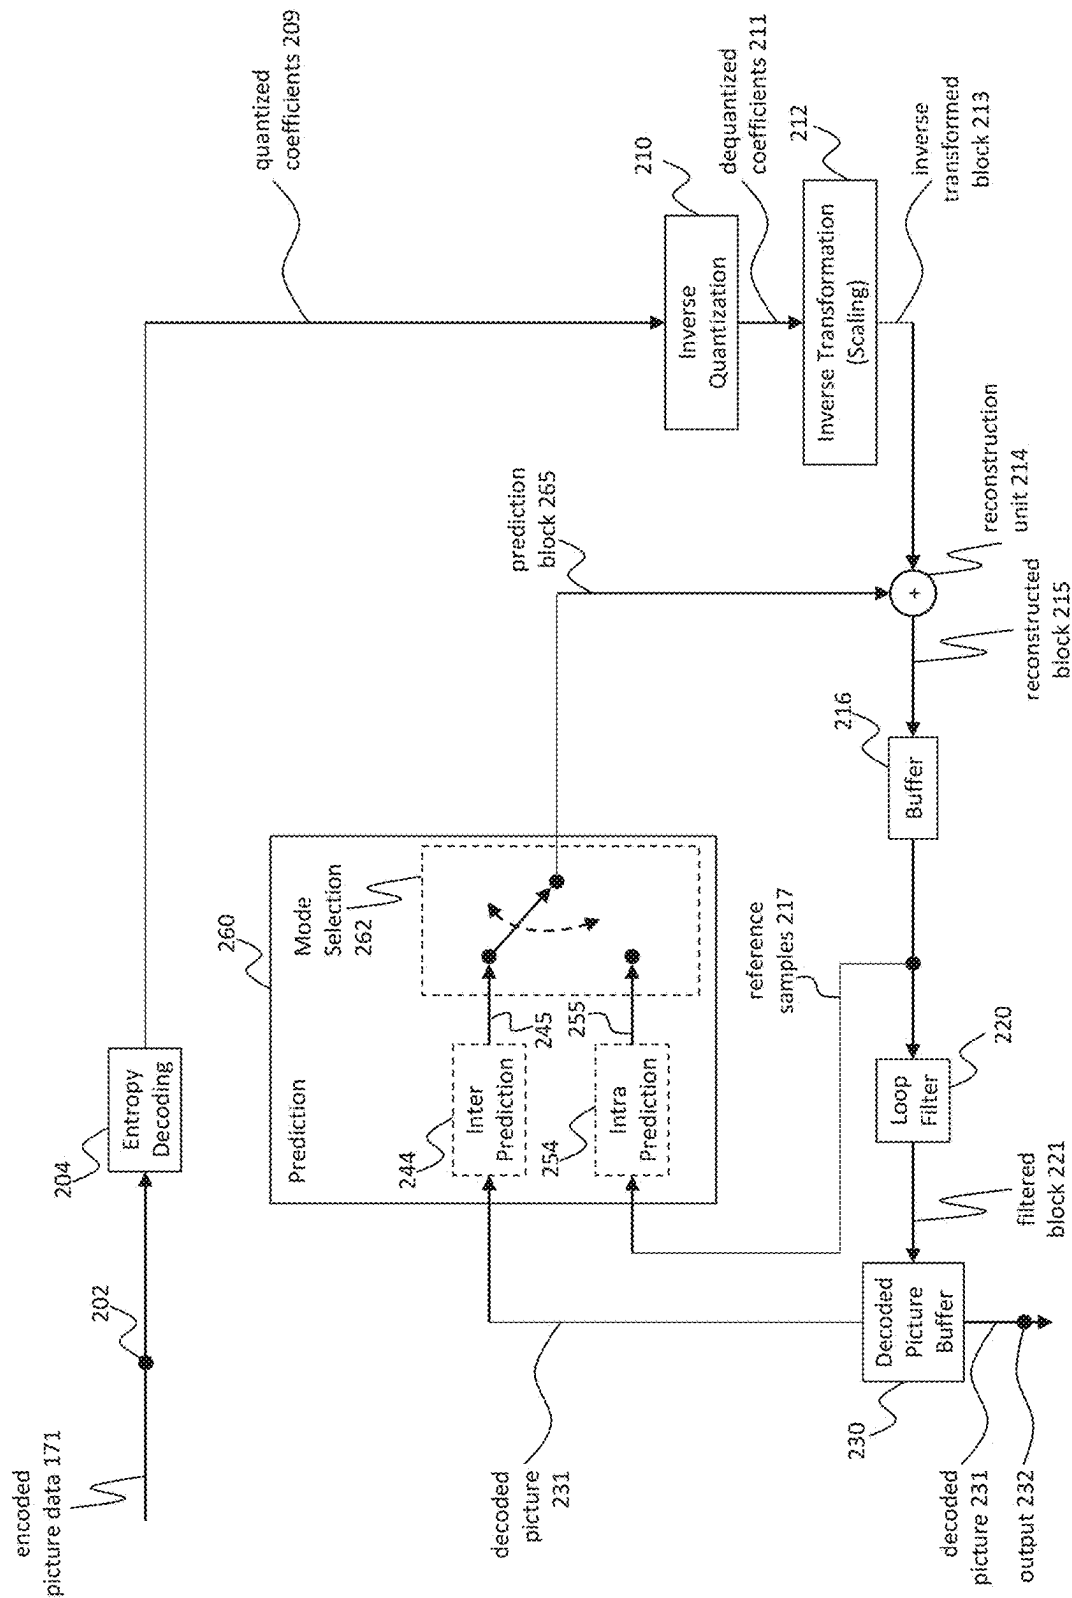


Fig. 2

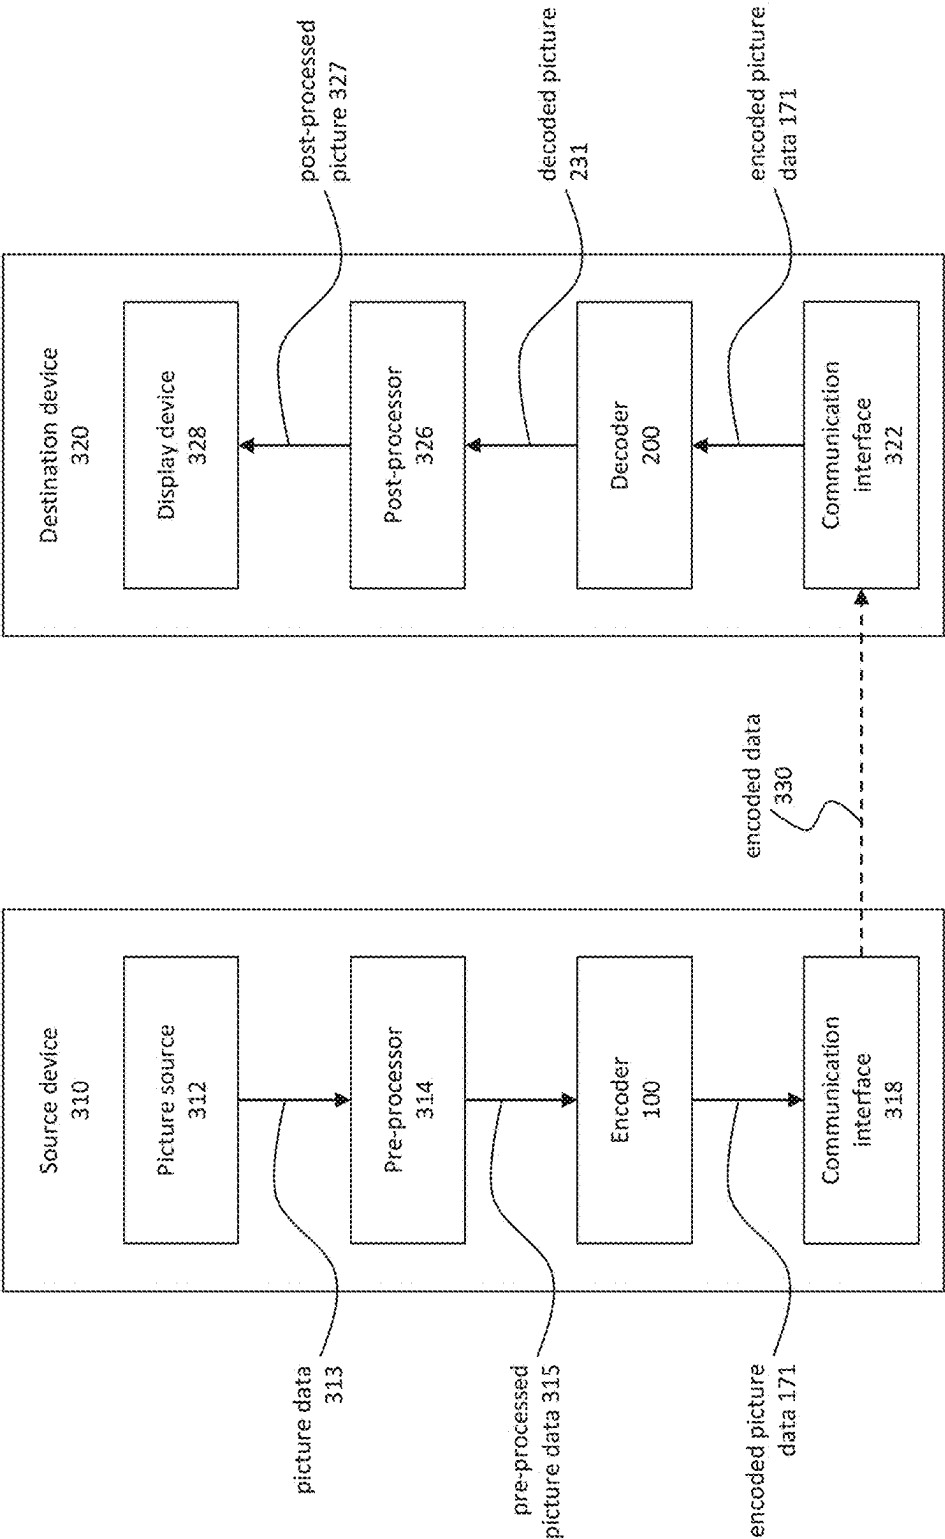


Fig. 3

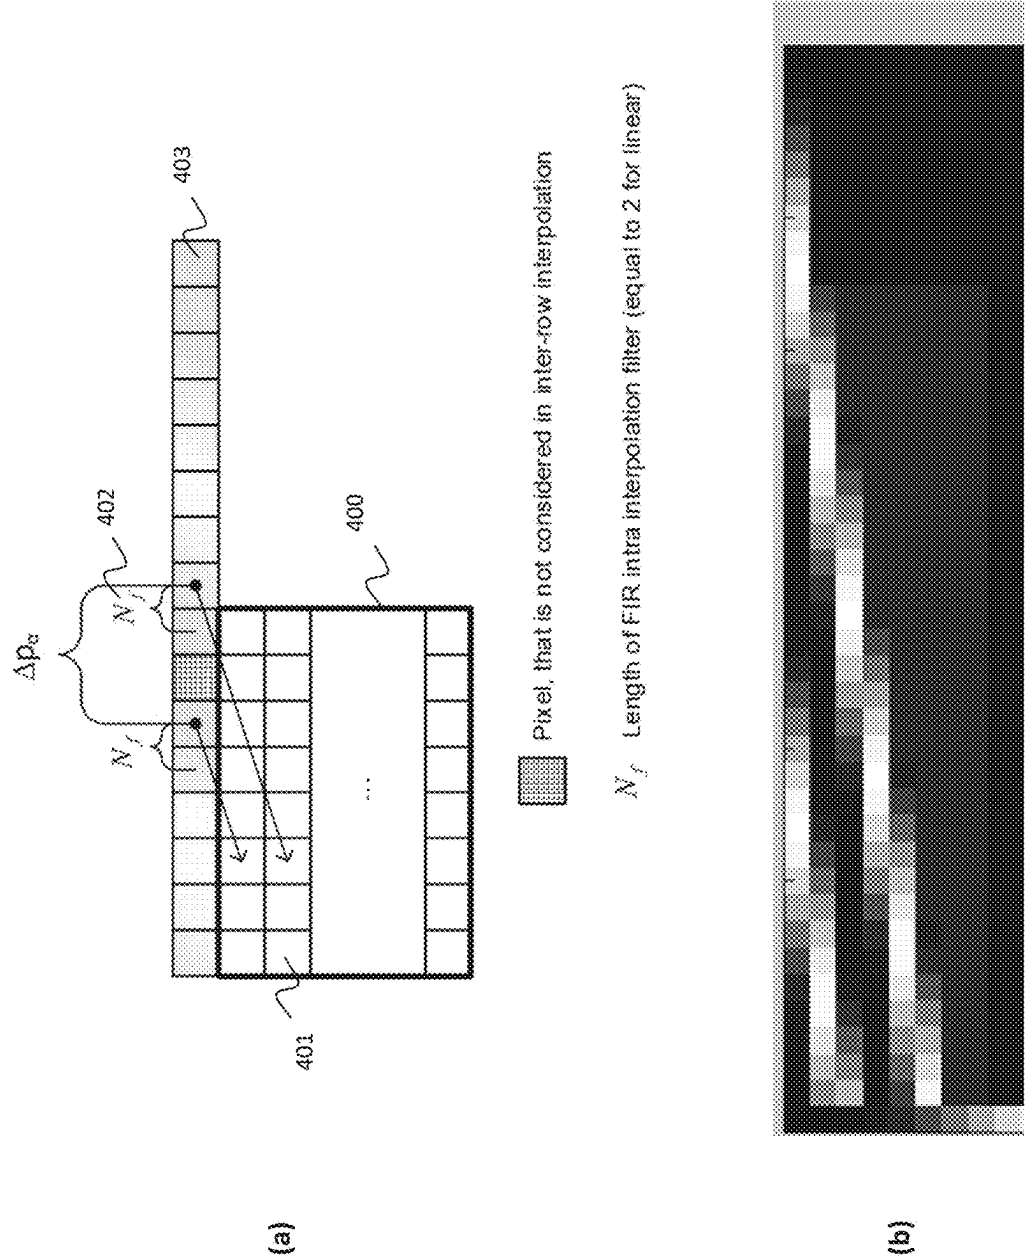


Fig. 4

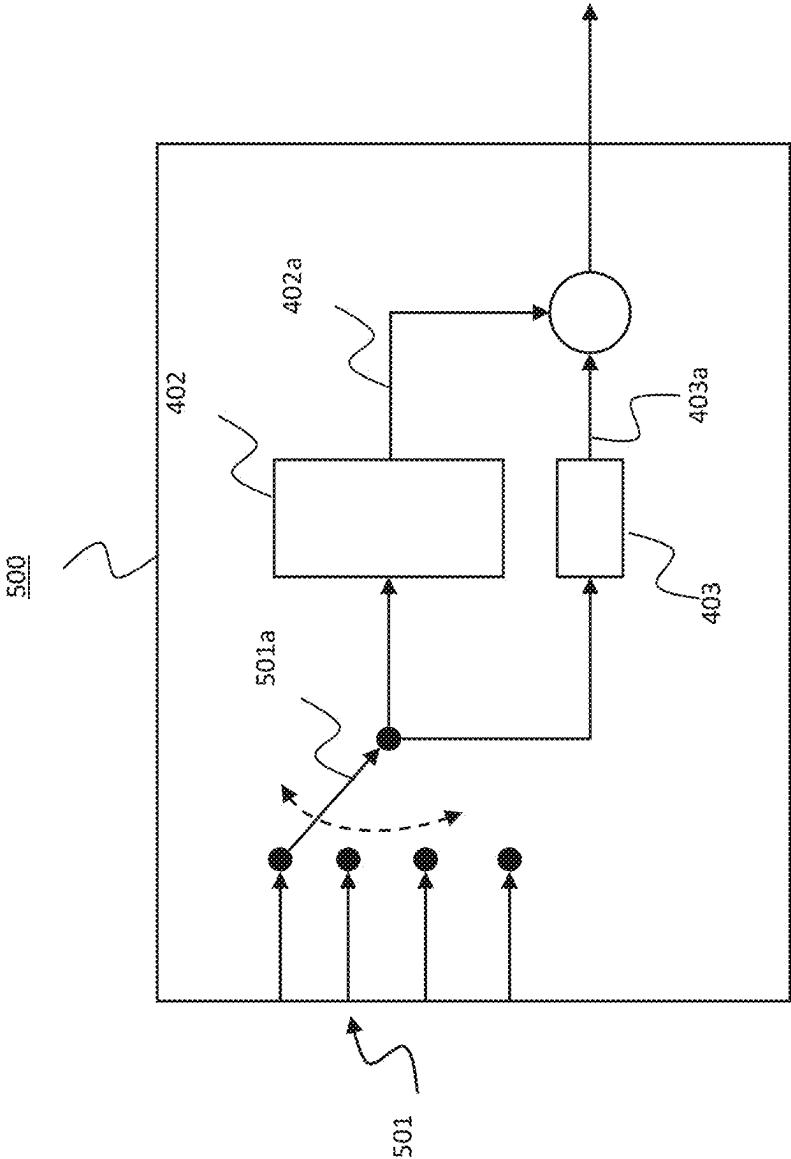


FIG. 5


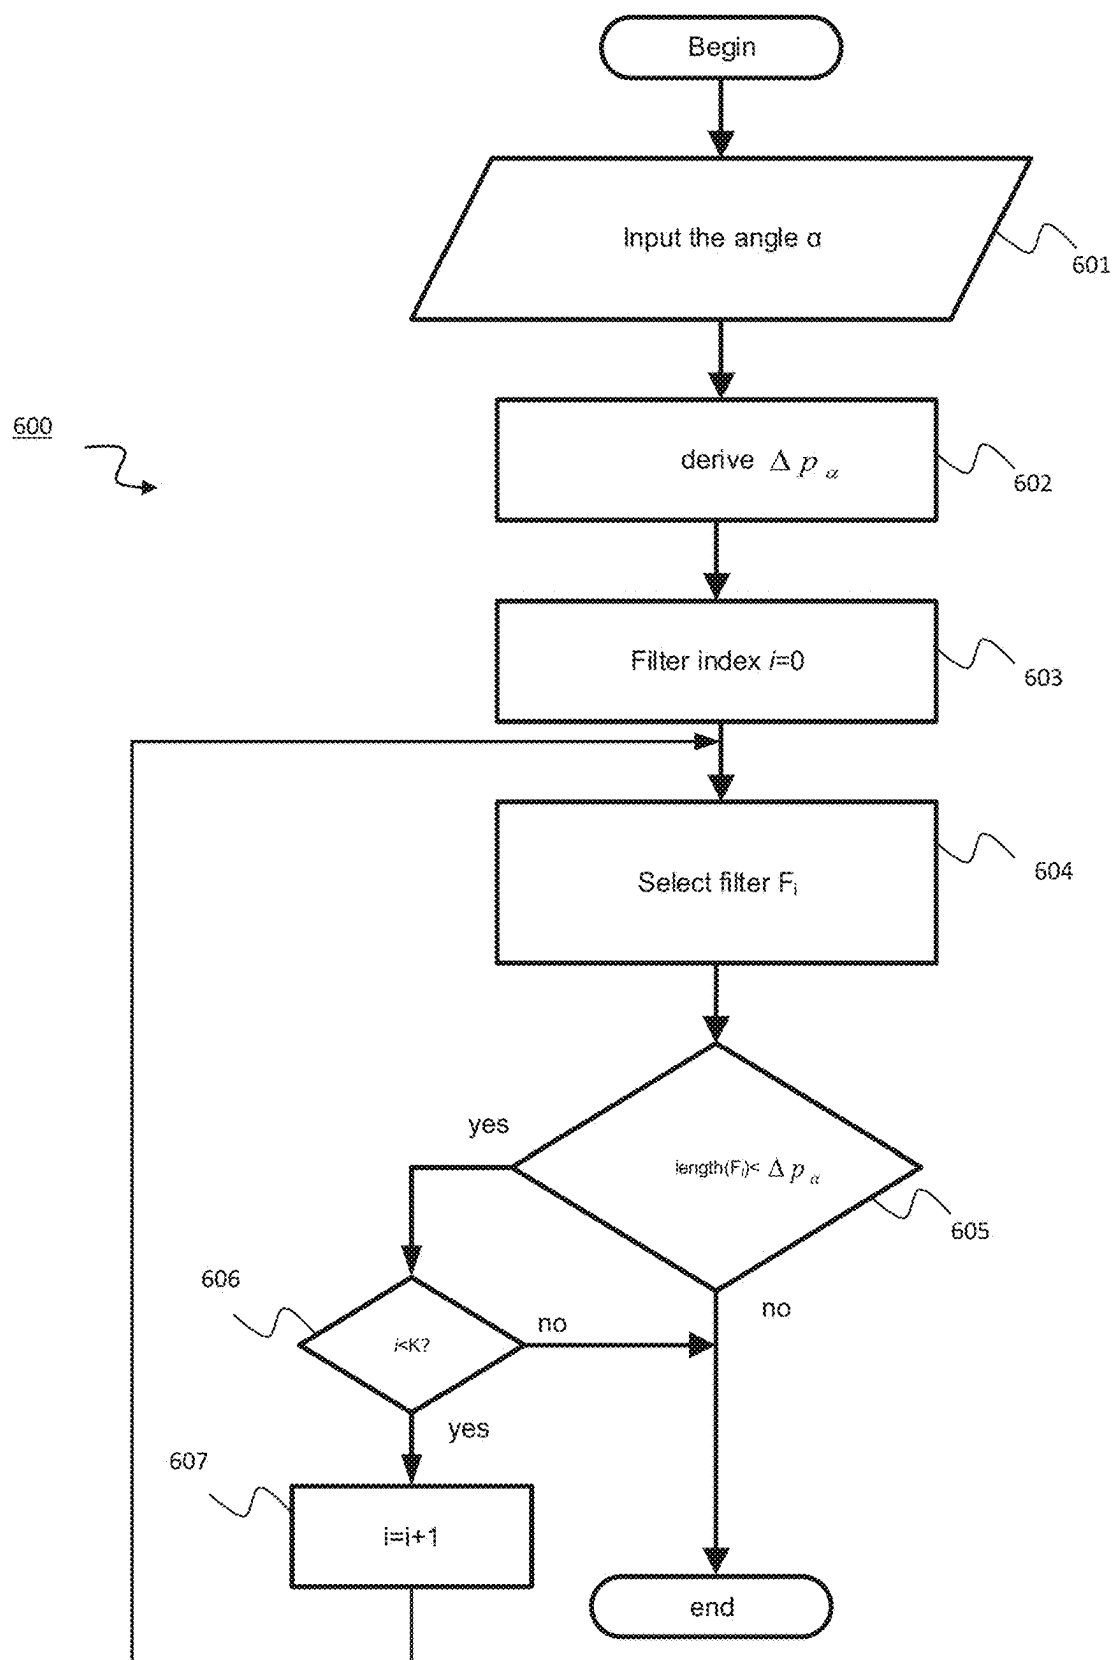


Fig. 6

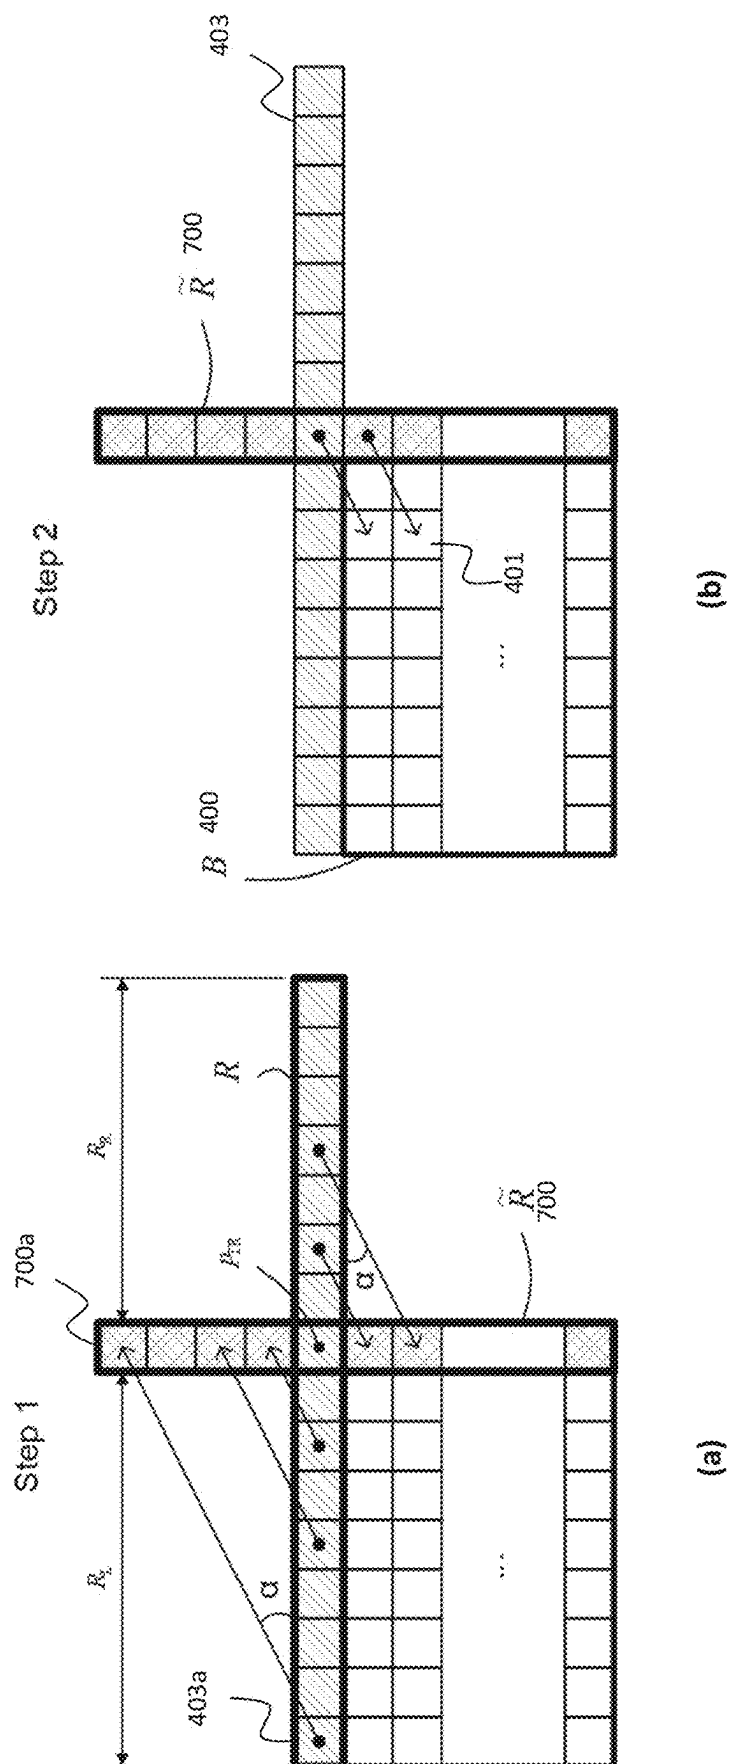

7.00

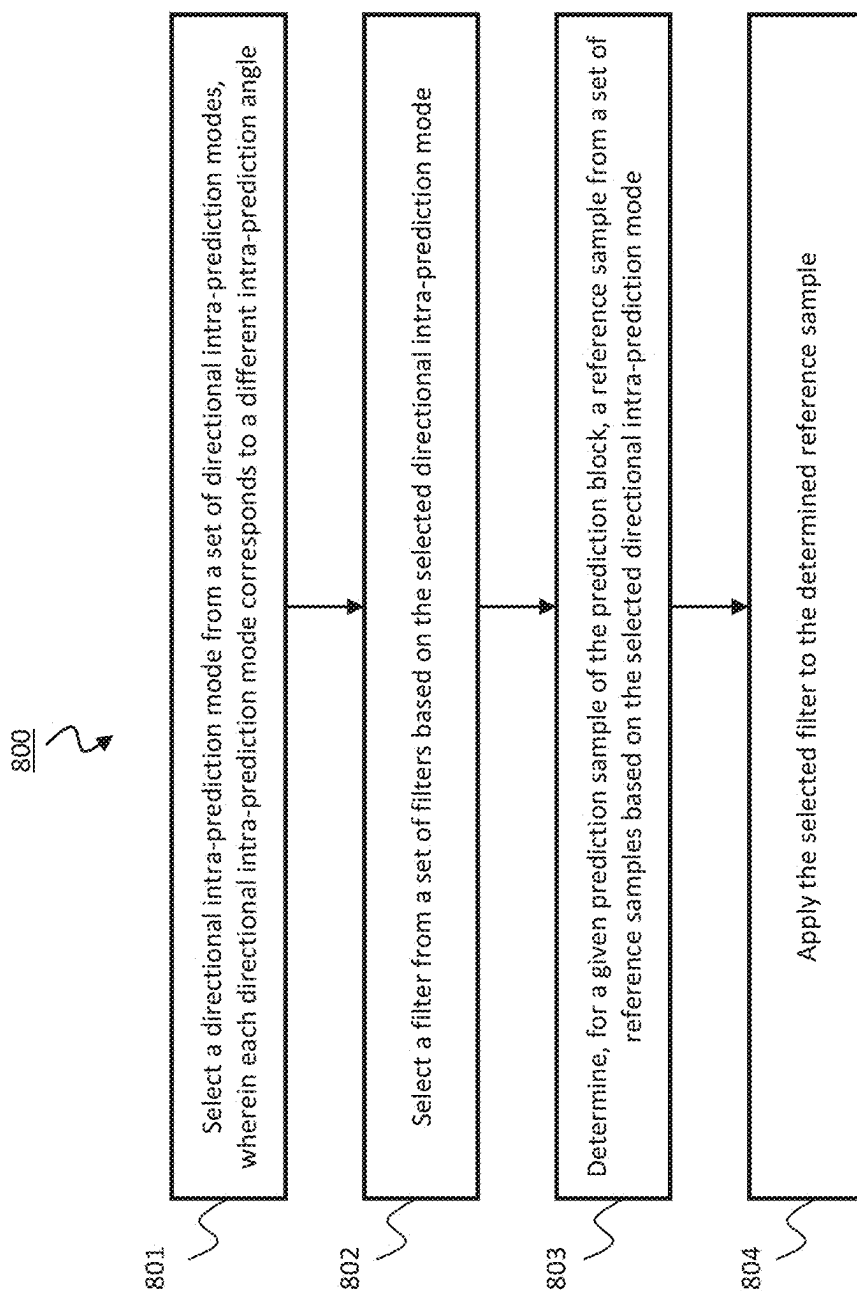


Fig. 8

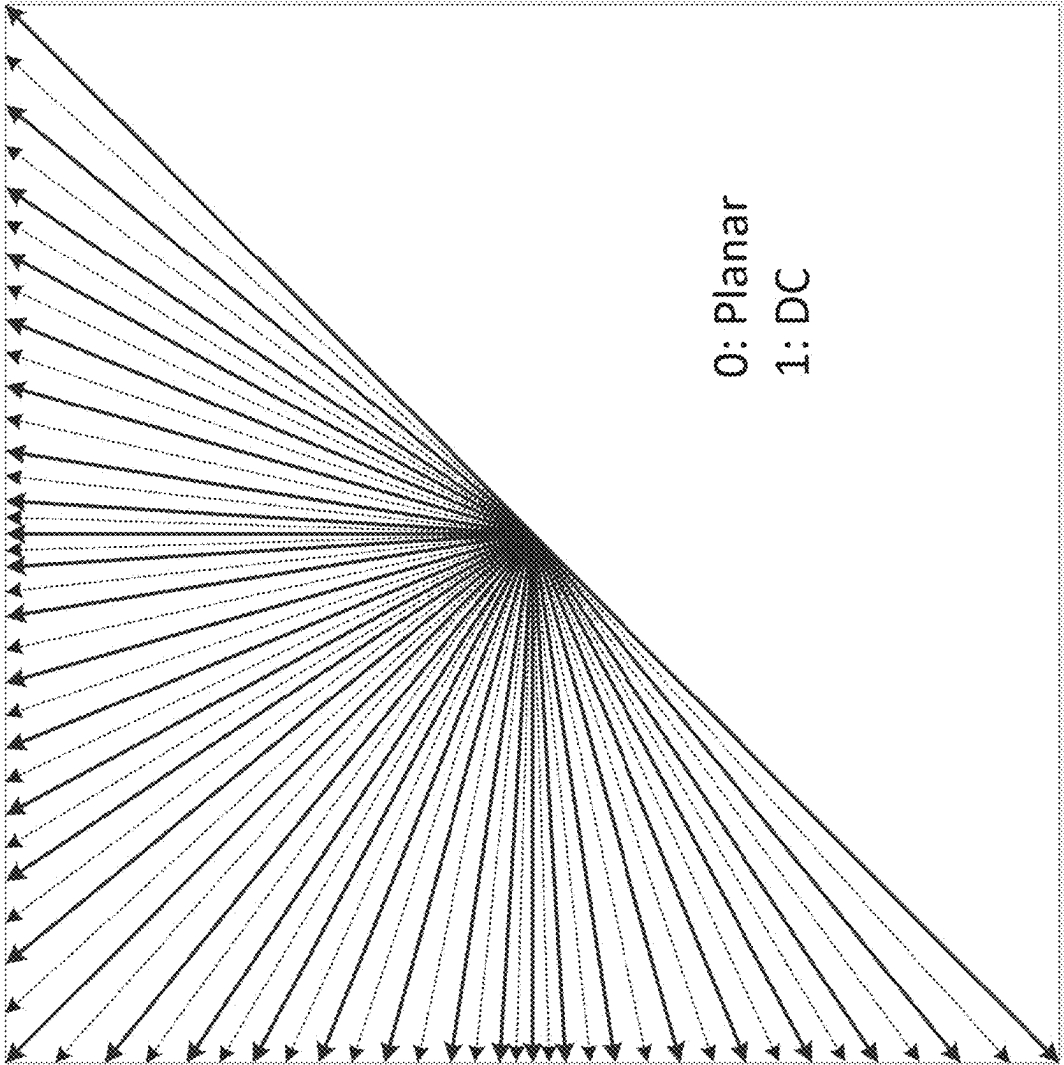


Fig. 9

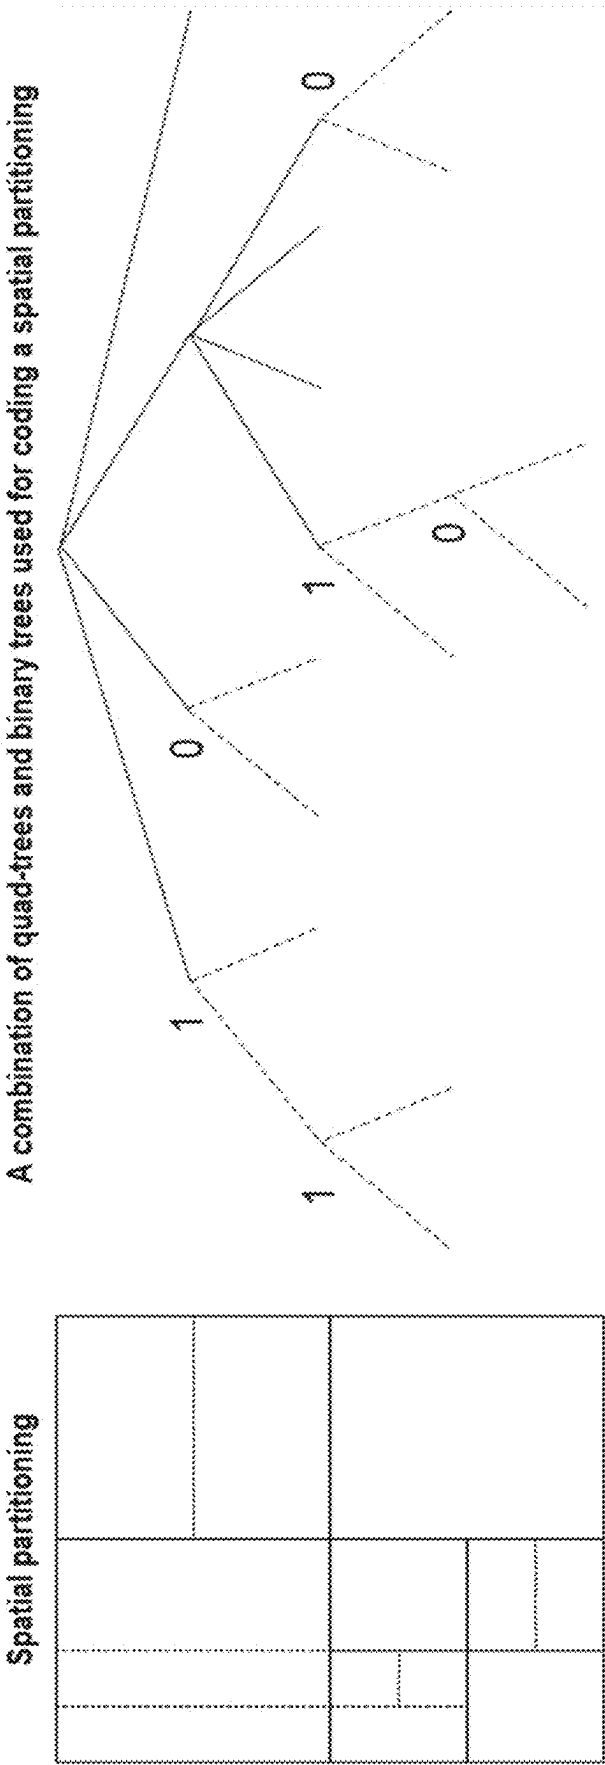


Fig. 10



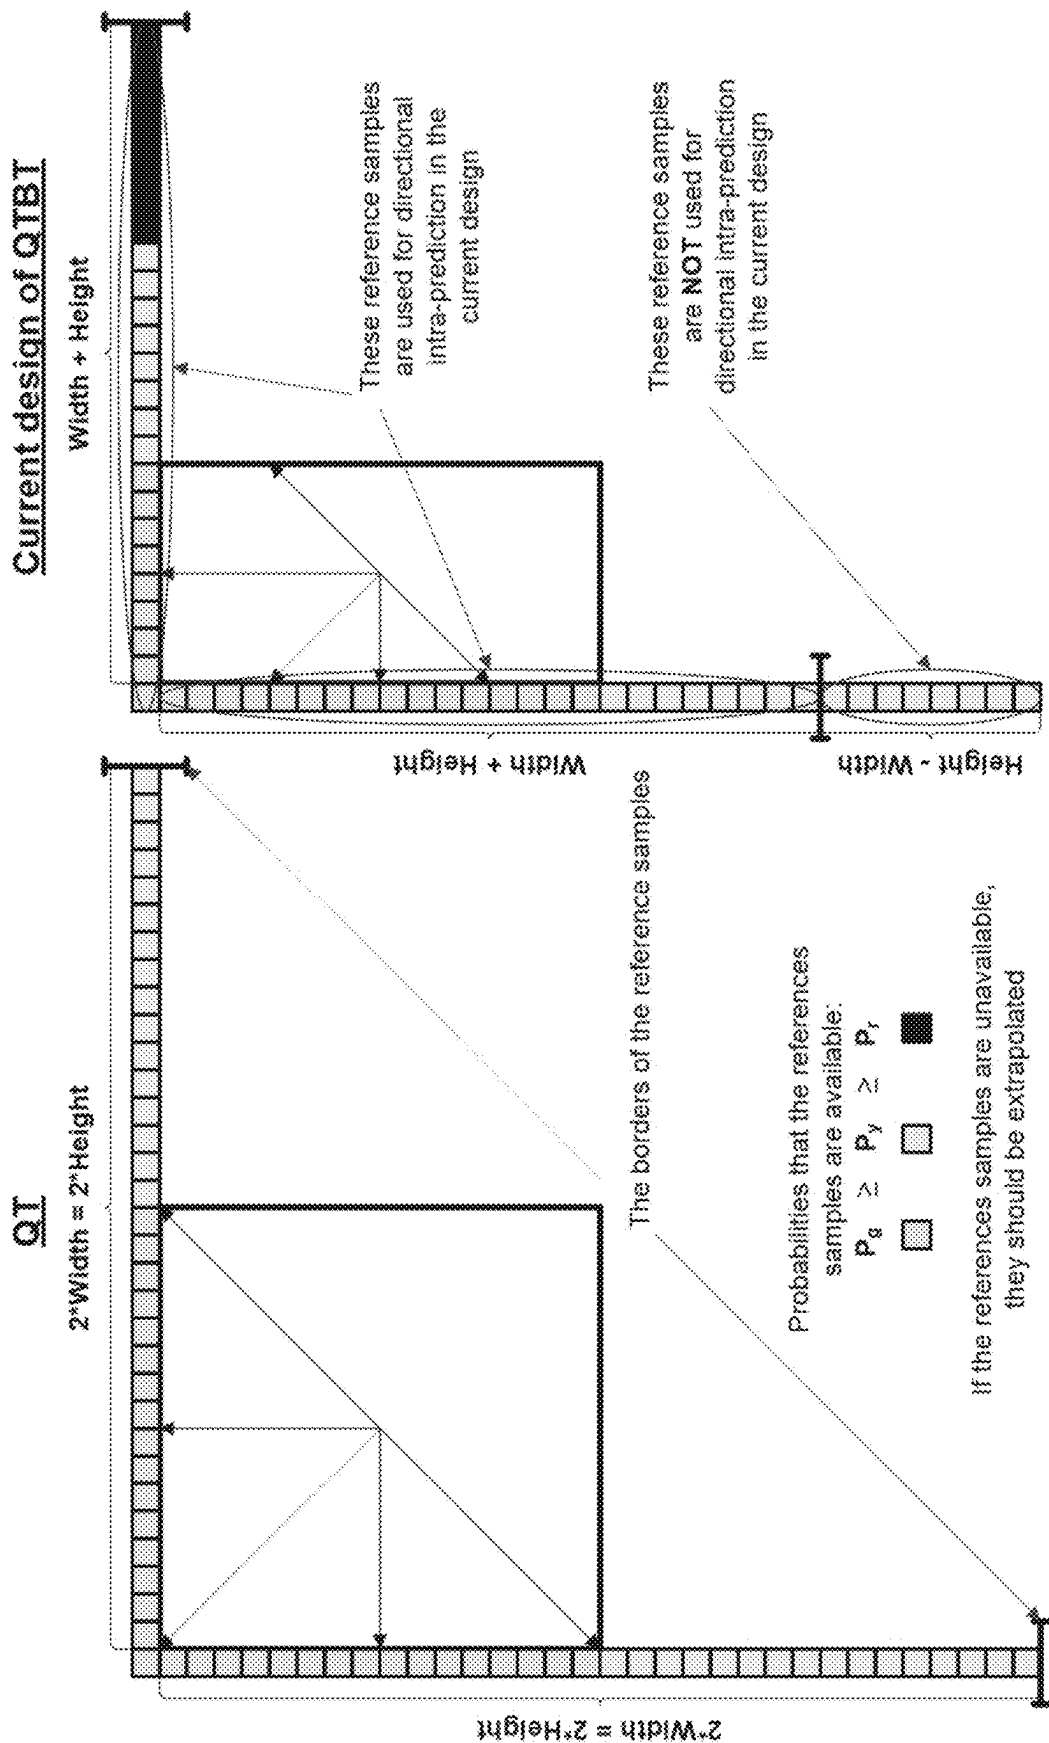


Fig. 11

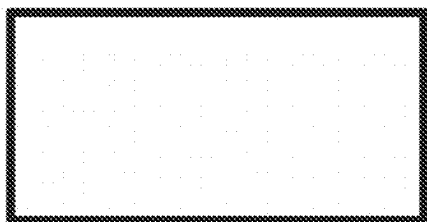

(b)

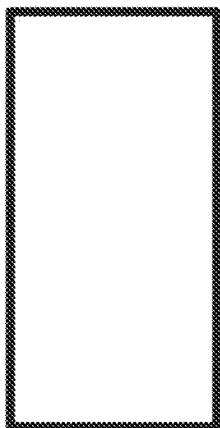

(a)

Fig. 12

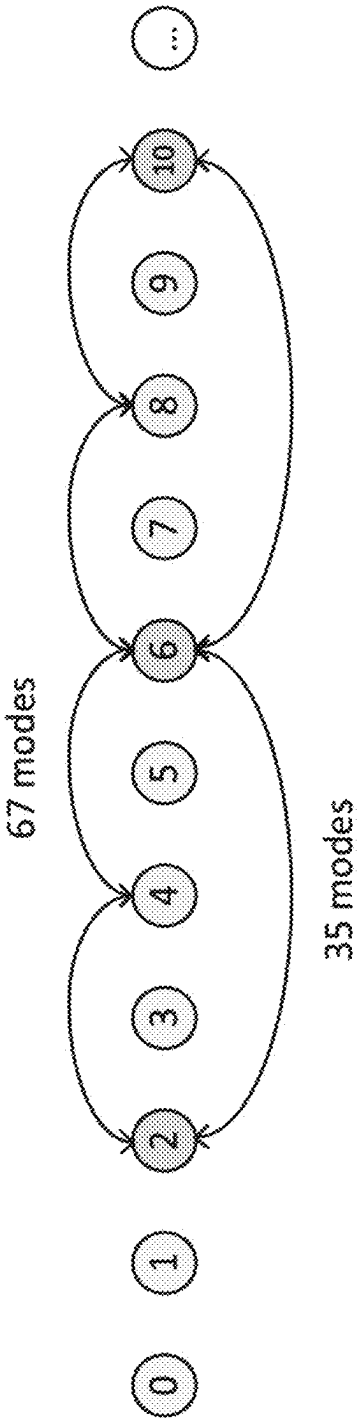


Fig. 13

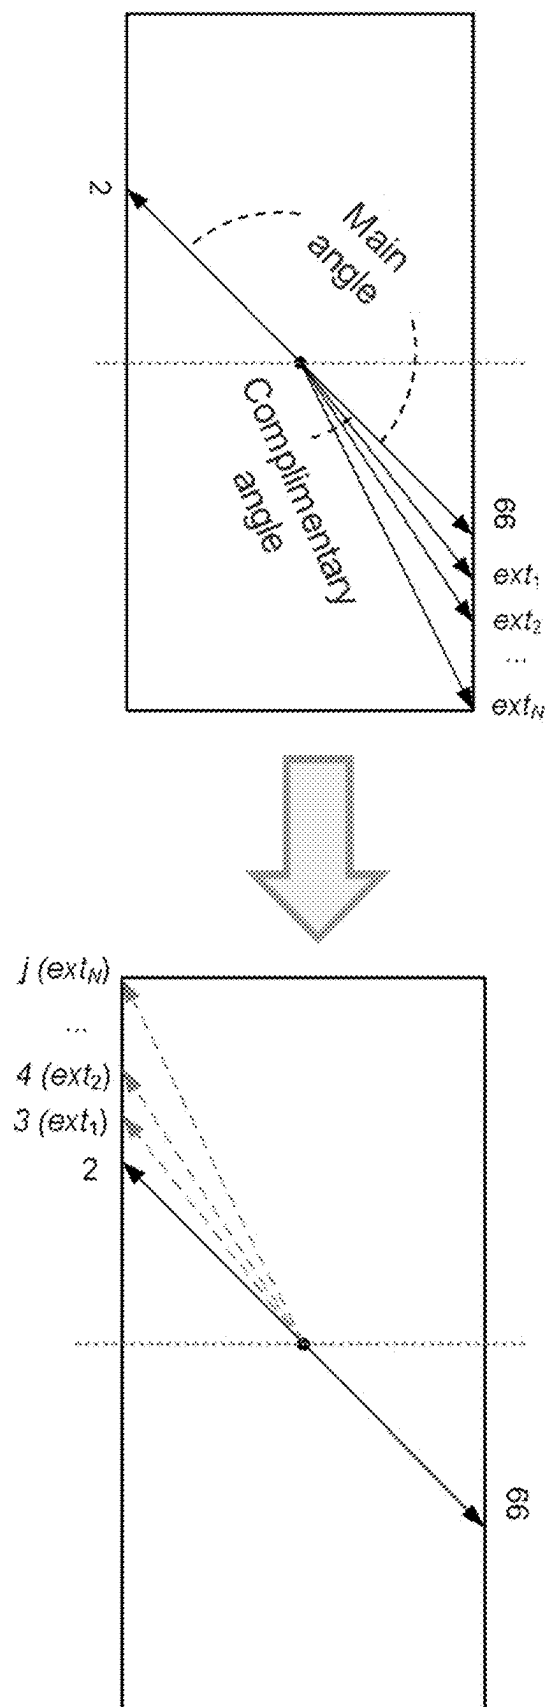


Fig. 14

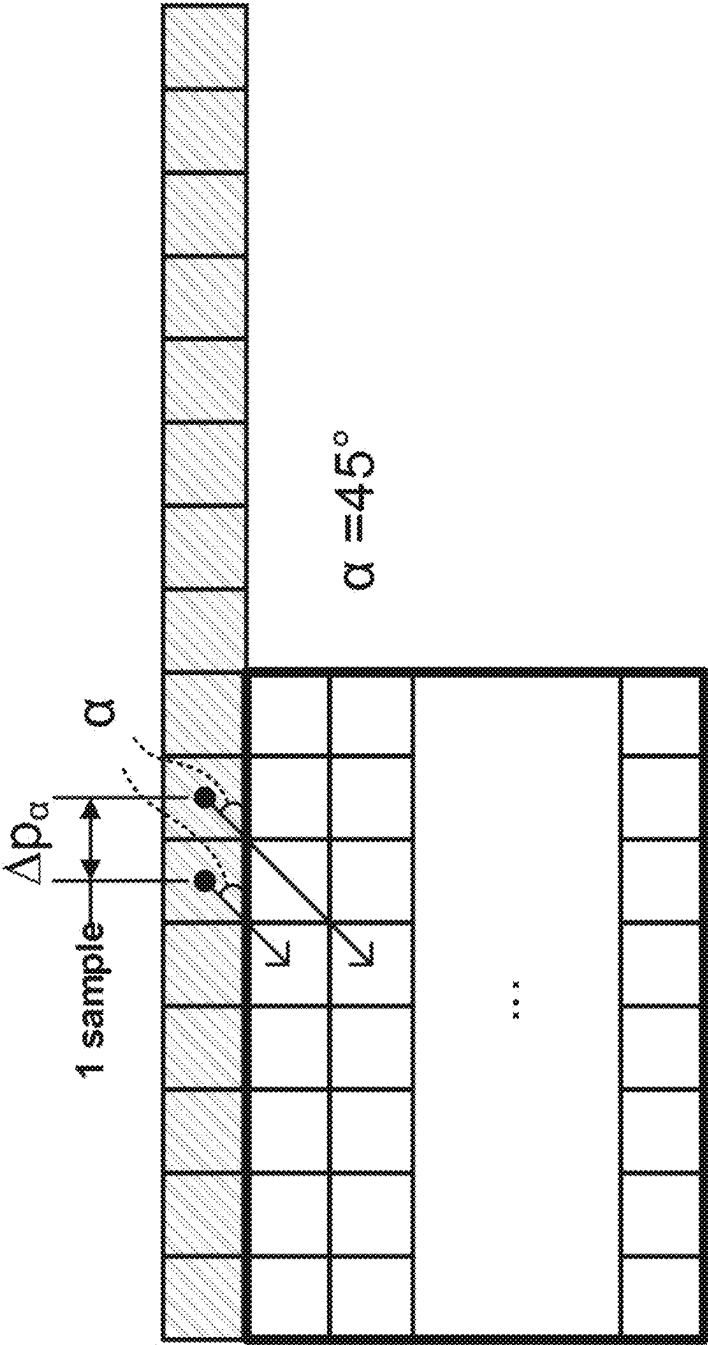


Fig. 15

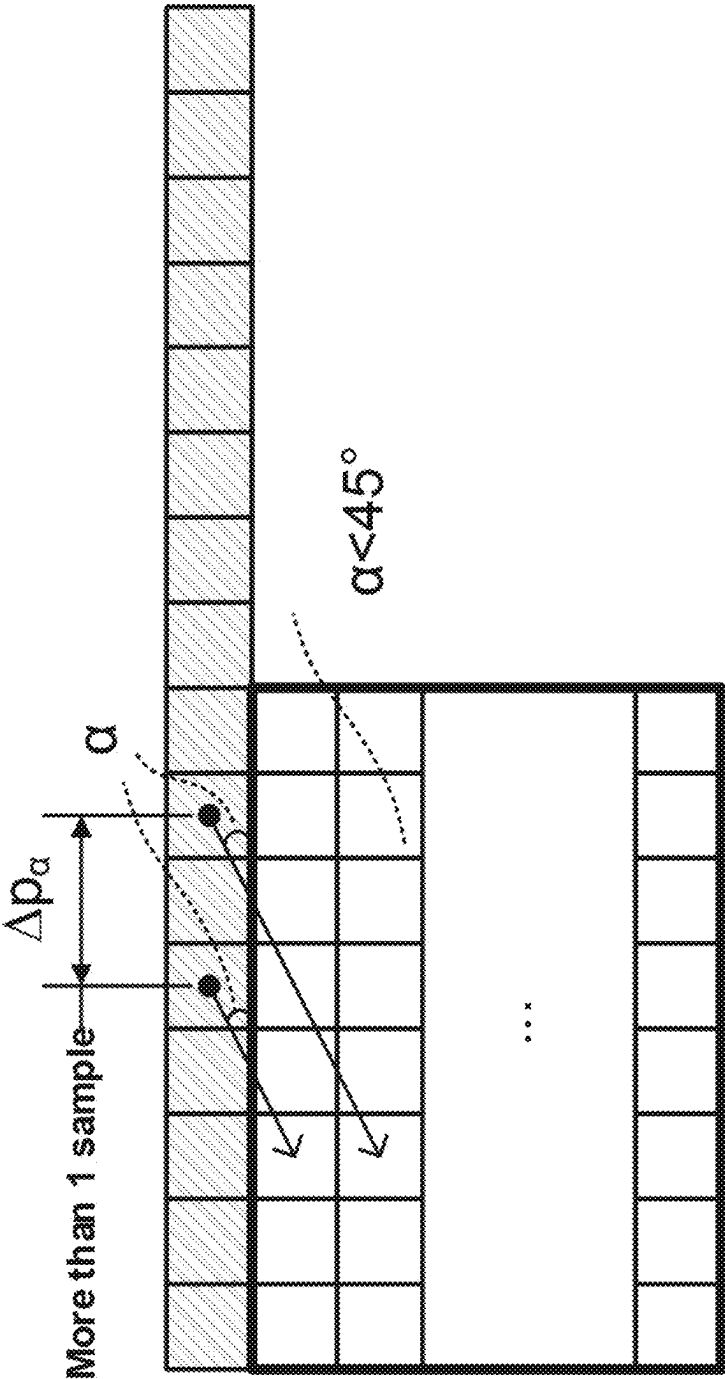


Fig. 16

DEVICE AND METHOD FOR INTRA-PREDICTION

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 18/067,599, filed on Dec. 16, 2022, which is a continuation of U.S. patent application Ser. No. 17/247,859, filed on Dec. 28, 2020, now U.S. Pat. No. 11,563,939, which is a continuation of International Application No. PCT/RU2018/000432, filed on Jun. 29, 2018. All of the afore-mentioned patent applications are hereby incorporated by reference in their entireties.

TECHNICAL FIELD

[0002] Embodiments of the present application relate to the field of picture processing, for example still picture/image and/or video picture/image coding. In particular, the application relates to a device for intra-prediction, namely for intra-predicting a prediction block of a video image. The device may be or be part of a video image encoder or a video image decoder. The device is particularly configured to perform directional intra-prediction of the prediction block. The application relates also to a corresponding intra-prediction method.

BACKGROUND

[0003] Video coding (video encoding and decoding) is used in a wide range of digital video applications, for example, broadcast digital TV, video transmission over internet and mobile networks, real-time conversational applications such as video chat, video conferencing, DVD and Blu-ray discs, video content acquisition and editing systems, and camcorders of security applications.

[0004] Since the development of the block-based hybrid video coding approach in the H.261 standard in 1990, new video coding techniques and tools were developed and formed the basis for new video coding standards. One of the goals of most of the video coding standards was to achieve a bitrate reduction compared to its predecessor without sacrificing picture quality. Further video coding standards comprise MPEG-1 video, MPEG-2 video, ITU-T H.262/MPEG-2, ITU-T H.263, ITU-T H.264/MPEG-4, Part 10, Advanced Video Coding (AVC), ITU-T H.265, High Efficiency Video Coding (HEVC), and extensions, e.g., scalability and/or three-dimensional (3D) extensions, of these standards.

[0005] Video compression is able to achieve the desired bitrate reduction, but is a complex task. In particular, video compression is constrained by two contradicting parameters: compression efficiency and computational complexity. Video coding standards, such as ITU-T H.264/AVC or ITU-T H.265/HEVC, provide a good tradeoff between these parameters. For that reason, support of video coding standards is a mandatory requirement for almost any video compression application.

[0006] The state-of-the-art video coding standards are based on partitioning of a source picture into blocks. Processing of these blocks depend on their size, spatial position and a coding mode specified by an encoder.

[0007] Coding modes can be classified into two groups according to the type of prediction: intra- and inter-prediction modes. Intra-prediction modes use pixels of the same

picture to generate reference samples to calculate the prediction values for the pixels of the block being reconstructed. Intra-prediction is also referred to as spatial prediction. Inter-prediction modes are designed for temporal prediction, and use reference samples of previous or next pictures to predict pixels of the block of the current picture.

[0008] After a prediction stage, transform coding is performed for a prediction error that is the difference between an original signal and its prediction. Then, the transform coefficients and side information are encoded using an entropy coder (e.g., CABAC for AVC/H.264 and HEVC/H.265). The recently adopted ITU-T H.265/HEVC standard (ISO/IEC 23008-2:2013, "Information technology—High efficiency coding and media delivery in heterogeneous environments—Part 2: High efficiency video coding", November 2013) declares a set of state-of-the-art video coding tools that provide a reasonable tradeoff between coding efficiency and computational complexity. An overview on the ITU-T H.265/HEVC standard has been given by Gary J. Sullivan, "Overview of the High Efficiency Video Coding (HEVC) Standard", in IEEE Transactions on Circuits and Systems for Video Technology, Vol. 22, No. 12, December 2012, the entire content of which is incorporated herein by reference.

[0009] Similar to the ITU-T H.264/AVC video coding standard, the HEVC/H.265 video coding standard provides for a division of the source picture into blocks, e.g., Coding Units (CUs). Each of the CUs can be further split into either smaller CUs or Prediction Units (PUs). A PU can be intra- or inter-predicted according to the type of processing applied for the pixels of the PU. In case of inter-prediction, a PU represents an area of pixels that is processed by motion compensation using a motion vector specified for a PU. For intra-prediction, the adjacent pixels of neighbor blocks are used as reference sample to predict a current block.

[0010] A PU specifies a prediction mode that is selected from the set of intra-prediction modes for all the Transform Units (TUs) contained in this PU. That is, the intra-prediction mode is the same for each TU of the PU. A TU can have different sizes (e.g., 4×4, 8×8, 16×16 and 32×32 pixels) and can be processed in different ways. For a TU, transform coding is performed, i.e. the prediction error is transformed with a discrete cosine transform or a discrete sine transform (in the HEVC/H.265 standard, it is applied to intra-coded blocks) and quantized. Hence, reconstructed pixels contain quantization noise (it can become apparent, for examples, as blockiness between units, ringing artifacts along with sharp edges, etc.) that in-loop filters such as DBF, SAO and ALF try to suppress. The use of sophisticated prediction coding (such as motion compensation and intra-prediction) and partitioning techniques (e.g., Quad-Tree (QT) for CUs and PUs as well as Residual Quad-Tree (RQT) for TUs in the HEVC/H.265 standard and Quad-Tree and Binary Tree (QTBT) for the Joint Exploration Model (JEM) reference software starting from version JEM-3.0) allowed the standardization committee to significantly reduce the redundancy in PUs. The fundamental difference between the QT and QTBT partitioning mechanisms is that the latter one enables not only square but also rectangular blocks by using partitioning based on both quad- and binary tree. The present application relates to directional intra-prediction and introduces new modification of directional intra-prediction modes.

[0011] According to the HEVC/H.265 standard, 35 intra-prediction modes are available. As shown in FIG. 9 this set contains the following modes:

[0012] Planar mode (the intra-prediction mode index is 0),

[0013] DC mode (the intra-prediction mode index is 1),

[0014] Directional modes (the range of the intra-prediction mode index values is from 2 to 34) shown by solid arrows in FIG. 9. The set of directional intra-prediction modes was extended up to 65 modes (i.e. almost doubled) by decreasing an angular step between directional intra-prediction modes by a factor of 2. These additional modes are shown by the dashed arrows in FIG. 9.

[0015] For the JEM-3.0 software, the new partitioning mechanism known as QTBT was proposed. As depicted in FIG. 10, QTBT partitioning can provide not just square but rectangular blocks. Of course, some signaling overhead and increased computational complexity at the encoder side are the price of the QTBT partitioning, as compared to conventional QT based partitioning used e.g., in the HEVC/H.265 standard. Nevertheless, the QTBT-based partitioning is endowed with better segmentation properties and, hence, demonstrates significantly higher coding efficiency than the conventional QT.

[0016] However, when introducing QTBT the set of available directional intra-prediction modes was not changed accordingly. In particular, asymmetry of rectangular blocks was not taken into account, as shown in FIG. 11. Thus, the same number of reference samples are used along both the shorter and the longer sides of rectangular blocks. In the current implementation of the QTBT framework, the number of directional intra-prediction modes depends on neither aspect ratio of blocks, nor on the actual availability of reference samples. As a result, there are highly improbable reference samples used for the shorter side of the rectangular block, while there are probable reference samples that are not used for the longer side.

[0017] Notably, as shown in FIG. 12, in this document, the terms of “vertically oriented block” (“vertical orientation of a block”) and “horizontally oriented block” (“horizontal orientation of a block”) are applied to rectangular blocks generated by the QTBT framework. FIG. 12 shows particularly (a) a horizontally oriented block, and (b) a vertically oriented block.

[0018] In the contribution JVET-D0113, it was further proposed to apply a mechanism, wherein the number of directional intra-prediction modes is adjustable. In particular, it was proposed to further increase the number of directional intra-prediction modes to 131 for large blocks sizes, while reducing the number of directional intra-prediction modes for small block sizes. The switching of the number of directional intra-prediction modes based on block sizes is controlled by two threshold values, which are signaled in SPS as log 2 values minus 4 and minus 6, respectively. The first threshold indicates the largest block size that can have 35 intra-prediction mode directions, and the second threshold indicates the largest block size that has 67 intra-prediction mode directions, all other blocks use 131 intra-prediction mode directions. In the default setting, thresholds are signaled as 4 and 6, respectively, and for higher resolution pictures it is set to 5 and 8.

[0019] In the implementation, a directional intra-prediction mode index is always represented by a 131 mode range

regardless of the number of directional intra-prediction modes actually used. For 67 intra-prediction modes being actually used, only every second angular (directional) mode is allowed, and for 35 modes, only every fourth angular (directional) mode is allowed. Therefore, during intra-prediction mode signaling, an intra-prediction mode of a neighboring block may need to be rounded towards the nearest, second, or fourth angular intra-prediction mode, if the current block uses smaller than 131 intra-prediction mode directions, as is explained in FIG. 13. This conversion is done by applying right and left shifts of 1 or 2 to an intra-prediction mode. If the mode is not MPM, the mode signaling is following the same process as in JEM-3.0, but with a different number of intra-prediction modes. Planar and DC modes are kept unchanged, and do not require mode conversion. To accommodate the increased number of intra-prediction modes, 4-tap intra filters are extended from $\frac{1}{32}$ to $\frac{1}{64}$ fractional pel.

[0020] Further, a technology was proposed recently to address the problem of how many directional intra-prediction modes should be included into an intra-prediction mode set for a rectangular block. As shown in FIG. 14, according to the proposed technology, the set of directional intra-prediction modes can be extended subject to the aspect ratio of a prediction block, and can be signaled by mapping the added directional intra-prediction modes to the conventional subset.

[0021] FIG. 15 illustrates in this respect a case of an intra-prediction in a diagonal direction with an angle equal to 45° associated with a directional intra-prediction mode. Corresponding HEVC intra mode indexes for this case are 2 (from bottom-left) and 35 (from upper-right).

[0022] However, if a similar intra-prediction mechanism is applied to angles smaller than 45° , i.e. for the extended directional intra-prediction modes, the situation is as shown in FIG. 16. Namely, when an intra-prediction direction is specified to be acute (i.e. less than) 45° apparent discontinuities can be observed in the prediction. The source of these discontinuities is particularly that the difference between reference samples positions between two adjacent rows of prediction samples may become larger than one reference sample. This problem relates to methods of reference samples processing and performing intra-prediction interpolation.

SUMMARY

[0023] In view of the above-mentioned implementations, the present application aims to further improve hybrid video coding. In particular, the application has the objective to provide a device and method for an improved intra-prediction of a prediction block of a video image. The application particularly aims for additional coding gain without adding hardware and computational complexity. Specifically, the application intends to overcome the above-described issue that occurs at acute angles of less than 45° , i.e. it wants to suppress discontinuities at these acute angles. The application should be easily implemented in codecs that use conventional directional intra-prediction mechanisms.

[0024] The objective of the present application is solved according to embodiments of the application defined by the features of the independent claims. Further advantageous implementations of the embodiments are defined by the features of the dependent claims.

[0025] In particular, the application proposes reducing the discontinuities by extending a filter length for acute angles of intra-prediction, i.e. of less than 45° . This solution is applicable mainly to rectangular blocks produced by such partitioning frameworks as QTBT and MTT.

[0026] A first aspect of the application provides a device for intra-predicting a prediction block of a video image, the device being configured to select a directional intra-prediction mode from a set of directional intra-prediction modes, wherein each directional intra-prediction mode corresponds to a different intra-prediction angle, select a filter from a set of filters based on the selected directional intra-prediction mode, determine, for a given prediction sample of the prediction block, a reference sample from a set of reference samples based on the selected directional intra-prediction mode, and apply the selected filter to the determined reference sample.

[0027] In some embodiments, the device according to the first aspect provides the following advantages:

[0028] Additional coding gain can be reached.

[0029] It can be used in many potential applications in hybrid video coding paradigms that are compatible with the HM software and the VPX video codec family as well as the JEM and VTM software and the VPX/AVI video codec family that are a state-of-the-art and a next-generation video coding frameworks, respectively.

[0030] Hardware and computational complexities are kept low.

[0031] The device can be easily implemented in such codecs that use conventional directional intra-prediction mechanisms.

[0032] In particular, by selecting the filter lengths according to the angle, the above-described problem of acute intra-prediction angles less than 45° can be overcome. If the distance between two reference samples used for intra-prediction two adjacent prediction samples becomes larger, so that the two reference samples are not adjacent to each other anymore, the larger selected filter length avoids discontinuities. For angles above 45° , where the reference pixels are adjacent to another, the filter length can be selected smaller for preserving detail.

[0033] Notably, the prediction block may be a TU or a PU. The device is configured to process, as described for the given prediction sample, each prediction sample in the prediction block. Thus, the device is configured to perform intra-prediction of the entire prediction block in the video image. A sample is an intersection of a channel and a pixel in the video image. For instance, each pixel of the video image may include three samples for Red, Green and Blue.

[0034] In an embodiment, the device is configured to determine a filter length based on the selected directional intra-prediction mode, and select as the filter one having at least the determined filter length.

[0035] Thus, the device ensures that the filter length is in each case long enough to avoid discontinuities.

[0036] In an embodiment, the set of filters includes filters with different filter lengths, particularly with filter lengths that span 1, 3 or 5 adjacent reference samples.

[0037] In an embodiment, each filter in the set of filters performs a different smoothing over the determined reference sample and one or more adjacent reference samples, when applied to the determined reference sample.

[0038] For more acute angles, a stronger smoothing, e.g., over more adjacent reference samples can be selected by selecting the filter accordingly, while for less acute (or not acute) angles a softer smoothing, e.g., over less adjacent reference samples can be selected.

[0039] In an embodiment, the device is configured to determine the intra-prediction angle corresponding to the selected directional intra-prediction mode, and select the filter in dependence of the determined intra-prediction angle.

[0040] Accordingly, the best filter can be selected for each angle of intra-prediction.

[0041] In an embodiment, the device is configured to determine the intra-prediction angle corresponding to the selected directional intra-prediction mode, specify, for a further prediction sample of the prediction block, a further reference sample from the set of reference samples based on the selected directional intra-prediction mode, determine a distance between the determined reference sample and the further reference sample, and select the filter in dependence of the determined distance.

[0042] The device may be configured to perform a filter selection algorithm taking the selected directional intra-prediction mode as input to obtain as output the intra-prediction angle. The device may determine the intra-prediction angle based on the index of the selected directional intra-prediction mode. Further, the device may be configured to determine the angle based on the aspect ratio of the prediction block.

[0043] The further reference sample may be specified for the further prediction sample in the same way as the determined reference sample is determined for the given prediction sample, particularly based on the intra-prediction direction of the selected mode, i.e. the intra-prediction angle. The distance between the determined reference sample and the further reference sample may be derived based on a distance between the given prediction sample and the further prediction sample in the prediction block and the intra-prediction angle associated with the selected mode. The distance may be determined in integers or fractions of reference samples.

[0044] For a smaller determined distance, a filter with a longer filter length may be selected, and for a larger determined distance a filter with a shorter filter length may be selected. In particular, a filter with a filter length of at least the determined distance may be selected. If no selectable filter has a filter length of at least the determined distance, the filter in the filter set with the largest filter length may be selected.

[0045] Thus, the filter can be selected such that the distance between the reference samples does not lead to discontinuities after the intra-prediction.

[0046] In an embodiment, the device is configured to select the same filter for each directional intra-prediction mode selected from a first subset of the directional intra-prediction modes, and select a different filter for each directional intra-prediction mode selected from a second subset of the directional intra-prediction modes.

[0047] For instance, the first subset may include directional intra-prediction modes associated with intra-prediction angles of 45° and more, while the second subset may include directional intra-prediction modes associated with intra-prediction angles of less than 45° .

[0048] In an embodiment, the device is configured to intra-predict the given prediction sample directly from the determined reference sample, wherein the device is config-

ured to apply the selected filter to the determined reference sample before or during the intra-prediction of the given prediction sample.

[0049] In an embodiment, the device is configured to generate a transposed reference sample by interpolating the determined reference sample based on the selected intra-prediction mode, and intra-predict the given prediction sample from the transposed reference sample, wherein the device is configured to apply the selected filter to the determined reference sample before or during the generation of the transposed reference sample.

[0050] In an embodiment, the device is configured to transpose each reference sample in the set of reference samples, wherein a row of reference samples becomes a column of transposed reference samples, and a column of reference samples becomes a row of transposed reference samples.

[0051] In an embodiment, the reference samples of the set of reference samples are arranged in a row of the video image adjacently above and above-right the prediction block, and/or are arranged in a column of the video image adjacently left and left-under the prediction block.

[0052] In an embodiment, the device is configured for encoding and/or decoding the video image, or the device is a video encoder and/or video decoder.

[0053] For instance, the device of the first aspect can be included in or be an intra-prediction unit of an encoder or decoder.

[0054] A second aspect of the application provides a method for intra-predicting a prediction block of a video image, the method comprising: selecting a directional intra-prediction mode from a set of directional intra-prediction modes, wherein each directional intra-prediction mode corresponds to a different intra-prediction angle, selecting a filter from a set of filters based on the selected directional intra-prediction mode, determining, for a given prediction sample of the prediction block, a reference sample from a set of reference samples based on the selected directional intra-prediction mode, and applying the selected filter to the determined reference sample.

[0055] In an embodiment, the method comprises determining a filter length based on the selected directional intra-prediction mode, and selecting as the filter one having at least the determined filter length.

[0056] In an embodiment, the set of filters includes filters with different filter lengths, particularly with filter lengths that span 1, 3 or 5 adjacent reference samples.

[0057] In an embodiment, each filter in the set of filters performs a different smoothing over the determined reference sample and one or more adjacent reference samples, when applied to the determined reference sample.

[0058] In an embodiment, the method comprises determining the intra-prediction angle corresponding to the selected directional intra-prediction mode, and selecting the filter in dependence of the determined intra-prediction angle.

[0059] In an embodiment, the method comprises determining the intra-prediction angle corresponding to the selected directional intra-prediction mode, specifying, for a further prediction sample of the prediction block, a further reference sample from the set of reference samples based on the selected directional intra-prediction mode, determining a distance between the determined reference sample and the further reference sample, and selecting the filter in dependence of the determined distance.

[0060] In an embodiment, the method comprises selecting the same filter for each directional intra-prediction mode selected from a first subset of the directional intra-prediction modes, and selecting a different filter for each directional intra-prediction mode selected from a second subset of the directional intra-prediction modes.

[0061] In an embodiment, the method comprises intra-predicting the given prediction sample directly from the determined reference sample, wherein the method comprises applying the selected filter to the determined reference sample before or during the intra-prediction of the given prediction sample.

[0062] In an embodiment, the method comprises generating a transposed reference sample by interpolating the determined reference sample based on the selected intra-prediction mode, and intra-predicting the given prediction sample from the transposed reference sample, wherein the method comprises applying the selected filter to the determined reference sample before or during the generation of the transposed reference sample.

[0063] In an embodiment, the method comprises transposing each reference sample in the set of reference samples, wherein a row of reference samples becomes a column of transposed reference samples, and a column of reference samples becomes a row of transposed reference samples.

[0064] In an embodiment, the reference samples of the set of reference samples are arranged in a row of the video image adjacently above and above-right the prediction block, and/or are arranged in a column of the video image adjacently left and left-under the prediction block.

[0065] In an embodiment, the method is performed for encoding and/or decoding the video image, or the method is performed in a video encoder and/or video decoder.

[0066] The method of the second aspect and its embodiments achieve the same advantages and effects described above for the device of the first aspect and its respective embodiments.

[0067] It has to be noted that all devices, elements, units and means described in the present application could be implemented in the software or hardware elements or any kind of combination thereof. All steps which are performed by the various entities described in the present application as well as the functionalities described to be performed by the various entities are intended to mean that the respective entity is adapted to or configured to perform the respective steps and functionalities. Even if, in the following description of specific embodiments, a specific functionality or step to be performed by external entities is not reflected in the description of a specific detailed element of that entity which performs that specific step or functionality, it should be clear for a skilled person that these methods and functionalities can be implemented in respective software or hardware elements, or any kind of combination thereof.

[0068] Details of one or more embodiments are set forth in the accompanying drawings and the description below. Other features, objects, and advantages will be apparent from the description, drawings, and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0069] In the following embodiments of the application are described in more detail with reference to the attached figures and drawings, in which:

[0070] FIG. 1 is a block diagram showing an example structure of a video encoder configured to implement embodiments of the application.

[0071] FIG. 2 is a block diagram showing an example structure of a video decoder configured to implement embodiments of the application.

[0072] FIG. 3 is a block diagram showing an example of a video coding system configured to implement embodiments of the application.

[0073] FIG. 4 shows (a) a source of discontinuities for a case when intra-prediction angles are smaller than 45° , and (b) inter-row discontinuities for the case when intra-prediction angles are smaller than 45° .

[0074] FIG. 5 is a block diagram showing a device according to an embodiment.

[0075] FIG. 6 shows a flowchart of a reference sample filter selection mechanism, which depends on the intra prediction angle, as carried out by a device according to an embodiment.

[0076] FIG. 7 shows a reference sample pre-interpolation mechanism, as carried out by a device according to an embodiment.

[0077] FIG. 8 shows a flow-diagram of a method according to an embodiment.

[0078] FIG. 9 shows intra-prediction modes in the HM and JEM software (the angular/directional modes are marked by dashed lines are introduced just for JEM but not for HM).

[0079] FIG. 10 shows schematically a QTBT partitioning.

[0080] FIG. 11 shows a current implementation of a directional intra-prediction mechanism in the QT and QTBT frameworks.

[0081] FIG. 12 explains an orientation of rectangular blocks, particularly shows a rectangular block with (a) a horizontal orientation and (b) a vertical orientation.

[0082] FIG. 13 shows intra-mode selection proposed in JVET-D0113.

[0083] FIG. 14 shows a proposed extension of directional intra-prediction modes.

[0084] FIG. 15 shows schematically a distance between reference samples for intra-predicting two adjacent rows of prediction samples for intra-prediction angles equal to 45° .

[0085] FIG. 16 shows schematically a distance between reference samples for intra-prediction two adjacent rows of prediction samples for intra-prediction angles smaller than 45° .

DETAILED DESCRIPTION OF EMBODIMENTS

[0086] In the following description, reference is made to the accompanying figures, which form part of the disclosure, and which show, by way of illustration, specific aspects of embodiments of the application or specific aspects in which embodiments of the present application may be used. It is understood that embodiments of the application may be used in other aspects and comprise structural or logical changes not depicted in the figures. The following detailed description, therefore, is not to be taken in a limiting sense, and the scope of the present application is defined by the appended claims.

[0087] For instance, it is understood that a disclosure in connection with a described method may also hold true for a corresponding device or system configured to perform the method and vice versa. For example, if one or a plurality of specific method steps are described, a corresponding device may include one or a plurality of units, e.g., functional units, to perform the described one or plurality of method steps (e.g., one unit performing the one or plurality of steps, or a plurality of units each performing one or more of the plurality of steps), even if such one or more units are not explicitly described or illustrated in the figures. On the other hand, for example, if a specific apparatus is described based on one or a plurality of units, e.g., functional units, a corresponding method may include one step to perform the functionality of the one or plurality of units (e.g., one step performing the functionality of the one or plurality of units, or a plurality of steps each performing the functionality of one or more of the plurality of units), even if such one or plurality of steps are not explicitly described or illustrated in the figures. Further, it is understood that the features of the various exemplary embodiments and/or aspects described herein may be combined with each other, unless specifically noted otherwise.

[0088] Video coding typically refers to the processing of a sequence of pictures, which form the video or video sequence. Instead of the term picture the terms frame or image may be used as synonyms in the field of video coding. Video coding comprises two parts, video encoding and video decoding. Video encoding is performed at the source side, typically comprising processing (e.g., by compression) the original video pictures to reduce the amount of data required for representing the video pictures (for more efficient storage and/or transmission). Video decoding is performed at the destination side and typically comprises the inverse processing compared to the encoder to reconstruct the video pictures. Embodiments referring to “coding” of video pictures (or video images or pictures in general, as will be explained later) shall be understood to relate to both, “encoding” and “decoding” of video pictures. The combination of the encoding part and the decoding part is also referred to as CODEC (COding and DEcoding).

[0089] In case of lossless video coding, the original video pictures can be reconstructed, i.e. the reconstructed video pictures have the same quality as the original video pictures (assuming no transmission loss or other data loss during storage or transmission). In case of lossy video coding, further compression, e.g., by quantization, is performed, to reduce the amount of data representing the video pictures, which cannot be completely reconstructed at the decoder, i.e. the quality of the reconstructed video pictures is lower or worse compared to the quality of the original video pictures.

[0090] Several video coding standards since H.261 belong to the group of “lossy hybrid video codecs” (i.e. combine spatial and temporal prediction in the sample domain and 2D transform coding for applying quantization in the transform domain). Each picture of a video sequence is typically partitioned into a set of non-overlapping blocks and the coding is typically performed on a block level. In other words, at the encoder the video is typically processed, i.e. encoded, on a block (video block) level, e.g., by using spatial (intra picture) prediction and temporal (inter picture) prediction to generate a prediction block, subtracting the prediction block from the current block (block currently processed/to be processed) to obtain a residual block, trans-

forming the residual block and quantizing the residual block in the transform domain to reduce the amount of data to be transmitted (compression), whereas at the decoder the inverse processing compared to the encoder is applied to the encoded or compressed block to reconstruct the current block for representation. Furthermore, the encoder duplicates the decoder processing loop such that both will generate identical predictions (e.g., intra- and inter predictions) and/or re-constructions for processing, i.e. coding, the subsequent blocks.

[0091] As video picture processing (also referred to as moving picture processing) and still picture processing (the term processing comprising coding), share many concepts and technologies or tools, in the following the term “picture” is used to refer to a video picture of a video sequence (as explained above) and/or to a still picture to avoid unnecessary repetitions and distinctions between video pictures and still pictures, where not necessary. In case the description refers to still pictures (or still images) only, the term “still picture” shall be used.

[0092] In the following an encoder **100**, a decoder **200** and a coding system **300** for implementing embodiments of the application are described based on FIGS. **1** to **3**, before describing the embodiments of the application in more detail based on FIGS. **4** to **11**.

[0093] FIG. **3** is a conceptional or schematic block diagram illustrating an embodiment of a coding system **300**, e.g., a picture coding system, where the coding system **300** comprises a source device **310** configured to provide encoded data **330**, e.g., an encoded picture, e.g., to a destination device **320** for decoding the encoded data **330**.

[0094] The source device **310** comprises an encoder or encoding unit **100**, and may additionally comprise a picture source **312**, a pre-processing unit **314**, e.g., a picture pre-processing unit, and a communication interface or communication unit **318**.

[0095] The picture source **312** may comprise or be any kind of picture capturing device, for example for capturing a real-world picture, and/or any kind of a picture generating device, for example a computer-graphics processor for generating a computer animated picture, or any kind of device for obtaining and/or providing a real-world picture, a computer animated picture (e.g., a screen content, a virtual reality (VR) picture) and/or any combination thereof (e.g., an augmented reality (AR) picture). In the following, all these kinds of pictures and any other kind of picture will be referred to as “picture”, unless specifically described otherwise, while the previous explanations with regard to the term “picture” covering “video pictures”, “video images”, “still images”, and “still pictures” still hold true, unless explicitly specified differently.

[0096] A (digital) picture is or can be regarded as a two-dimensional array or matrix of samples with intensity values. A sample in the array may also be referred to as pixel (short form of picture element) or a pel. The number of samples in horizontal and vertical direction (or axis) of the array or picture define the size and/or resolution of the picture. For representation of color, typically three color components are employed, i.e. the picture may be represented or include three sample arrays. In RGB format or color space a picture comprises a corresponding red, green and blue sample array. However, in video coding each pixel is typically represented in a luminance/chrominance format or color space, e.g., YCbCr, which comprises a luminance

component indicated by Y (sometimes also L is used instead) and two chrominance components indicated by Cb and Cr. The luminance (or short luma) component Y represents the brightness or grey level intensity (e.g., like in a grey-scale picture), while the two chrominance (or short chroma) components Cb and Cr represent the chromaticity or color information components. Accordingly, a picture in YCbCr format comprises a luminance sample array of luminance sample values (Y), and two chrominance sample arrays of chrominance values (Cb and Cr). Pictures in RGB format may be converted or transformed into YCbCr format and vice versa, the process is also known as color transformation or conversion. If a picture is monochrome, the picture may comprise only a luminance sample array.

[0097] The picture source **312** may be, for example a camera for capturing a picture, a memory, e.g., a picture memory, comprising or storing a previously captured or generated picture, and/or any kind of interface (internal or external) to obtain or receive a picture. The camera may be, for example, a local or integrated camera integrated in the source device, the memory may be a local or integrated memory, e.g., integrated in the source device. The interface may be, for example, an external interface to receive a picture from an external video source, for example an external picture capturing device like a camera, an external memory, or an external picture generating device, for example an external computer-graphics processor, computer or server. The interface can be any kind of interface, e.g., a wired or wireless interface, an optical interface, according to any proprietary or standardized interface protocol. The interface for obtaining the picture data **312** may be the same interface as or a part of the communication interface **318**.

[0098] In distinction to the pre-processing unit **314** and the processing performed by the pre-processing unit **314**, the picture or picture data **313** may also be referred to as raw picture or raw picture data **313**.

[0099] Pre-processing unit **314** is configured to receive the (raw) picture data **313** and to perform pre-processing on the picture data **313** to obtain a pre-processed picture **315** or pre-processed picture data **315**. Pre-processing performed by the pre-processing unit **314** may, e.g., comprise trimming, color format conversion (e.g., from RGB to YCbCr), color correction, or de-noising.

[0100] The encoder **100** is configured to receive the pre-processed picture data **315** and provide encoded picture data **171** (further details will be described, e.g., based on FIG. **1**).

[0101] Communication interface **318** of the source device **310** may be configured to receive the encoded picture data **171** and to directly transmit it to another device, e.g., the destination device **320** or any other device, for storage or direct reconstruction, or to process the encoded picture data **171** for respectively before storing the encoded data **330** and/or transmitting the encoded data **330** to another device, e.g., the destination device **320** or any other device for decoding or storing.

[0102] The destination device **320** comprises a decoder **200** or decoding unit **200**, and may additionally comprise a communication interface or communication unit **322**, a post-processing unit **326** and a display device **328**.

[0103] The communication interface **322** of the destination device **320** is configured receive the encoded picture data **171** or the encoded data **330**, e.g., directly from the source device **310** or from any other source, e.g., a memory or an encoded picture data memory.

[0104] The communication interface 318 and the communication interface 322 may be configured to transmit respectively receive the encoded picture data 171 or encoded data 330 via a direct communication link between the source device 310 and the destination device 320, e.g., a direct wired or wireless connection, or via any kind of network, e.g., a wired or wireless network or any combination thereof, or any kind of private and public network, or any kind of combination thereof.

[0105] The communication interface 318 may be, e.g., configured to package the encoded picture data 171 into an appropriate format, e.g., packets, for transmission over a communication link or communication network, and may further comprise data loss protection and data loss recovery.

[0106] The communication interface 322, forming the counterpart of the communication interface 318, may be, e.g., configured to de-package the encoded data 330 to obtain the encoded picture data 171 and may further be configured to perform data loss protection and data loss recovery, e.g., comprising error concealment.

[0107] Both, communication interface 318 and communication interface 322 may be configured as unidirectional communication interfaces as indicated by the arrow for the encoded picture data 330 in FIG. 3 pointing from the source device 310 to the destination device 320, or bi-directional communication interfaces, and may be configured, e.g., to send and receive messages, e.g., to set up a connection, to acknowledge and/or re-send lost or delayed data including picture data, and exchange any other information related to the communication link and/or data transmission, e.g., encoded picture data transmission.

[0108] The decoder 200 is configured to receive the encoded picture data 171 and provide decoded picture data or a decoded picture 231 (further details will be described, e.g., based on FIG. 2).

[0109] The post-processor 326 of destination device 320 is configured to post-process the decoded picture data or the decoded picture 231, to obtain post-processed picture data or post-processed picture 327. The post-processing performed by the post-processing unit 326 may comprise, e.g., color format conversion (e.g., from YCbCr to RGB), color correction, trimming, or re-sampling, or any other processing, e.g., for preparing the decoded picture data 231 for display, e.g., by display device 328.

[0110] The display device 328 of the destination device 320 is configured to receive the post-processed picture data 327 for displaying the picture, e.g., to a user or viewer. The display device 328 may be or comprise any kind of display for representing the reconstructed picture, e.g., an integrated or external display or monitor. The displays may, e.g., comprise cathode ray tubes (CRT), liquid crystal displays (LCD), plasma displays, organic light emitting diodes (OLED) displays or any kind of other display, beamer, or hologram (3D).

[0111] Although FIG. 3 depicts the source device 310 and the destination device 320 as separate devices, embodiments of devices may also comprise both or both functionalities, the source device 310 or corresponding functionality and the destination device 320 or corresponding functionality. In such embodiments the source device 310 or corresponding functionality and the destination device 320 or corresponding functionality may be implemented using the same hardware and/or software or by separate hardware and/or software or any combination thereof.

[0112] As will be apparent for the skilled person based on the description, the existence and (exact) split of functionalities of the different units or functionalities within the source device 310 and/or destination device 320 as shown in FIG. 3 may vary depending on the actual device and application.

[0113] Therefore, the source device 310 and the destination device 320 as shown in FIG. 3 are just example embodiments of the application and embodiments of the application are not limited to those shown in FIG. 3.

[0114] Source device 310 and destination device 320 may comprise any of a wide range of devices, including any kind of handheld or stationary devices, e.g., notebook or laptop computers, mobile phones, smart phones, tablets or tablet computers, cameras, desktop computers, set-top boxes, televisions, display devices, digital media players, video gaming consoles, video streaming devices, broadcast receiver device, or the like, and may use no or any kind of operating system.

Encoder & Encoding Method

[0115] FIG. 1 shows a schematic/conceptual block diagram of an embodiment of an encoder 100, e.g., a picture encoder, which comprises an input 102, a residual calculation unit 104, a transformation unit 106, a quantization unit 108, an inverse quantization unit 110, and inverse transformation unit 112, a reconstruction unit 114, a buffer 116, a loop filter 120, a decoded picture buffer (DPB) 130, a prediction unit 160 (including an inter estimation unit 142, an inter-prediction unit 144, an intra-estimation unit 152, and an intra-prediction unit 154) a mode selection unit 162, an entropy encoding unit 170, and an output 172. A video encoder 100 as shown in FIG. 1 may also be referred to as hybrid video encoder or a video encoder according to a hybrid video codec.

[0116] For example, the residual calculation unit 104, the transformation unit 106, the quantization unit 108, and the entropy encoding unit 170 form a forward signal path of the encoder 100, whereas, for example, the inverse quantization unit 110, the inverse transformation unit 112, the reconstruction unit 114, the buffer 116, the loop filter 120, the decoded picture buffer (DPB) 130, the inter-prediction unit 144, and the intra-prediction unit 154 form a backward signal path of the encoder, wherein the backward signal path of the encoder corresponds to the signal path of the decoder (see decoder 200 in FIG. 2).

[0117] The encoder 100 is configured to receive, e.g., by input 102, a picture 101 or a picture block 103 of the picture 101, e.g., picture of a sequence of pictures forming a video or video sequence. The picture block 103 may also be referred to as current picture block or picture block to be coded, and the picture 101 as current picture or picture to be coded (in particular in video coding to distinguish the current picture from other pictures, e.g., previously encoded and/or decoded pictures of the same video sequence, i.e. the video sequence which also comprises the current picture).

Residual Calculation

[0118] The residual calculation unit 104 is configured to calculate a residual block 105 based on the picture block 103 and a prediction block 165 (further details about the prediction block 165 are provided later), e.g., by subtracting sample values of the prediction block 165 from sample

values of the picture block **103**, sample by sample (pixel by pixel) to obtain the residual block **105** in the sample domain.

Transformation

[0119] The transformation unit **106** is configured to apply a transformation, e.g., a spatial frequency transform or a linear spatial (frequency) transform, e.g., a discrete cosine transform (DCT) or discrete sine transform (DST), on the sample values of the residual block **105** to obtain transformed coefficients **107** in a transform domain. The transformed coefficients **107** may also be referred to as transformed residual coefficients and represent the residual block **105** in the transform domain.

[0120] The transformation unit **106** may be configured to apply integer approximations of DCT/DST, such as the core transforms specified for HEVC/H.265. Compared to an orthonormal DCT transform, such integer approximations are typically scaled by a certain factor. In order to preserve the norm of the residual block which is processed by forward and inverse transforms, additional scaling factors are applied as part of the transform process. The scaling factors are typically chosen based on certain constraints like scaling factors being a power of two for shift operation, bit depth of the transformed coefficients, trade-off between accuracy and implementation costs, etc. Specific scaling factors are, for example, specified for the inverse transform, e.g., by inverse transformation unit **212**, at a decoder **200** (and the corresponding inverse transform, e.g., by inverse transformation unit **112** at an encoder **100**) and corresponding scaling factors for the forward transform, e.g., by transformation unit **106**, at an encoder **100** may be specified accordingly.

Quantization

[0121] The quantization unit **108** is configured to quantize the transformed coefficients **107** to obtain quantized coefficients **109**, e.g., by applying scalar quantization or vector quantization. The quantized coefficients **109** may also be referred to as quantized residual coefficients **109**. For example, for scalar quantization, different scaling may be applied to achieve finer or coarser quantization. Smaller quantization step sizes correspond to finer quantization, whereas larger quantization step sizes correspond to coarser quantization. The applicable quantization step size may be indicated by a quantization parameter (QP). The quantization parameter may for example be an index to a predefined set of applicable quantization step sizes. For example, small quantization parameters may correspond to fine quantization (e.g., small quantization step sizes) and large quantization parameters may correspond to coarse quantization (e.g., large quantization step sizes) or vice versa. The quantization may include division by a quantization step size and corresponding inverse dequantization, e.g., by inverse quantization unit **110**, or may include multiplication by the quantization step size. Embodiments according to HEVC, may be configured to use a quantization parameter to determine the quantization step size. Generally, the quantization step size may be calculated based on a quantization parameter using a fixed point approximation of an equation including division. Additional scaling factors may be introduced for quantization and dequantization to restore the norm of the residual block, which might get modified because of the scaling used in the fixed point approximation of the equation for quantization step size and quantization parameter. In an

embodiment, the scaling of the inverse transform and dequantization may be combined. Alternatively, customized quantization tables may be used and signaled from an encoder to a decoder, e.g., in a bitstream. The quantization is a lossy operation, where the loss increases with increasing quantization step sizes.

[0122] Embodiments of the encoder **100** (or respectively of the quantization unit **108**) may be configured to output the quantization scheme and quantization step size, e.g., by means of the corresponding quantization parameter, so that a decoder **200** may receive and apply the corresponding inverse quantization. Embodiments of the encoder **100** (or quantization unit **108**) may be configured to output the quantization scheme and quantization step size, e.g., directly or entropy encoded via the entropy encoding unit **170** or any other entropy coding unit.

[0123] The inverse quantization unit **110** is configured to apply the inverse quantization of the quantization unit **108** on the quantized coefficients to obtain dequantized coefficients **111**, e.g., by applying the inverse of the quantization scheme applied by the quantization unit **108** based on or using the same quantization step size as the quantization unit **108**. The dequantized coefficients **111** may also be referred to as dequantized residual coefficients **111** and correspond—although typically not identical to the transformed coefficients due to the loss by quantization—to the transformed coefficients **108**.

[0124] The inverse transformation unit **112** is configured to apply the inverse transformation of the transformation applied by the transformation unit **106**, e.g., an inverse discrete cosine transform (DCT) or inverse discrete sine transform (DST), to obtain an inverse transformed block **113** in the sample domain. The inverse transformed block **113** may also be referred to as inverse transformed dequantized block **113** or inverse transformed residual block **113**.

[0125] The reconstruction unit **114** is configured to combine the inverse transformed block **113** and the prediction block **165** to obtain a reconstructed block **115** in the sample domain, e.g., by sample wise adding the sample values of the decoded residual block **113** and the sample values of the prediction block **165**.

[0126] The buffer unit **116** (or buffer **116**), e.g., a line buffer, is configured to buffer or store the reconstructed block and the respective sample values, for example for intra-estimation and/or intra-prediction. In some embodiments, the encoder **100** may be configured to use unfiltered reconstructed blocks and/or the respective sample values stored in buffer unit **116** for any kind of estimation and/or prediction.

[0127] The loop filter unit **120** (or loop filter **120**), is configured to filter the reconstructed block **115** to obtain a filtered block **121**, e.g., by applying a de-blocking sample-adaptive offset (SAO) filter or other filters, e.g., sharpening or smoothing filters or collaborative filters. The filtered block **121** may also be referred to as filtered reconstructed block **121**.

[0128] Embodiments of the loop filter unit **120** may comprise (not shown in FIG. 1) a filter analysis unit and the actual filter unit, wherein the filter analysis unit is configured to determine loop filter parameters for the actual filter. The filter analysis unit may be configured to apply fixed pre-determined filter parameters to the actual loop filter, adap-

tively select filter parameters from a set of predetermined filter parameters or adaptively calculate filter parameters for the actual loop filter.

[0129] Embodiments of the loop filter unit **120** may comprise (not shown in FIG. 1) one or a plurality of filters (loop filter components/subfilters), e.g., one or more of different kinds or types of filters, e.g., connected in series or in parallel or in any combination thereof, wherein each of the filters may comprise individually or jointly with other filters of the plurality of filters a filter analysis unit to determine the respective loop filter parameters, e.g., as described in the previous paragraph.

[0130] Embodiments of the encoder **100** (respectively loop filter unit **120**) may be configured to output the loop filter parameters, e.g., directly or entropy encoded via the entropy encoding unit **170** or any other entropy coding unit, so that, e.g., a decoder **200** may receive and apply the same loop filter parameters for decoding.

[0131] The decoded picture buffer (DPB) **130** is configured to receive and store the filtered block **121**. The decoded picture buffer **130** may be further configured to store other previously filtered blocks, e.g., previously reconstructed and filtered blocks **121**, of the same current picture or of different pictures, e.g., previously reconstructed pictures, and may provide complete previously reconstructed, i.e. decoded, pictures (and corresponding reference blocks and samples) and/or a partially reconstructed current picture (and corresponding reference blocks and samples), for example for inter-estimation and/or inter-prediction.

[0132] Further embodiments of the application may also be configured to use the previously filtered blocks and corresponding filtered sample values of the decoded picture buffer **130** for any kind of estimation or prediction, e.g., intra- and inter-estimation and prediction.

Motion Estimation and Prediction

[0133] The prediction unit **160**, also referred to as block prediction unit, is configured to receive or obtain the picture block **103** (current picture block **103** of the current picture **101**) and decoded or at least reconstructed picture data, e.g., reference samples of the same (current) picture from buffer **116** and/or decoded picture data **231** from one or a plurality of previously decoded pictures from decoded picture buffer **130**, and to process such data for prediction, i.e. to provide a prediction block **165**, which may be an inter-predicted block **145** or an intra-predicted block **155**.

[0134] Mode selection unit **162** may be configured to select a prediction mode (e.g., an intra- or inter-prediction mode) and/or a corresponding prediction block **145** or **155** to be used as prediction block **165** for the calculation of the residual block **105** and for the reconstruction of the reconstructed block **115**.

[0135] Embodiments of the mode selection unit **162** may be configured to select the prediction mode (e.g., from those supported by prediction unit **160**), which provides the best match or in other words the minimum residual (minimum residual means better compression for transmission or storage), or a minimum signaling overhead (minimum signaling overhead means better compression for transmission or storage), or which considers or balances both. The mode selection unit **162** may be configured to determine the prediction mode based on rate distortion optimization (RDO), i.e. select the prediction mode which provides a

minimum rate distortion optimization or which associated rate distortion at least fulfills a prediction mode selection criterion.

[0136] In the following the prediction processing (e.g., prediction unit **160**) and mode selection (e.g., by mode selection unit **162**) performed by an example encoder **100** will be explained in more detail.

[0137] As described above, encoder **100** is configured to determine or select the best or an optimum prediction mode from a set of (pre-determined) prediction modes. The set of prediction modes may comprise, e.g., intra-prediction modes and/or inter-prediction modes.

[0138] The set of intra-prediction modes may comprise 32 different intra-prediction modes, e.g., non-directional modes like DC (or mean) mode and planar mode, or directional modes, e.g., as defined in H.264, or may comprise 65 different intra-prediction modes, e.g., non-directional modes like DC (or mean) mode and planar mode, or directional modes, e.g., as defined in H.265.

[0139] The set of (or possible) inter-prediction modes depend on the available reference pictures (i.e. previous at least partially decoded pictures, e.g., stored in DPB **230**) and other inter-prediction parameters, e.g., whether the whole reference picture or only a part, e.g., a search window area around the area of the current block, of the reference picture is used for searching for a best matching reference block, and/or e.g., whether pixel interpolation is applied, e.g., half/semi-pel and/or quarter-pel interpolation, or not.

[0140] Additional to the above prediction modes, skip mode and/or direct mode may be applied.

[0141] The prediction unit **160** may be further configured to partition the block **103** into smaller block partitions or sub-blocks, e.g., iteratively using quad-tree-partitioning (QT), binary partitioning (BT) or triple-tree-partitioning (TT) or any combination thereof, and to perform, e.g., the prediction for each of the block partitions or sub-blocks, wherein the mode selection comprises the selection of the tree-structure of the partitioned block **103** and the prediction modes applied to each of the block partitions or sub-blocks.

[0142] The inter-estimation unit **142**, also referred to as inter picture estimation unit, is configured to receive or obtain the picture block **103** (current picture block **103** of the current picture **101**) and a decoded picture **231**, or at least one or a plurality of previously reconstructed blocks, e.g., reconstructed blocks of one or a plurality of other/different previously decoded pictures **231**, for inter-estimation (or "inter picture estimation"). For example, a video sequence may comprise the current picture and the previously decoded pictures **231**, or in other words, the current picture and the previously decoded pictures **231** may be part of or form a sequence of pictures forming a video sequence.

[0143] The encoder **100** may, e.g., be configured to select a reference block from a plurality of reference blocks of the same or different pictures of the plurality of other pictures and provide a reference picture (or reference picture index) and/or an offset (spatial offset) between the position (e.g., x, y coordinates) of the reference block and the position of the current block as inter-estimation parameters **143** to the inter-prediction unit **144**. This offset is also called motion vector (MV). The inter-estimation is also referred to as motion estimation (ME) and the inter-prediction also motion prediction (MP).

[0144] The inter-prediction unit **144** is configured to obtain, e.g., receive, an inter-prediction parameter **143** and

to perform inter-prediction based on or using the inter-prediction parameter **143** to obtain an inter-prediction block **145**.

[0145] Although FIG. 1 shows two distinct units (or steps) for the inter-coding, namely inter estimation **142** and inter-prediction **152**, both functionalities may be performed as one (inter estimation typically comprises calculating an/the inter-prediction block, i.e. the or a “kind of” inter-prediction **152**), e.g., by testing all possible or a predetermined subset of possible interprediction modes iteratively while storing the currently best inter-prediction mode and respective inter-prediction block, and using the currently best inter-prediction mode and respective inter-prediction block as the (final) inter-prediction parameter **143** and inter-prediction block **145** without performing another time the inter-prediction **144**.

[0146] The intra-estimation unit **152** is configured to obtain, e.g., receive, the picture block **103** (e.g., current picture block) and one or a plurality of previously reconstructed blocks, e.g., reconstructed neighbor blocks, of the same picture for intra-estimation. The encoder **100** may, e.g., be configured to select an intra-prediction mode from a plurality of intra-prediction modes and provide it as intra-estimation parameter **153** to the intra-prediction unit **154**.

[0147] Embodiments of the encoder **100** may be configured to select the intra-prediction mode based on an optimization criterion, e.g., minimum residual (e.g., the intra-prediction mode providing the prediction block **155** most similar to the current picture block **103**) or minimum rate distortion.

[0148] The intra-prediction unit **154** is configured to determine based on the intra-prediction parameter **153**, e.g., the selected intra-prediction mode **153**, the intra-prediction block **155**.

[0149] Although FIG. 1 shows two distinct units (or steps) for the intra-coding, namely intra-estimation **152** and intra-prediction **154**, both functionalities may be performed as one (intra-estimation typically comprises calculating the intra-prediction block, i.e. the or a “kind of” intra-prediction **154**), e.g., by testing all possible or a predetermined subset of possible intra-prediction modes iteratively while storing the currently best intra-prediction mode and respective intra-prediction block, and using the currently best intra-prediction mode and respective intra-prediction block as the (final) intra-prediction parameter **153** and intra-prediction block **155** without performing another time the intra-prediction **154**.

[0150] The application, as explained further below with respect to the device **500** (FIG. 5) and method **800** (FIG. 8) according to embodiments of the application may be applied at this position of the encoder **100**. That is, the device **500** may be or be part of the encoder **100**, specifically the intra-prediction unit **154**.

[0151] The entropy encoding unit **170** is configured to apply an entropy encoding algorithm or scheme (e.g., a variable length coding (VLC) scheme, an context adaptive VLC scheme (CALVC), an arithmetic coding scheme, a context adaptive binary arithmetic coding (CABAC) on the quantized residual coefficients **109**, inter-prediction parameters **143**, intra-prediction parameter **153**, and/or loop filter parameters, individually or jointly (or not at all) to obtain encoded picture data **171** which can be output by the output **172**, e.g., in the form of an encoded bitstream **171**.

[0152] FIG. 2 shows an example video decoder **200** configured to receive encoded picture data (e.g., encoded bitstream) **171**, e.g., encoded by encoder **100**, to obtain a decoded picture **231**.

[0153] The decoder **200** comprises an input **202**, an entropy decoding unit **204**, an inverse quantization unit **210**, an inverse transformation unit **212**, a reconstruction unit **214**, a buffer **216**, a loop filter **220**, a decoded picture buffer **230**, a prediction unit **260** (including an inter-prediction unit **244**, and an intra-prediction unit **254**), a mode selection unit **262** and an output **232**.

[0154] The entropy decoding unit **204** is configured to perform entropy decoding to the encoded picture data **171** to obtain, e.g., quantized coefficients **209** and/or decoded coding parameters (not shown in FIG. 2), e.g., (decoded) any or all of inter-prediction parameters **143**, intra-prediction parameter **153**, and/or loop filter parameters.

[0155] In embodiments of the decoder **200**, the inverse quantization unit **210**, the inverse transformation unit **212**, the reconstruction unit **214**, the buffer **216**, the loop filter **220**, the decoded picture buffer **230**, the prediction unit **260** and the mode selection unit **262** are configured to perform the inverse processing of the encoder **100** (and the respective functional units) to decode the encoded picture data **171**.

[0156] In particular, the inverse quantization unit **210** may be identical in function to the inverse quantization unit **110**, the inverse transformation unit **212** may be identical in function to the inverse transformation unit **112**, the reconstruction unit **214** may be identical in function reconstruction unit **114**, the buffer **216** may be identical in function to the buffer **116**, the loop filter **220** may be identical in function to the loop filter **120** (with regard to the actual loop filter as the loop filter **220** typically does not comprise a filter analysis unit to determine the filter parameters based on the original image **101** or block **103** but receives (explicitly or implicitly) or obtains the filter parameters used for encoding, e.g., from entropy decoding unit **204**), and the decoded picture buffer **230** may be identical in function to the decoded picture buffer **130**.

[0157] The prediction unit **260** may comprise an inter-prediction unit **244** and an intra-prediction unit **254**, wherein the inter-prediction unit **144** may be identical in function to the inter-prediction unit **244**, and the intra-prediction unit **154** may be identical in function to the intra-prediction unit **254**. The prediction unit **260** and the mode selection unit **262** are typically configured to perform the block prediction and/or obtain the predicted block **265** from the encoded data **171** only (without any further information about the original image **101**) and to receive or obtain (explicitly or implicitly) the prediction parameters **143** or **153** and/or the information about the selected prediction mode, e.g., from the entropy decoding unit **204**.

[0158] The application, as explained further below with respect to the device **500** (see FIG. 5) and method **800** (see FIG. 8) according to embodiments of the application may be applied at this position of the decoder **200**. That is, the device **500** may be or be part of the decoder **200**, specifically the intra-prediction unit **154**.

[0159] The decoder **200** is configured to output the decoded picture **230**, e.g., via output **232**, for presentation or viewing to a user.

[0160] With reference to FIGS. 15 and 16, FIG. 4 illustrates more specifically in (a) the source of discontinuities that can be removed by the embodiments of the application.

In particular, the reason for these discontinuities is that two vertically adjacent prediction samples **401** in a prediction block **400** (e.g., PU or TU) may be predicted from reference samples **403** that are not adjacent to each other due to an acute intra-prediction angle, which is an interpolation flaw. While this flaw may partially be reduced by applying a reference samples smoothing filter or an intra-interpolation filter with a length N_f , a fixed length may not be large enough in the case of an intra-prediction angle of significantly less than 45° . The filtering process can reduce discontinuity effects by convoluting the reference samples **403** shown in FIG. 4 during the filtering process. However, discontinuities may still occur, if the reference samples **403** selected for the vertically adjacent prediction samples **401** are too far apart. An example of such discontinuities, which can be visually observed e.g., for the case of synthesized reference (the upper row), is shown in (b).

[0161] FIG. 5 shows schematically a device **500** according to an embodiment, which configured to intra-predict a prediction block **400** of a video image in an improved manner, namely is able to eliminate the above-described source of the discontinuities shown in FIG. 4. The device **500** may be or be part of the encoder **100** or decoder **200** shown in FIG. 1 or FIG. 2, respectively, specifically the intra-prediction units **154** or **254**.

[0162] The device **500** is configured to perform several functions, for instance, implemented by means of a processor or other kind of processing circuitry. In an embodiment, the device **500** is configured to select a directional intra-prediction mode **501a** from a set of directional intra-prediction modes **501**, wherein each directional intra-prediction mode **501** corresponds to a different intra-prediction angle. These directional intra-prediction modes **501** may include the directional/angular intra-prediction modes shown in FIG. 9 (and as defined in the standard), and may include extended directional intra-prediction modes, corresponding to further intra-prediction angles, as shown e.g., in FIG. 14. In particular, for rectangular prediction blocks **400**, the directional intra-prediction modes **501** may include modes that relate to acute intra-prediction angles (angles smaller than 45°). The intra-prediction angle bases on the direction of intra-predicting a prediction sample **401** from a reference sample **403**. For instance, the angle is defined between this intra-prediction direction and an upper edge (horizontal edge) of the prediction block **400**.

[0163] Further, the device **500** is configured to select a filter **402a** from a set of filters **402** based on the selected directional intra-prediction mode **501a**. In particular, the device **500** may be configured to determine a filter length based on the selected directional intra-prediction mode **401a**, and select as the filter **402a** one filter **402** from the set having at least the determined filter length.

[0164] The device **500** is further configured to determine, for a given prediction sample **401** of the prediction block **400**, a reference sample **403a** from a set of reference samples **403** based on the selected directional intra-prediction mode **501a**, and apply the selected filter **402a** to the determined reference sample **403a**. The device **500** may particularly be configured to proceed in this way for each prediction sample **401** of the prediction block **400**. That is, for each prediction sample **401**, the device **500** may determine a reference sample **403a** from the reference samples **403**, and may apply the selected filter **402a** to each reference

sample **403**. In this way, the device **500** is able to intra-predict the entire prediction block **400**.

[0165] An example filter set, from which the device **500** is configured to select the filter **402**, is shown in the below table. The filter set particularly includes different filters **402**. For instance, the set of filters **402** may include filters **402** having different filter lengths N_f , particularly having filter lengths N_f that span 1, 3 or 5 adjacent reference samples **403**. Further, each filter **402** in the set of filters **402** may perform a different smoothing over the determined reference sample **403a** and one or more adjacent reference samples **403**, when it is applied to the determined reference sample **403a**. This smoothing may be expressed as in the table by different coefficients, wherein the numbers of the coefficients indicate the relative weighting of the determined reference sample **403a** to the other adjacent reference samples (middle number for determined reference sample **403a** to respectively 0, 2 or 4 further numbers for adjacent reference samples **403**).

Index	0	1	2	3
Coefficients	[1]	[1, 2, 1]	[2, 3, 6, 3, 2]	[1, 4, 6, 4, 1]
Filter length N_f	1	3	5	5

[0166] FIG. 6 shows an example flow-chart of a reference sample filter selection mechanism **600**, which the device **500** may be configured to carry out. The device **500** is particularly able to select the reference sample filter **402a** depending on the intra-prediction angle. It is assumed for the mechanism **600** that the filter set (here denoted F) is sorted by filter length N_f in ascending order.

[0167] At block **601**, the device **500** is configured to derive as input to the selection mechanism **600**, the intra-prediction angle α . The device **500** may be configured to determine the intra-prediction angle corresponding to the selected directional intra-prediction mode **501**.

[0168] At block **602**, the device **500** is then configured to derive a distance Δp_α (see e.g., FIG. 4) between the determined reference sample **403a** and a further reference sample **403b**, which may be specified for a further prediction sample **401** of the prediction block **400** from the set of reference samples **403** based on the selected directional intra-prediction mode **501a**.

[0169] At block **603**, the filter index is initialized to $i=0$. At block **604** a filter **402** with the current index i is taken from the filter set. For instance, the above table shows that filters **402** may be indexed from $i=0-3$.

[0170] At block **605**, the device **500** is configured to determine, whether the length N_f of the filter **402** taken from the set is smaller than the distance Δp_α . If not, the selection mechanism **600** is complete, and the currently taken filter **402** is selected as the filter **402a** to be applied to the determined reference sample **403a**.

[0171] Otherwise, the device **500** is configured to check at block **606**, whether the current filter index i is smaller than k , wherein k may be the highest possible filter index and/or indicate the number of filters **402** in the filter set. If not, the selection mechanism **600** is complete and the currently taken filter **402**, which in this case corresponds to the filter **402** with the largest filter length N_f assuming the set is sorted by filter length, is selected as the filter **402a** to be applied to the determined reference sample **403a**. Otherwise, the filter

index is increased by 1 at block 607, and the selection mechanism proceeds with block 604 (i.e. the next filter 402 in the set is taken).

[0172] As shown in FIG. 7, the device 500 may also be configured to perform pre-processing of reference samples 403. In particular, the device 500 may be configured to generate a transposed reference sample 700a from the determined reference sample 403a, namely by interpolating the determined reference sample 403a based on the selected intra-prediction mode 501a. Then, the device 500 may be configured to intra-predict the given prediction sample 401 from the transposed reference sample 700a, instead of directly from the determined reference sample 403a.

[0173] A first step of the pre-processing is shown exemplarily in (a) of FIG. 7, and may consist in calculating a set of transposed reference samples 700 (denoted R) from a given top row of reference samples 403 (denoted R). An input to this step may be a set of reference samples 403 located to the top and top-right side of the block 400 to be predicted. These reference samples 403 can be filtered as described above depending on the intra-prediction angle. That is, the device 500 may be configured to select the filter 402a as described above, and then apply the selected filter 402a to the determined reference sample 403a before or during the generation of the transposed reference sample 700a.

[0174] The first step is particularly performed by means of interpolation performed for two parts of R. One part of the set denoted R_L is located to the left side of the top-right pixel of the block P_{TR} . The reference sample 403 at position P_{TR} is not altered during this first step, i.e. $\hat{R}(P_{TR}) = R(P_{TR})$. Another part denoted R_R is located to the right side of P_{TR} . For both parts, interpolation is performed using the same mechanism as used to predict samples inside a block 400 to be predicted (denoted B). A prediction angle α used for these two parts is the same, but the prediction direction is opposite.

[0175] A second step of the pre-processing is shown in (b) of FIG. 7 and is to intra-predict prediction samples 401 of the block 400 to be predicted, namely by performing intra-prediction interpolation from the set of transposed reference samples 700 calculated in the first step shown in (a). If the intra-prediction direction uses not the top row, i.e. the angle of intra-prediction direction α is greater than 180 degrees, a block and corresponding reference samples are transposed (row indexes become column indexes and vice versa), and intra-prediction is performed as described above. The final result in this case is obtained by transposing back the calculated predicted block.

[0176] FIG. 8 shows a method 800 according to an embodiment. The method 800 is for intra-predicting a prediction block 400 of a video image, and may be carried out by the device 500 shown in FIG. 5. In particular, the method 800 comprises a step 801 of selecting a directional intra-prediction mode 501a from a set of directional intra-prediction modes 501, wherein each directional intra-prediction mode 501 corresponds to a different intra-prediction angle. Further, the method 800 comprises a step 802 of selecting a filter 402a from a set of filters 402 based on the selected directional intra-prediction mode 501a. Then, the method 800 comprises a step 803 of determining, for a given prediction sample 401 of the prediction block 400, a reference sample 403a from a set of reference samples 403 based on the selected directional intra-prediction mode 501a, and

a step 804 of applying the selected filter 402a to the determined reference sample 403a.

[0177] Note that this specification provides explanations for pictures (frames), but fields substitute as pictures in the case of an interlace picture signal.

[0178] Although embodiments of the application have been primarily described based on video coding, it should be noted that embodiments of the encoder 100 and decoder 200 (and correspondingly the system 300) may also be configured for still picture processing or coding, i.e. the processing or coding of an individual picture independent of any preceding or consecutive picture as in video coding. In general, only inter-estimation 142, inter-prediction 144, 242 are not available in case the picture processing coding is limited to a single picture 101. Most if not all other functionalities (also referred to as tools or technologies) of the video encoder 100 and video decoder 200 may equally be used for still pictures, e.g., partitioning, transformation (scaling) 106, quantization 108, inverse quantization 110, inverse transformation 112, intra-estimation 142, intra-prediction 154, 254 and/or loop filtering 120, 220, and entropy coding 170 and entropy decoding 204.

[0179] The person skilled in the art will understand that the “blocks” (“units”) of the various figures (method and apparatus) represent or describe functionalities of embodiments of the application (rather than necessarily individual “units” in hardware or software) and thus describe equally functions or features of apparatus embodiments as well as method embodiments (unit=step).

[0180] The terminology of “units” is merely used for illustrative purposes of the functionality of embodiments of the encoder/decoder and are not intended to limiting the disclosure.

[0181] In the several embodiments provided in the present application, it should be understood that the disclosed system, apparatus, and method may be implemented in other manners. For example, the described apparatus embodiment is merely exemplary. For example, the unit division is merely logical function division and may be other division in actual implementation. For example, a plurality of units or components may be combined or integrated into another system, or some features may be ignored or not performed. In addition, the displayed or discussed mutual couplings or direct couplings or communication connections may be implemented by using some interfaces. The indirect couplings or communication connections between the apparatuses or units may be implemented in electronic, mechanical, or other forms.

[0182] The units described as separate parts may or may not be physically separate, and parts displayed as units may or may not be physical units, may be located in one position, or may be distributed on a plurality of network units. Some or all of the units may be selected according to actual needs to achieve the objectives of the solutions of the embodiments.

[0183] In addition, functional units in the embodiments of the present application may be integrated into one processing unit, or each of the units may exist alone physically, or two or more units are integrated into one unit.

[0184] Embodiments of the application may further comprise an apparatus, e.g., encoder and/or decoder, which comprises a processing circuitry configured to perform any of the methods and/or processes described herein.

[0185] Embodiments of the encoder **100** and/or decoder **200** may be implemented as hardware, firmware, software or any combination thereof. For example, the functionality of the encoder/encoding or decoder/decoding may be performed by a processing circuitry with or without firmware or software, e.g., a processor, a microcontroller, a digital signal processor (DSP), a field programmable gate array (FPGA), an application-specific integrated circuit (ASIC), or the like.

[0186] The functionality of the encoder **100** (and corresponding encoding method **100**) and/or decoder **200** (and corresponding decoding method **200**) may be implemented by program instructions stored on a computer readable medium. The program instructions, when executed, cause a processing circuitry, computer, processor or the like, to perform the steps of the encoding and/or decoding methods. The computer readable medium can be any medium, including non-transitory storage media, on which the program is stored such as a Blu-ray disc, DVD, CD, USB (flash) drive, hard disc, server storage available via a network, etc.

[0187] An embodiment of the application comprises or is a computer program comprising program code for performing any of the methods described herein, when executed on a computer.

[0188] An embodiment of the application comprises or is a computer readable medium comprising a program code that, when executed by a processor, causes a computer system to perform any of the methods described herein.

LIST OF REFERENCE SIGNS

FIG. 1

[0189] **100** Encoder
 [0190] **103** Picture block
 [0191] **102** Input (e.g., input port, input interface)
 [0192] **104** Residual calculation [unit or step]
 [0193] **105** Residual block
 [0194] **106** Transformation (e.g., additionally comprising scaling) [unit or step]
 [0195] **107** Transformed coefficients
 [0196] **108** Quantization [unit or step]
 [0197] **109** Quantized coefficients
 [0198] **110** Inverse quantization [unit or step]
 [0199] **111** De-quantized coefficients
 [0200] **112** Inverse transformation (e.g., additionally comprising scaling) [unit or step]
 [0201] **113** Inverse transformed block
 [0202] **114** Reconstruction [unit or step]
 [0203] **115** Reconstructed block
 [0204] **116** (Line) buffer [unit or step]
 [0205] **117** Reference samples
 [0206] **120** Loop filter [unit or step]
 [0207] **121** Filtered block
 [0208] **130** Decoded picture buffer (DPB) [unit or step]
 [0209] **142** Inter estimation (or inter picture estimation) [unit or step]
 [0210] **143** Inter estimation parameters (e.g., reference picture/reference picture index, motion vector/offset)
 [0211] **144** Inter prediction (or inter picture prediction) [unit or step]
 [0212] **145** Inter prediction block
 [0213] **152** Intra estimation (or intra picture estimation) [unit or step]
 [0214] **153** Intra prediction parameters (e.g., intra prediction mode)

[0215] **154** Intra prediction (intra frame/picture prediction) [unit or step]
 [0216] **155** Intra prediction block
 [0217] **162** Mode selection [unit or step]
 [0218] **165** Prediction block (either inter prediction block **145** or intra prediction block **155**)
 [0219] **170** Entropy encoding [unit or step]
 [0220] **171** Encoded picture data (e.g., bitstream)
 [0221] **172** Output (output port, output interface)
 [0222] **231** Decoded picture

FIG. 2

[0223] **200** Decoder
 [0224] **171** Encoded picture data (e.g., bitstream)
 [0225] **202** Input (port/interface)
 [0226] **204** Entropy decoding
 [0227] **209** Quantized coefficients
 [0228] **210** Inverse quantization
 [0229] **211** De-quantized coefficients
 [0230] **212** Inverse transformation (scaling)
 [0231] **213** Inverse transformed block
 [0232] **214** Reconstruction (unit)
 [0233] **215** Reconstructed block
 [0234] **216** (Line) buffer
 [0235] **217** Reference samples
 [0236] **220** Loop filter (in loop filter)
 [0237] **221** Filtered block
 [0238] **230** Decoded picture buffer (DPB)
 [0239] **231** Decoded picture
 [0240] **232** Output (port/interface)
 [0241] **244** Inter prediction (inter frame/picture prediction)
 [0242] **245** Inter prediction block
 [0243] **254** Intra prediction (intra frame/picture prediction)
 [0244] **255** Intra prediction block
 [0245] **262** Mode selection
 [0246] **265** Prediction block (inter prediction block **245** or intra prediction block **255**)

FIG. 3

[0247] **300** Coding system
 [0248] **310** Source device
 [0249] **312** Picture Source
 [0250] **313** (Raw) picture data
 [0251] **314** Pre-processor/Pre-processing unit
 [0252] **315** Pre-processed picture data
 [0253] **318** Communication unit/interface
 [0254] **320** Destination device
 [0255] **322** Communication unit/interface
 [0256] **326** Post-processor/Post-processing unit
 [0257] **327** Post-processed picture data
 [0258] **328** Display device/unit
 [0259] **330** transmitted/received/communicated (encoded) picture data

FIG. 4

[0260] **400** Prediction block
 [0261] **401** Prediction sample
 [0262] **402** Filter
 [0263] **403** Reference Sample

FIG. 5

- [0264] 402 Filter
- [0265] 402a Selected filter
- [0266] 403 Reference sample
- [0267] 403a Determined reference sample
- [0268] 500 Device
- [0269] 501 Directional intra-prediction modes
- [0270] 501a Selected directional intra-prediction mode

FIG. 6

- [0271] 600 Filter selection mechanism
- [0272] 601-607 Functional blocks of the mechanism

FIG. 7

- [0273] 400 Prediction block
- [0274] 401 Prediction samples
- [0275] 403 Reference sample
- [0276] 403a Determined reference sample
- [0277] 700 Transposed reference samples
- [0278] 700a Transposed reference sample

FIG. 8

- [0279] 800 Method for intra-predicting a prediction block
- [0280] 801 Step of selecting an intra-prediction mode
- [0281] 802 Step of selecting a filter
- [0282] 803 Step of determining a reference sample for a given prediction sample
- [0283] 804 Step of applying the selected filter to the reference sample

1. A method for intra-predicting a prediction block of a video image, the method comprising:

selecting a directional intra-prediction mode from a set of directional intra-prediction modes, wherein the set of directional intra-prediction modes includes directional intra-prediction modes and extended directional intra-prediction modes, the directional intra-prediction modes are within a main angle, and the extended directional intra-prediction modes are within a complementary angle different from the main angle;

determining, for a prediction sample of the prediction block of the video image, a reference sample from a set of reference samples based on the directional intra-prediction mode; and

determining whether to apply a filter to the determined reference sample based on the directional intra-prediction mode.

2. The method of claim 1, further comprising:

determining an intra-prediction angle corresponding to the directional intra-prediction mode; and

selecting a filter based on the determined intra-prediction angle.

3. The method of claim 1, further comprising:

selecting a filter from a set of filters based on a distance between the determined reference sample and a further reference sample of the prediction block of the video image.

4. The method of claim 1, wherein:

determining whether to apply the filter to the determined reference sample comprises determining a filter length based on the directional intra-prediction mode; and the method further comprises when the filter length is 1, determining not to apply the filter to the determined reference sample; or when the filter length is 3 or 5, determining to apply the filter to the determined reference sample.

5. The method of claim 1, further comprising:

selecting a filter from a set of filters based on the directional intra-prediction mode.

6. The method of claim 5, wherein the set of filters includes filters with different filter lengths that span 1, 3 or 5 adjacent reference samples.

7. The method of claim 6, wherein

when a filter length of the different filter lengths is 1, a coefficient for the selected filter is [1]; or

when the filter length of the different filter lengths is 3, coefficients for the selected filter is [1, 2, 1].

8. The method of claim 3, wherein each filter of the set of filters performs a different smoothing over the determined reference sample and one or more adjacent reference samples.

9. The method of claim 3, further comprising:

selecting a same filter for each directional intra-prediction mode from a first subset of the set of directional intra-prediction modes; and

selecting a different filter for each directional intra-prediction mode from a second subset of the set of directional intra-prediction modes.

10. The method of claim 1, wherein the complementary angle is less than 45°.

11. A device for intra-predicting a prediction block of a video image, the device comprising:

at least one processor; and

a memory coupled to the at least one processor and storing programming instructions, which when executed by the at least one processor, cause the device to:

select a directional intra-prediction mode from a set of directional intra-prediction modes, wherein the set of directional intra-prediction modes includes directional intra-prediction modes and extended directional intra-prediction modes, the directional intra-prediction modes are within a main angle, and the extended directional intra-prediction modes are within a complementary angle different from the main angle;

determine, for a prediction sample of the prediction block of the video image, a reference sample from a set of reference samples based on the directional intra-prediction mode; and

determine whether to apply a filter to the determined reference sample based on the directional intra-prediction mode.

12. The device of claim 11, wherein the programming instructions, which when executed by the at least one processor, further cause the device to:

determine an intra-prediction angle corresponding to the directional intra-prediction mode; and

select a filter based on the determined intra-prediction angle.

13. The device of claim **11**, wherein the programming instructions, which when executed by the at least one processor, further cause the device to:

select a filter from a set of filters based on a distance between the determined reference sample and a further reference sample of the prediction block of the video image.

14. The device of claim **11**, wherein:

to determine whether to apply the filter to the determined reference sample, the programming instructions, which when executed by the at least one processor, cause the device to:

determine a filter length based on the directional intra-prediction mode; and

the programming instructions, which when executed by the at least one processor, further cause the device to: when the filter length is 1, determine not to apply the filter to the determined reference sample; or when the filter length is 3 or 5, determine to apply the filter to the determined reference sample.

15. The device of claim **11**, wherein the programming instructions, which when executed by the at least one processor, further cause the device to:

select a filter from a set of filters based on the directional intra-prediction mode.

16. The device of claim **15**, wherein the set of filters includes filters with different filter lengths that span 1, 3 or 5 adjacent reference samples.

17. The device of claim **13**, wherein each filter of the set of filters performs a different smoothing over the determined reference sample and one or more adjacent reference samples.

18. The device of claim **13**, wherein the programming instructions, which when executed by the at least one processor, further cause the device to:

select a same filter for each directional intra-prediction mode from a first subset of the set of directional intra-prediction modes; and

select a different filter for each directional intra-prediction mode from a second subset of the set of directional intra-prediction modes.

19. The device of claim **11**, wherein the complementary angle is less than 45° .

20. A non-transitory computer-readable medium, comprising:

a bitstream including information indicating a directional intra-prediction mode of a block, wherein the directional intra-prediction mode of the block is determined from a set of directional intra-prediction modes, each directional intra-prediction mode of the set of directional intra-prediction modes corresponds to a different intra-prediction angle, and wherein the set of directional intra-prediction modes includes directional intra-prediction modes and extended directional intra-prediction modes, the directional intra-prediction modes are within a main angle, the extended directional intra-prediction modes are within a complementary angle different from the main angle; and whether to apply a filter to a reference sample of the block is determined based on the directional intra-prediction mode.

* * * * *