


Front View:

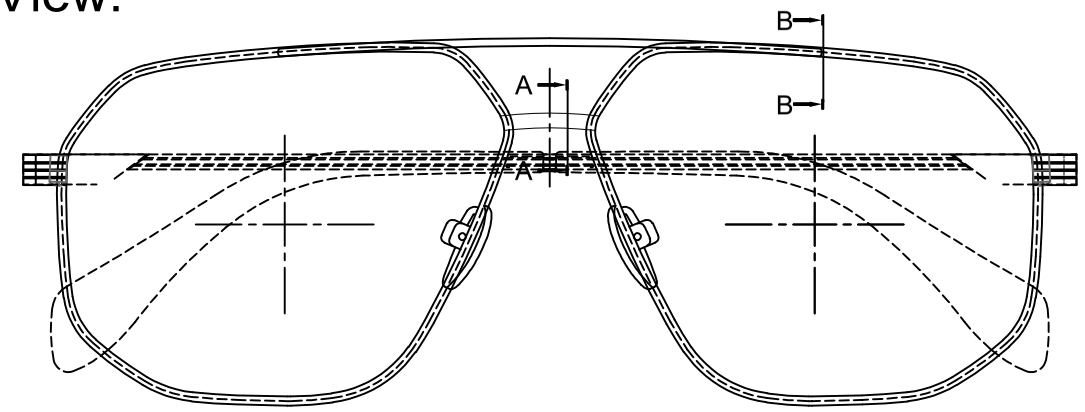


Top View:

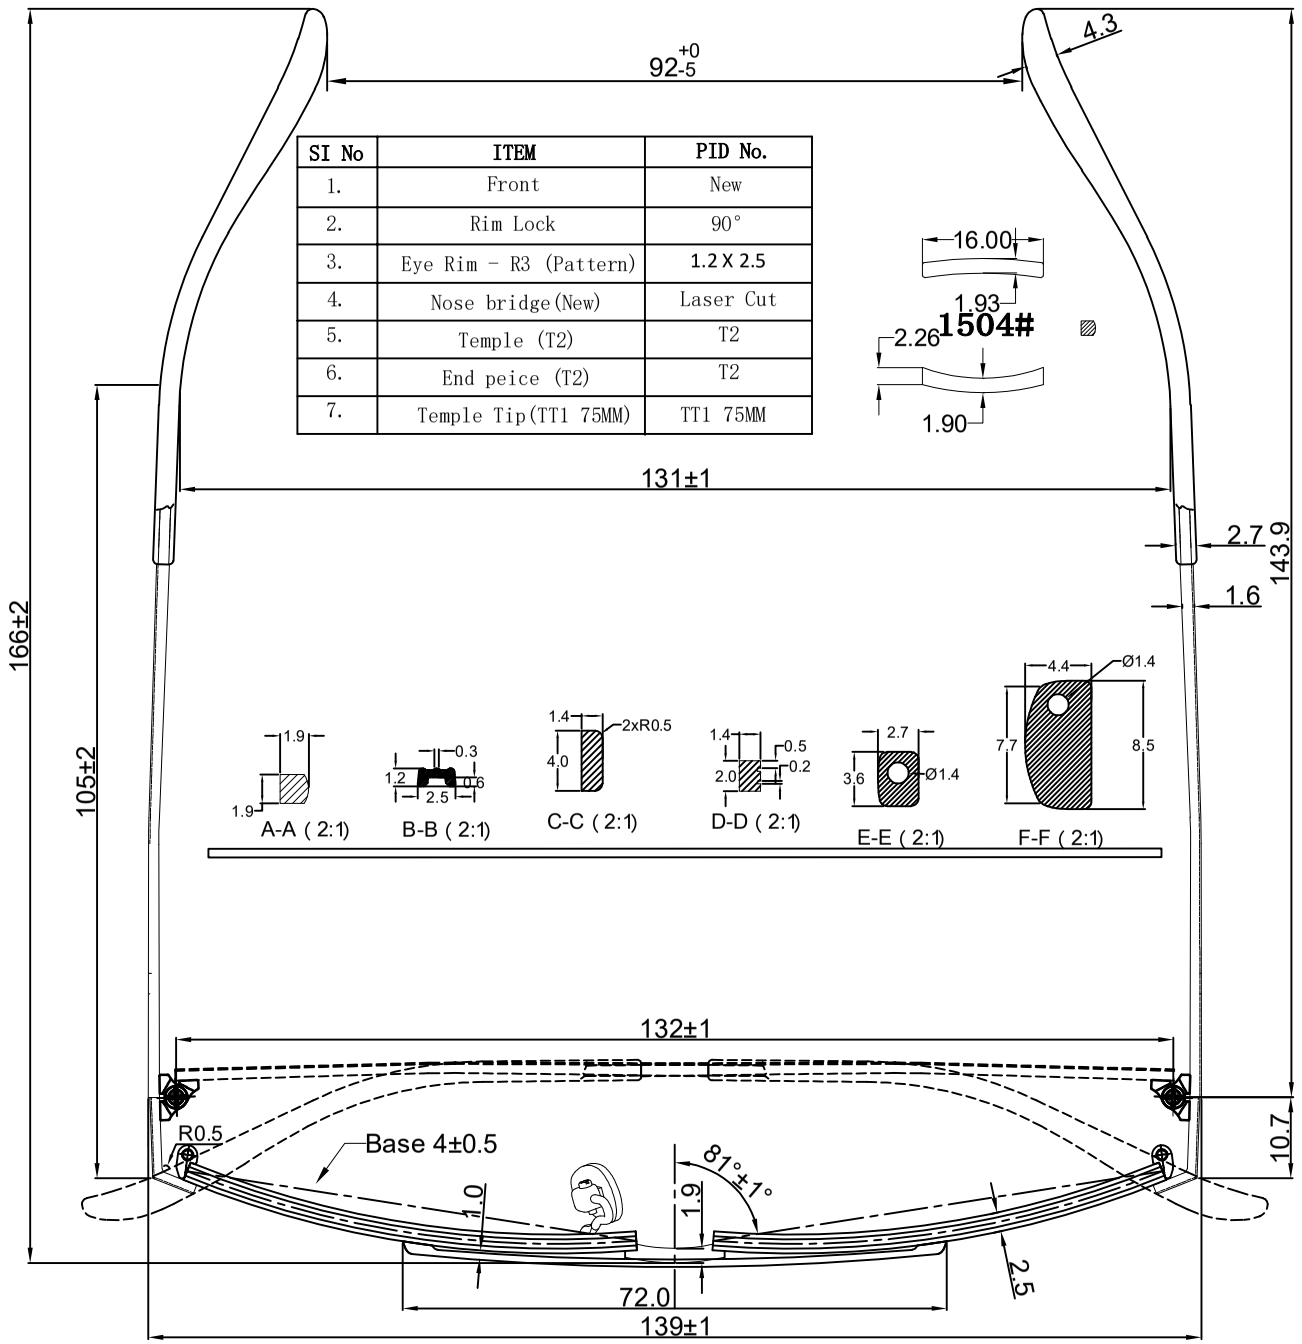


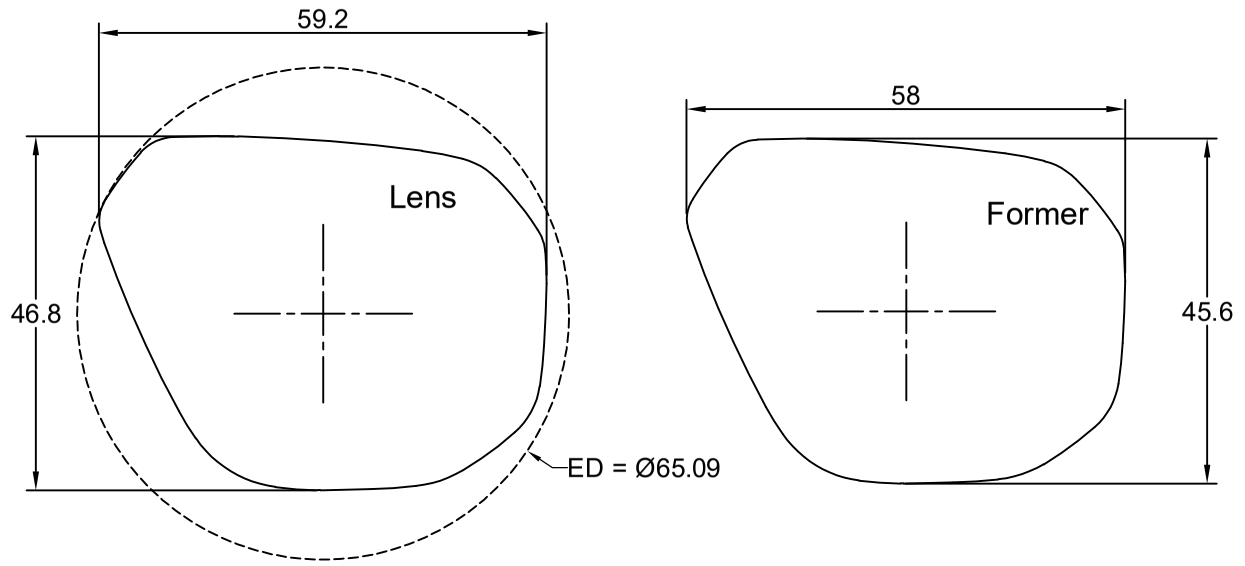


Left:

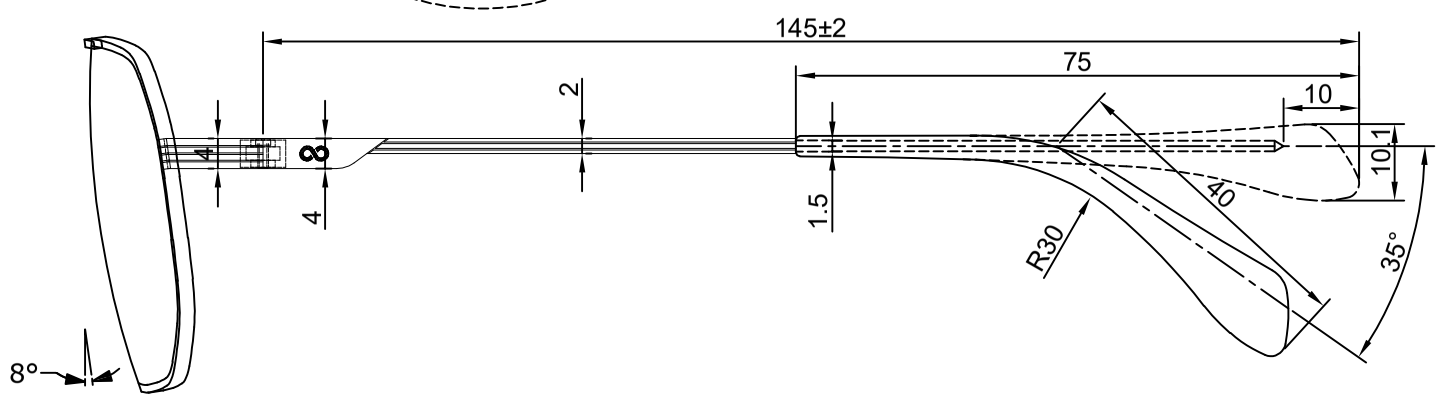

Right:

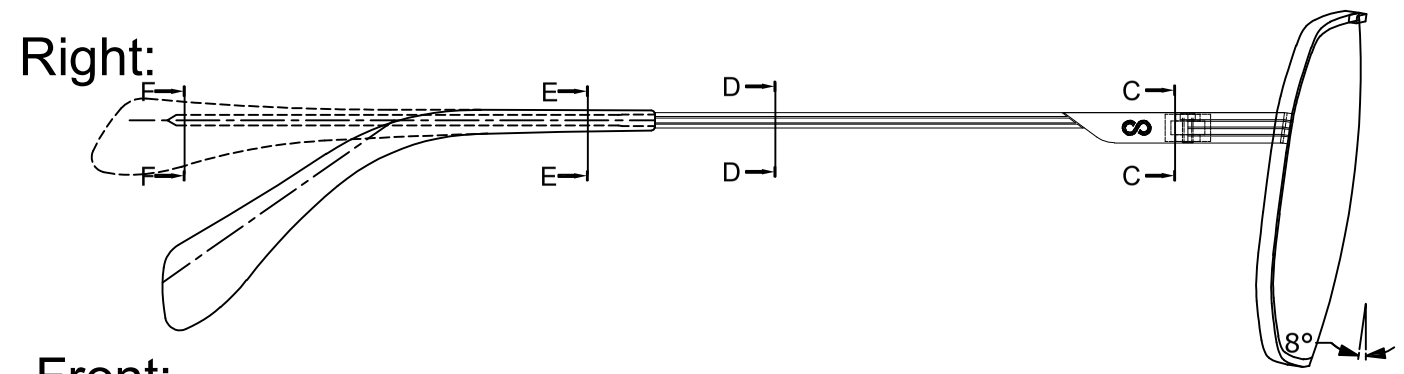

Front:

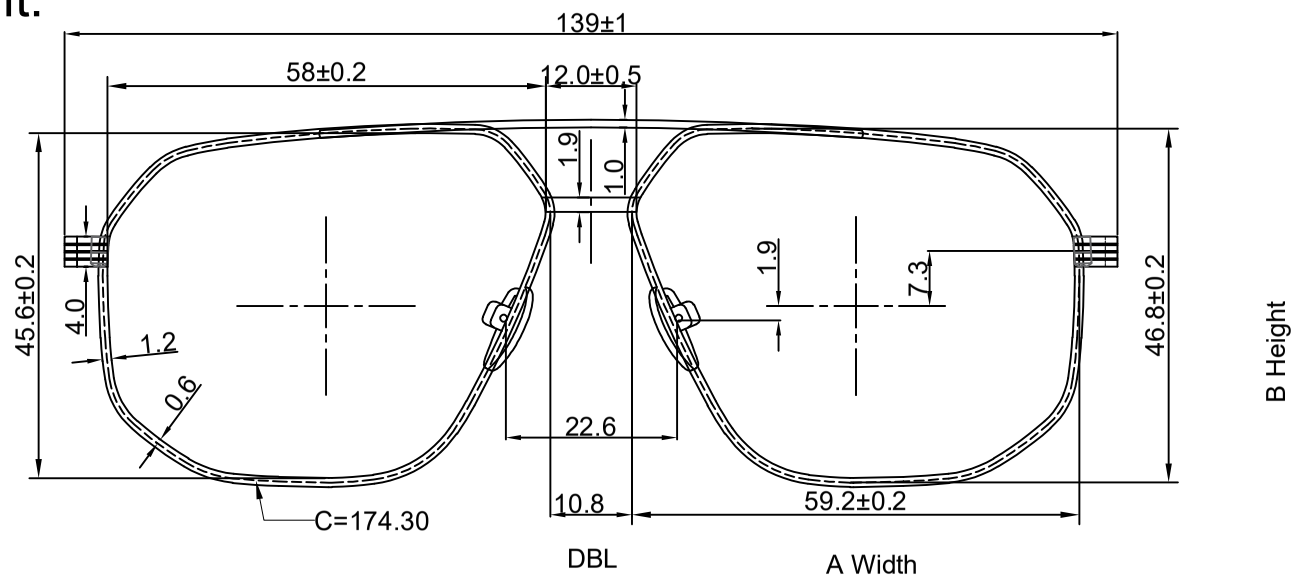

Model:	VC S19002 M	Drawn:-		Material:	Metal	Unit:	mm
Factory code:		Checked:-		Hinge:		Scale:	NTS
Size:	59□11 145	Approved:-		Wire Core:			
Base:	4	Date:	10-03-2026	Nose Pad:		Alt :- 0	Sheet:- 1/2

1st angle projection

Unmarked tolerances,
±0.1mm for metals,
±0.2mm for Acetate/TR/Injection

lenskart

Tolerance for	Threads	Screw	Nut	TOLERANCES FOR LINEAR DIMENSIONS EXTRACT FROM ISO 2768-1	DESIGNATION
ISO 965 threads	M1.0 M1.2 M1.4	8h/6g	6H	Limit deviation	FINE
	M1.6	8h/6g	6H	ISO 2768-1	MEDIUM
					COARSE

Limit deviation	0.5~3	3~6	6~30	30~120	120~400	400~1000
FINE	±0.05	±0.05	±0.10	±0.15	±0.20	±0.30
MEDIUM	±0.10	±0.10	±0.20	±0.30	±0.50	±0.80
COARSE	±0.30	±0.30	±0.50	±0.80	±1.20	±2.00

Limit deviation	>400	>30 ~ 400	>6 ~ 30	>0 ~ 6	≤0
FINE	±0° 5'	±0° 10'	±0° 20'	±0° 30'	±1°
MEDIUM	±0° 5'	±0° 10'	±0° 20'	±0° 30'	±1°
COARSE	±0° 10'	±0° 15'	±0° 30'	±1°	±1° 30'