

```
PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=10ms TTL=125
Reply from 40.0.0.10: bytes=32 time=7ms TTL=125
Reply from 40.0.0.10: bytes=32 time=6ms TTL=125
Reply from 40.0.0.10: bytes=32 time=11ms TTL=125


Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 6ms, Maximum = 11ms, Average = 8ms
```

```
PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.10: bytes=32 time=7ms TTL=125
Reply from 40.0.0.10: bytes=32 time=6ms TTL=125
Reply from 40.0.0.10: bytes=32 time=4ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 4ms, Maximum = 7ms, Average = 5ms
```

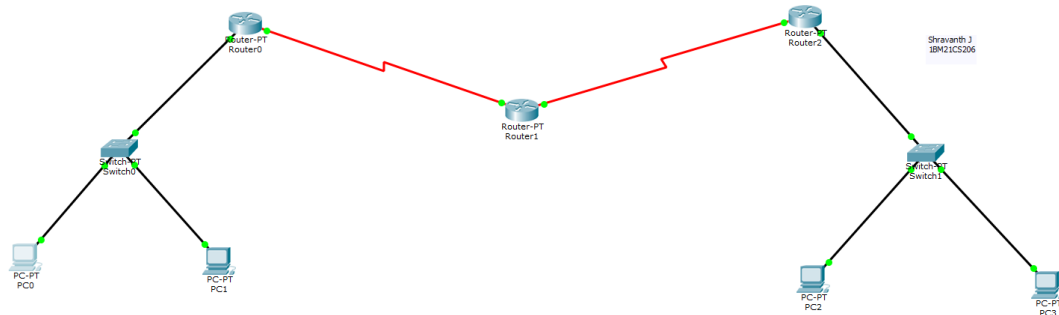

PC0

Physical Config Desktop Custom Interface

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.1: bytes=32 time=10ms TTL=125
Reply from 40.0.0.1: bytes=32 time=8ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 10ms, Average = 6ms

PC>
```

Router-PT Router1

Se3/0

Time: 00:01:56 Power Cycle Devices Fast Forward Time

Connections

