


Buck Converter

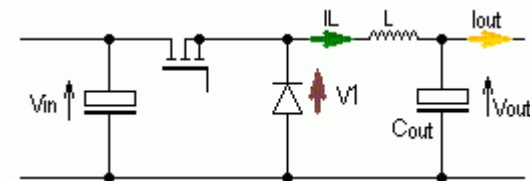

V_{in_min} / V 9	V_{in_max} / V 52	V_{in} / V for the calculations 52	
V_{out} / V 5	I_{out} / A 5	f / kHz 100	Calculate
☐ Proposal	L / H 25.41E-6	ΔI_L / A for V_{in_max} 2	Coil Data

The values of all input fields can be changed.

The proposed value for L is chosen so that $\Delta I_L = 0,4 \cdot I_{in}$ for $> V_{in_max}$.

Tip: The larger the value of L , the smaller ΔI_L , however this results in a larger physical size of L .

Tip: The higher the switching frequency f , the smaller the inductor L .

Tip: The lowest value of L is achieved if $\Delta I_L = 2 \cdot I_{in}$ for V_{in_min} .

Tip: The higher the frequency f and the smaller the inductor L , the higher the transistor losses.



By [Dr. Heinz Schmidt-Walter](#), Holger Wenzel, Thomas Zänker, Richard Morgan and Johnalan Kegan.