

tinycad.com tinkercad.com?project=5476&edit&simInfo=%2Fdashboard

Exquisite Habbi

Simulator time: 00:00:30

Code Stop Simulation

1 (Arduino Uno)

How the debugger works

Add breakpoints by clicking on the numbers. Hover over the variables paused to see their value. Use the buttons above to resume simulation step one line at a time.

Photoresistor


Name 3

```
2 int ledPin = 13; // LED connected to pin 13
3 int ldrValue = 0;
4
5 void setup()
6 {
7   pinMode(ledPin, OUTPUT);
8   Serial.begin(9600);
9 }
10
11 void loop()
12 {
13   ldrValue = analogRead(ldrPin);
14
15   Serial.print("Light Value = ");
16   Serial.println(ldrValue);
17
18   // Dark condition
19   if (ldrValue < 500)
20   {
21     digitalWrite(ledPin, HIGH);
22   }
23   else
24   {
25     digitalWrite(ledPin, LOW);
26   }
27 }
```

Serial Monitor

Light Value = 559
Light Value = 559
Light Value = 559
Light Value = 559
Light Value = 559
Light Value = 559
Light Value = 559

Send Clear

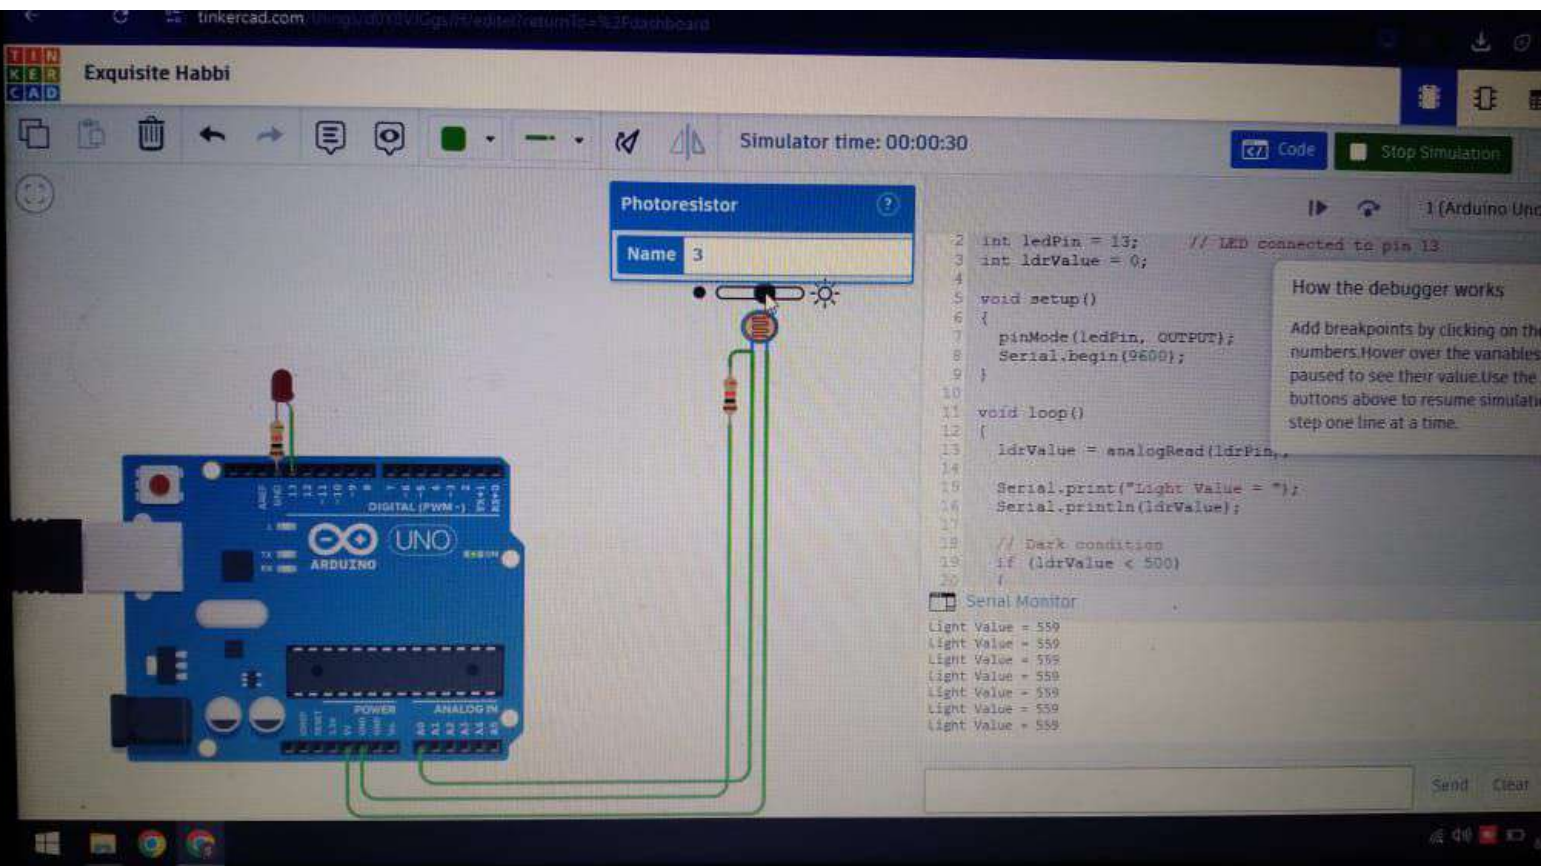

Exquisite Habbi

Simulator time: 00:00:43

Code Stop Simulation Send To

1 (Arduino Uno R3)

Photoresistor

Name 3

```
2 int ledPin = 13; // LED connected to pin 13
3 int ldrValue = 0;
4
5 void setup()
6 {
7   pinMode(ledPin, OUTPUT);
8   Serial.begin(9600);
9 }
10
11 void loop()
12 {
13   ldrValue = analogRead(ldrPin);
14   Serial.print("Light Value = ");
15   Serial.println(ldrValue);
16
17   // Dark condition
18   if (ldrValue < 500)
19   {
20     digitalWrite(ledPin, HIGH);
21   }
22 }
```

Serial Monitor:

Light Value = 254
Light Value = 224
Light Value = 224
Light Value = 224
Light Value = 224
Light Value = 224
Light Value = 2

Send Clear

9:51 PM 6/17/2020

