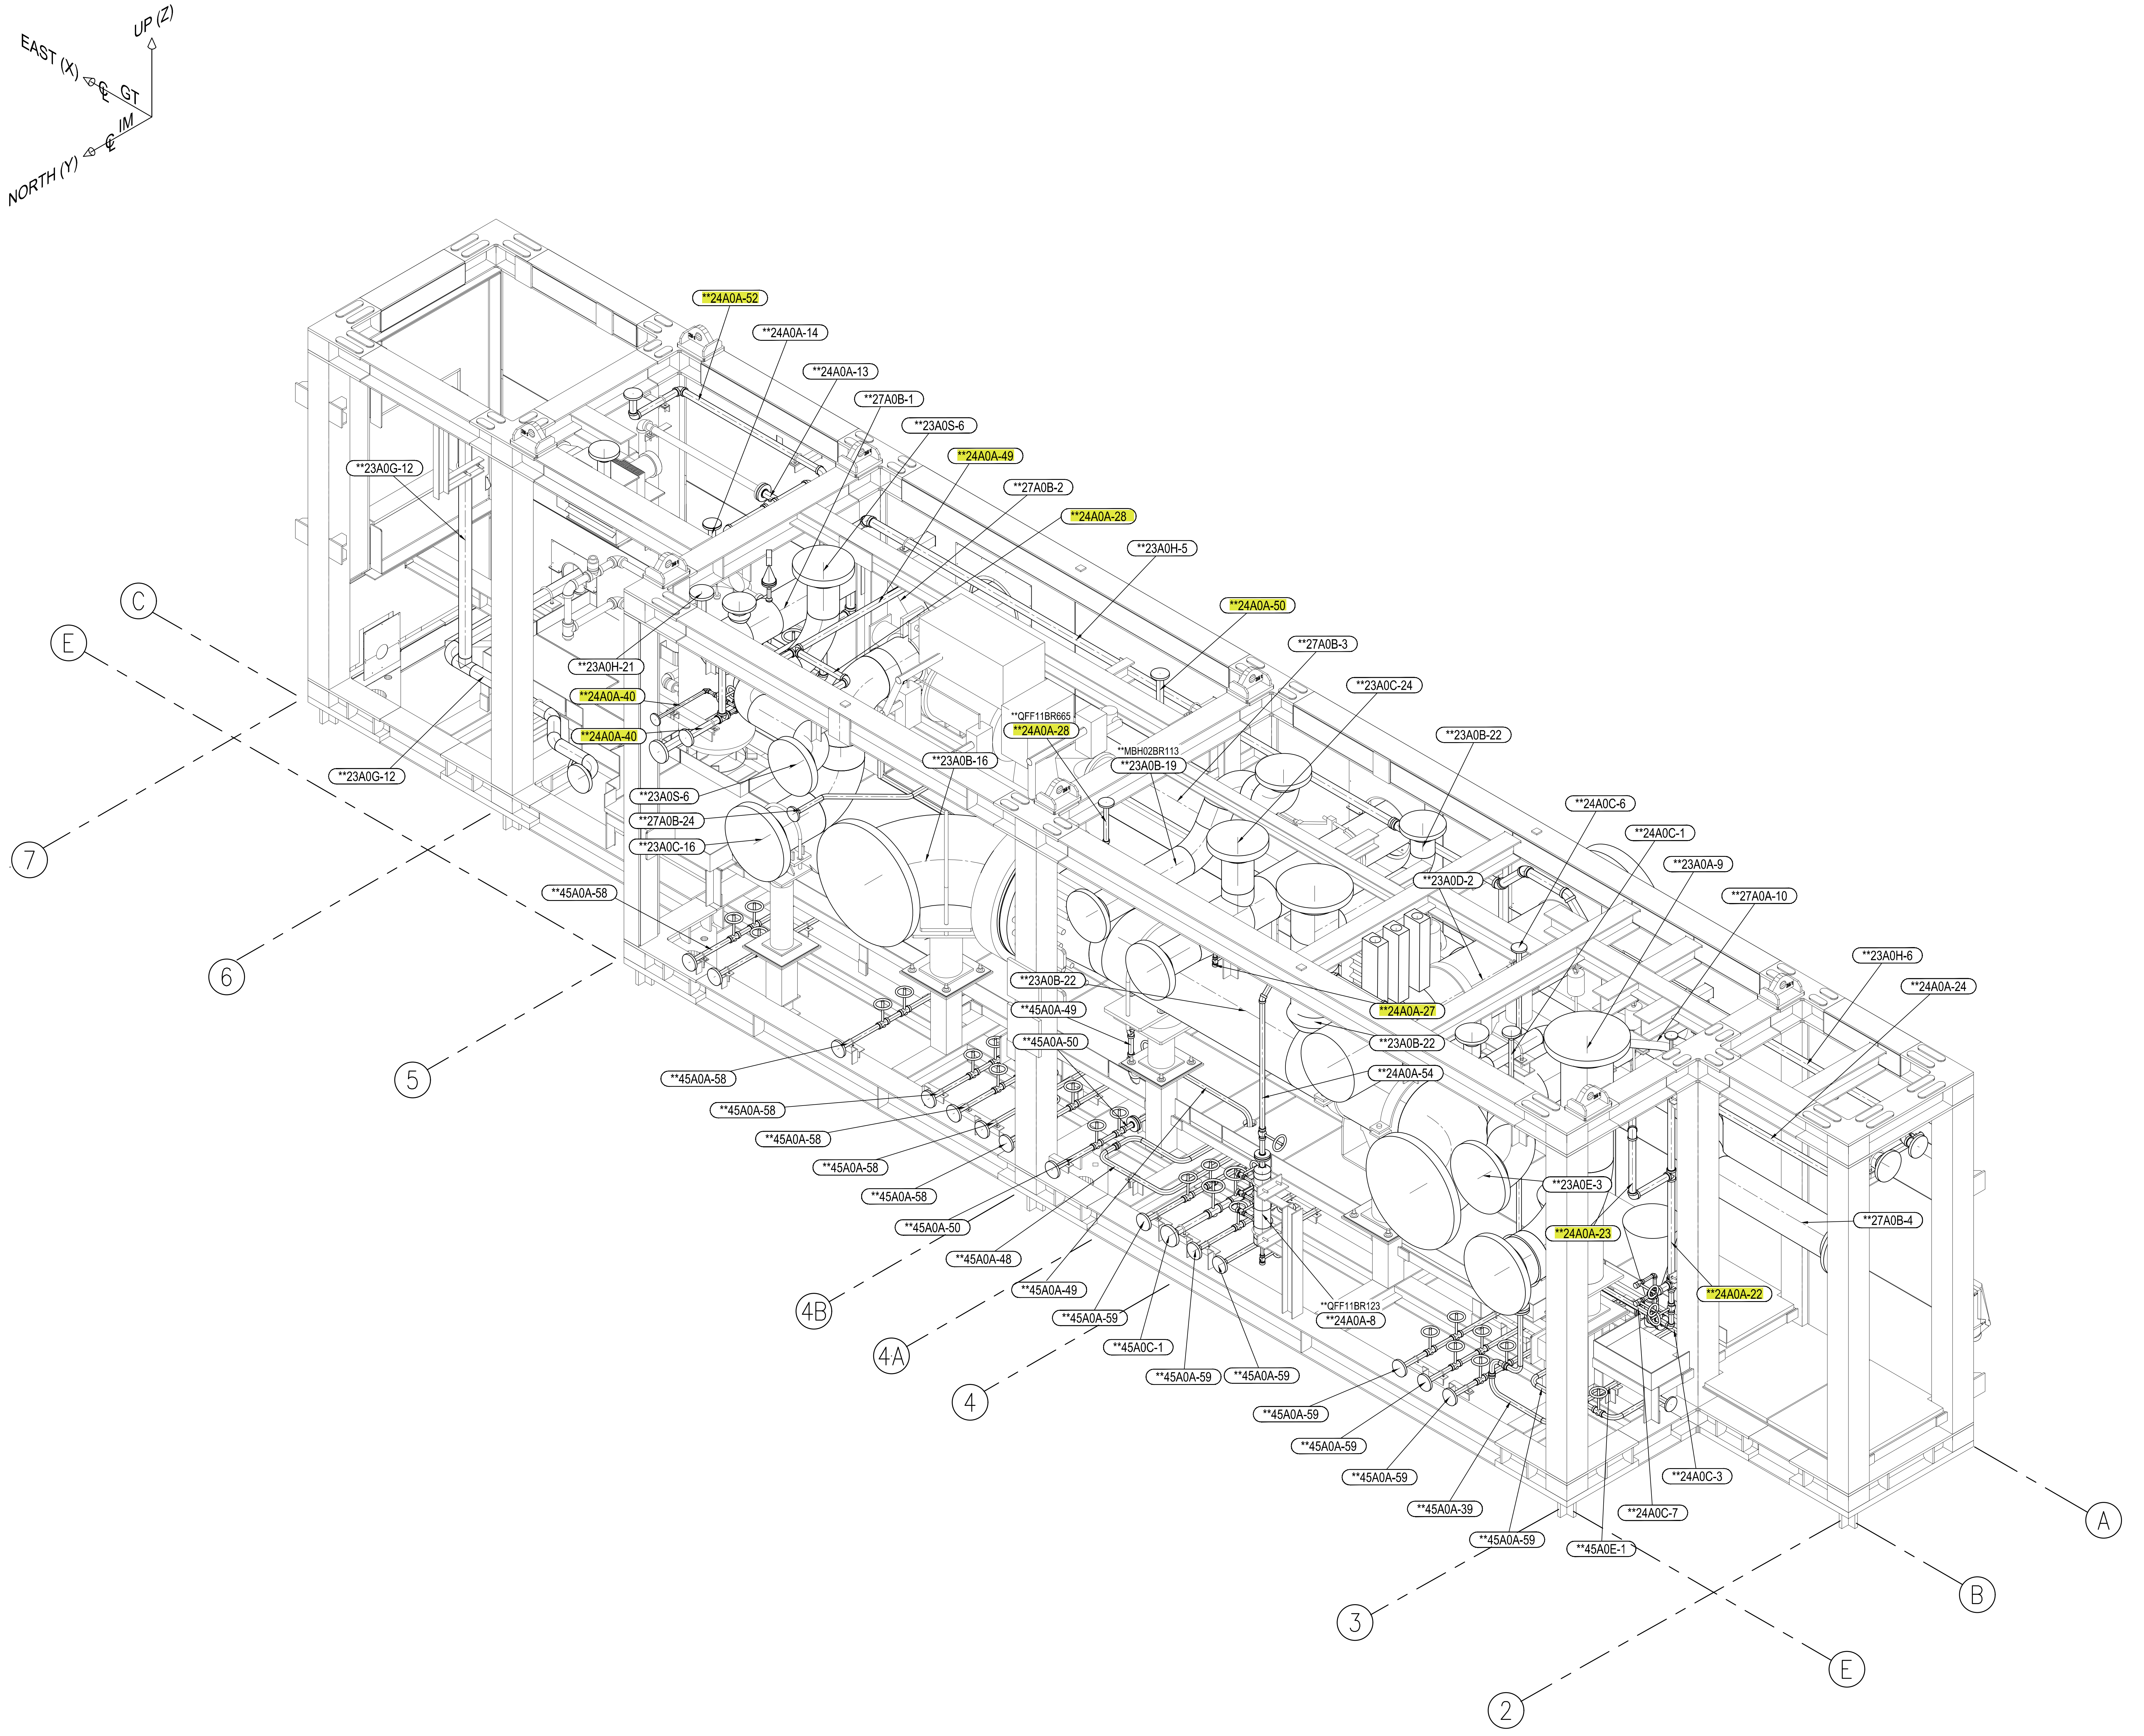
UP (Z)
EAST (X)
℄ GT
℄ IM
NORTH (Y)
**24A0A-52
**24A0A-14
**24A0A-13
**27A0B-1
**23A0S-6
**24A0A-49
**27A0B-2
**24A0A-28
**23A0H-5
**23A0G-12
**24A0A-50
**27A0B-3
**23A0C-24
C
E
**23A0H-21
**24A0A-40
**24A0A-40
**QFF11BR665
**24A0A-28
**MBH02BR113
**23A0B-19
**23A0B-16
**23A0B-22
**23A0G-12
**23A0S-6
**27A0B-24
**23A0C-16
7
**24A0C-6
**24A0C-1
**23A0A-9
**23A0D-2
**27A0A-10
**45A0A-58
6
**23A0H-6
**24A0A-24
**23A0B-22
**45A0A-49
**24A0A-27
**45A0A-50
**23A0B-22
**24A0A-54
5
**45A0A-58
**45A0A-58
**45A0A-58
**45A0A-58
**45A0A-58
**23A0E-3
**45A0A-50
**24A0A-23
**27A0B-4
**45A0A-48
**24A0A-22
**45A0A-49
4B
**QFF11BR123
**24A0A-8
**45A0A-59
4A
**45A0C-1
4
**45A0A-59
**45A0A-59
**45A0A-59
**45A0A-59
**45A0A-59
**24A0C-3
**45A0A-39
**24A0C-7
A
**45A0A-59
**45A0E-1
B
3
E
2

MD-1.1 ISOMETRIC VIEW
LOOKING SOUTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   **XXXXXX ——PIPE LINE
   (**XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.
REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.: –

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140–PI–094–001–MD–1.1

REV.: 0

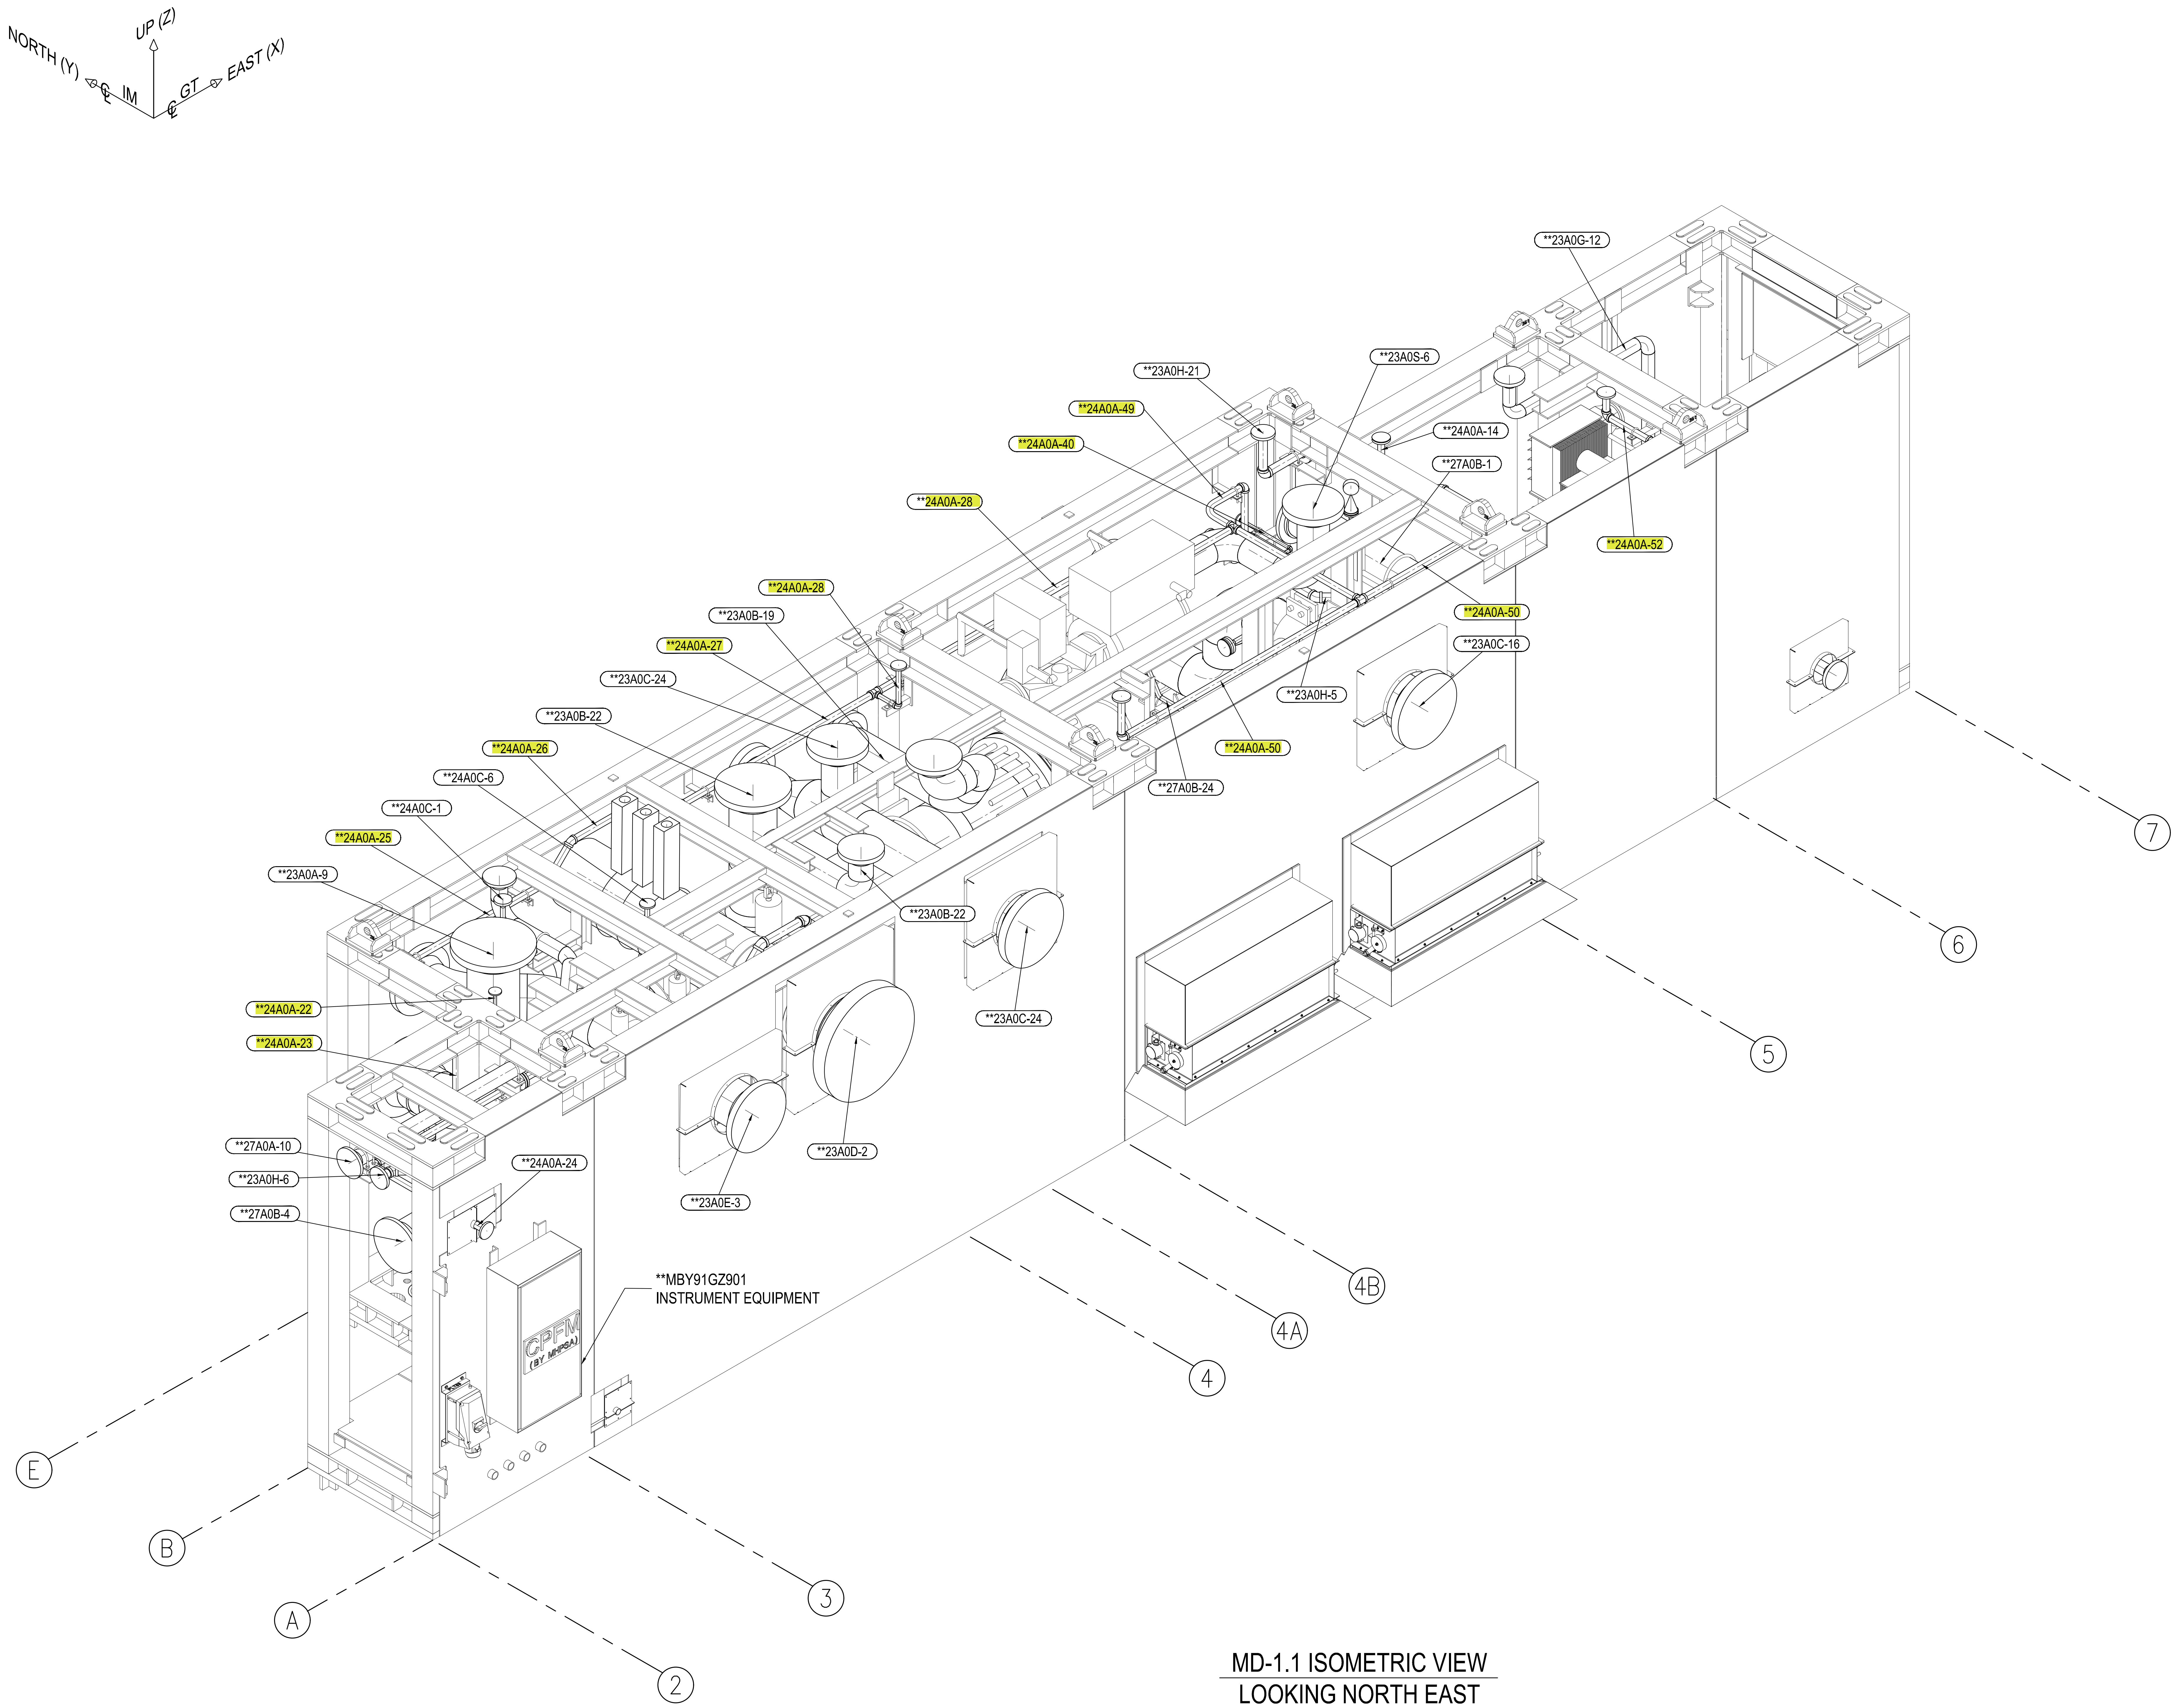
NORTH (Y)
UP (Z)
EAST (X)
℄ IM
℄ GT
**23A0G-12
**23A0S-6
**23A0H-21
**24A0A-49
**24A0A-14
**24A0A-40
**27A0B-1
**24A0A-28
**24A0A-52
**24A0A-28
**23A0B-19
**24A0A-50
**24A0A-27
**23A0C-16
**23A0C-24
**23A0H-5
**23A0B-22
**24A0A-26
**24A0A-50
**24A0C-6
**27A0B-24
**24A0C-1
**24A0A-25
**23A0A-9
**23A0B-22
**23A0C-24
**24A0A-22
**24A0A-23
**27A0A-10
**24A0A-24
**23A0D-2
**23A0H-6
**23A0E-3
**27A0B-4
**MBY91GZ901
INSTRUMENT EQUIPMENT
CPFM
(BY MHPSA)
7
6
5
4B
4A
4
E
B
3
A
2

MD-1.1 ISOMETRIC VIEW
LOOKING NORTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.
REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI
POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**

REF.DWG.NO.
–

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–1.1

REV.
0

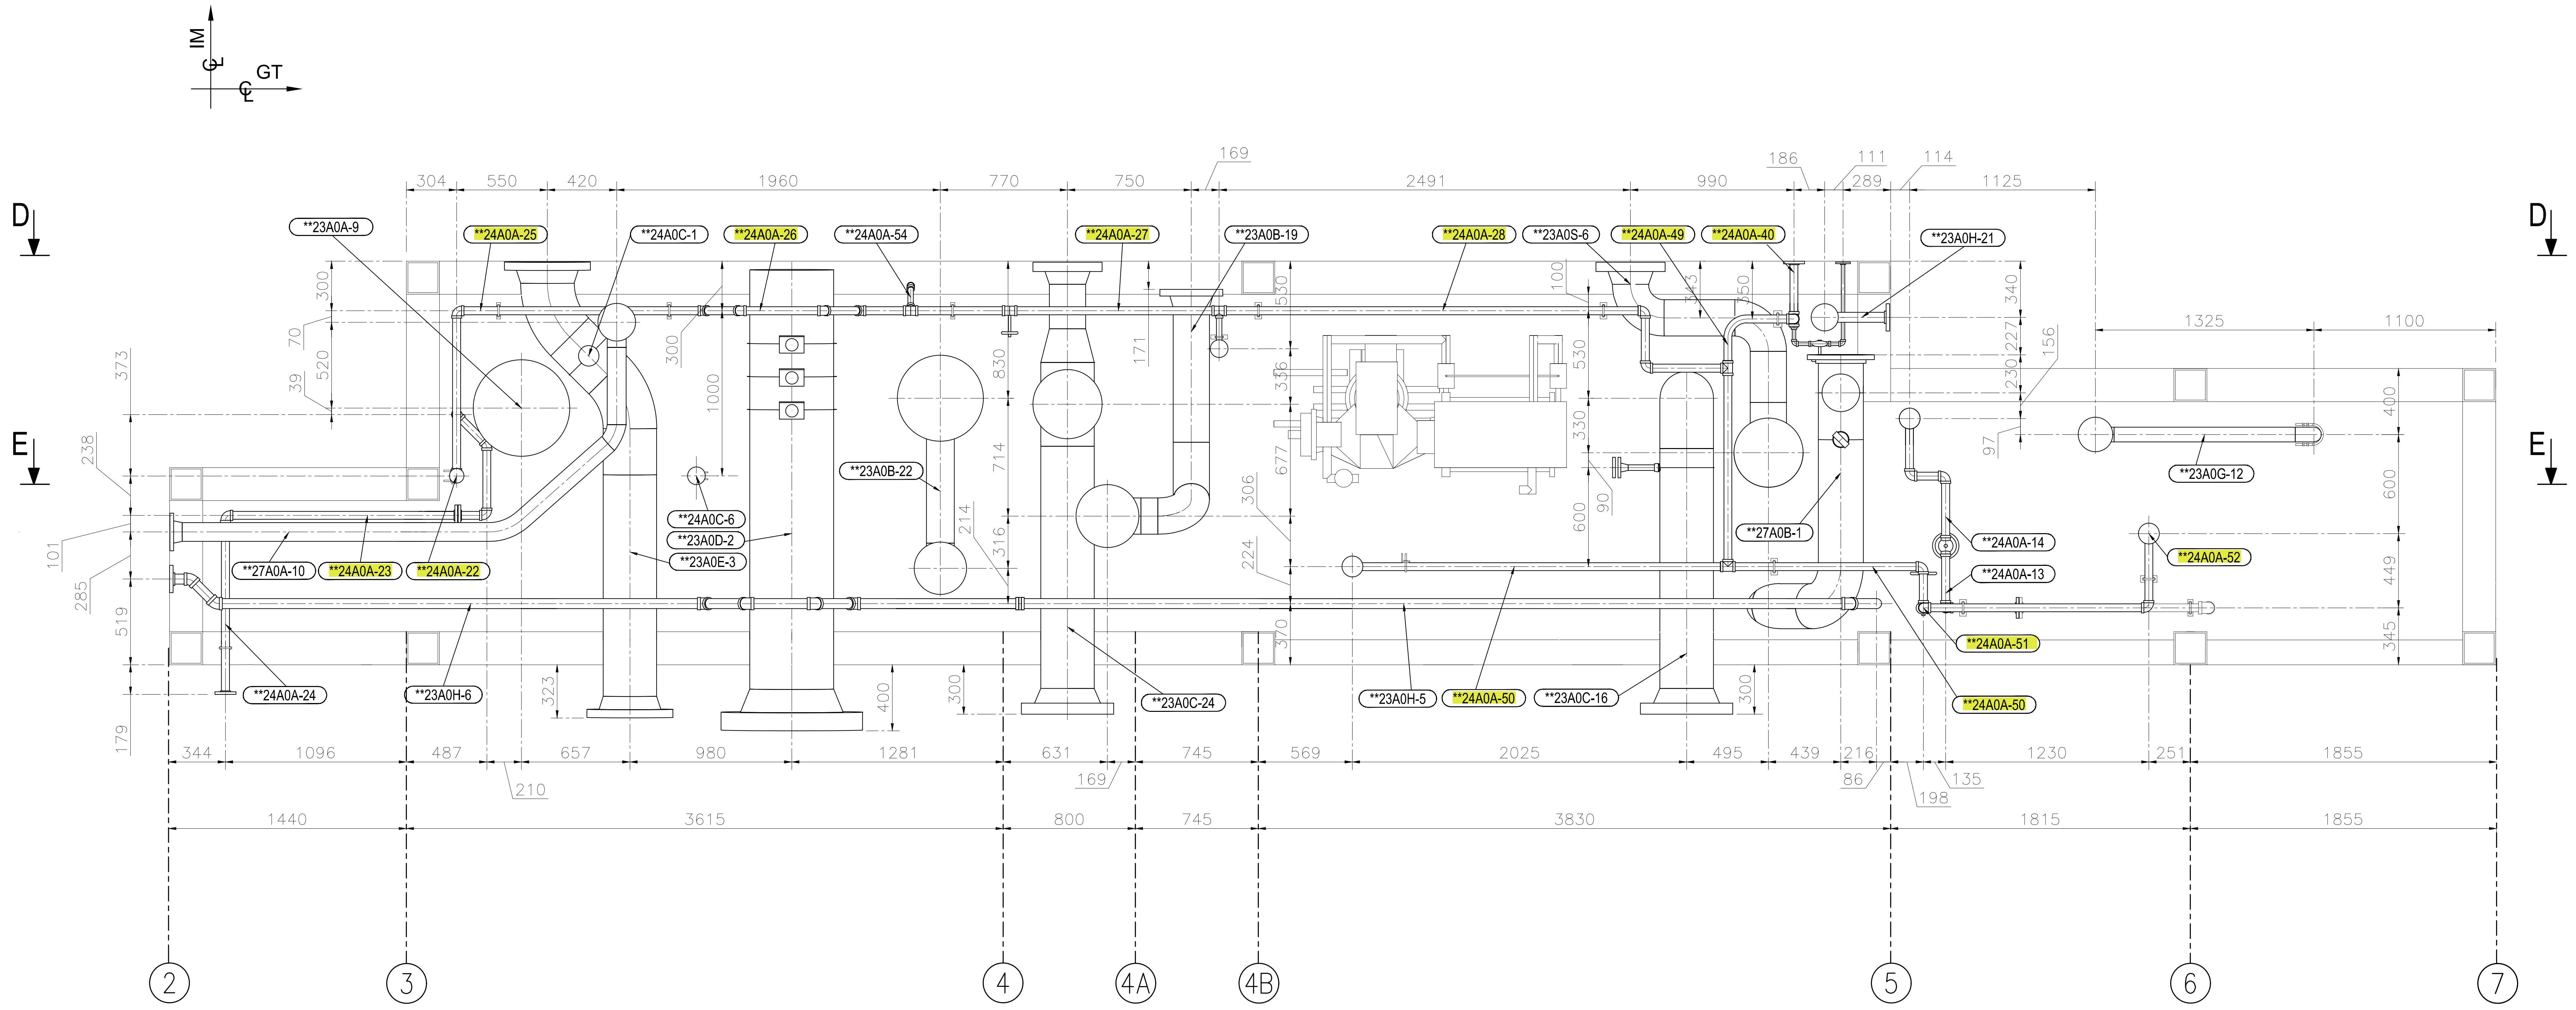
IM
GT
D
E
304 550 420 1960 770 750 169 2491 990 186 111 289 114 1125
**23A0A-9
**24A0A-25
**24A0C-1
**24A0A-26
**24A0A-54
**24A0A-27
**23A0B-19
**24A0A-28
**23A0S-6
**24A0A-49
**24A0A-40
**23A0H-21
300 70 520 39 373 238 101 285 519 179 300 1000 830 714 214 316 171 530 336 677 306 224 370 100 343 350 530 330 90 600 340 227 230 156 97
1325 1100 400 600 449 345
**24A0C-6
**23A0D-2
**23A0E-3
**23A0B-22
**27A0B-1
**24A0A-14
**24A0A-13
**24A0A-52
**23A0G-12
**27A0A-10
**24A0A-23
**24A0A-22
**24A0A-24
**23A0H-6
**23A0C-24
**23A0H-5
**24A0A-50
**23A0C-16
**24A0A-51
**24A0A-50
323 400 300 300
344 1096 487 657 980 1281 631 745 569 2025 495 439 216 1230 251 1855
210 169 86 135 198
1440 3615 800 745 3830 1815 1855
2 3 4 4A 4B 5 6 7

MD-1.1 PLAN VIEW
SECTION 'A-A'

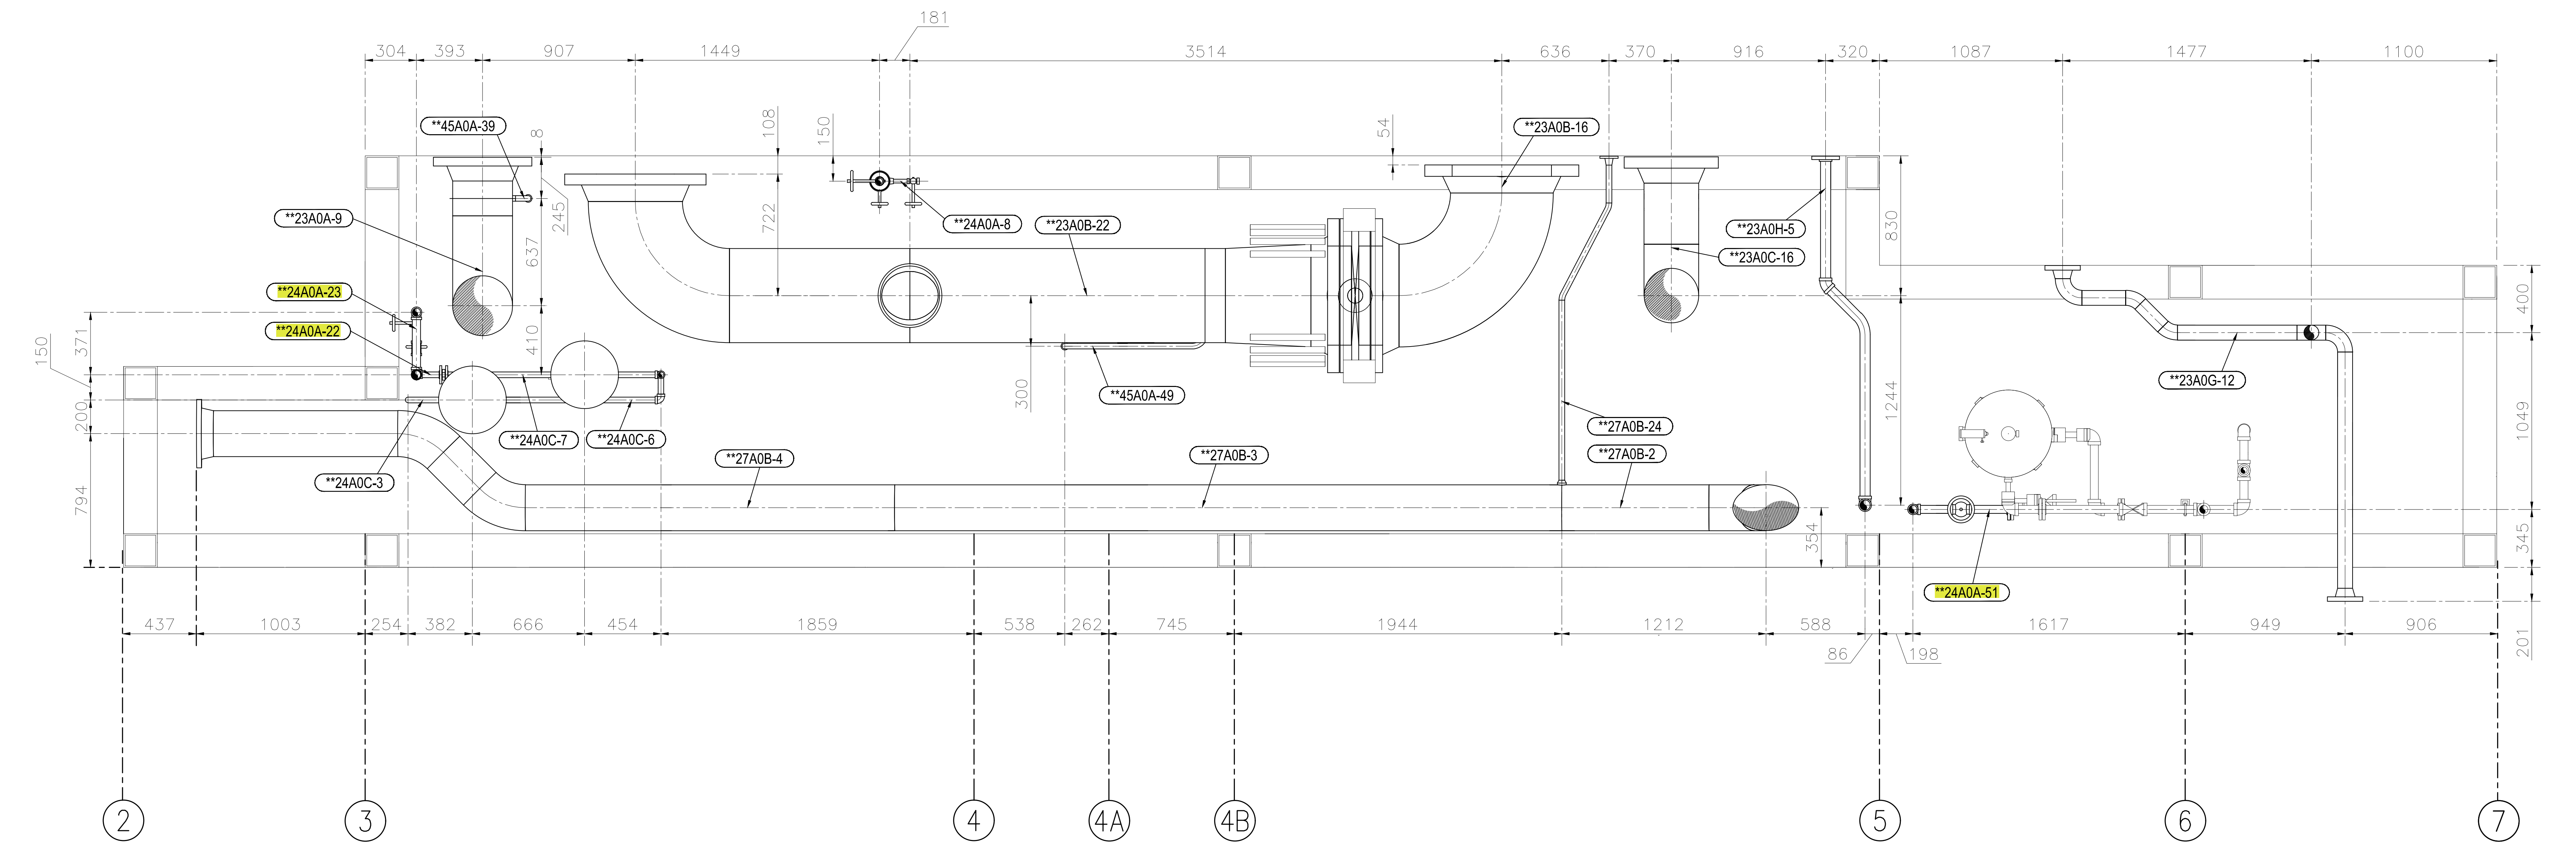
181
304 393 907 1449 3514 636 370 916 320 1087 1477 1100
**45A0A-39
**23A0B-16
**23A0A-9
**24A0A-8
**23A0B-22
**23A0H-5
**23A0C-16
**24A0A-23
**24A0A-22
8 108 150 54 245 637 722 410 300 830 1244 354 150 371 200 794 400 1049 345 201
**45A0A-49
**23A0G-12
**24A0C-7
**24A0C-6
**24A0C-3
**27A0B-4
**27A0B-3
**27A0B-24
**27A0B-2
**24A0A-51
437 1003 254 382 666 454 1859 538 262 745 1944 1212 588 1617 949 906
86 198
2 3 4 4A 4B 5 6 7

MD-1.1 PLAN VIEW
SECTION 'B-B'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX ——PIPE LINE
   - (**XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL
ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.
–

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO	REV.
2E00140–PI–094–001–MD–1.1	0

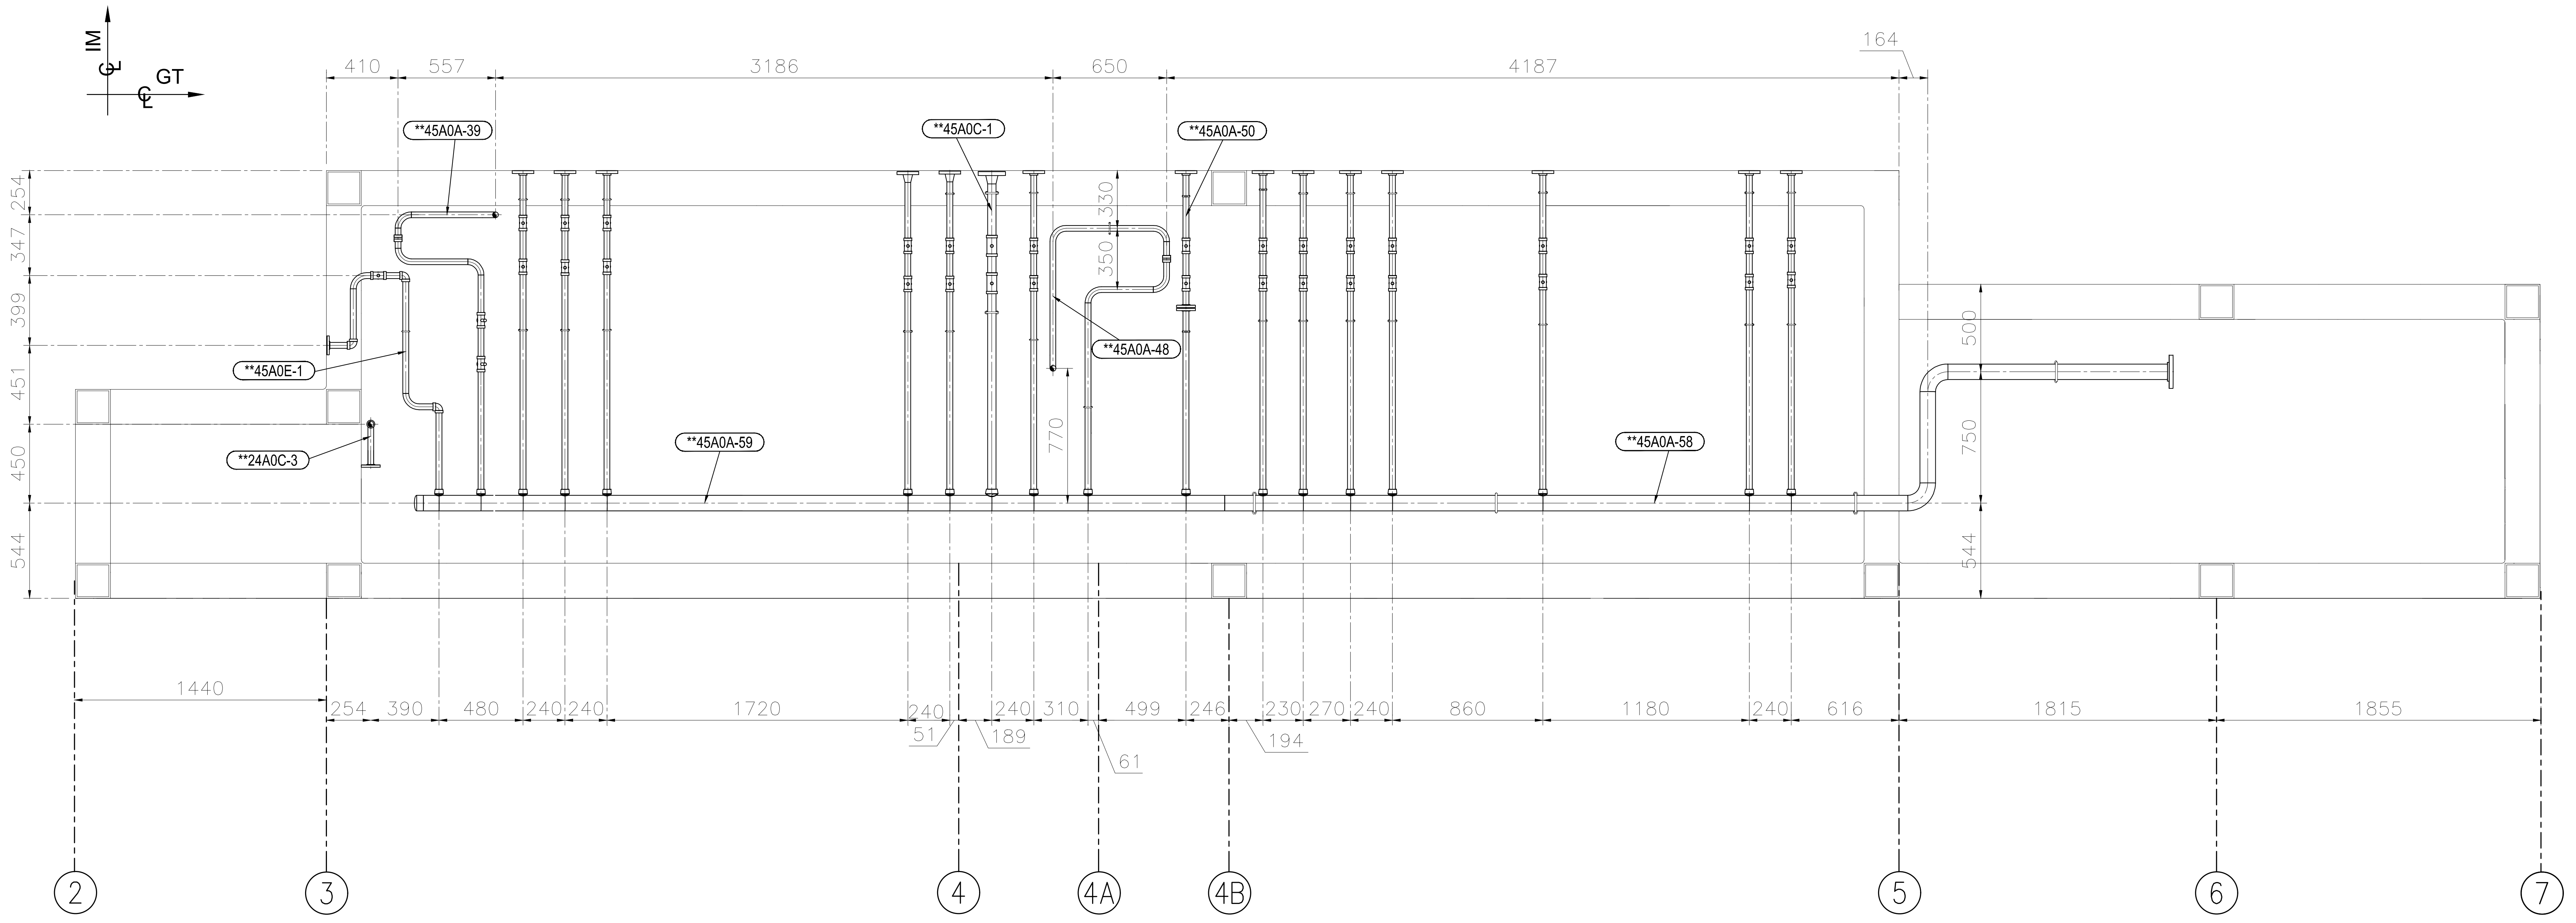
IM
℄
GT
℄
410
557
3186
650
4187
164
**45A0A-39
**45A0C-1
**45A0A-50
254
347
399
451
450
544
330
350
770
500
750
544
**45A0E-1
**45A0A-48
**24A0C-3
**45A0A-59
**45A0A-58
1440
254
390
480
240
240
1720
240
51
240
189
310
499
246
61
230
270
240
194
860
1180
240
616
1815
1855
2
3
4
4A
4B
5
6
7

MD-1.1 PLAN VIEW

SECTION 'C-C'

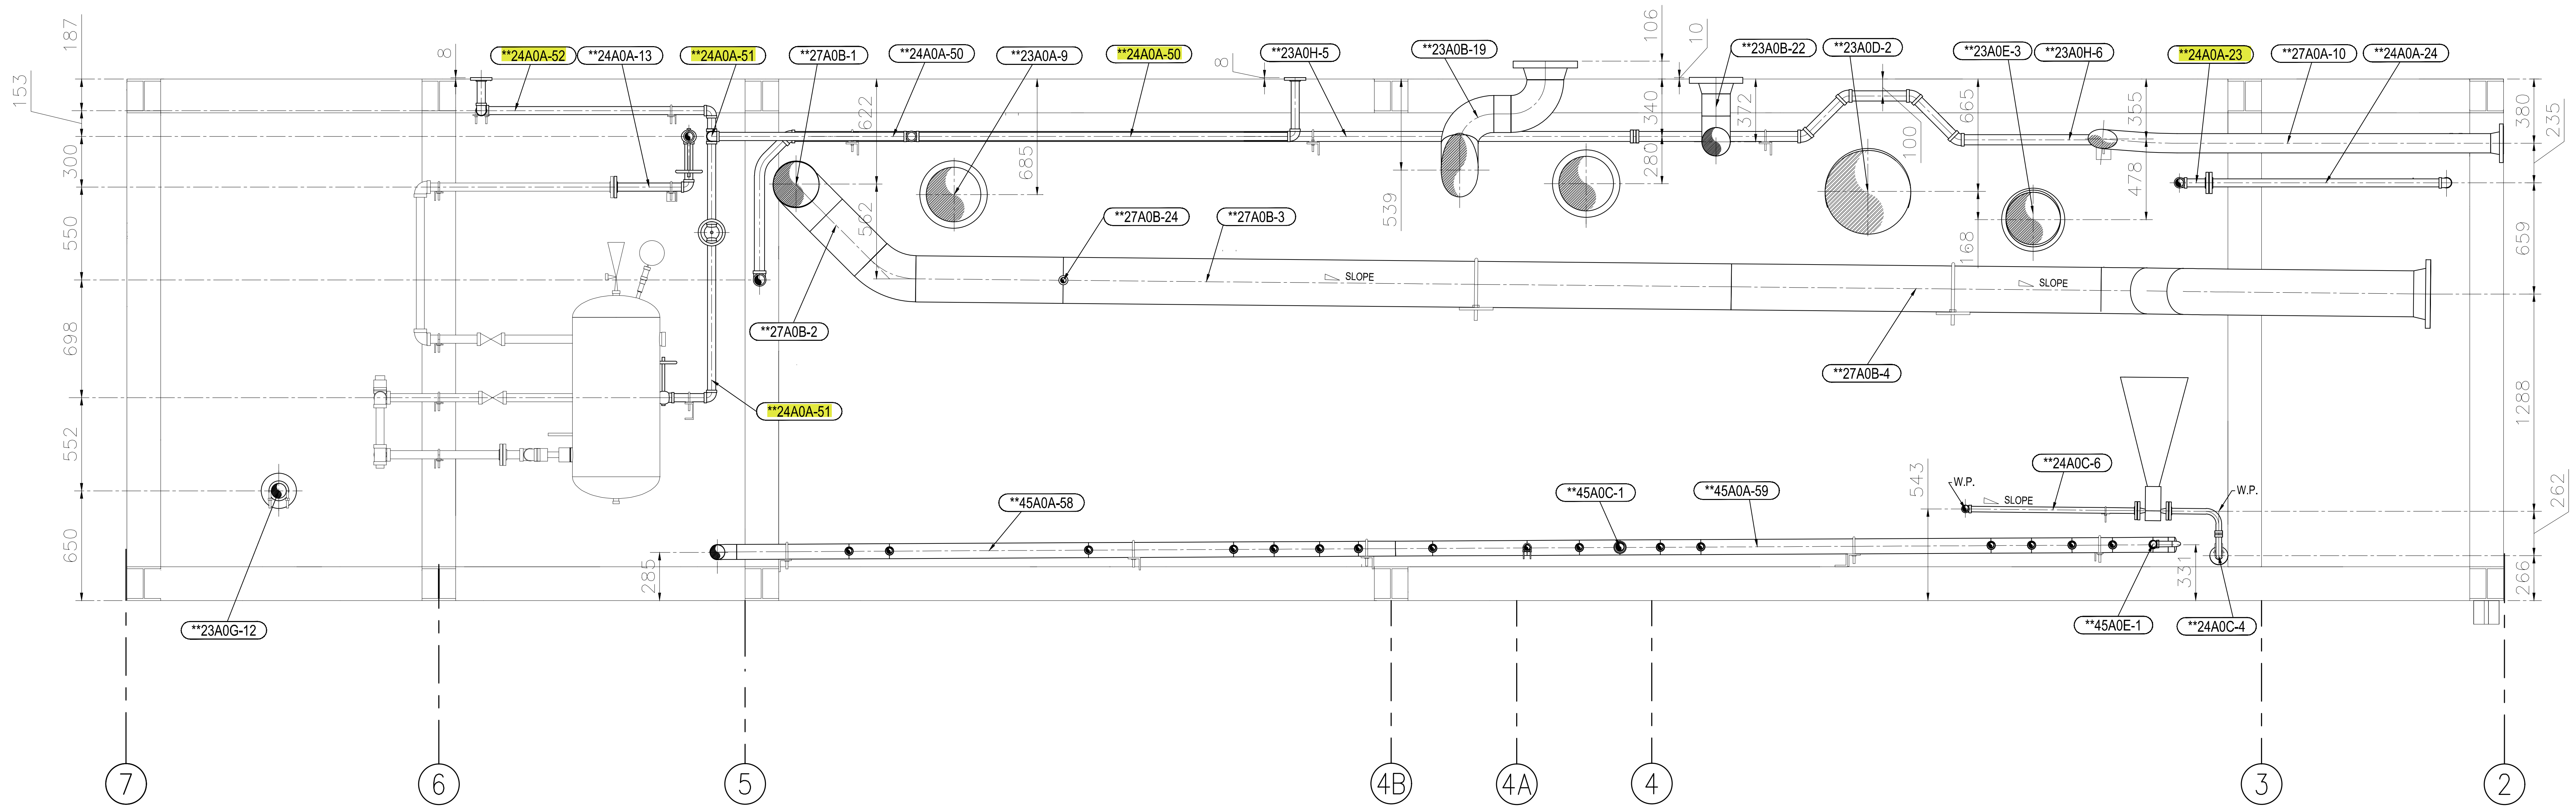
187
153
300
550
698
552
650
8
**24A0A-52
**24A0A-13
**24A0A-51
**27A0B-1
**24A0A-50
**23A0A-9
**24A0A-50
8
**23A0H-5
**23A0B-19
106
10
**23A0B-22
**23A0D-2
**23A0E-3
**23A0H-6
**24A0A-23
**27A0A-10
**24A0A-24
622
685
562
539
280
340
372
100
665
355
478
380
235
659
168
**27A0B-24
**27A0B-3
SLOPE
SLOPE
**27A0B-2
**24A0A-51
**27A0B-4
1288
**24A0C-6
W.P.
SLOPE
W.P.
543
262
**45A0A-58
**45A0C-1
**45A0A-59
285
331
266
**23A0G-12
**45A0E-1
**24A0C-4
7
6
5
4B
4A
4
3
2

MD-1.1 ELEVATION VIEW

SECTION 'E-E'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX ——PIPE LINE
   - (**XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.
–

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–1.1

REV.
0

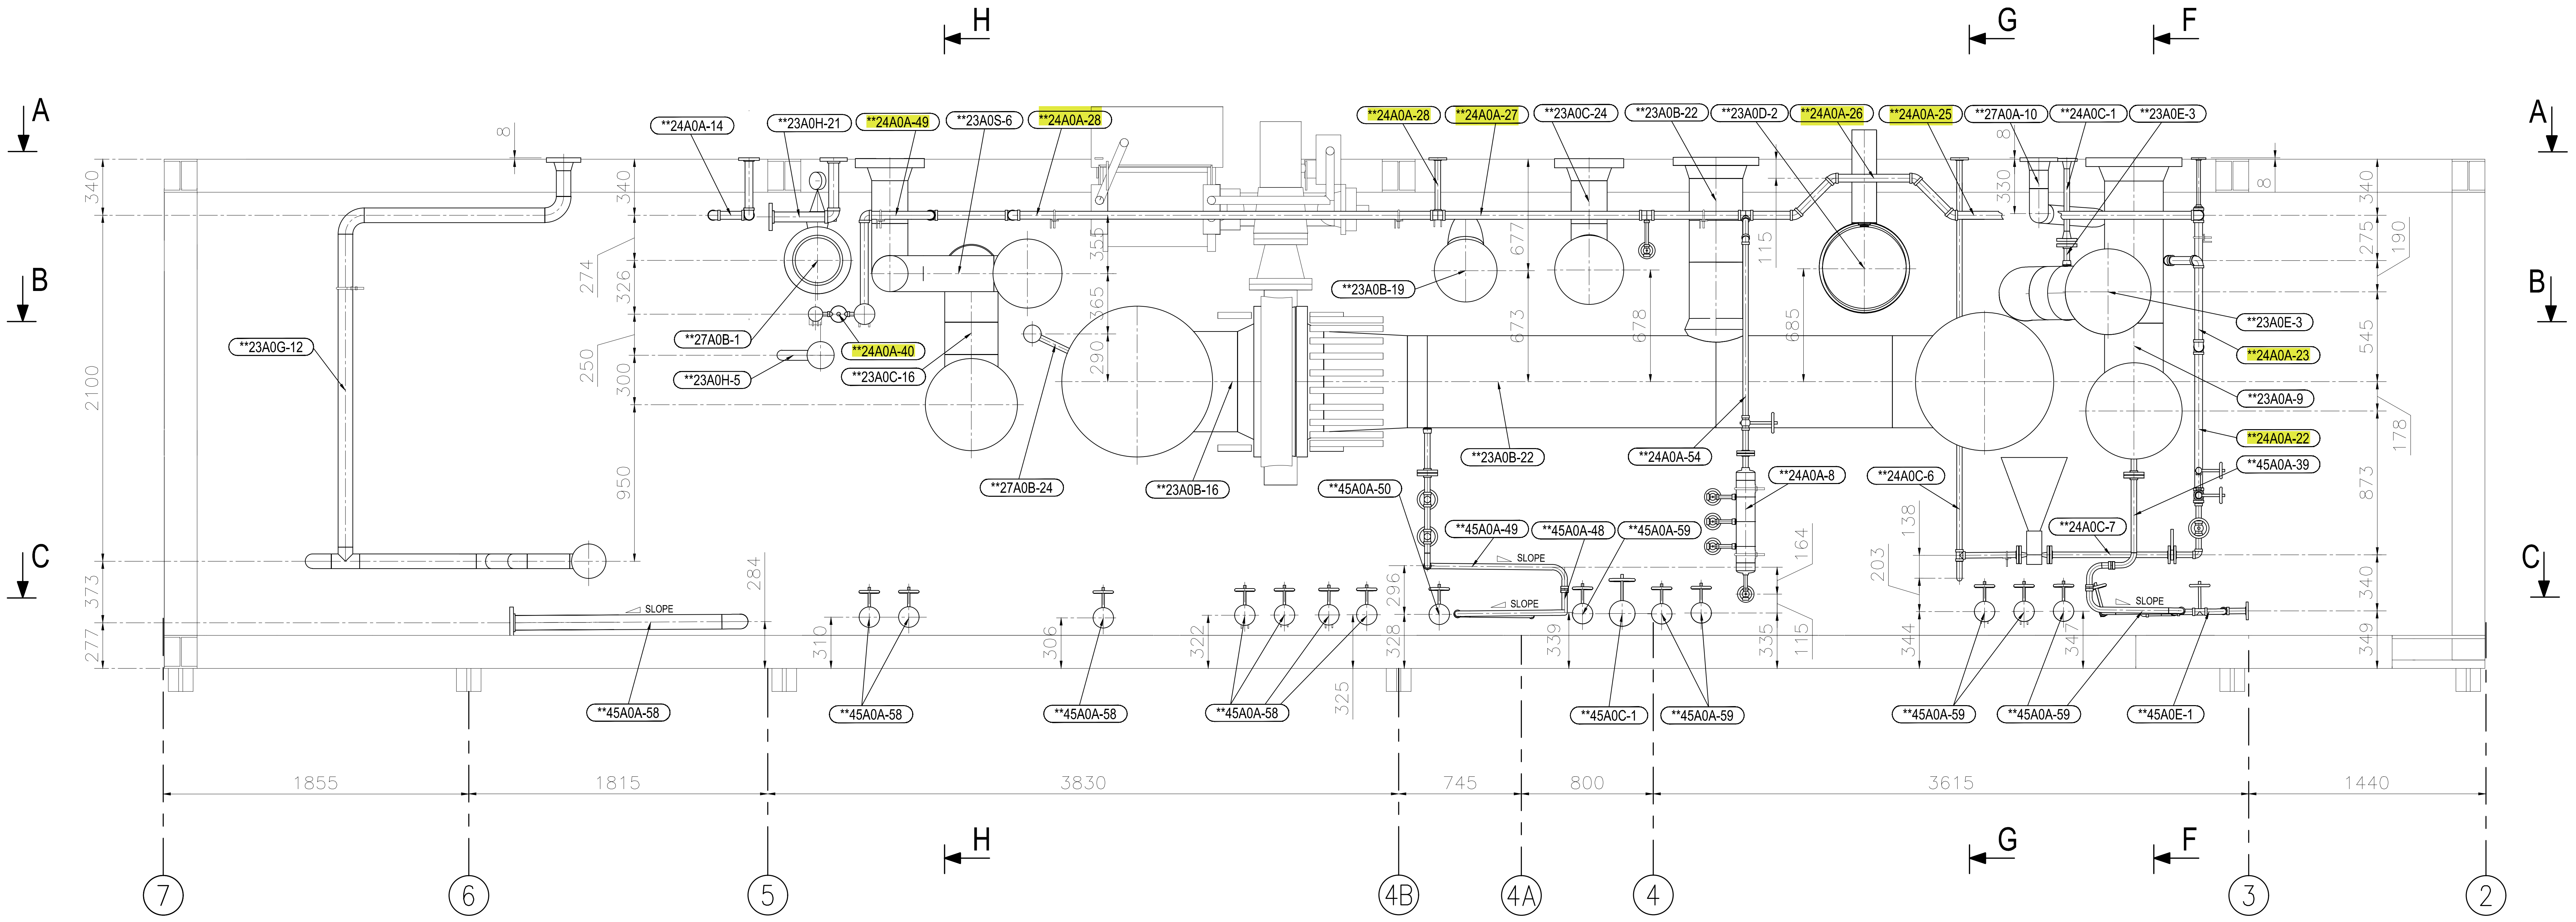
A
B
C
H
G
F
**24A0A-14
**23A0H-21
**24A0A-49
**23A0S-6
**24A0A-28
**24A0A-28
**24A0A-27
**23A0C-24
**23A0B-22
**23A0D-2
**24A0A-26
**24A0A-25
**27A0A-10
**24A0C-1
**23A0E-3
**23A0G-12
**27A0B-1
**24A0A-40
**23A0H-5
**23A0C-16
**27A0B-24
**23A0B-16
**23A0B-19
**23A0B-22
**24A0A-54
**24A0A-8
**24A0C-6
**23A0E-3
**24A0A-23
**23A0A-9
**24A0A-22
**45A0A-39
**45A0A-50
**45A0A-49
**45A0A-48
**45A0A-59
**24A0C-7
SLOPE
**45A0A-58
**45A0A-58
**45A0A-58
**45A0A-58
**45A0C-1
**45A0A-59
**45A0A-59
**45A0A-59
**45A0E-1
8
340
2100
373
277
340
274
326
250
300
950
284
310
306
322
325
355
365
290
328
296
339
677
673
678
115
685
335
115
164
138
203
344
347
330
8
340
275
190
545
178
873
340
349
1855
1815
3830
745
800
3615
1440
7
6
5
4B
4A
4
3
2

MD-1.1 ELEVATION VIEW
SECTION 'D-D'

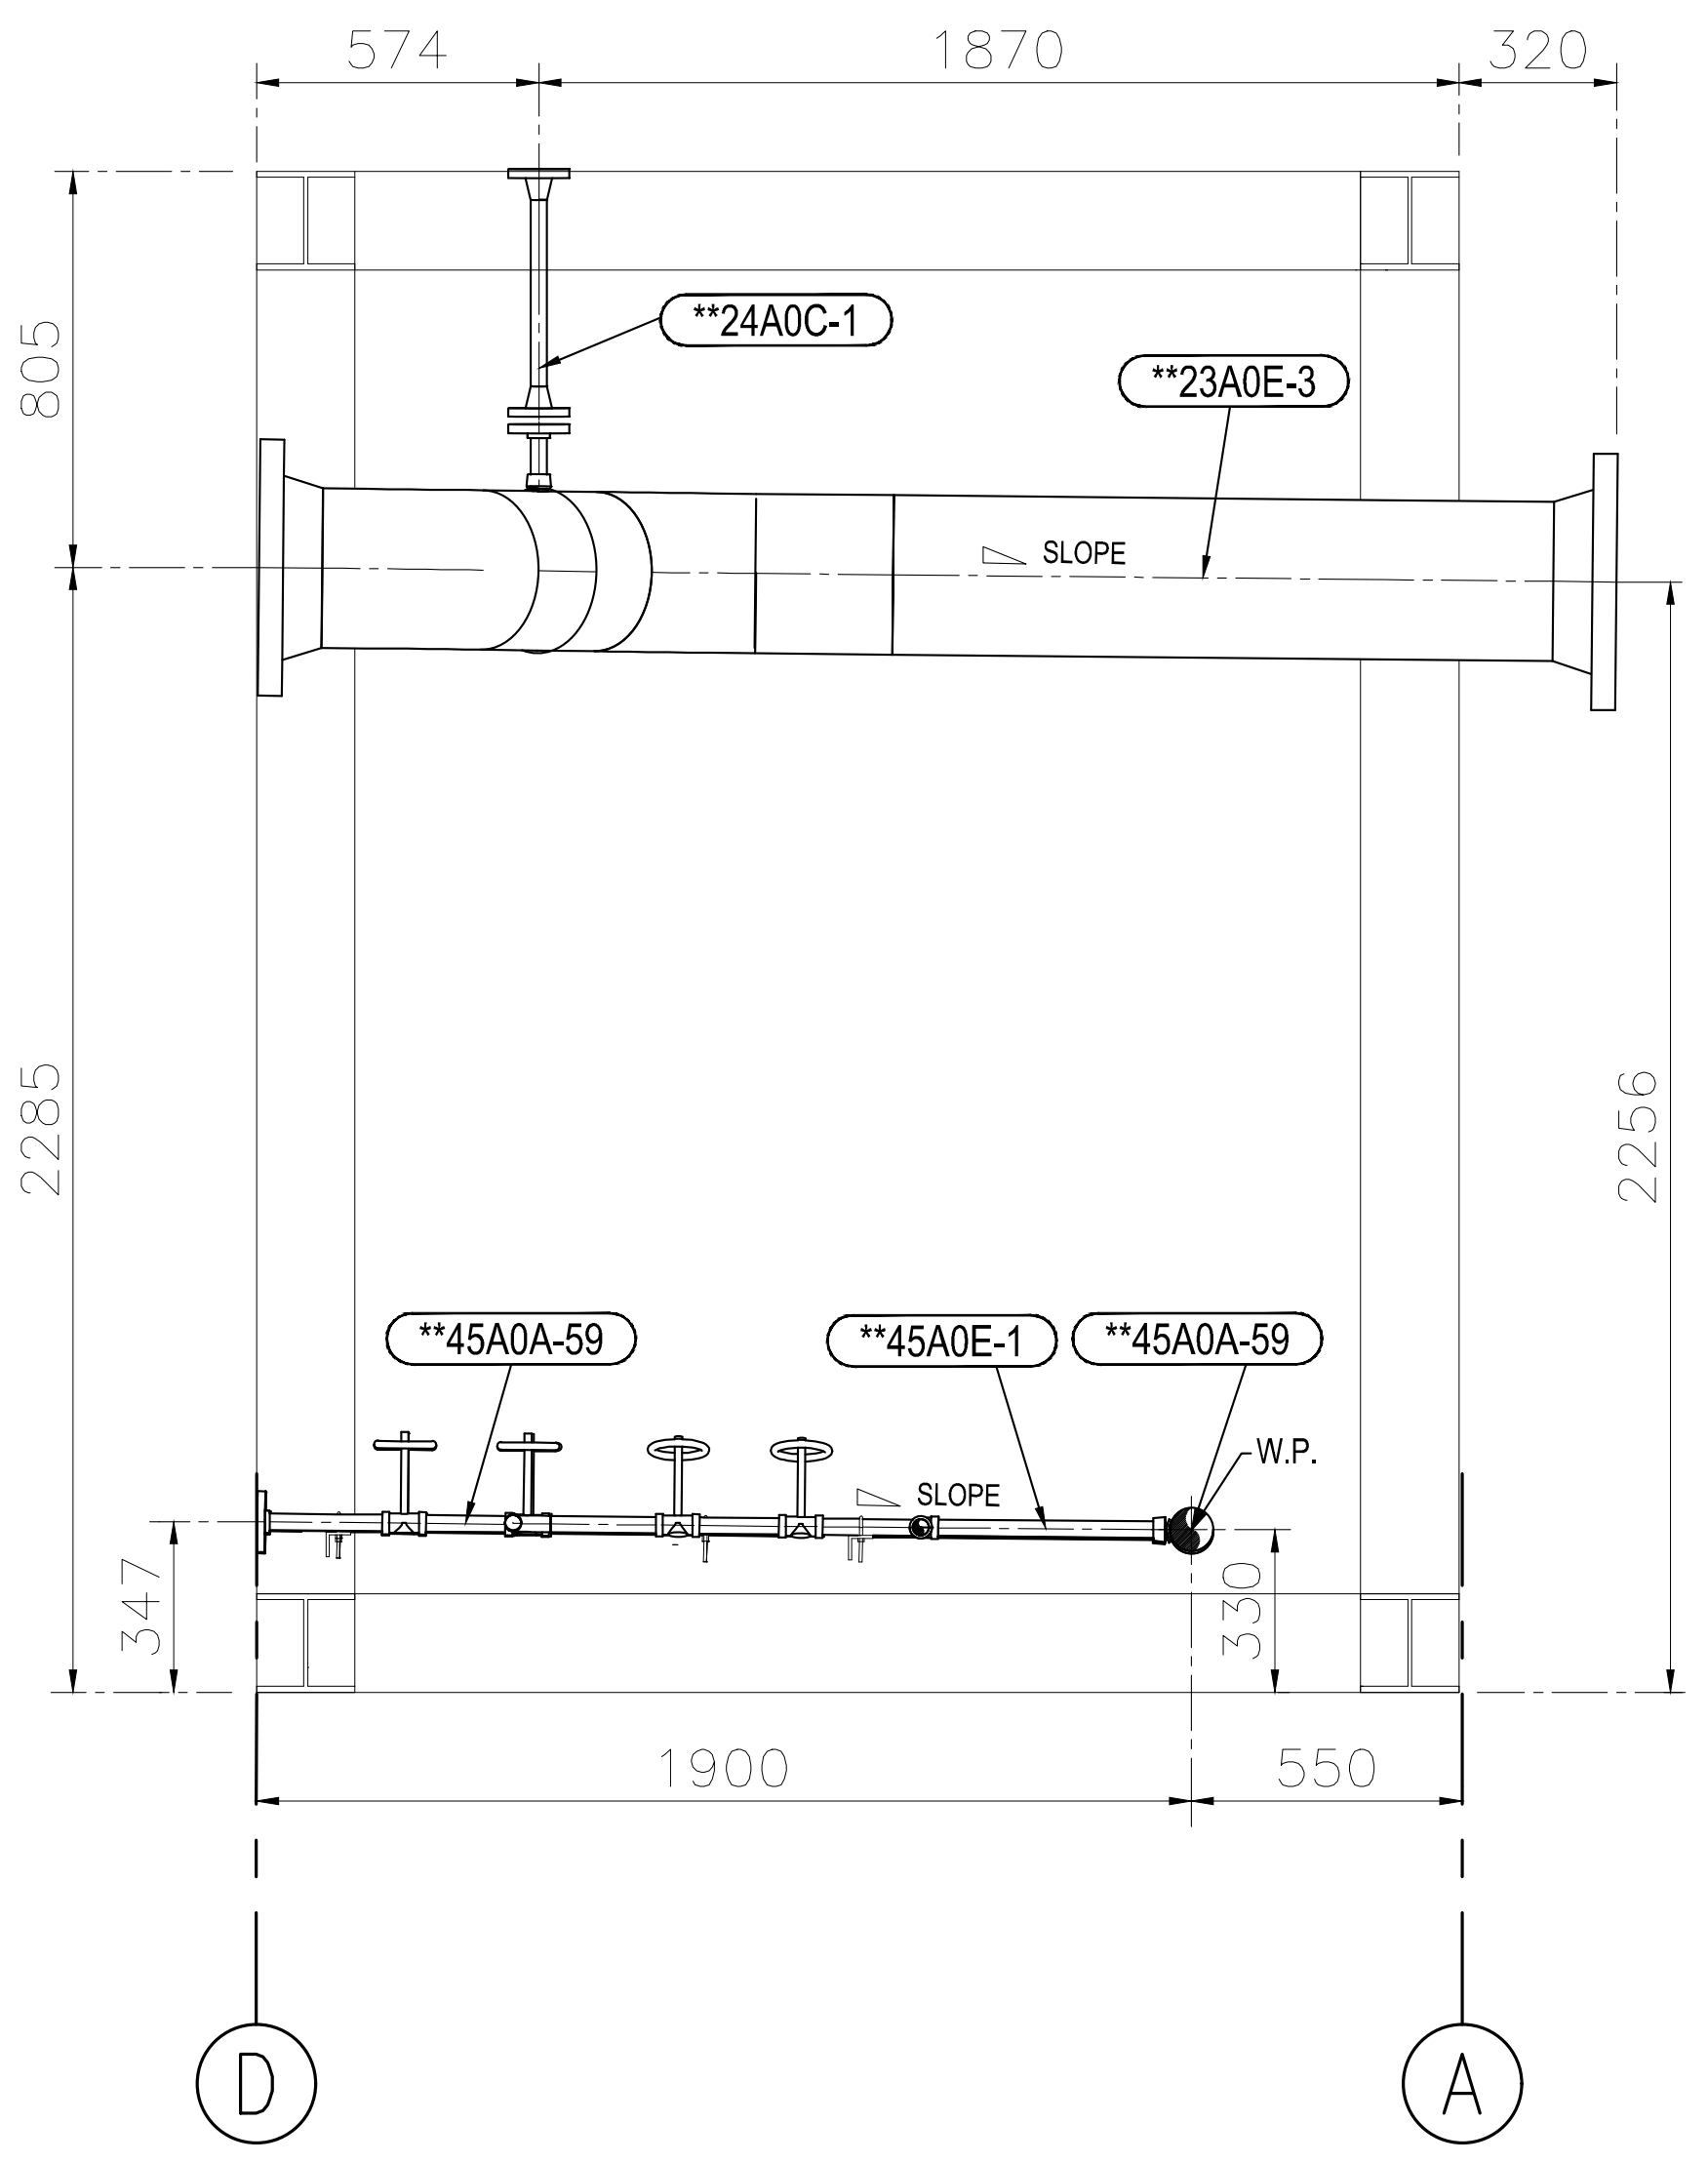
574
1870
320
805
**24A0C-1
**23A0E-3
SLOPE
2285
2256
**45A0A-59
**45A0E-1
**45A0A-59
W.P.
SLOPE
347
330
1900
550
D
A

MD-1.1 SECTION 'F-F'
(LOOKING WEST)

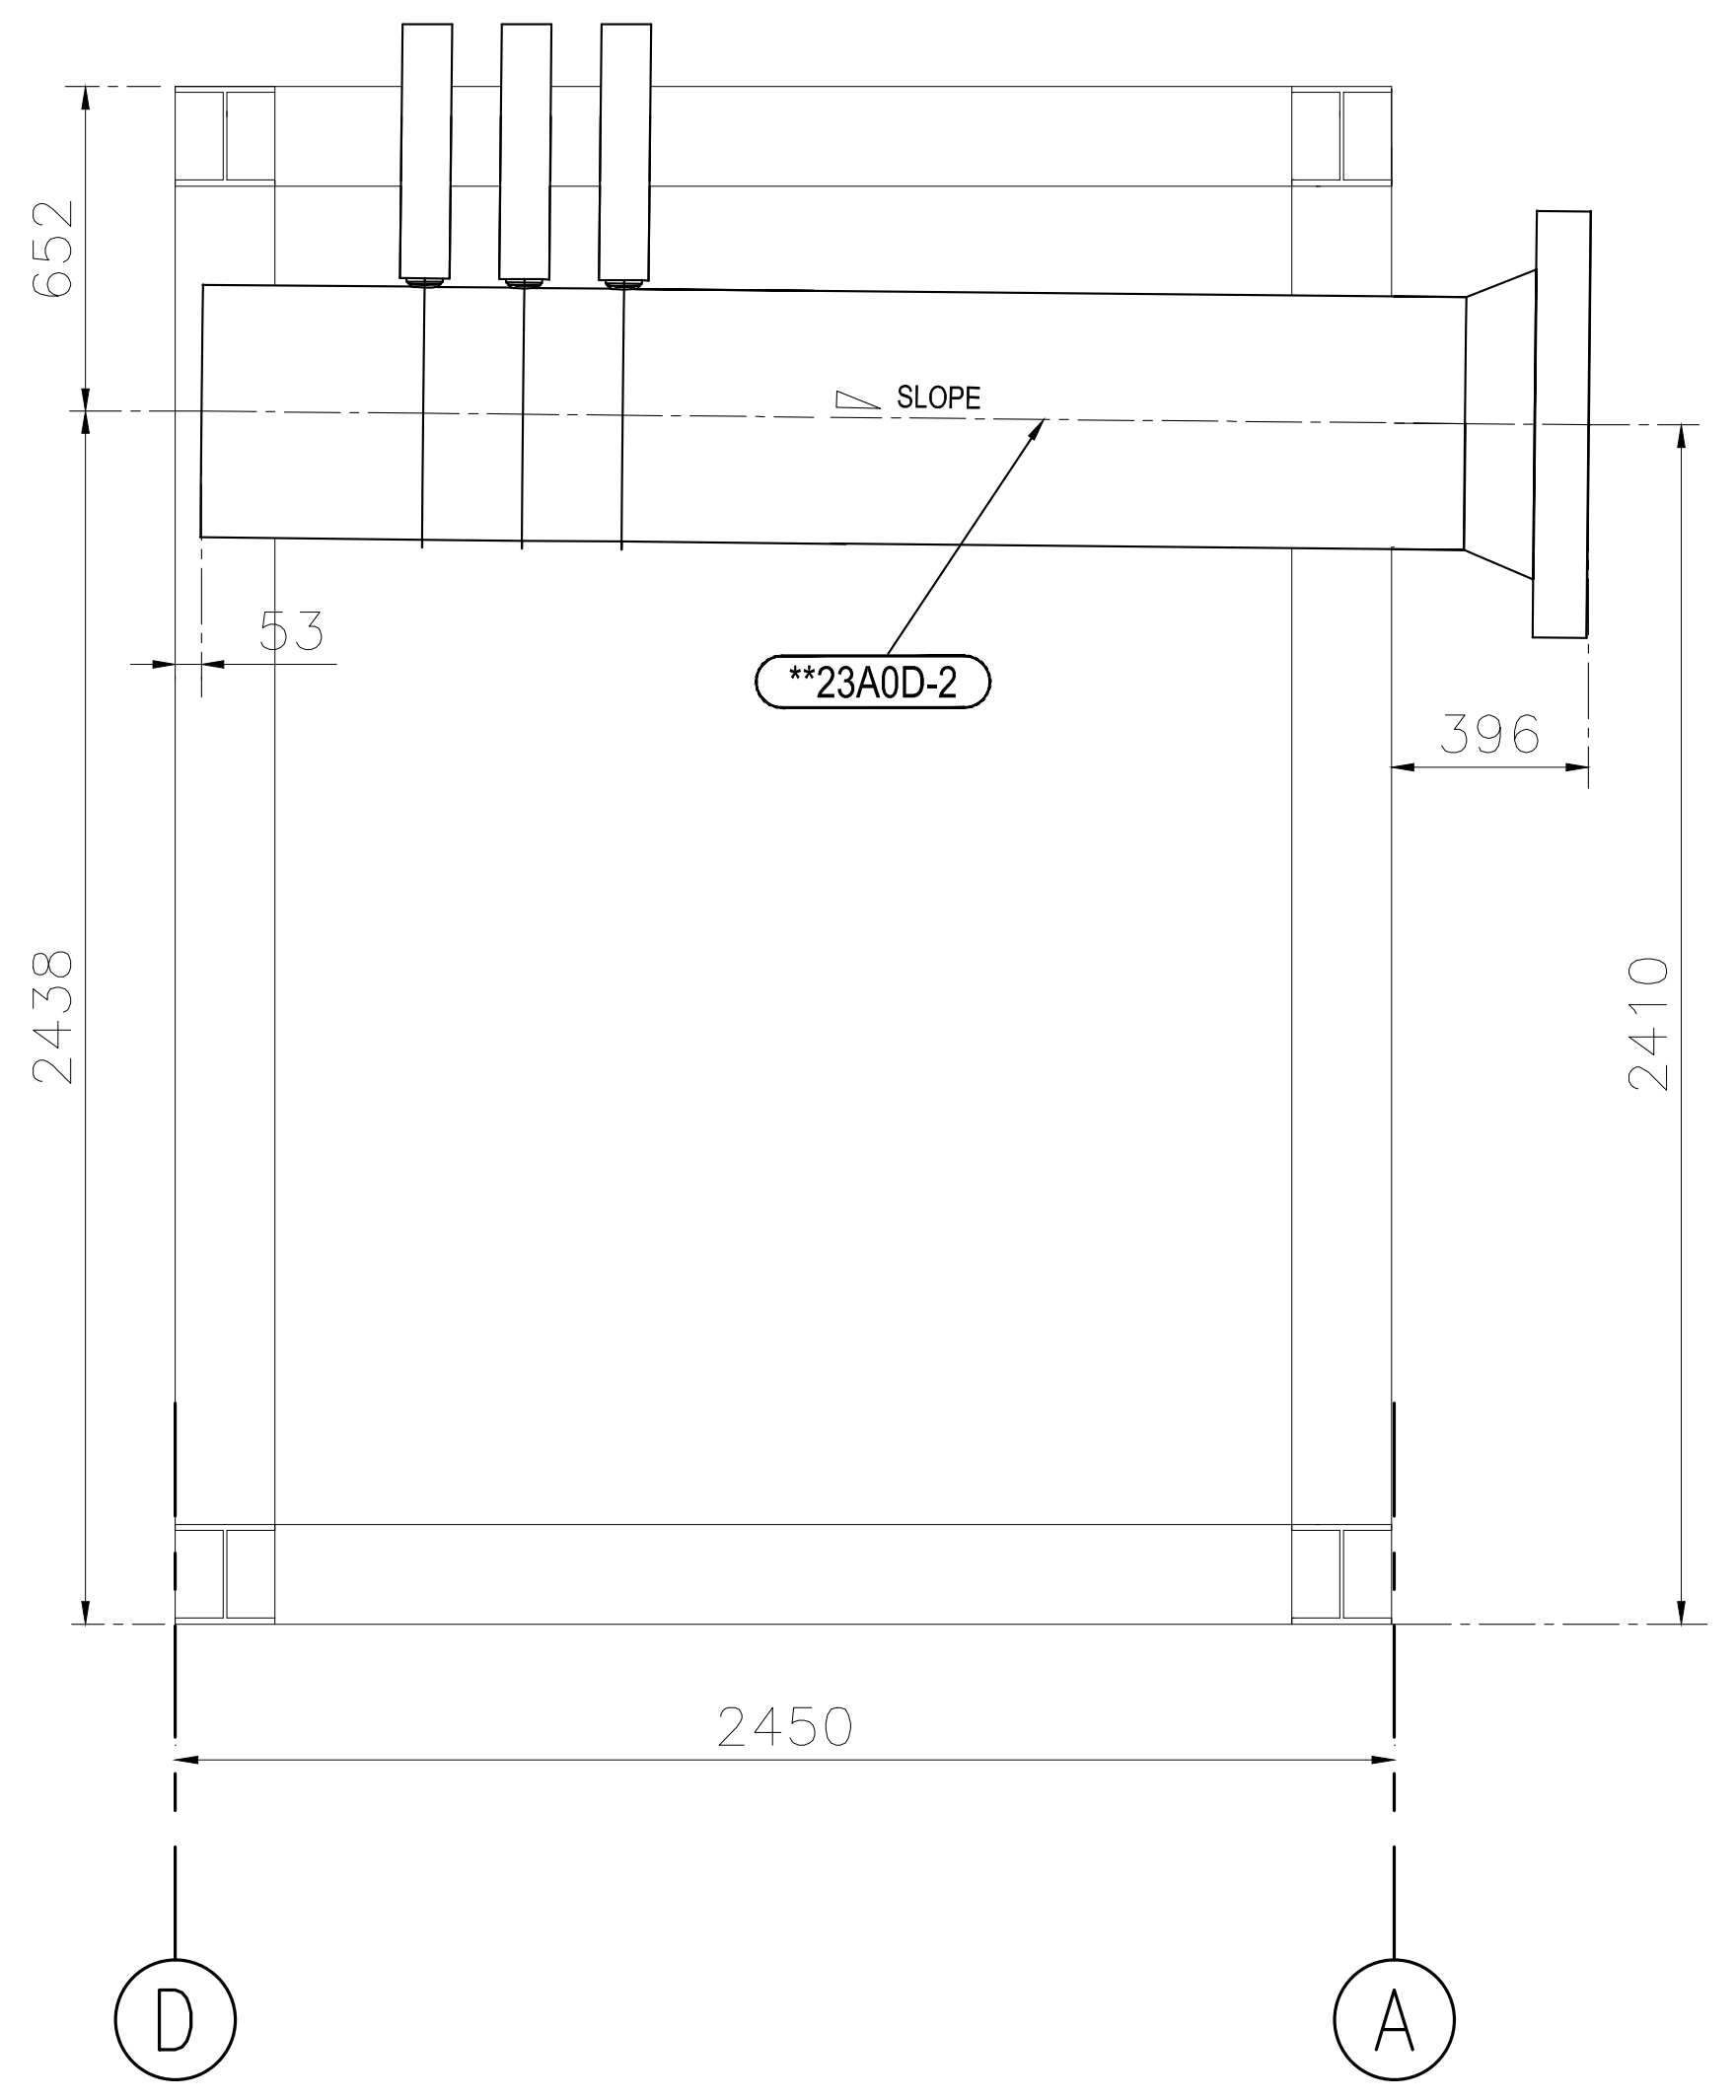
652
SLOPE
53
**23A0D-2
396
2438
2410
2450
D
A

MD-1.1 SECTION 'G-G'
(LOOKING WEST)

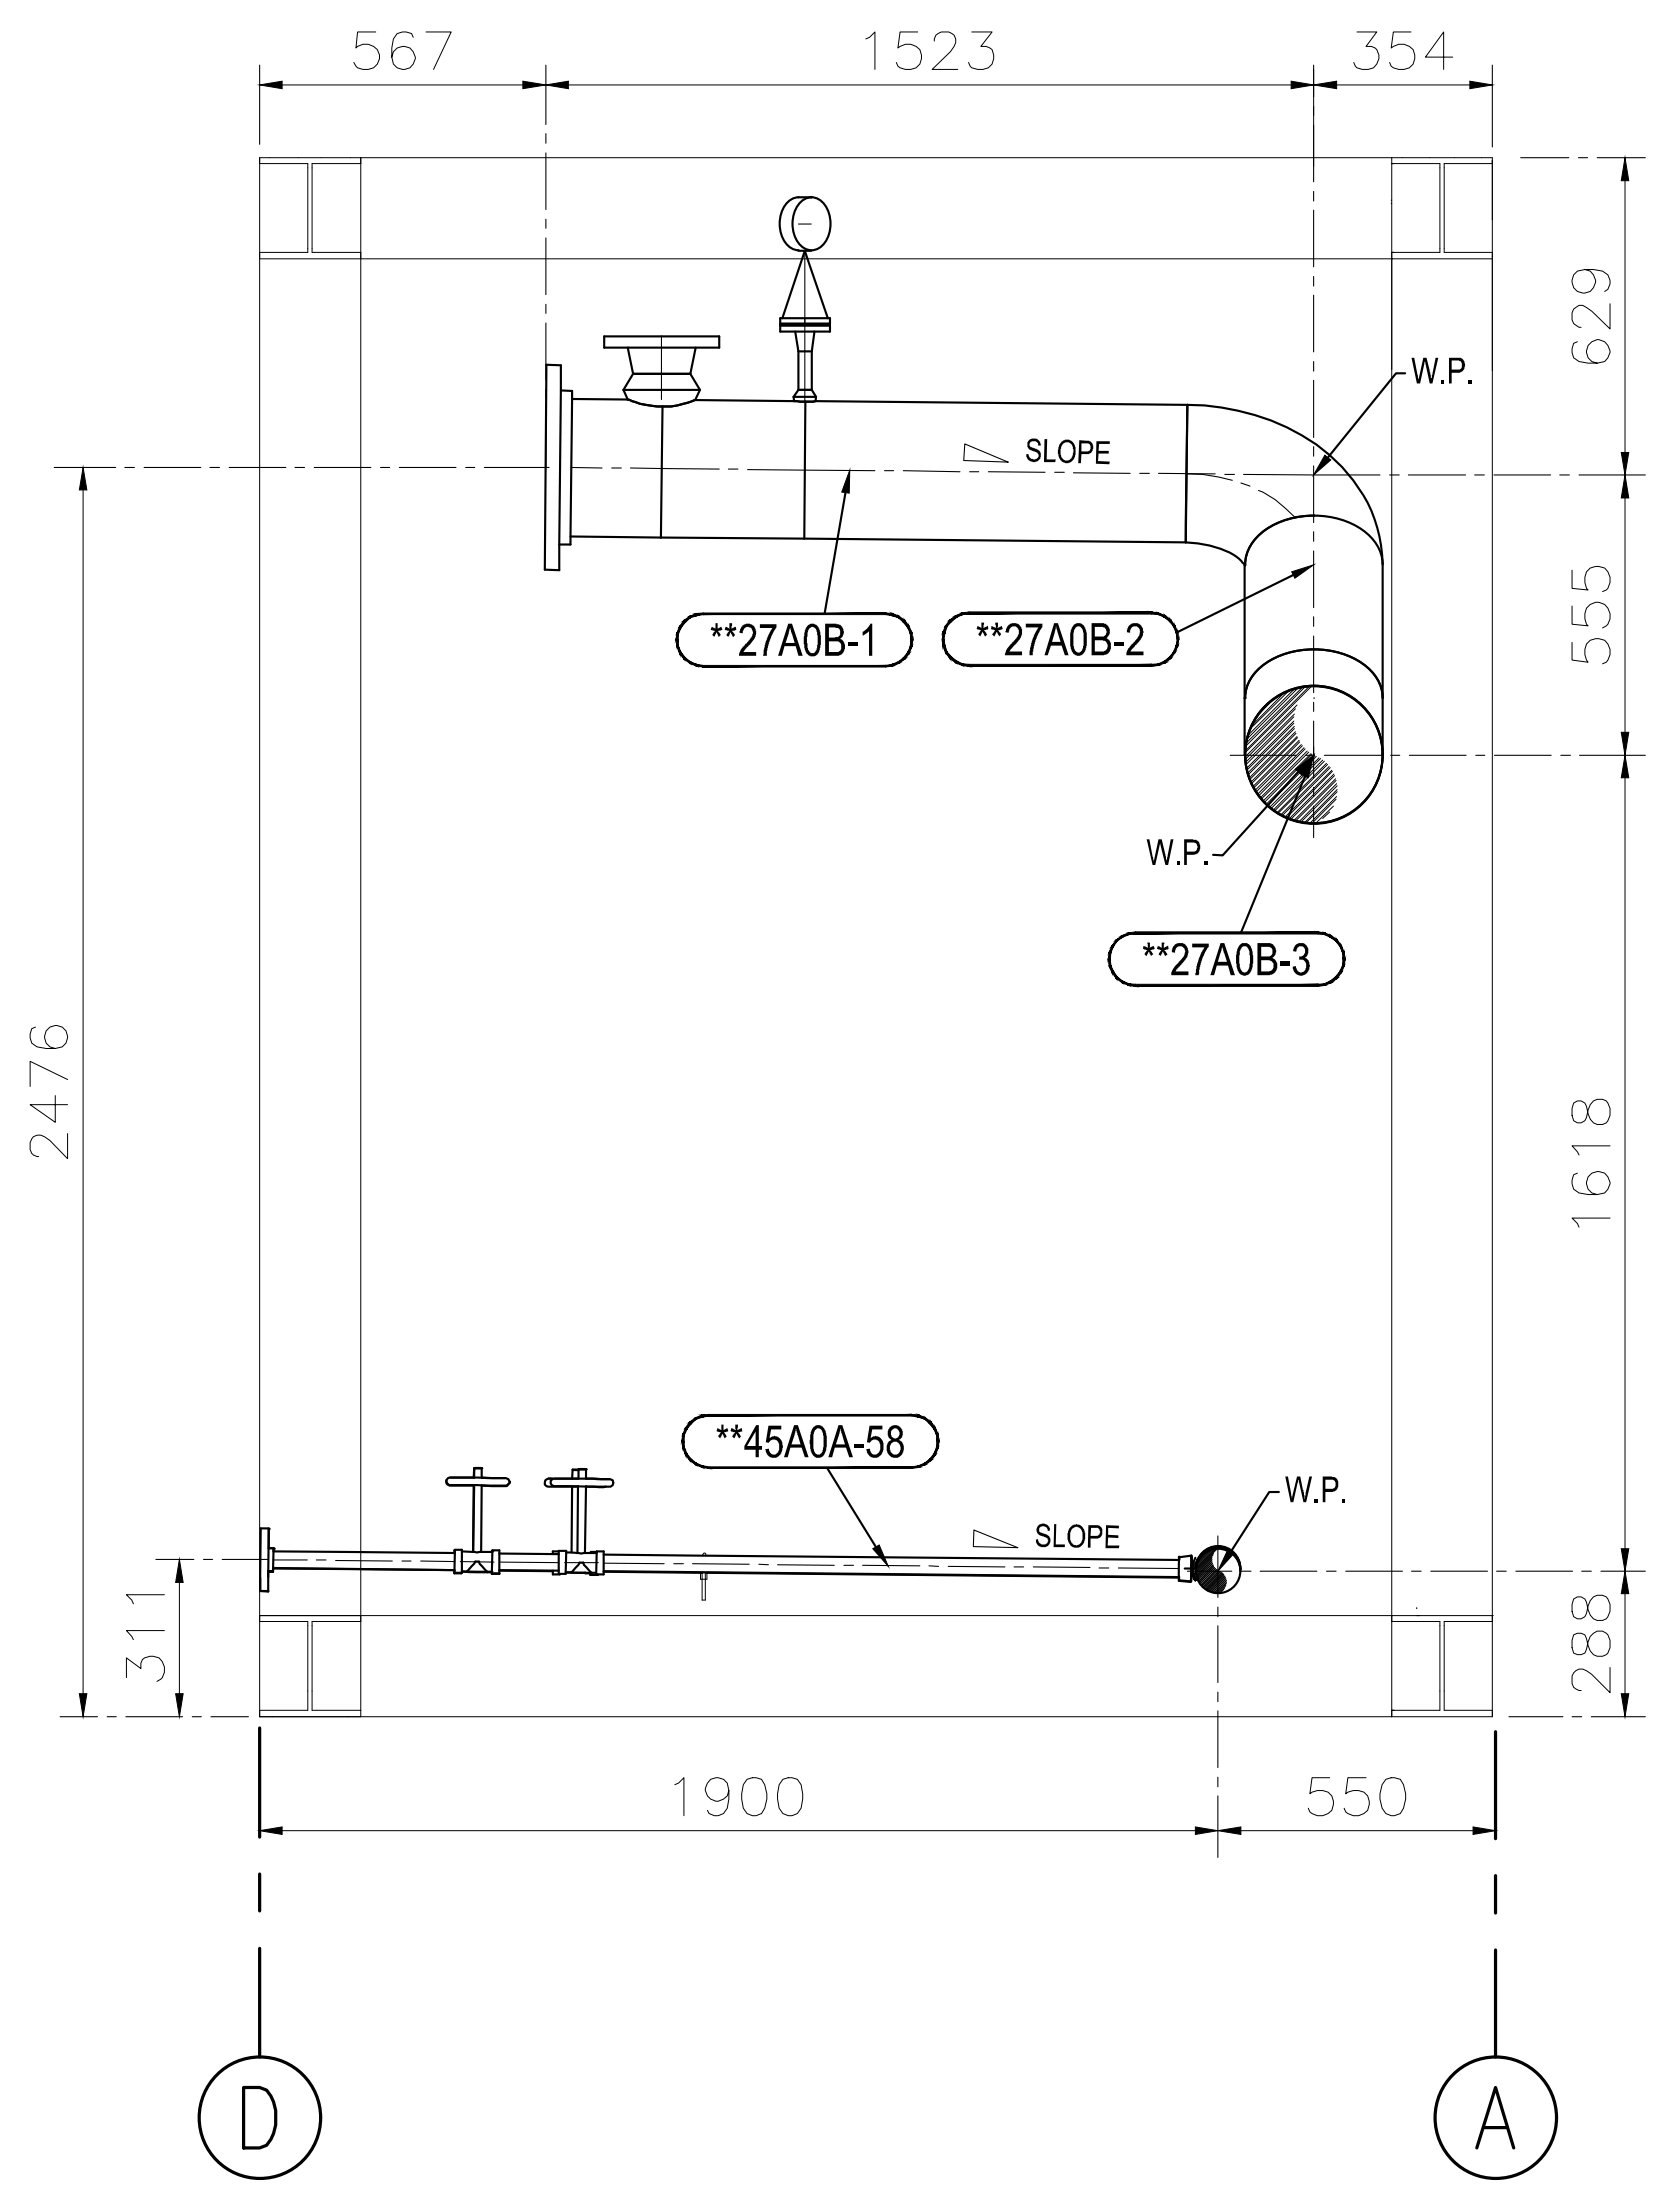
567
1523
354
SLOPE
W.P.
629
**27A0B-1
**27A0B-2
555
W.P.
**27A0B-3
2476
1618
**45A0A-58
SLOPE
W.P.
311
288
1900
550
D
A

MD-1.1 SECTION 'H-H'
(LOOKING WEST)

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   **XXXXXX —— PIPE LINE
   (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.
–

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–1.1

REV.
0

REVISION RECORD

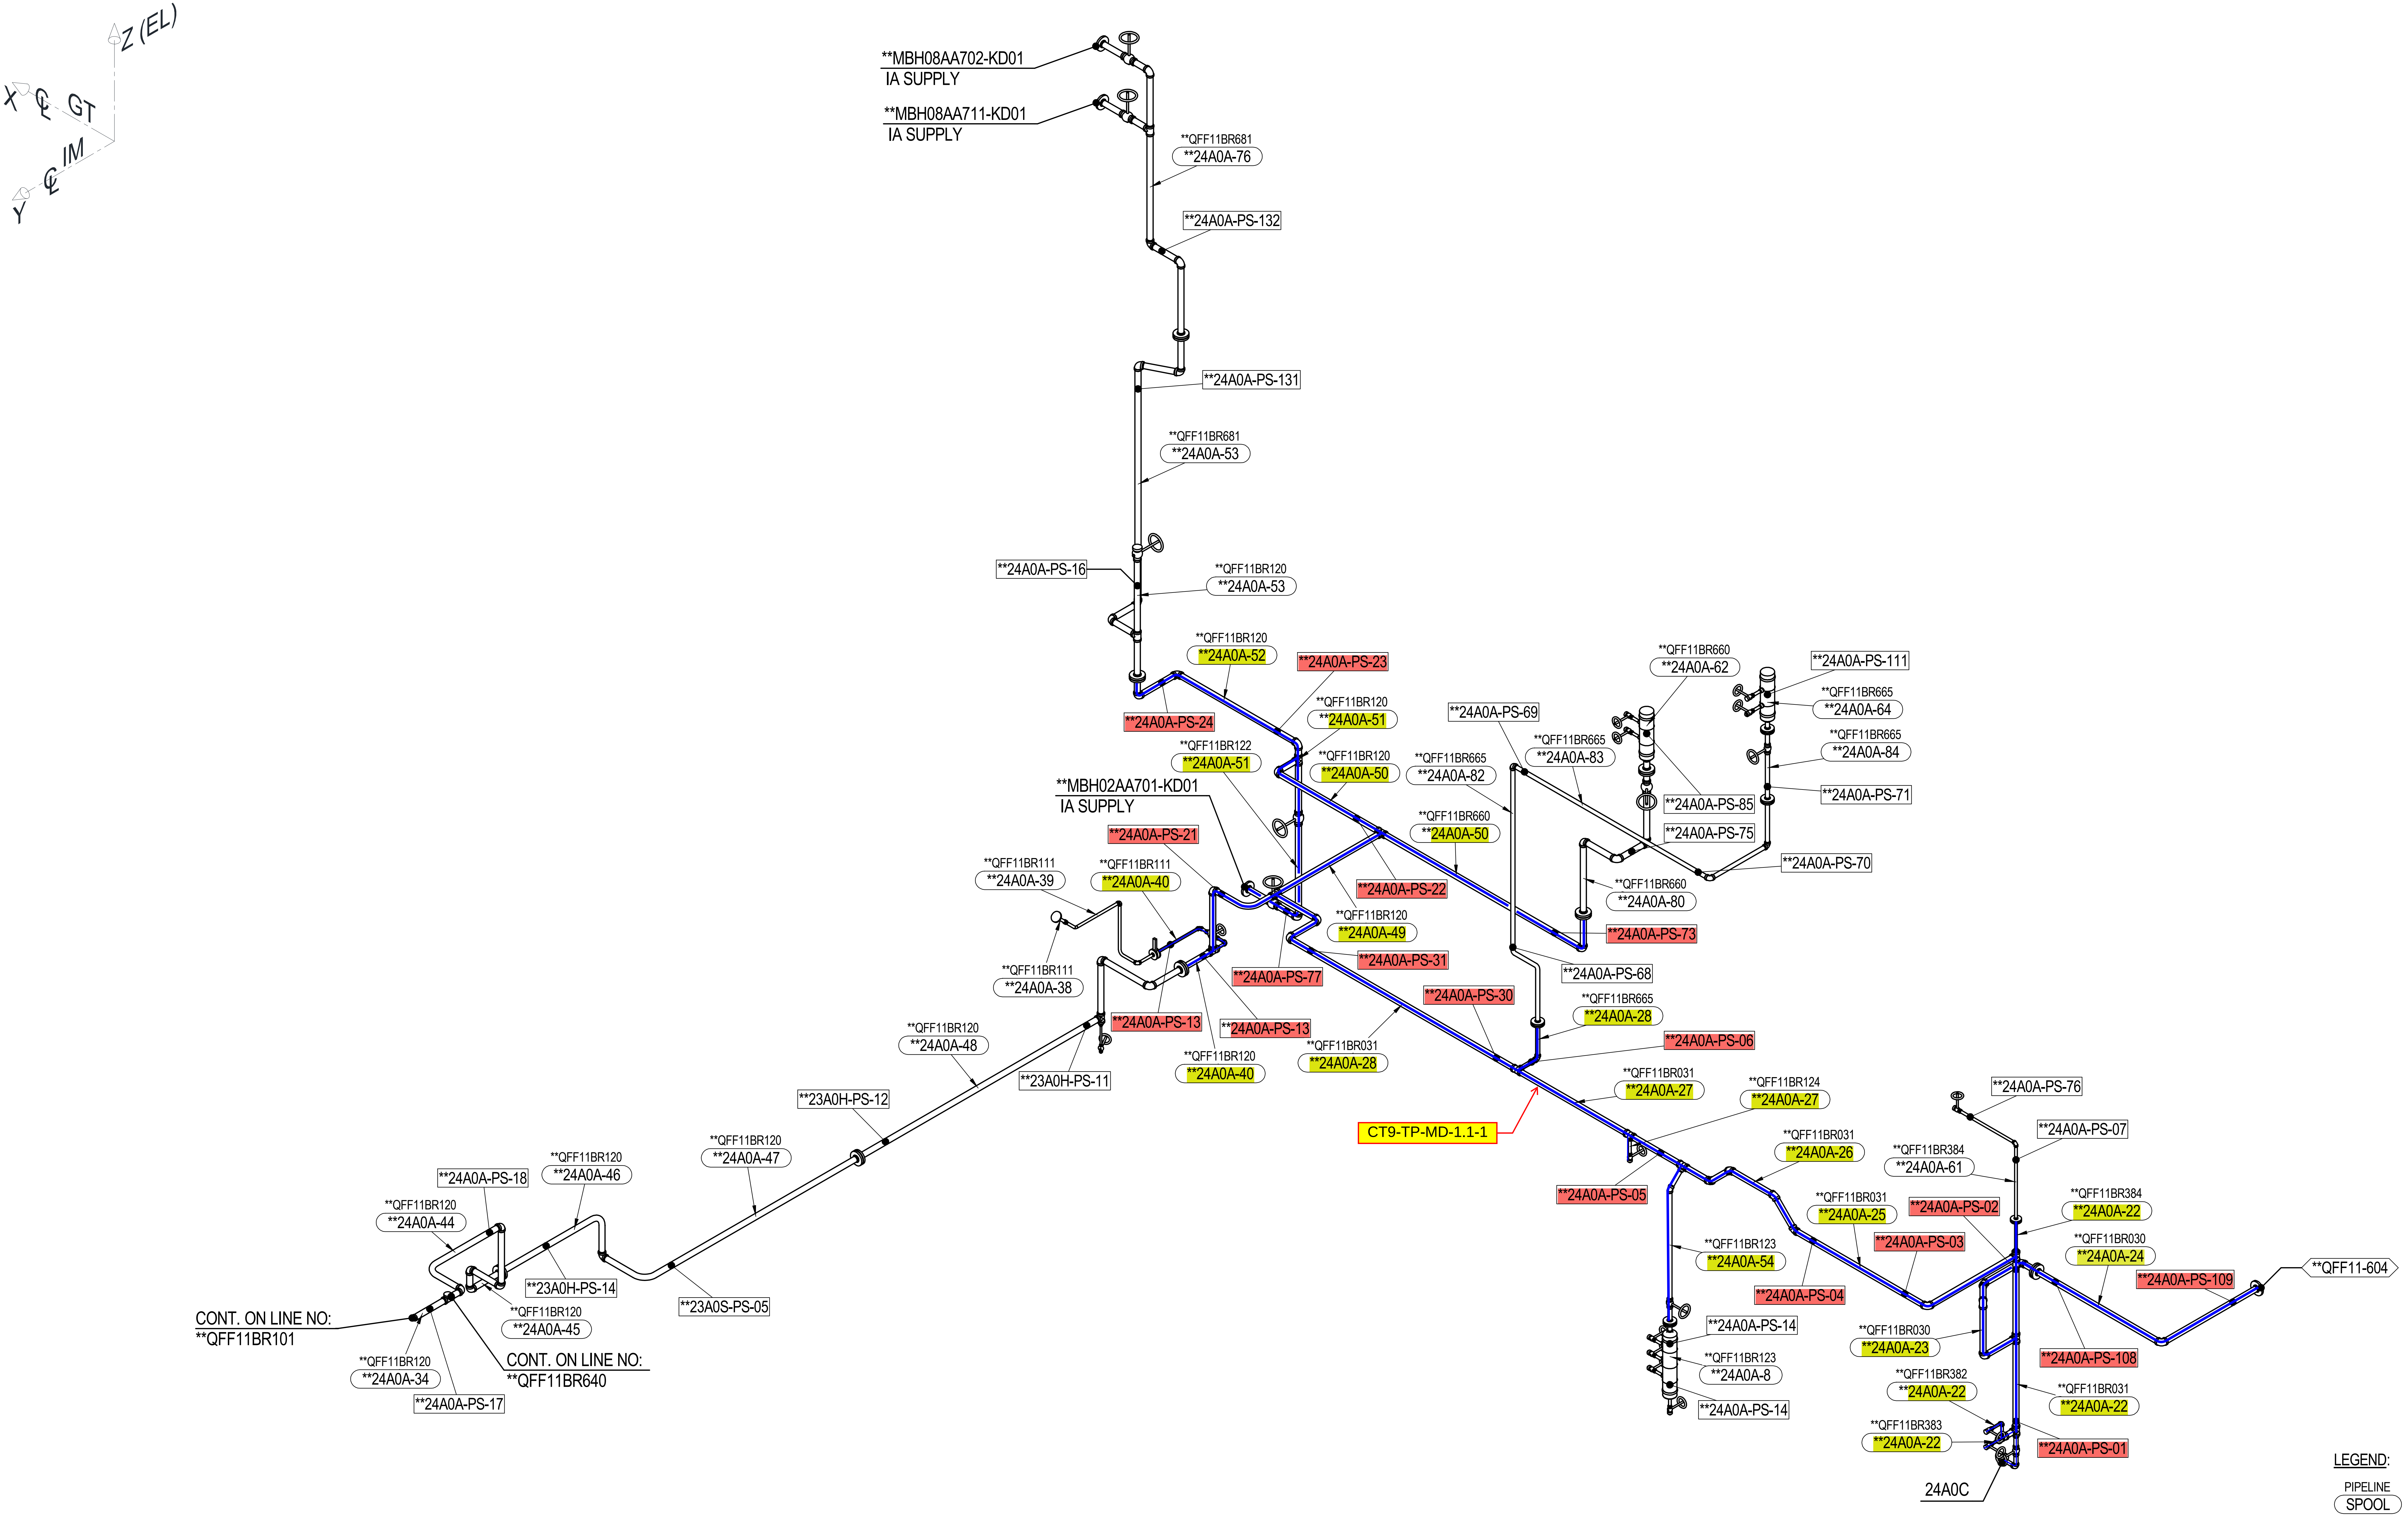
Z (EL)
X ℄ GT
Y ℄ IM
**MBH08AA702-KD01
IA SUPPLY
**MBH08AA711-KD01
IA SUPPLY
**QFF11BR681
**24A0A-76
**24A0A-PS-132
**24A0A-PS-131
**QFF11BR681
**24A0A-53
**24A0A-PS-16
**QFF11BR120
**24A0A-53
**QFF11BR120
**24A0A-52
**24A0A-PS-23
**24A0A-PS-24
**QFF11BR120
**24A0A-51
**QFF11BR122
**24A0A-51
**QFF11BR120
**24A0A-50
**MBH02AA701-KD01
IA SUPPLY
**24A0A-PS-21
**QFF11BR111
**24A0A-39
**QFF11BR111
**24A0A-40
**24A0A-PS-22
**QFF11BR120
**24A0A-49
**24A0A-PS-31
**QFF11BR111
**24A0A-38
**24A0A-PS-77
**24A0A-PS-13
**24A0A-PS-13
**QFF11BR120
**24A0A-48
**23A0H-PS-11
**QFF11BR120
**24A0A-40
**24A0A-PS-30
**QFF11BR031
**24A0A-28
**24A0A-PS-69
**QFF11BR665
**24A0A-82
**QFF11BR665
**24A0A-83
**QFF11BR660
**24A0A-50
**QFF11BR660
**24A0A-62
**24A0A-PS-111
**QFF11BR665
**24A0A-64
**QFF11BR665
**24A0A-84
**24A0A-PS-71
**24A0A-PS-85
**24A0A-PS-75
**24A0A-PS-70
**QFF11BR660
**24A0A-80
**24A0A-PS-73
**24A0A-PS-68
**QFF11BR665
**24A0A-28
**24A0A-PS-06
**QFF11BR031
**24A0A-27
**QFF11BR124
**24A0A-27
CT9-TP-MD-1.1-1
**23A0H-PS-12
**QFF11BR120
**24A0A-47
**24A0A-PS-18
**QFF11BR120
**24A0A-46
**QFF11BR120
**24A0A-44
**23A0H-PS-14
**23A0S-PS-05
**QFF11BR120
**24A0A-45
CONT. ON LINE NO:
**QFF11BR101
**QFF11BR120
**24A0A-34
**24A0A-PS-17
CONT. ON LINE NO:
**QFF11BR640
**24A0A-PS-05
**QFF11BR031
**24A0A-26
**QFF11BR384
**24A0A-61
**24A0A-PS-76
**24A0A-PS-07
**QFF11BR031
**24A0A-25
**24A0A-PS-02
**QFF11BR384
**24A0A-22
**QFF11BR030
**24A0A-24
**24A0A-PS-109
**QFF11-604
**24A0A-PS-03
**QFF11BR123
**24A0A-54
**24A0A-PS-04
**24A0A-PS-14
**QFF11BR123
**24A0A-8
**24A0A-PS-14
**QFF11BR030
**24A0A-23
**24A0A-PS-108
**QFF11BR382
**24A0A-22
**QFF11BR031
**24A0A-22
**QFF11BR383
**24A0A-22
**24A0A-PS-01
24A0C

LEGEND:

PIPELINE SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
— — — — — — — —	INDICATES TRACING.

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
-		4 OF 8	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

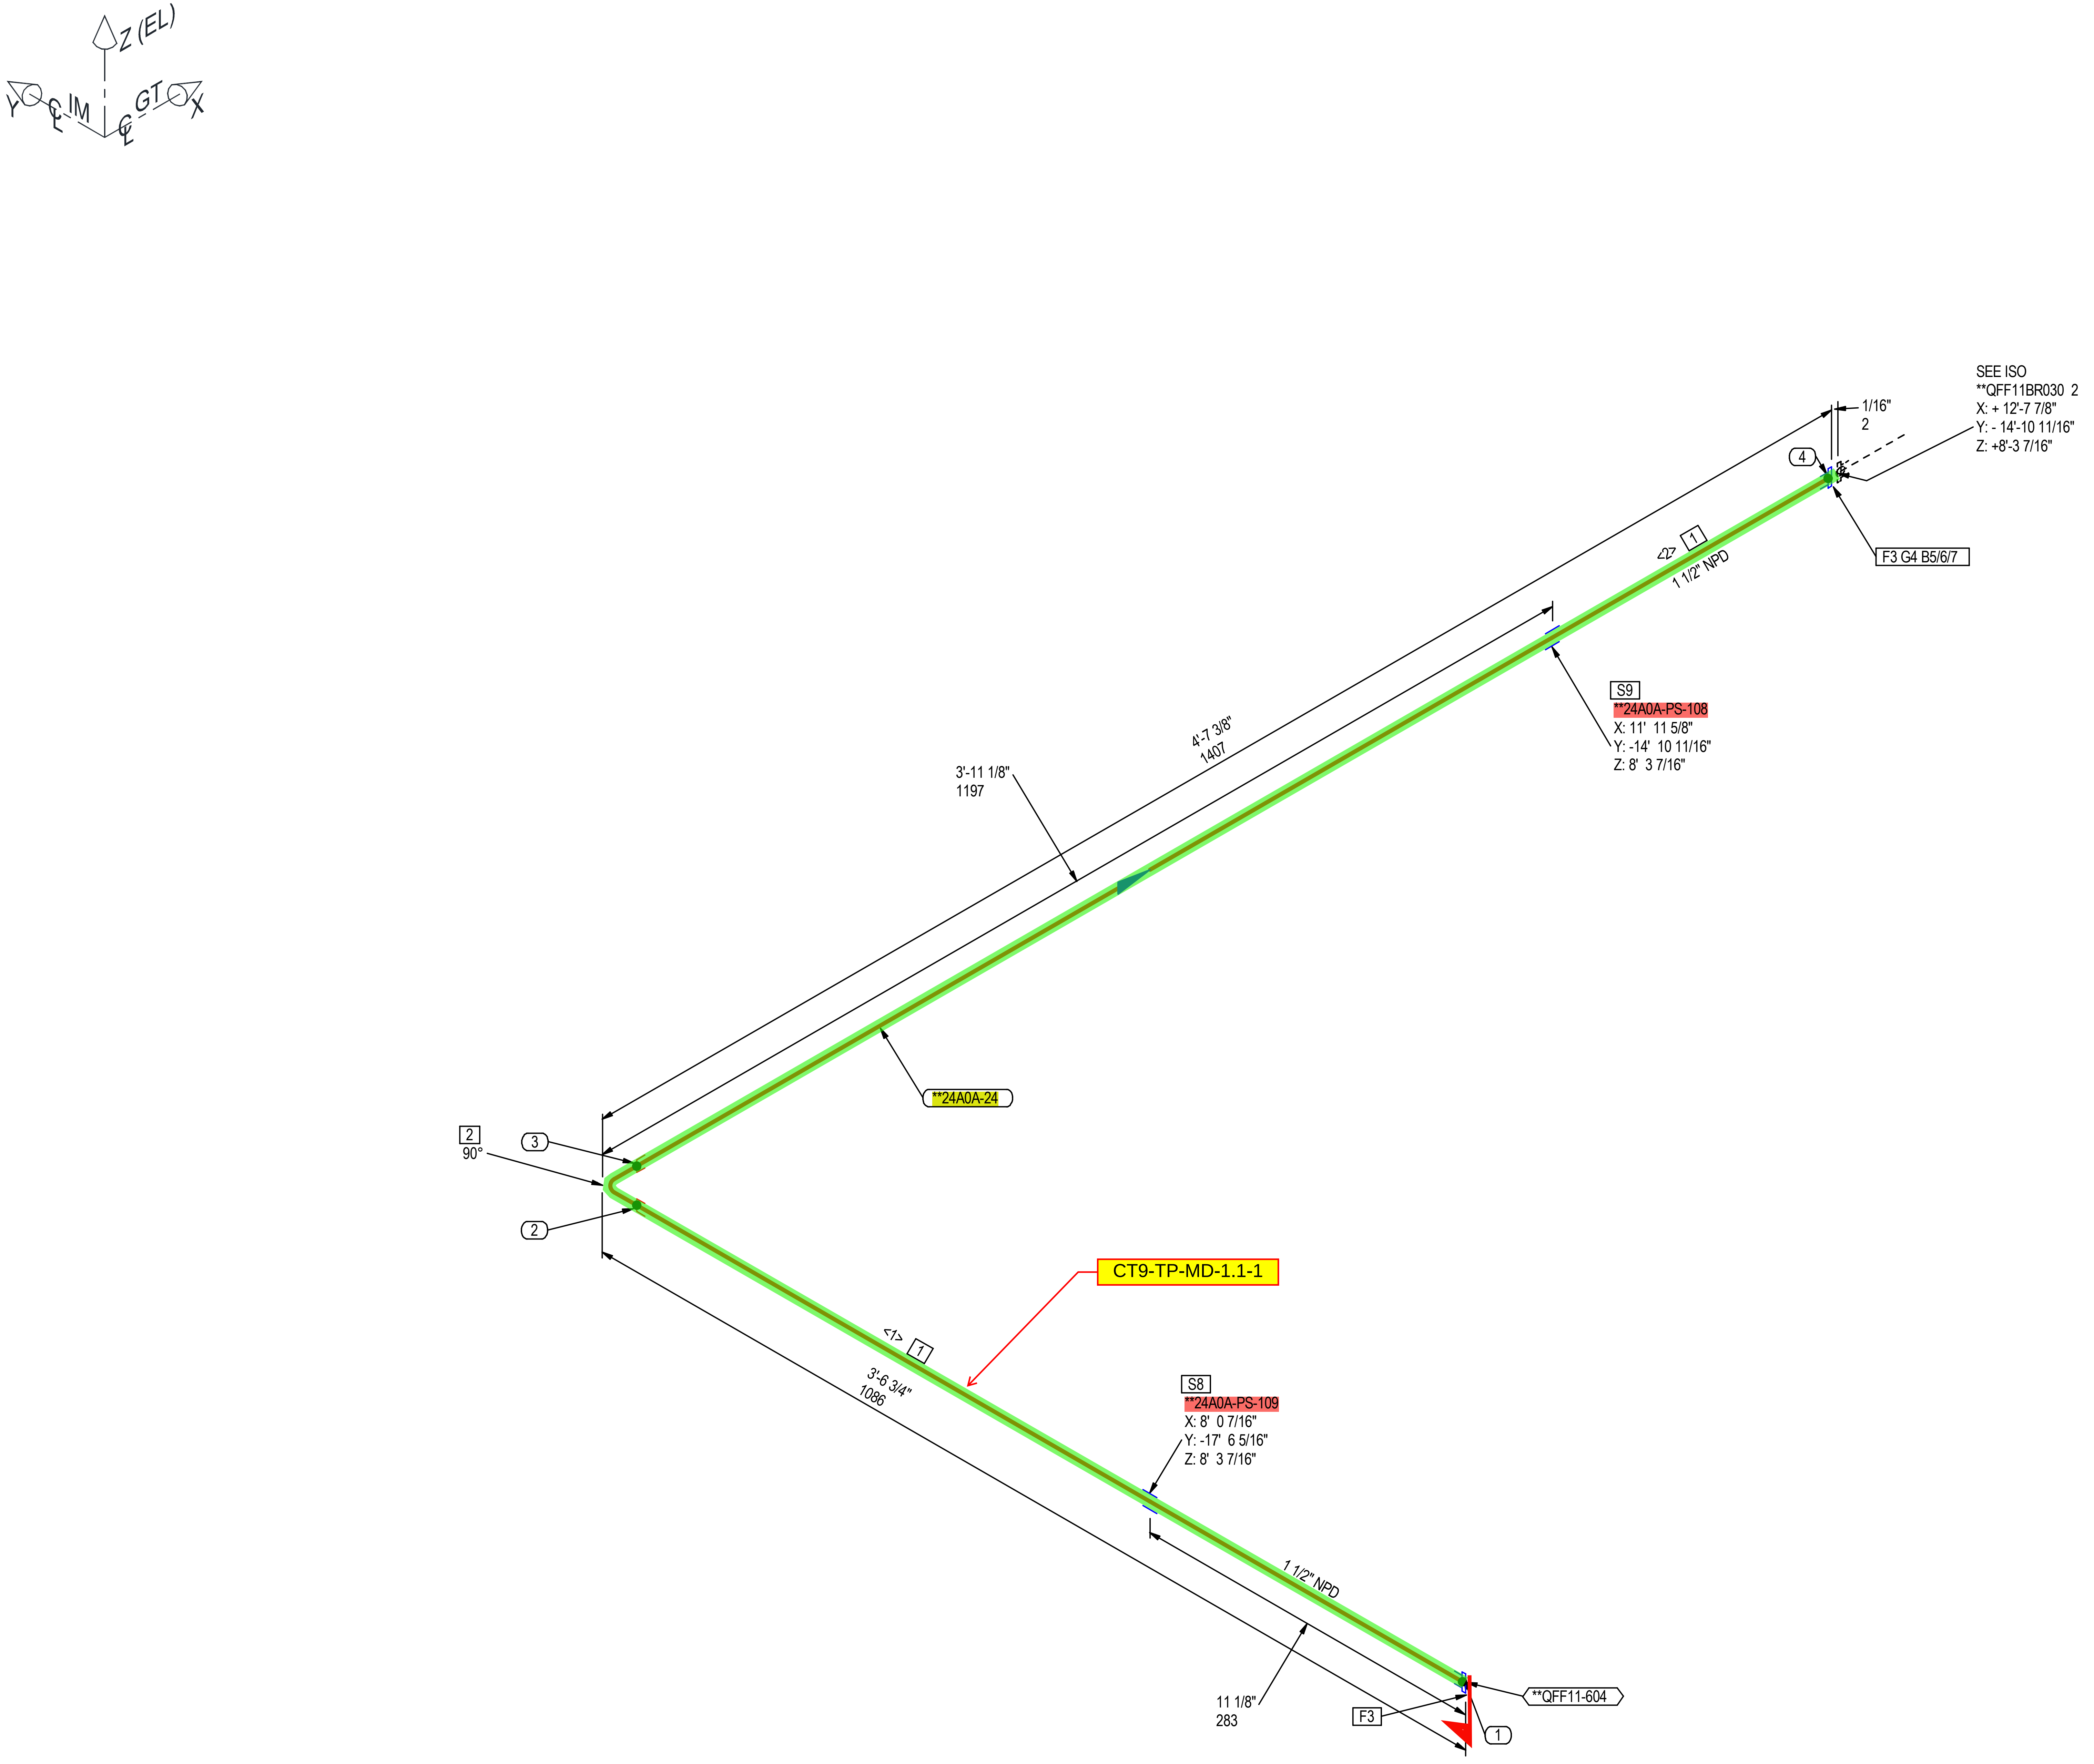

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	8.0'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	1
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
8	PIPE SUPPORT	1 1/2	**24A0A-PS-109	1
9	PIPE SUPPORT	1 1/2	**24A0A-PS-108	1

SPOOLS

**24A0A-24

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'5 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	4'5 3/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1 1/2"	1
2	SW	S	1 1/2"	1
3	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	150.00 psig / 1.03 MPag		
TEST PRESS.:	225.00 psig / 1.55 MPag		
MAX. TEMP:	140 F / 60 C		
INSULATION SPEC:	NOT INSULATED		

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR030		1 OF 2	

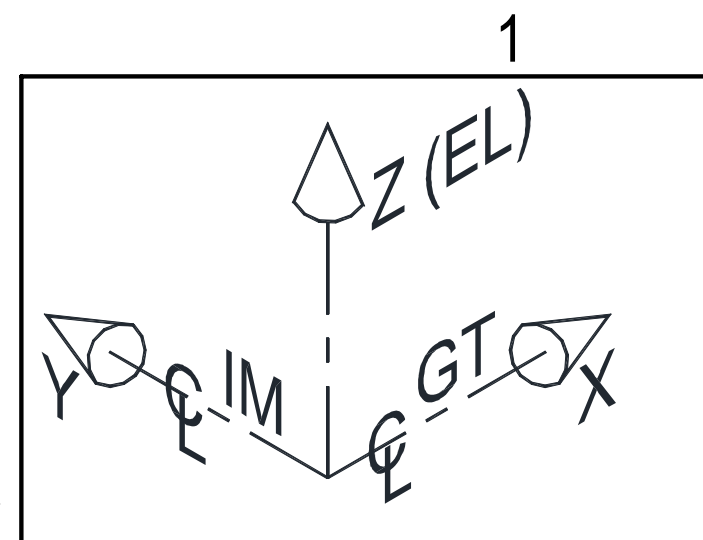

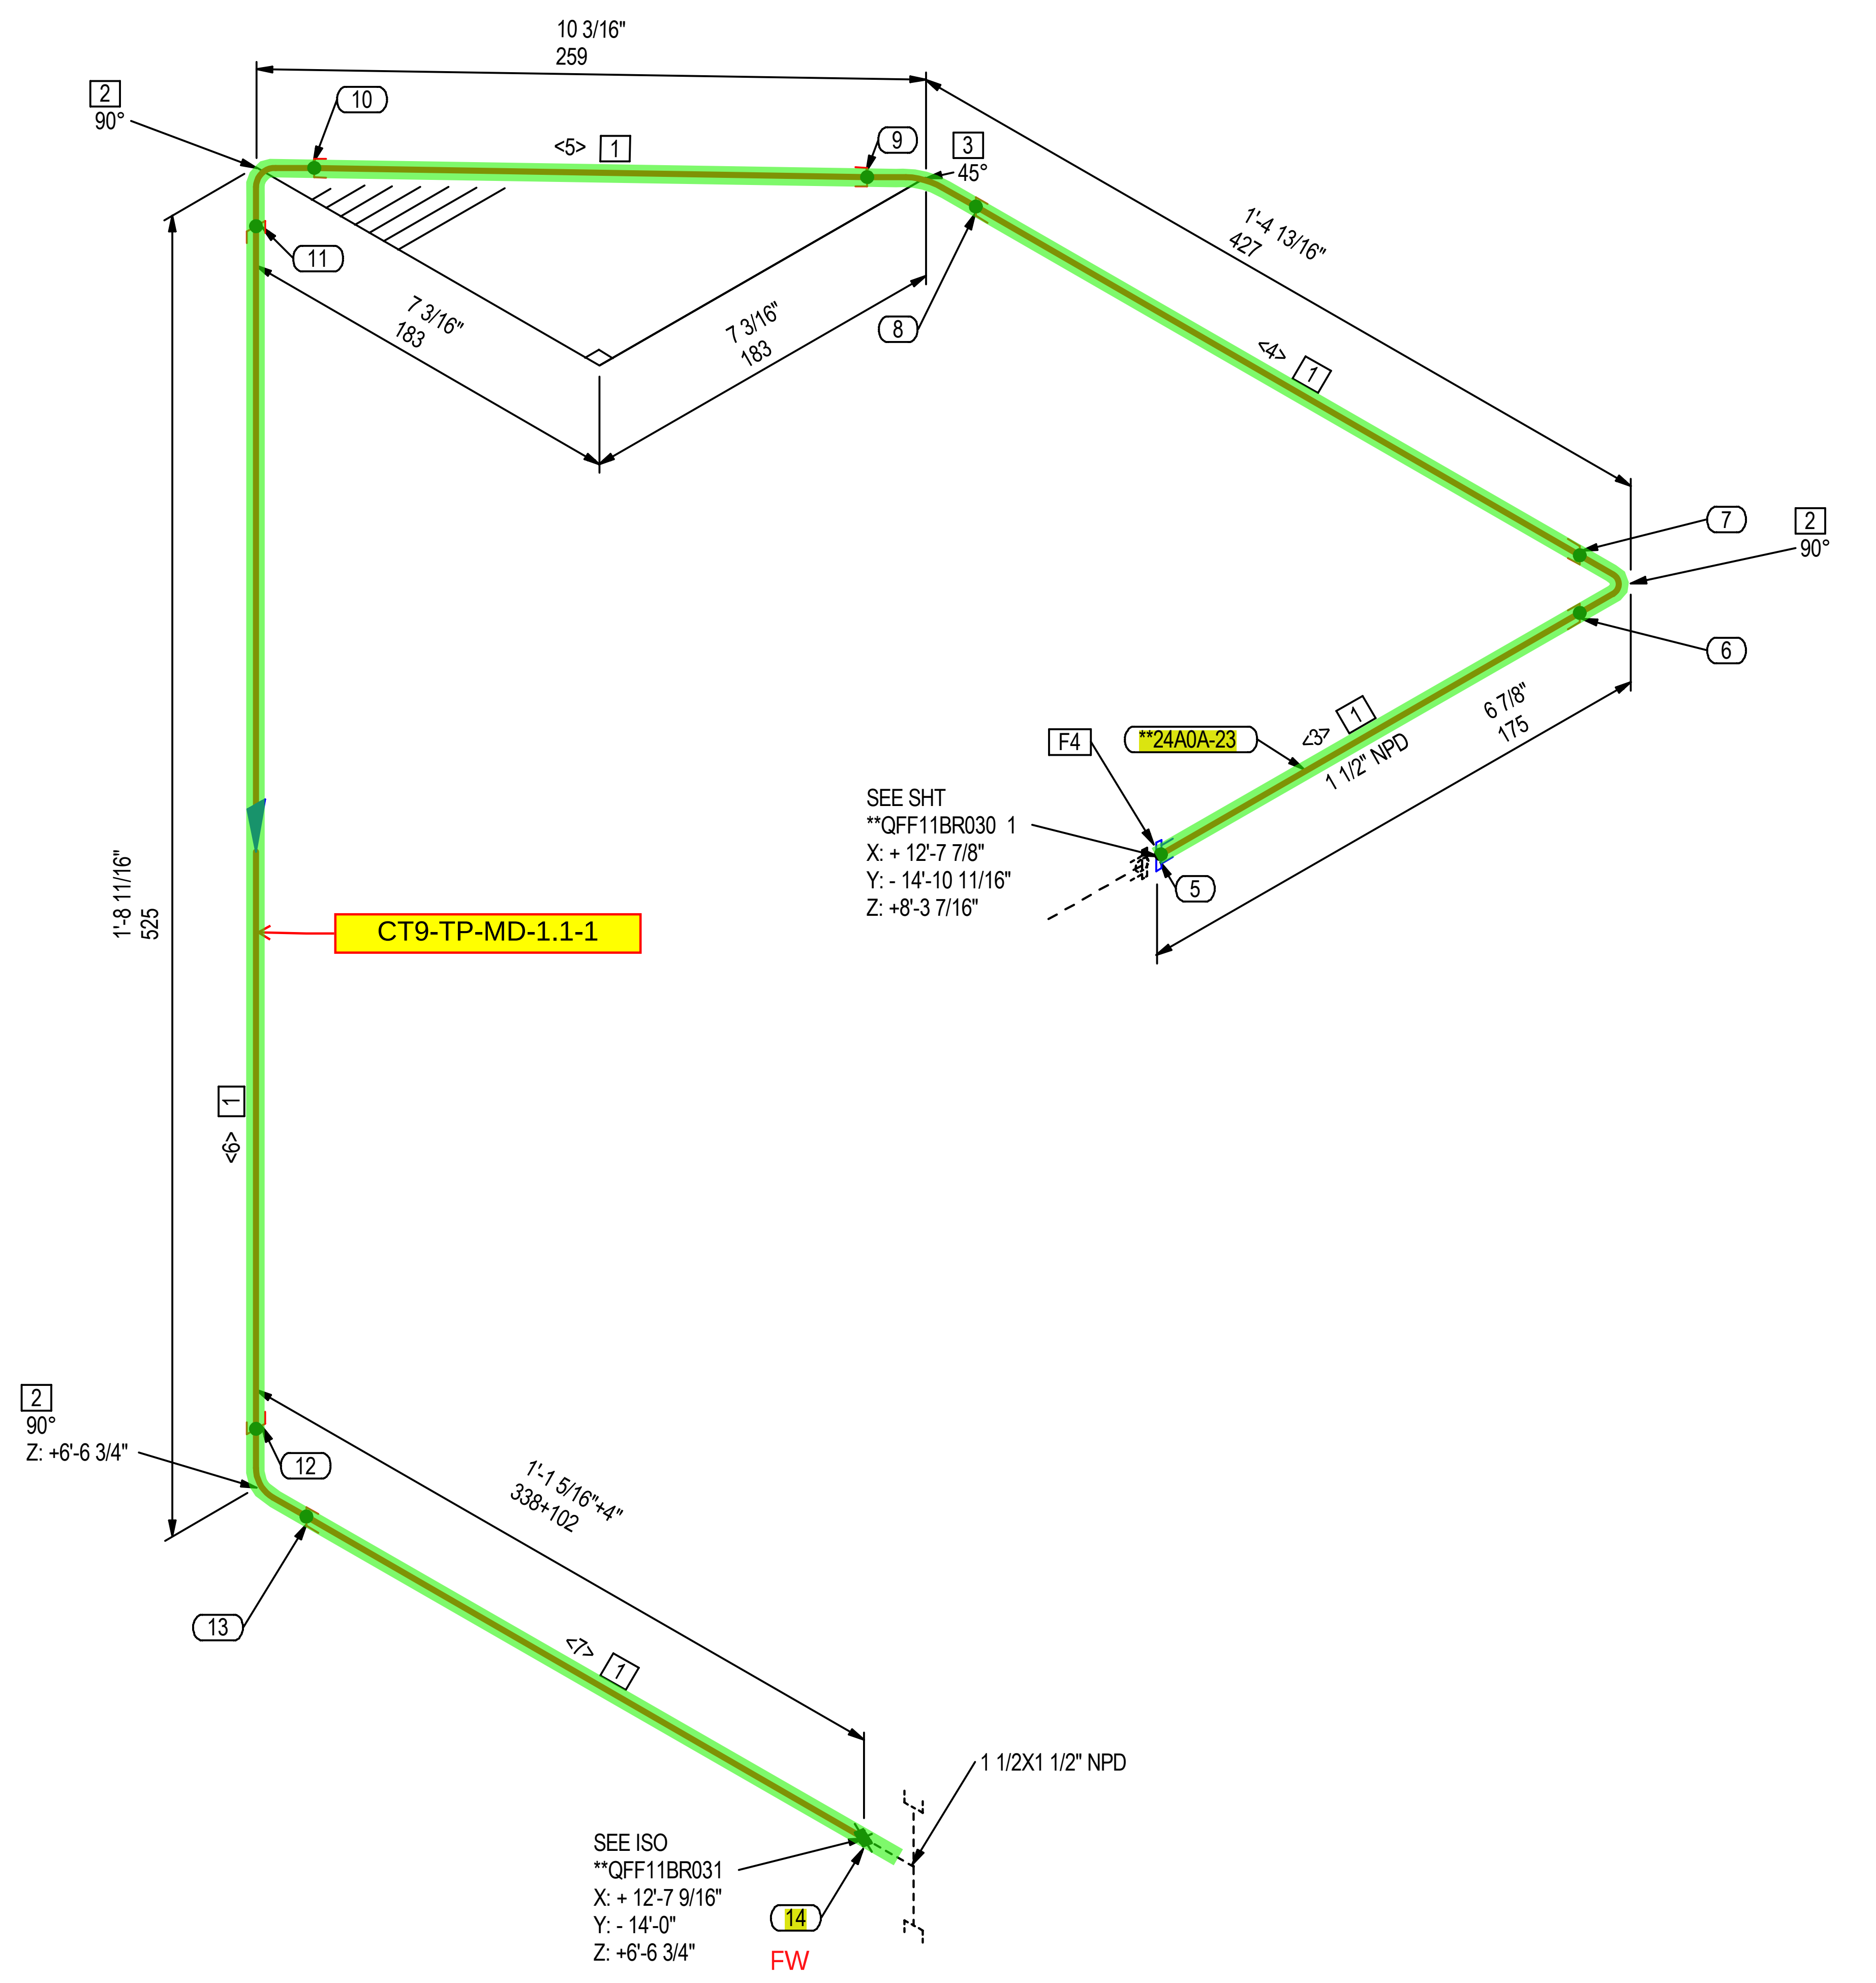

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	5.2'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
3	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMBWAWBVZZAAGALO	1
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

SPOOLS

**24A0A-23

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<3>	5 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	1'2 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	1'6 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	1'4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING

SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
5	SW	S	1 1/2"	1
6	SW	S	1 1/2"	1
7	SW	S	1 1/2"	1
8	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1

ADDITIONAL NOTES:

WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
- BW - BUTT WELD
- SW - SOCKET WELD
- SOF - SLIP-ON FLANGE
- SOB - SET-ON BRANCH
- LET - OLET, LATROLET OR HALF COUPLING
- TW - TACK WELD
- MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
- ● S - SHOP
- ✱ FW - FIELD WELD
- ✱ FFW - FIELD FIT WELD

SYMBOLOGY:
- ⬭ WELD NUMBER
- ▭ PART NUMBER (PT NO)
- < > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
- F - FLANGE
- G - GASKET
- B - BOLT
- N - NUT
- W - WASHER
- O - O-RING
- L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION

N05-ISO-QFF-BR-AA

P&ID DRAWING NUMBER: N01-PID-QFF-00-02

M501JAC GAS TURBINE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR030		2 OF 2	

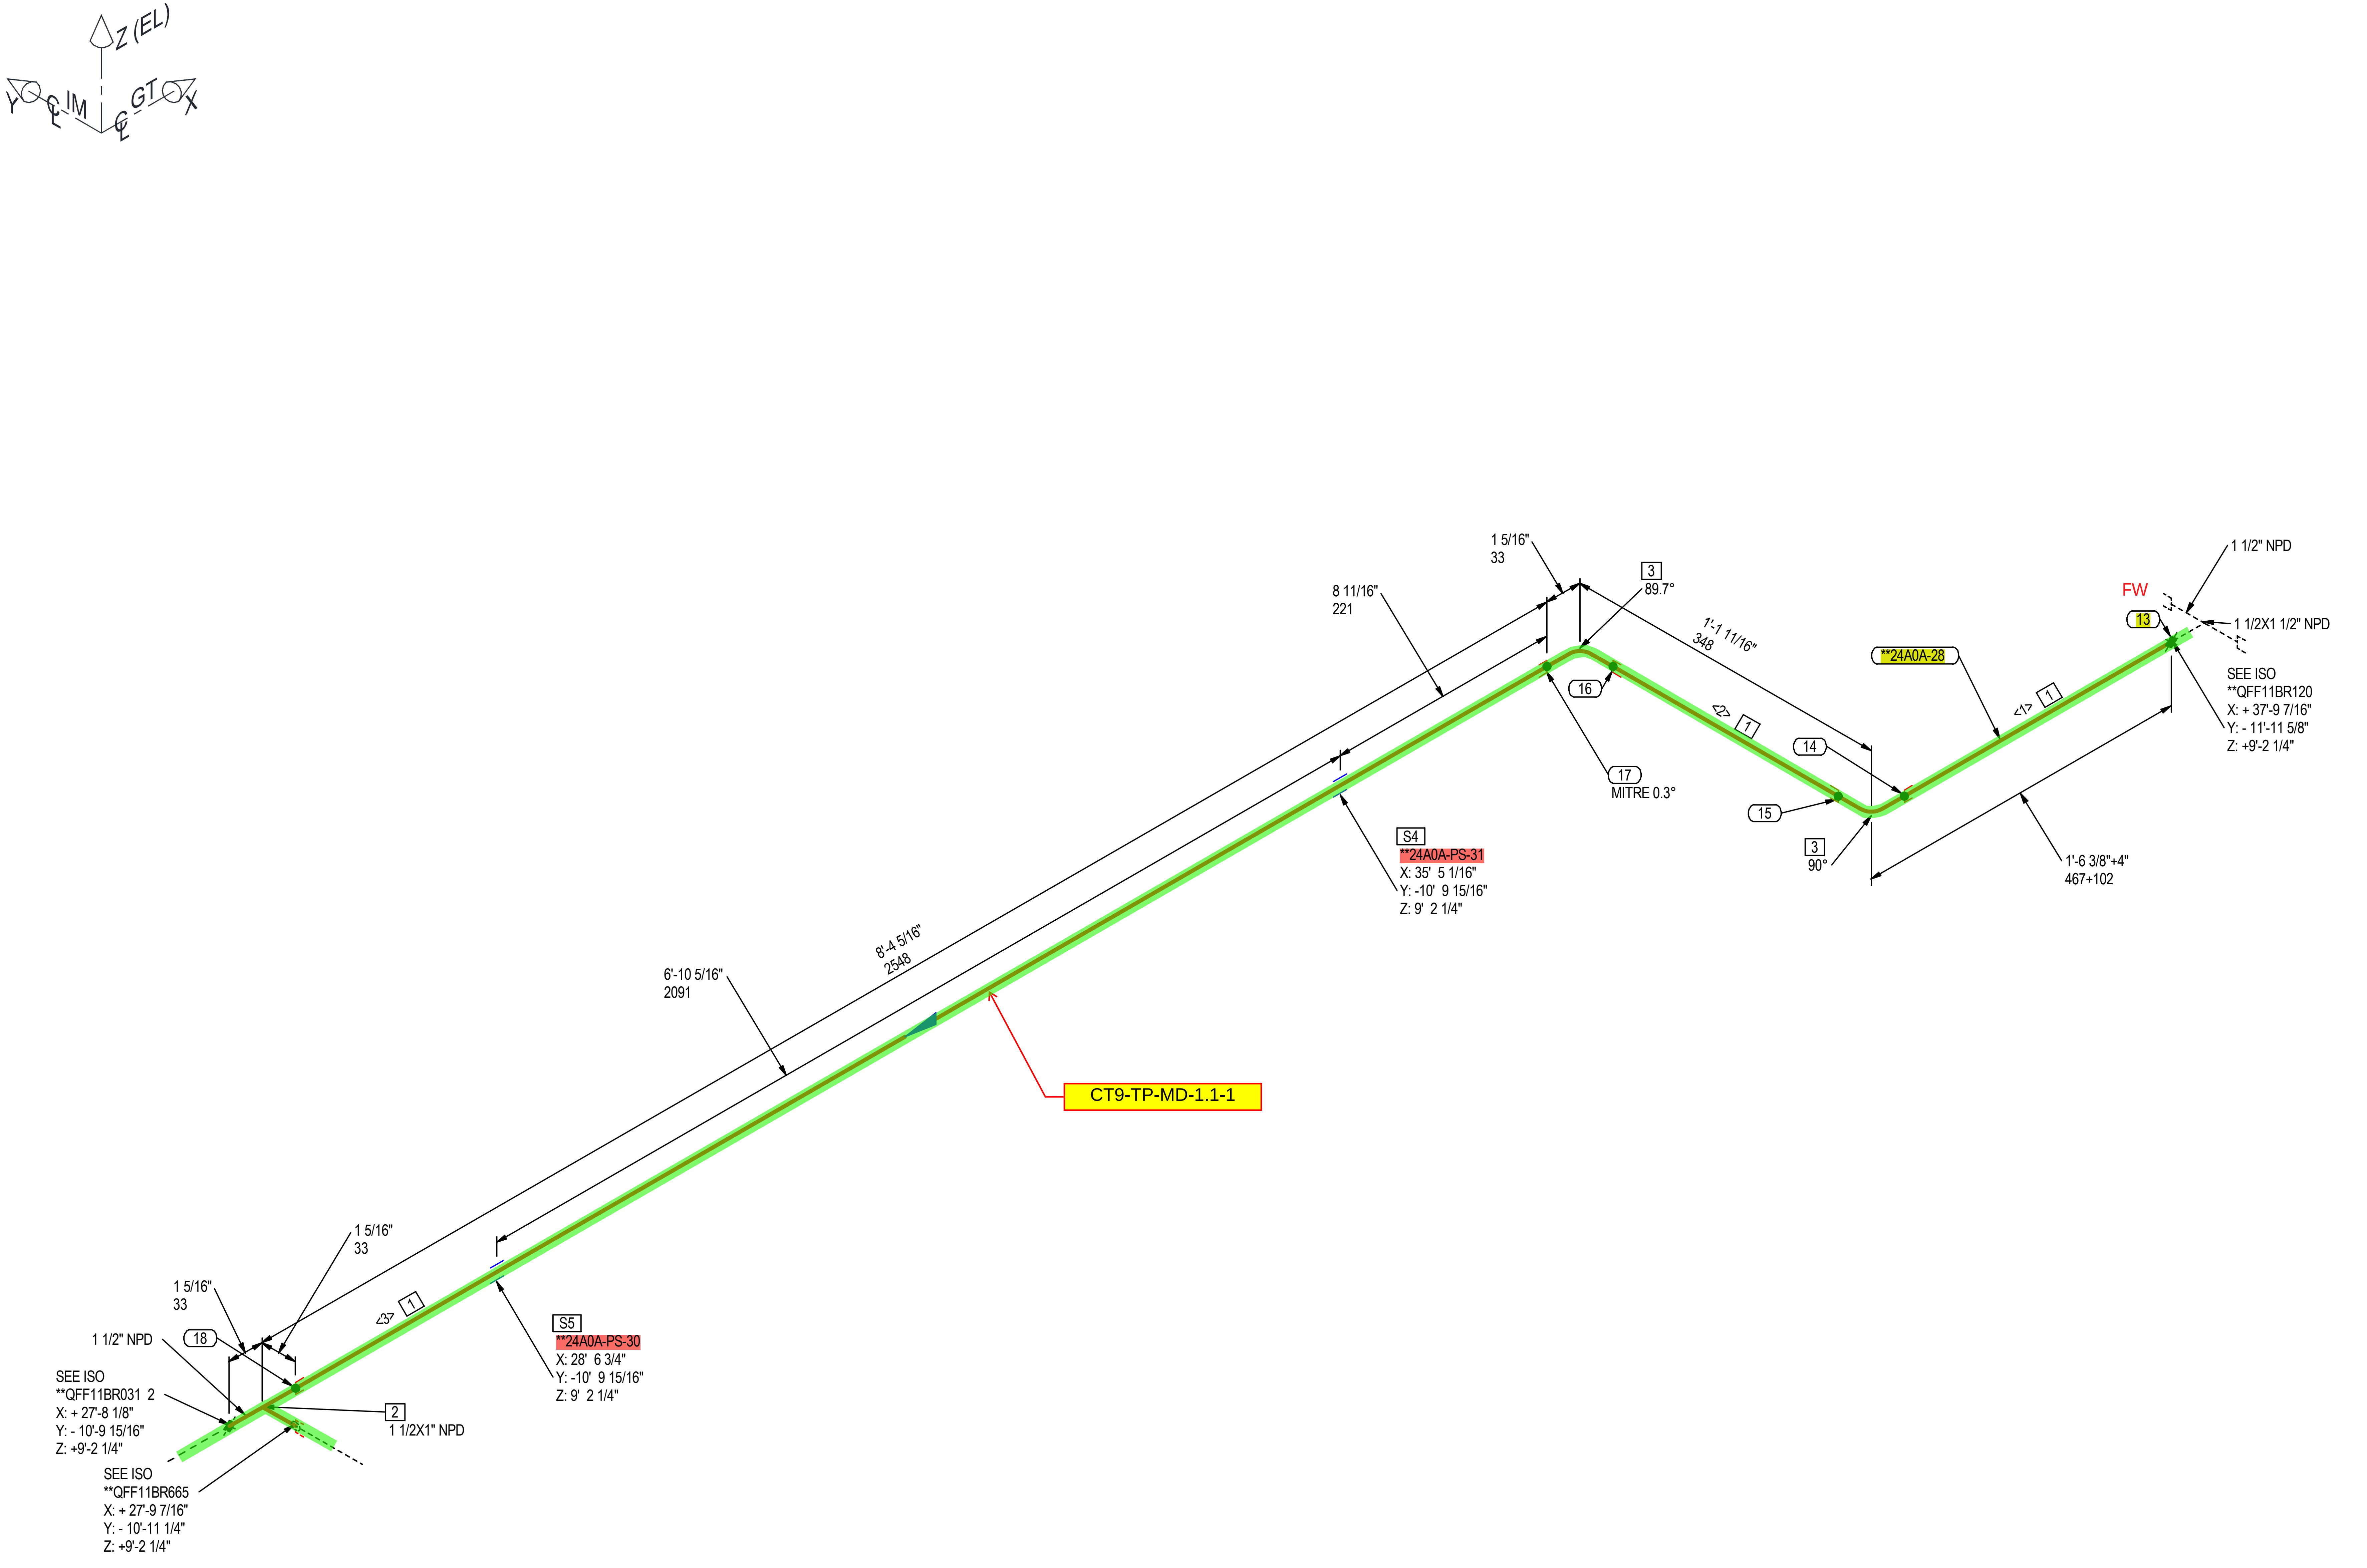

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	11.0'
2	REDUCING TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1	MMDRAWBVZZAAGALO	1
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
4	PIPE SUPPORT	1 1/2	**24A0A-PS-31	1
5	PIPE SUPPORT	1 1/2	**24A0A-PS-30	1
	SPOOLS			
	**24A0A-28			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	1'9 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	11 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	8'3"	1 1/2		MITRED	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✕ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✕ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
13	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
17	MW	S	1 1/2"	1
18	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR031		1 OF 4	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

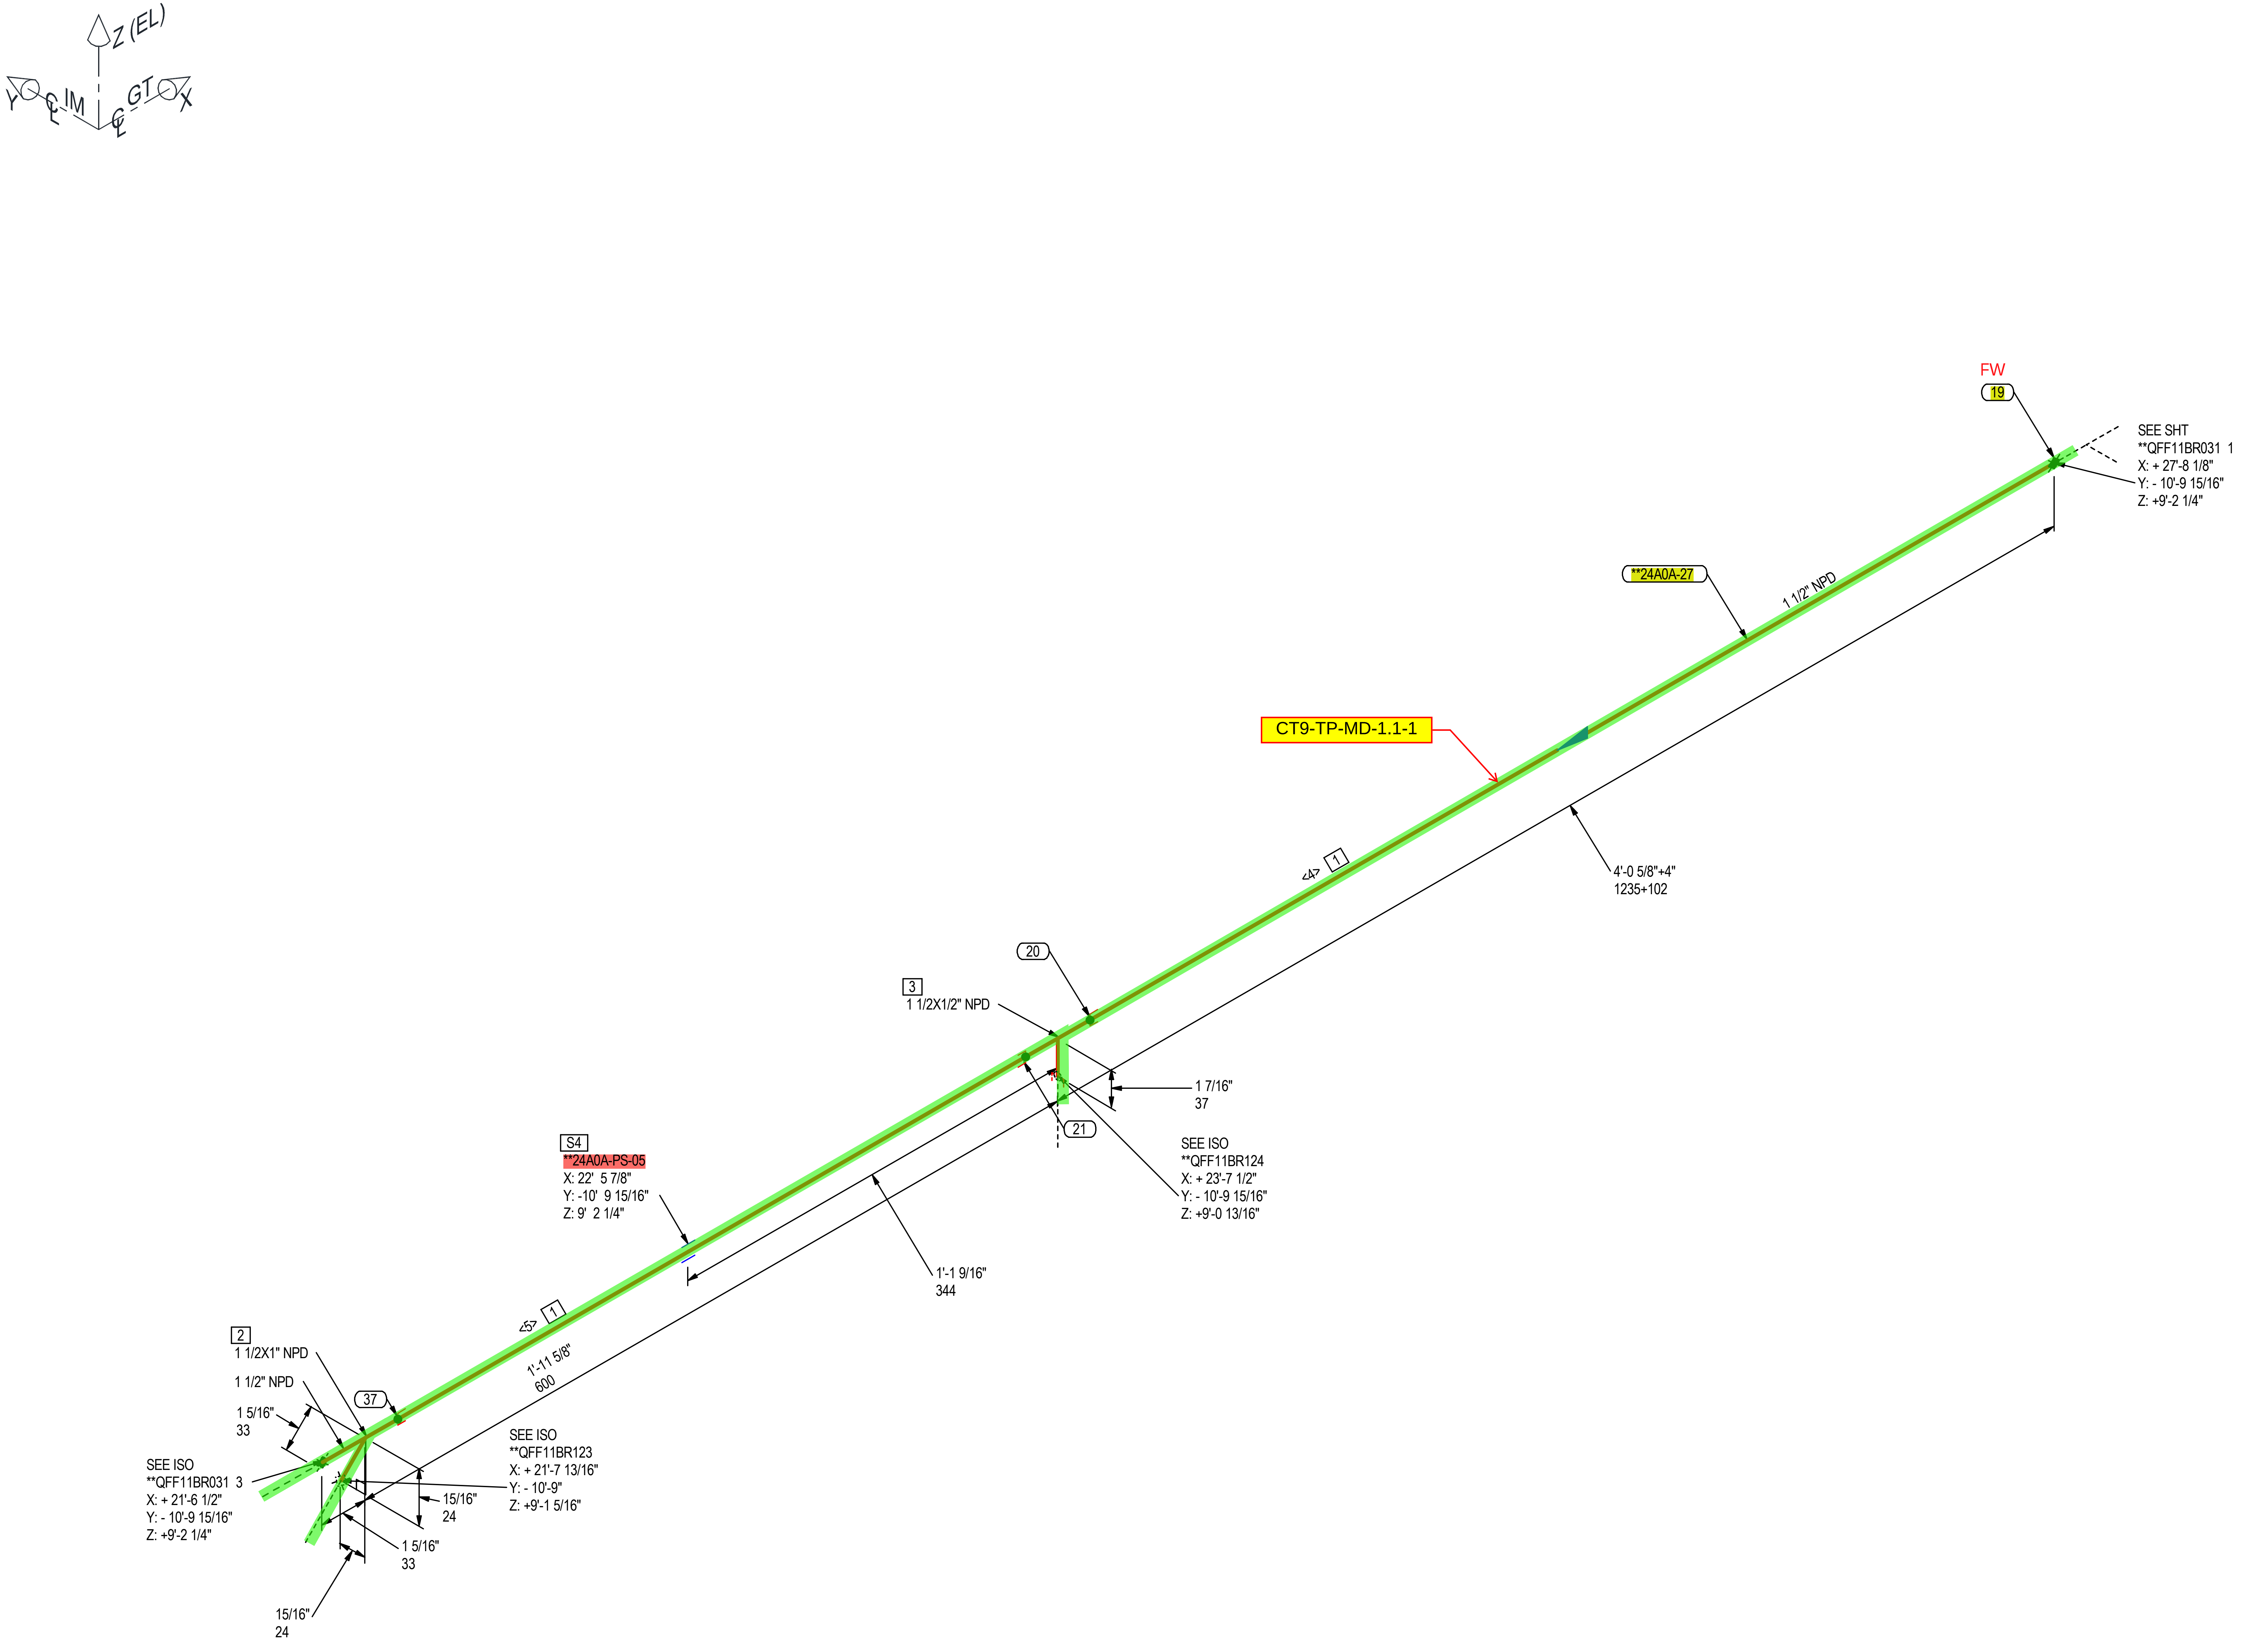

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	6.1'
2	REDUCING TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1	MMDRAWBVZZAAGALO	1
3	REDUCING TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1/2	MMDRAWBVZZAAGALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
4	PIPE SUPPORT	1 1/2	**24A0A-PS-05	1
	SPOOLS			
	**24A0A-27			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<4>	4'3 5/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	1'9"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX##-###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✖ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✖ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
19	SW	S	1 1/2"	1
20	SW	S	1 1/2"	1
21	SW	S	1 1/2"	1
37	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✖ FW - FIELD WELD
✖ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR031		2 OF 4	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

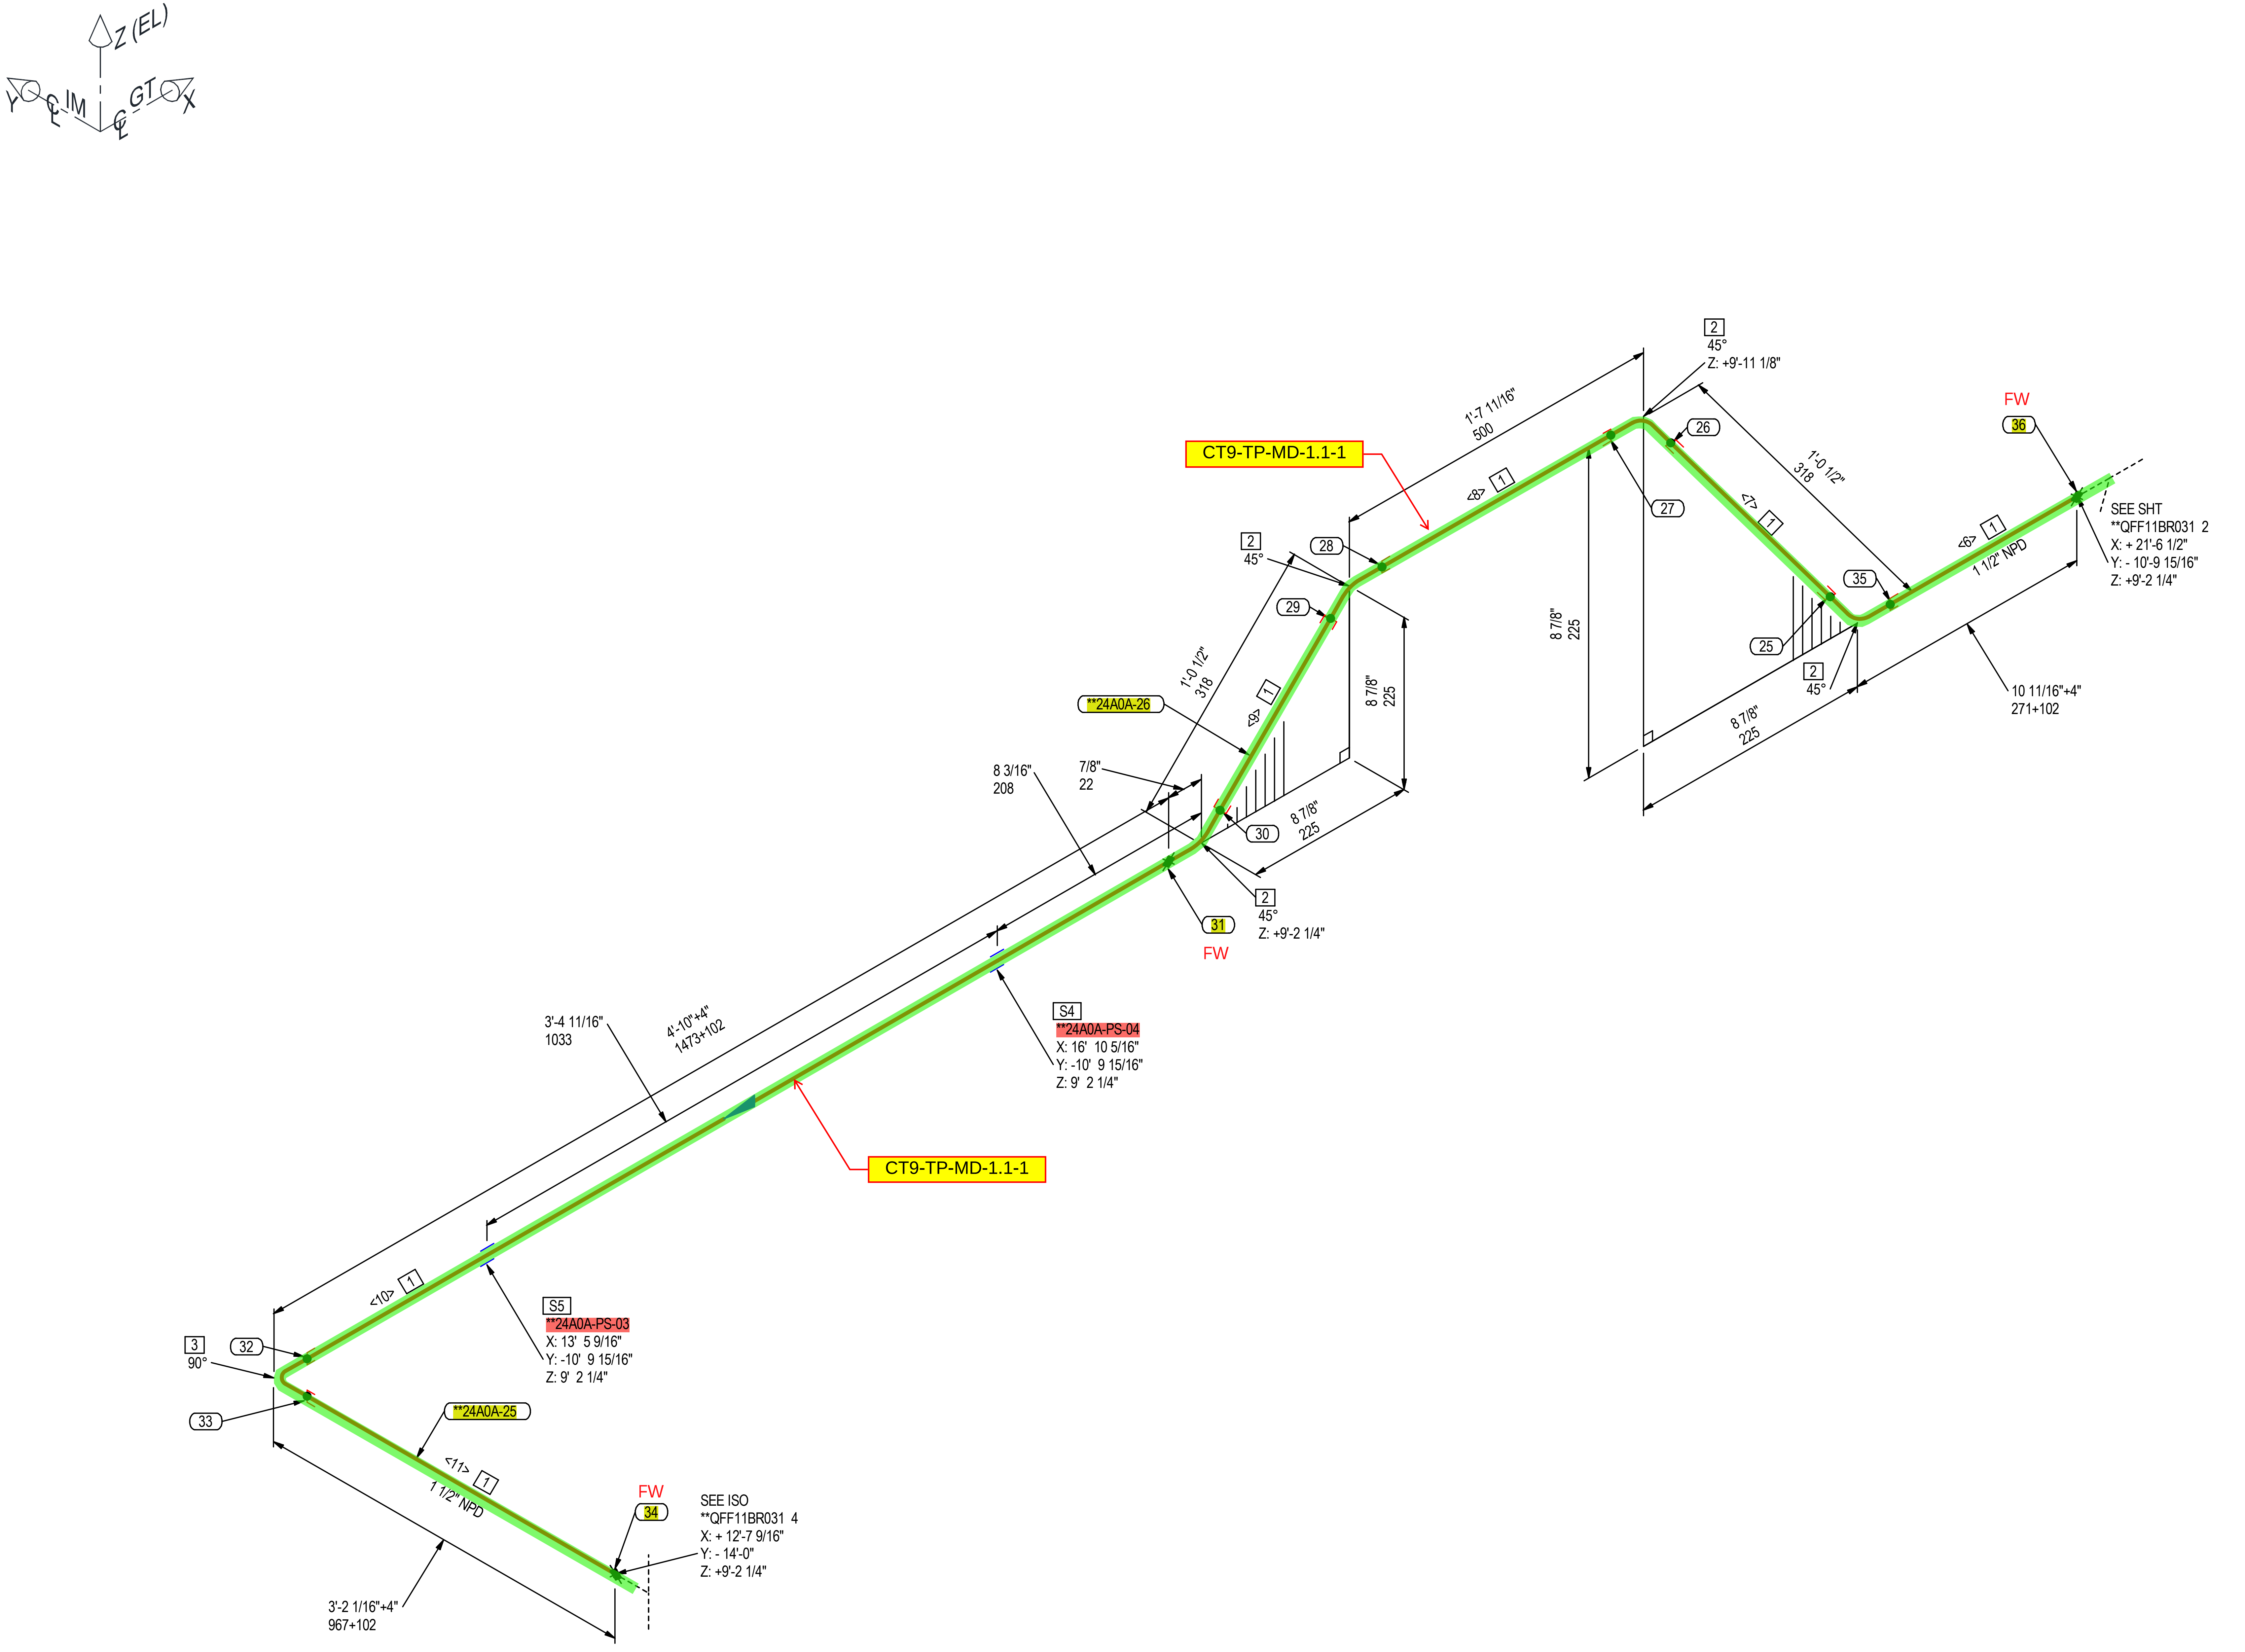
Z (EL)
Y ℄ IM
℄ GT X
CT9-TP-MD-1.1-1
1'-7 11/16"
500
2
45°
Z: +9'-11 1/8"
26
27
1'-0 1/2"
318
<8>
1
<7>
1
FW
36
SEE SHT
**QFF11BR031 2
X: + 21'-6 1/2"
Y: - 10'-9 15/16"
Z: +9'-2 1/4"
<6>
1
1 1/2" NPD
35
25
2
45°
8 7/8"
225
8 7/8"
225
10 11/16"+4"
271+102
2
45°
28
29
1'-0 1/2"
318
**24A0A-26
<9>
1
8 7/8"
225
8 7/8"
225
30
8 3/16"
208
7/8"
22
2
45°
Z: +9'-2 1/4"
31
FW
S4
**24A0A-PS-04
X: 16' 10 5/16"
Y: -10' 9 15/16"
Z: 9' 2 1/4"
3'-4 11/16"
1033
4'-10"+4"
1473+102
CT9-TP-MD-1.1-1
<10>
1
S5
**24A0A-PS-03
X: 13' 5 9/16"
Y: -10' 9 15/16"
Z: 9' 2 1/4"
3
90°
32
33
**24A0A-25
<11>
1
1 1/2" NPD
FW
34
SEE ISO
**QFF11BR031 4
X: + 12'-7 9/16"
Y: - 14'-0"
Z: +9'-2 1/4"
3'-2 1/16"+4"
967+102

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	13.0'
2	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMBWAWBVZZAAGALO	4
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
4	PIPE SUPPORT	1 1/2	**24A0A-PS-04	1
5	PIPE SUPPORT	1 1/2	**24A0A-PS-03	1
	SPOOLS			
	**24A0A-25, **24A0A-26			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<6>	1'1 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	10 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	1'5 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	10 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	5'0 11/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	3'4 3/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
36	SW	S	1 1/2"	1
35	SW	S	1 1/2"	1
25	SW	S	1 1/2"	1
26	SW	S	1 1/2"	1
27	SW	S	1 1/2"	1
28	SW	S	1 1/2"	1
29	SW	S	1 1/2"	1
30	SW	S	1 1/2"	1
31	SW	S	1 1/2"	1
32	SW	S	1 1/2"	1
33	SW	S	1 1/2"	1
34	SW	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR031		3 OF 4	

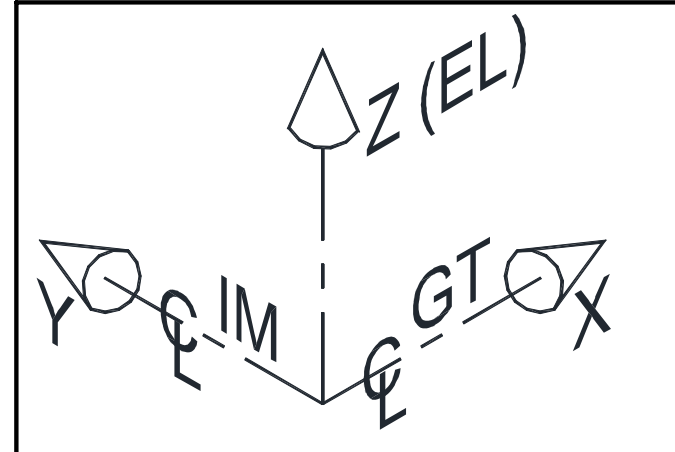

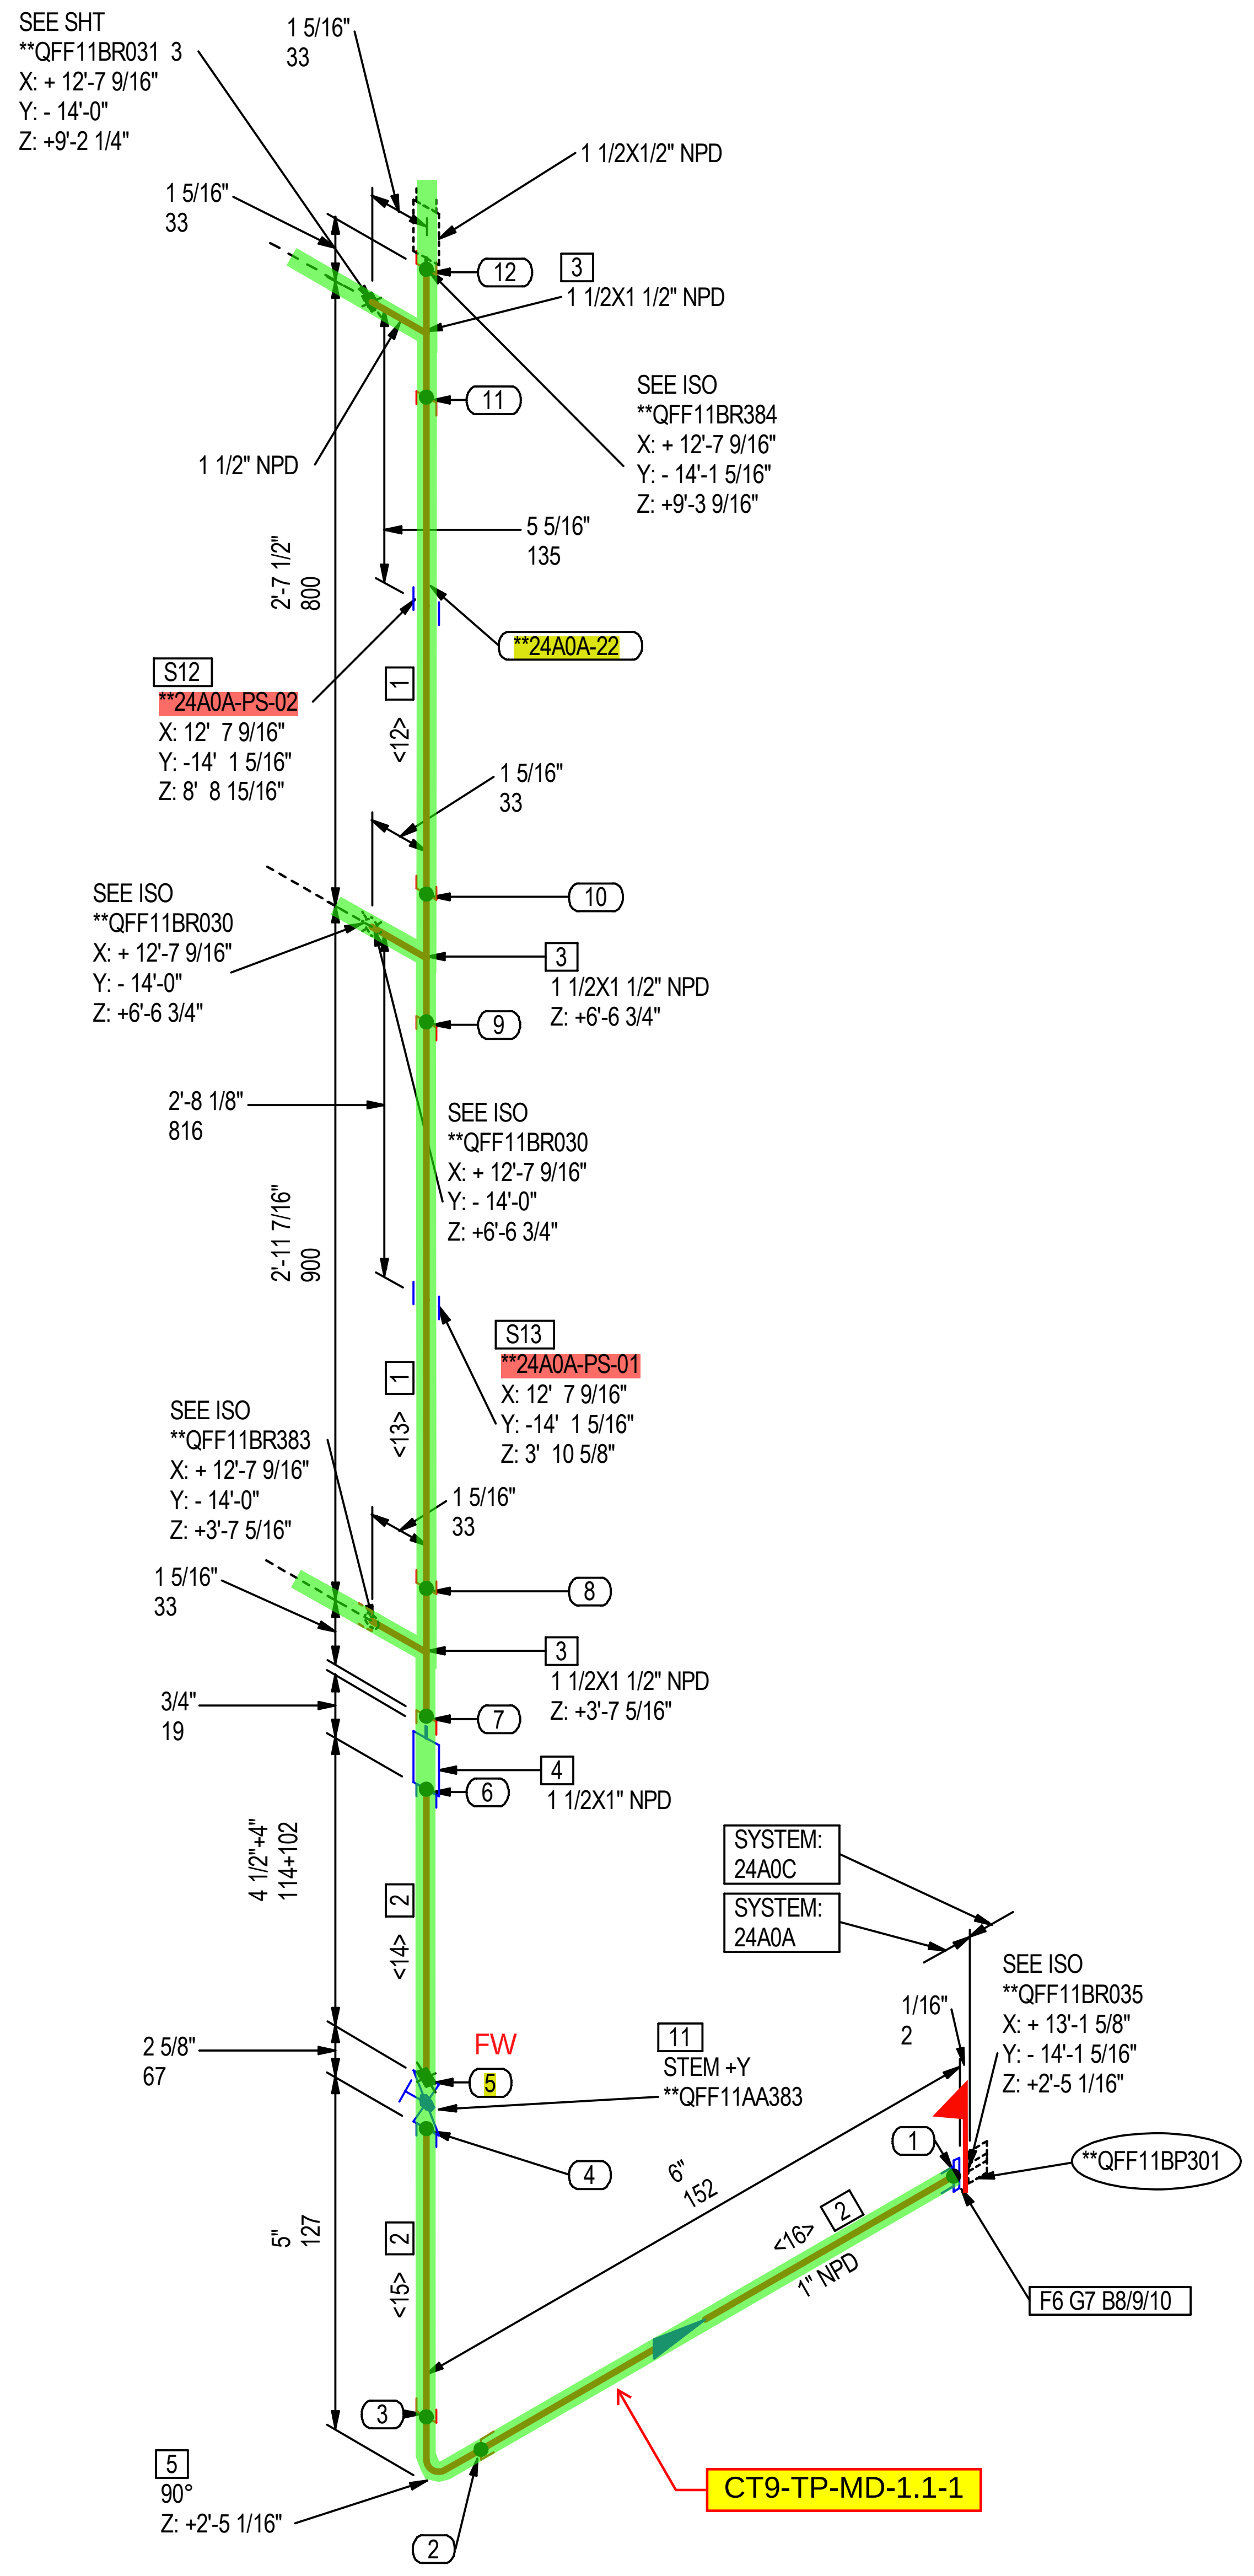
SEE SHT
**QFF11BR031 3
X: + 12'-7 9/16"
Y: - 14'-0"
Z: +9'-2 1/4"
1 5/16"
33
1 1/2X1/2" NPD
1 5/16"
33
12
3
1 1/2X1 1/2" NPD
11
SEE ISO
**QFF11BR384
X: + 12'-7 9/16"
Y: - 14'-1 5/16"
Z: +9'-3 9/16"
1 1/2" NPD
5 5/16"
135
2'-7 1/2"
800
**24A0A-22
S12
**24A0A-PS-02
X: 12' 7 9/16"
Y: -14' 1 5/16"
Z: 8' 8 15/16"
1
<12>
1 5/16"
33
SEE ISO
**QFF11BR030
X: + 12'-7 9/16"
Y: - 14'-0"
Z: +6'-6 3/4"
10
3
1 1/2X1 1/2" NPD
Z: +6'-6 3/4"
9
2'-8 1/8"
816
SEE ISO
**QFF11BR030
X: + 12'-7 9/16"
Y: - 14'-0"
Z: +6'-6 3/4"
2'-11 7/16"
900
S13
**24A0A-PS-01
X: 12' 7 9/16"
Y: -14' 1 5/16"
Z: 3' 10 5/8"
1
<13>
SEE ISO
**QFF11BR383
X: + 12'-7 9/16"
Y: - 14'-0"
Z: +3'-7 5/16"
1 5/16"
33
1 5/16"
33
8
3
1 1/2X1 1/2" NPD
Z: +3'-7 5/16"
3/4"
19
7
4
6
1 1/2X1" NPD
4 1/2"+4"
114+102
SYSTEM:
24A0C
SYSTEM:
24A0A
2
<14>
SEE ISO
**QFF11BR035
X: + 13'-1 5/8"
Y: - 14'-1 5/16"
Z: +2'-5 1/16"
1/16"
2
2 5/8"
67
FW
5
11
STEM +Y
**QFF11AA383
1
**QFF11BP301
4
6"
152
<16>
2
1" NPD
F6 G7 B8/9/10
5"
127
2
<15>
3
5
90°
Z: +2'-5 1/16"
2
CT9-TP-MD-1.1-1

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	5.2'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	1.5'
3	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	3
4	REDUCER INSERT, CL3000, SWE, MSS-SP-79, ASTM A182-F304, TYPE 2	1 1/2X1	MMBHAWBVZZADOALO	1
5	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMCKAWBVZZAAGALO	1
6	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
7	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1	MITAHAAAALBMNUS	1
8	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 4 in. Length	1/2	MBAZZACZZIAGBLJZ	4
9	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
10	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
11	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1	MVALAQBVZZAATALS	1
	PIPE SUPPORTS			
12	PIPE SUPPORT	1 1/2	**24A0A-PS-02	1
13	PIPE SUPPORT	1 1/2	**24A0A-PS-01	1
	SPOOLS			
	**24A0A-22			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<12>	2'4 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<13>	2'8 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<14>	8 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<15>	4 1/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<16>	4 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING

SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
12	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
8	SW	S	1 1/2"	1
7	SW	S	1 1/2"	1
6	SW	S	1"	1
5	SW	S	1"	1
4	SW	S	1"	1
3	SW	S	1"	1
2	SW	S	1"	1
1	SW	S	1"	1

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✕ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✕ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0** / **24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**	
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**	

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR031		4 OF 4	

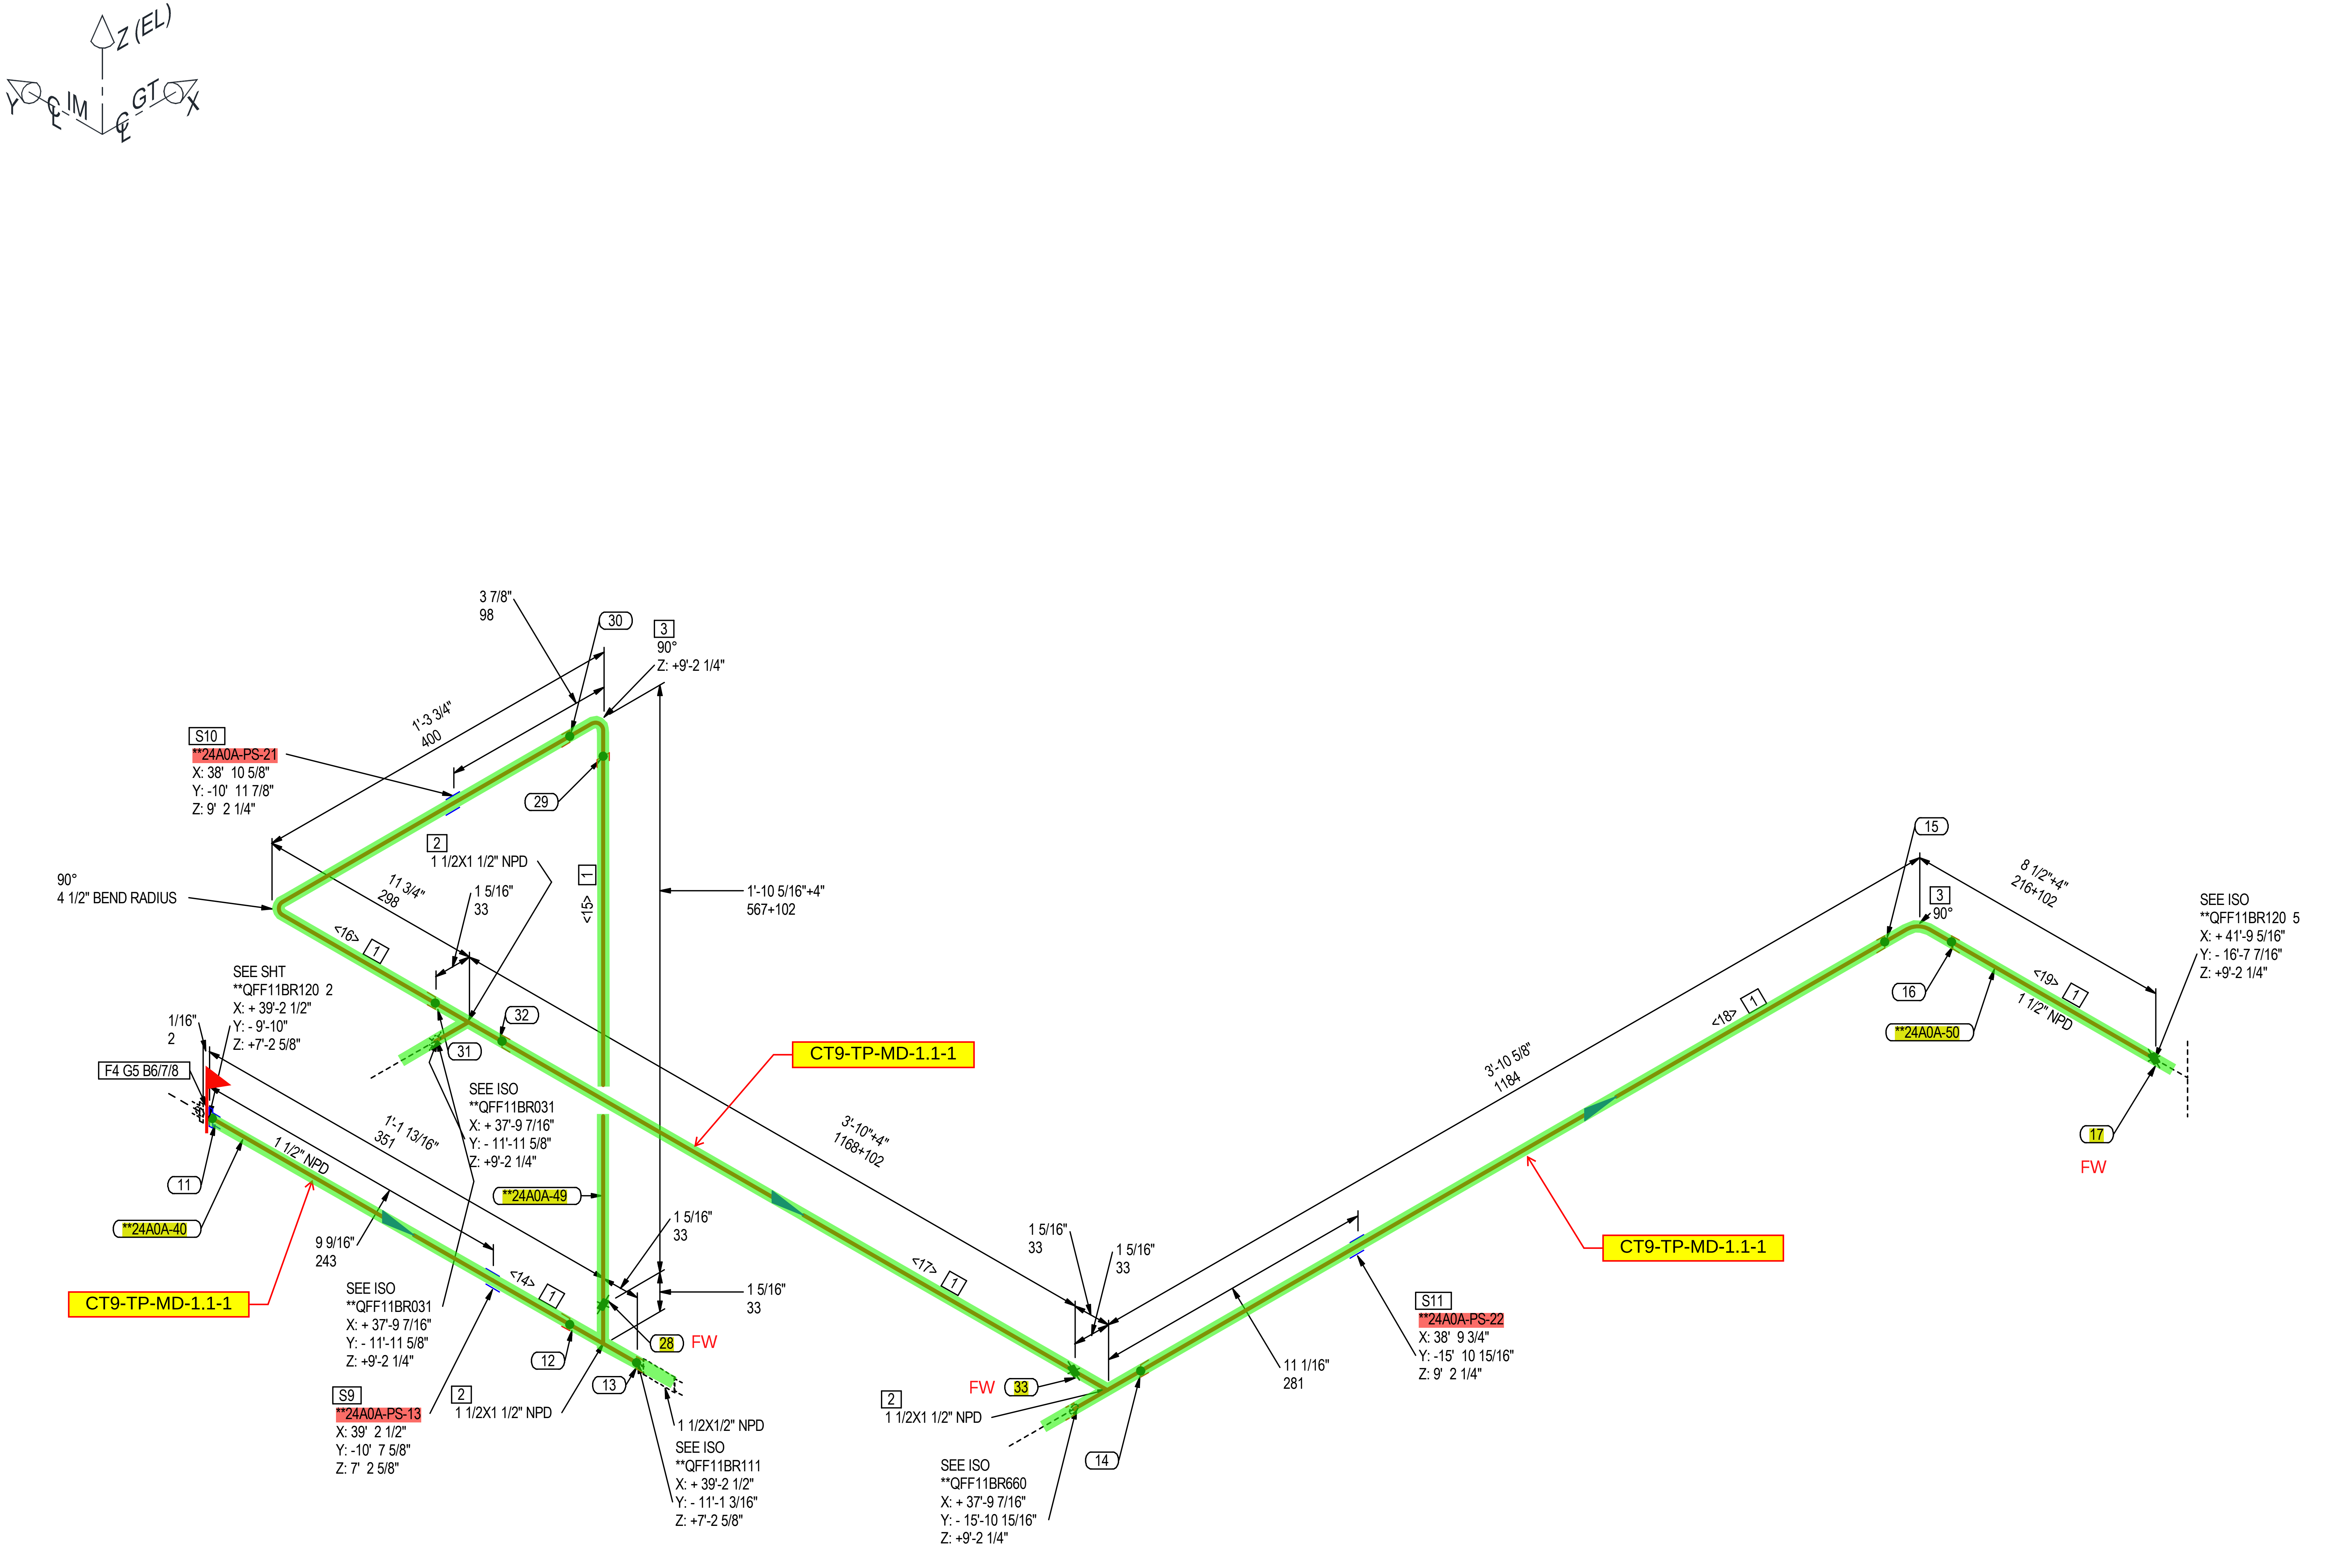
Z (EL)
Y
℄ IM
℄ GT
X
3 7/8"
98
30
3
90°
Z: +9'-2 1/4"
1'-3 3/4"
400
S10
**24A0A-PS-21
X: 38' 10 5/8"
Y: -10' 11 7/8"
Z: 9' 2 1/4"
29
2
1 1/2X1 1/2" NPD
1
<15>
1'-10 5/16"+4"
567+102
90°
4 1/2" BEND RADIUS
11 3/4"
298
1 5/16"
33
<16>
1
SEE SHT
**QFF11BR120 2
X: + 39'-2 1/2"
Y: - 9'-10"
Z: +7'-2 5/8"
32
31
1/16"
2
F4 G5 B6/7/8
SEE ISO
**QFF11BR031
X: + 37'-9 7/16"
Y: - 11'-11 5/8"
Z: +9'-2 1/4"
1'-1 13/16"
351
**24A0A-49
11
1 1/2" NPD
**24A0A-40
9 9/16"
243
CT9-TP-MD-1.1-1
SEE ISO
**QFF11BR031
X: + 37'-9 7/16"
Y: - 11'-11 5/8"
Z: +9'-2 1/4"
<14>
1
1 5/16"
33
1 5/16"
33
28
FW
12
13
S9
**24A0A-PS-13
X: 39' 2 1/2"
Y: -10' 7 5/8"
Z: 7' 2 5/8"
2
1 1/2X1 1/2" NPD
1 1/2X1/2" NPD
SEE ISO
**QFF11BR111
X: + 39'-2 1/2"
Y: - 11'-1 3/16"
Z: +7'-2 5/8"
CT9-TP-MD-1.1-1
3'-10"+4"
1168+102
<17>
1
1 5/16"
33
1 5/16"
33
FW
33
2
1 1/2X1 1/2" NPD
SEE ISO
**QFF11BR660
X: + 37'-9 7/16"
Y: - 15'-10 15/16"
Z: +9'-2 1/4"
14
11 1/16"
281
S11
**24A0A-PS-22
X: 38' 9 3/4"
Y: -15' 10 15/16"
Z: 9' 2 1/4"
3'-10 5/8"
1184
<18>
1
CT9-TP-MD-1.1-1
15
3
90°
8 1/2"+4"
216+102
16
**24A0A-50
<19>
1
1 1/2" NPD
SEE ISO
**QFF11BR120 5
X: + 41'-9 5/16"
Y: - 16'-7 7/16"
Z: +9'-2 1/4"
17
FW

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	13.7'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	3
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
8	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-13	1
10	PIPE SUPPORT	1 1/2	**24A0A-PS-21	1
11	PIPE SUPPORT	1 1/2	**24A0A-PS-22	1

SPOOLS

**24A0A-40, **24A0A-49, **24A0A-50

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<14>	1'0 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<15>	2'1"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<16>	1'10 15/16"	1 1/2	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<17>	4'0 11/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<18>	3'8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<19>	11 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
11	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
28	SW	S	1 1/2"	1
29	SW	S	1 1/2"	1
30	SW	S	1 1/2"	1
31	SW	S	1 1/2"	1
32	SW	S	1 1/2"	1
33	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
17	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1

ADDITIONAL NOTES:

WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR120	4 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

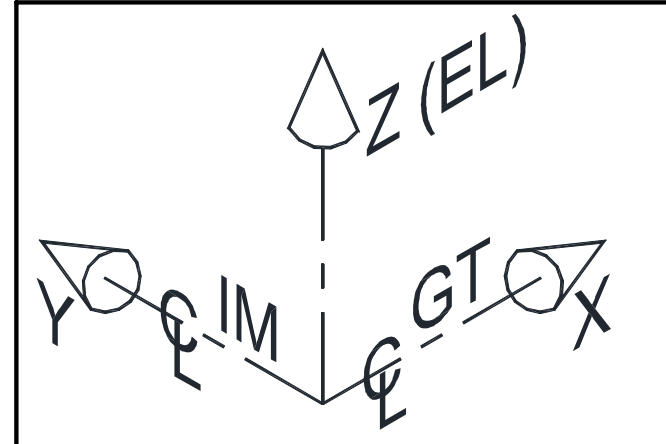

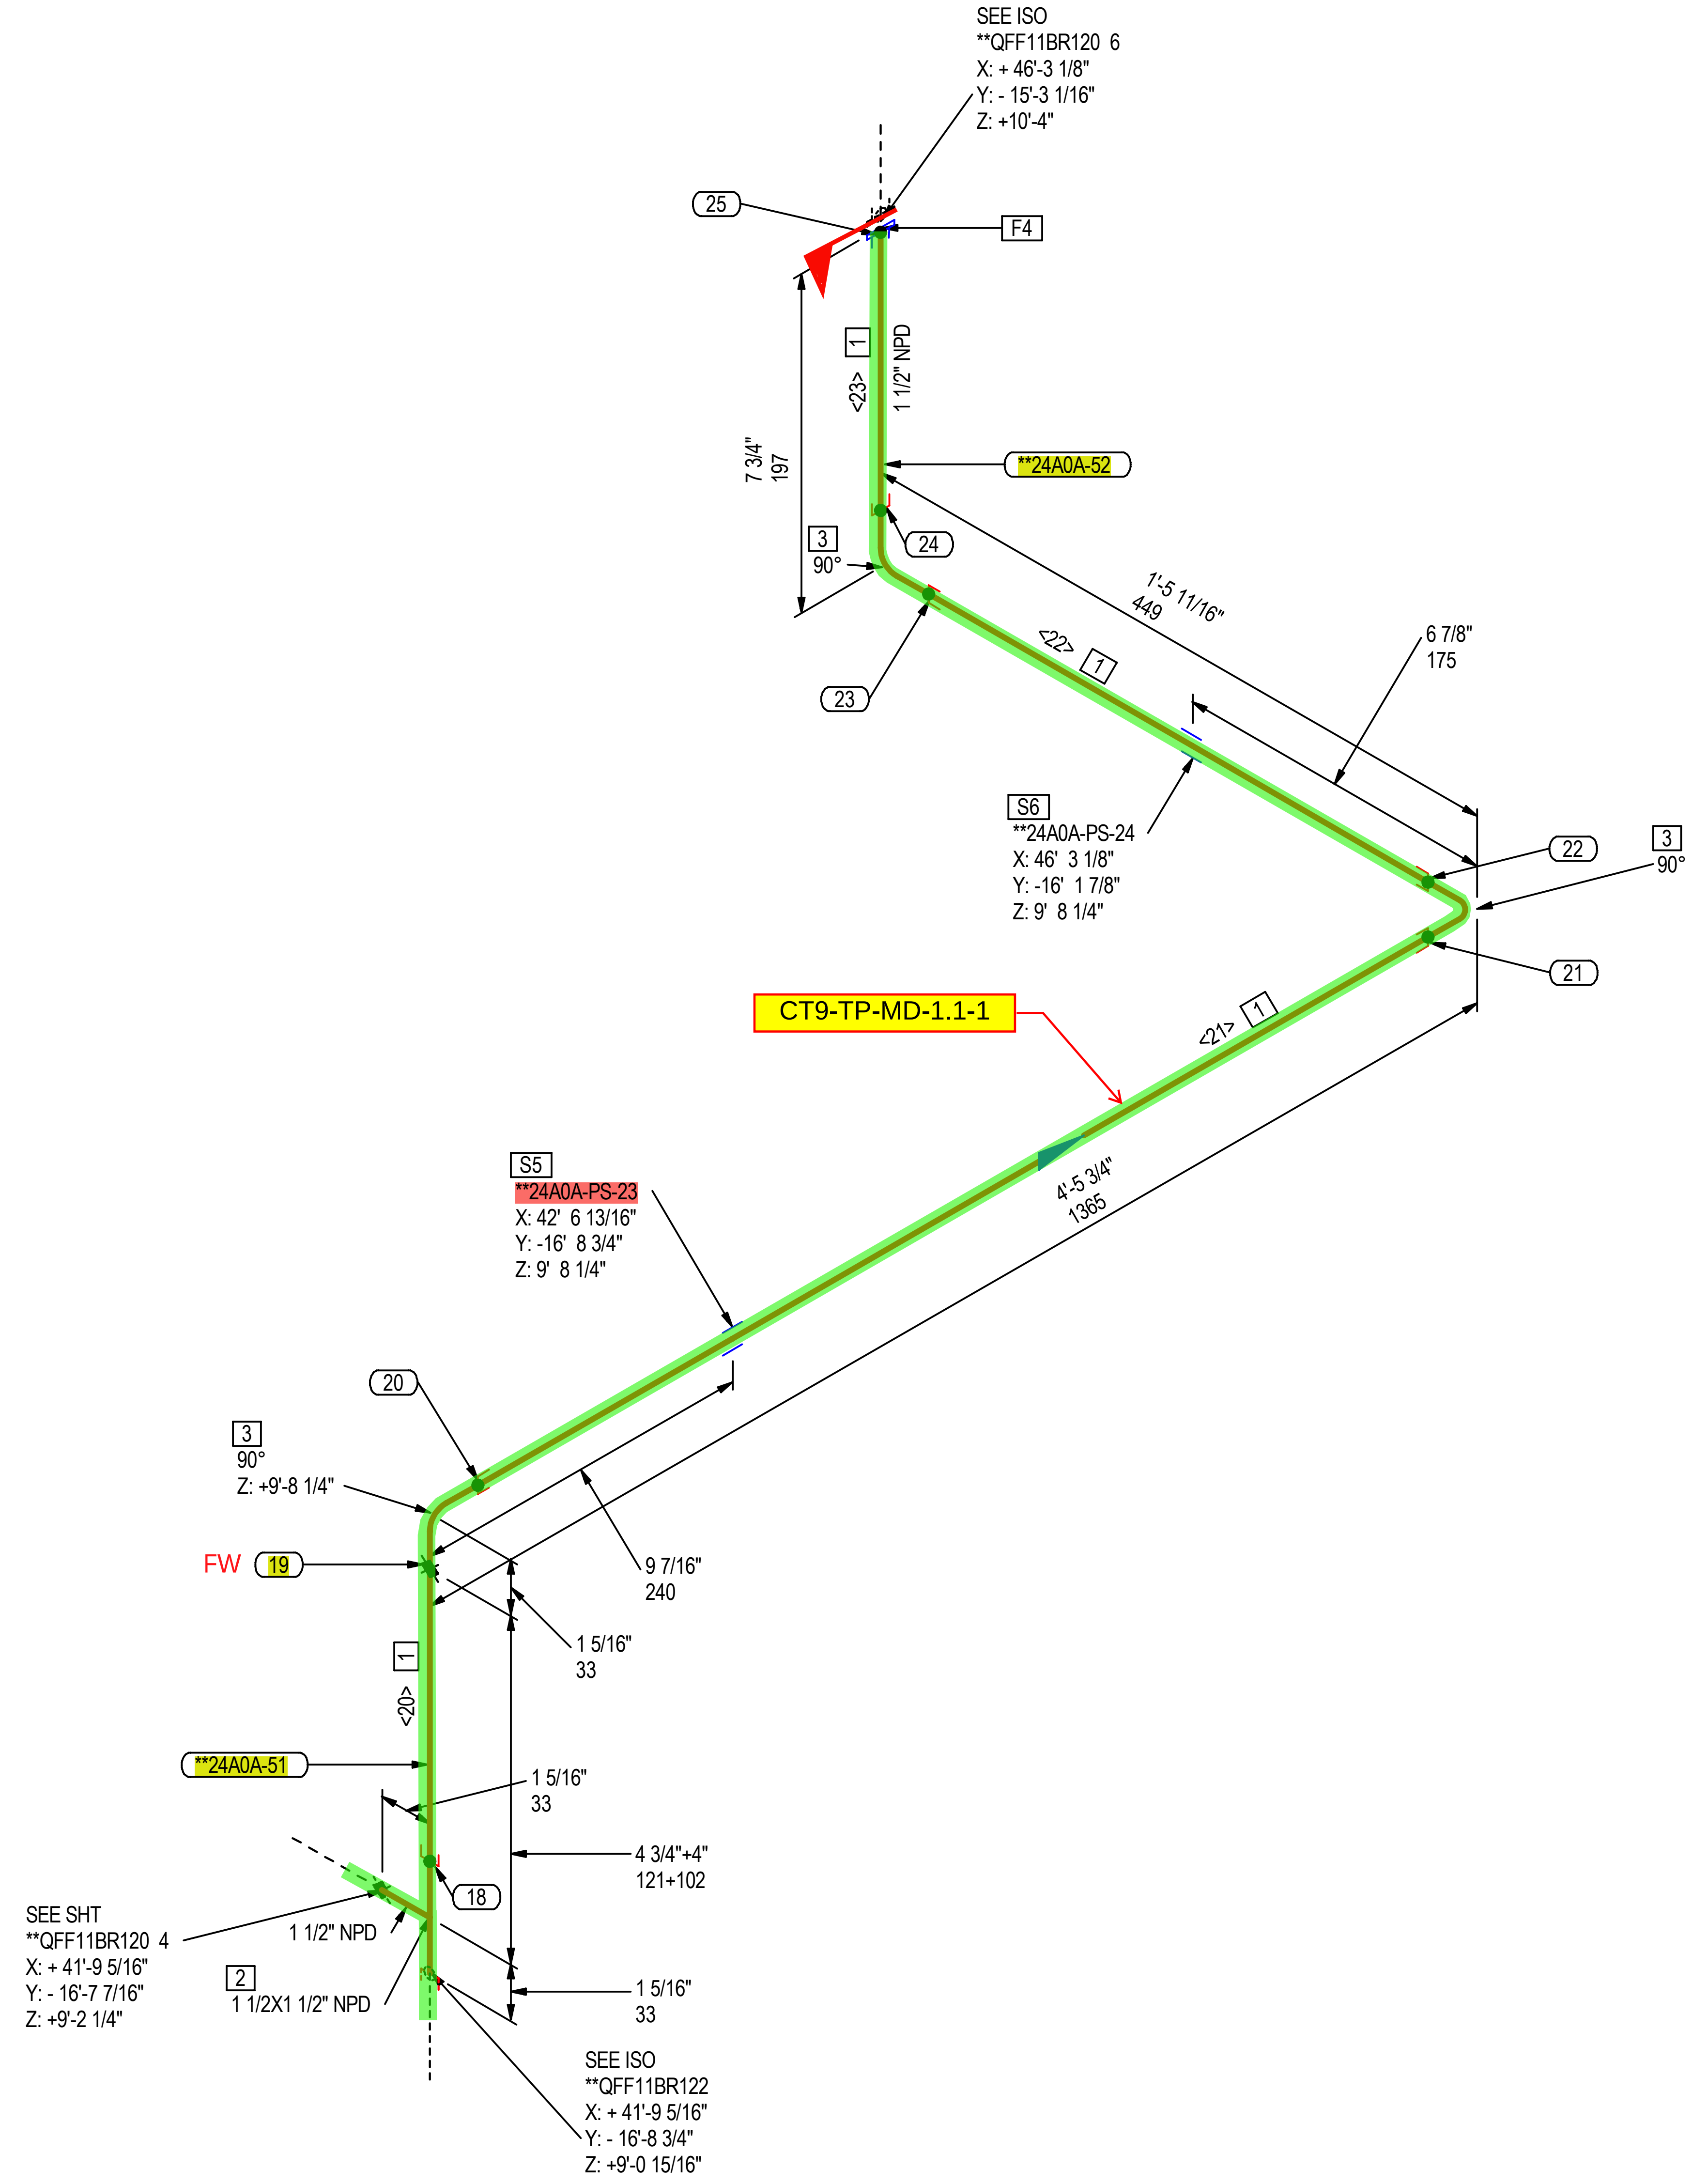
SEE ISO
**QFF11BR120 6
X: + 46'-3 1/8"
Y: - 15'-3 1/16"
Z: +10'-4"
25
F4
1
<23>
1 1/2" NPD
7 3/4"
197
**24A0A-52
3
90°
24
1'-5 11/16"
449
23
<22>
1
6 7/8"
175
S6
**24A0A-PS-24
X: 46' 3 1/8"
Y: -16' 1 7/8"
Z: 9' 8 1/4"
22
3
90°
21
CT9-TP-MD-1.1-1
<21>
1
4'-5 3/4"
1365
S5
**24A0A-PS-23
X: 42' 6 13/16"
Y: -16' 8 3/4"
Z: 9' 8 1/4"
20
3
90°
Z: +9'-8 1/4"
FW
19
9 7/16"
240
1 5/16"
33
1
<20>
**24A0A-51
1 5/16"
33
4 3/4"+4"
121+102
18
SEE SHT
**QFF11BR120 4
X: + 41'-9 5/16"
Y: - 16'-7 7/16"
Z: +9'-2 1/4"
1 1/2" NPD
2
1 1/2X1 1/2" NPD
1 5/16"
33
SEE ISO
**QFF11BR122
X: + 41'-9 5/16"
Y: - 16'-8 3/4"
Z: +9'-0 15/16"

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	6.7'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	1
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
5	PIPE SUPPORT	1 1/2	**24A0A-PS-23	1
6	PIPE SUPPORT	1 1/2	**24A0A-PS-24	1

SPOOLS

**24A0A-51, **24A0A-52

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<20>	7 7/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<21>	4'3 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<22>	1'3 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<23>	6 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:

WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
18	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
20	SW	S	1 1/2"	1
21	SW	S	1 1/2"	1
22	SW	S	1 1/2"	1
23	SW	S	1 1/2"	1
24	SW	S	1 1/2"	1
25	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0** / **24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**	
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**	

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR120		5 OF 6	

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

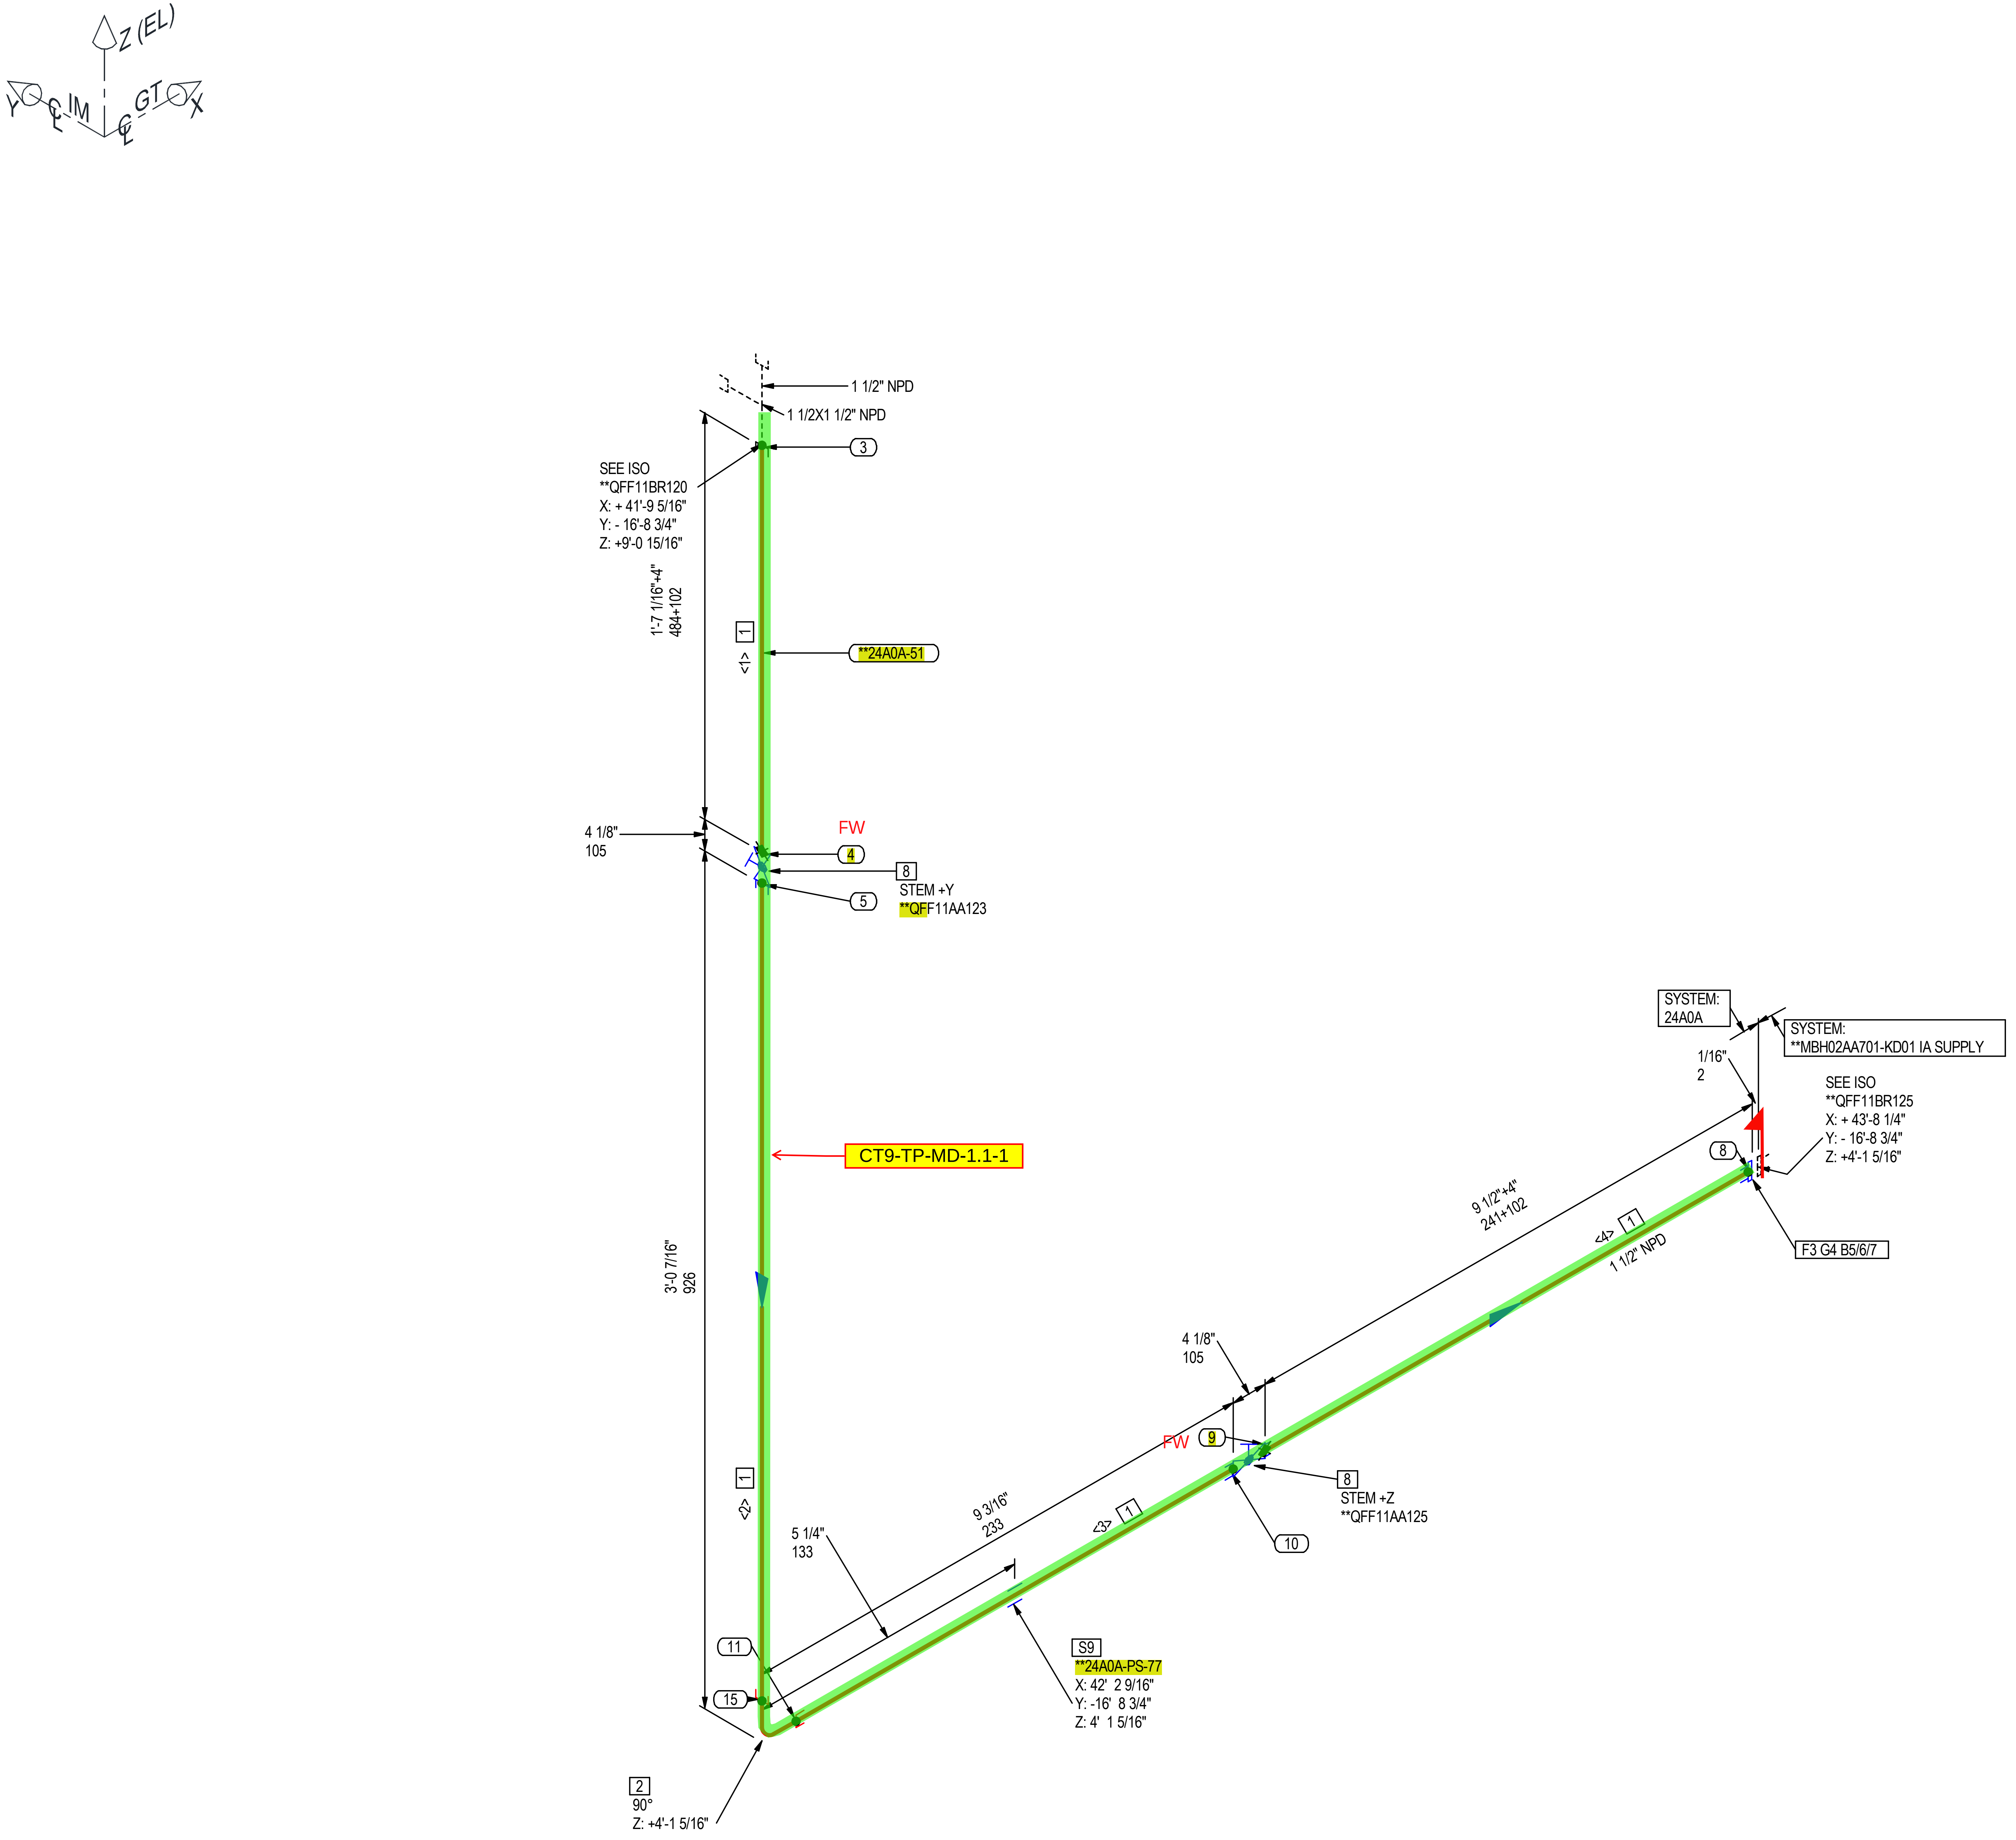

ADDITIONAL NOTES:

WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	6.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	1
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-77	1

SPOOLS

**24A0A-51

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	1'11 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	2'11 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	7 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	1'1 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX##-###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
3	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1
5	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
8	SW	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
☐ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:
PREPARED BY:	D. DURAPAU	10/22/2025
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025
APPROVED BY:	U. KASINATHAN	10/31/2025

MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
N05-003580	**0**	**24A0A**

INSTRUMENT AIR PIPING
INTERNAL TO GT PACKAGE
FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR122		1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

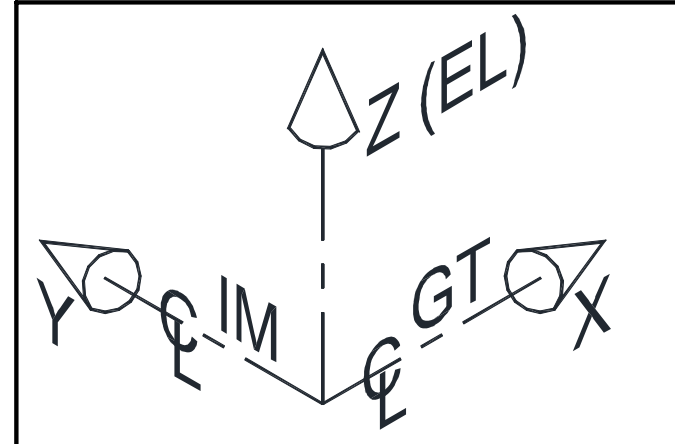

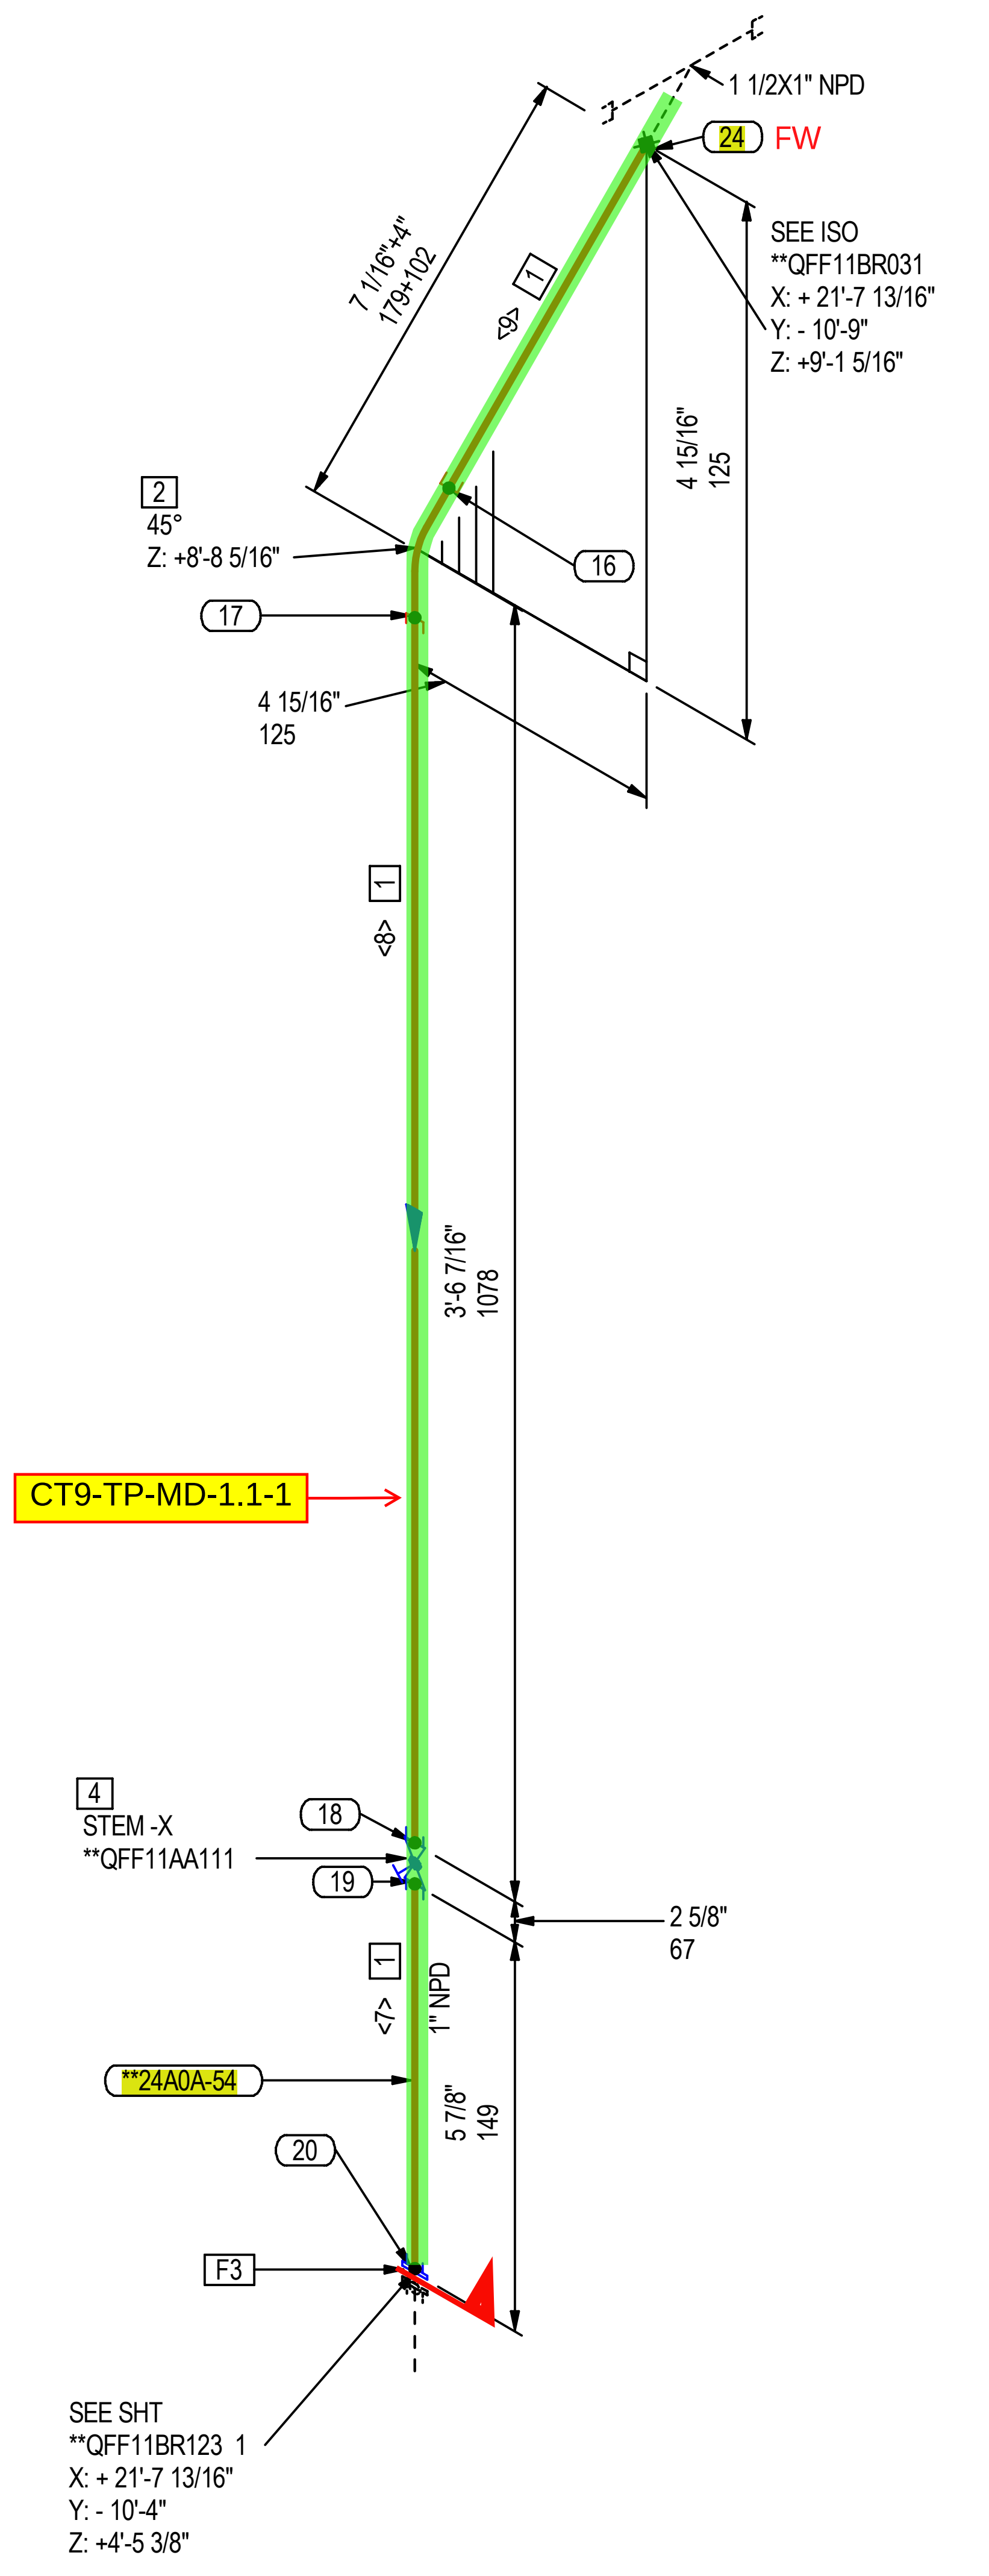

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	4.9'
2	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMBWAWBVZZAAGALO	1
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1	MVALAQBVZZAATALS	1

SPOOLS

**24A0A-54

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<7>	5 11/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	3'5 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	10 7/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING

SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
20	SW	S	1"	1
19	SW	S	1"	1
18	SW	S	1"	1
17	SW	S	1"	1
16	SW	S	1"	1
24	SW	S	1"	1

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR123		3 OF 3	

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

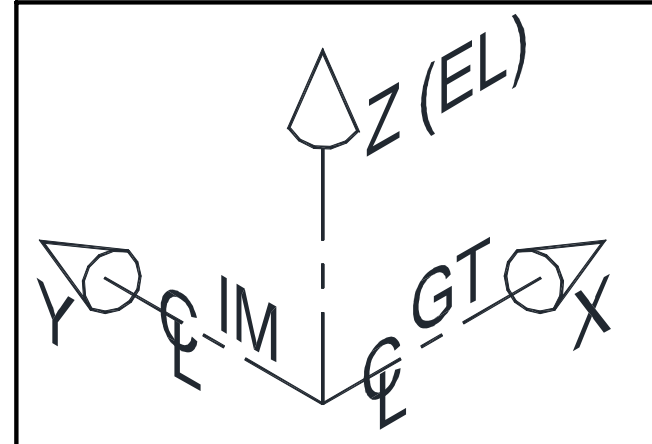

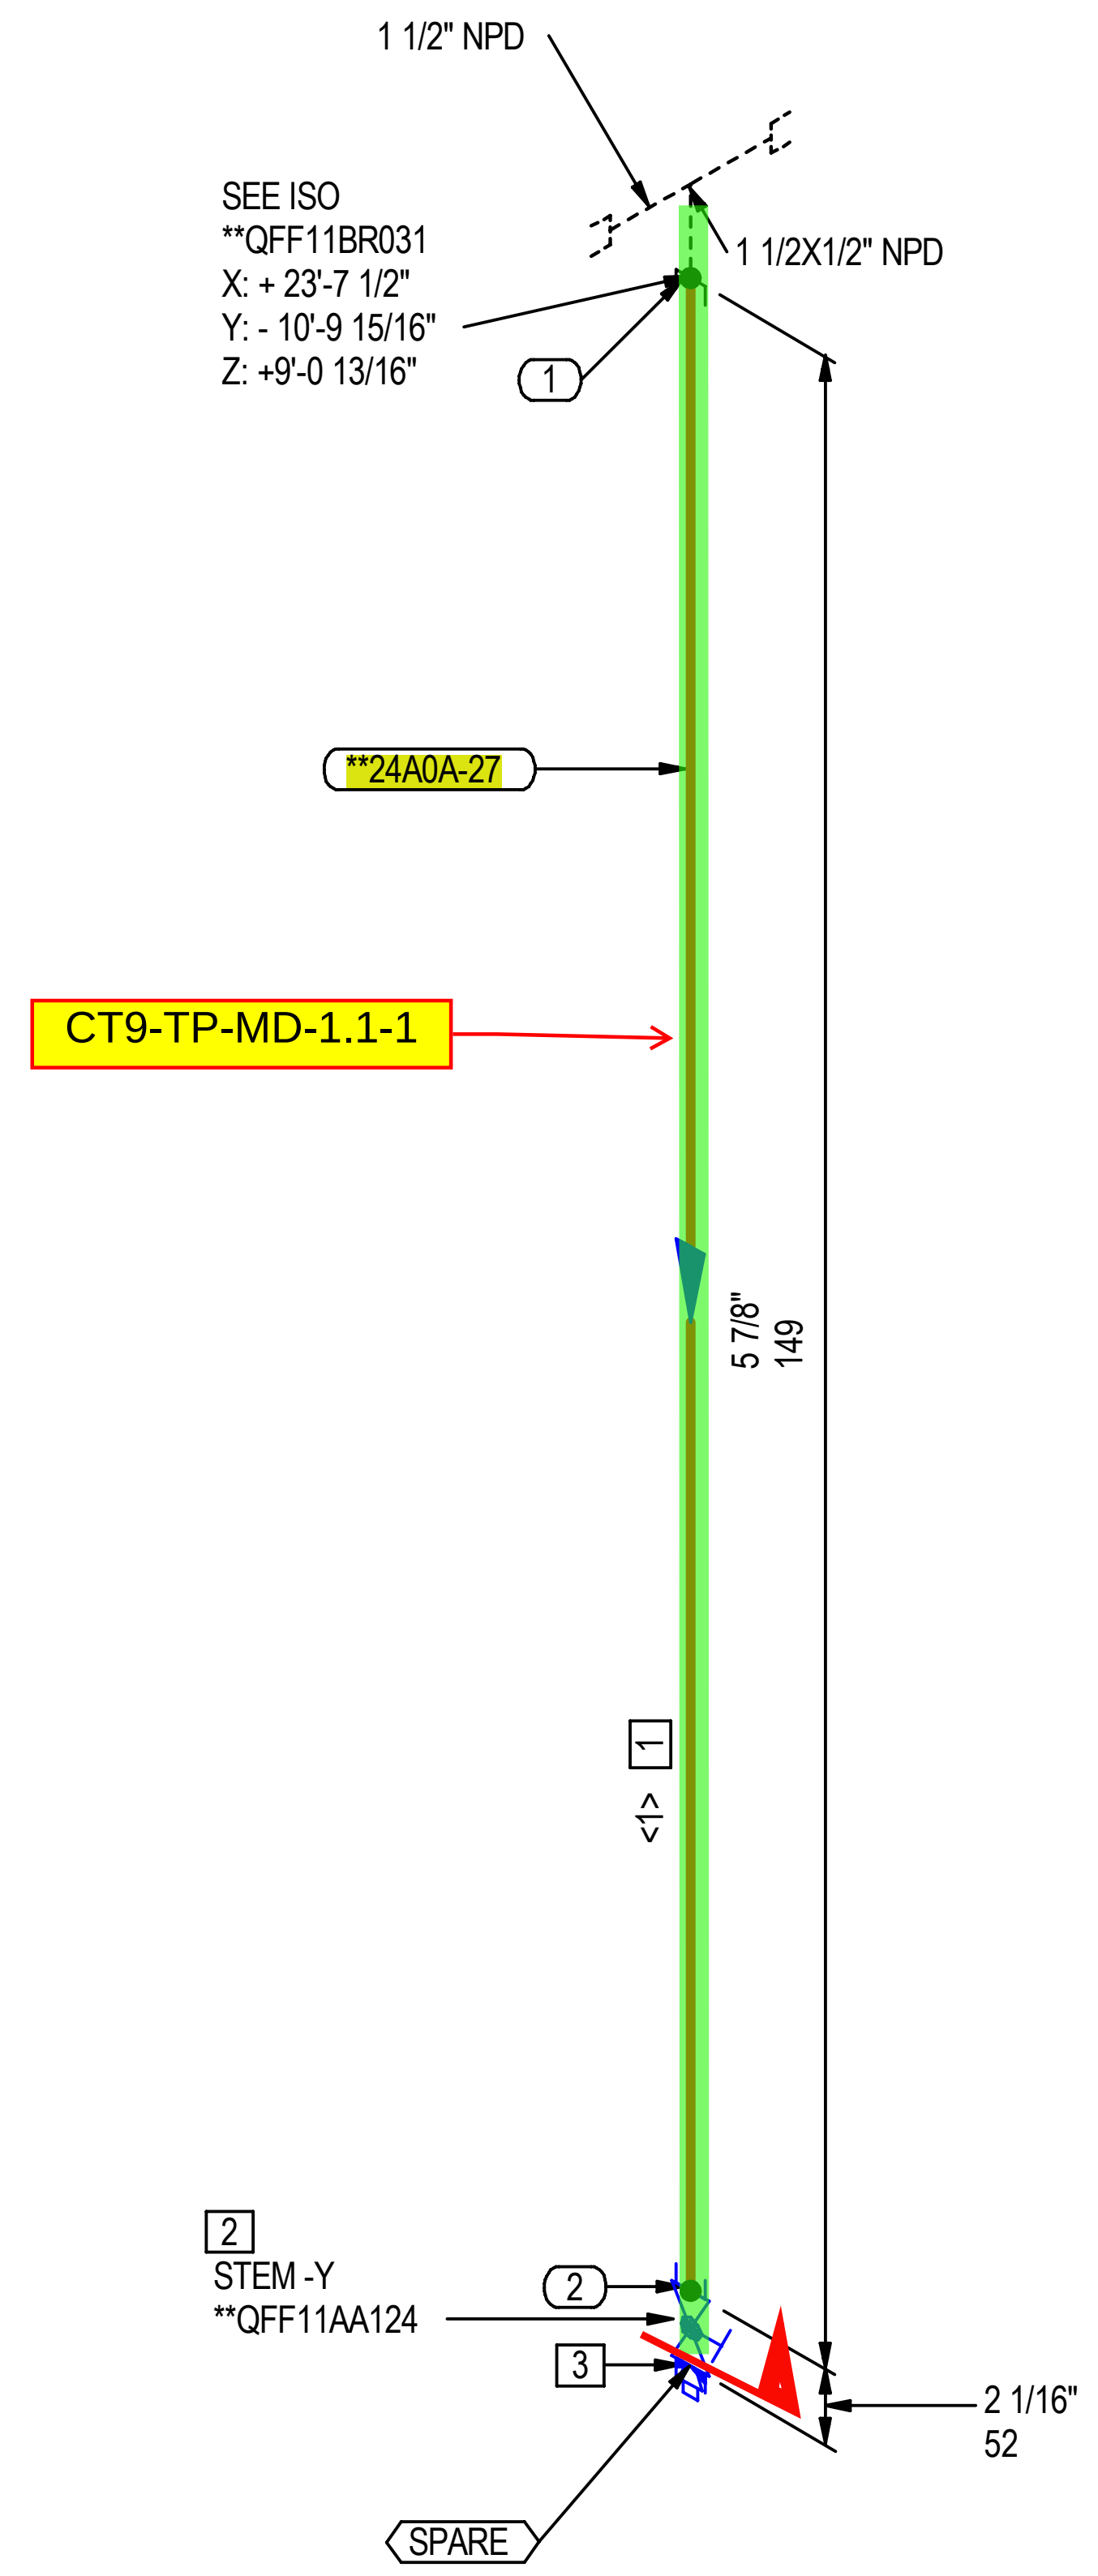

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1/2	MPAAZZBPZZABBANI	0.5'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
2	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1/2	MVALAQDHZZAATALS	1

SHOP LOOSE SHIPPED MATERIALS - ERECTION AND FABRICATION

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	PLUG, CL3000, MTE, ASME B16.11, ASTM A182-F304, HEX HEAD	1/2	MMFIAWBNZZAAGALO	1

SPOOLS

**24A0A-27

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	5 7/8"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX##-###〉 INDICATES PIPING TERMINAL POINT.

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING

SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1/2"	1
2	SW	S	1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
○ WELD NUMBER
☐ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	
PREPARED BY:	D. DURAPAU	10/22/2025	
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	
APPROVED BY:	U. KASINATHAN	10/31/2025	

MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
N05-003580	**0**	**24A0A**

INSTRUMENT AIR PIPING
INTERNAL TO GT PACKAGE
FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR124		1 OF 1	

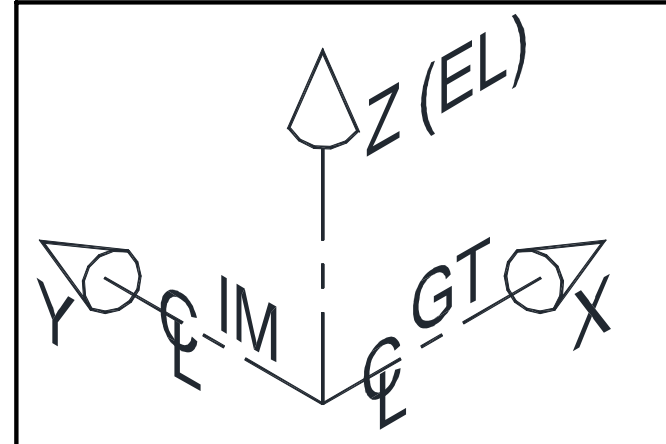

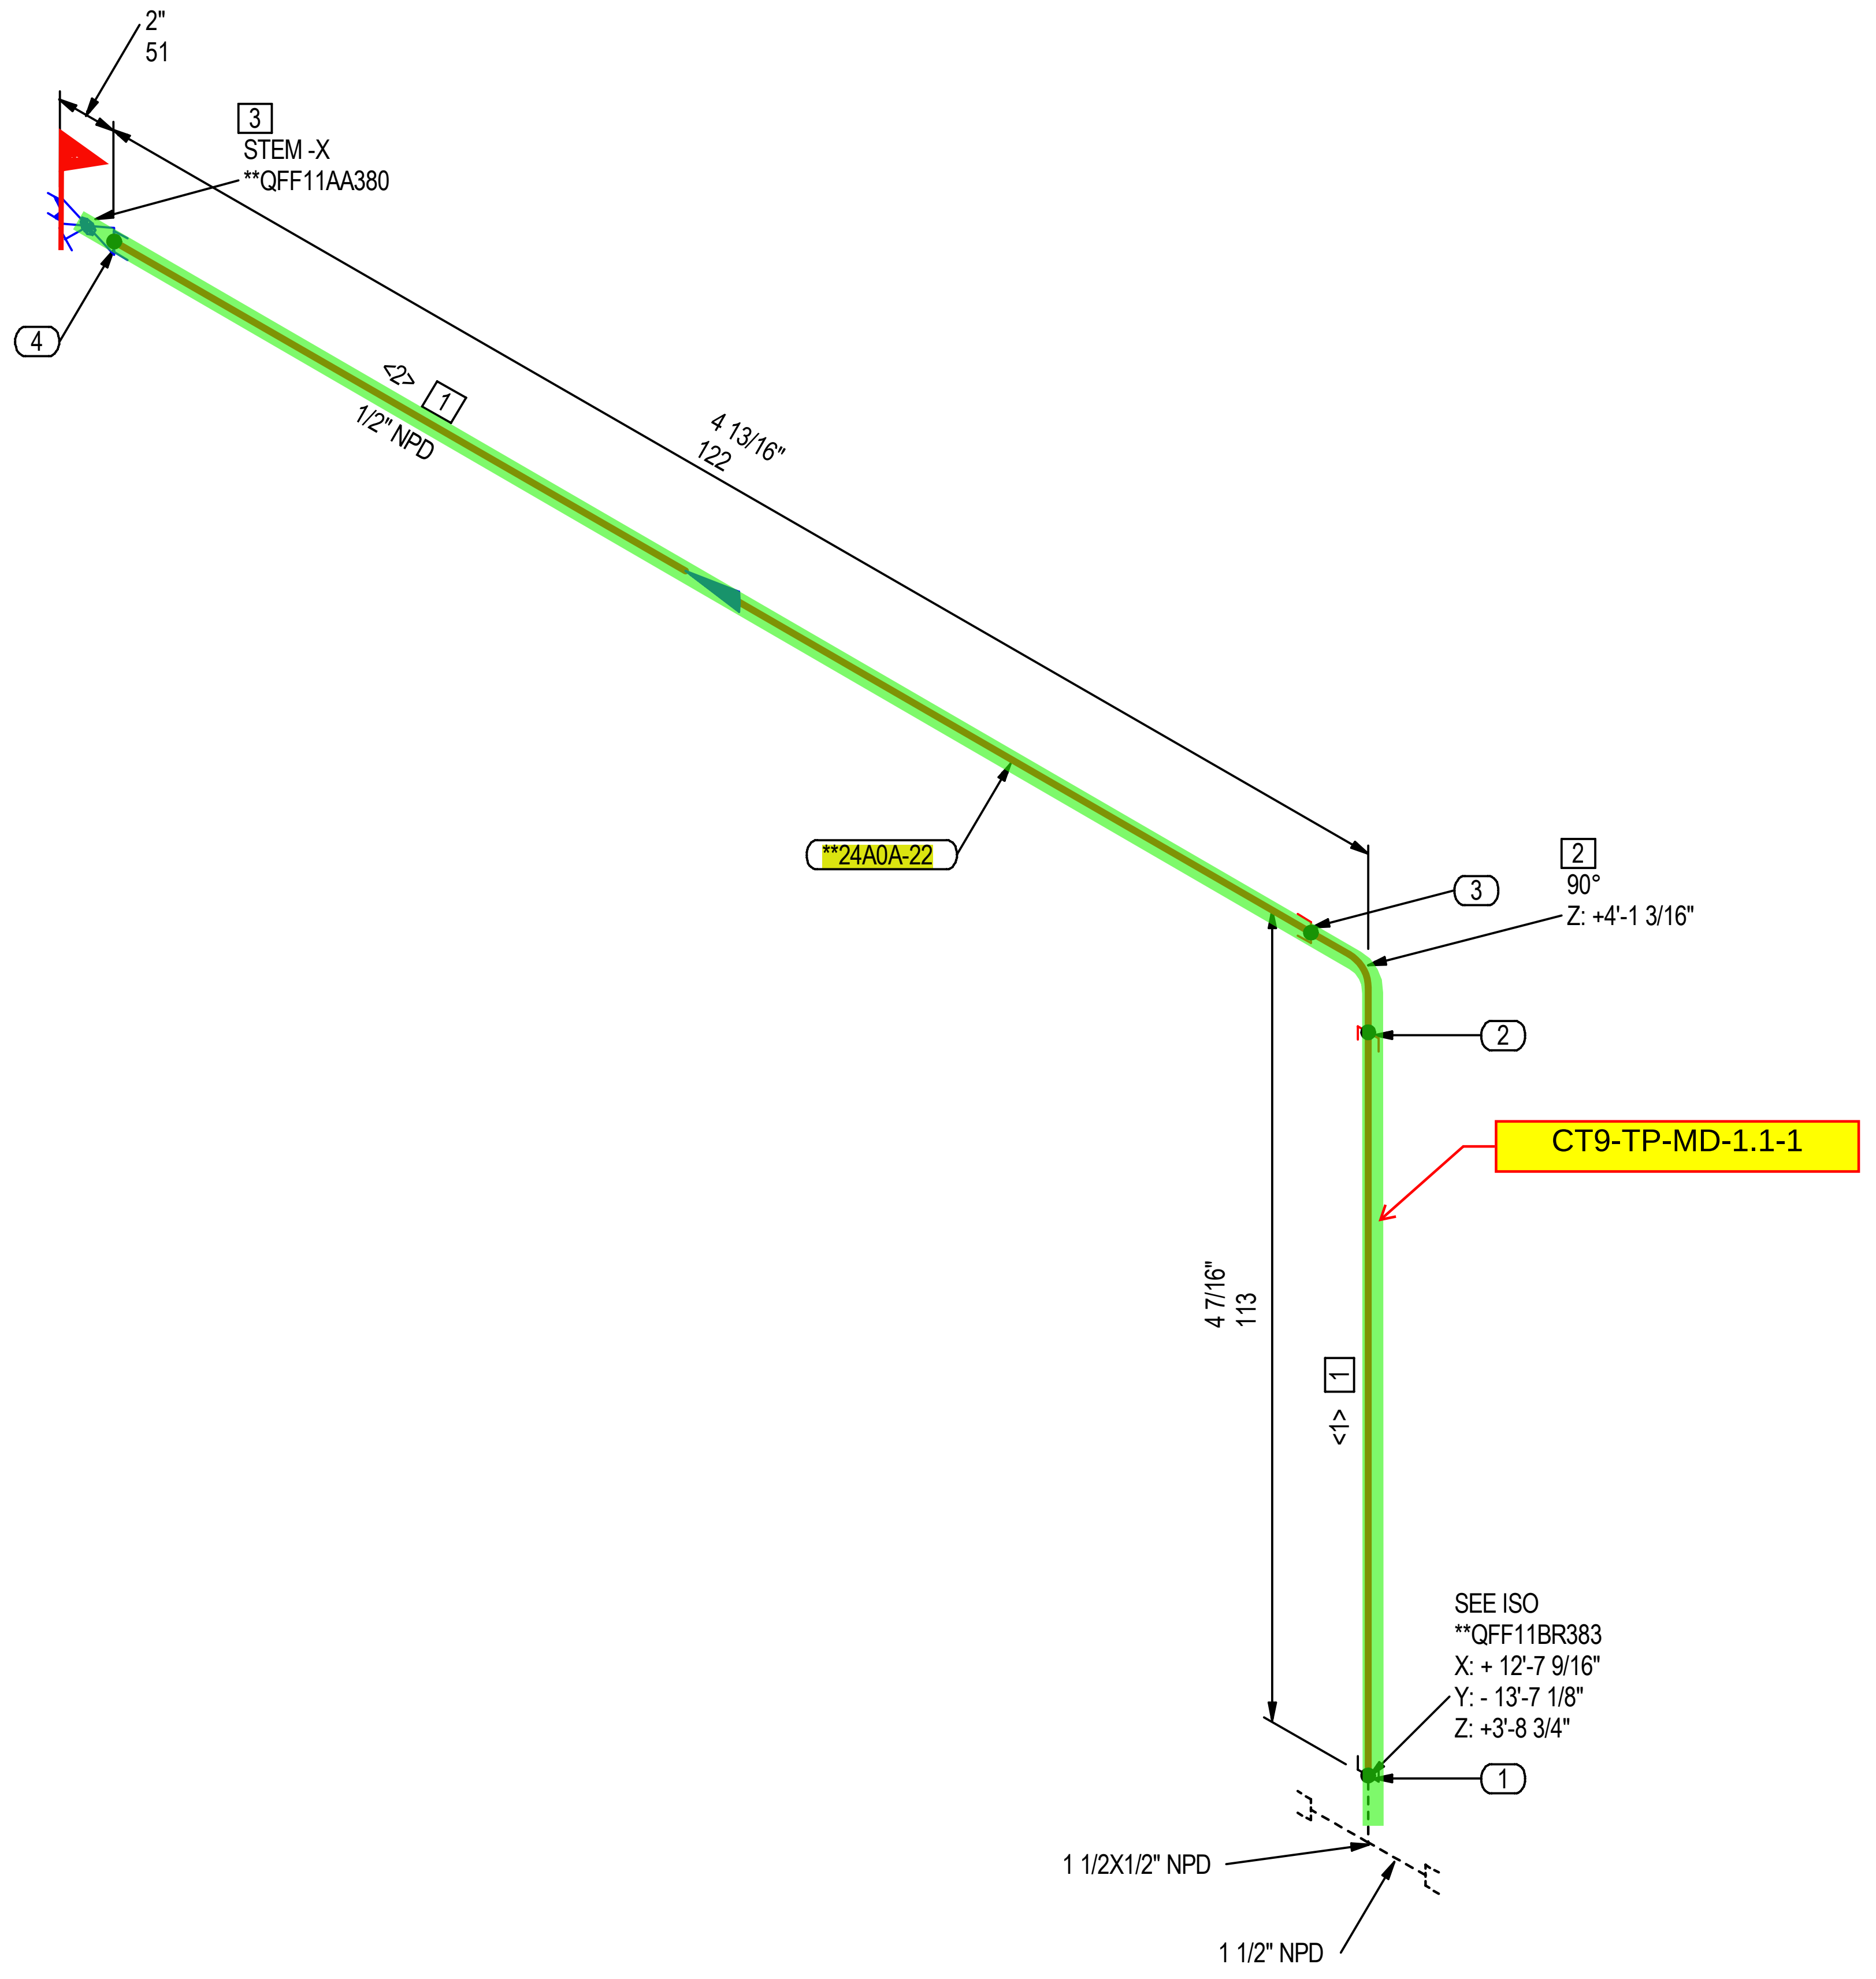

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1/2	MPAAZZBPZZABBANI	0.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1/2	MMCKAWBVZZAAGALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1/2	MVALAQDHZZAATALS	1

SPOOLS

**24A0A-22

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 3/4"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	4 1/8"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1/2"	1
2	SW	S	1/2"	1
3	SW	S	1/2"	1
4	SW	S	1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	150.00 psig / 1.03 MPag		
TEST PRESS.:	225.00 psig / 1.55 MPag		
MAX. TEMP:	140 F / 60 C		
INSULATION SPEC:	NOT INSULATED		

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
- BW - BUTT WELD
- SW - SOCKET WELD
- SOF - SLIP-ON FLANGE
- SOB - SET-ON BRANCH
- LET - OLET, LATROLET OR HALF COUPLING
- TW - TACK WELD
- MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
- ● S - SHOP
- FW - FIELD WELD
- FFW - FIELD FIT WELD

SYMBOLOGY:
- ⬭ WELD NUMBER
- ▭ PART NUMBER (PT NO)
- < > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
- F - FLANGE
- G - GASKET
- B - BOLT
- N - NUT
- W - WASHER
- O - O-RING
- L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	
PREPARED BY:	D. DURAPAU	10/22/2025	
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	
APPROVED BY:	U. KASINATHAN	10/31/2025	

MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
N05-003580	**0**	**24A0A**

INSTRUMENT AIR PIPING
INTERNAL TO GT PACKAGE
FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR382		1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

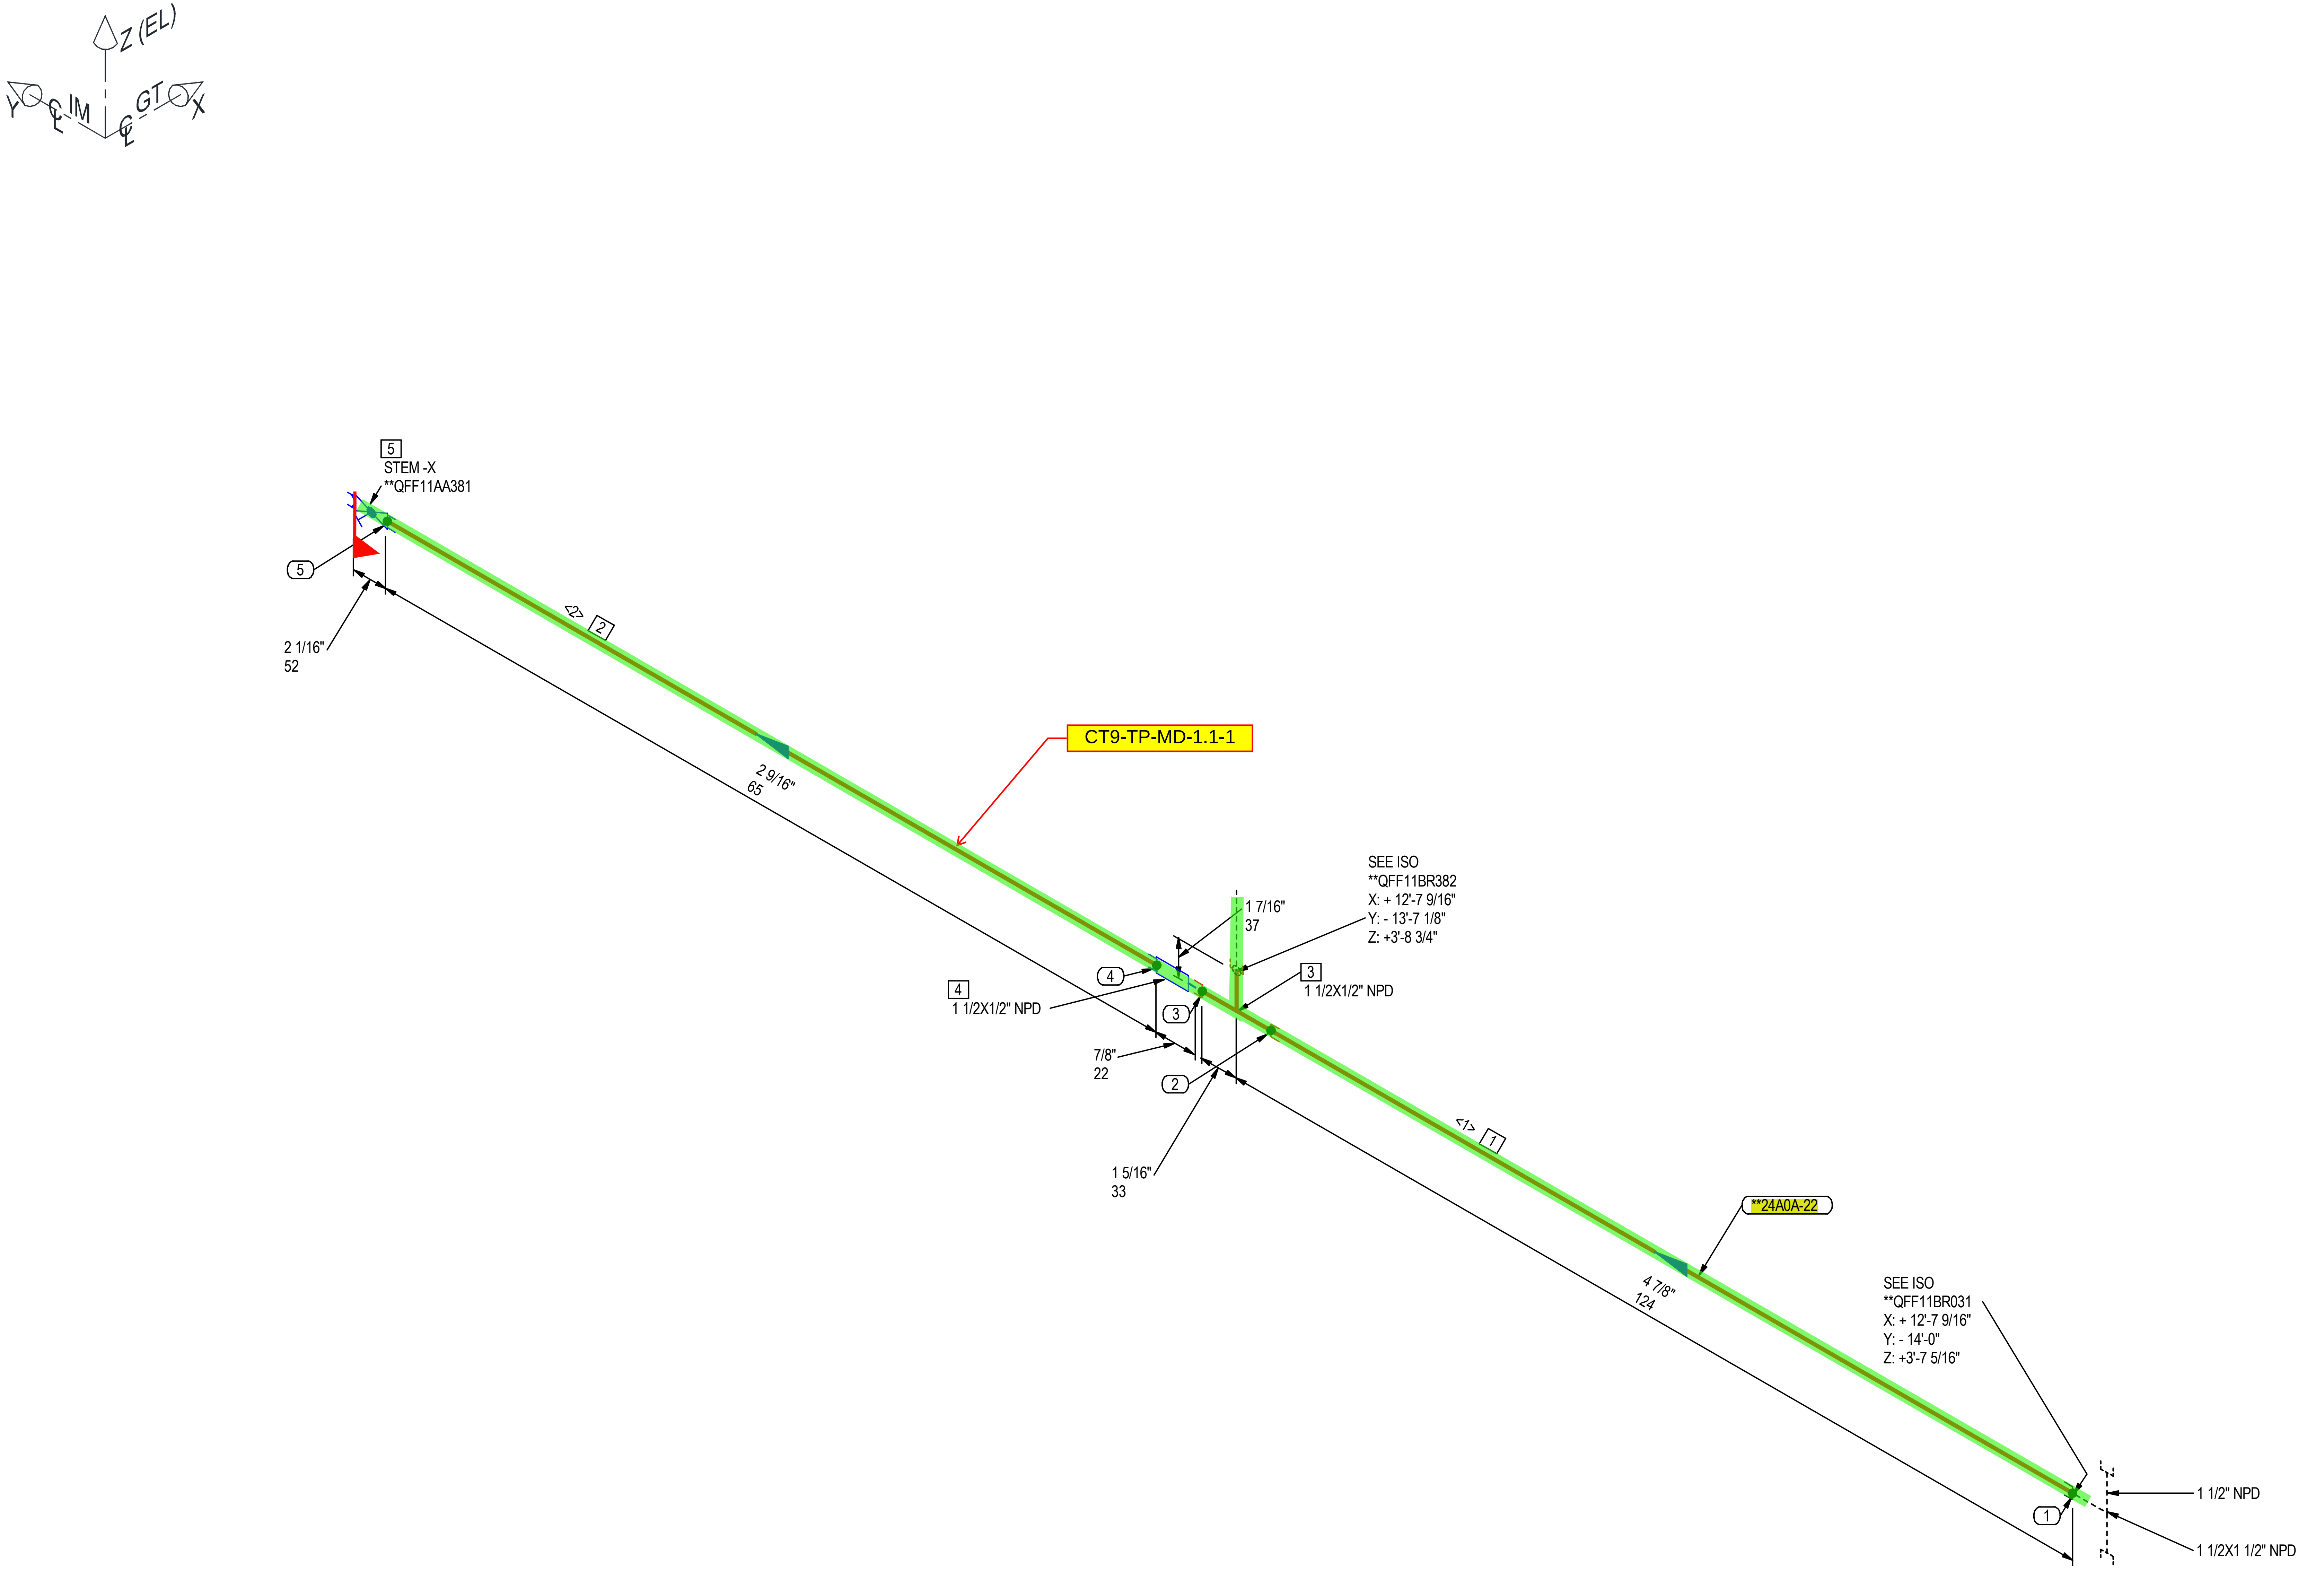

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	0.3'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1/2	MPAAZZBPZZABBANI	0.3'
3	REDUCING TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1/2	MMDRAWBVZZAAGALO	1
4	REDUCER INSERT, CL3000, SWE, MSS-SP-79, ASTM A182-F304, TYPE 2	1 1/2X1/2	MMBHAWBVZZADOALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1/2	MVALAQDHZZAATALS	1

SPOOLS

**24A0A-22

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 9/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	2 9/16"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1 1/2"	1
2	SW	S	1 1/2"	1
3	SW	S	1 1/2"	1
4	SW	S	1/2"	1
5	SW	S	1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	150.00 psig / 1.03 MPag		
TEST PRESS.:	225.00 psig / 1.55 MPag		
MAX. TEMP:	140 F / 60 C		
INSULATION SPEC:	NOT INSULATED		

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION

N05-ISO-QFF-BR-AA

P&ID DRAWING NUMBER: N01-PID-QFF-00-02

M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR383		1 OF 1	

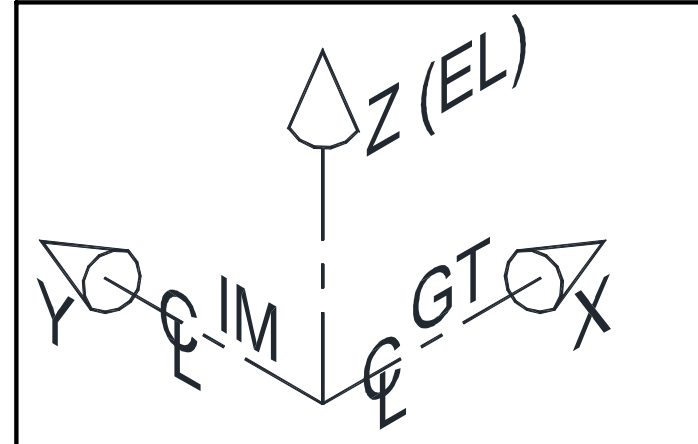

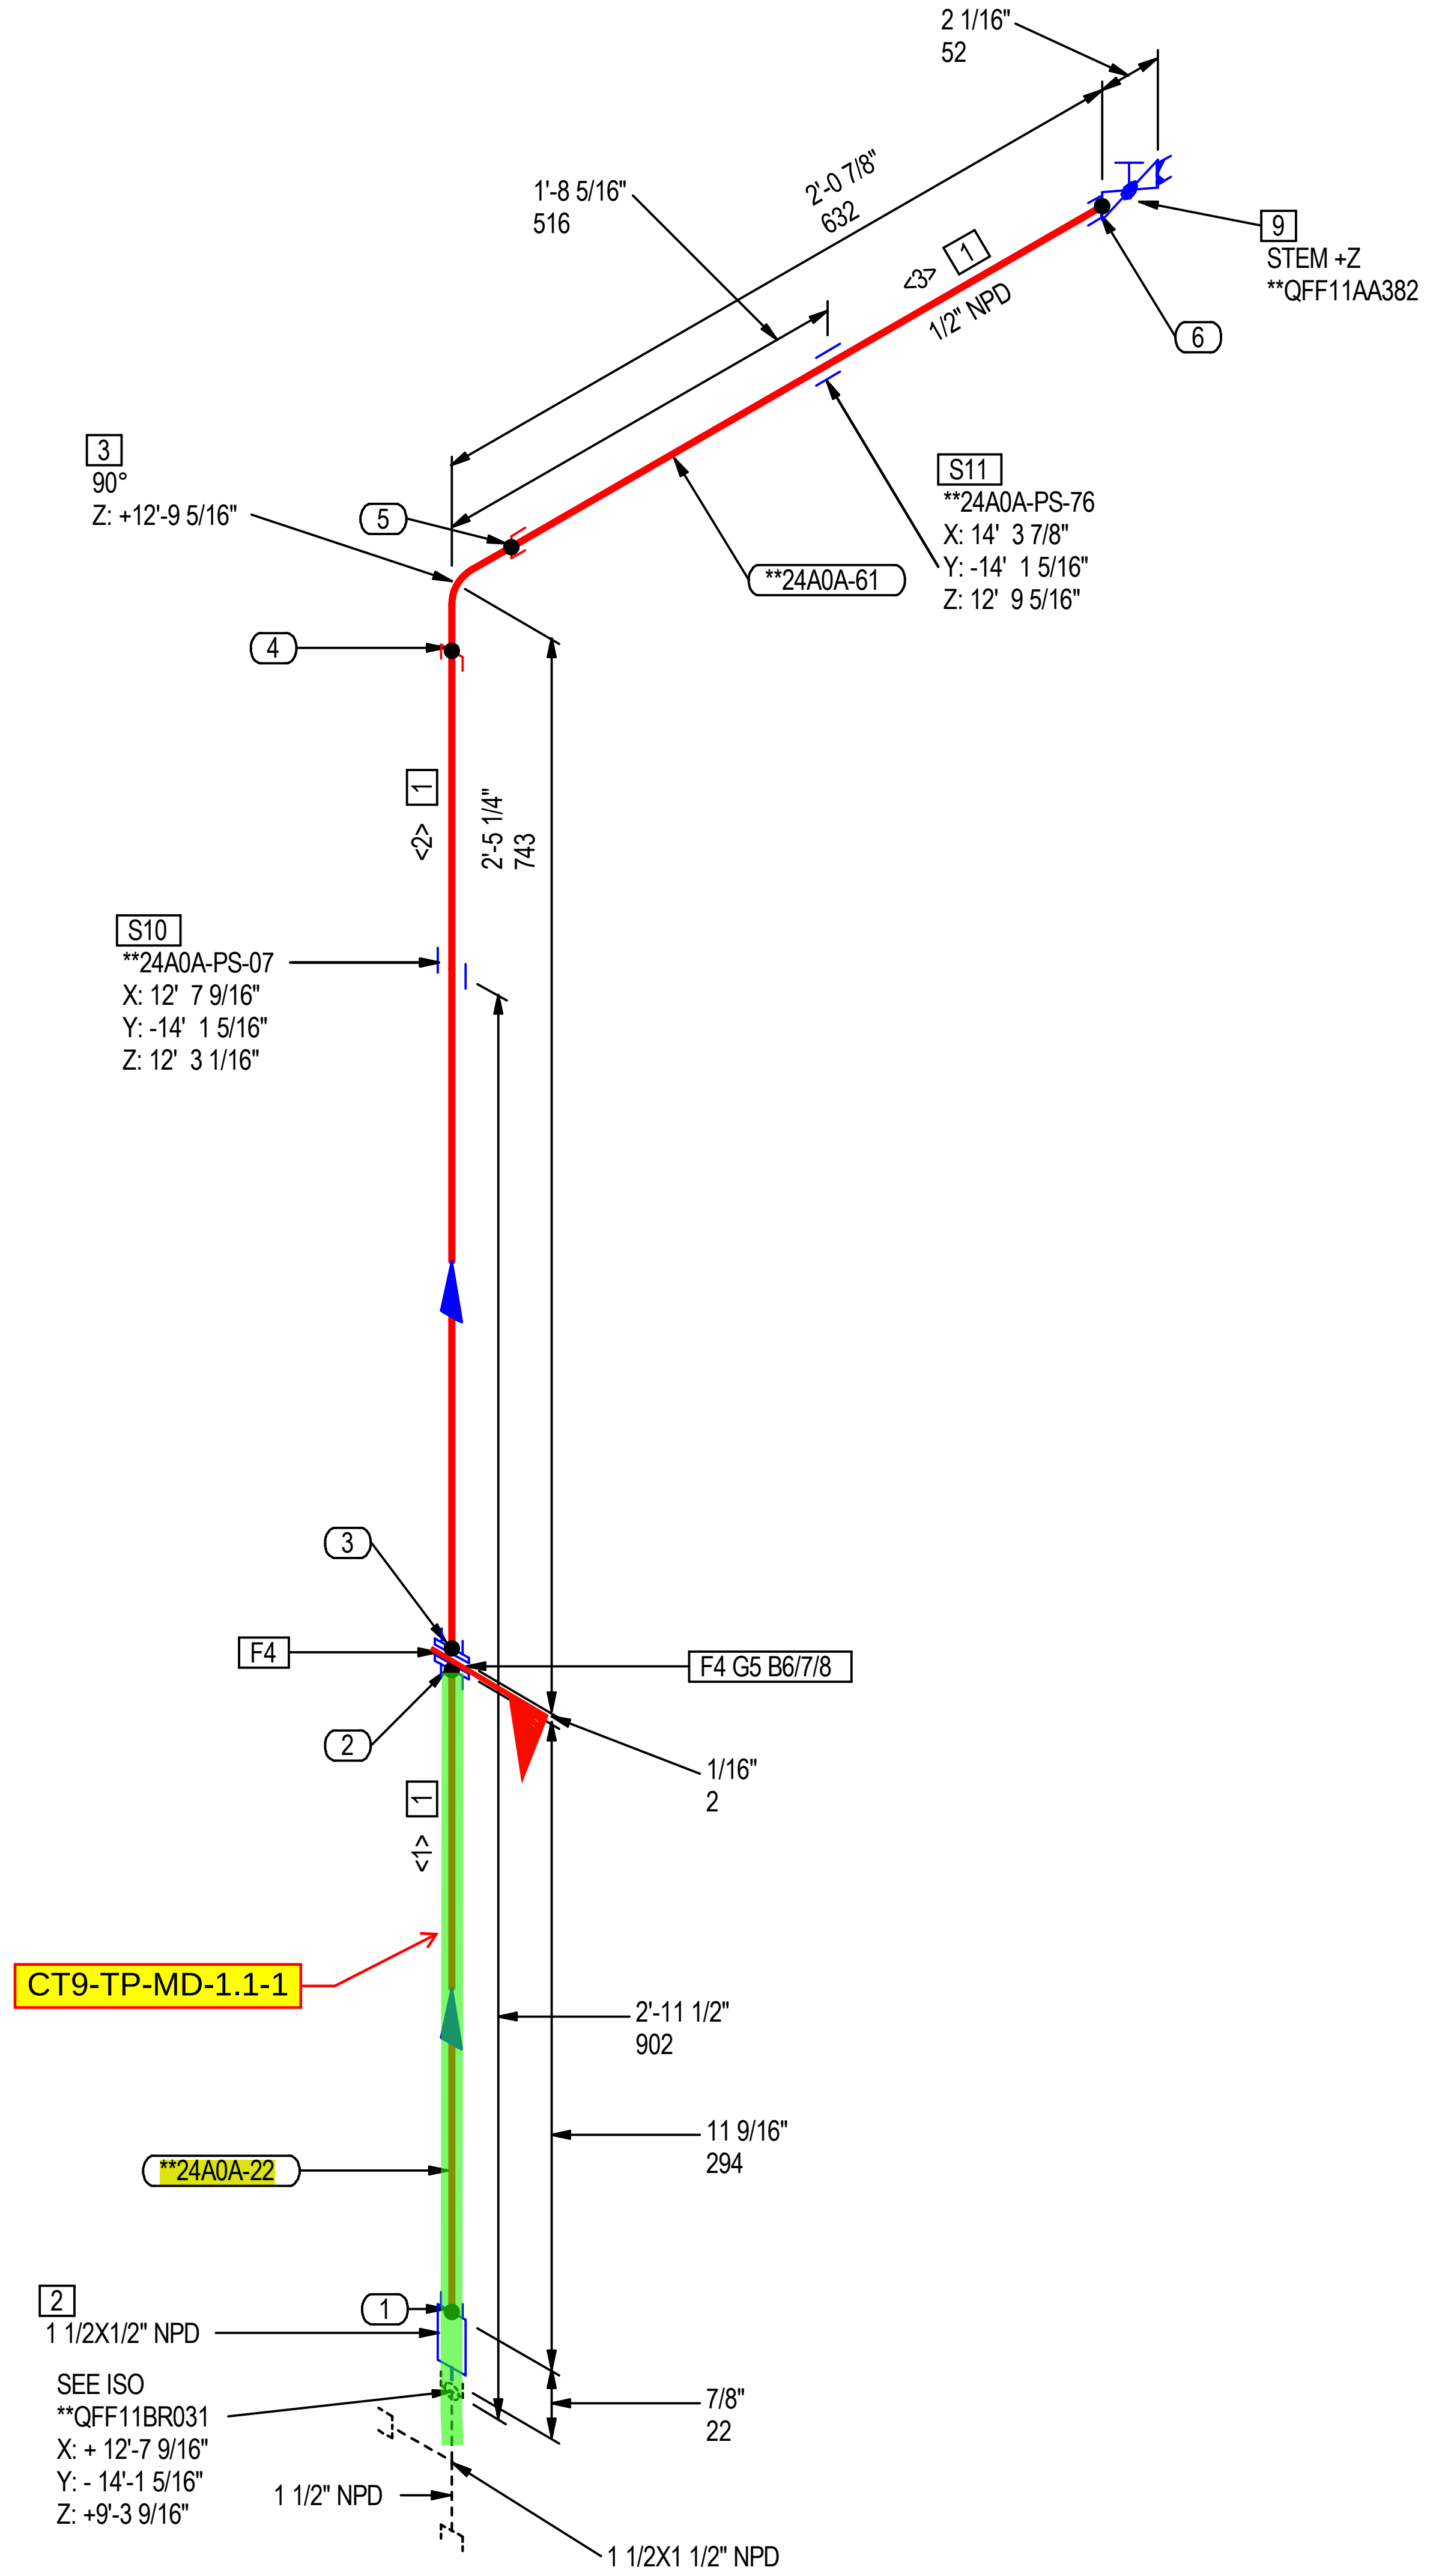

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1/2	MPAAZZBPZZABBANI	5.4'
2	REDUCER INSERT, CL3000, SWE, MSS-SP-79, ASTM A182-F304, TYPE 2	1 1/2X1/2	MMBHAWBVZZADOALO	1
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1/2	MMCKAWBVZZAAGALO	1
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1/2	MFABAHABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1/2	MITAHAAAALBMNUS	1
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3 in. Length	1/2	MBAZZACZZIAGBLJZ	4
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
8	WASHER, SPECIAL SHAPED LOCK, 0.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
9	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1/2	MVALAQDHZZAATALS	1
	PIPE SUPPORTS			
10	PIPE SUPPORT	1/2	**24A0A-PS-07	1
11	PIPE SUPPORT	1/2	**24A0A-PS-76	1

SPOOLS

**24A0A-22, **24A0A-61

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	11 5/16"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	2'4 1/4"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	2'0 3/16"	1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1/2"	1
2	SW	S	1/2"	1
3	SW	S	1/2"	1
4	SW	S	1/2"	1
5	SW	S	1/2"	1
6	SW	S	1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
◯ WELD NUMBER
☐ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR384		1 OF 1	

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

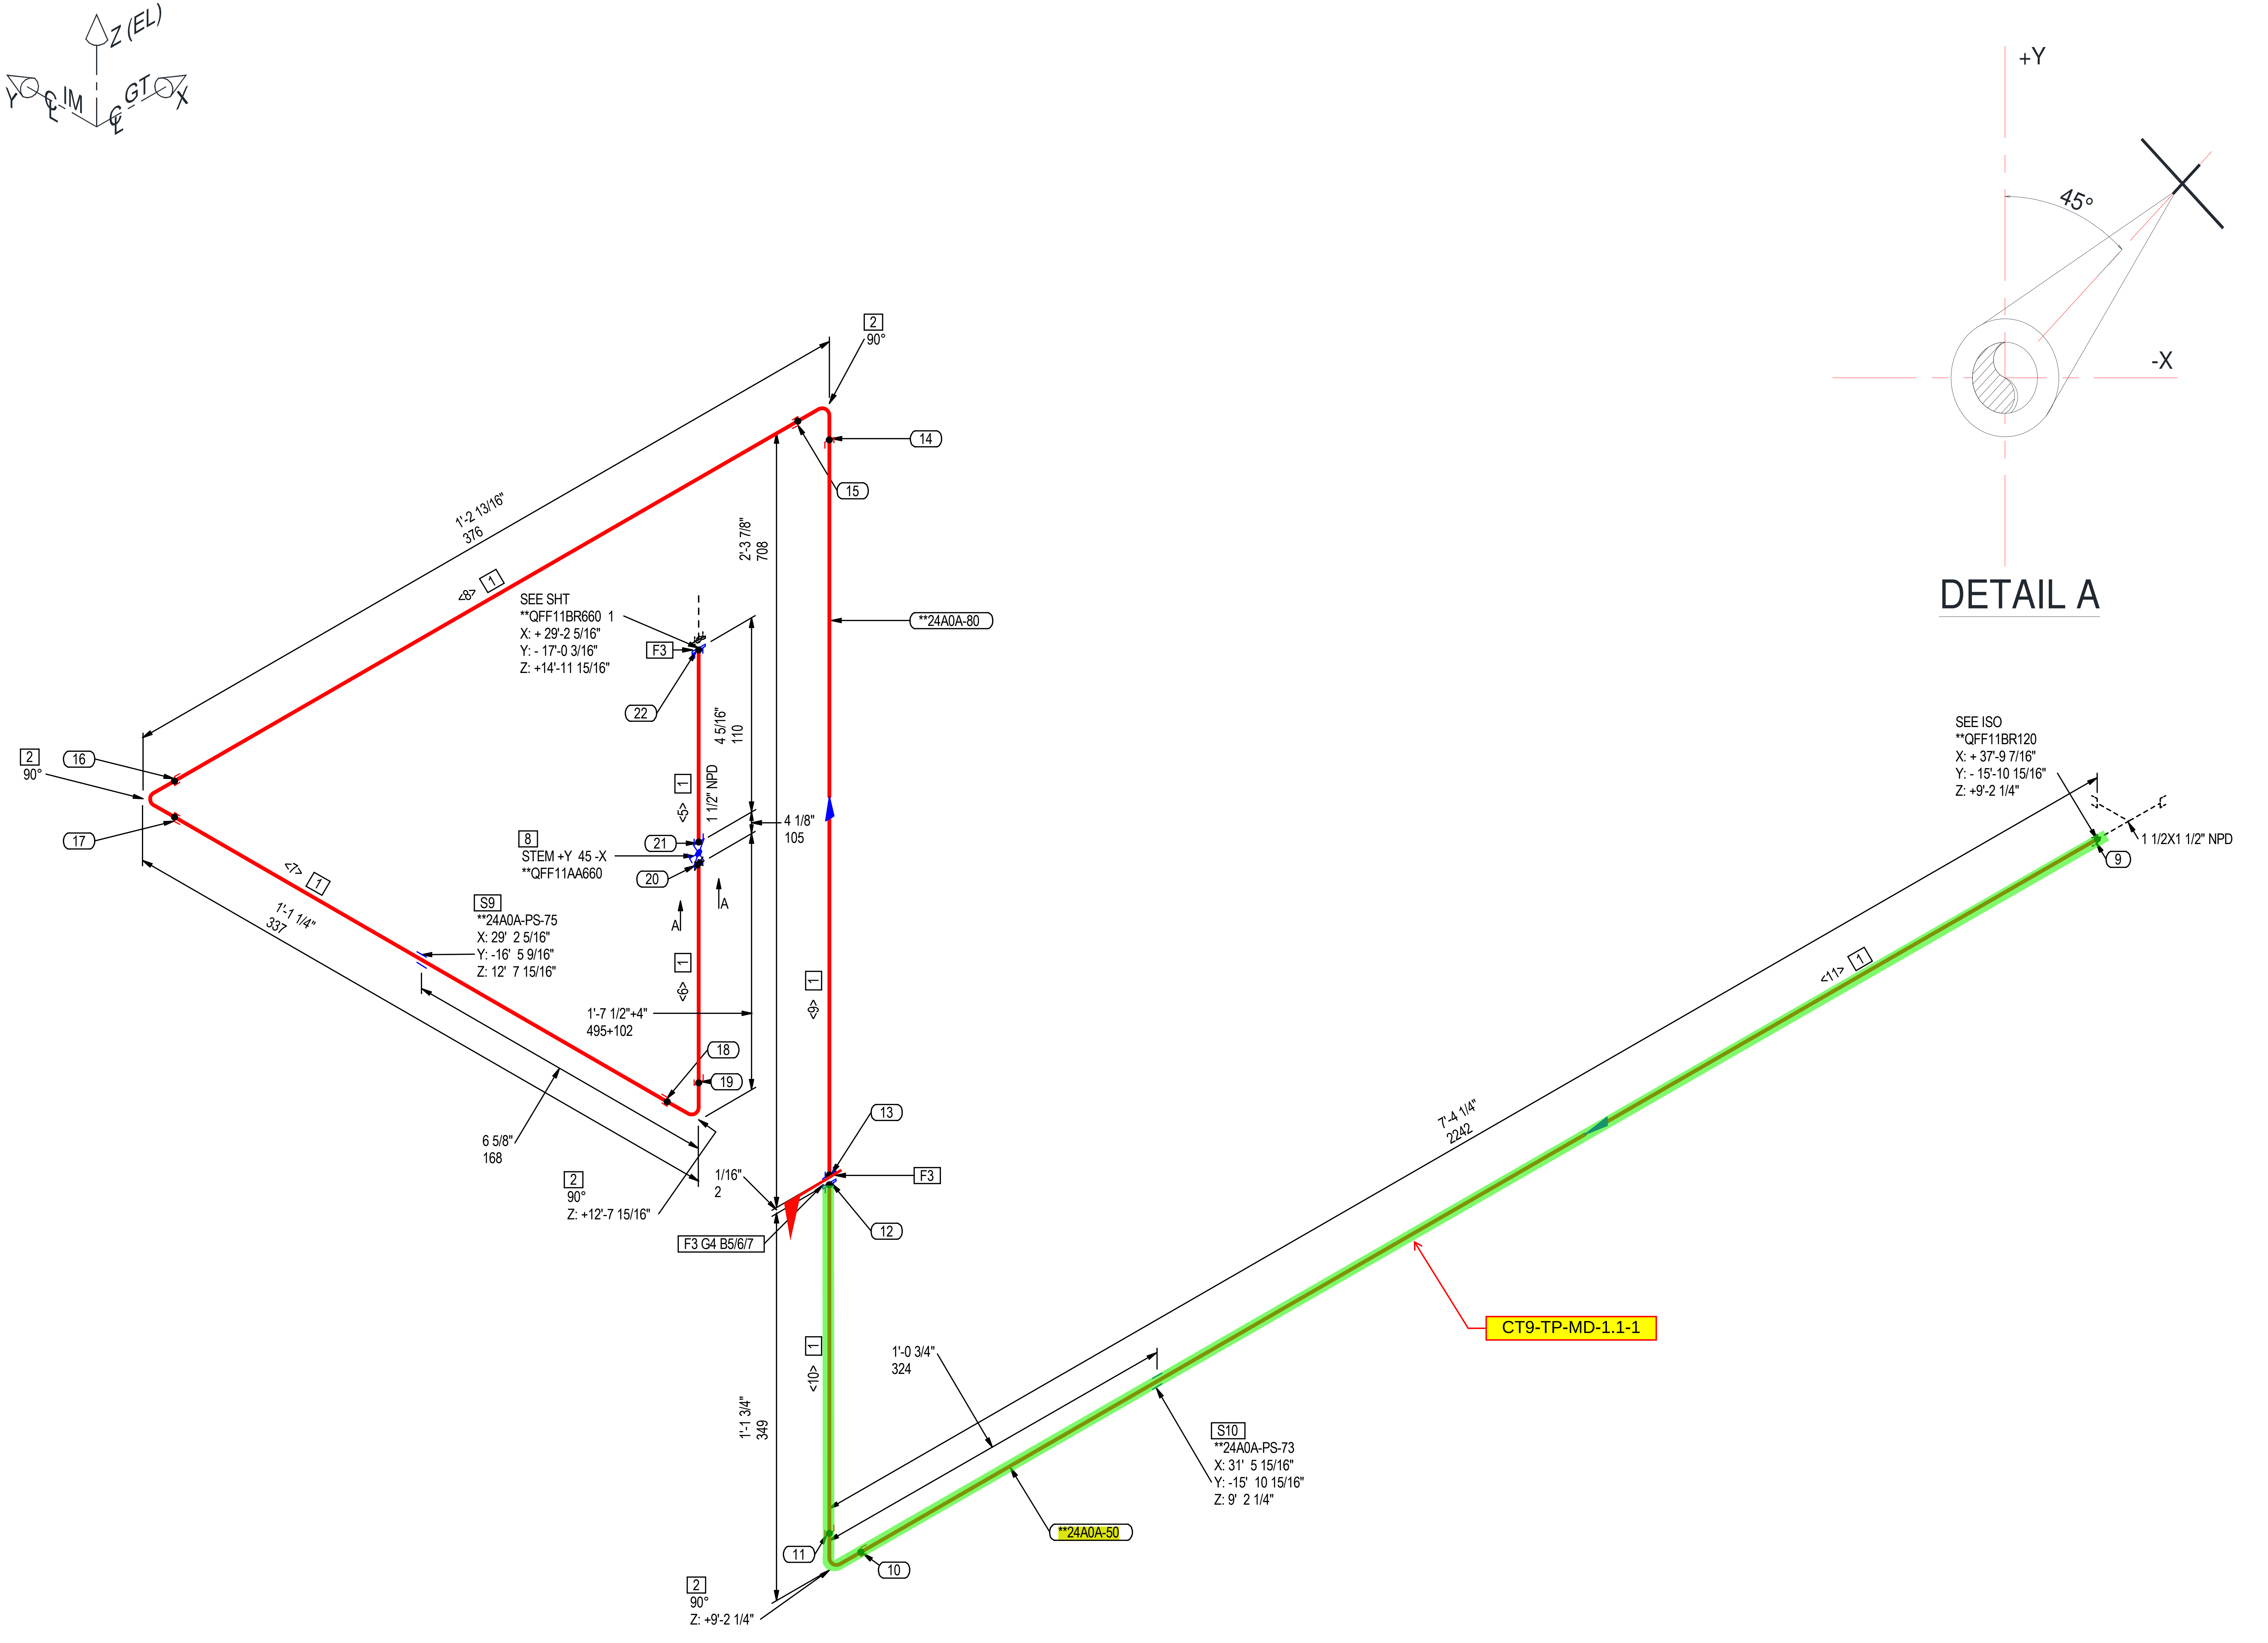
Z (EL)
Y ℄ IM
℄ GT X
2
90°
14
15
1'-2 13/16"
376
<8> 1
2'-3 7/8"
708
**24A0A-80
SEE SHT
**QFF11BR660 1
X: + 29'-2 5/16"
Y: - 17'-0 3/16"
Z: +14'-11 15/16"
F3
22
4 5/16"
110
1 1/2" NPD
<5> 1
2
90°
16
17
8
STEM +Y 45 -X
**QFF11AA660
21
20
4 1/8"
105
A
A
<7> 1
1'-1 1/4"
337
S9
**24A0A-PS-75
X: 29' 2 5/16"
Y: -16' 5 9/16"
Z: 12' 7 15/16"
<6> 1
<9> 1
1'-7 1/2"+4"
495+102
18
19
6 5/8"
168
2
90°
Z: +12'-7 15/16"
1/16"
2
13
F3
12
F3 G4 B5/6/7
<10> 1
1'-0 3/4"
324
1'-1 3/4"
349
S10
**24A0A-PS-73
X: 31' 5 15/16"
Y: -15' 10 15/16"
Z: 9' 2 1/4"
**24A0A-50
11
10
2
90°
Z: +9'-2 1/4"
CT9-TP-MD-1.1-1
7'-4 1/4"
2242
<11> 1
SEE ISO
**QFF11BR120
X: + 37'-9 7/16"
Y: - 15'-10 15/16"
Z: +9'-2 1/4"
1 1/2X1 1/2" NPD
9
+Y
45°
-X
DETAIL A

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	14.6'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	4
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-75	1
10	PIPE SUPPORT	1 1/2	**24A0A-PS-73	1

SPOOLS

**24A0A-50, **24A0A-80

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	1'10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	10 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	1'0 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	2'2 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	1'0 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	7'2 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
22	SW	S	1 1/2"	1
21	SW	S	1 1/2"	1
20	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
18	SW	S	1 1/2"	1
17	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✕ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✕ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	150.00 psig / 1.03 MPag		
TEST PRESS.:	225.00 psig / 1.55 MPag		
MAX. TEMP:	140 F / 60 C		
INSULATION SPEC:	NOT INSULATED		

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
☐ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR660		2 OF 2	

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

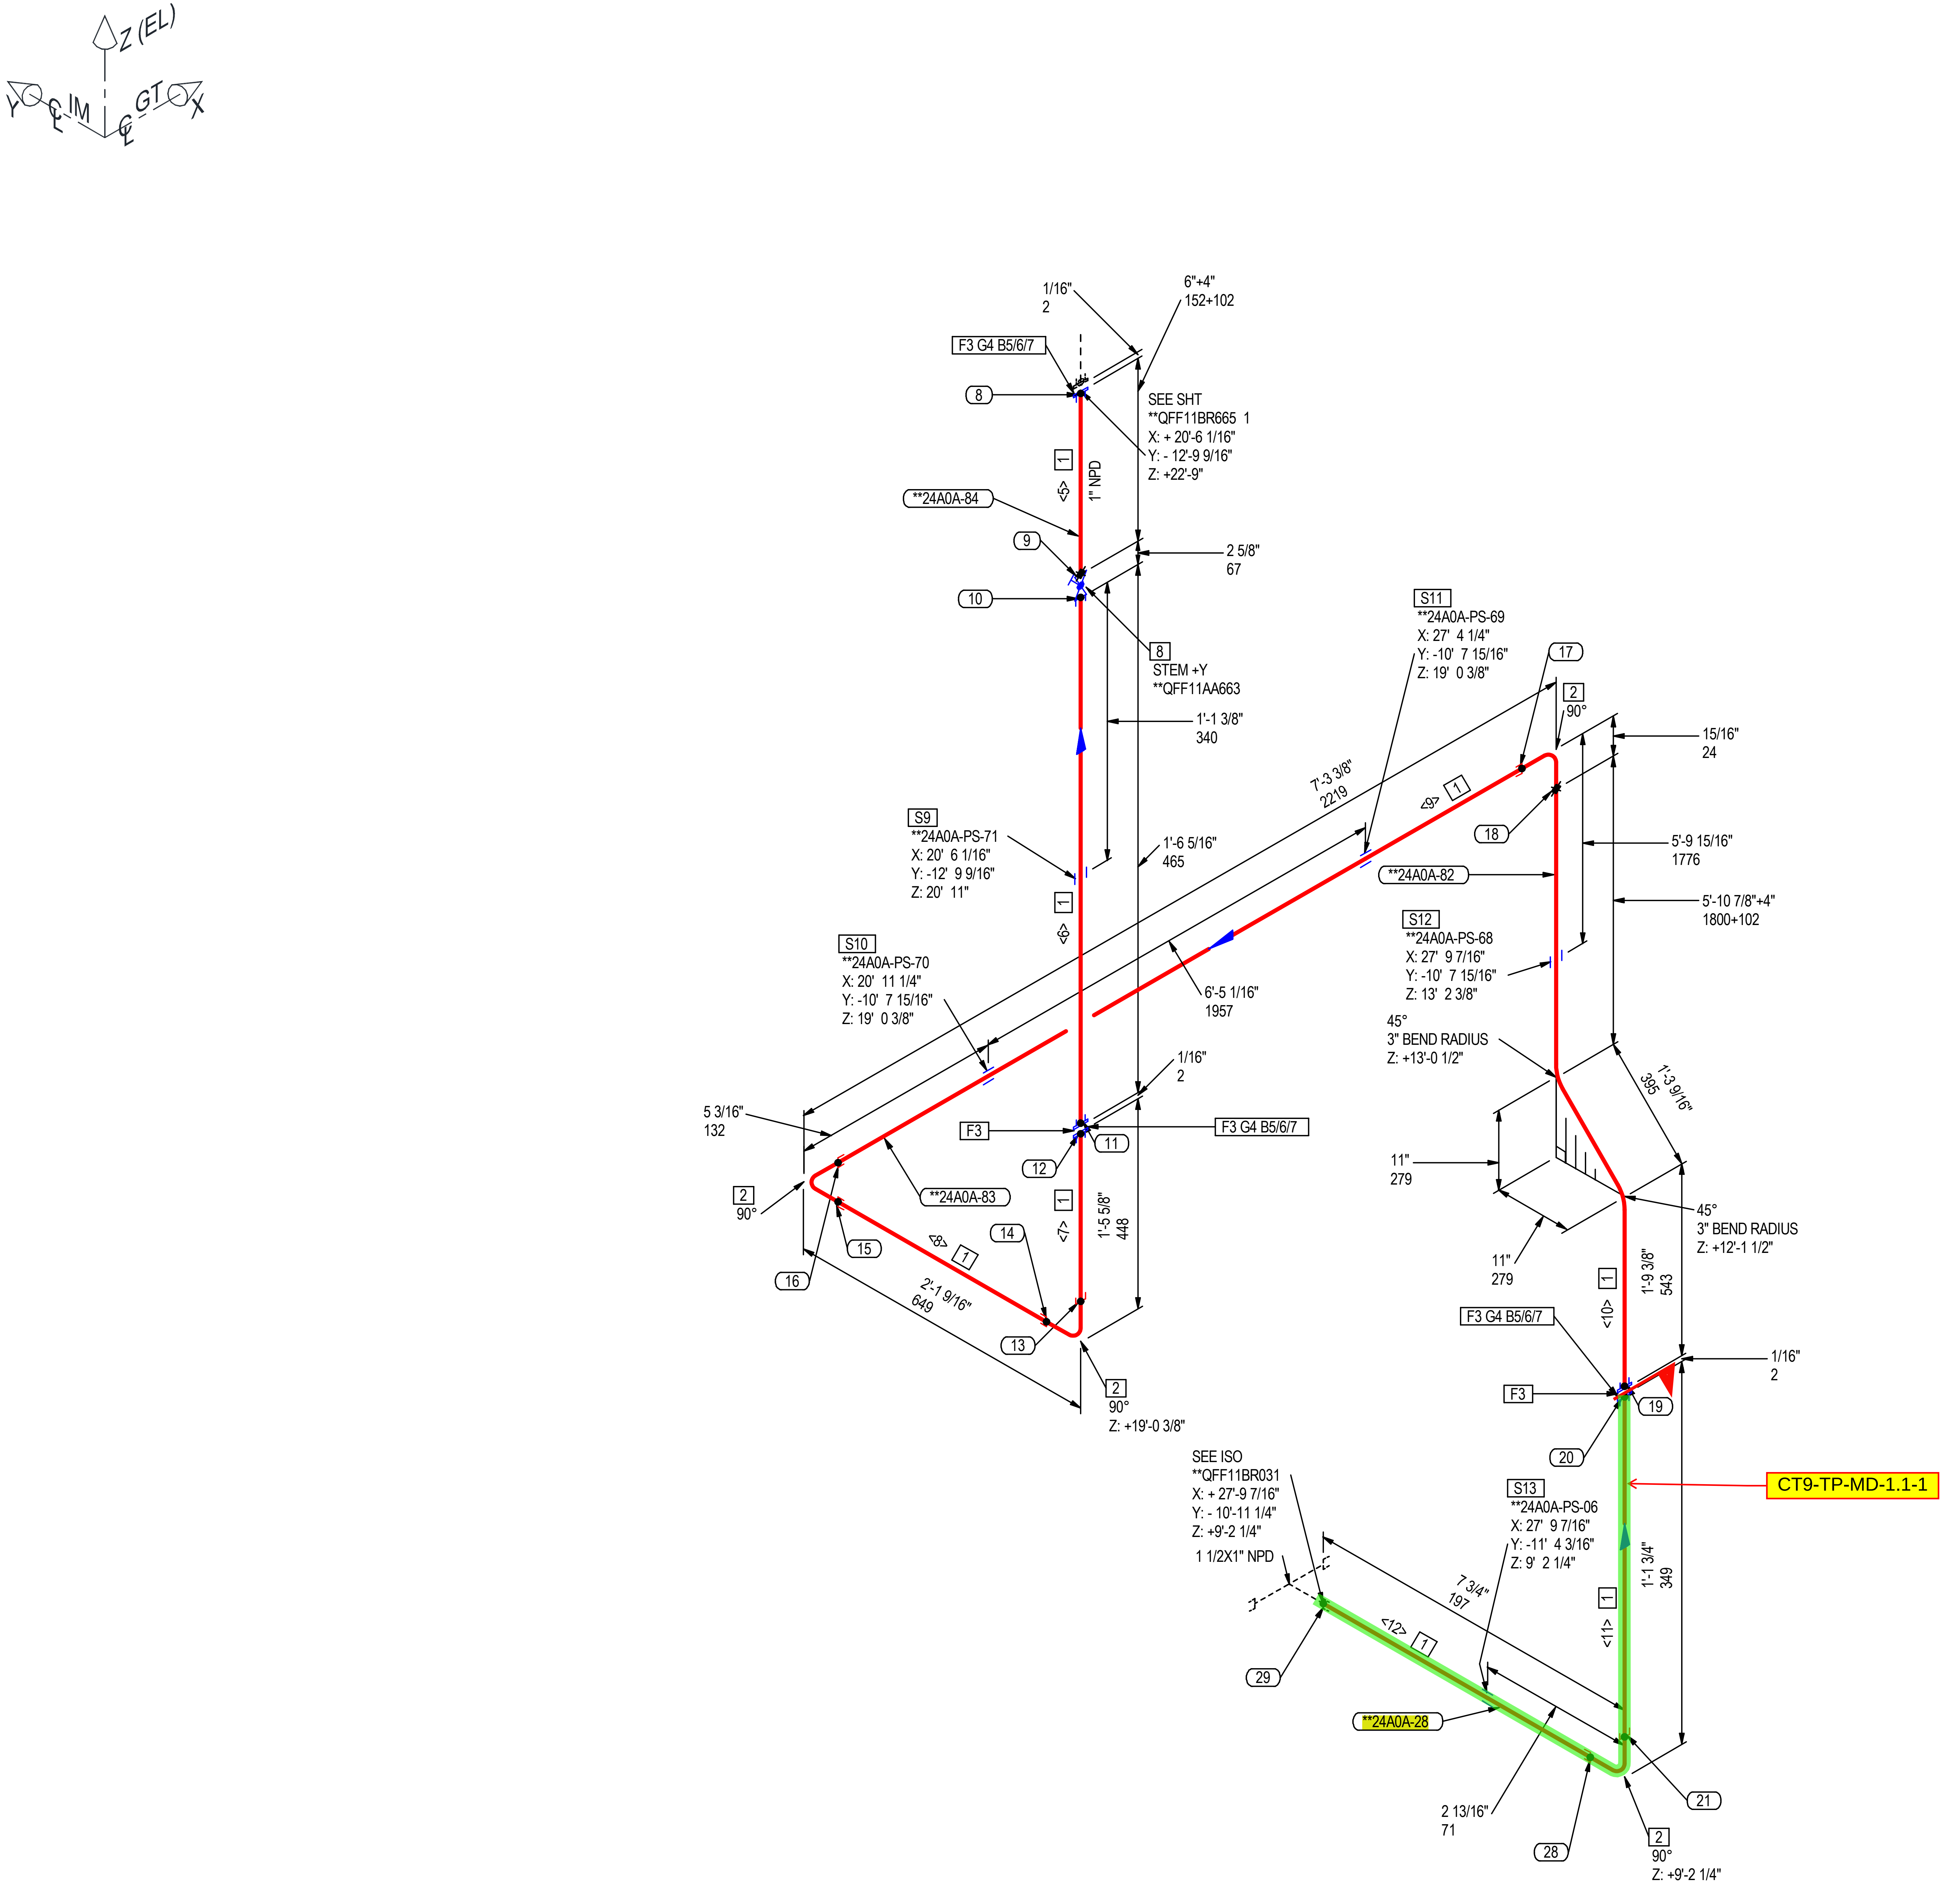
Z (EL)
Y
℄ IM
℄ GT
X
1/16"
2
6"+4"
152+102
F3 G4 B5/6/7
8
SEE SHT
**QFF11BR665 1
X: + 20'-6 1/16"
Y: - 12'-9 9/16"
Z: +22'-9"
1
<5>
1" NPD
**24A0A-84
9
10
2 5/8"
67
8
STEM +Y
**QFF11AA663
1'-1 3/8"
340
S11
**24A0A-PS-69
X: 27' 4 1/4"
Y: -10' 7 15/16"
Z: 19' 0 3/8"
17
2
90°
15/16"
24
7'-3 3/8"
2219
<9>
1
18
5'-9 15/16"
1776
**24A0A-82
5'-10 7/8"+4"
1800+102
S9
**24A0A-PS-71
X: 20' 6 1/16"
Y: -12' 9 9/16"
Z: 20' 11"
1'-6 5/16"
465
1
<6>
S12
**24A0A-PS-68
X: 27' 9 7/16"
Y: -10' 7 15/16"
Z: 13' 2 3/8"
S10
**24A0A-PS-70
X: 20' 11 1/4"
Y: -10' 7 15/16"
Z: 19' 0 3/8"
6'-5 1/16"
1957
45°
3" BEND RADIUS
Z: +13'-0 1/2"
1'-3 9/16"
395
1/16"
2
5 3/16"
132
F3
F3 G4 B5/6/7
11
12
11"
279
2
90°
**24A0A-83
1
<7>
1'-5 5/8"
448
14
15
<8>
1
16
2'-1 9/16"
649
13
2
90°
Z: +19'-0 3/8"
45°
3" BEND RADIUS
Z: +12'-1 1/2"
11"
279
1
<10>
1'-9 3/8"
543
F3 G4 B5/6/7
1/16"
2
F3
19
20
SEE ISO
**QFF11BR031
X: + 27'-9 7/16"
Y: - 10'-11 1/4"
Z: +9'-2 1/4"
1 1/2X1" NPD
S13
**24A0A-PS-06
X: 27' 9 7/16"
Y: -11' 4 3/16"
Z: 9' 2 1/4"
CT9-TP-MD-1.1-1
7 3/4"
197
<12>
1
1
<11>
1'-1 3/4"
349
29
**24A0A-28
2 13/16"
71
21
28
2
90°
Z: +9'-2 1/4"

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	23.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMCKAWBVZZAAGALO	4
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1	MFABAHABZZAADALO	5

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1	MITAHAAAALBMNUS	3
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	12
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	24
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	24
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1	MVALAQBVZZAATALS	1
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**24A0A-PS-71	1
10	PIPE SUPPORT	1	**24A0A-PS-70	1
11	PIPE SUPPORT	1	**24A0A-PS-69	1
12	PIPE SUPPORT	1	**24A0A-PS-68	1
13	PIPE SUPPORT	1	**24A0A-PS-06	1

SPOOLS

**24A0A-28, **24A0A-82, **24A0A-83, **24A0A-84

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	9 3/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	1'6 1/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	1'4 7/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	1'11 11/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	7'1 7/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	9'3 3/8"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	1'0 5/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<12>	6 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX##-###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
8	SW	S	1"	1
9	SW	S	1"	1
10	SW	S	1"	1
11	SW	S	1"	1
12	SW	S	1"	1
13	SW	S	1"	1
14	SW	S	1"	1
15	SW	S	1"	1
16	SW	S	1"	1
17	SW	S	1"	1
18	SW	S	1"	1
19	SW	S	1"	1
20	SW	S	1"	1
21	SW	S	1"	1
28	SW	S	1"	1
29	SW	S	1"	1

ADDITIONAL NOTES:

WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
○ WELD NUMBER
☐ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:
PREPARED BY:	D. DURAPAU	10/22/2025
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025
APPROVED BY:	U. KASINATHAN	10/31/2025

MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
N05-003580	**0**	**24A0A**

INSTRUMENT AIR PIPING
INTERNAL TO GT PACKAGE
FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR665		2 OF 2	

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING

SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-05	**23A0A-9	
2	**23A0B-PS-03	**23A0B-16	
3	**23A0B-PS-04	**23A0B-22	
4	**23A0B-PS-05	**23A0B-22	
5	**23A0B-PS-12	**23A0B-15	SEE NOTE 5
6	**23A0C-PS-10	**23A0C-16	
7	**23A0C-PS-11	**23A0C-16	
8	**23A0C-PS-17	**23A0C-24	
9	**23A0D-PS-01	**23A0D-2	
10	**23A0E-PS-01	**23A0E-3	
11	**23A0G-PS-01	**23A0G-12	
12	**23A0G-PS-02	**23A0G-12	
13	**23A0G-PS-03	**23A0G-12	
14	**23A0H-PS-07	**23A0H-6	
15	**23A0H-PS-08	**23A0H-6	
16	**23A0H-PS-09	**23A0H-5	
17	**23A0H-PS-10	**23A0H-5	
18	**23A0H-PS-25	**23A0H-21	
19	**23A0S-PS-07	**23A0S-24	SEE NOTE 5
20	**23A0U-PS-07	**23A0U-24	
21	**24A0A-PS-01	**24A0A-22	
22	**24A0A-PS-02	**24A0A-22	
23	**24A0A-PS-03	**24A0A-25	
24	**24A0A-PS-04	**24A0A-25	
25	**24A0A-PS-05	**24A0A-27	
26	**24A0A-PS-06	**24A0A-28	
27	**24A0A-PS-100	**24A0A-13	
28	**24A0A-PS-108	**24A0A-24	
29	**24A0A-PS-109	**24A0A-24	
30	**24A0A-PS-122	AIR CHAMBER	
31	**24A0A-PS-123	AIR CHAMBER	
32	**24A0A-PS-124	AIR CHAMBER	
33	**24A0A-PS-125	AIR CHAMBER	
34	**24A0A-PS-13	**24A0A-40	
35	**24A0A-PS-14	**24A0A-8	
36	**24A0A-PS-21	**24A0A-49	
37	**24A0A-PS-22	**24A0A-50	
38	**24A0A-PS-23	**24A0A-52	
39	**24A0A-PS-24	**24A0A-52	
40	**24A0A-PS-30	**24A0A-28	
41	**24A0A-PS-31	**24A0A-28	
42	**24A0A-PS-73	**24A0A-50	
43	**24A0A-PS-77	**24A0A-51	
44	**24A0A-PS-99	**24A0A-14	
45	**24A0C-PS-01	**24A0C-4	
46	**24A0C-PS-02	**24A0C-3	
47	**24A0C-PS-03	**24A0C-6	
48	**24A0C-PS-04	**24A0C-6	
49	**24A0C-PS-05	**24A0C-6	
50	**27A0A-PS-01	**27A0A-6	
51	**27A0A-PS-07	**27A0A-10	
52	**27A0A-PS-08	**27A0A-10	
53	**27A0A-PS-09	**27A0A-10	
54	**27A0B-PS-01	**27A0B-1	
55	**27A0B-PS-02	**27A0B-3	
56	**27A0B-PS-03	**27A0B-3	
57	**27A0B-PS-04	**27A0B-4	
58	**27A0B-PS-05	**27A0B-5	
59	**27A0B-PS-09	**27A0B-24	
60	**27A0F-PS-01	**27A0F-6	SEE NOTE 5
61	**45A0A-PS-01	**45A0A-59	
62	**45A0A-PS-02	**45A0A-47	SEE NOTE 5
63	**45A0A-PS-03	**45A0A-59	
64	**45A0A-PS-04	**45A0A-59	
65	**45A0A-PS-09	**45A0A-59	
66	**45A0A-PS-13	**45A0A-48	
67	**45A0A-PS-18	**45A0A-59	
68	**45A0A-PS-19	**45A0A-59	
69	**45A0A-PS-21	**45A0A-59	
70	**45A0A-PS-25	**45A0A-59	
71	**45A0A-PS-28	**45A0A-59	
72	**45A0A-PS-29	**45A0A-50	
73	**45A0A-PS-30	**45A0A-58	
74	**45A0A-PS-31	**45A0A-58	
75	**45A0A-PS-36	**45A0A-58	
76	**45A0A-PS-40	**45A0A-58	
77	**45A0A-PS-46	**45A0A-58	
78	**45A0A-PS-51	**45A0A-59	
79	**45A0A-PS-53	**45A0A-58	
80	**45A0A-PS-54	**45A0A-58	
81	**45A0A-PS-57	**45A0A-58	
82	**45A0A-PS-58	**45A0A-58	
83	**45A0A-PS-63	**45A0A-58	
84	**45A0A-PS-66	**45A0A-59	
85	**45A0A-PS-67	**45A0A-58	
86	**45A0A-PS-68	**45A0A-58	
87	**45A0A-PS-69	**45A0A-58	
88	**45A0A-PS-70	**45A0A-58	
89	**45A0A-PS-71	**45A0A-57	
90	**45A0C-PS-01	**45A0A-59 **45A0C-1	
91	**45A0C-PS-02	**45A0C-1	
92	**45A0E-PS-01	**45A0E-1	
93	**64A0A-PS-01	FFS	
94	**64A0A-PS-02	FFS	

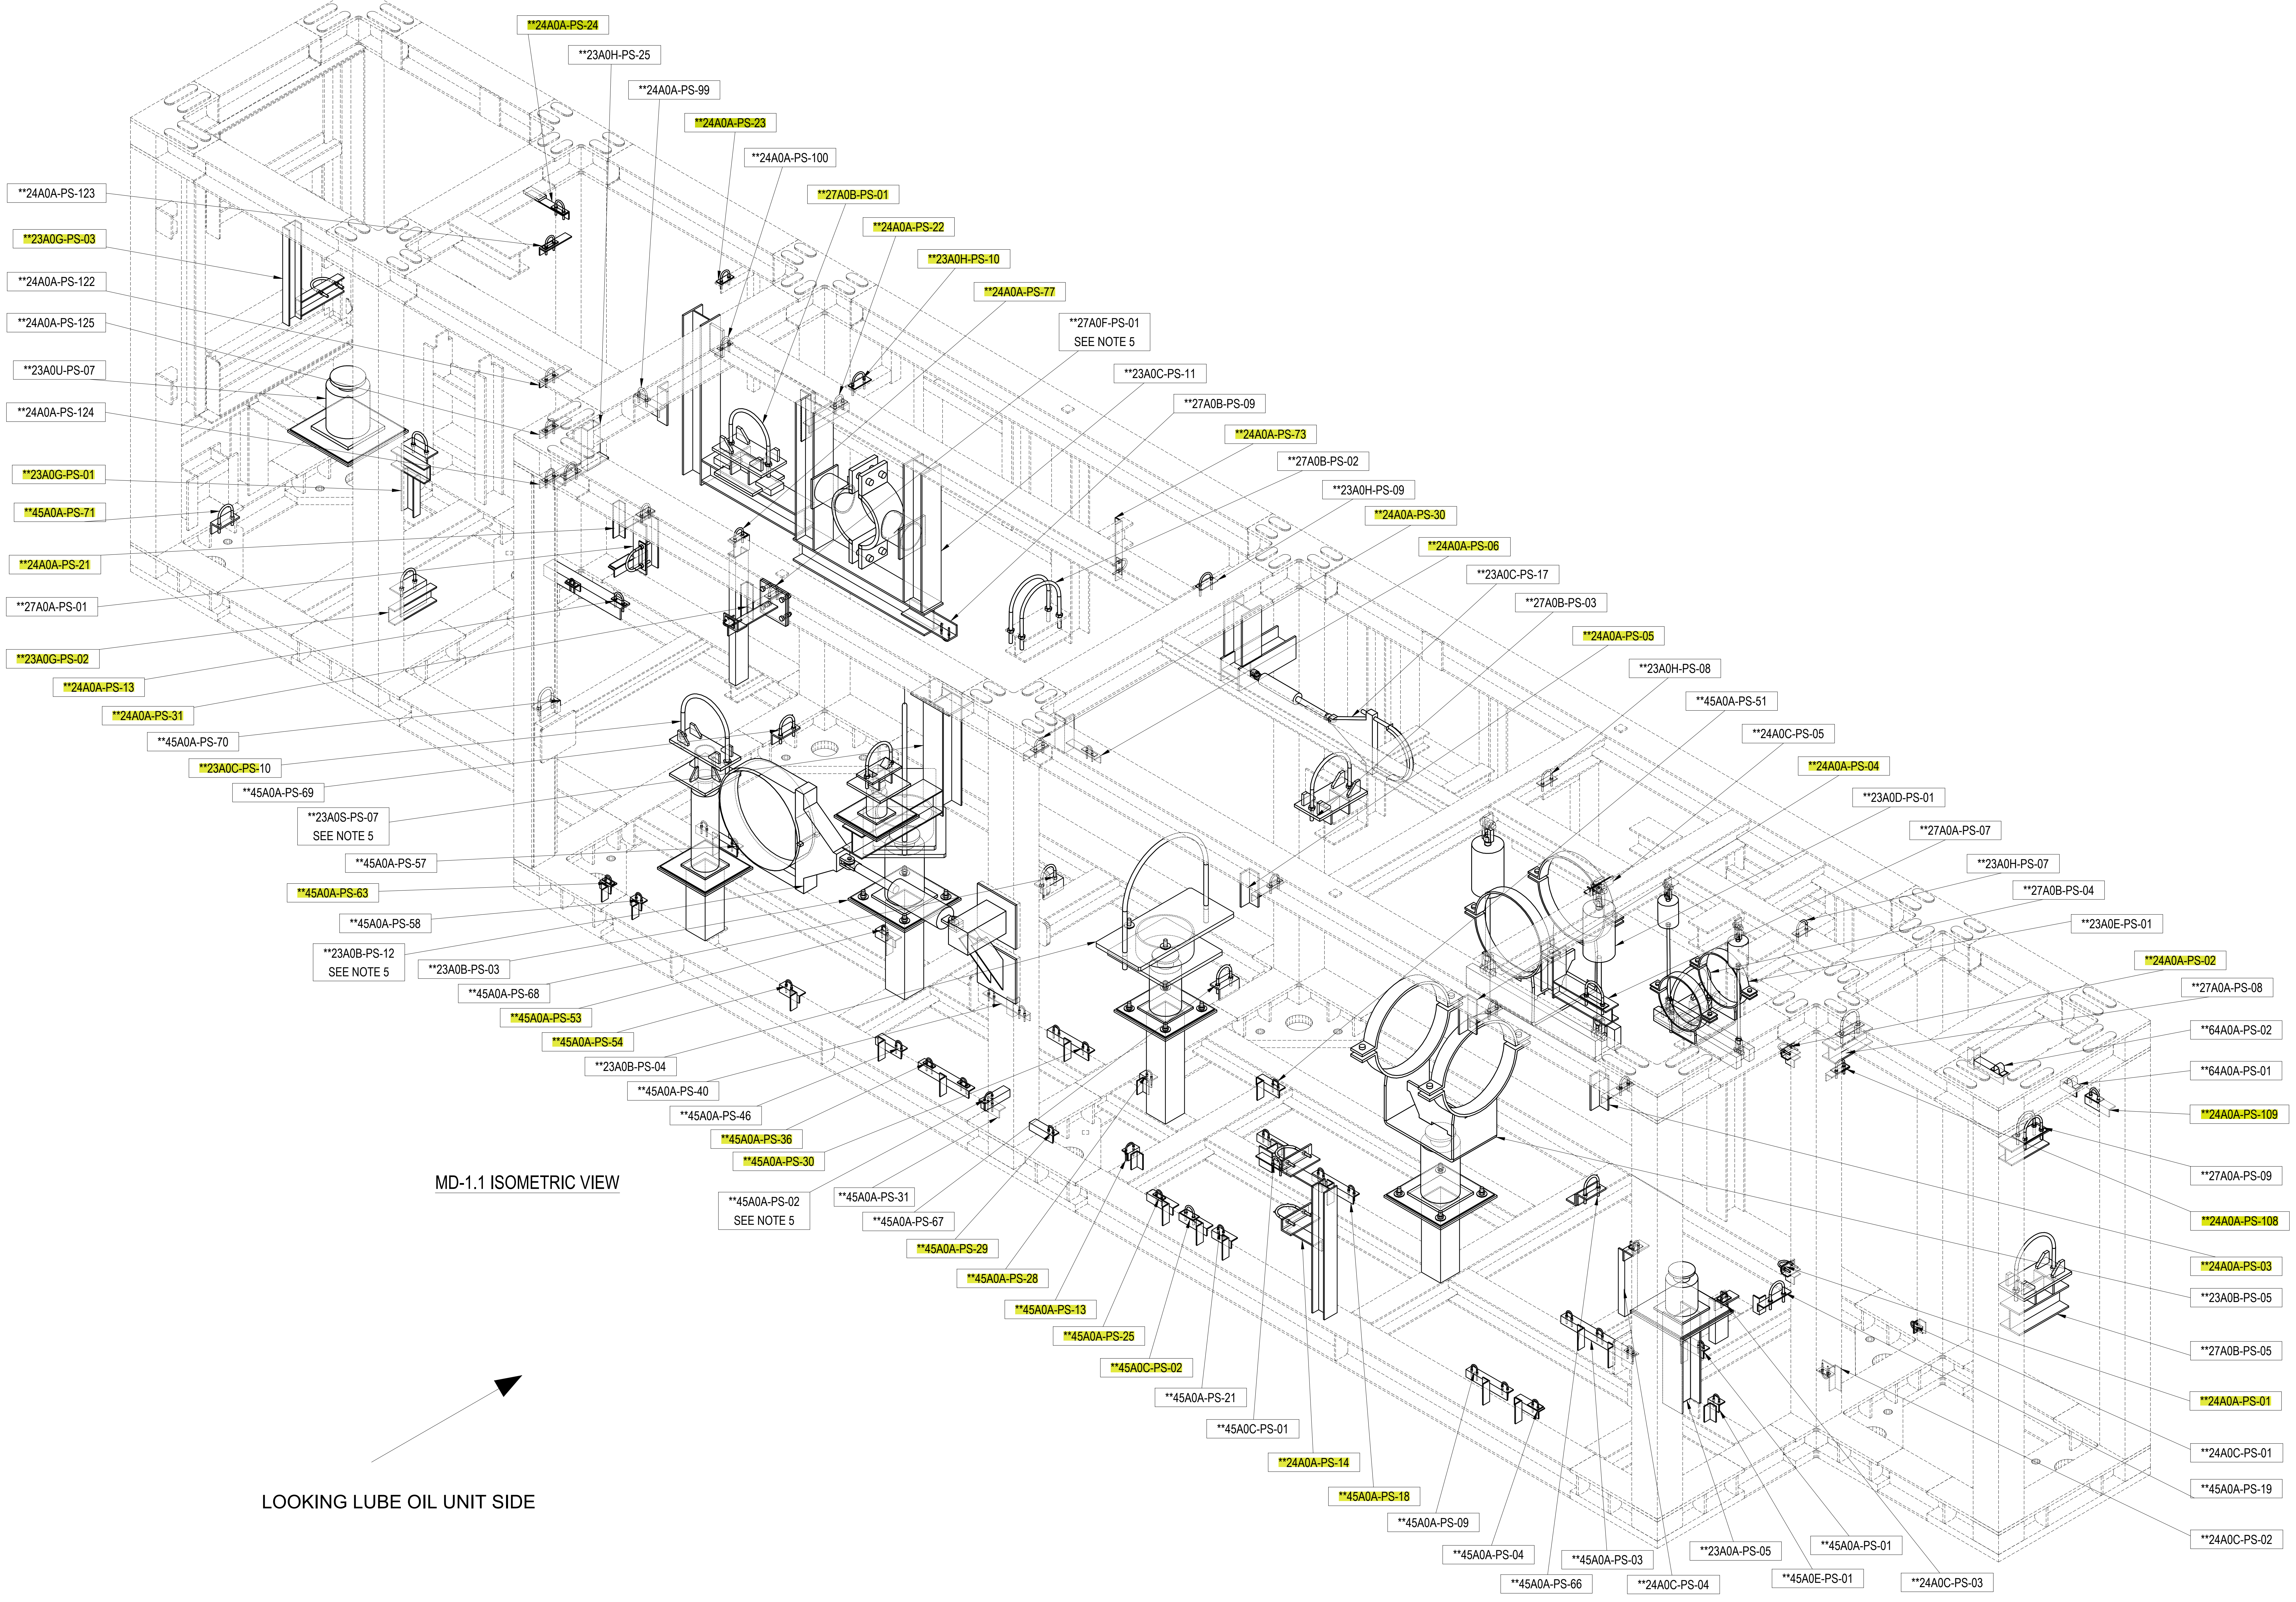
**24A0A-PS-24
**23A0H-PS-25
**24A0A-PS-99
**24A0A-PS-23
**24A0A-PS-100
**27A0B-PS-01
**24A0A-PS-22
**23A0H-PS-10
**24A0A-PS-77
**27A0F-PS-01
SEE NOTE 5
**23A0C-PS-11
**27A0B-PS-09
**24A0A-PS-73
**27A0B-PS-02
**23A0H-PS-09
**24A0A-PS-30
**24A0A-PS-06
**23A0C-PS-17
**27A0B-PS-03
**24A0A-PS-05
**23A0H-PS-08
**45A0A-PS-51
**24A0C-PS-05
**24A0A-PS-04
**23A0D-PS-01
**27A0A-PS-07
**23A0H-PS-07
**27A0B-PS-04
**23A0E-PS-01
**24A0A-PS-02
**27A0A-PS-08
**64A0A-PS-02
**64A0A-PS-01
**24A0A-PS-109
**27A0A-PS-09
**24A0A-PS-108
**24A0A-PS-03
**23A0B-PS-05
**27A0B-PS-05
**24A0A-PS-01
**24A0C-PS-01
**45A0A-PS-19
**24A0C-PS-02
**24A0A-PS-123
**23A0G-PS-03
**24A0A-PS-122
**24A0A-PS-125
**23A0U-PS-07
**24A0A-PS-124
**23A0G-PS-01
**45A0A-PS-71
**24A0A-PS-21
**27A0A-PS-01
**23A0G-PS-02
**24A0A-PS-13
**24A0A-PS-31
**45A0A-PS-70
**23A0C-PS-10
**45A0A-PS-69
**23A0S-PS-07
SEE NOTE 5
**45A0A-PS-57
**45A0A-PS-63
**45A0A-PS-58
**23A0B-PS-12
SEE NOTE 5
**23A0B-PS-03
**45A0A-PS-68
**45A0A-PS-53
**45A0A-PS-54
**23A0B-PS-04
**45A0A-PS-40
**45A0A-PS-46
**45A0A-PS-36
**45A0A-PS-30
**45A0A-PS-02
SEE NOTE 5
**45A0A-PS-31
**45A0A-PS-67
**45A0A-PS-29
**45A0A-PS-28
**45A0A-PS-13
**45A0A-PS-25
**45A0C-PS-02
**45A0A-PS-21
**45A0C-PS-01
**24A0A-PS-14
**45A0A-PS-18
**45A0A-PS-09
**45A0A-PS-04
**45A0A-PS-66
**45A0A-PS-03
**24A0C-PS-04
**23A0A-PS-05
**45A0E-PS-01
**45A0A-PS-01
**24A0C-PS-03

MD-1.1 ISOMETRIC VIEW

LOOKING LUBE OIL UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX ➤ SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
-

ITEM NO
MDL-150

DWG NAME
MD-1.1 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.
-

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/6	1/20	A1

DRAWING NO
2E00140-CI-026-150

REV.
0

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-05	**23A0A-9	
2	**23A0B-PS-03	**23A0B-16	
3	**23A0B-PS-04	**23A0B-22	
4	**23A0B-PS-05	**23A0B-22	
5	**23A0B-PS-12	**23A0B-15	SEE NOTE 5
6	**23A0C-PS-10	**23A0C-16	
7	**23A0C-PS-11	**23A0C-16	
8	**23A0C-PS-17	**23A0C-24	
9	**23A0D-PS-01	**23A0D-2	
10	**23A0E-PS-01	**23A0E-3	
11	**23A0G-PS-01	**23A0G-12	
12	**23A0G-PS-02	**23A0G-12	
13	**23A0G-PS-03	**23A0G-12	
14	**23A0H-PS-07	**23A0H-6	
15	**23A0H-PS-08	**23A0H-6	
16	**23A0H-PS-09	**23A0H-5	
17	**23A0H-PS-10	**23A0H-5	
18	**23A0H-PS-25	**23A0H-21	
19	**23A0S-PS-07	**23A0S-24	SEE NOTE 5
20	**23A0U-PS-07	**23A0U-24	
21	**24A0A-PS-01	**24A0A-22	
22	**24A0A-PS-02	**24A0A-22	
23	**24A0A-PS-03	**24A0A-25	
24	**24A0A-PS-04	**24A0A-25	
25	**24A0A-PS-05	**24A0A-27	
26	**24A0A-PS-06	**24A0A-28	
27	**24A0A-PS-100	**24A0A-13	
28	**24A0A-PS-108	**24A0A-24	
29	**24A0A-PS-109	**24A0A-24	
30	**24A0A-PS-122	AIR CHAMBER	
31	**24A0A-PS-123	AIR CHAMBER	
32	**24A0A-PS-124	AIR CHAMBER	
33	**24A0A-PS-125	AIR CHAMBER	
34	**24A0A-PS-13	**24A0A-40	
35	**24A0A-PS-14	**24A0A-8	
36	**24A0A-PS-21	**24A0A-49	
37	**24A0A-PS-22	**24A0A-50	
38	**24A0A-PS-23	**24A0A-52	
39	**24A0A-PS-24	**24A0A-52	
40	**24A0A-PS-30	**24A0A-28	
41	**24A0A-PS-31	**24A0A-28	
42	**24A0A-PS-73	**24A0A-50	
43	**24A0A-PS-77	**24A0A-51	
44	**24A0A-PS-99	**24A0A-14	
45	**24A0C-PS-01	**24A0C-4	
46	**24A0C-PS-02	**24A0C-3	
47	**24A0C-PS-03	**24A0C-6	
48	**24A0C-PS-04	**24A0C-6	
49	**24A0C-PS-05	**24A0C-6	
50	**27A0A-PS-01	**27A0A-6	
51	**27A0A-PS-07	**27A0A-10	
52	**27A0A-PS-08	**27A0A-10	
53	**27A0A-PS-09	**27A0A-10	
54	**27A0B-PS-01	**27A0B-1	
55	**27A0B-PS-02	**27A0B-3	
56	**27A0B-PS-03	**27A0B-3	
57	**27A0B-PS-04	**27A0B-4	
58	**27A0B-PS-05	**27A0B-5	
59	**27A0B-PS-09	**27A0B-24	
60	**27A0F-PS-01	**27A0F-6	SEE NOTE 5
61	**45A0A-PS-01	**45A0A-59	
62	**45A0A-PS-02	**45A0A-47	SEE NOTE 5
63	**45A0A-PS-03	**45A0A-59	
64	**45A0A-PS-04	**45A0A-59	
65	**45A0A-PS-09	**45A0A-59	
66	**45A0A-PS-13	**45A0A-48	
67	**45A0A-PS-18	**45A0A-59	
68	**45A0A-PS-19	**45A0A-59	
69	**45A0A-PS-21	**45A0A-59	
70	**45A0A-PS-25	**45A0A-59	
71	**45A0A-PS-28	**45A0A-59	
72	**45A0A-PS-29	**45A0A-50	
73	**45A0A-PS-30	**45A0A-58	
74	**45A0A-PS-31	**45A0A-58	
75	**45A0A-PS-36	**45A0A-58	
76	**45A0A-PS-40	**45A0A-58	
77	**45A0A-PS-46	**45A0A-58	
78	**45A0A-PS-51	**45A0A-59	
79	**45A0A-PS-53	**45A0A-58	
80	**45A0A-PS-54	**45A0A-58	
81	**45A0A-PS-57	**45A0A-58	
82	**45A0A-PS-58	**45A0A-58	
83	**45A0A-PS-63	**45A0A-58	
84	**45A0A-PS-66	**45A0A-59	
85	**45A0A-PS-67	**45A0A-58	
86	**45A0A-PS-68	**45A0A-58	
87	**45A0A-PS-69	**45A0A-58	
88	**45A0A-PS-70	**45A0A-58	
89	**45A0A-PS-71	**45A0A-57	
90	**45A0C-PS-01	**45A0A-59 **45A0C-1	
91	**45A0C-PS-02	**45A0C-1	
92	**45A0E-PS-01	**45A0E-1	
93	**64A0A-PS-01	FFS	
94	**64A0A-PS-02	FFS	

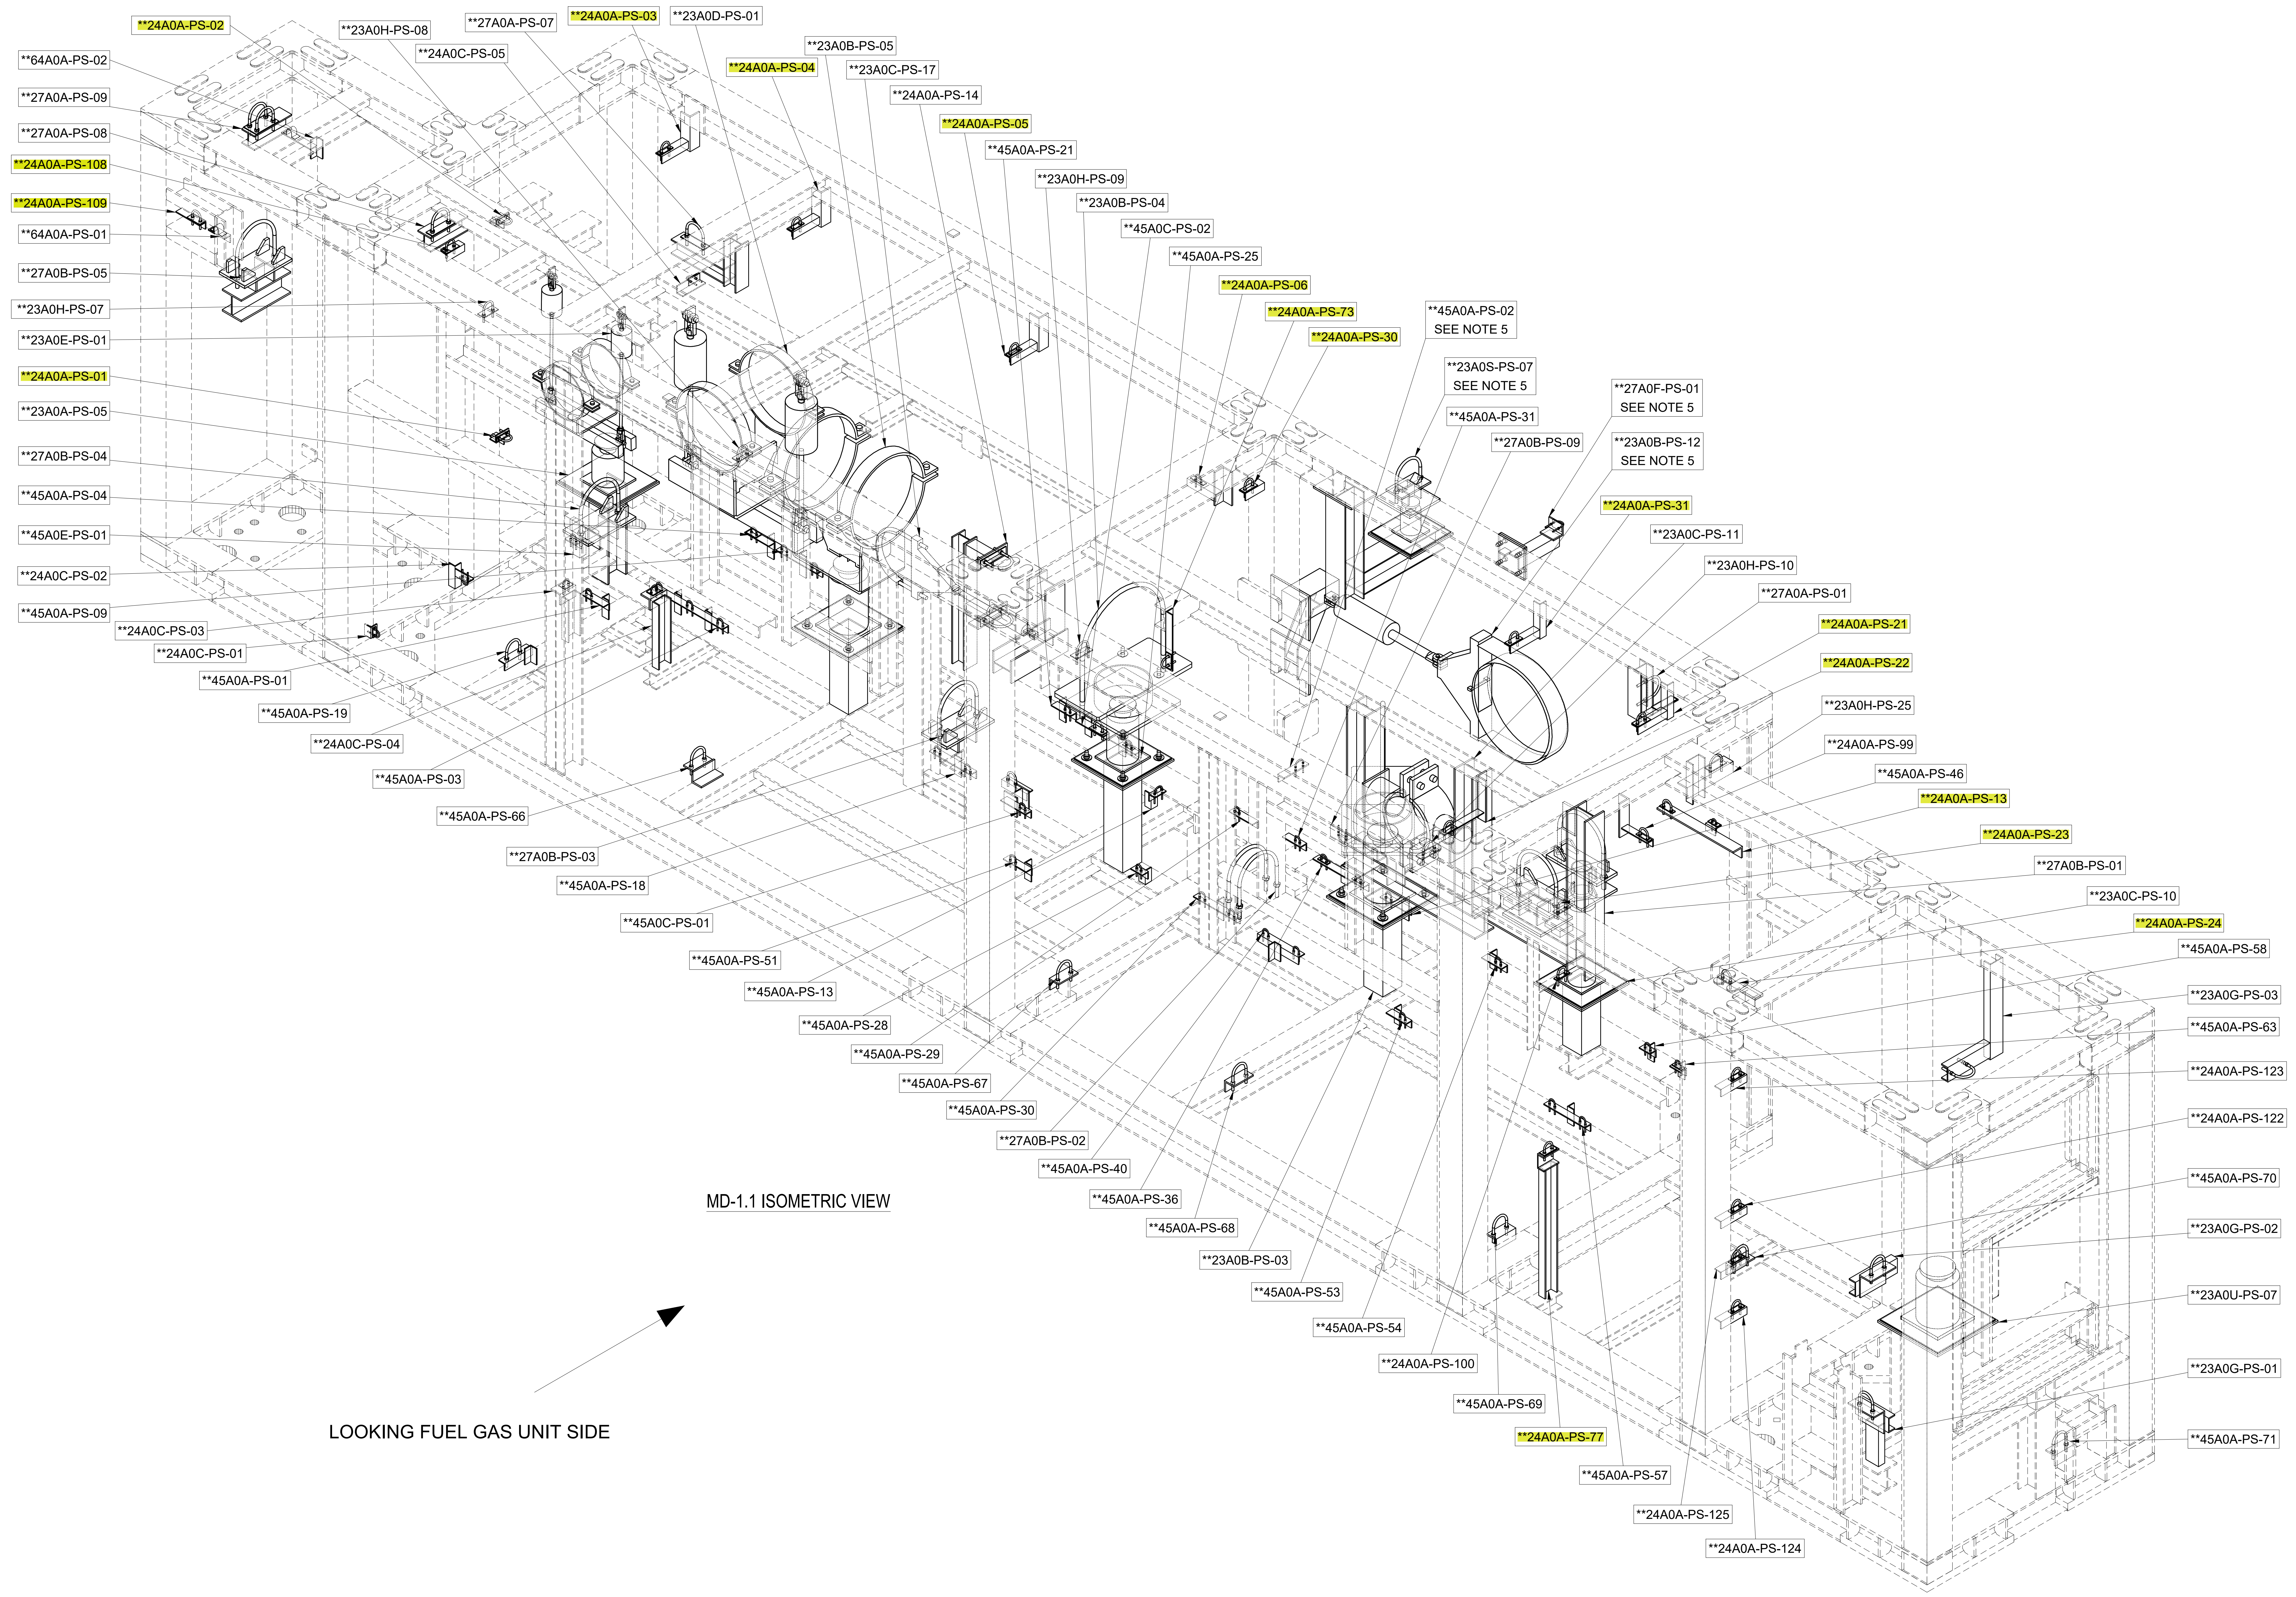
**24A0A-PS-02
**23A0H-PS-08
**27A0A-PS-07
**24A0A-PS-03
**23A0D-PS-01
**64A0A-PS-02
**24A0C-PS-05
**23A0B-PS-05
**24A0A-PS-04
**23A0C-PS-17
**27A0A-PS-09
**24A0A-PS-14
**27A0A-PS-08
**24A0A-PS-05
**45A0A-PS-21
**24A0A-PS-108
**23A0H-PS-09
**24A0A-PS-109
**23A0B-PS-04
**64A0A-PS-01
**45A0C-PS-02
**45A0A-PS-25
**27A0B-PS-05
**24A0A-PS-06
**23A0H-PS-07
**24A0A-PS-73
**45A0A-PS-02
SEE NOTE 5
**23A0E-PS-01
**24A0A-PS-30
**23A0S-PS-07
SEE NOTE 5
**24A0A-PS-01
**27A0F-PS-01
SEE NOTE 5
**23A0A-PS-05
**45A0A-PS-31
**27A0B-PS-09
**23A0B-PS-12
SEE NOTE 5
**27A0B-PS-04
**45A0A-PS-04
**24A0A-PS-31
**23A0C-PS-11
**45A0E-PS-01
**23A0H-PS-10
**24A0C-PS-02
**27A0A-PS-01
**45A0A-PS-09
**24A0C-PS-03
**24A0A-PS-21
**24A0C-PS-01
**24A0A-PS-22
**45A0A-PS-01
**23A0H-PS-25
**45A0A-PS-19
**24A0C-PS-04
**24A0A-PS-99
**45A0A-PS-03
**45A0A-PS-46
**24A0A-PS-13
**45A0A-PS-66
**24A0A-PS-23
**27A0B-PS-03
**27A0B-PS-01
**45A0A-PS-18
**23A0C-PS-10
**45A0C-PS-01
**24A0A-PS-24
**45A0A-PS-58
**45A0A-PS-51
**23A0G-PS-03
**45A0A-PS-13
**45A0A-PS-28
**45A0A-PS-63
**45A0A-PS-29
**24A0A-PS-123
**45A0A-PS-67
**45A0A-PS-30
**24A0A-PS-122
**27A0B-PS-02
**45A0A-PS-40
**45A0A-PS-70
**45A0A-PS-36
**23A0G-PS-02
**45A0A-PS-68
**23A0B-PS-03
**23A0U-PS-07
**45A0A-PS-53
**45A0A-PS-54
**24A0A-PS-100
**23A0G-PS-01
**45A0A-PS-69
**24A0A-PS-77
**45A0A-PS-71
**45A0A-PS-57
**24A0A-PS-125
**24A0A-PS-124
LOOKING FUEL GAS UNIT SIDE

MD-1.1 ISOMETRIC VIEW

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME
MD-1.1 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	2/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

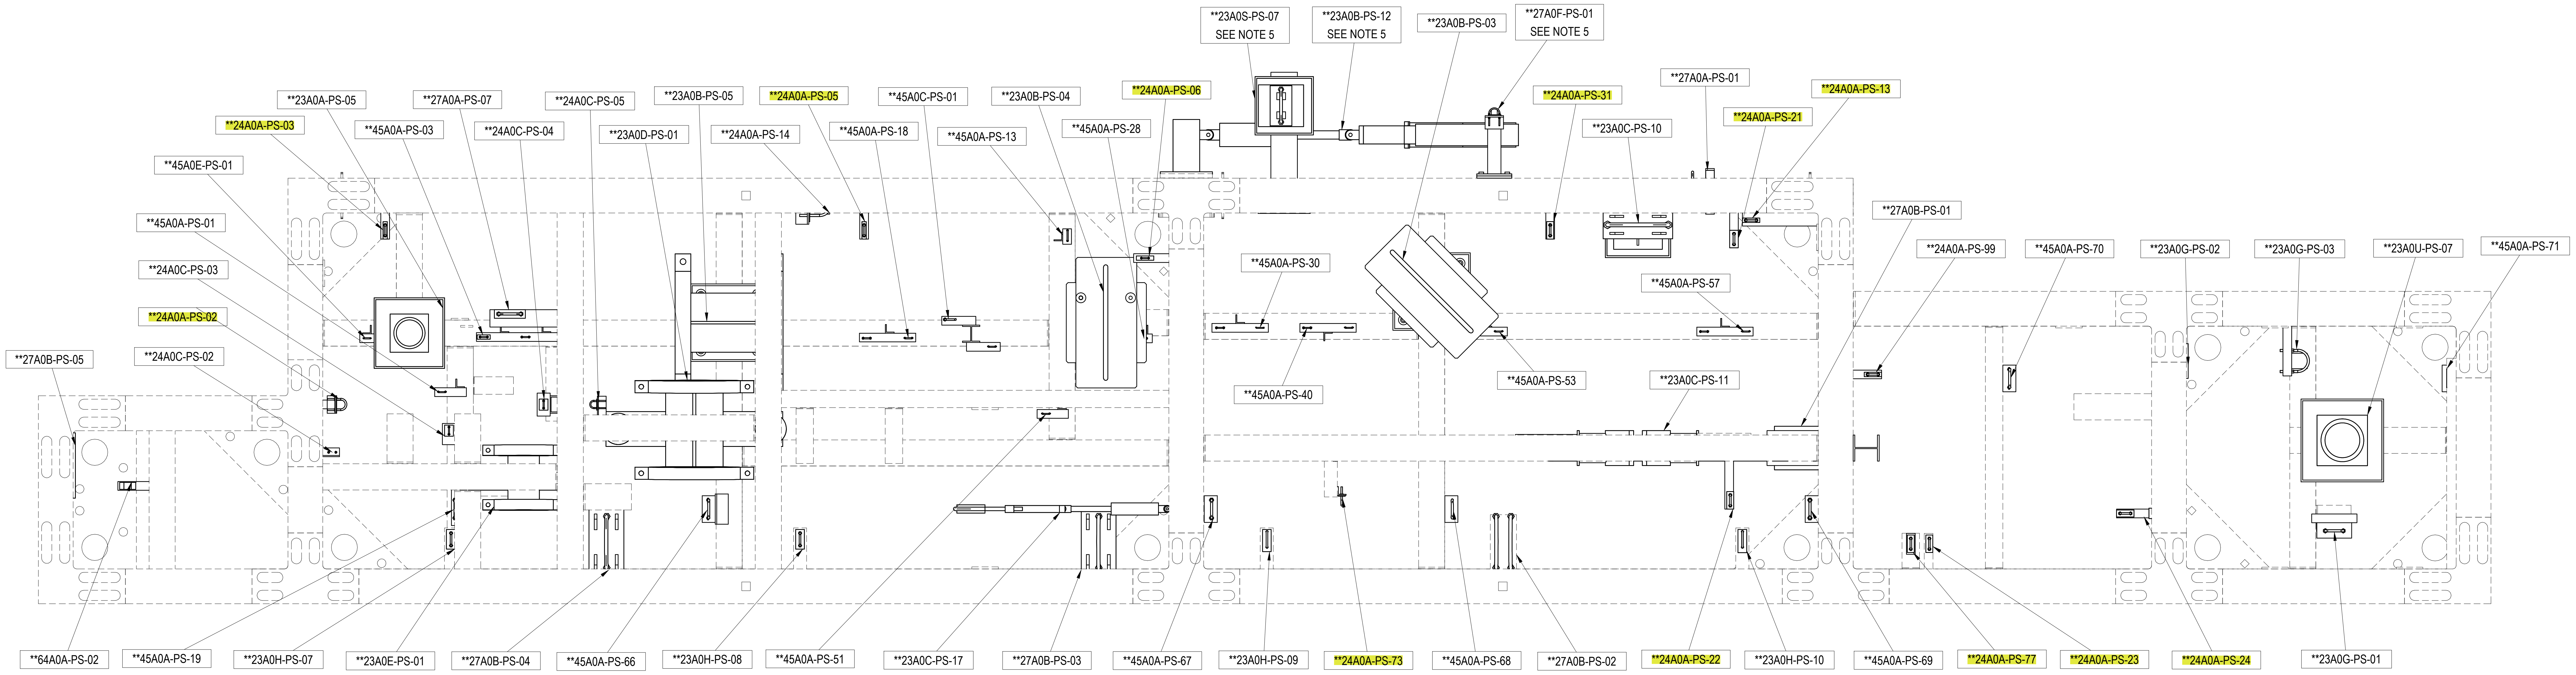
**23A0S-PS-07
SEE NOTE 5
**23A0B-PS-12
SEE NOTE 5
**23A0B-PS-03
**27A0F-PS-01
SEE NOTE 5
**23A0A-PS-05
**27A0A-PS-07
**24A0C-PS-05
**23A0B-PS-05
**24A0A-PS-05
**45A0C-PS-01
**23A0B-PS-04
**24A0A-PS-06
**24A0A-PS-31
**27A0A-PS-01
**24A0A-PS-13
**24A0A-PS-03
**45A0A-PS-03
**24A0C-PS-04
**23A0D-PS-01
**24A0A-PS-14
**45A0A-PS-18
**45A0A-PS-13
**45A0A-PS-28
**23A0C-PS-10
**24A0A-PS-21
**45A0E-PS-01
**45A0A-PS-01
**24A0C-PS-03
**24A0A-PS-02
**27A0B-PS-05
**24A0C-PS-02
**45A0A-PS-30
**45A0A-PS-40
**45A0A-PS-57
**45A0A-PS-53
**23A0C-PS-11
**27A0B-PS-01
**24A0A-PS-99
**45A0A-PS-70
**23A0G-PS-02
**23A0G-PS-03
**23A0U-PS-07
**45A0A-PS-71
**64A0A-PS-02
**45A0A-PS-19
**23A0H-PS-07
**23A0E-PS-01
**27A0B-PS-04
**45A0A-PS-66
**23A0H-PS-08
**45A0A-PS-51
**23A0C-PS-17
**27A0B-PS-03
**45A0A-PS-67
**23A0H-PS-09
**24A0A-PS-73
**45A0A-PS-68
**27A0B-PS-02
**24A0A-PS-22
**23A0H-PS-10
**45A0A-PS-69
**24A0A-PS-77
**24A0A-PS-23
**24A0A-PS-24
**23A0G-PS-01

MD-1.1 PLAN VIEW

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX ► SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME
MD-1.1 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	3/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

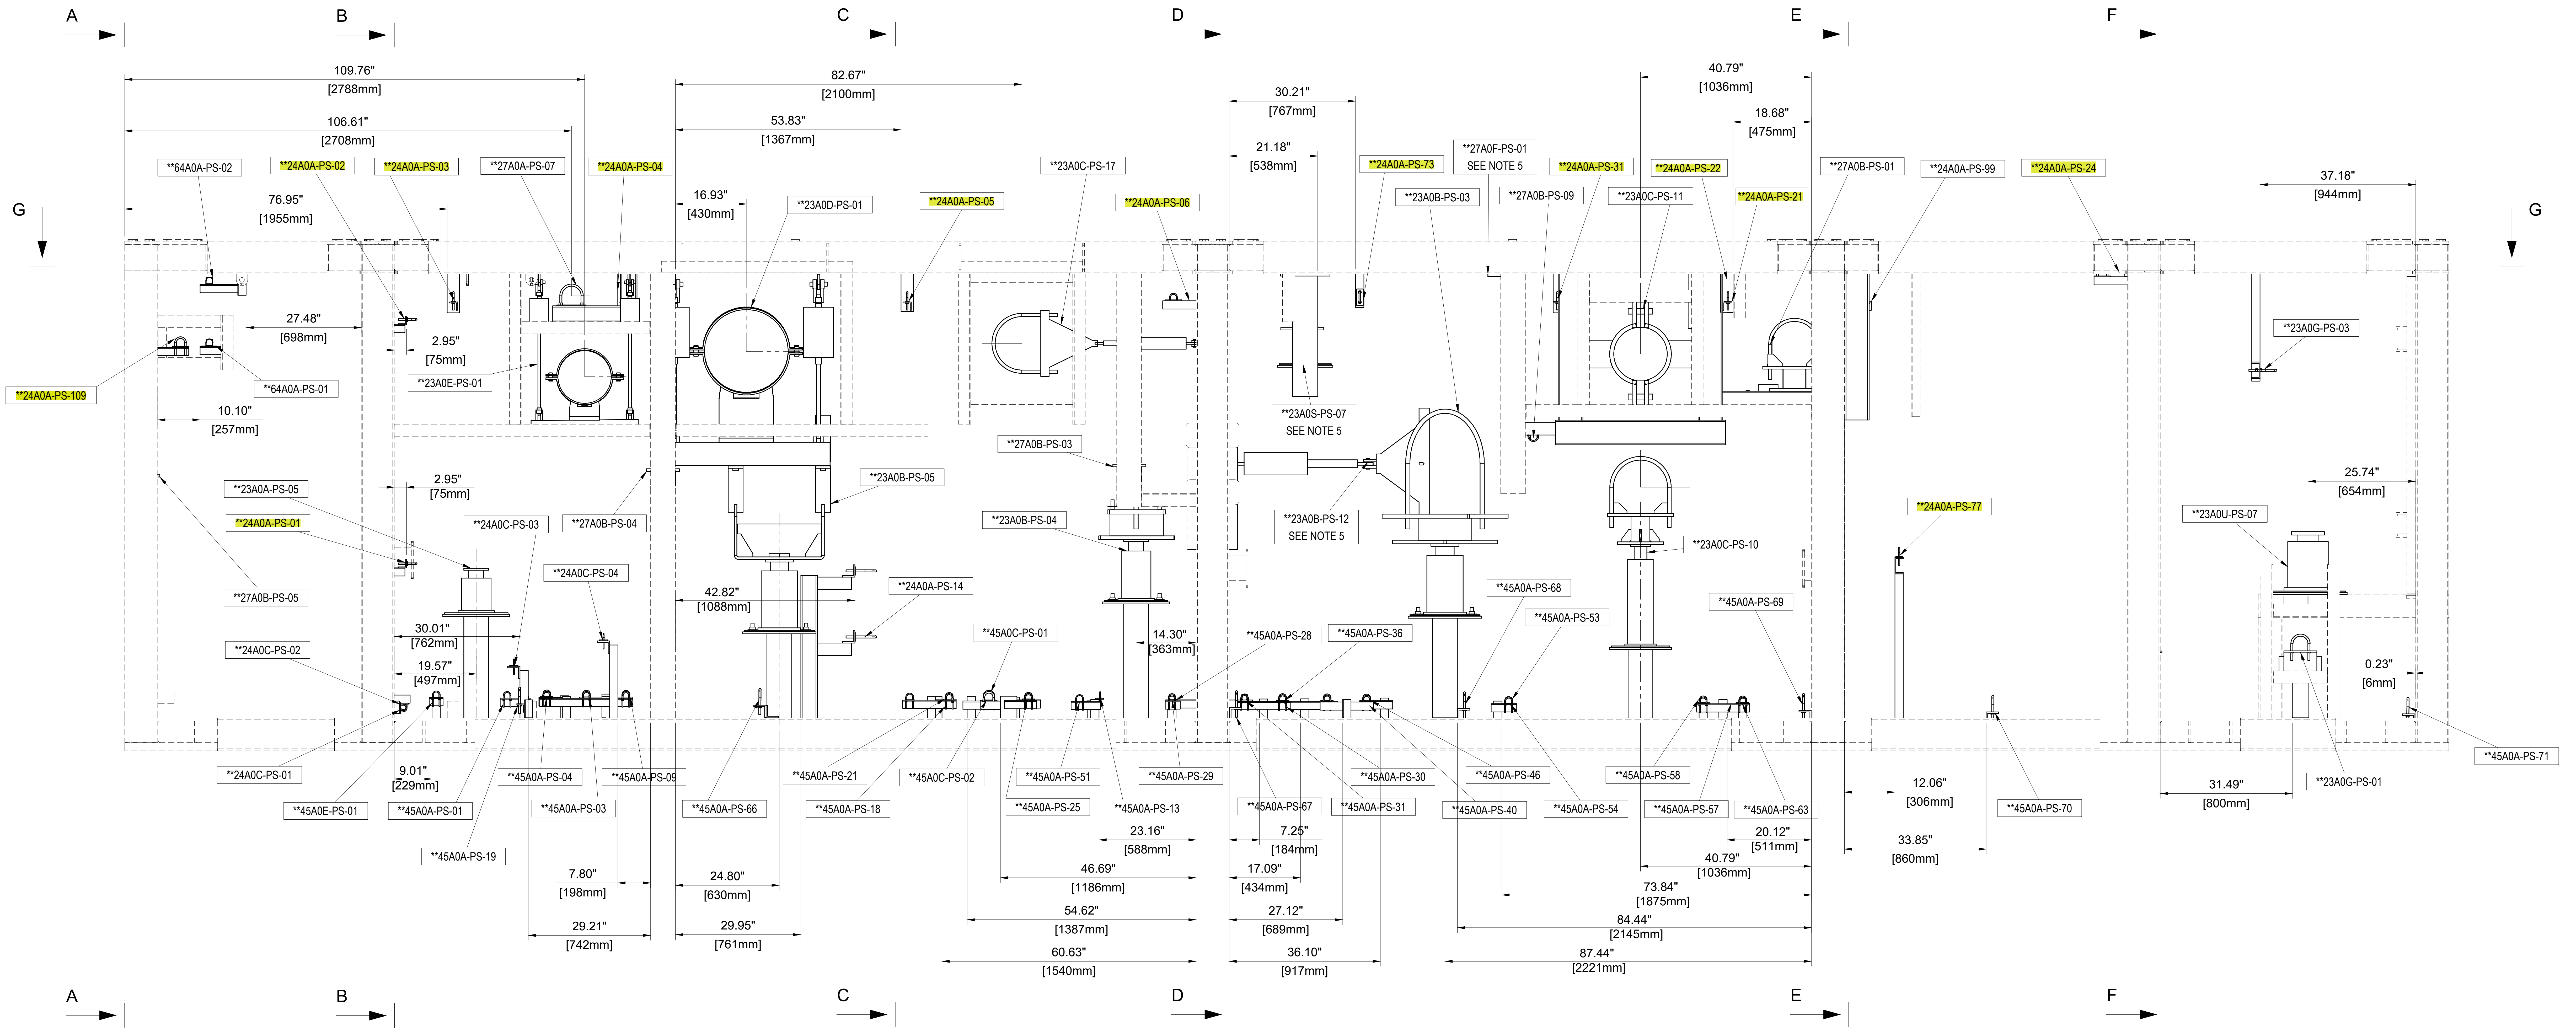
A
B
C
D
E
F
G
109.76"
[2788mm]
106.61"
[2708mm]
76.95"
[1955mm]
82.67"
[2100mm]
53.83"
[1367mm]
16.93"
[430mm]
30.21"
[767mm]
21.18"
[538mm]
40.79"
[1036mm]
18.68"
[475mm]
37.18"
[944mm]
**64A0A-PS-02
**24A0A-PS-02
**24A0A-PS-03
**27A0A-PS-07
**24A0A-PS-04
**23A0D-PS-01
**24A0A-PS-05
**23A0C-PS-17
**24A0A-PS-06
**24A0A-PS-73
**27A0F-PS-01
SEE NOTE 5
**23A0B-PS-03
**27A0B-PS-09
**24A0A-PS-31
**23A0C-PS-11
**24A0A-PS-22
**24A0A-PS-21
**27A0B-PS-01
**24A0A-PS-99
**24A0A-PS-24
27.48"
[698mm]
2.95"
[75mm]
**24A0A-PS-109
**64A0A-PS-01
**23A0E-PS-01
10.10"
[257mm]
**23A0G-PS-03
**23A0S-PS-07
SEE NOTE 5
**27A0B-PS-03
**23A0B-PS-05
**23A0A-PS-05
2.95"
[75mm]
**24A0A-PS-01
**24A0C-PS-03
**27A0B-PS-04
**23A0B-PS-04
**23A0B-PS-12
SEE NOTE 5
**24A0A-PS-77
25.74"
[654mm]
**23A0U-PS-07
**23A0C-PS-10
**27A0B-PS-05
**24A0C-PS-04
42.82"
[1088mm]
**24A0A-PS-14
**45A0A-PS-68
**45A0A-PS-69
**45A0A-PS-53
30.01"
[762mm]
**45A0C-PS-01
14.30"
[363mm]
**45A0A-PS-28
**45A0A-PS-36
**24A0C-PS-02
19.57"
[497mm]
0.23"
[6mm]
**45A0A-PS-71
**24A0C-PS-01
9.01"
[229mm]
**45A0A-PS-04
**45A0A-PS-09
**45A0A-PS-21
**45A0C-PS-02
**45A0A-PS-51
**45A0A-PS-29
**45A0A-PS-30
**45A0A-PS-46
**45A0A-PS-58
**45A0E-PS-01
**45A0A-PS-01
**45A0A-PS-03
**45A0A-PS-66
**45A0A-PS-18
**45A0A-PS-25
**45A0A-PS-13
**45A0A-PS-67
**45A0A-PS-31
**45A0A-PS-40
**45A0A-PS-54
**45A0A-PS-57
**45A0A-PS-63
12.06"
[306mm]
**45A0A-PS-70
31.49"
[800mm]
**23A0G-PS-01
**45A0A-PS-19
23.16"
[588mm]
7.25"
[184mm]
20.12"
[511mm]
33.85"
[860mm]
46.69"
[1186mm]
17.09"
[434mm]
40.79"
[1036mm]
7.80"
[198mm]
24.80"
[630mm]
54.62"
[1387mm]
27.12"
[689mm]
73.84"
[1875mm]
29.21"
[742mm]
29.95"
[761mm]
84.44"
[2145mm]
60.63"
[1540mm]
36.10"
[917mm]
87.44"
[2221mm]

MD-1.1 LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX ──► SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.
REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

CUSTOMER JOB NO
-

ITEM NO
MDL-150

DWG NAME
MD-1.1 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.
-

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	4/6	1/20	A1

DRAWING NO
2E00140-CI-026-150

REV.
0

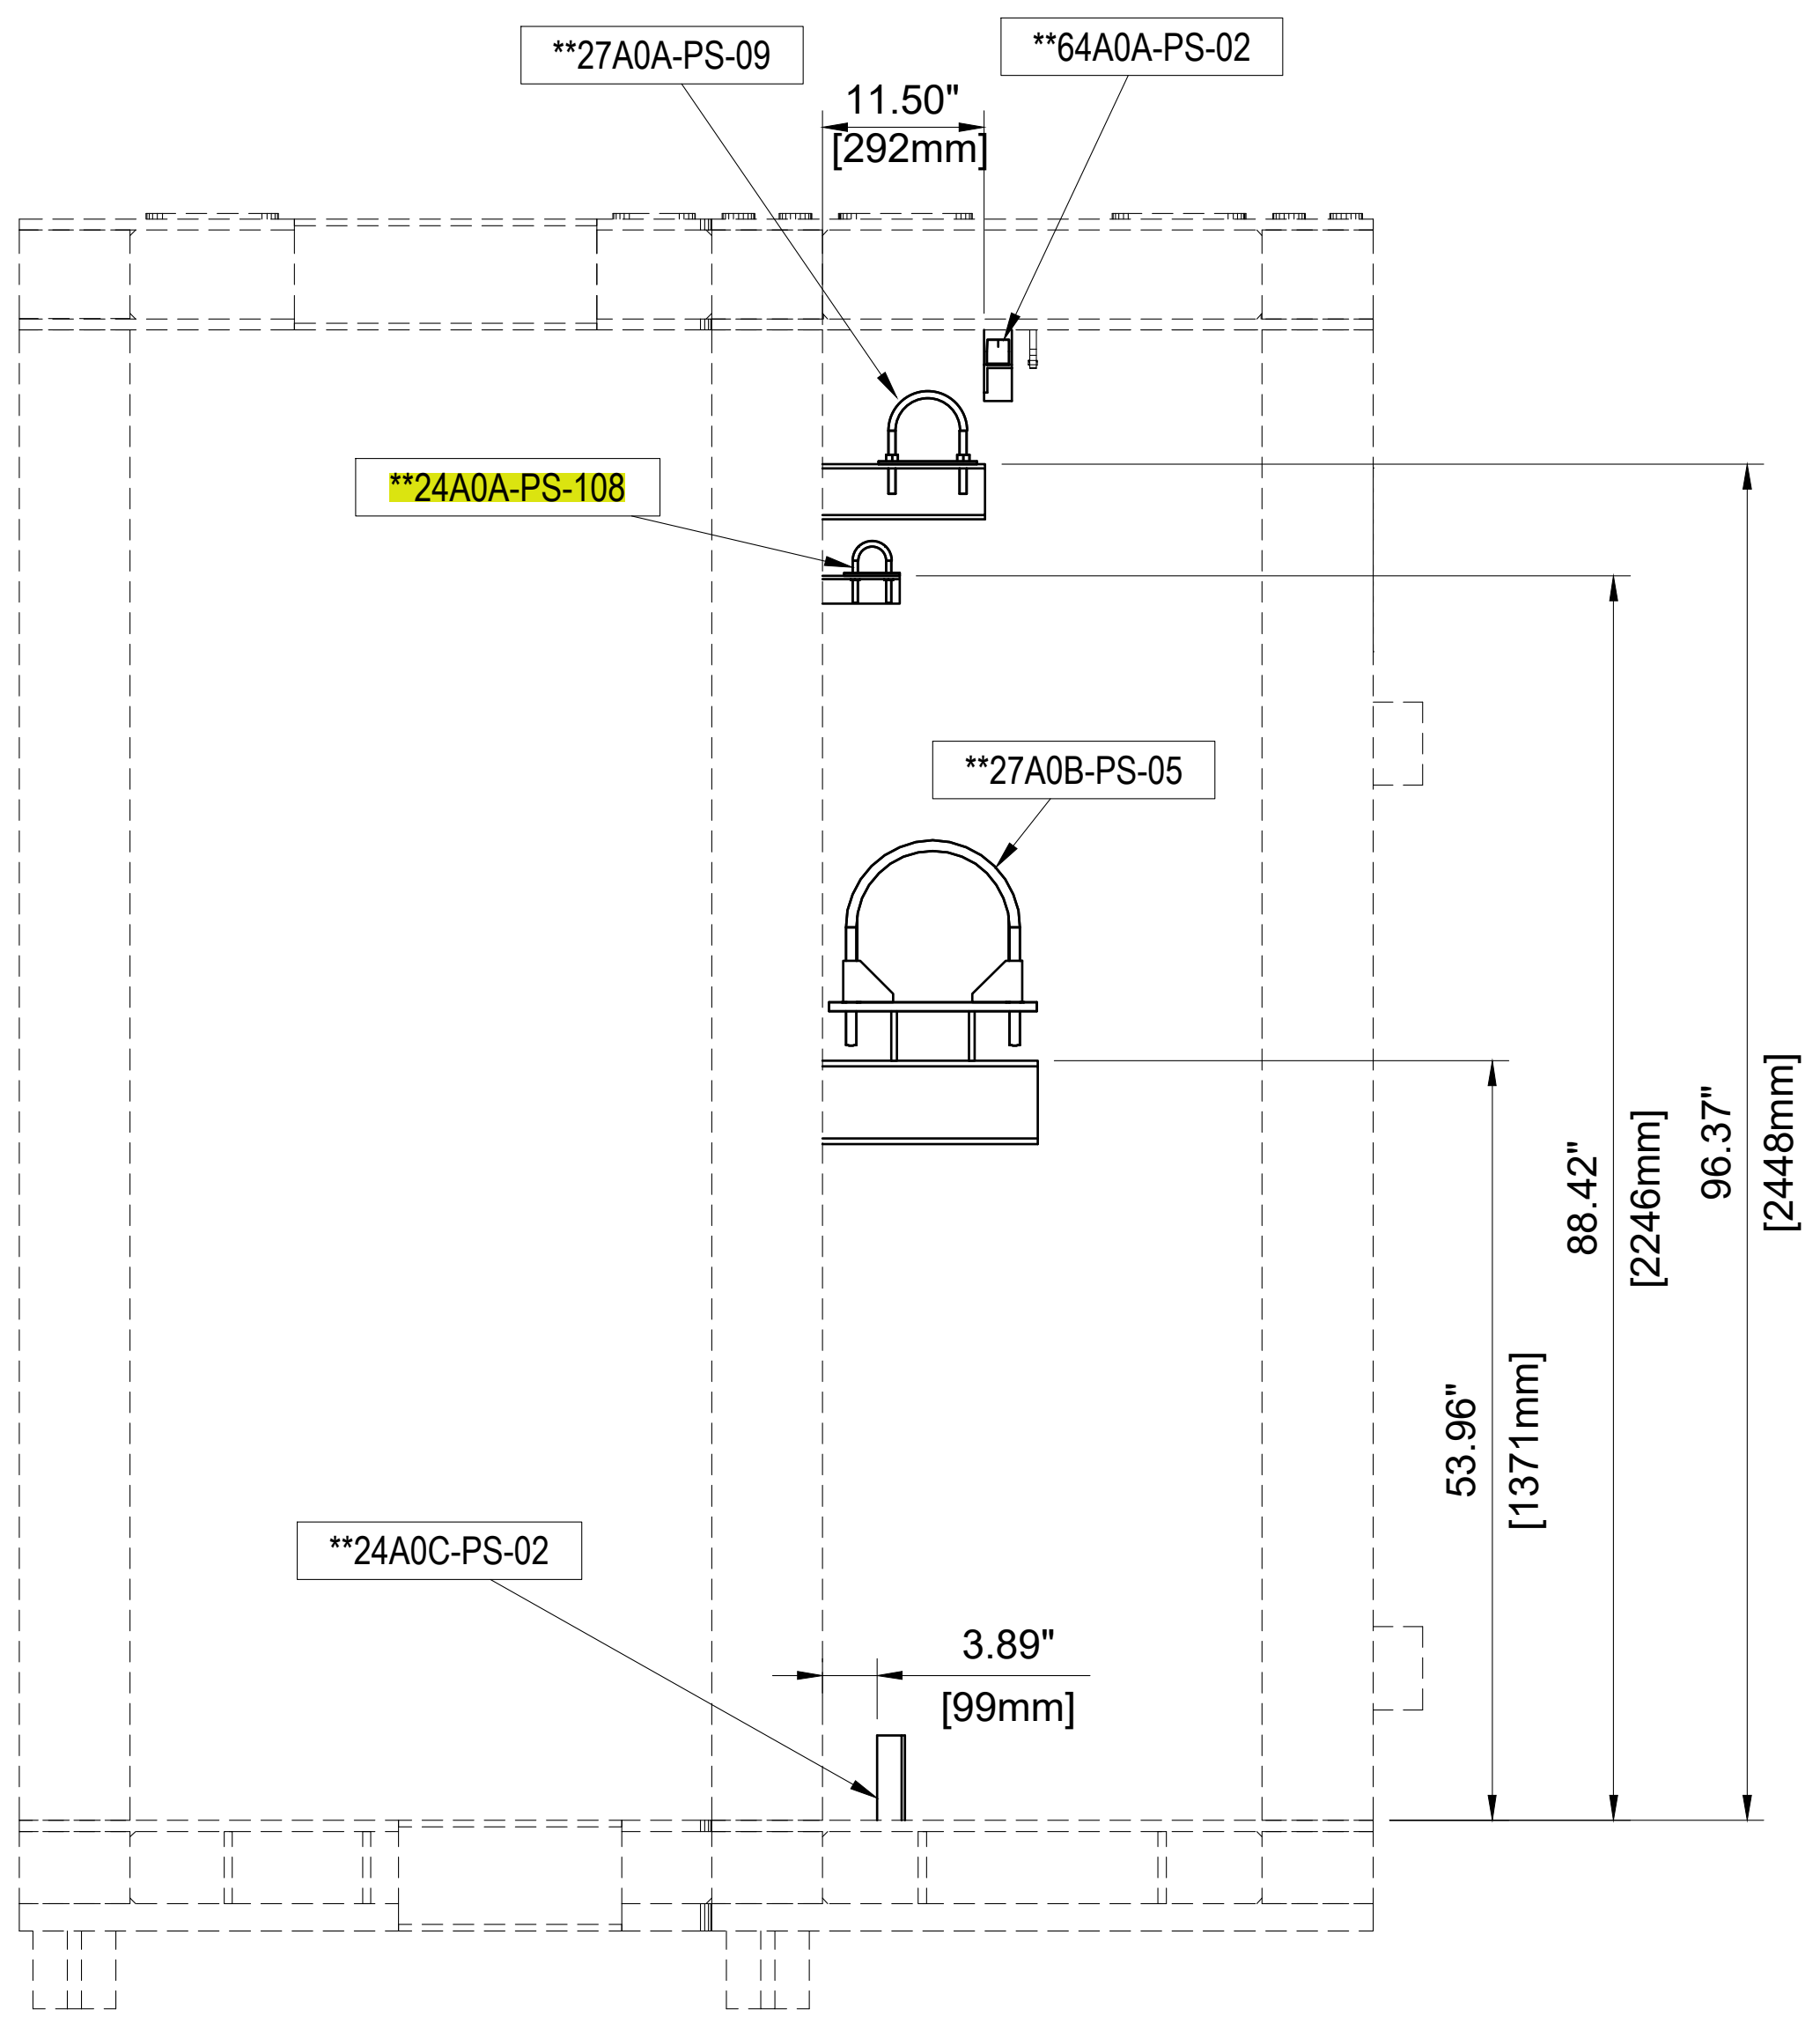
**27A0A-PS-09
**64A0A-PS-02
11.50"
[292mm]
**24A0A-PS-108
**27A0B-PS-05
53.96"
[1371mm]
88.42"
[2246mm]
96.37"
[2448mm]
**24A0C-PS-02
3.89"
[99mm]

MD-1.1 SECTION A-A

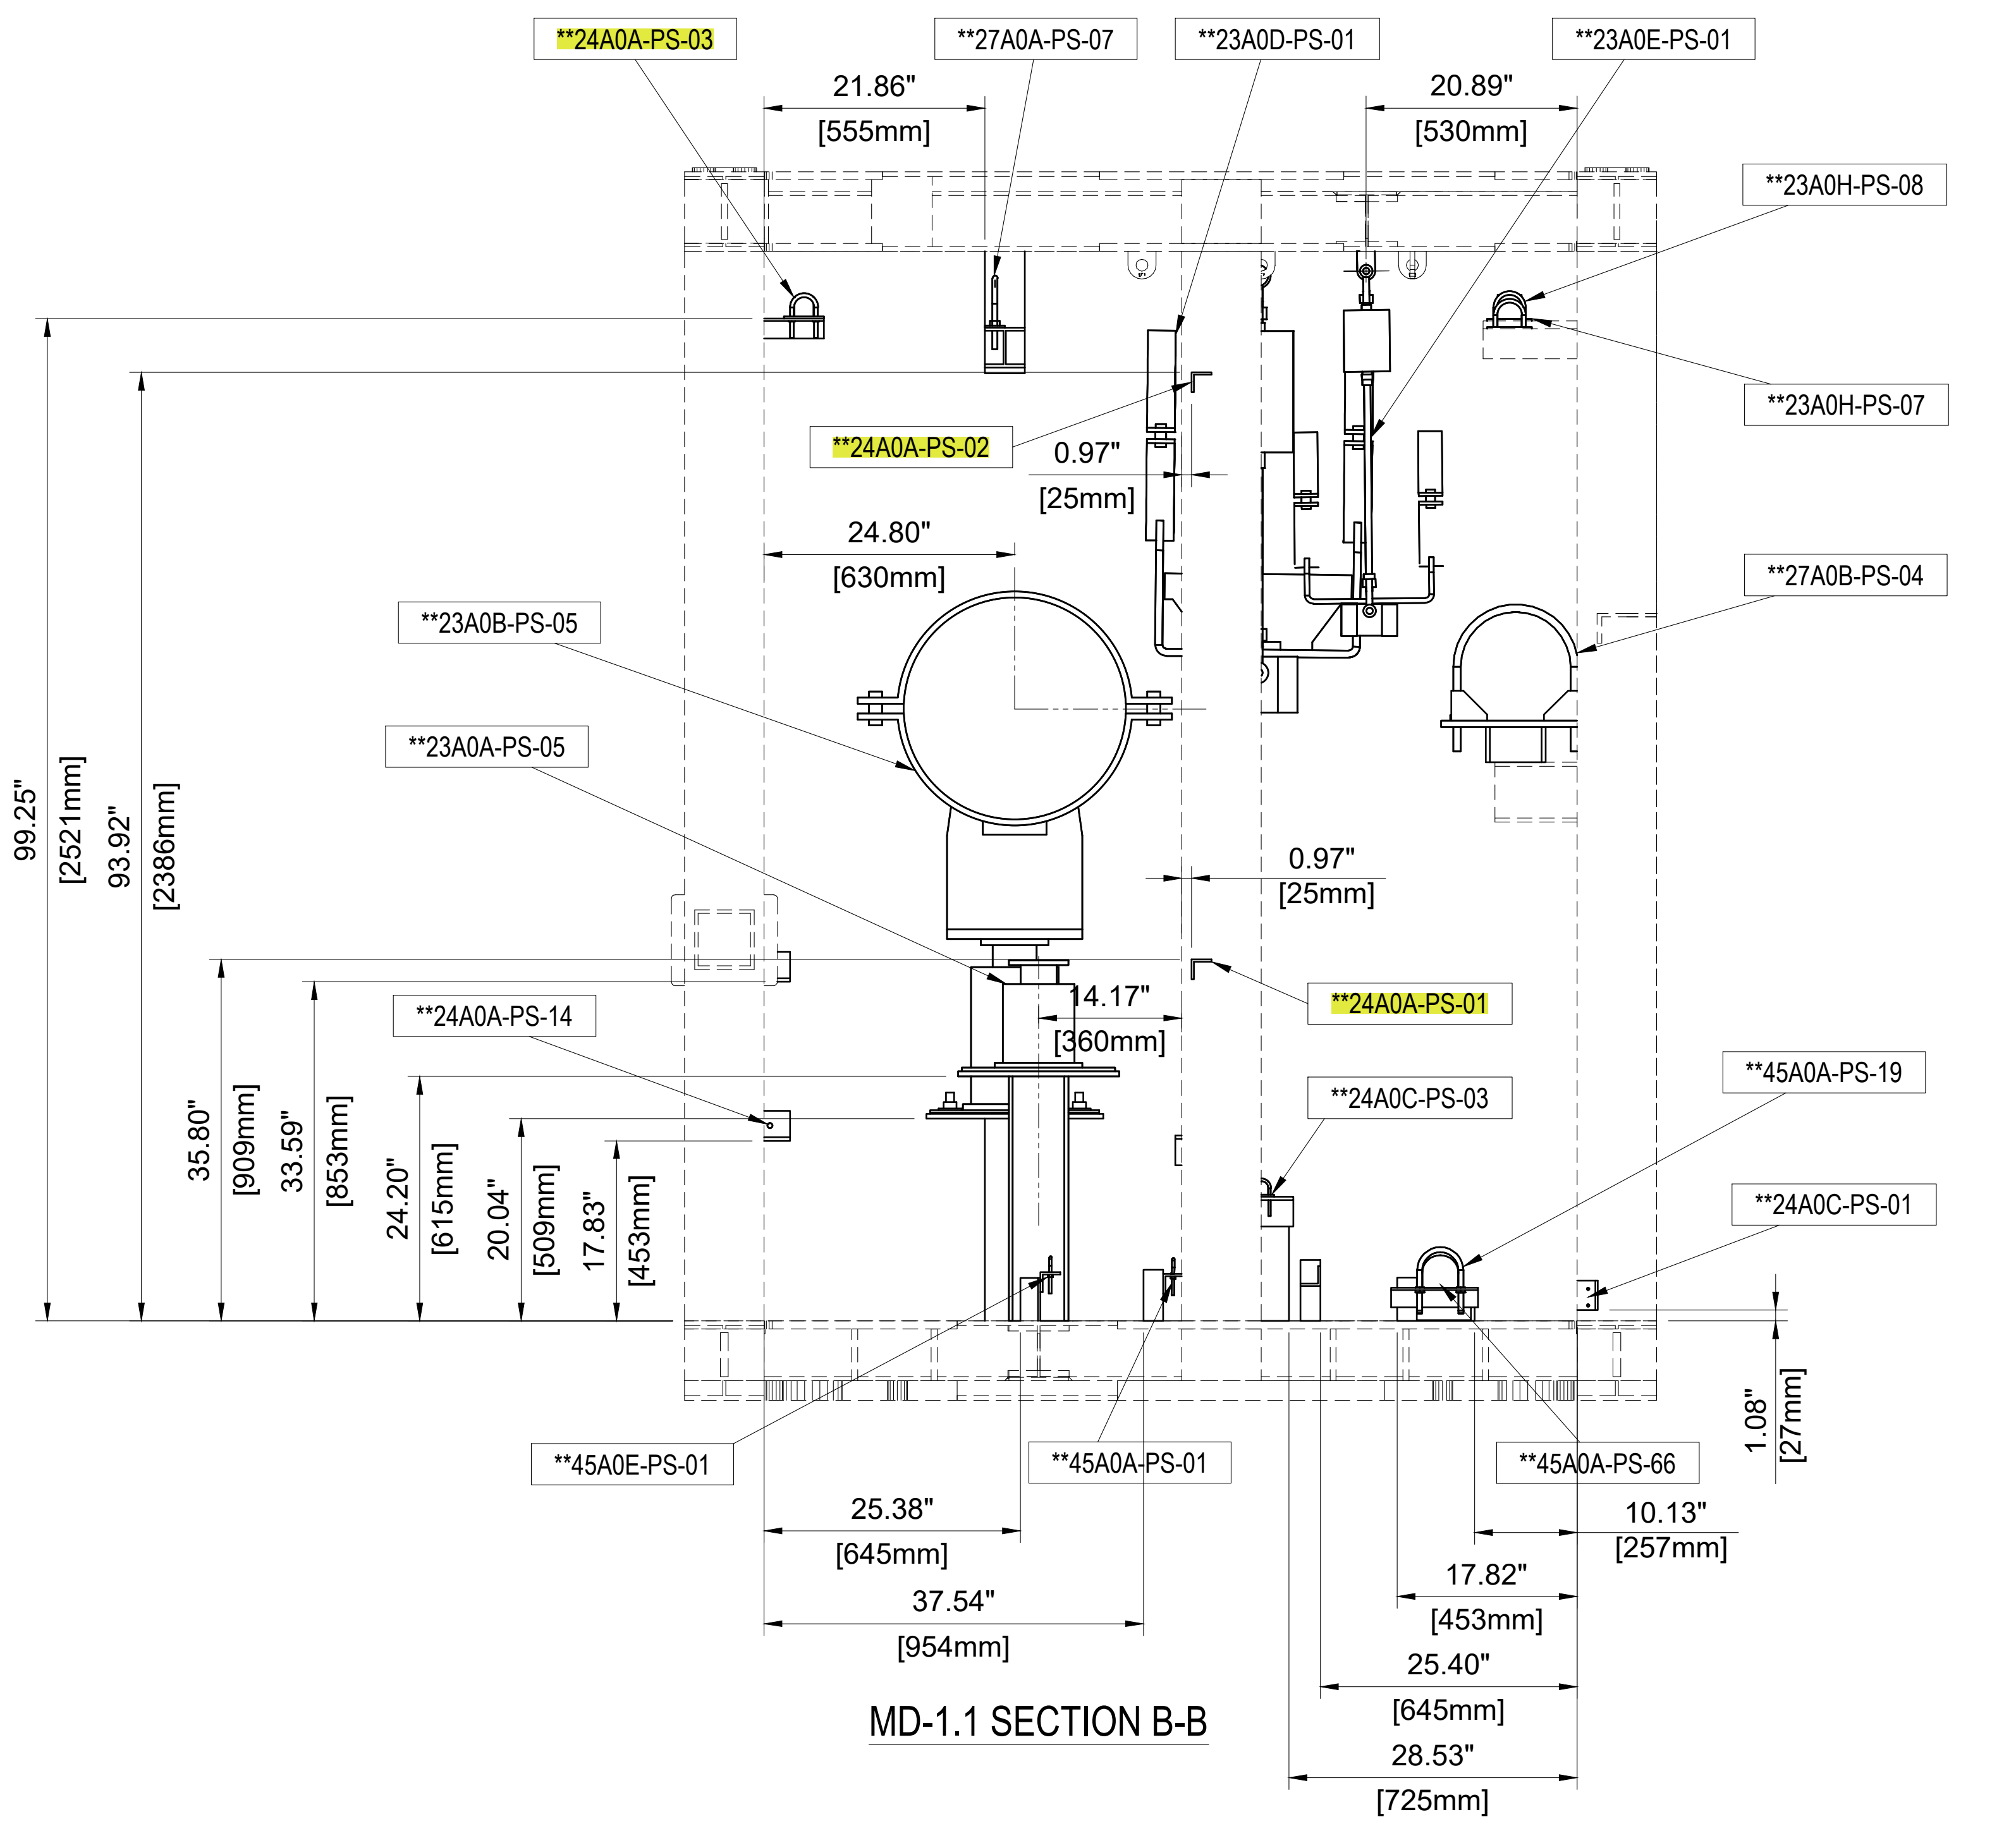
**24A0A-PS-03
**27A0A-PS-07
**23A0D-PS-01
**23A0E-PS-01
21.86"
[555mm]
20.89"
[530mm]
**23A0H-PS-08
**23A0H-PS-07
**24A0A-PS-02
0.97"
[25mm]
24.80"
[630mm]
**23A0B-PS-05
**27A0B-PS-04
**23A0A-PS-05
99.25"
[2521mm]
93.92"
[2386mm]
0.97"
[25mm]
**24A0A-PS-01
14.17"
[360mm]
**24A0A-PS-14
35.80"
[909mm]
33.59"
[853mm]
24.20"
[615mm]
20.04"
[509mm]
17.83"
[453mm]
**24A0C-PS-03
**45A0A-PS-19
**24A0C-PS-01
**45A0E-PS-01
**45A0A-PS-01
**45A0A-PS-66
1.08"
[27mm]
25.38"
[645mm]
10.13"
[257mm]
37.54"
[954mm]
17.82"
[453mm]
25.40"
[645mm]
28.53"
[725mm]

MD-1.1 SECTION B-B

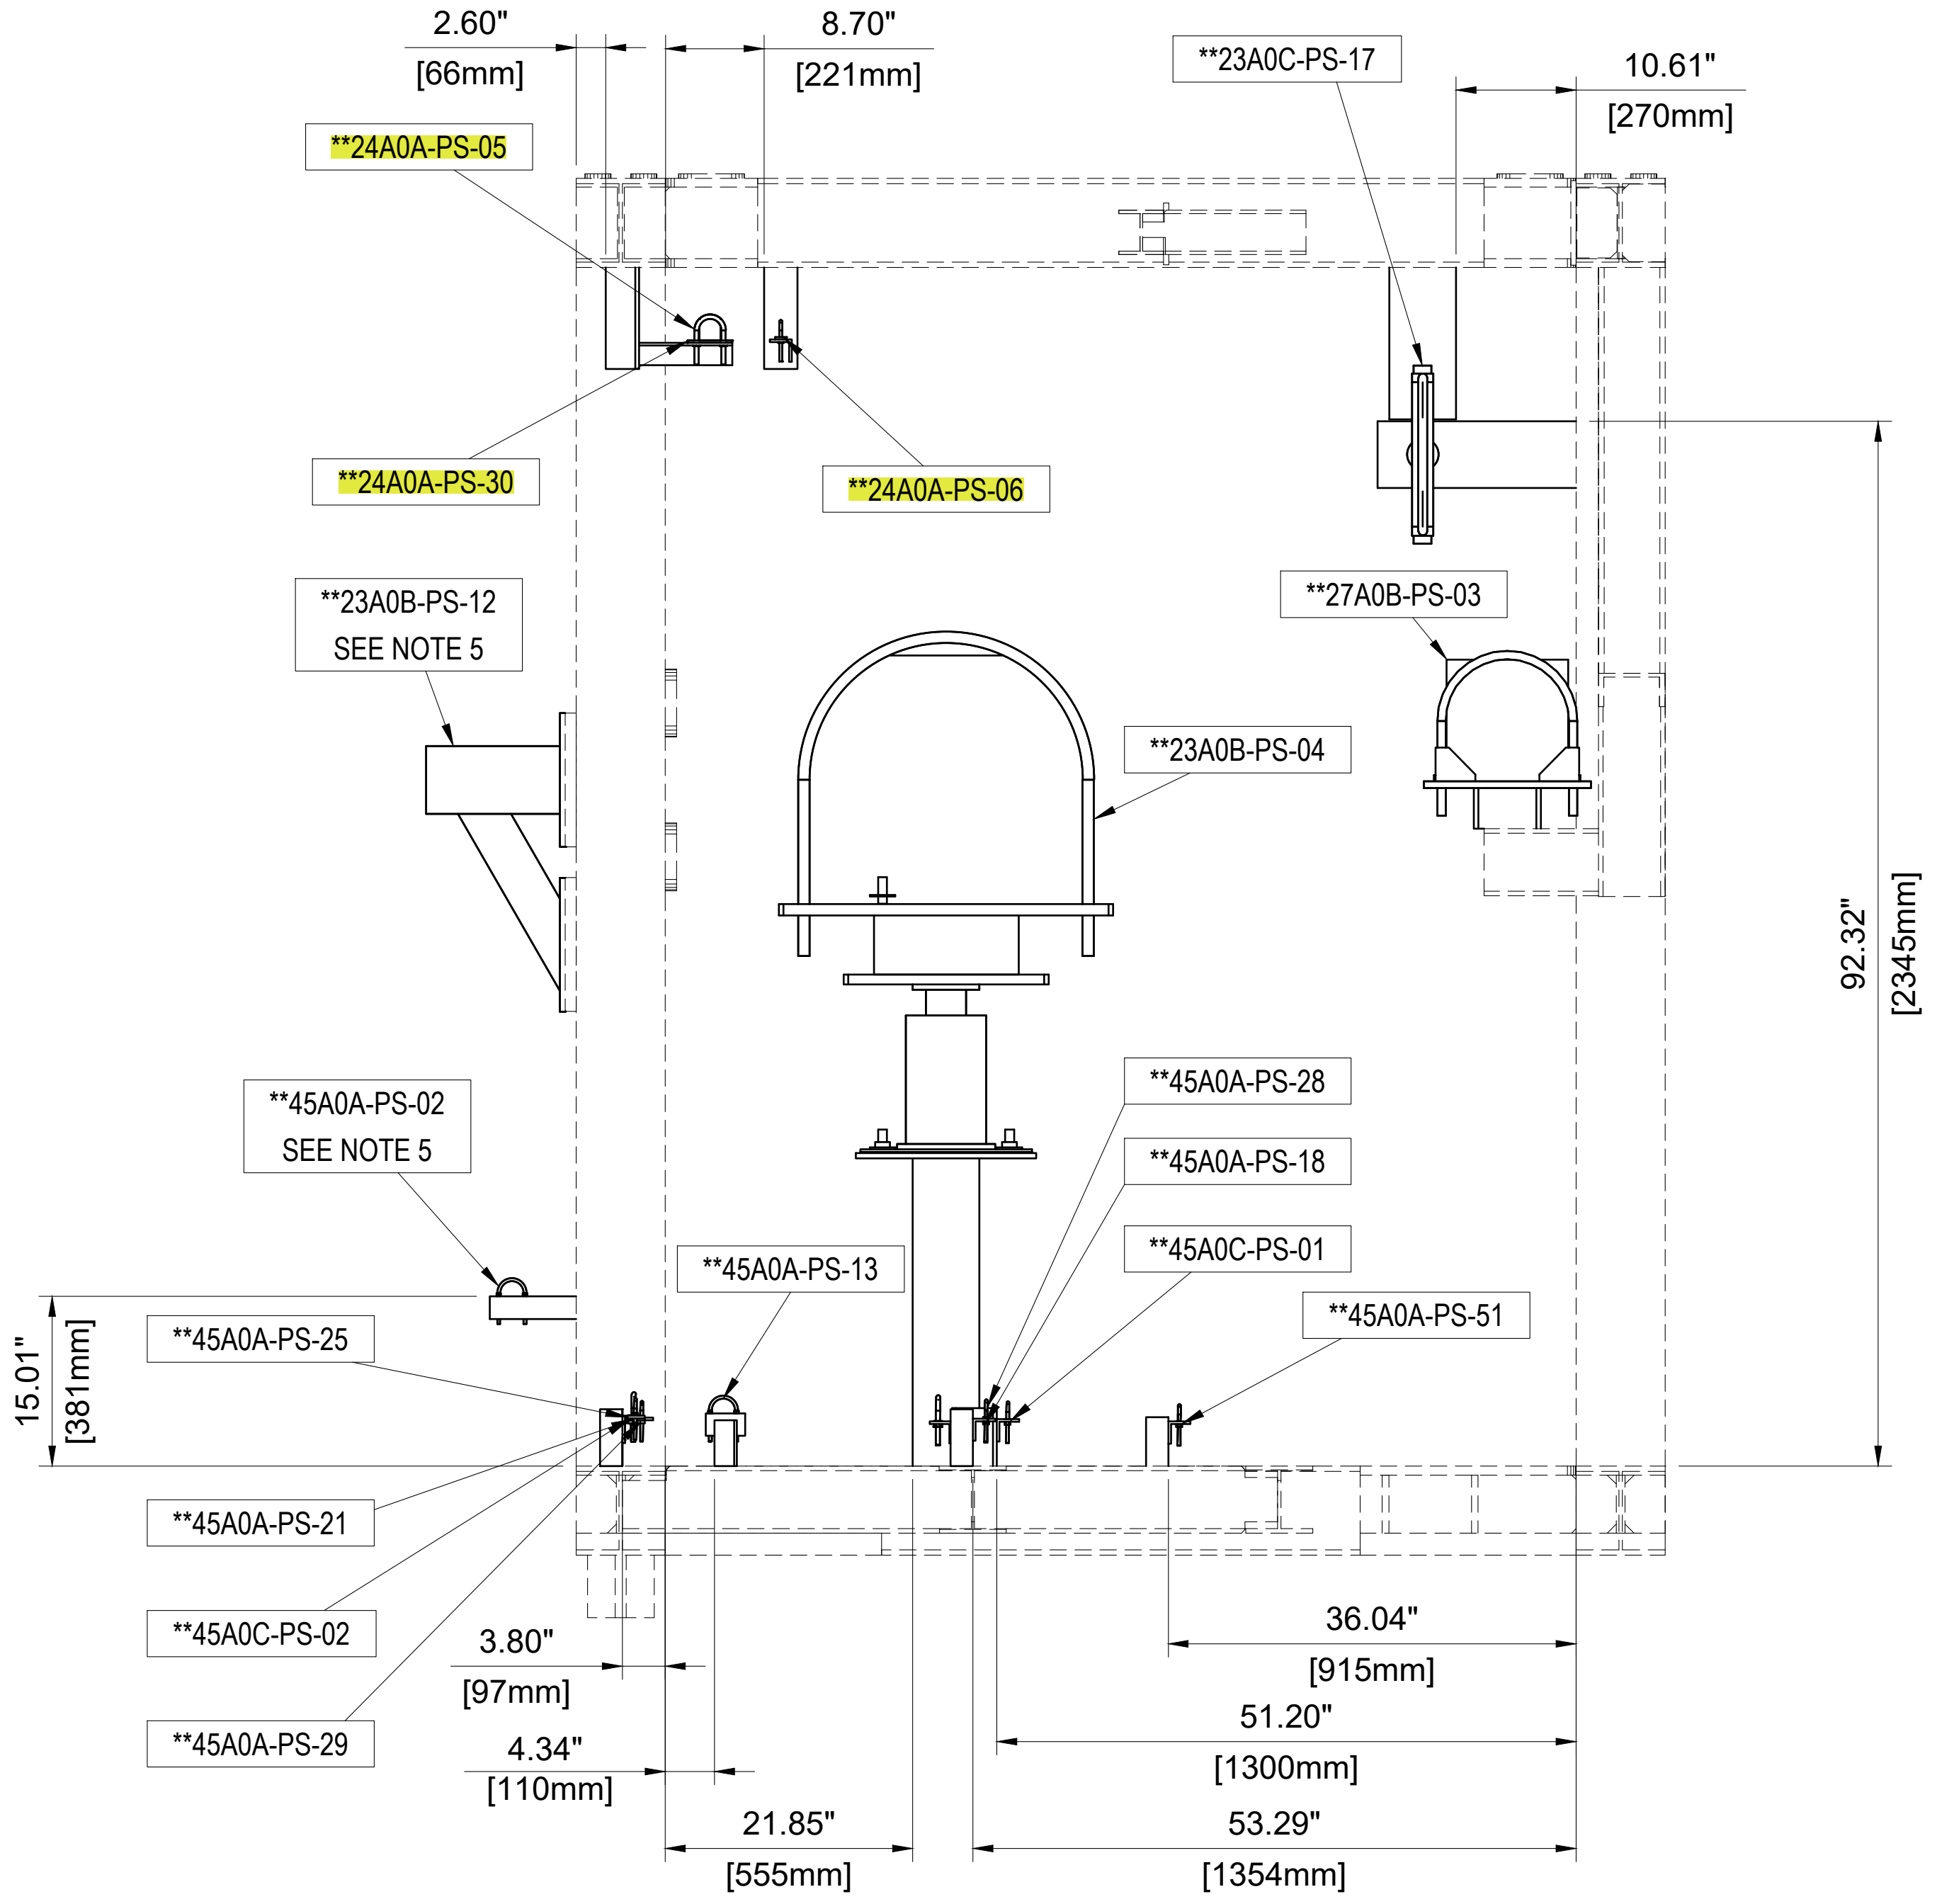
2.60"
[66mm]
8.70"
[221mm]
**23A0C-PS-17
10.61"
[270mm]
**24A0A-PS-05
**24A0A-PS-30
**24A0A-PS-06
**23A0B-PS-12
SEE NOTE 5
**27A0B-PS-03
**23A0B-PS-04
92.32"
[2345mm]
**45A0A-PS-02
SEE NOTE 5
**45A0A-PS-28
**45A0A-PS-18
**45A0C-PS-01
**45A0A-PS-13
**45A0A-PS-51
15.01"
[381mm]
**45A0A-PS-25
**45A0A-PS-21
**45A0C-PS-02
**45A0A-PS-29
3.80"
[97mm]
4.34"
[110mm]
21.85"
[555mm]
36.04"
[915mm]
51.20"
[1300mm]
53.29"
[1354mm]

MD-1.1 SECTION C-C

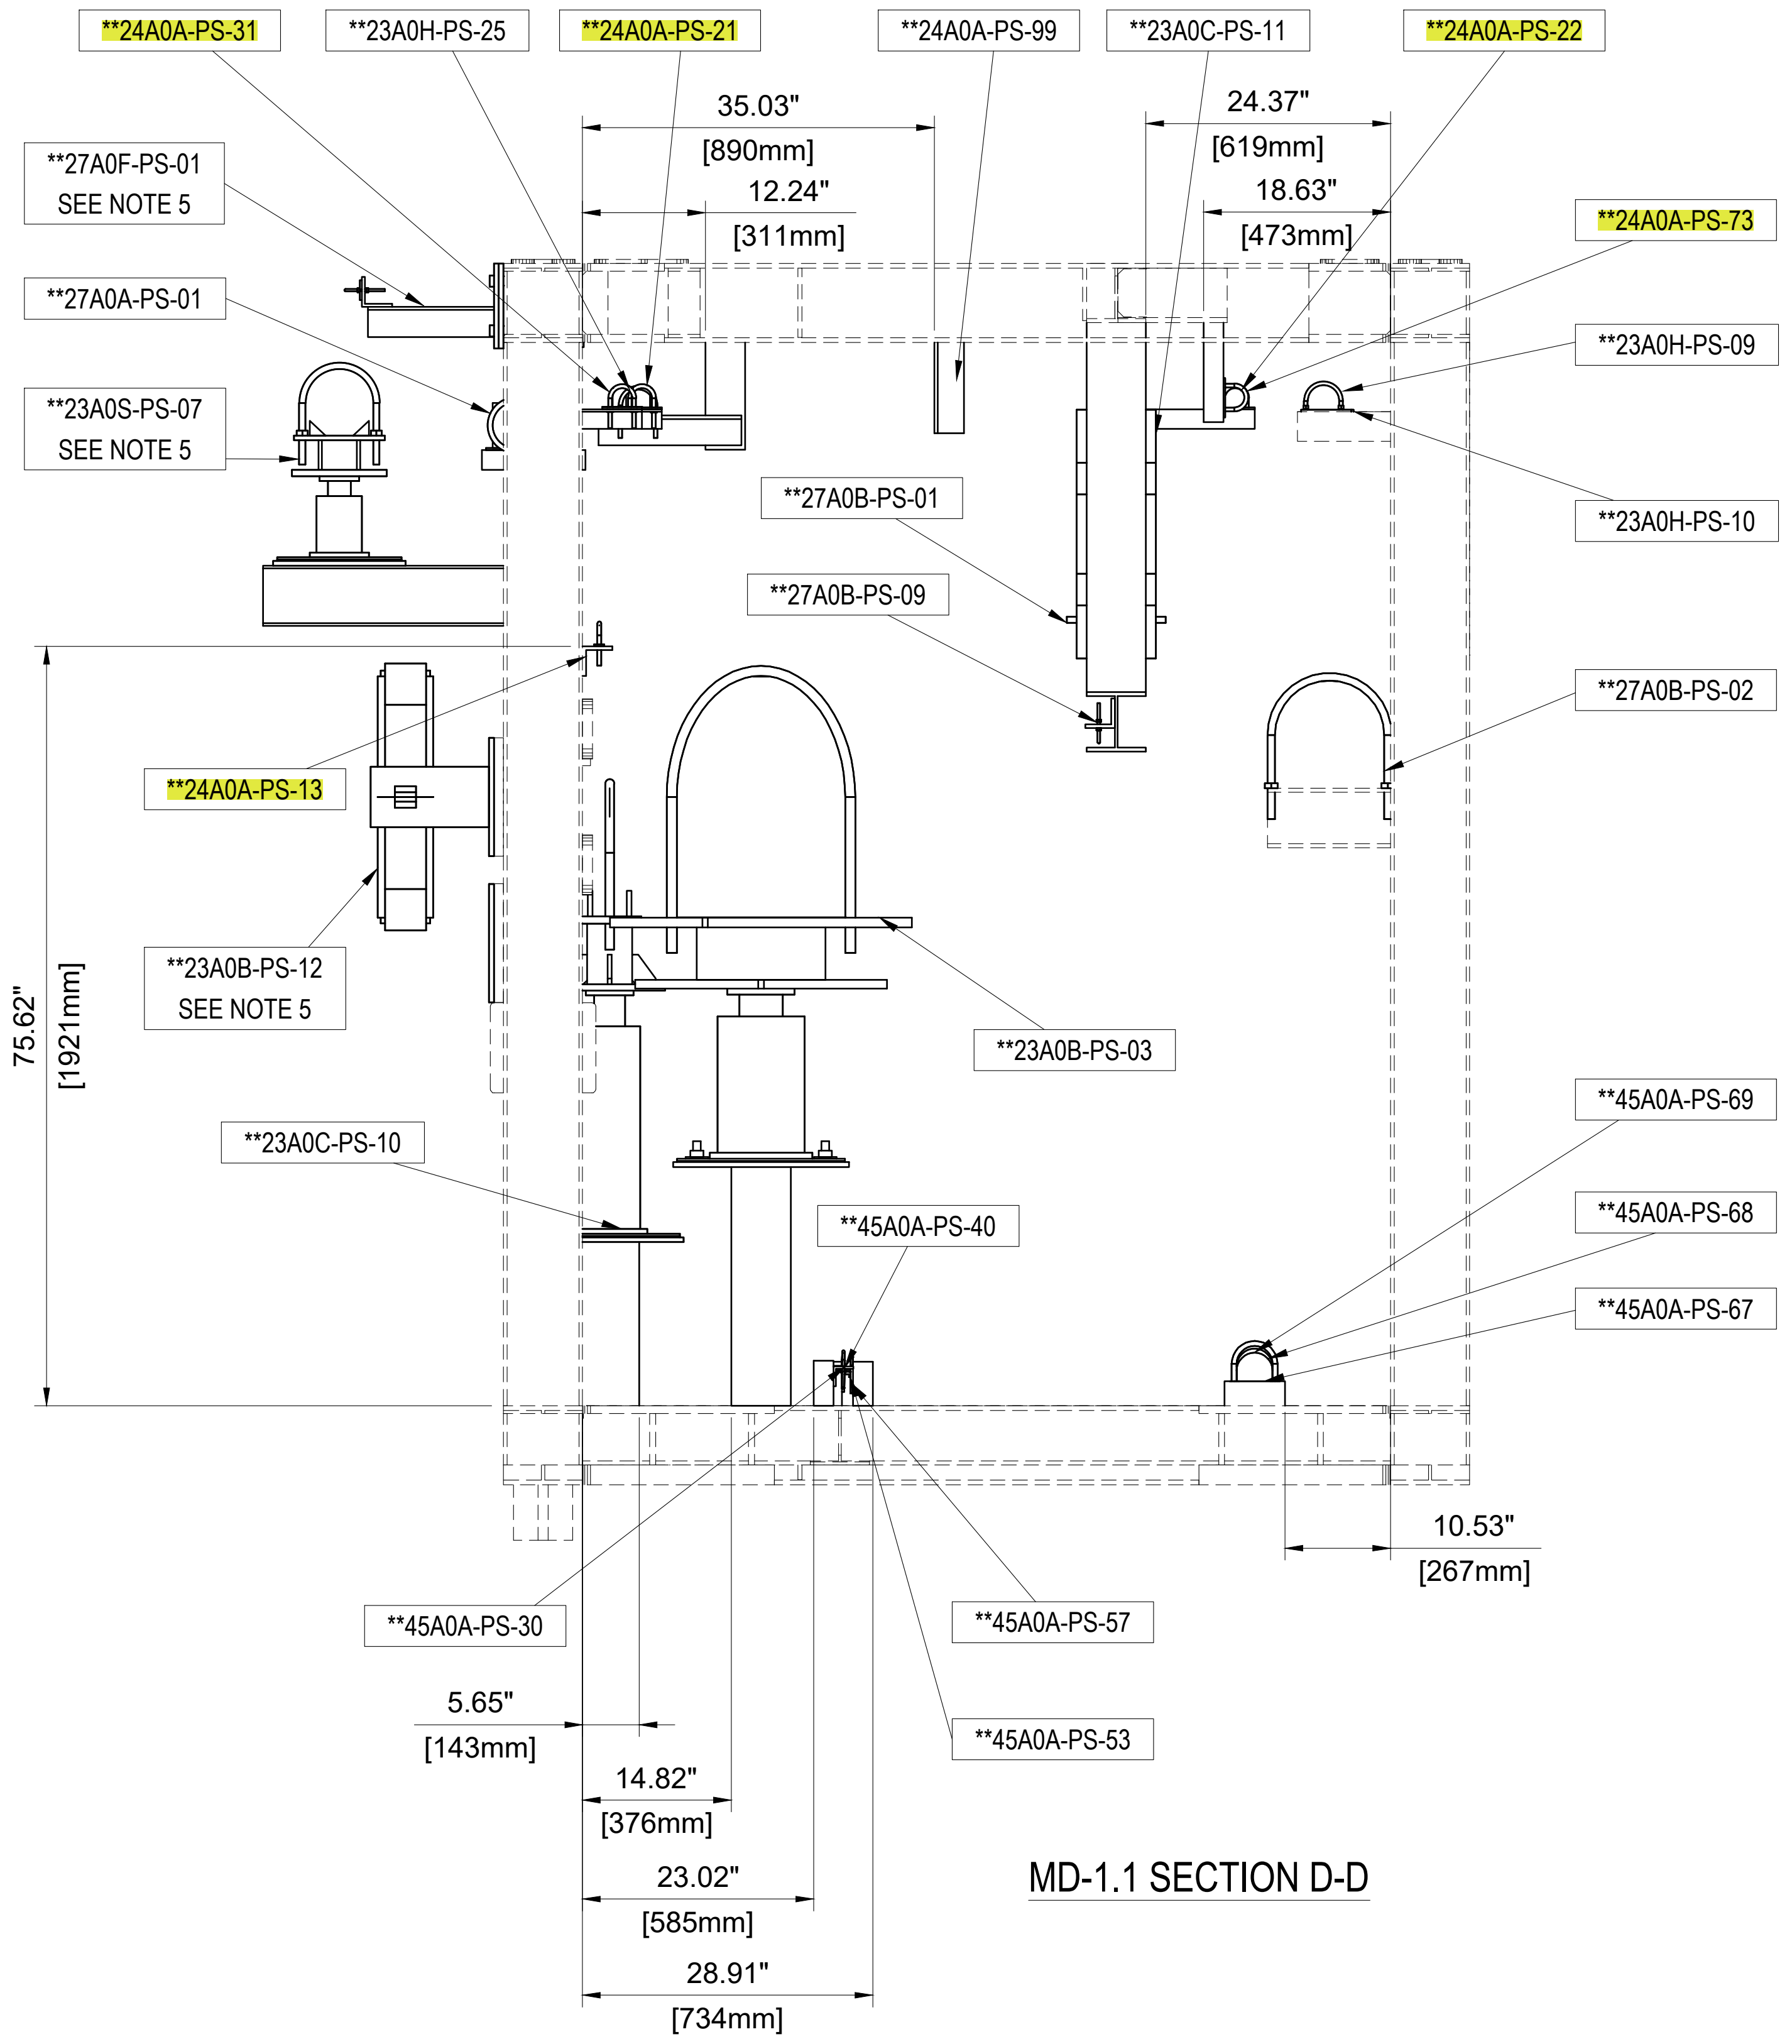
**24A0A-PS-31
**23A0H-PS-25
**24A0A-PS-21
**24A0A-PS-99
**23A0C-PS-11
**24A0A-PS-22
35.03"
[890mm]
24.37"
[619mm]
12.24"
[311mm]
18.63"
[473mm]
**27A0F-PS-01
SEE NOTE 5
**24A0A-PS-73
**27A0A-PS-01
**23A0H-PS-09
**23A0S-PS-07
SEE NOTE 5
**27A0B-PS-01
**23A0H-PS-10
**27A0B-PS-09
**27A0B-PS-02
**24A0A-PS-13
75.62"
[1921mm]
**23A0B-PS-12
SEE NOTE 5
**23A0B-PS-03
**45A0A-PS-69
**23A0C-PS-10
**45A0A-PS-40
**45A0A-PS-68
**45A0A-PS-67
10.53"
[267mm]
**45A0A-PS-30
**45A0A-PS-57
**45A0A-PS-53
5.65"
[143mm]
14.82"
[376mm]
23.02"
[585mm]
28.91"
[734mm]

MD-1.1 SECTION D-D

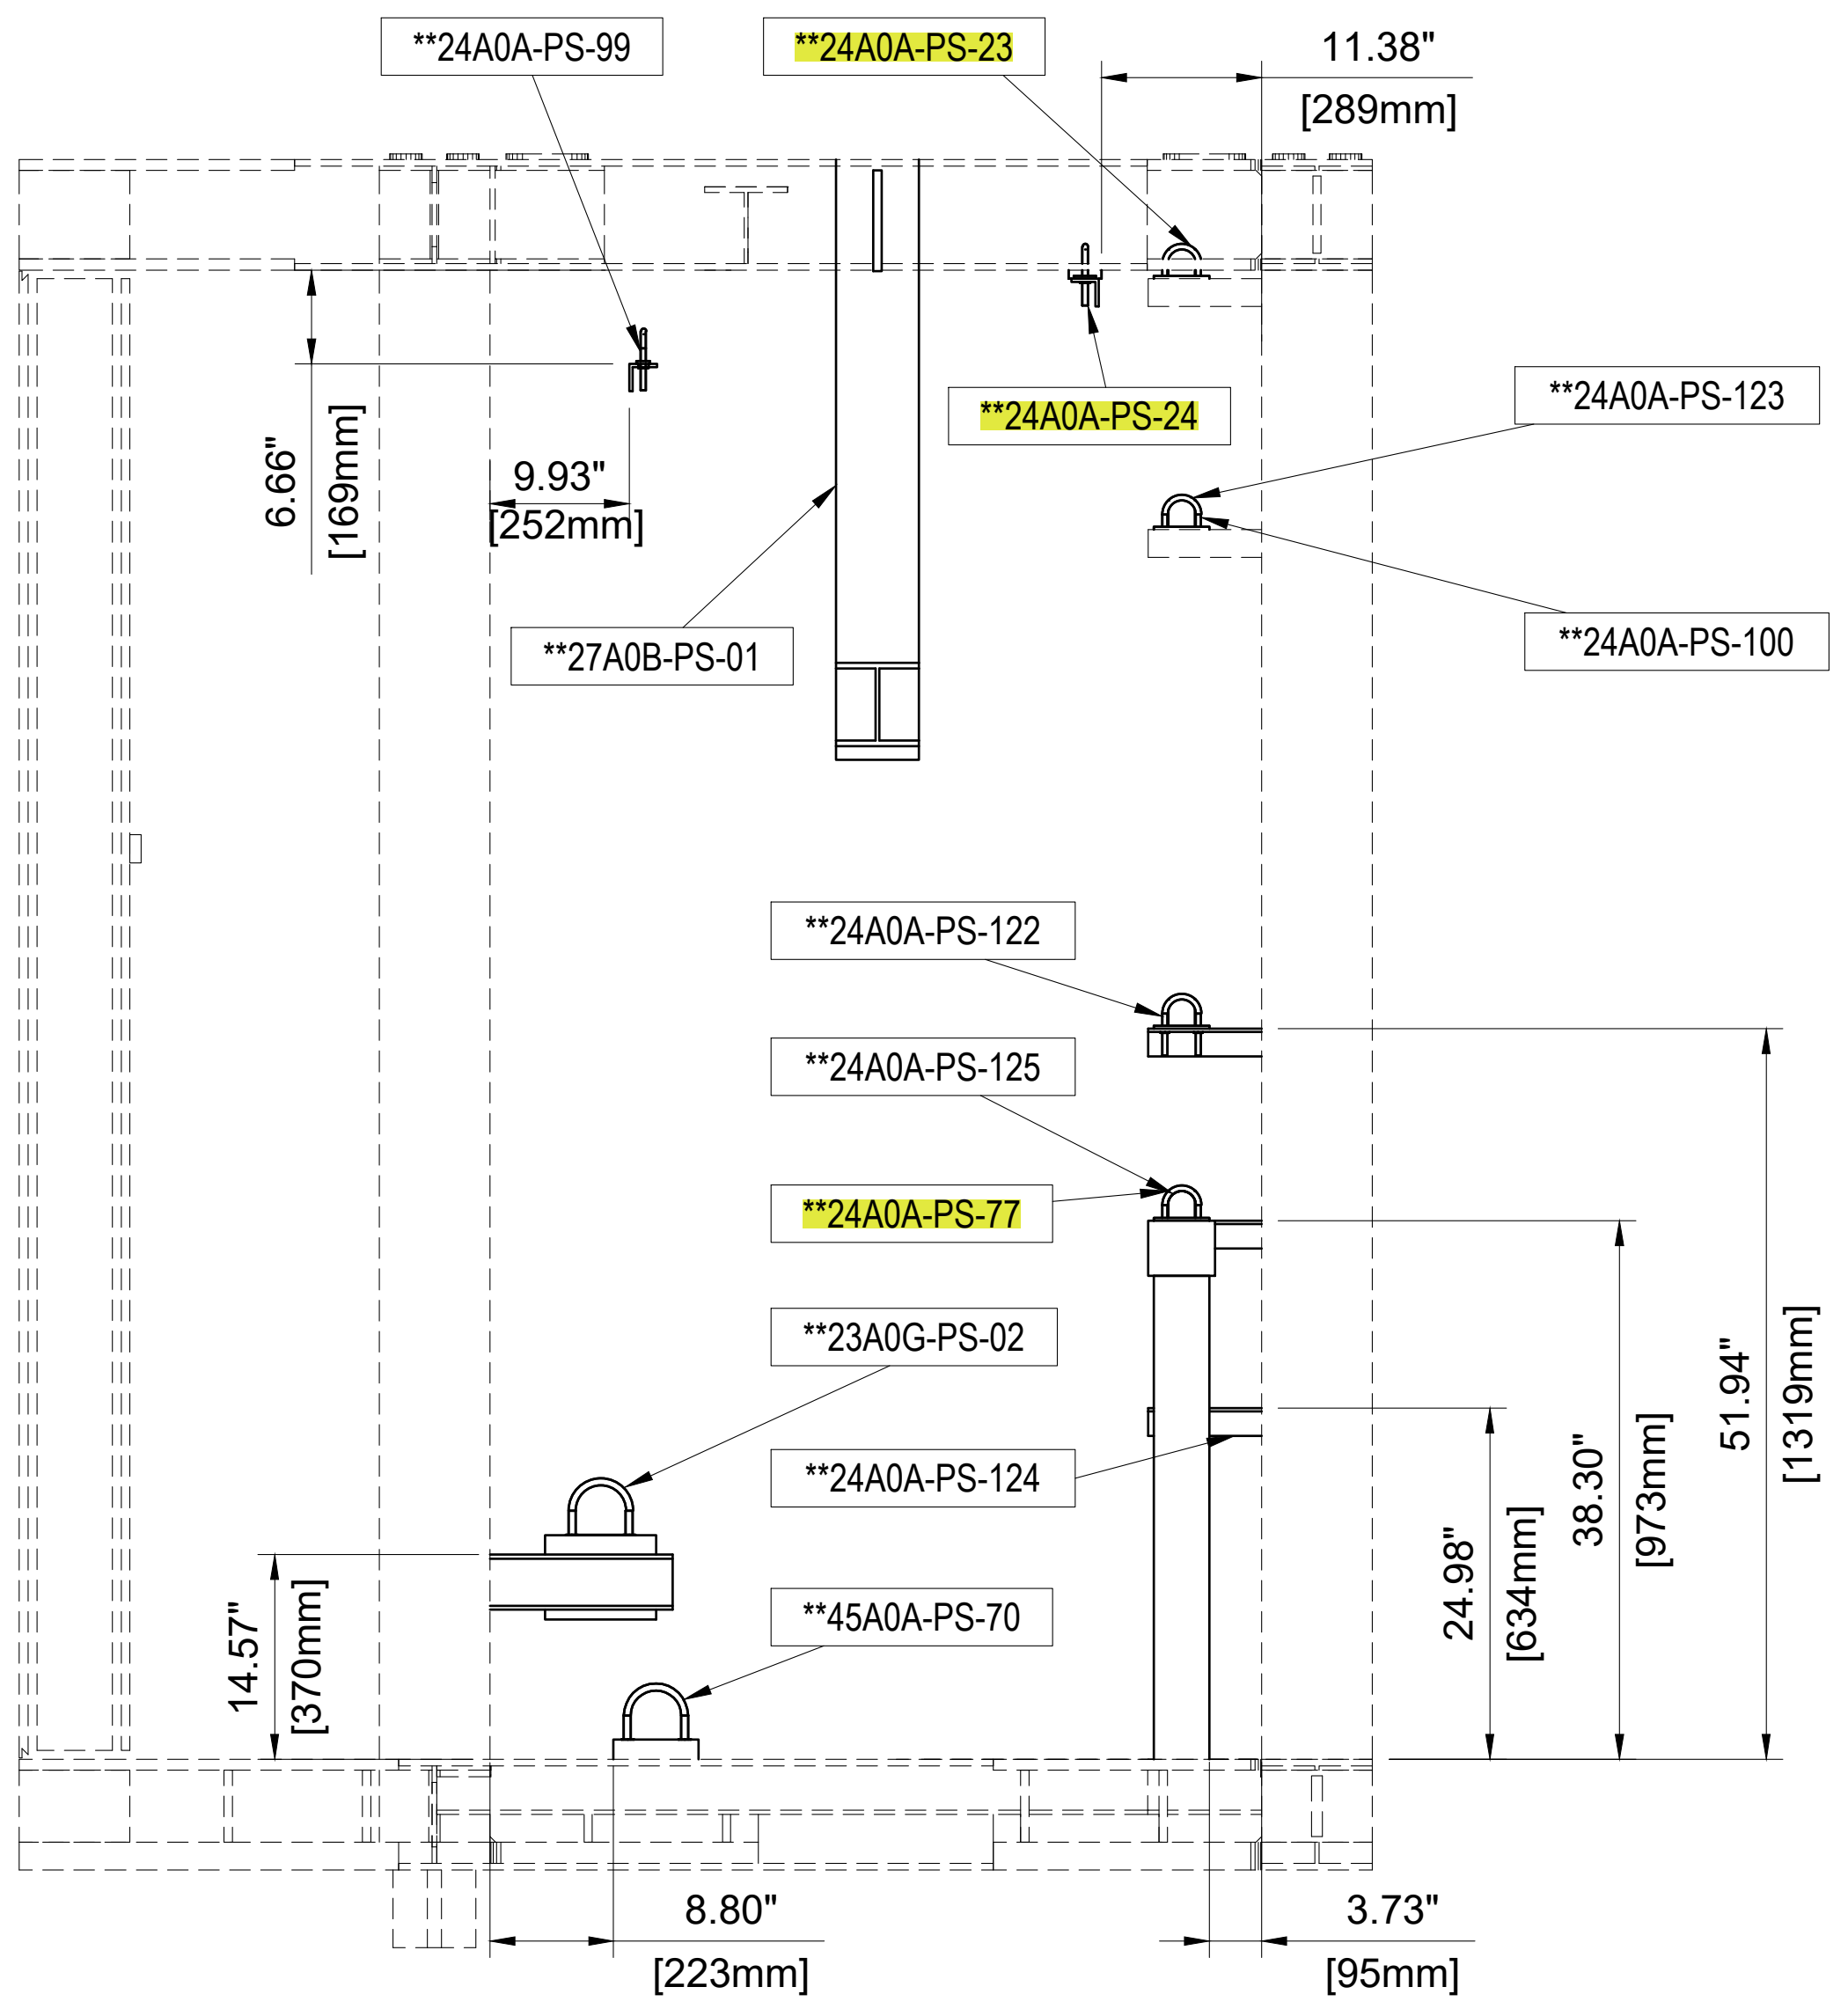
**24A0A-PS-99
**24A0A-PS-23
11.38"
[289mm]
6.66"
[169mm]
9.93"
[252mm]
**24A0A-PS-24
**24A0A-PS-123
**27A0B-PS-01
**24A0A-PS-100
**24A0A-PS-122
**24A0A-PS-125
**24A0A-PS-77
51.94"
[1319mm]
**23A0G-PS-02
38.30"
[973mm]
24.98"
[634mm]
**24A0A-PS-124
14.57"
[370mm]
**45A0A-PS-70
8.80"
[223mm]
3.73"
[95mm]

MD-1.1 SECTION E-E

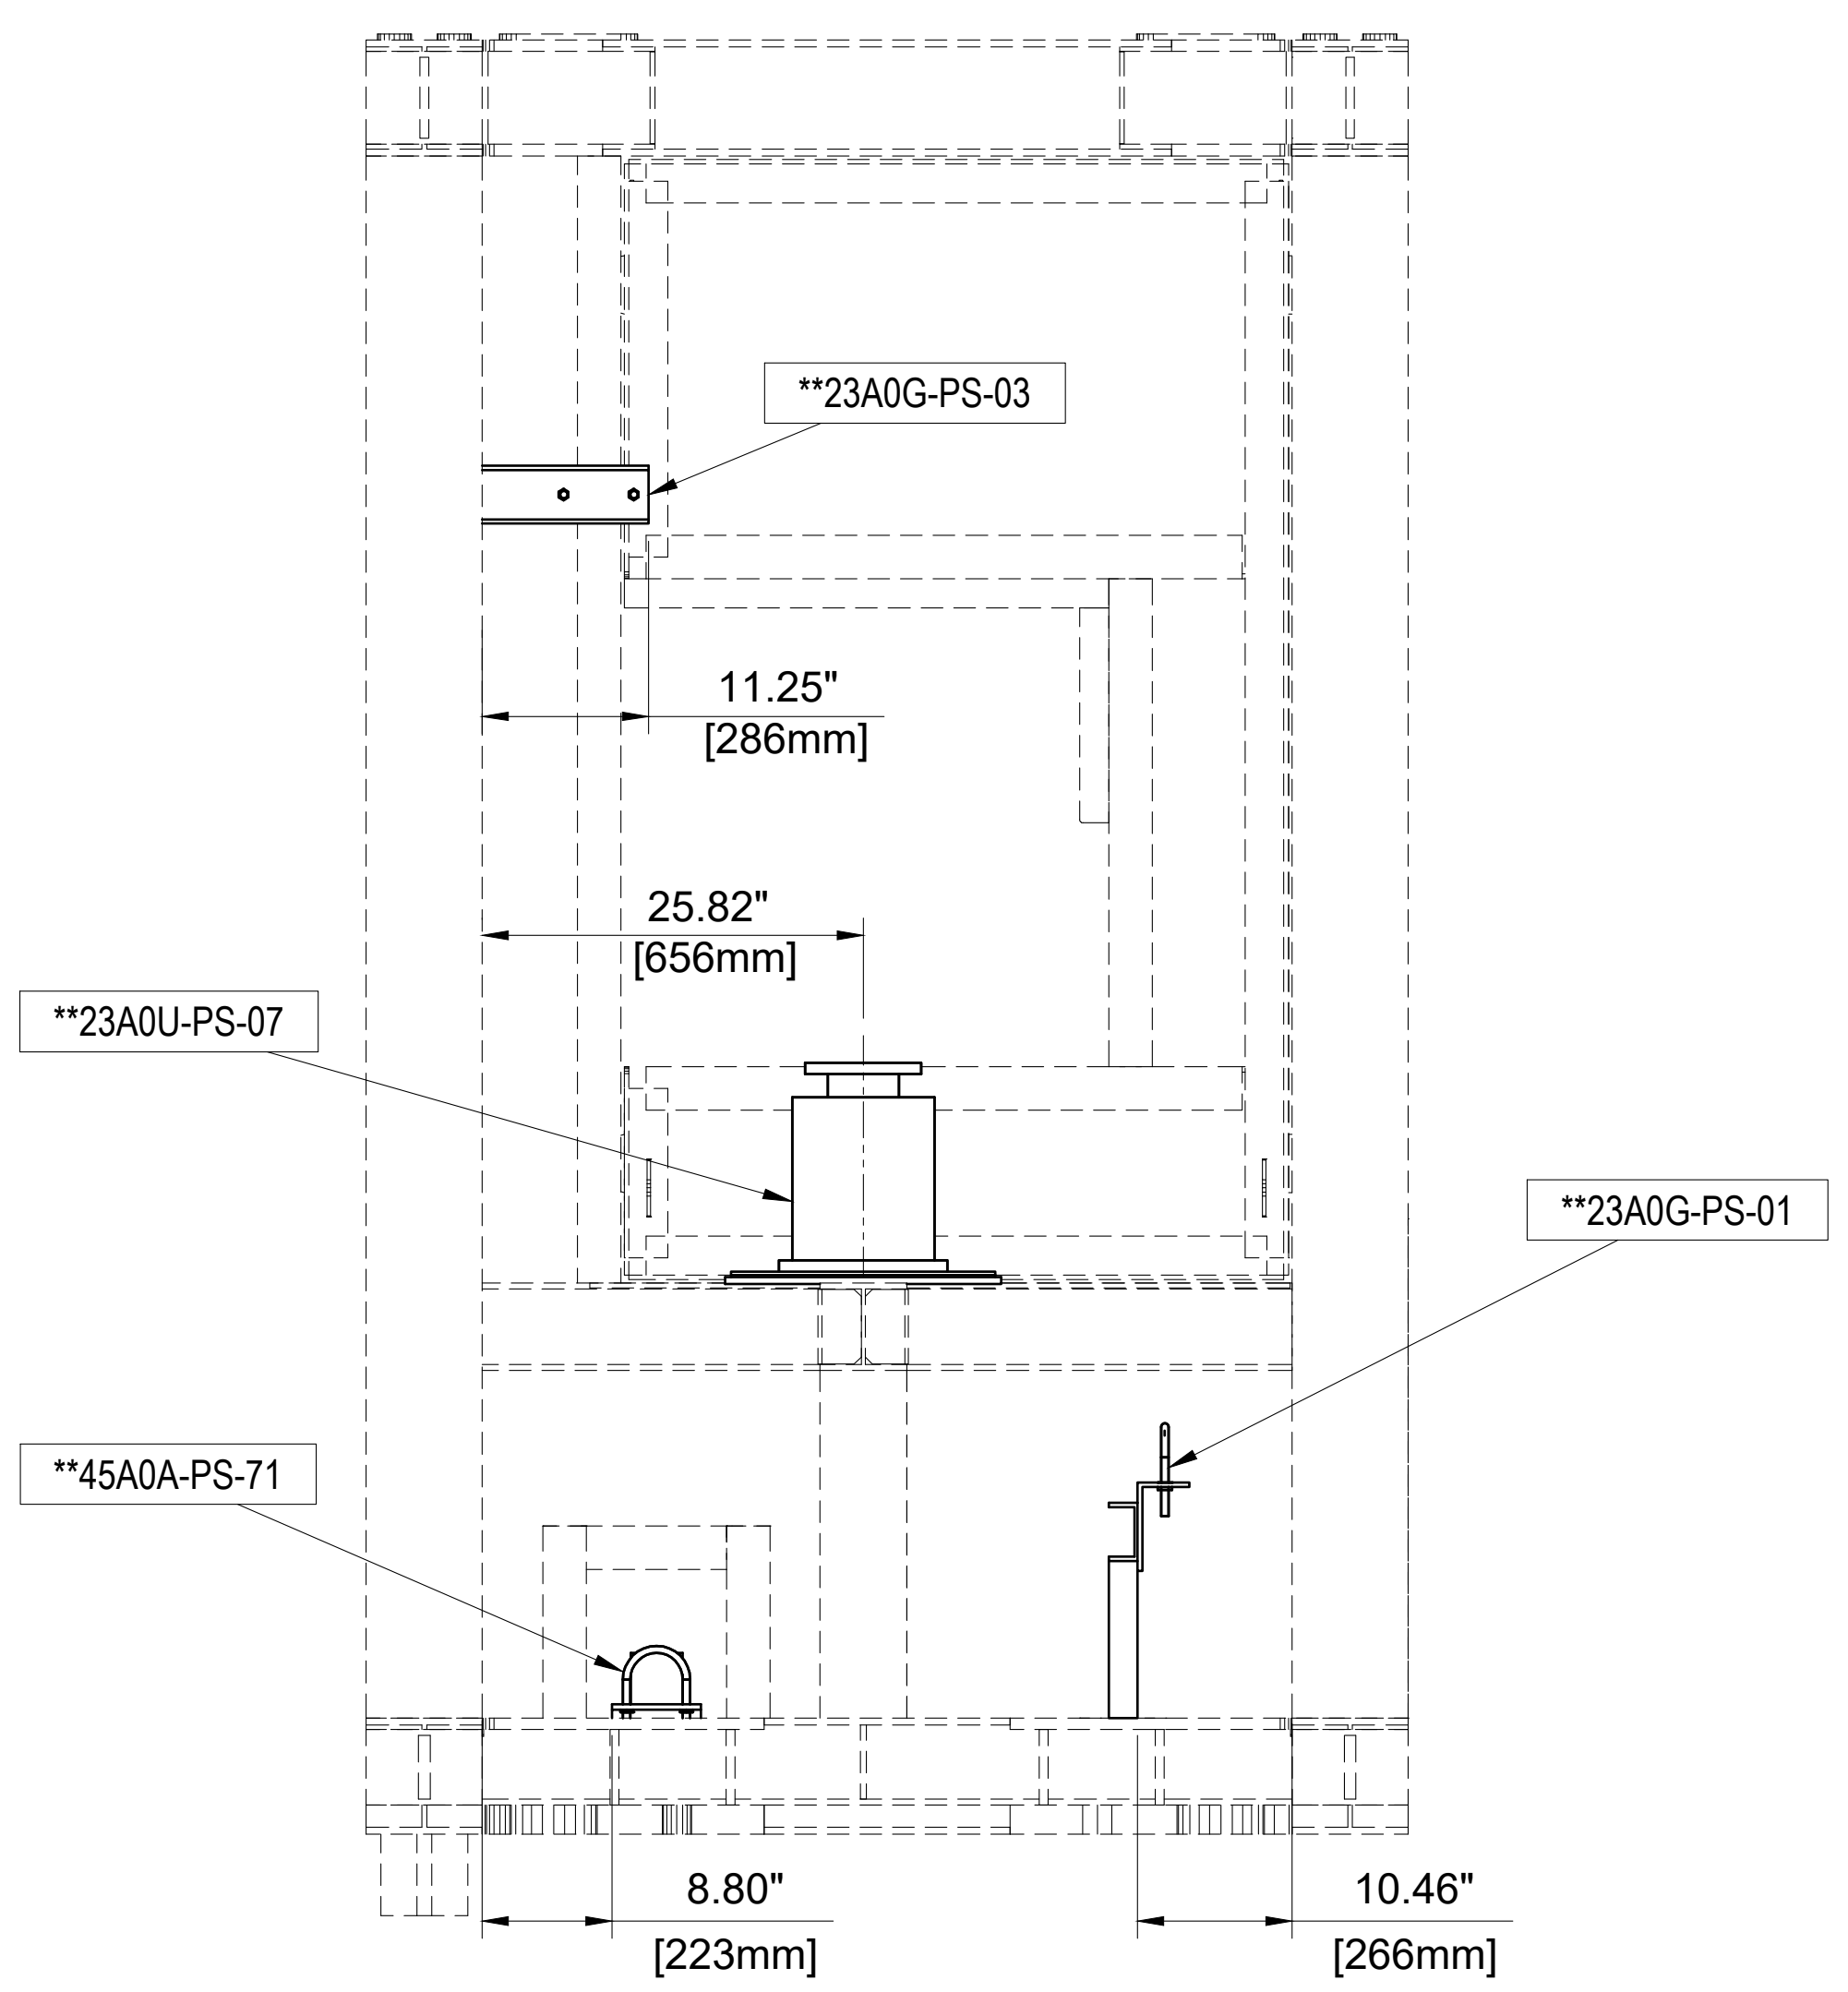
**23A0G-PS-03
11.25"
[286mm]
25.82"
[656mm]
**23A0U-PS-07
**23A0G-PS-01
**45A0A-PS-71
8.80"
[223mm]
10.46"
[266mm]

MD-1.1 SECTION F-F

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
-

ITEM NO
MDL-150

DWG NAME
MD-1.1 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.
-

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	5/6	1/20	A1

DRAWING NO
2E00140-CI-026-150

REV.
0

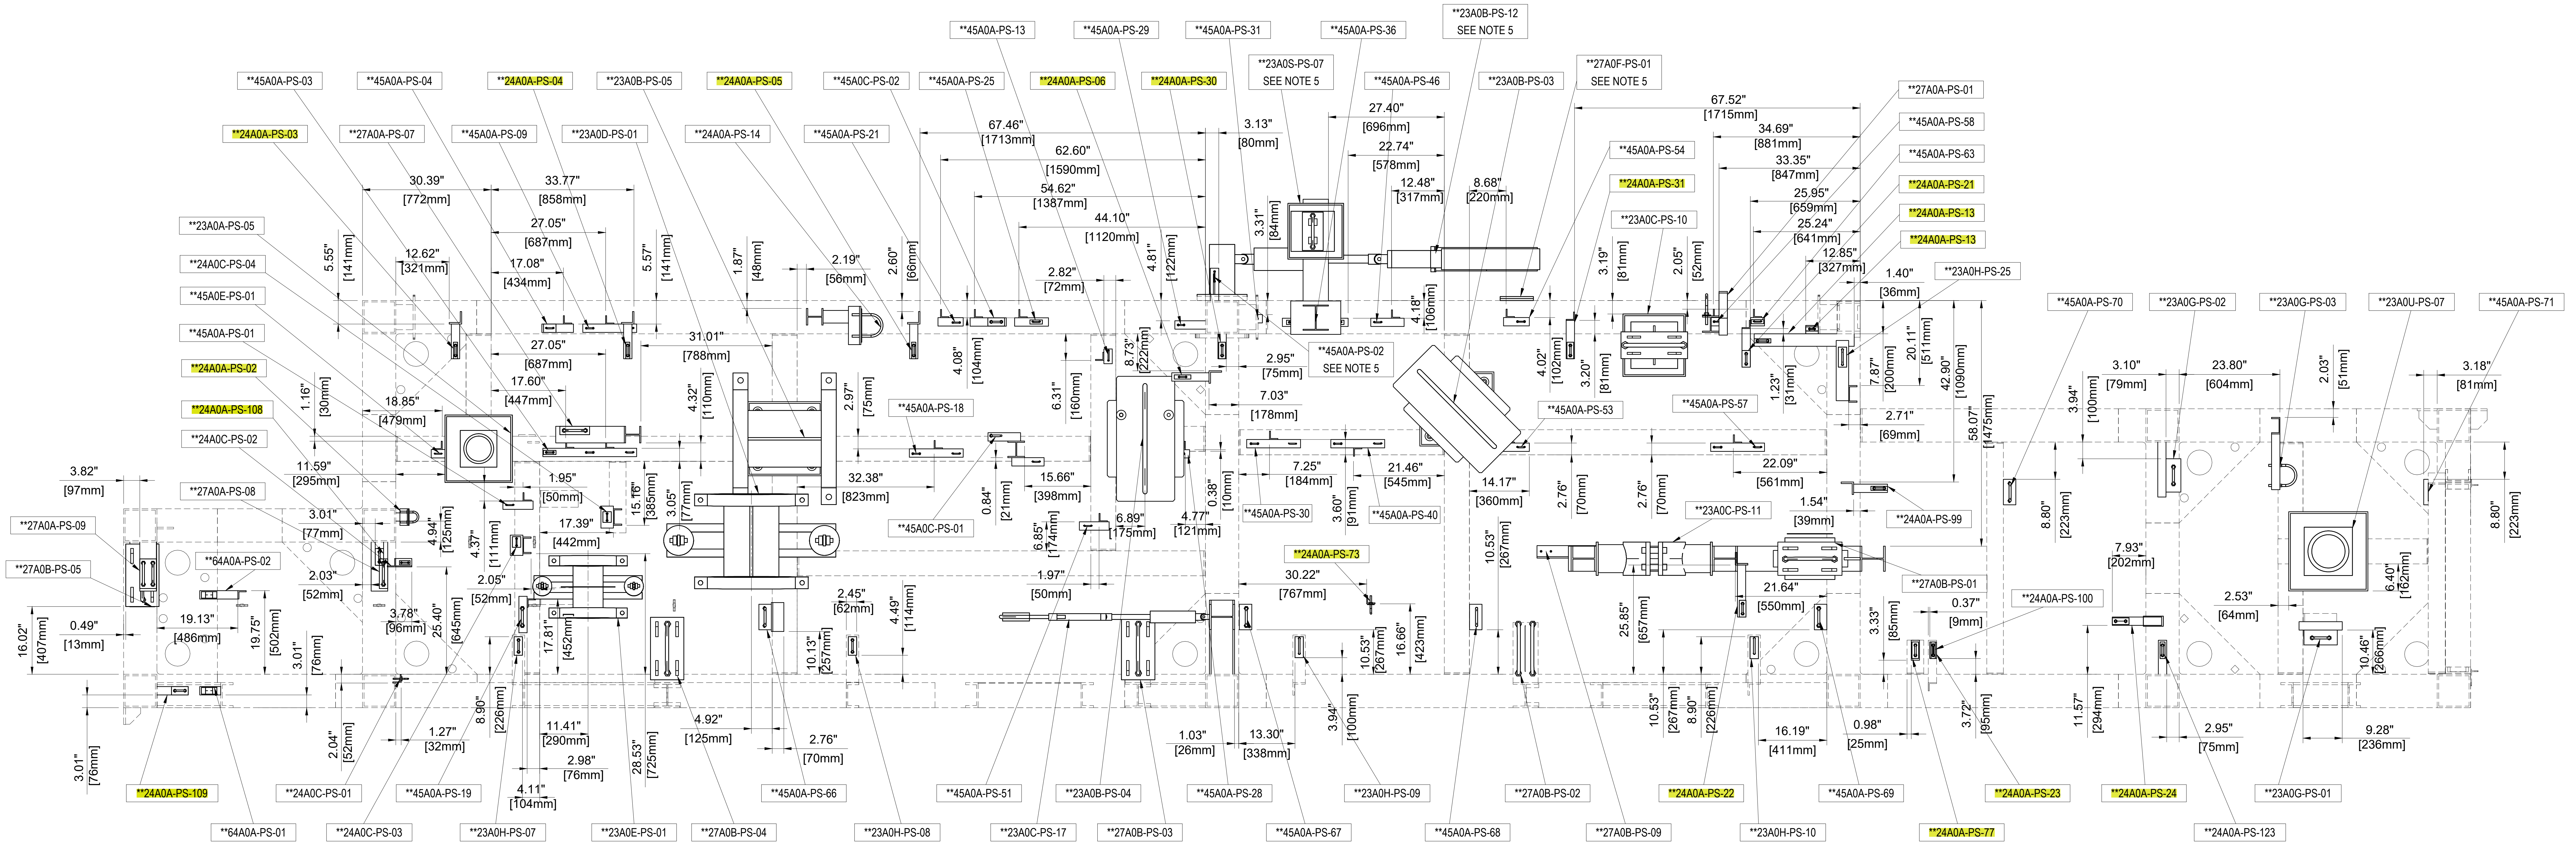
**45A0A-PS-13
**45A0A-PS-29
**45A0A-PS-31
**45A0A-PS-36
**23A0B-PS-12 SEE NOTE 5
**45A0A-PS-03
**45A0A-PS-04
**24A0A-PS-04
**23A0B-PS-05
**24A0A-PS-05
**45A0C-PS-02
**45A0A-PS-25
**24A0A-PS-06
**24A0A-PS-30
**23A0S-PS-07 SEE NOTE 5
**45A0A-PS-46
**23A0B-PS-03
**27A0F-PS-01 SEE NOTE 5
**27A0A-PS-01
**45A0A-PS-58
**45A0A-PS-63
**24A0A-PS-21
**24A0A-PS-13
**24A0A-PS-13
**23A0H-PS-25
**24A0A-PS-03
**27A0A-PS-07
**45A0A-PS-09
**23A0D-PS-01
**24A0A-PS-14
**45A0A-PS-21
**45A0A-PS-54
**24A0A-PS-31
**23A0C-PS-10
**23A0A-PS-05
**24A0C-PS-04
**45A0E-PS-01
**45A0A-PS-01
**24A0A-PS-02
**24A0A-PS-108
**24A0C-PS-02
**27A0A-PS-08
**27A0A-PS-09
**64A0A-PS-02
**27A0B-PS-05
**45A0A-PS-18
**45A0C-PS-01
**45A0A-PS-02 SEE NOTE 5
**45A0A-PS-53
**45A0A-PS-57
**45A0A-PS-30
**45A0A-PS-40
**24A0A-PS-73
**23A0C-PS-11
**24A0A-PS-99
**27A0B-PS-01
**24A0A-PS-100
**45A0A-PS-70
**23A0G-PS-02
**23A0G-PS-03
**23A0U-PS-07
**45A0A-PS-71
**24A0A-PS-109
**24A0C-PS-01
**45A0A-PS-19
**45A0A-PS-66
**45A0A-PS-51
**23A0B-PS-04
**45A0A-PS-28
**23A0H-PS-09
**27A0B-PS-02
**24A0A-PS-22
**45A0A-PS-69
**24A0A-PS-23
**24A0A-PS-24
**23A0G-PS-01
**64A0A-PS-01
**24A0C-PS-03
**23A0H-PS-07
**23A0E-PS-01
**27A0B-PS-04
**23A0H-PS-08
**23A0C-PS-17
**27A0B-PS-03
**45A0A-PS-67
**45A0A-PS-68
**27A0B-PS-09
**23A0H-PS-10
**24A0A-PS-77
**24A0A-PS-123
67.46" [1713mm]
62.60" [1590mm]
54.62" [1387mm]
44.10" [1120mm]
3.13" [80mm]
3.31" [84mm]
27.40" [696mm]
22.74" [578mm]
12.48" [317mm]
8.68" [220mm]
4.18" [106mm]
67.52" [1715mm]
34.69" [881mm]
33.35" [847mm]
25.95" [659mm]
25.24" [641mm]
12.85" [327mm]
1.40" [36mm]
30.39" [772mm]
33.77" [858mm]
27.05" [687mm]
12.62" [321mm]
17.08" [434mm]
5.55" [141mm]
5.57" [141mm]
1.87" [48mm]
2.19" [56mm]
2.60" [66mm]
2.82" [72mm]
4.81" [122mm]
27.05" [687mm]
31.01" [788mm]
17.60" [447mm]
18.85" [479mm]
1.16" [30mm]
4.32" [110mm]
2.97" [75mm]
4.08" [104mm]
6.31" [160mm]
8.73" [222mm]
2.95" [75mm]
7.03" [178mm]
3.19" [81mm]
2.05" [52mm]
4.02" [102mm]
3.20" [81mm]
1.23" [31mm]
7.87" [200mm]
20.11" [511mm]
42.90" [1090mm]
58.07" [1475mm]
2.71" [69mm]
3.10" [79mm]
23.80" [604mm]
3.94" [100mm]
2.03" [51mm]
3.18" [81mm]
3.82" [97mm]
11.59" [295mm]
1.95" [50mm]
15.16" [385mm]
3.05" [77mm]
32.38" [823mm]
15.66" [398mm]
0.84" [21mm]
6.89" [175mm]
4.77" [121mm]
0.38" [10mm]
7.25" [184mm]
21.46" [545mm]
3.60" [91mm]
14.17" [360mm]
2.76" [70mm]
2.76" [70mm]
22.09" [561mm]
1.54" [39mm]
8.80" [223mm]
8.80" [223mm]
3.01" [77mm]
4.94" [125mm]
4.37" [111mm]
17.39" [442mm]
2.03" [52mm]
2.05" [52mm]
6.85" [174mm]
1.97" [50mm]
30.22" [767mm]
10.53" [267mm]
21.64" [550mm]
0.37" [9mm]
7.93" [202mm]
2.53" [64mm]
6.40" [162mm]
16.02" [407mm]
0.49" [13mm]
19.13" [486mm]
19.75" [502mm]
3.01" [76mm]
3.78" [96mm]
25.40" [645mm]
17.81" [452mm]
2.45" [62mm]
4.49" [114mm]
10.13" [257mm]
16.66" [423mm]
10.53" [267mm]
25.85" [657mm]
3.33" [85mm]
10.46" [266mm]
3.01" [76mm]
2.04" [52mm]
1.27" [32mm]
8.90" [226mm]
11.41" [290mm]
2.98" [76mm]
4.11" [104mm]
28.53" [725mm]
4.92" [125mm]
2.76" [70mm]
1.03" [26mm]
13.30" [338mm]
3.94" [100mm]
10.53" [267mm]
8.90" [226mm]
16.19" [411mm]
0.98" [25mm]
3.72" [95mm]
11.57" [294mm]
2.95" [75mm]
9.28" [236mm]

MD-1.1 SECTION G-G

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX ——► SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of
Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
-

ITEM NO
MDL-150

DWG NAME
MD-1.1 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.
-

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	6/6	1/20	A1

DRAWING NO
2E00140-CI-026-150

REV.
0

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR031

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

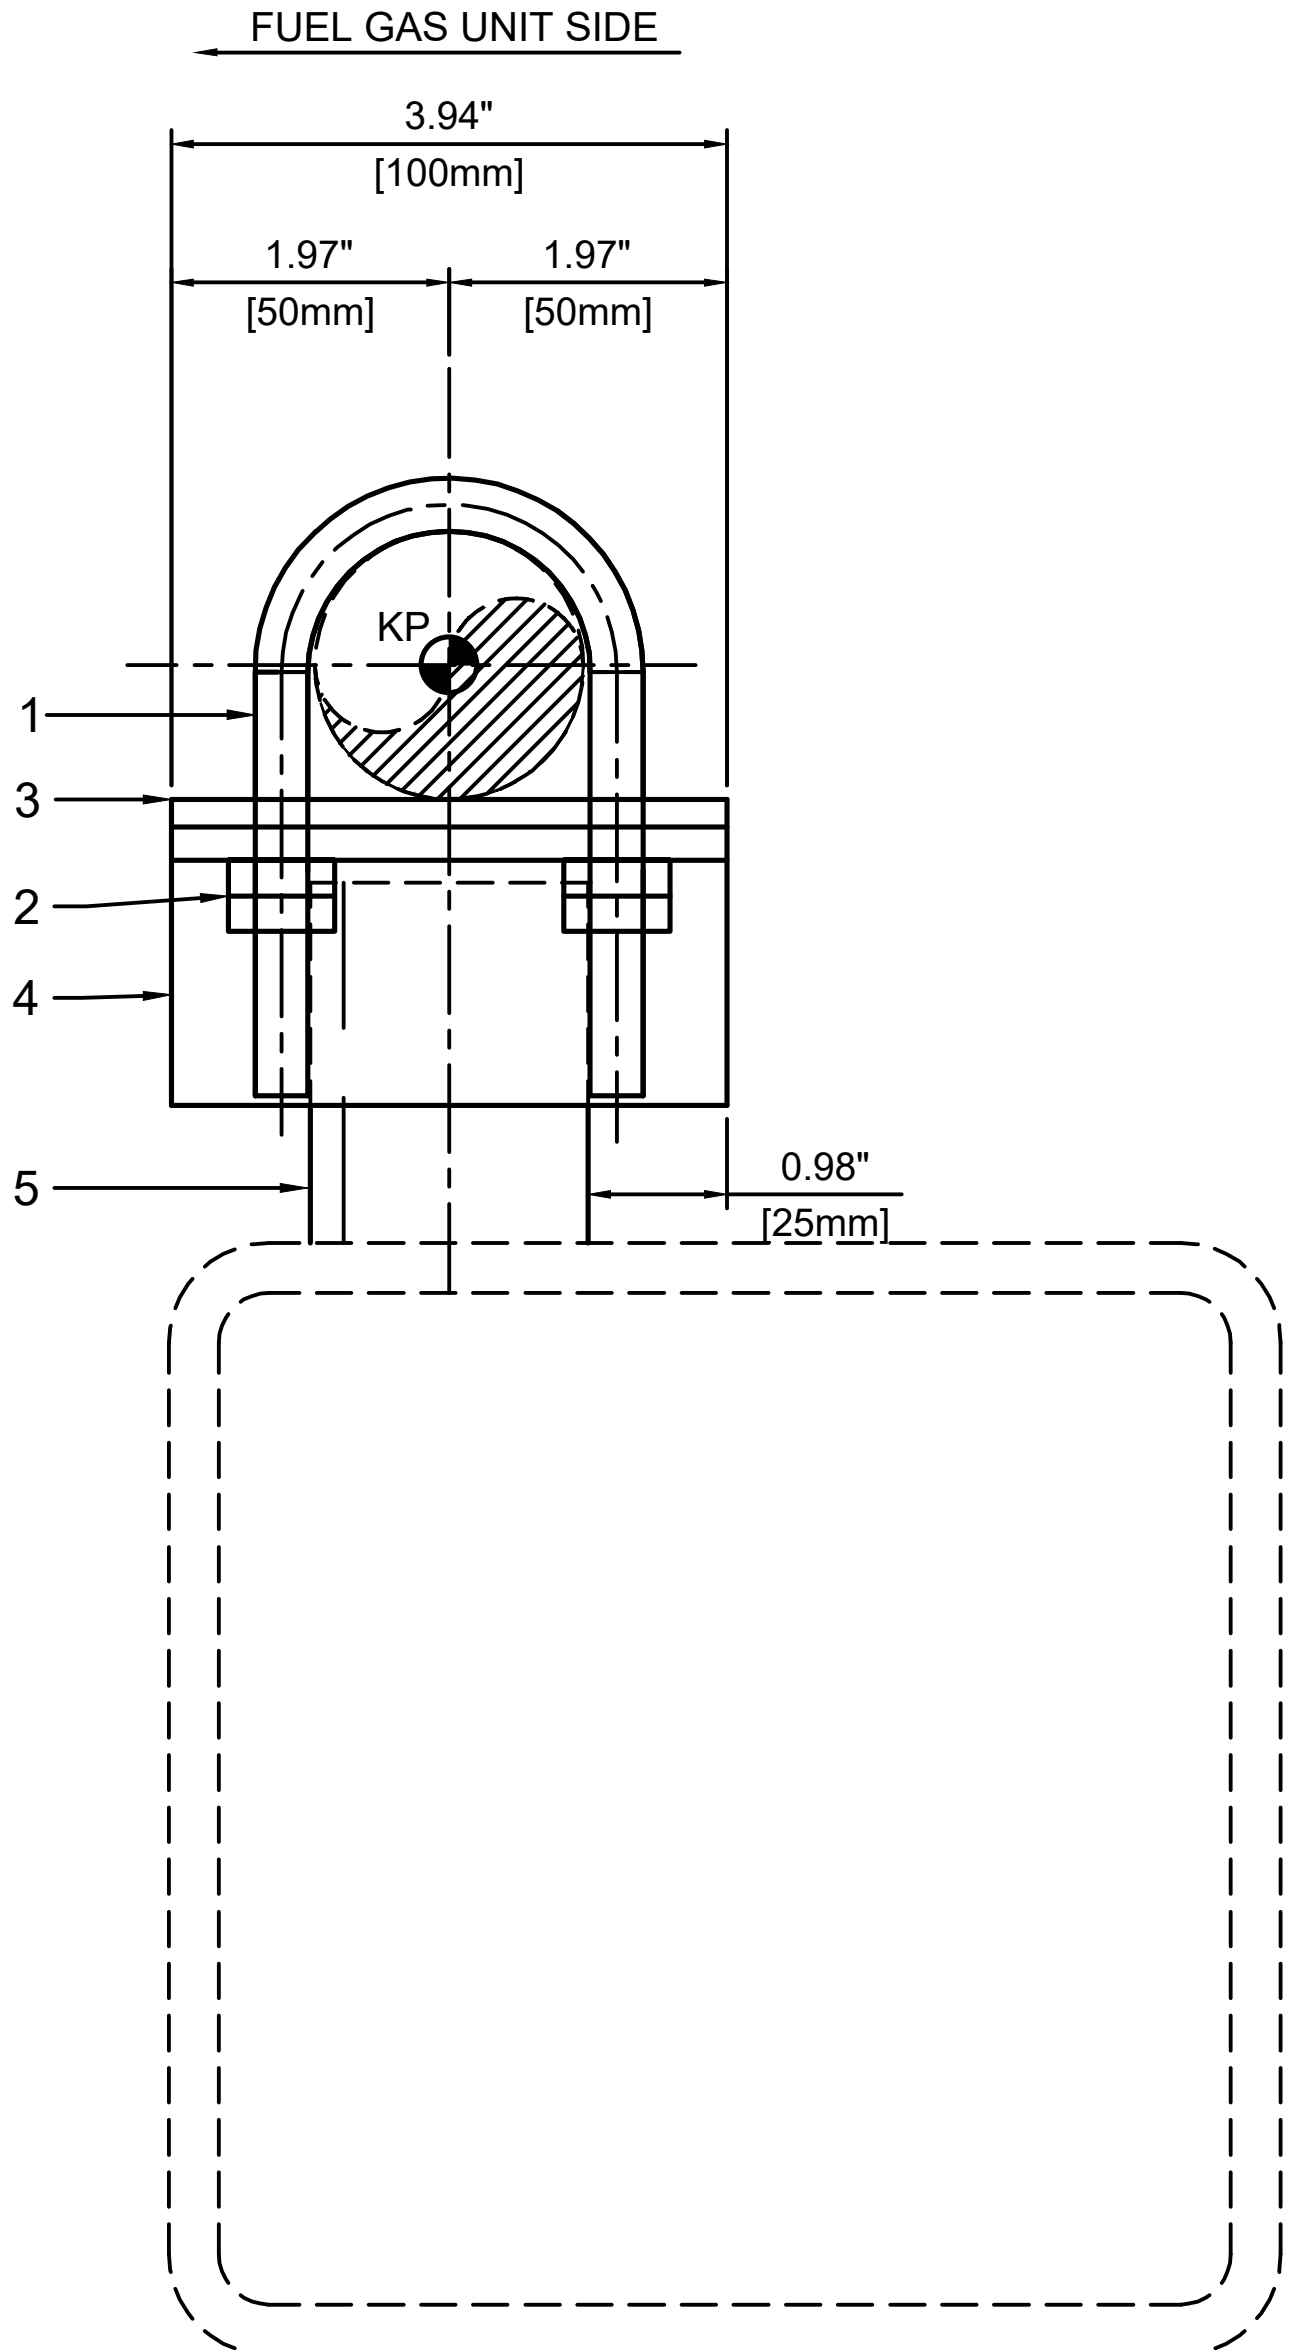
FUEL GAS UNIT SIDE
3.94"
[100mm]
1.97"
[50mm]
1.97"
[50mm]
KP
1
3
2
4
5
0.98"
[25mm]
EXISTING STEEL

PLAN VIEW
1:2.5

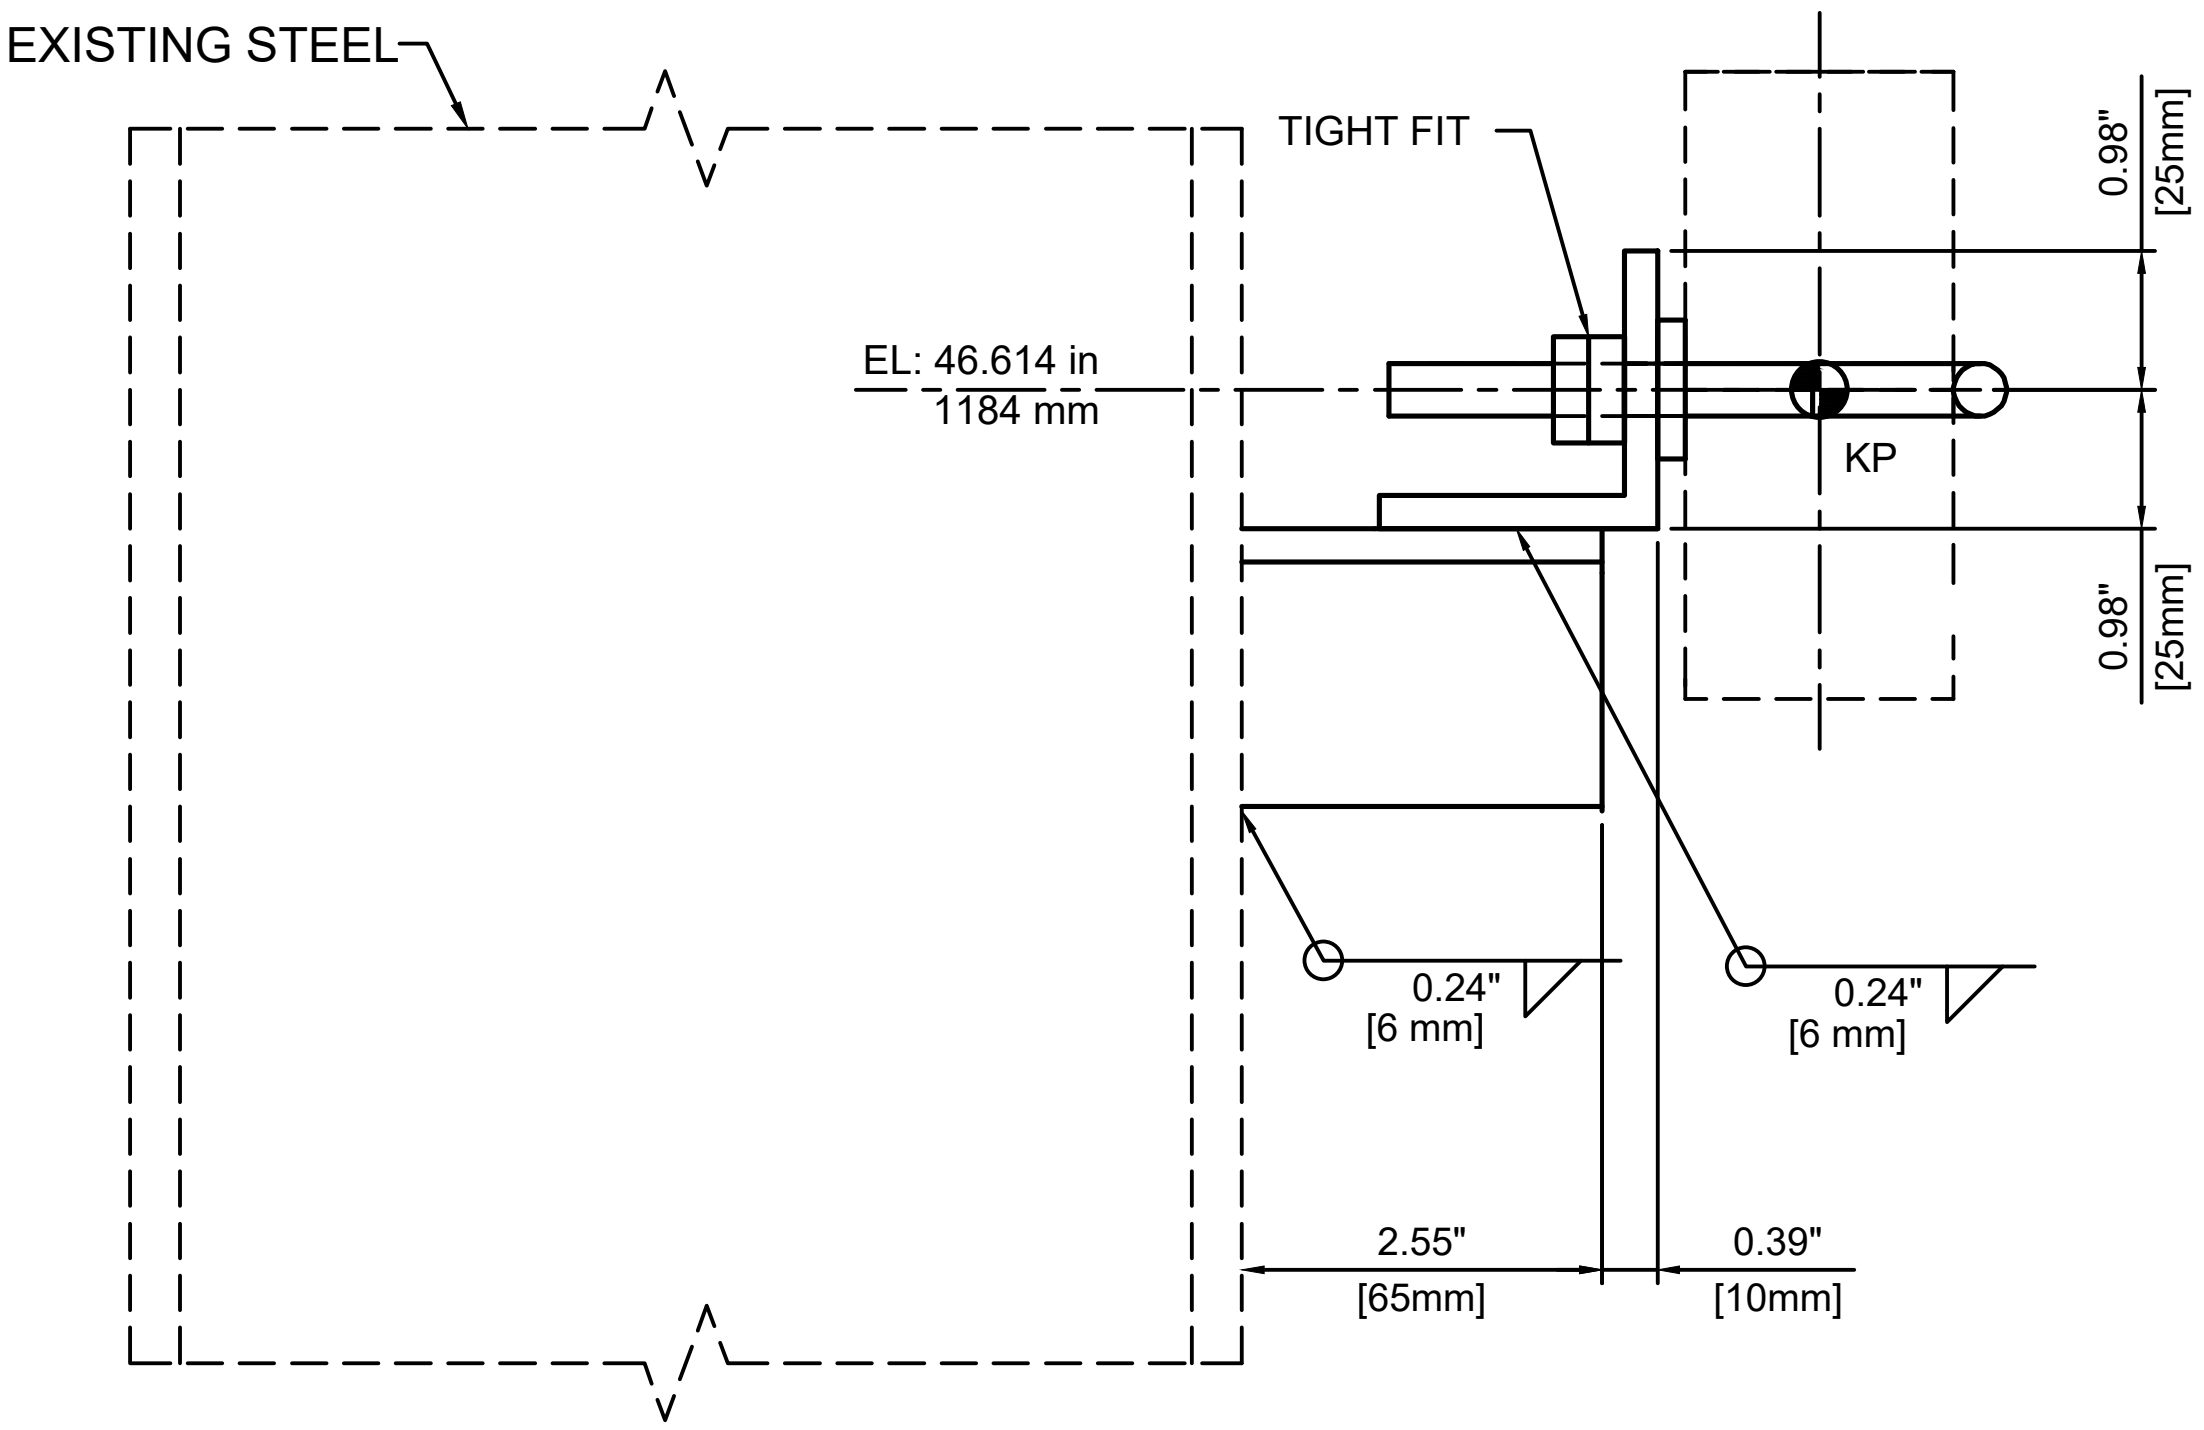
EXISTING STEEL
TIGHT FIT
EL: 46.614 in
1184 mm
KP
0.98"
[25mm]
0.98"
[25mm]
0.24"
[6 mm]
0.24"
[6 mm]
2.55"
[65mm]
0.39"
[10mm]

LOOKING FUEL GAS UNIT SIDE
1:2.5



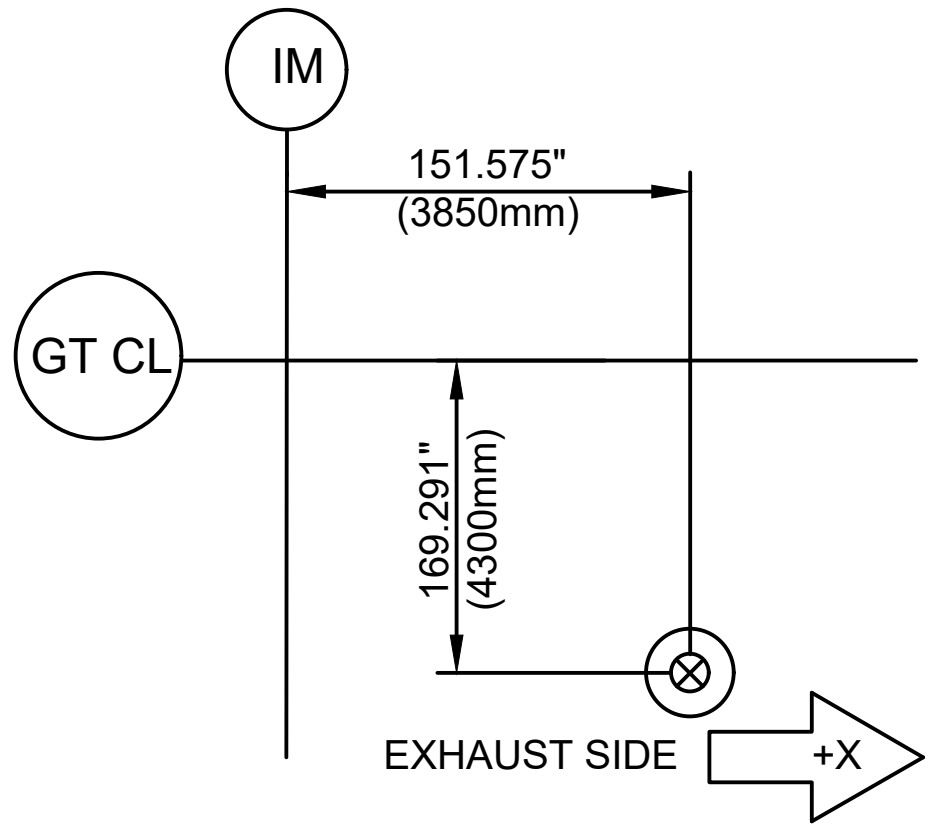
IM
GT CL
151.575"
(3850mm)
169.291"
(4300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
✕ S.A. = STEEL ATTACHMENT(S)

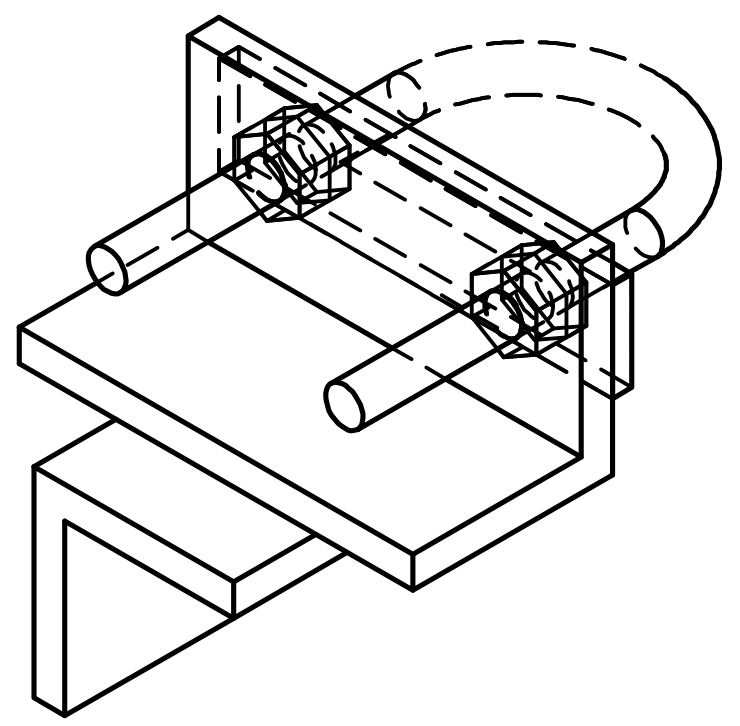

ISOMETRIC VIEW

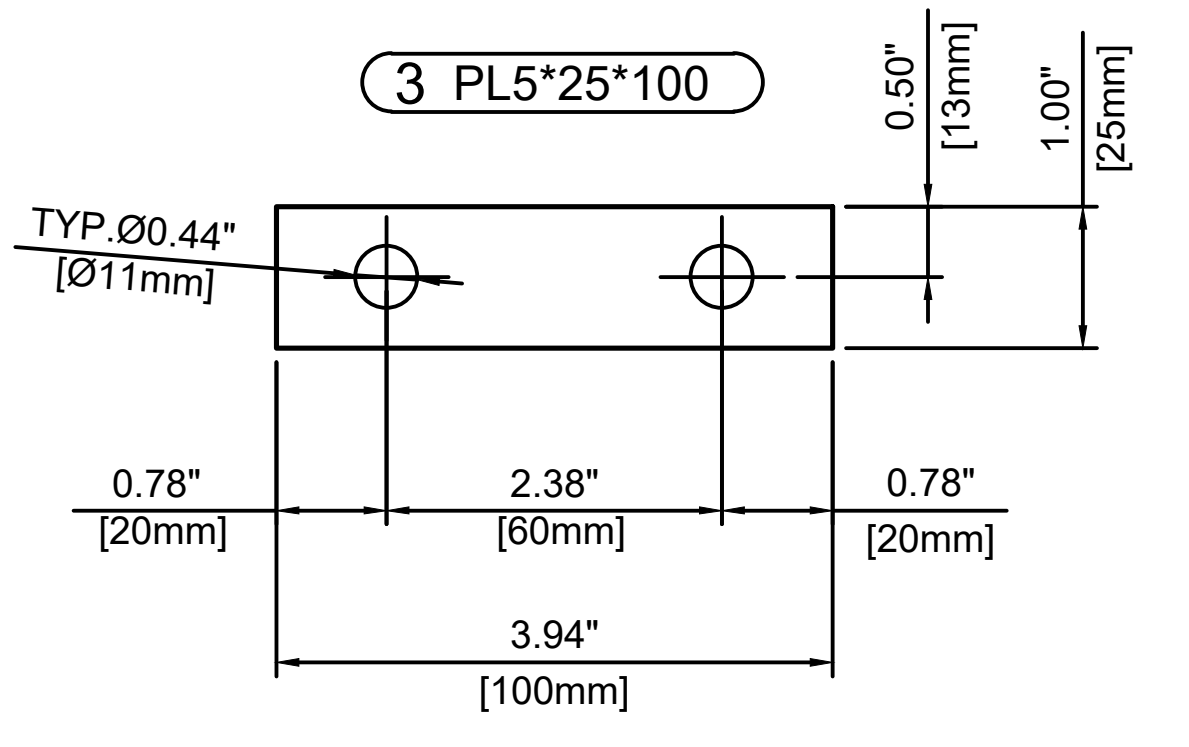
3 PL5*25*100
TYP.Ø0.44"
[Ø11mm]
0.50"
[13mm]
1.00"
[25mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

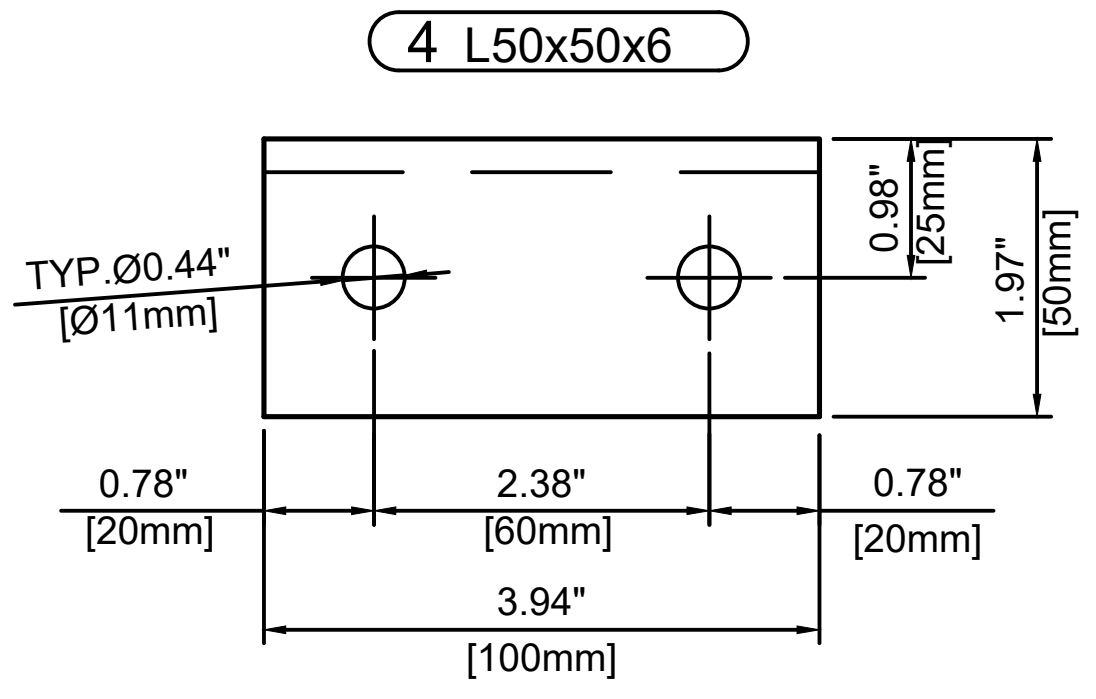
4 L50x50x6
TYP.Ø0.44"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			3.94	100	1	0.98	0.44	SS400
5	L50x50x6	JIS G 3192			2.56	65	1	0.63	0.29	SS400
							TOTAL	2.29	1.04	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-01

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR031

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

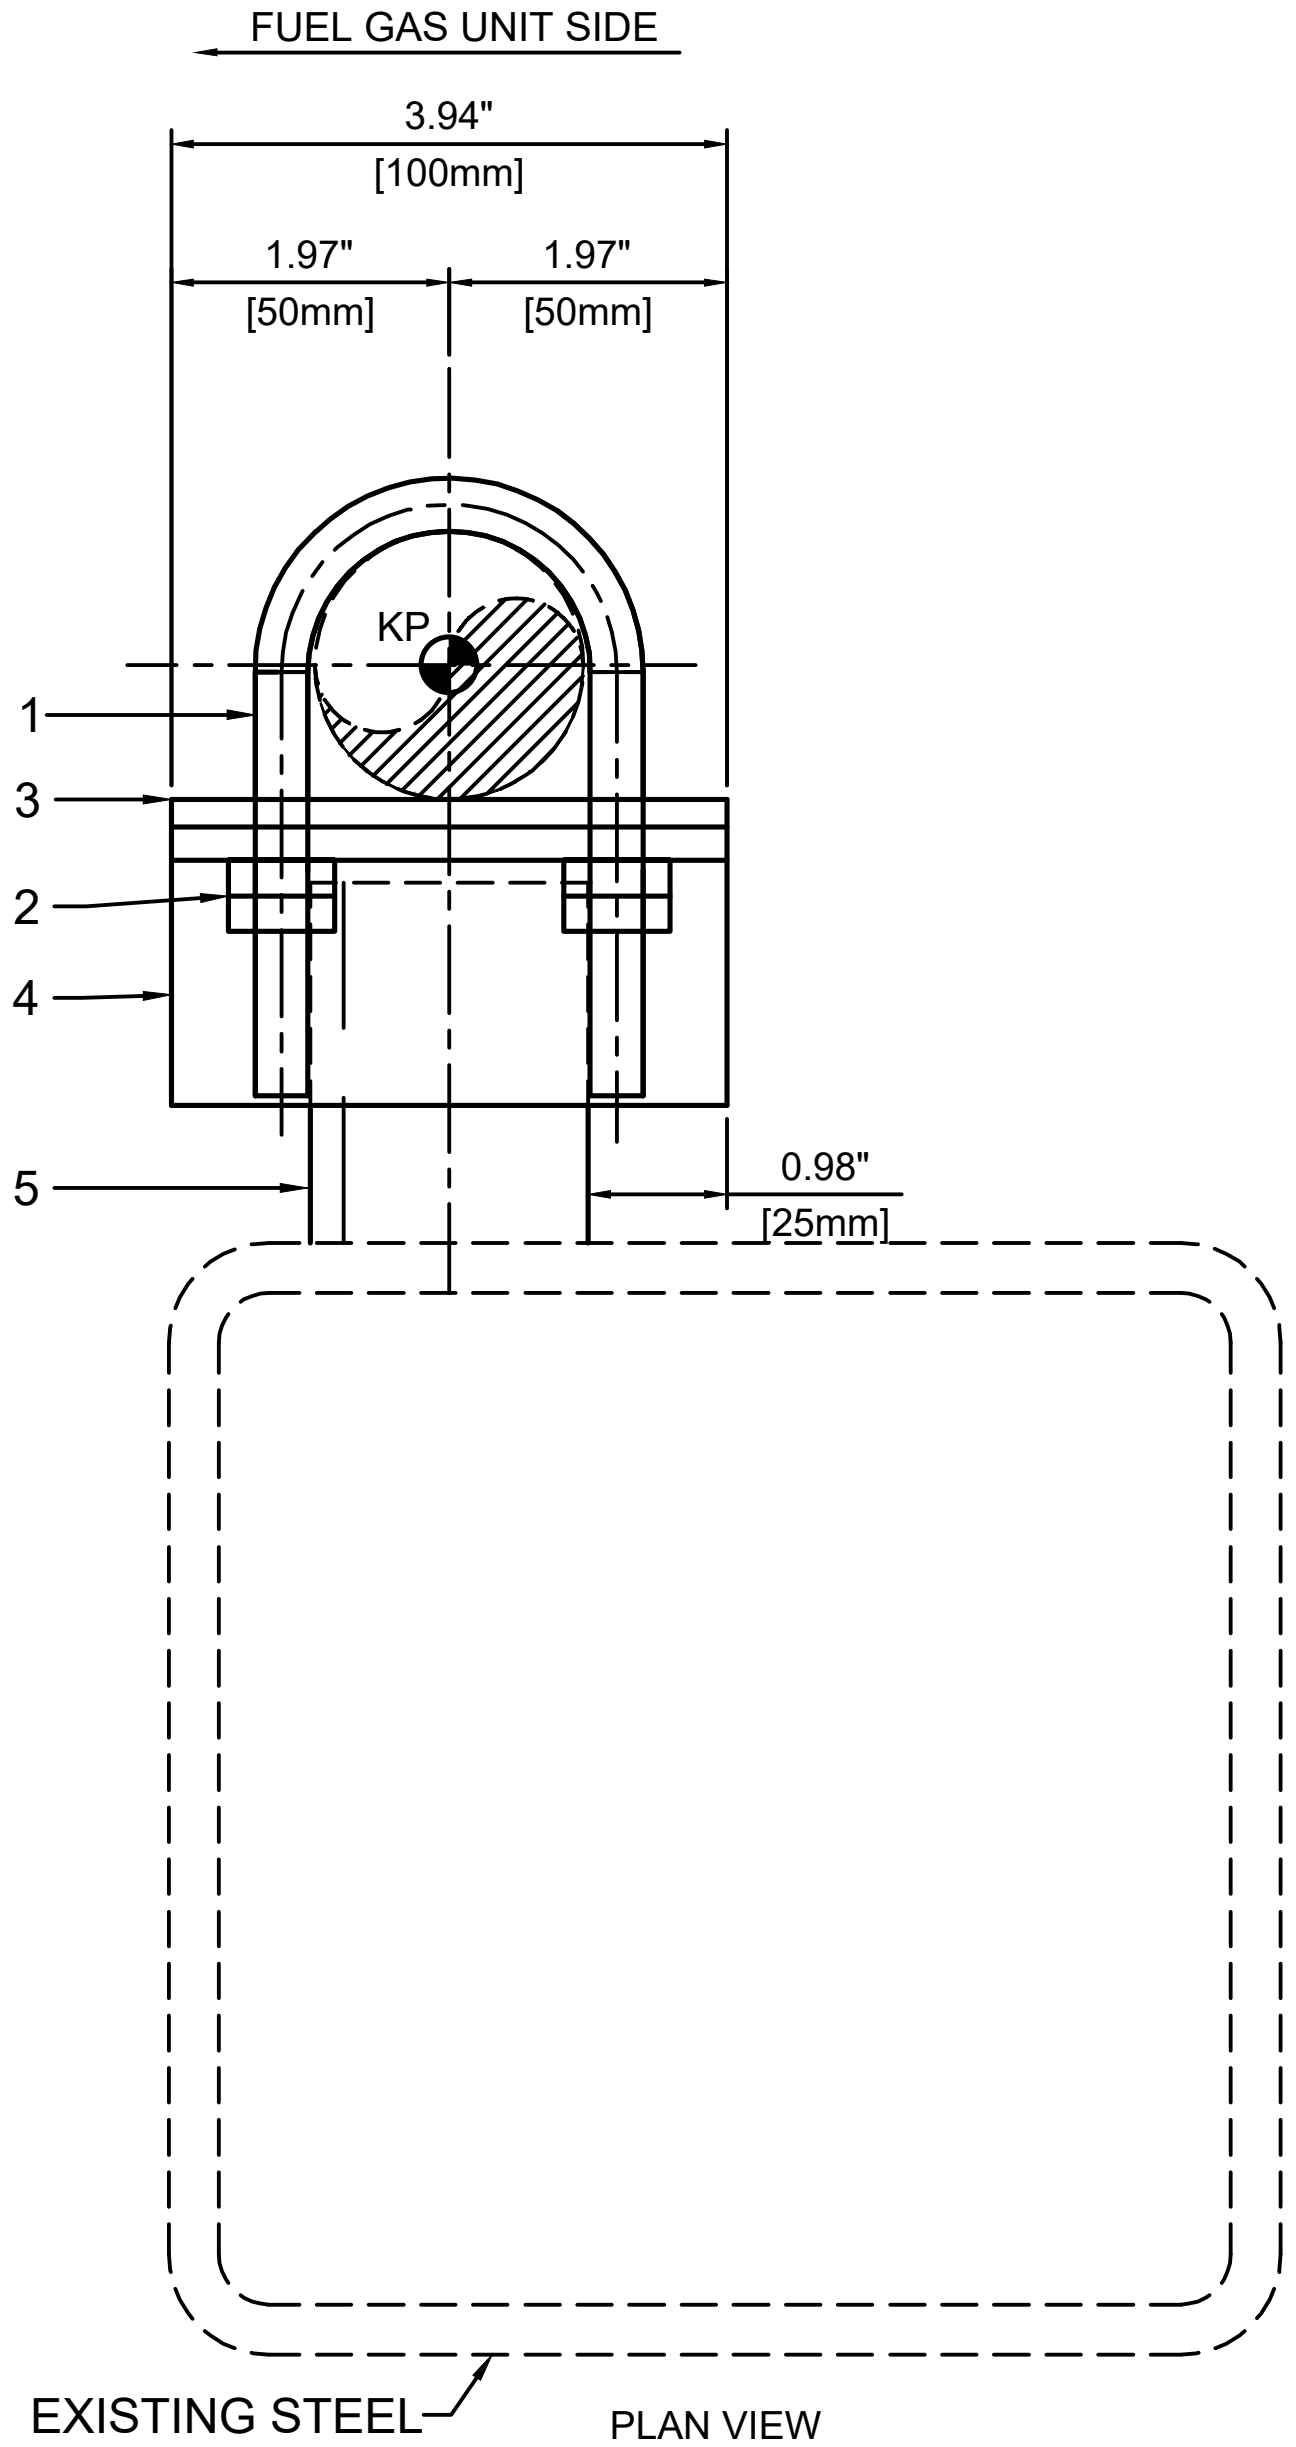
FUEL GAS UNIT SIDE
3.94"
[100mm]
1.97"
[50mm]
1.97"
[50mm]
KP
1
3
2
4
5
0.98"
[25mm]
EXISTING STEEL

PLAN VIEW
1:2.5

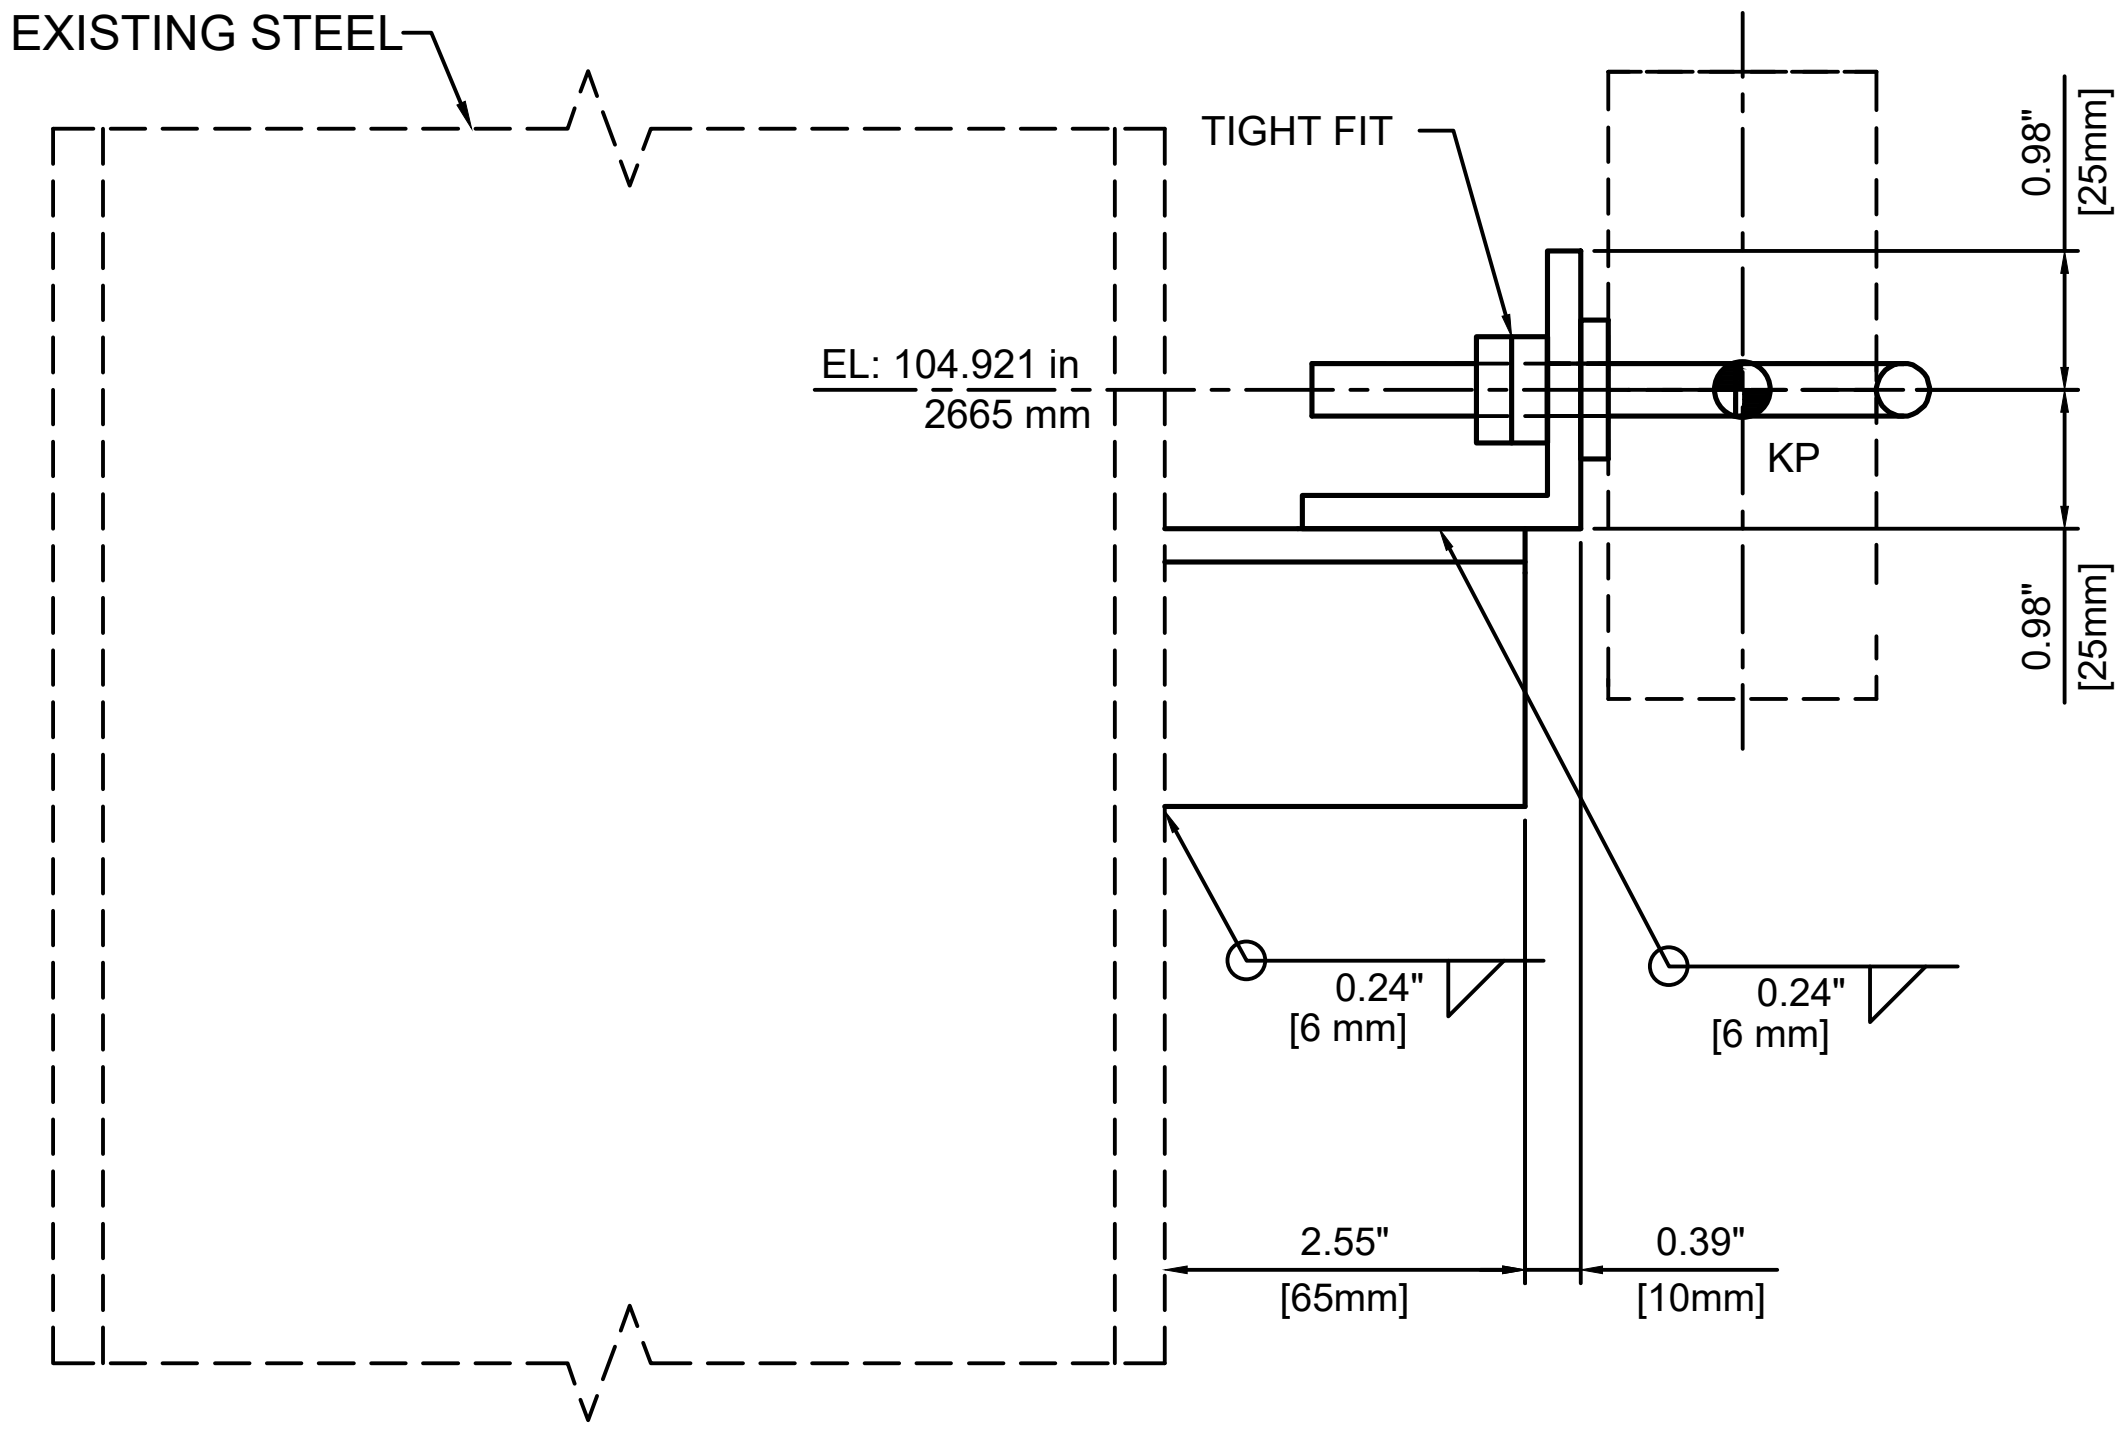
EXISTING STEEL
TIGHT FIT
EL: 104.921 in
2665 mm
KP
0.98"
[25mm]
0.98"
[25mm]
0.24"
[6 mm]
0.24"
[6 mm]
2.55"
[65mm]
0.39"
[10mm]

LOOKING FUEL GAS UNIT SIDE
1:2.5



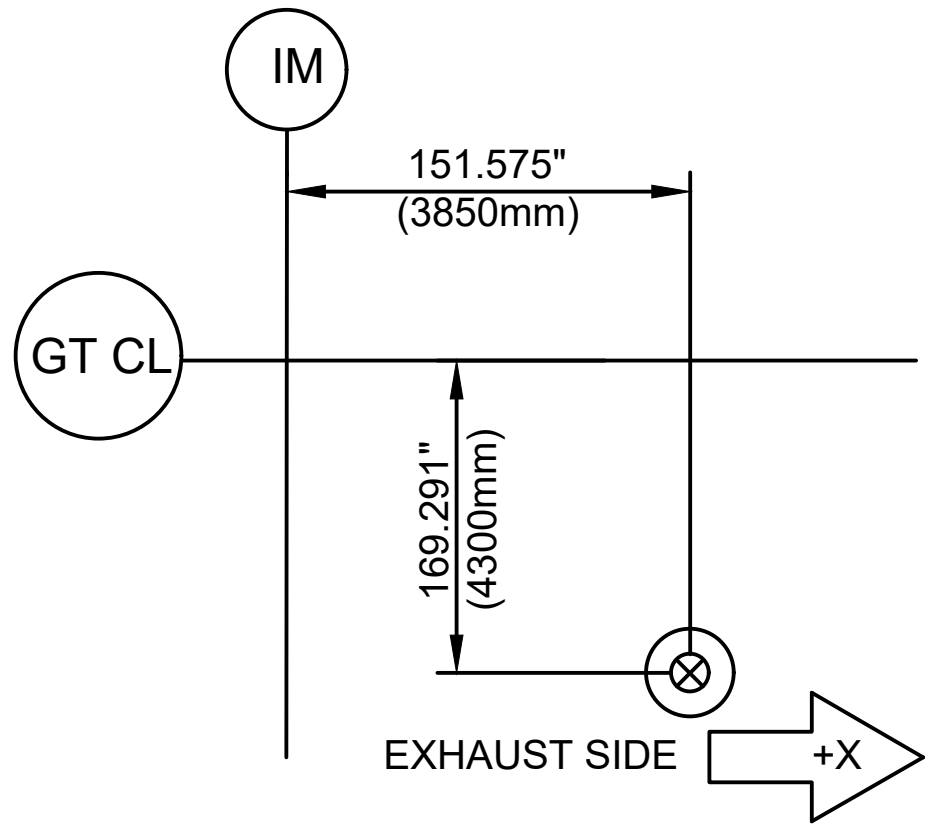
IM
151.575"
(3850mm)
GT CL
169.291"
(4300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

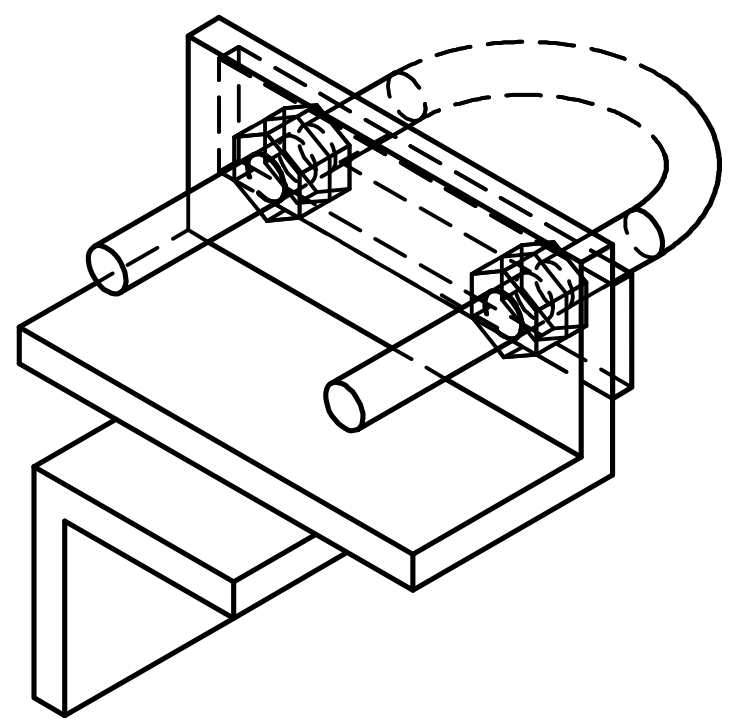

ISOMETRIC VIEW

3 PL5*25*100

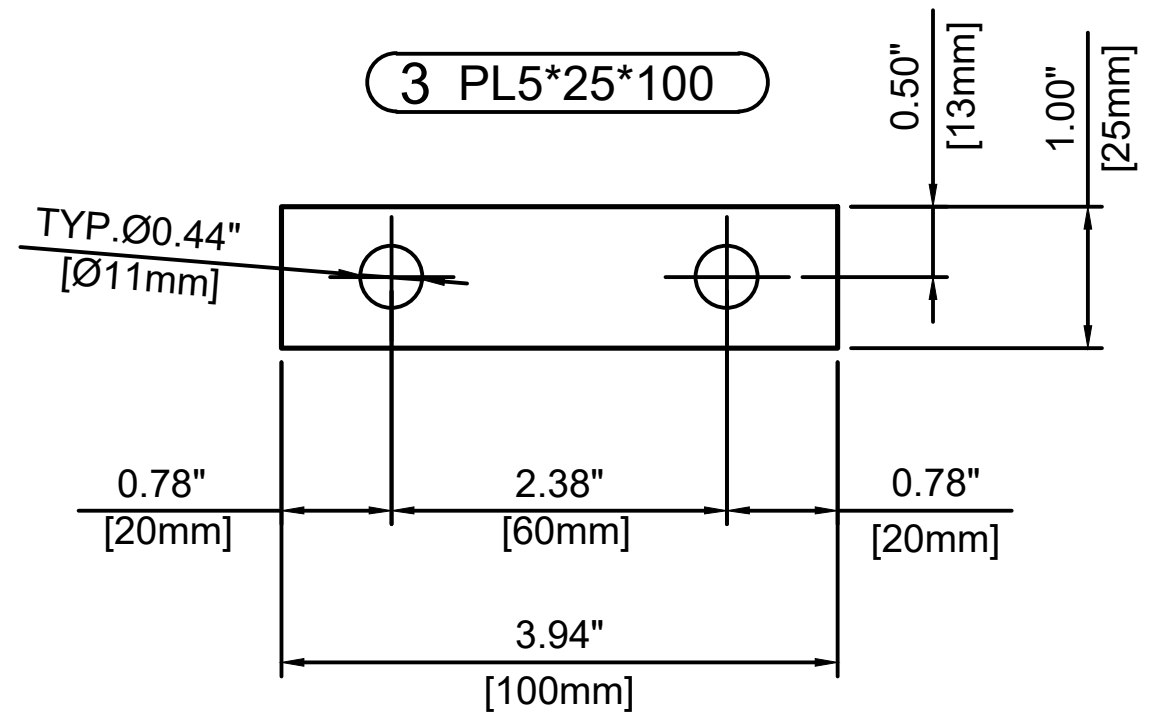
TYP.Ø0.44"
[Ø11mm]
0.50"
[13mm]
1.00"
[25mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

4 L50x50x6

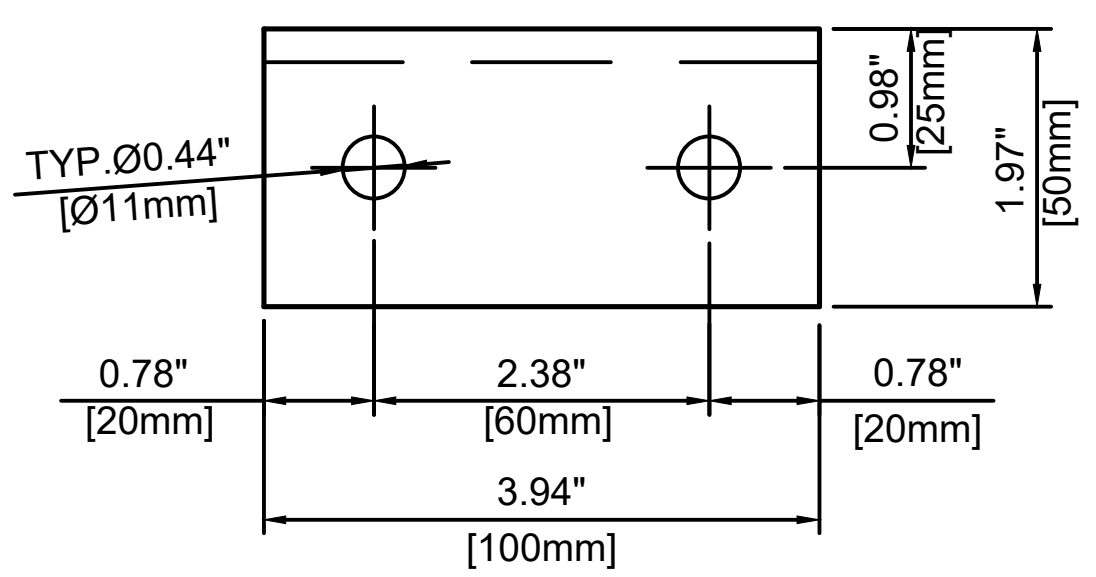
TYP.Ø0.44"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			3.94	100	1	0.98	0.44	SS400
5	L50x50x6	JIS G 3192			2.56	65	1	0.63	0.29	SS400
							TOTAL	2.29	1.04	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-02

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

PAGE NUMBER:	1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR031

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

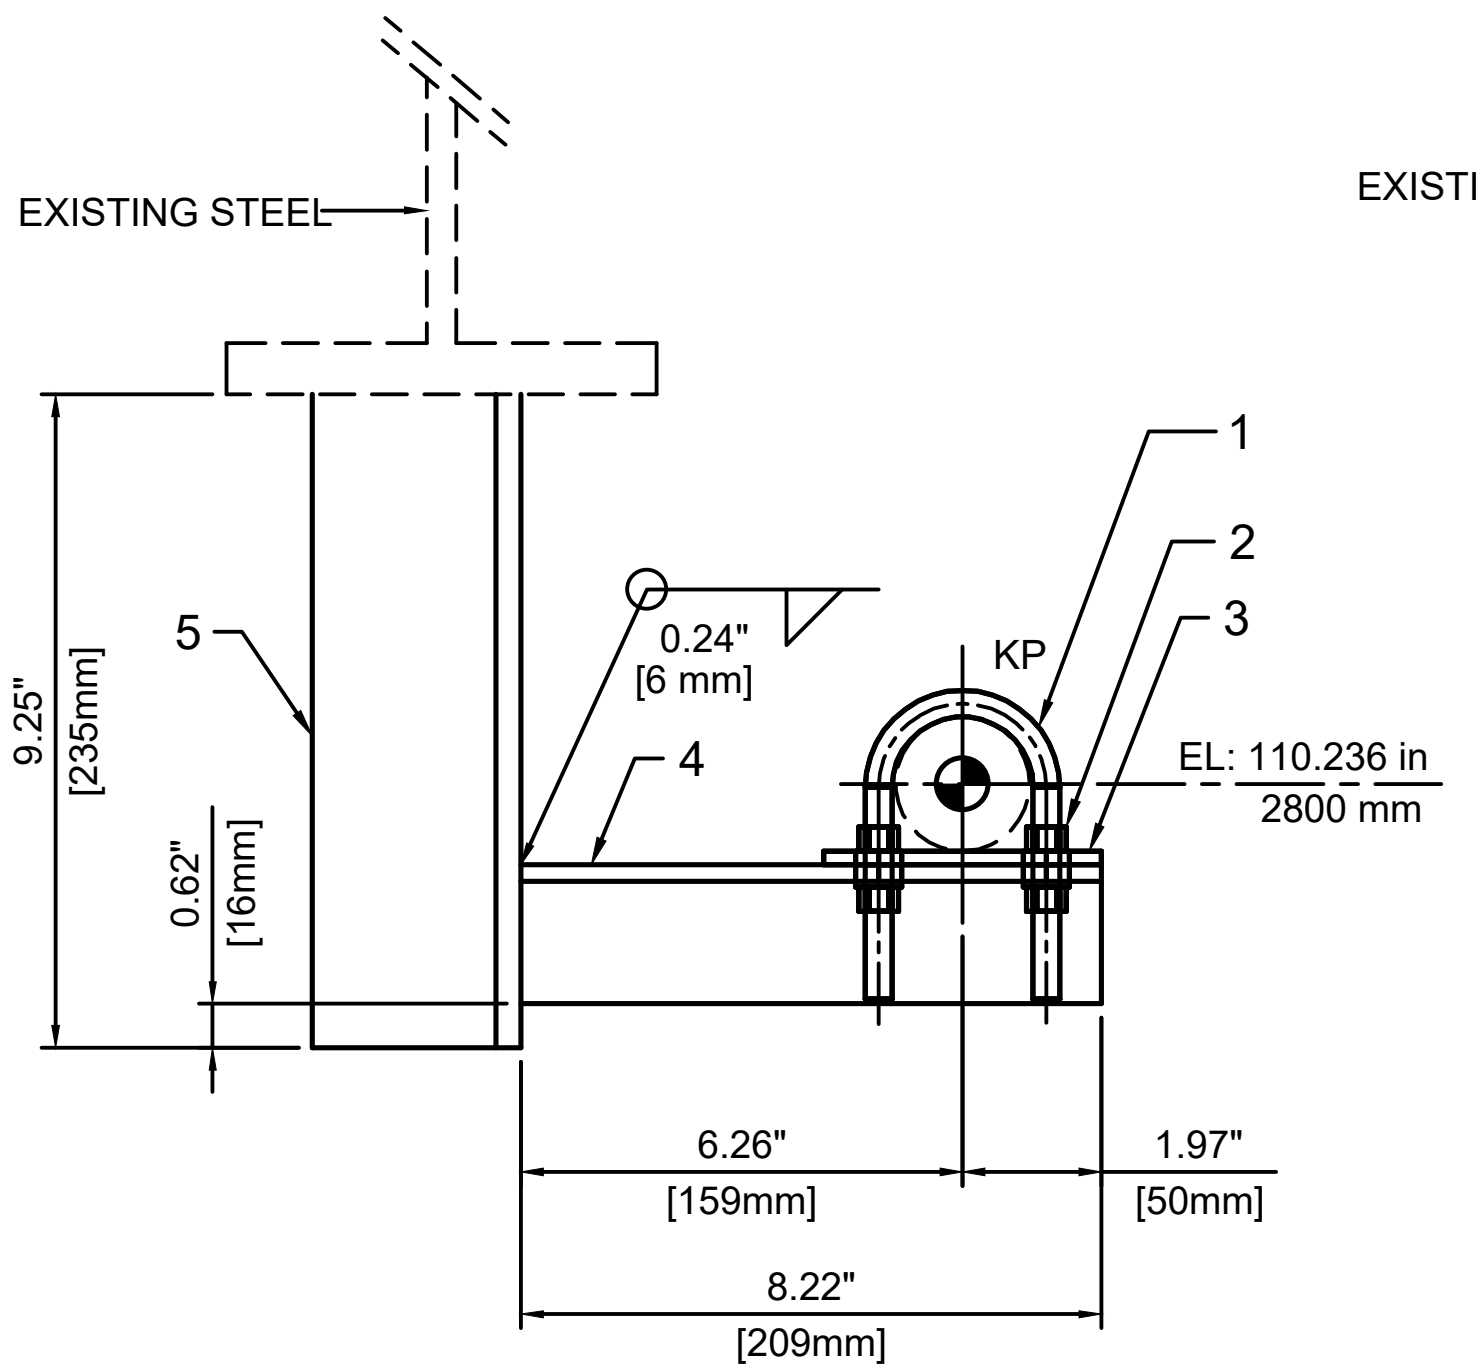

EXISTING STEEL
5
9.25"
[235mm]
0.62"
[16mm]
0.24"
[6 mm]
4
KP
1
2
3
EL: 110.236 in
2800 mm
6.26"
[159mm]
1.97"
[50mm]
8.22"
[209mm]

LOOKING EXHAUST SIDE
1:5

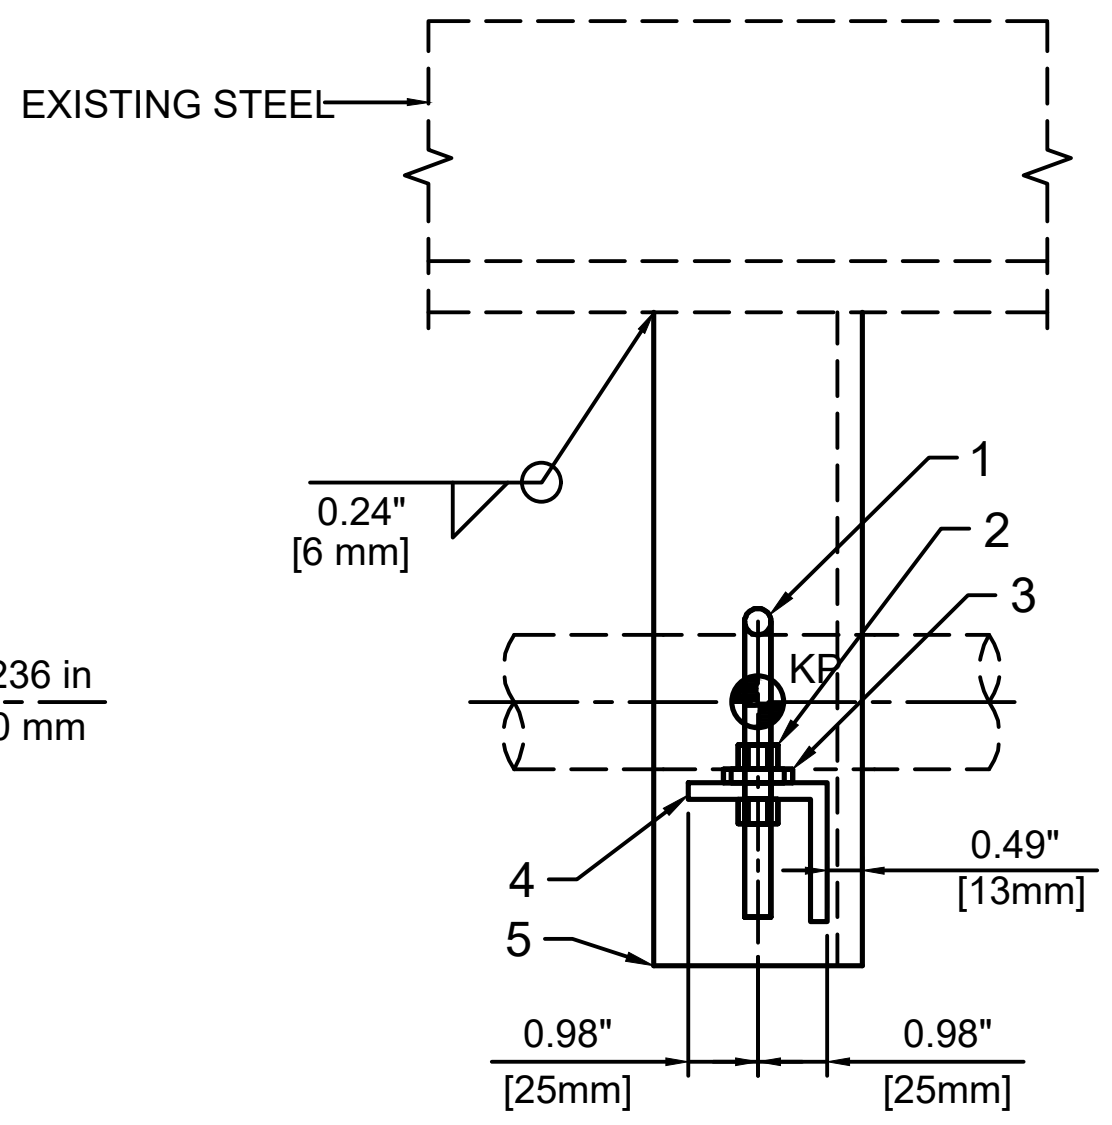

EXISTING STEEL
0.24"
[6 mm]
1
2
3
KP
4
5
0.49"
[13mm]
0.98"
[25mm]
0.98"
[25mm]

LOOKING FUEL GAS UNIT SIDE
1:5

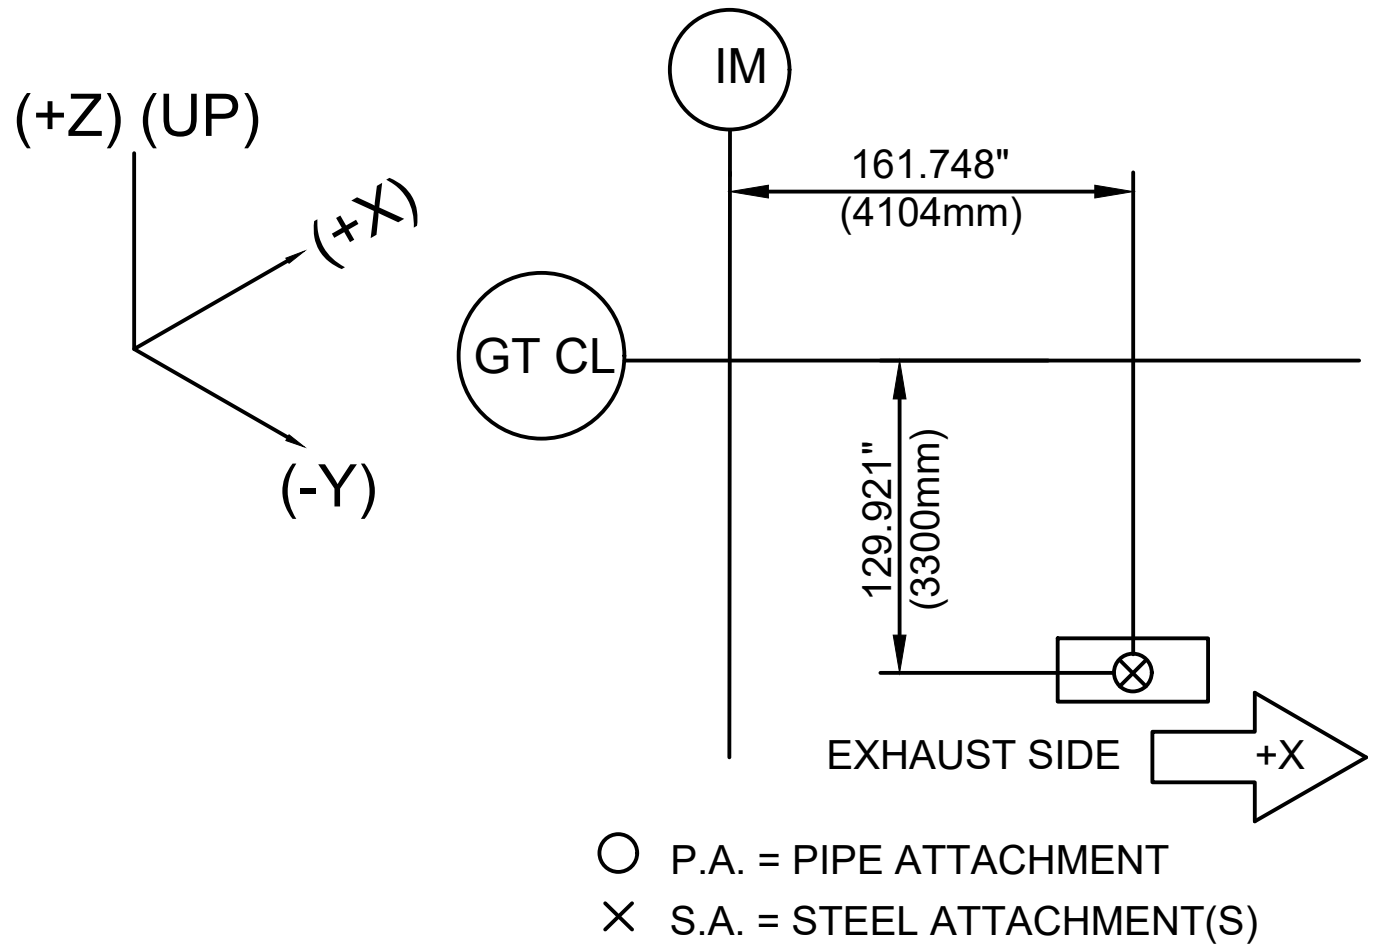

(+Z) (UP)
(+X)
(-Y)
IM
GT CL
161.748"
(4104mm)
129.921"
(3300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

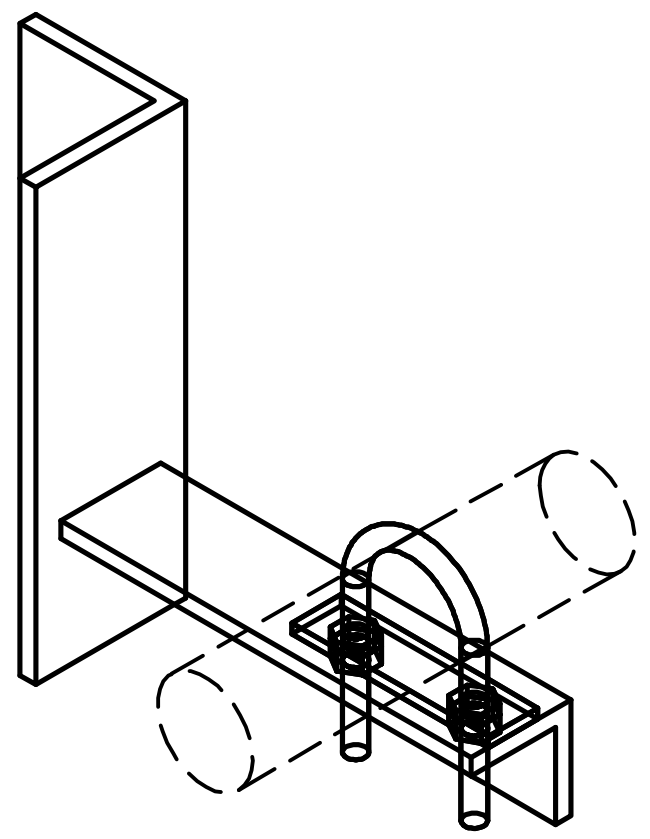

ISOMETRIC VIEW

3 PL5*25*100

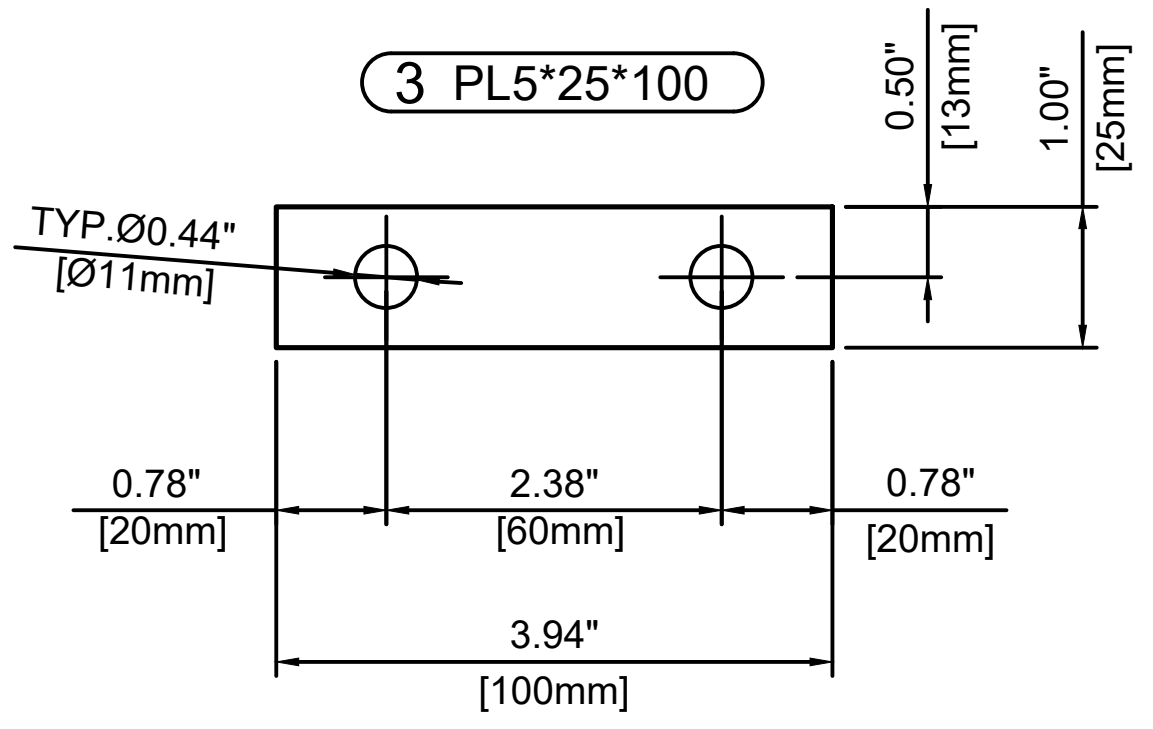

0.50"
[13mm]
1.00"
[25mm]
TYP.Ø0.44"
[Ø11mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

4 L50x50x6

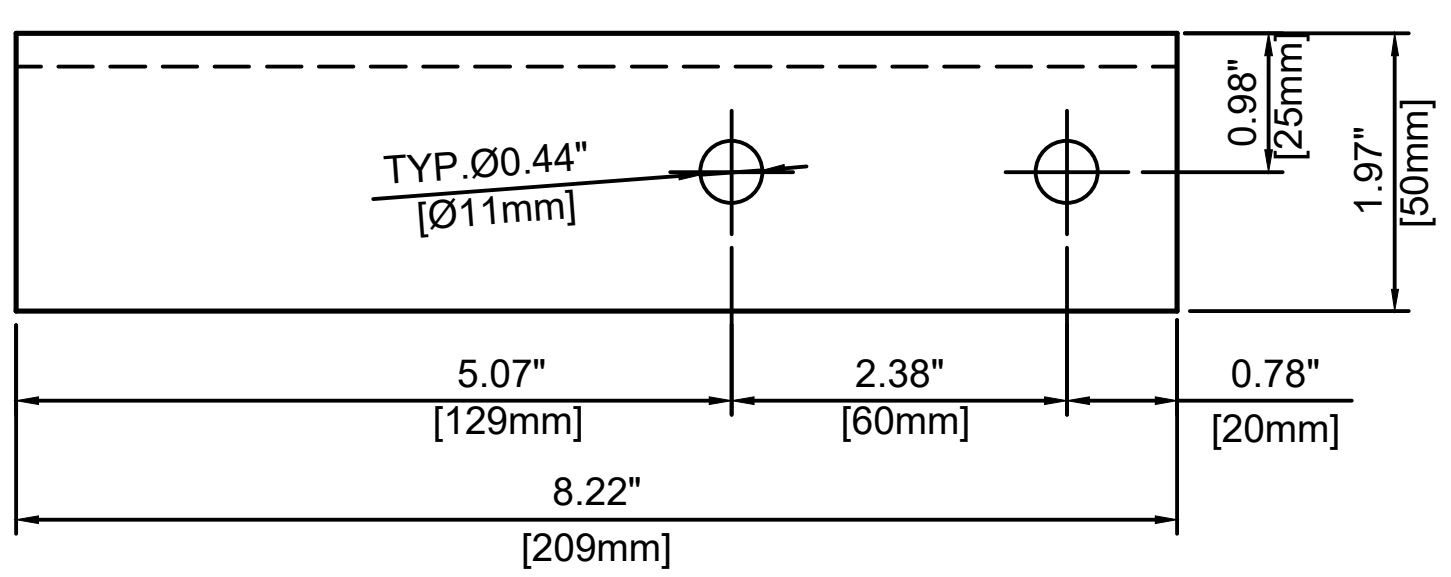

TYP.Ø0.44"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
5.07"
[129mm]
2.38"
[60mm]
0.78"
[20mm]
8.22"
[209mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			8.23	209	1	2.04	0.93	SS400
5	L75x75x9	JIS G 3192			9.25	235	1	5.16	2.34	SS400
							TOTAL	7.88	3.57	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-03

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR031

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

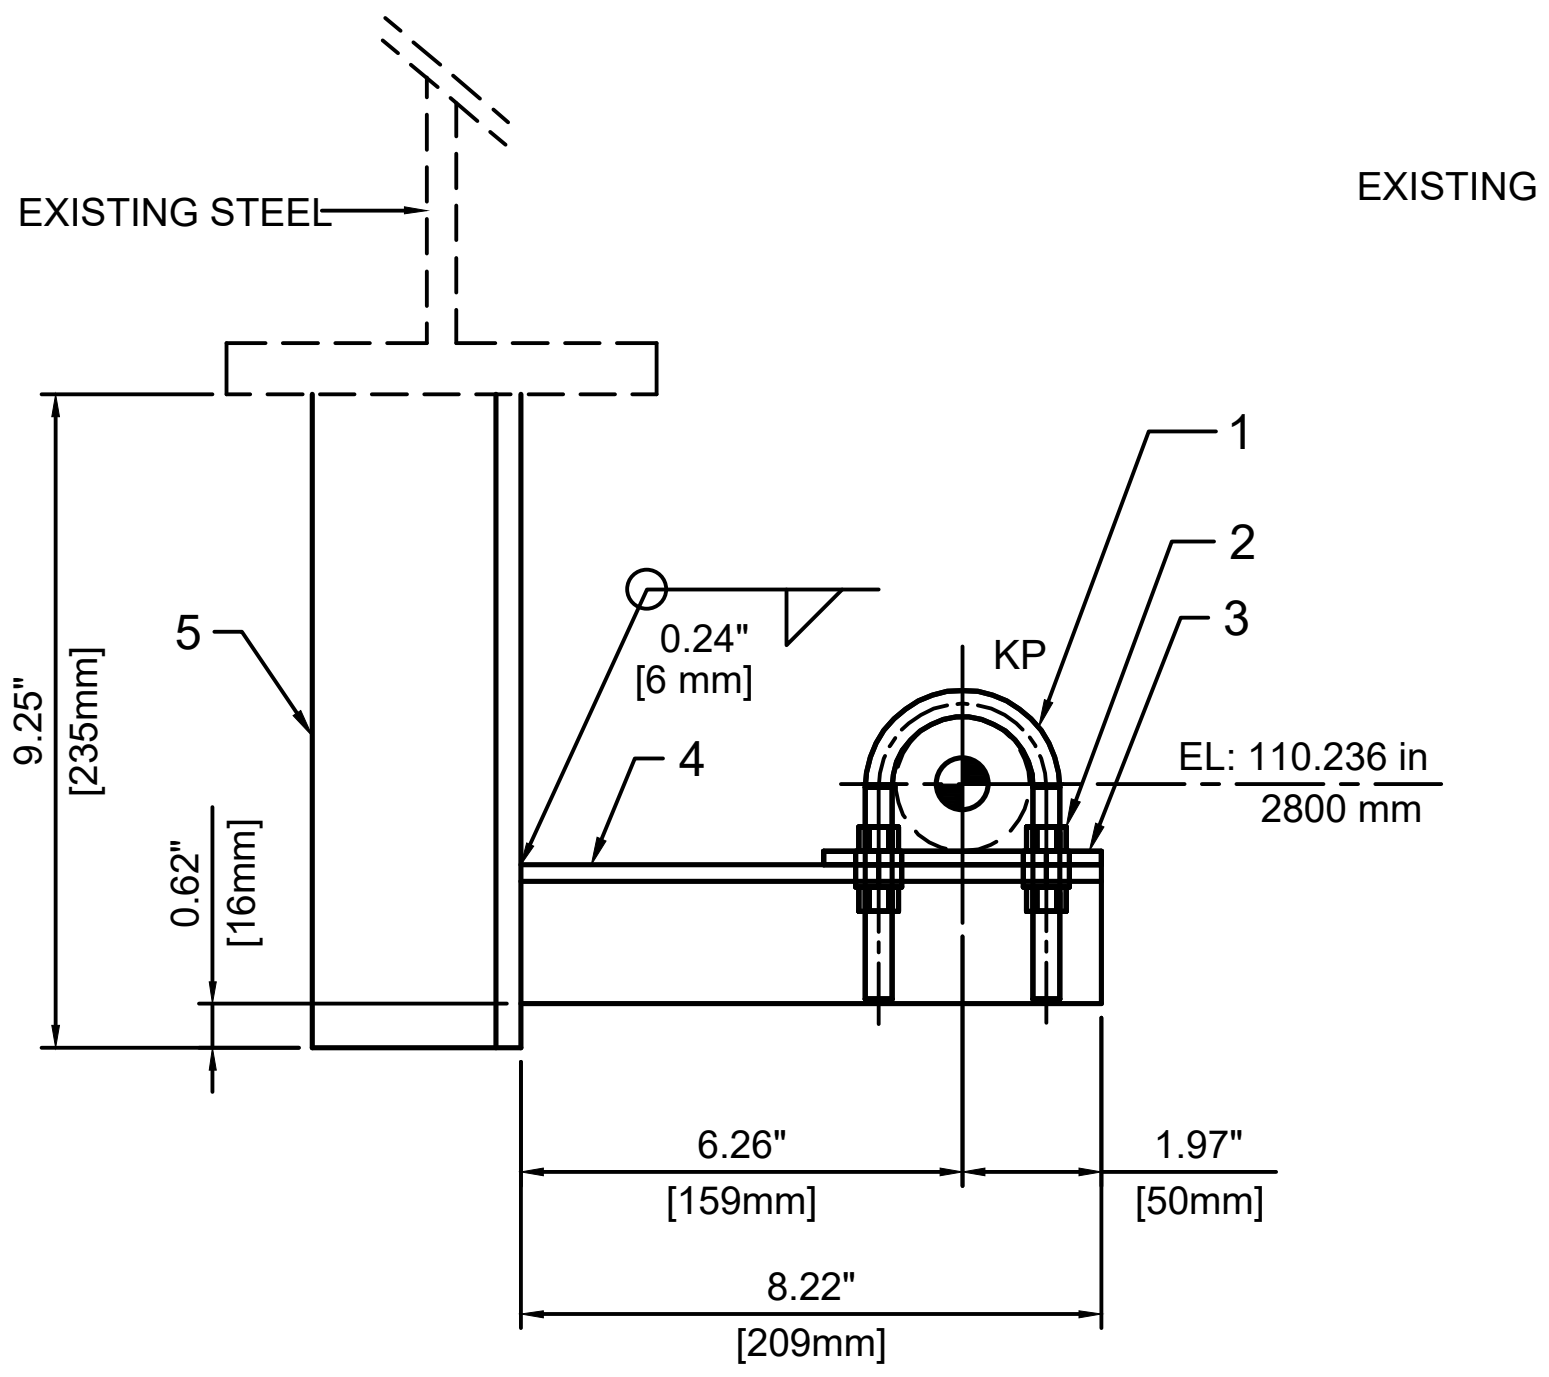
EXISTING STEEL
5
4
1
2
3
KP
0.24"
[6 mm]
9.25"
[235mm]
0.62"
[16mm]
EL: 110.236 in
2800 mm
6.26"
[159mm]
1.97"
[50mm]
8.22"
[209mm]

LOOKING EXHAUST SIDE
1:5

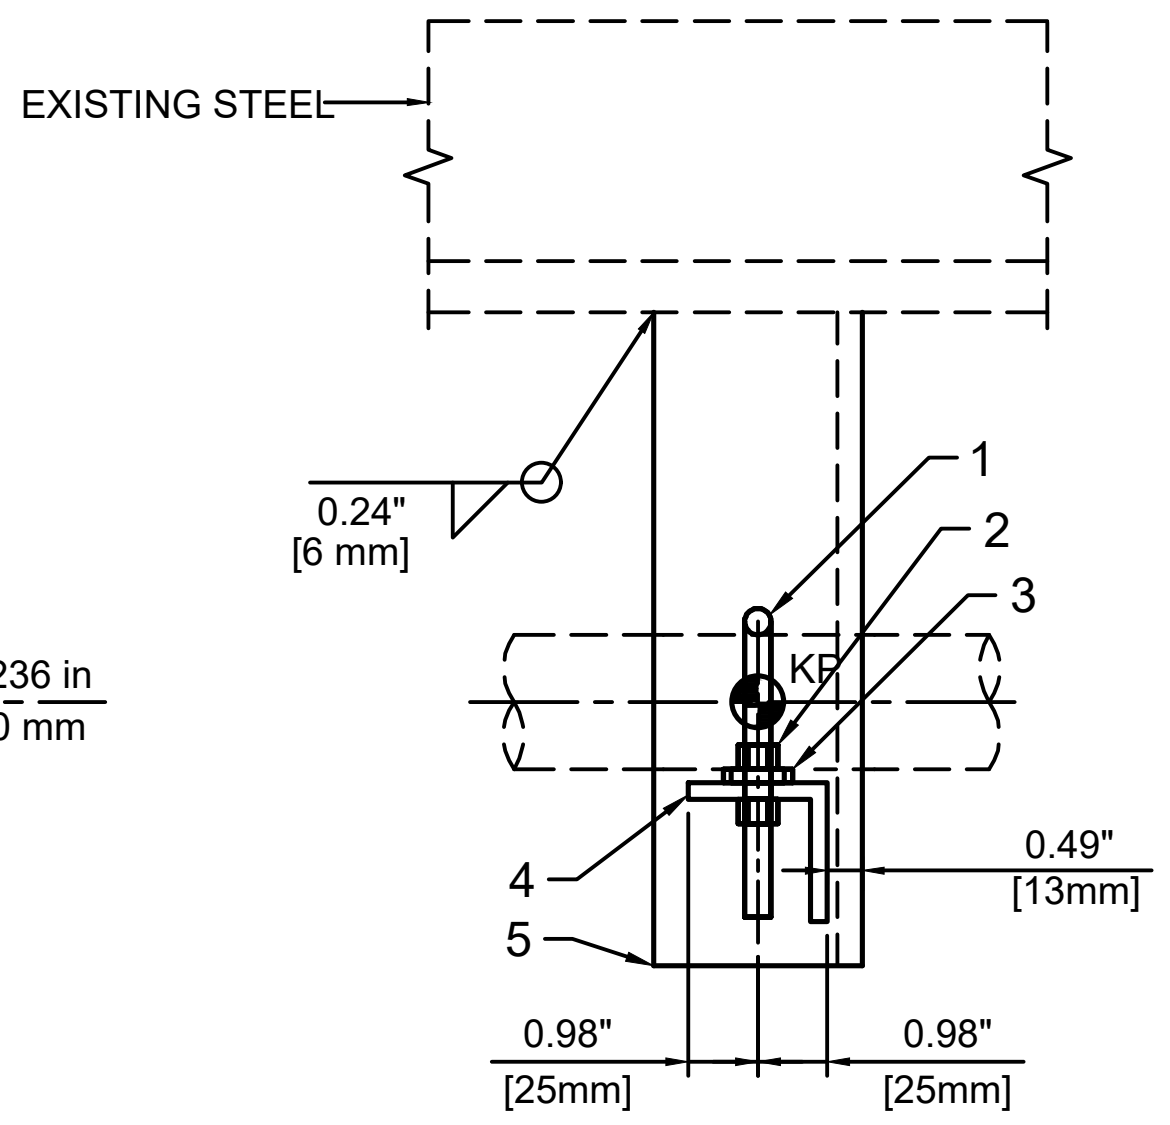
EXISTING STEEL
0.24"
[6 mm]
1
2
3
KP
4
5
0.49"
[13mm]
0.98"
[25mm]
0.98"
[25mm]

LOOKING FUEL GAS UNIT SIDE
1:5



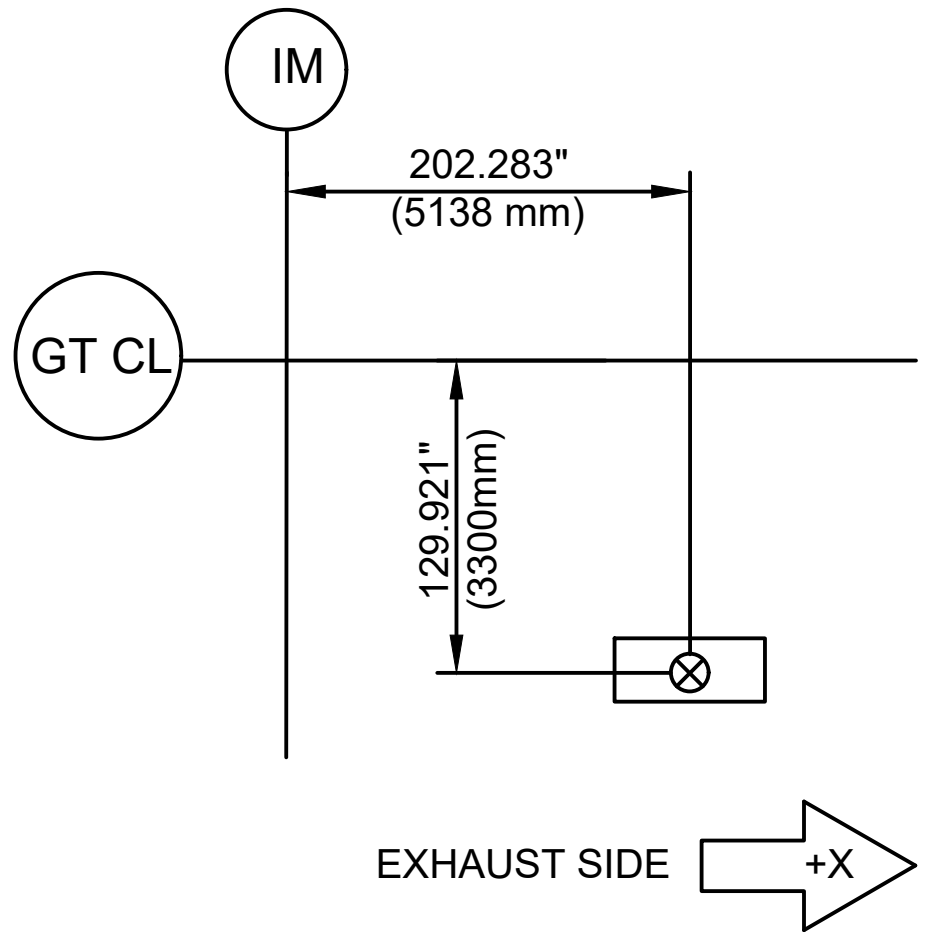
IM
202.283"
(5138 mm)
GT CL
129.921"
(3300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

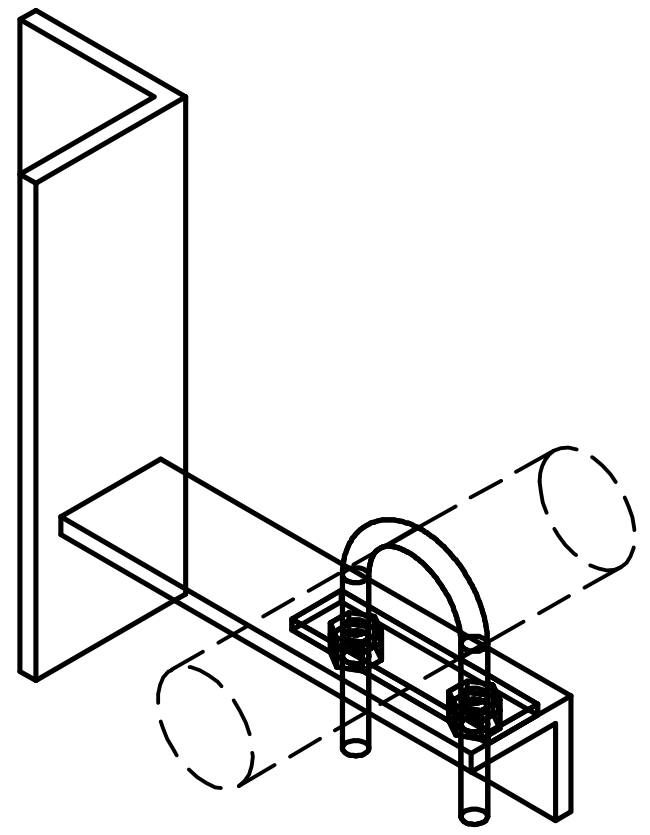

ISOMETRIC VIEW

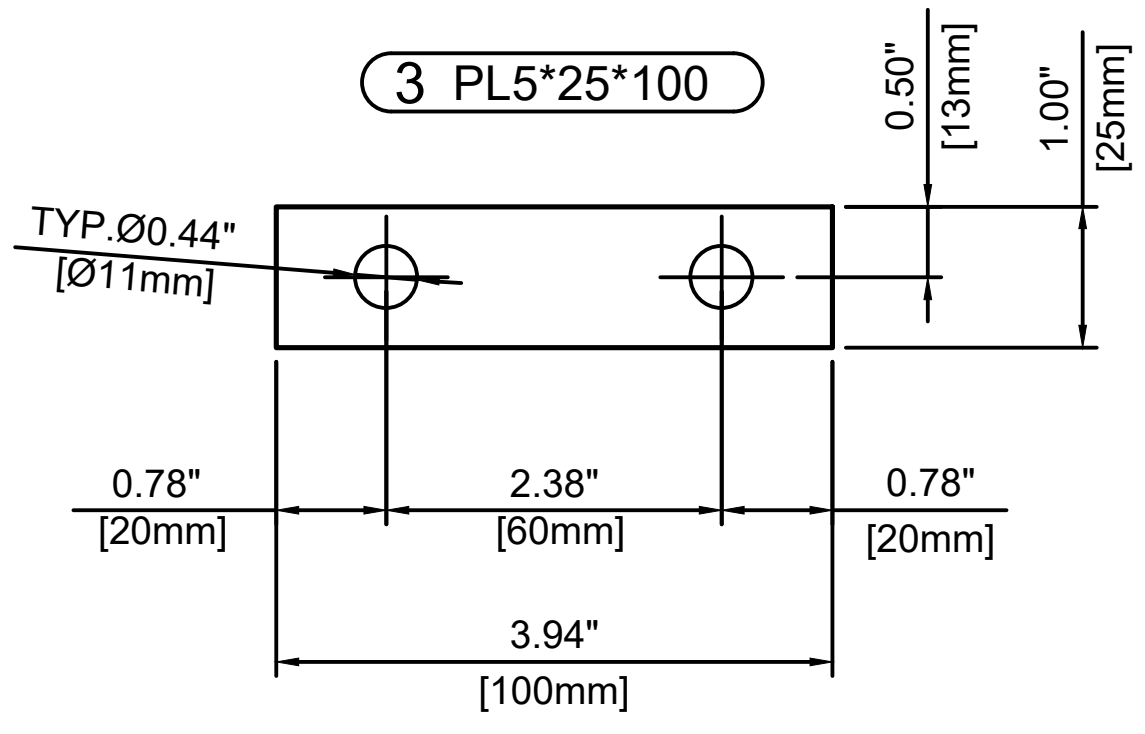
3 PL5*25*100
TYP.Ø0.44"
[Ø11mm]
0.50"
[13mm]
1.00"
[25mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

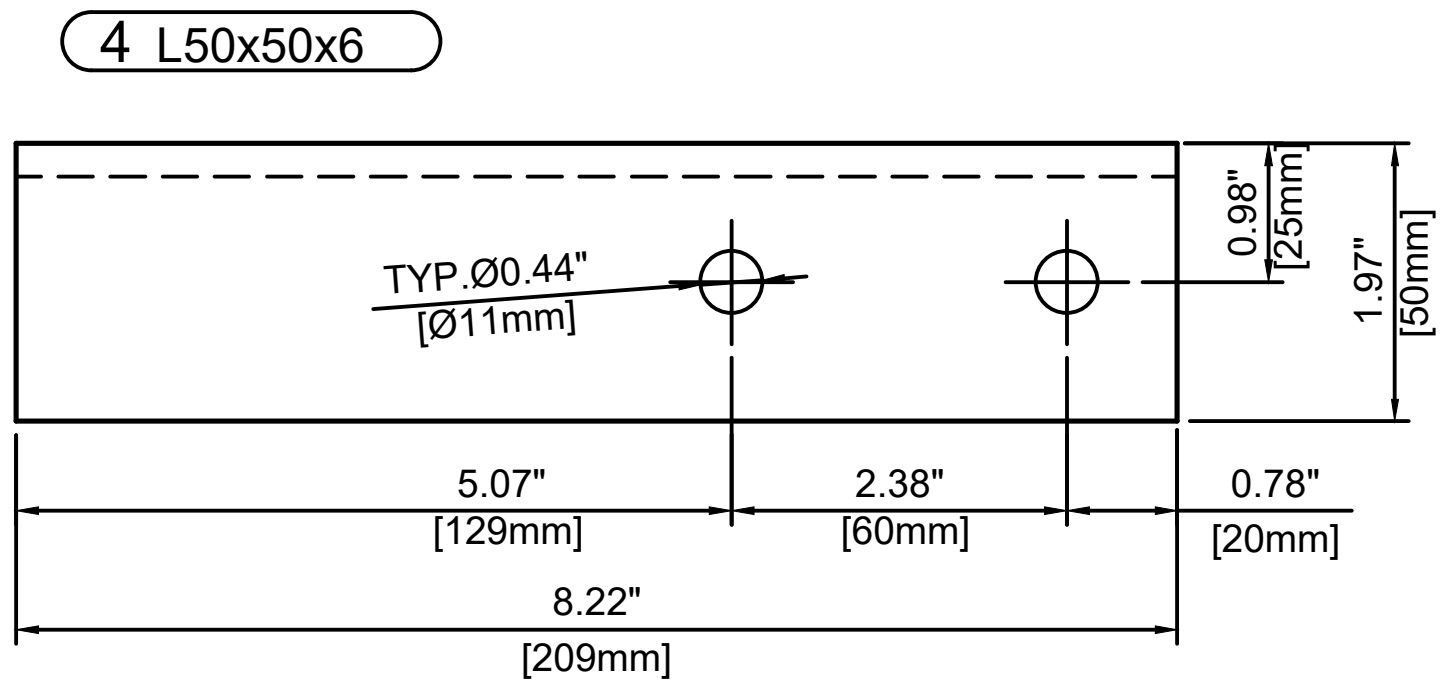
4 L50x50x6
TYP.Ø0.44"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
5.07"
[129mm]
2.38"
[60mm]
0.78"
[20mm]
8.22"
[209mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			8.23	209	1	2.04	0.93	SS400
5	L75x75x9	JIS G 3192			9.25	235	1	5.16	2.34	SS400
							TOTAL	7.88	3.57	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-04

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR031

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

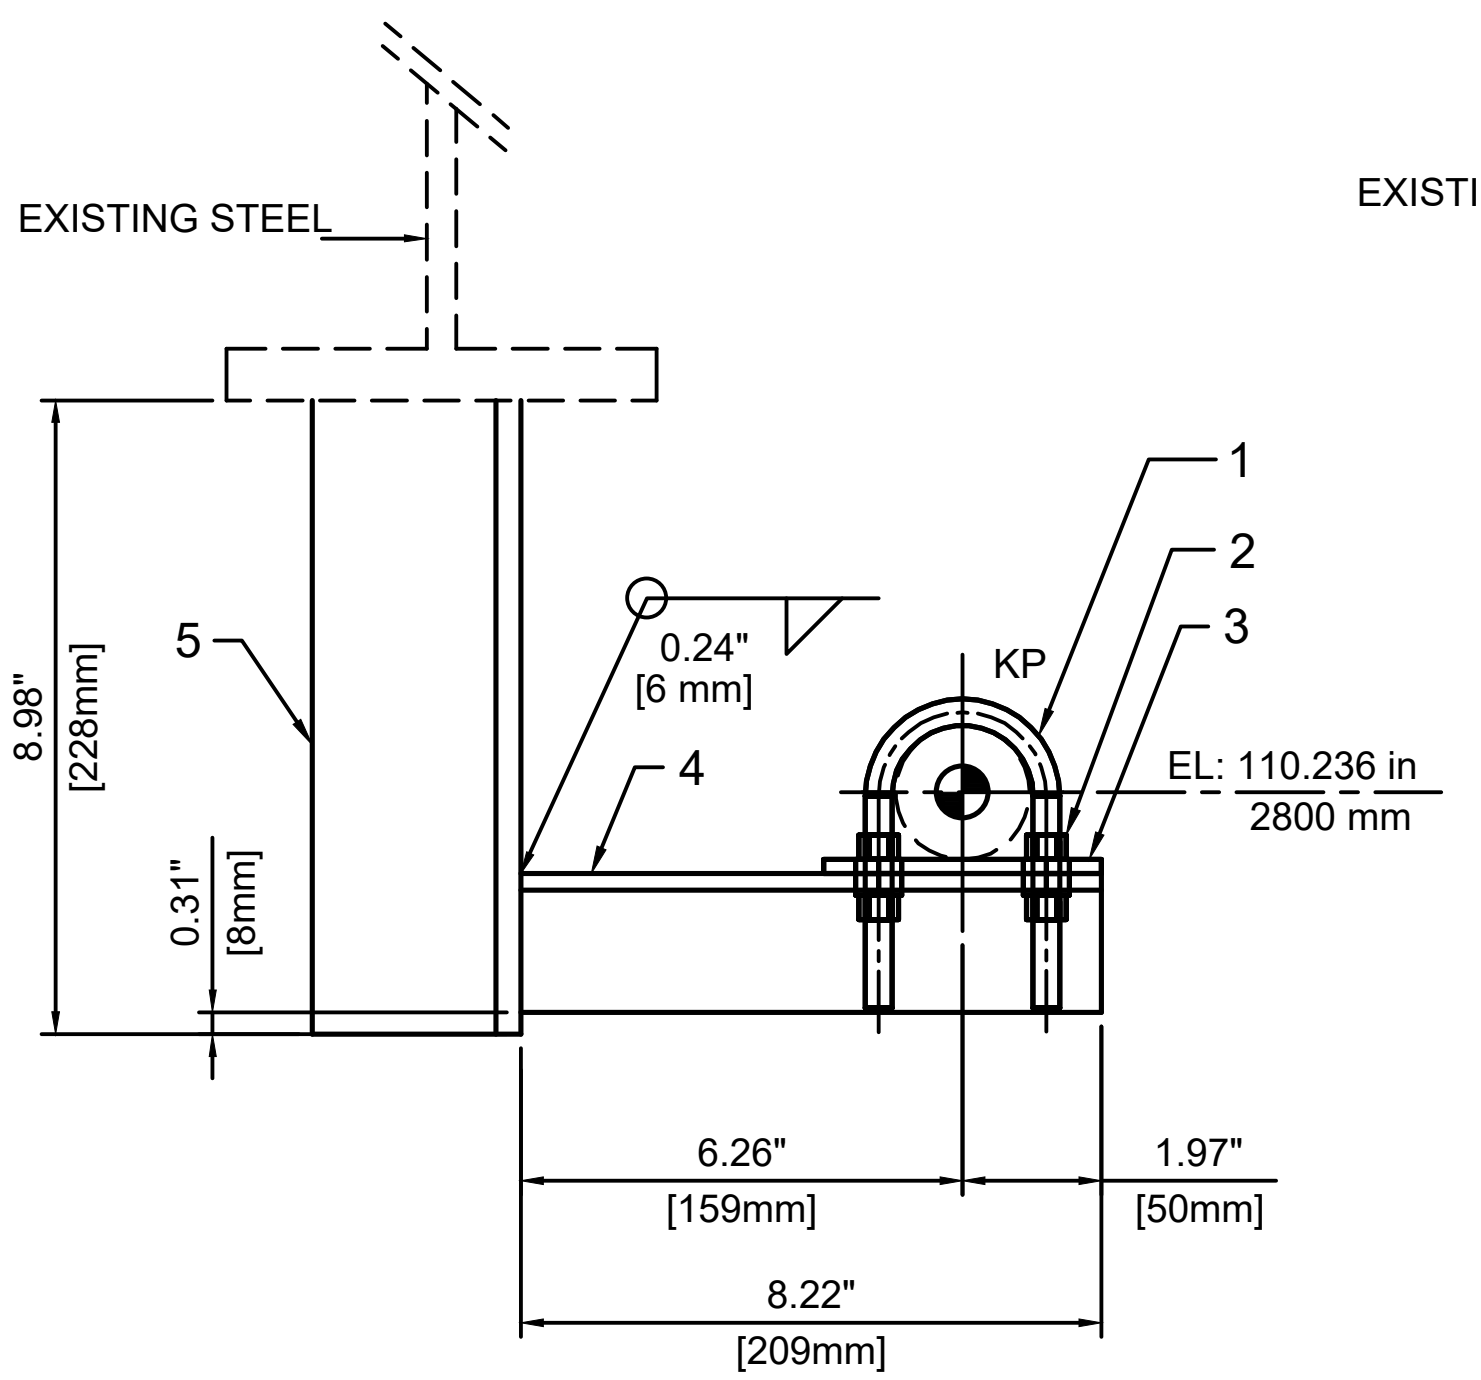
EXISTING STEEL
5
4
1
2
3
KP
0.24"
[6 mm]
8.98"
[228mm]
0.31"
[8mm]
EL: 110.236 in
2800 mm
6.26"
[159mm]
1.97"
[50mm]
8.22"
[209mm]

LOOKING EXHAUST SIDE
1:5

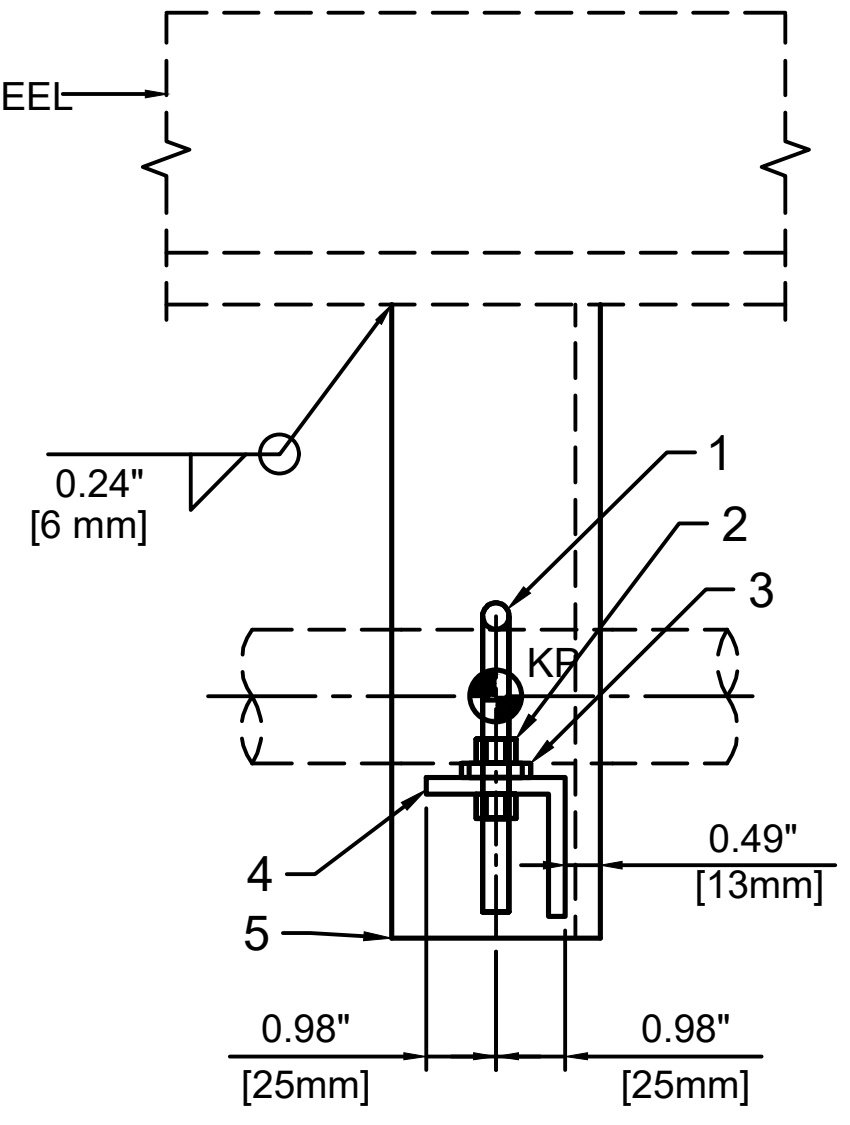
EXISTING STEEL
0.24"
[6 mm]
1
2
3
KP
4
5
0.49"
[13mm]
0.98"
[25mm]
0.98"
[25mm]

LOOKING FUEL GAS UNIT SIDE
1:5



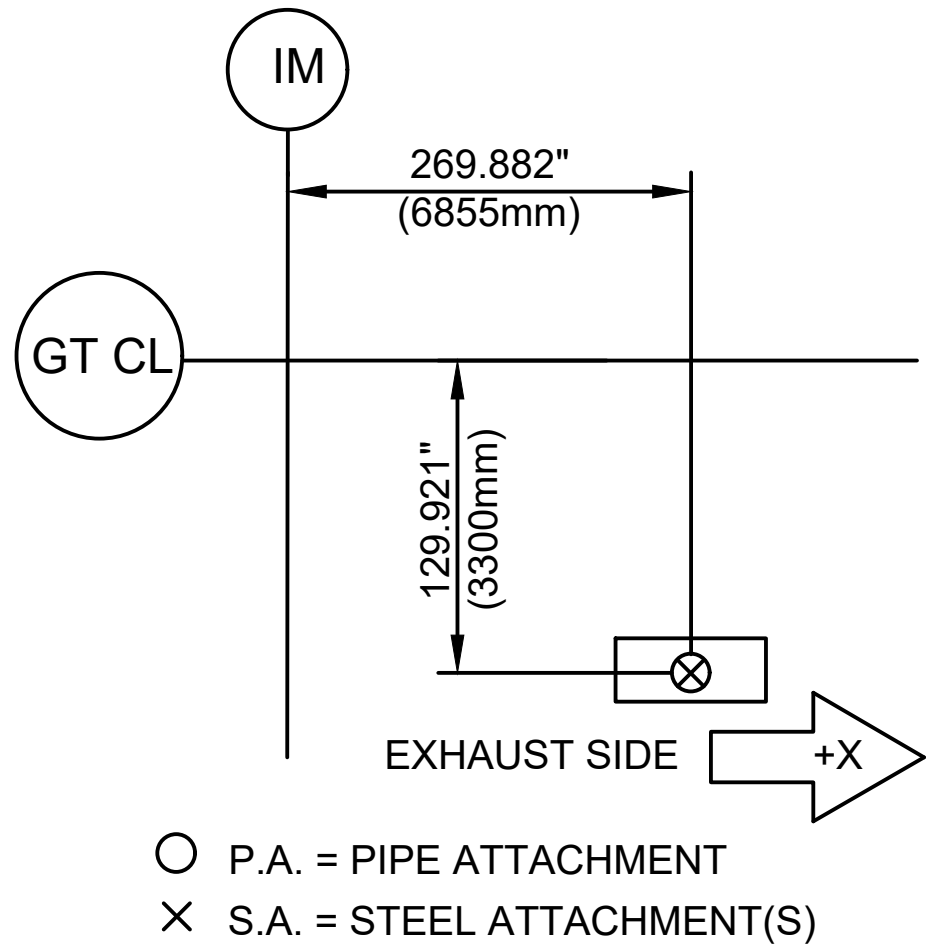
IM
269.882"
(6855mm)
GT CL
129.921"
(3300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

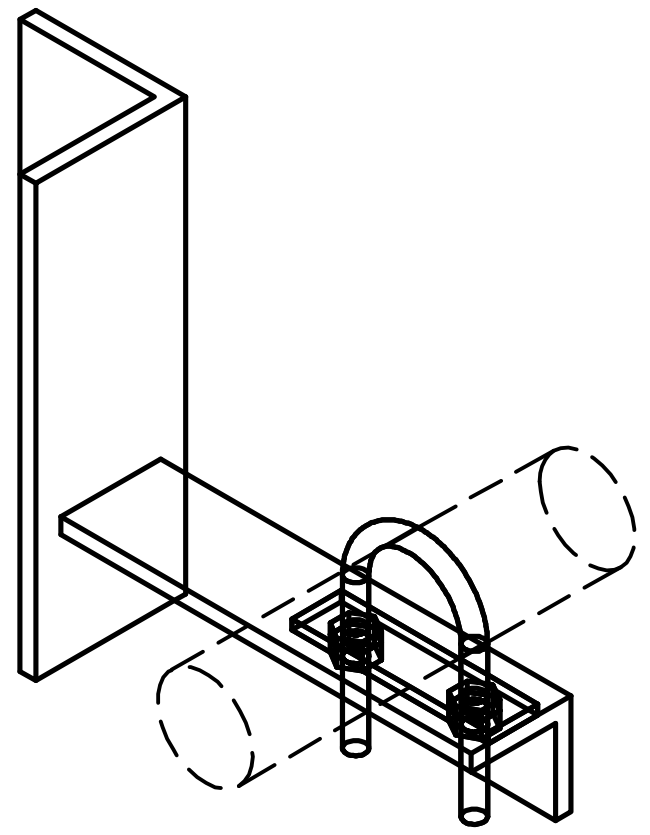

ISOMETRIC VIEW

3 PL5*25*100

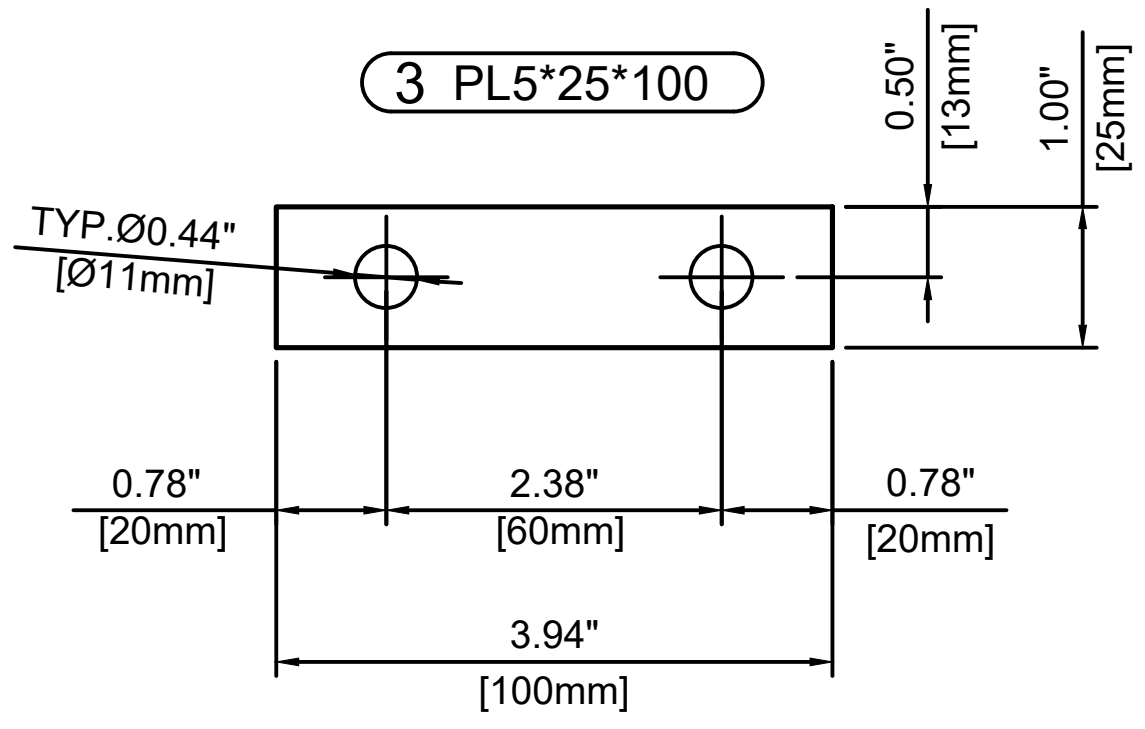
TYP.Ø0.44"
[Ø11mm]
0.50"
[13mm]
1.00"
[25mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

4 L50x50x6

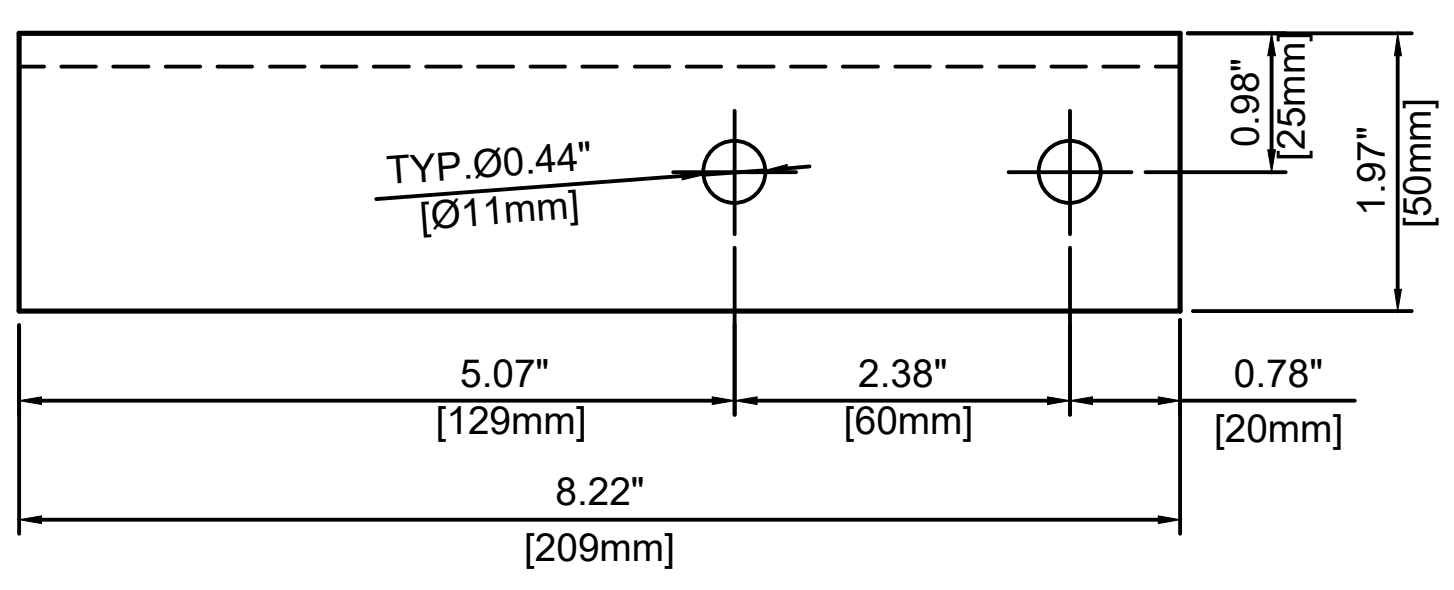
TYP.Ø0.44"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
5.07"
[129mm]
2.38"
[60mm]
0.78"
[20mm]
8.22"
[209mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width in	Width mm	Length in	Length mm	Qty.	Weight lbf	Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			8.23	209	1	2.04	0.93	SS400
5	L75x75x9	JIS G 3192			8.98	228	1	5.01	2.27	SS400
							TOTAL	7.73	3.50	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-05

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR665

Pipe OD =	1.315	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

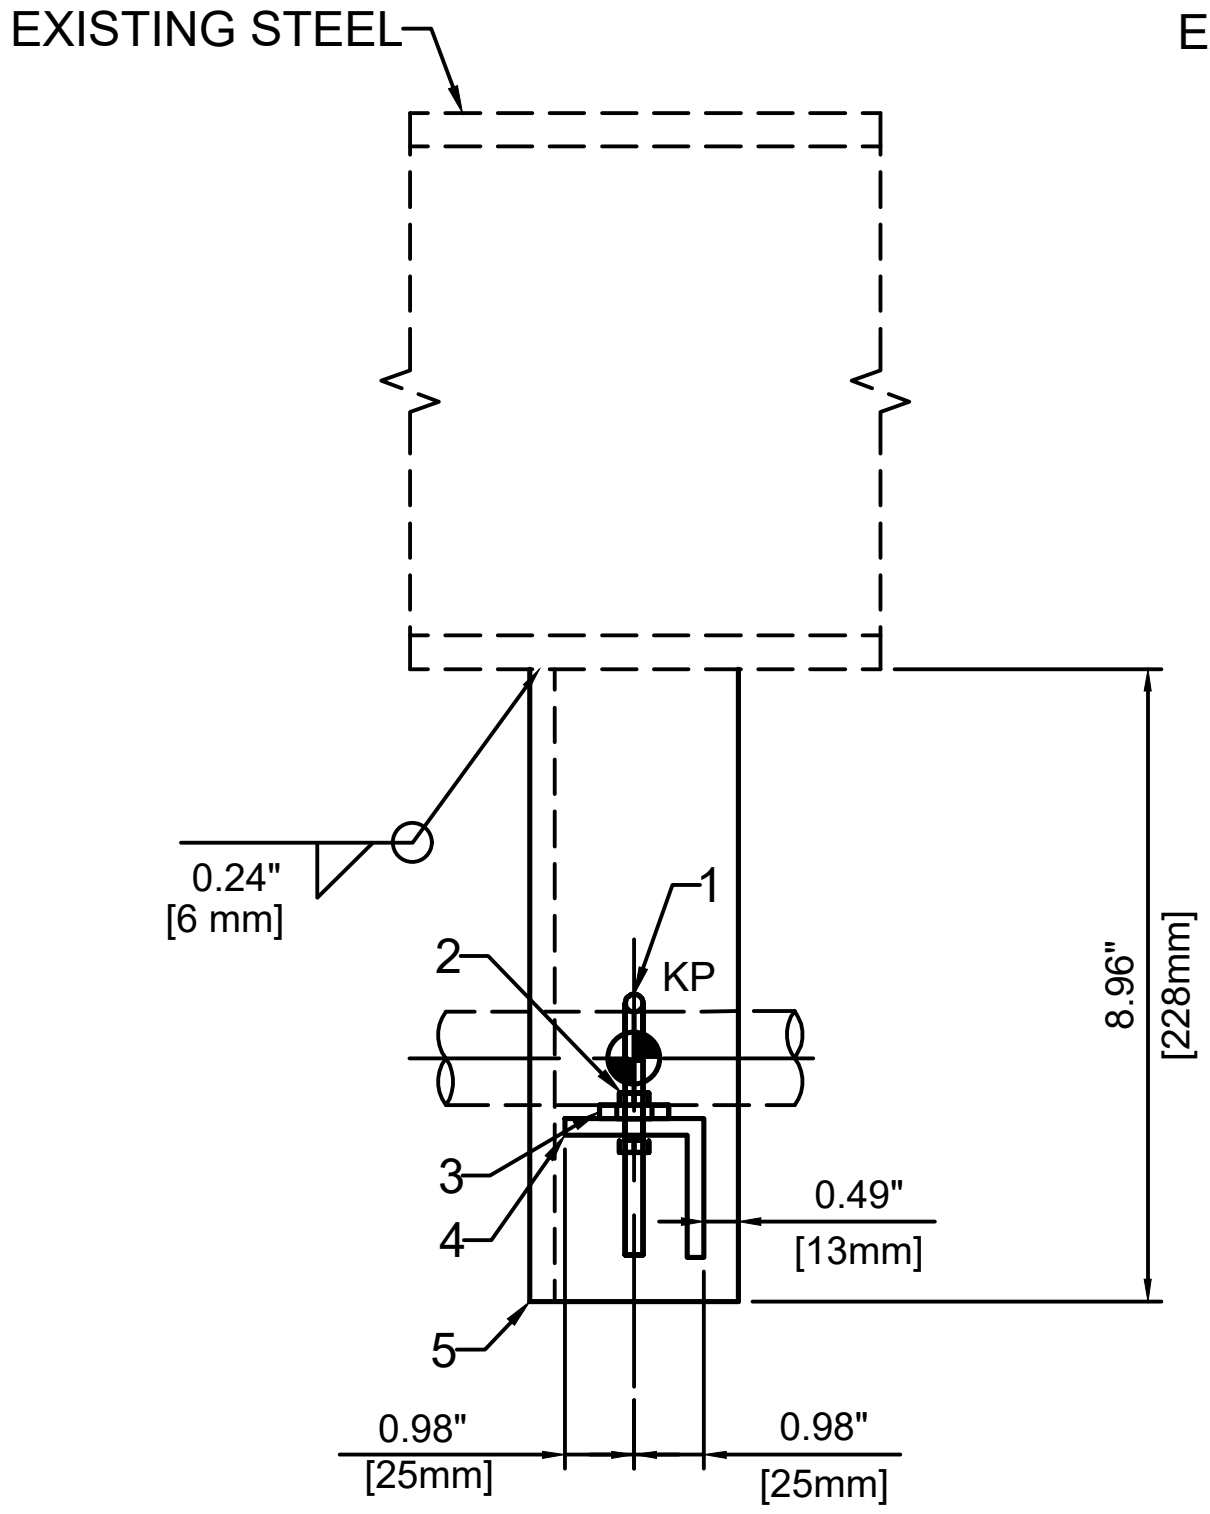

EXISTING STEEL
0.24"
[6 mm]
1
2
KP
3
4
5
0.49"
[13mm]
8.96"
[228mm]
0.98"
[25mm]
0.98"
[25mm]

LOOKING EXHAUST SIDE
1:5

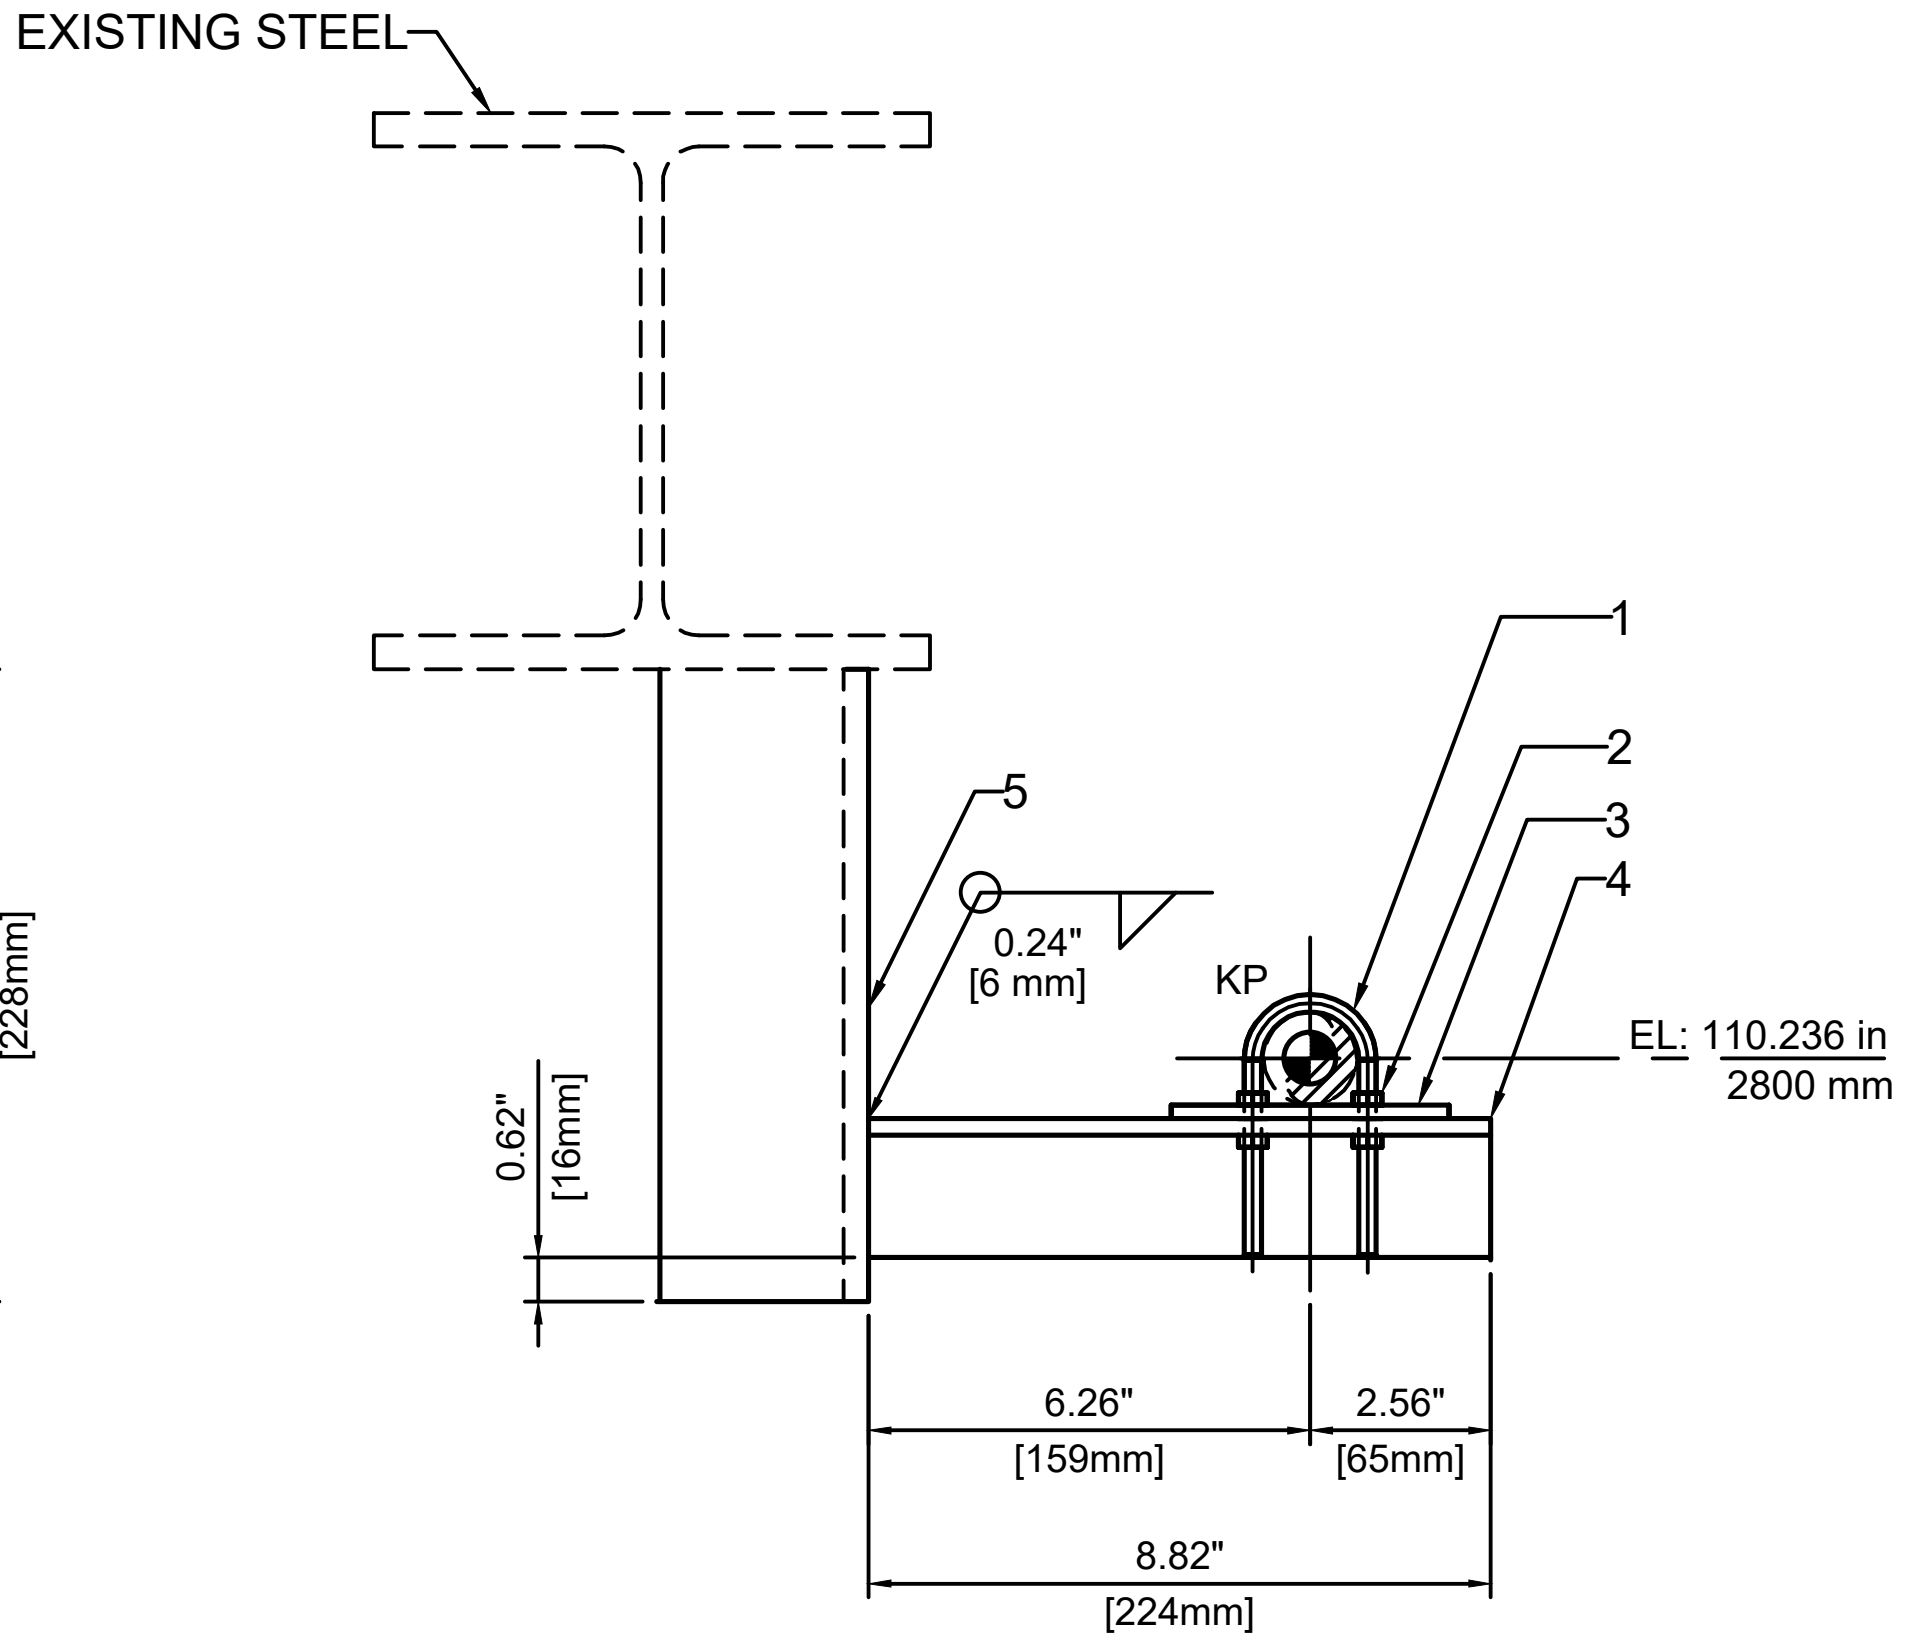

EXISTING STEEL
5
0.24"
[6 mm]
KP
1
2
3
4
EL: 110.236 in
2800 mm
0.62"
[16mm]
6.26"
[159mm]
2.56"
[65mm]
8.82"
[224mm]

LOOKING LUBE OIL UNIT SIDE
1:5

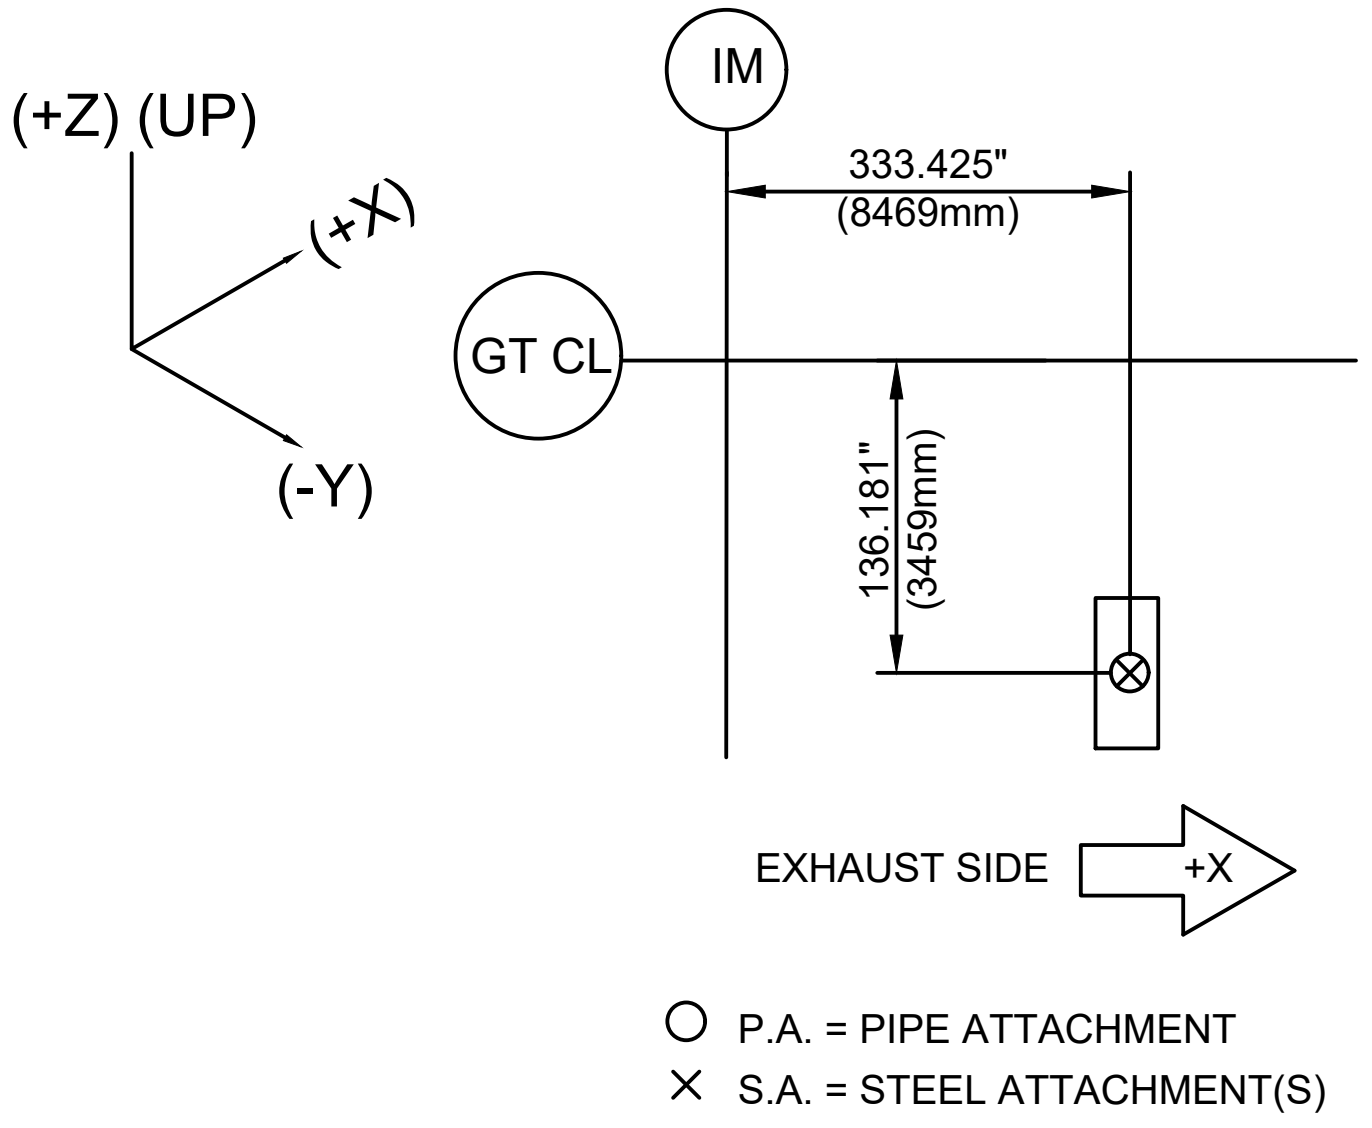

(+Z) (UP)
(+X)
(-Y)
IM
GT CL
333.425"
(8469mm)
136.181"
(3459mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

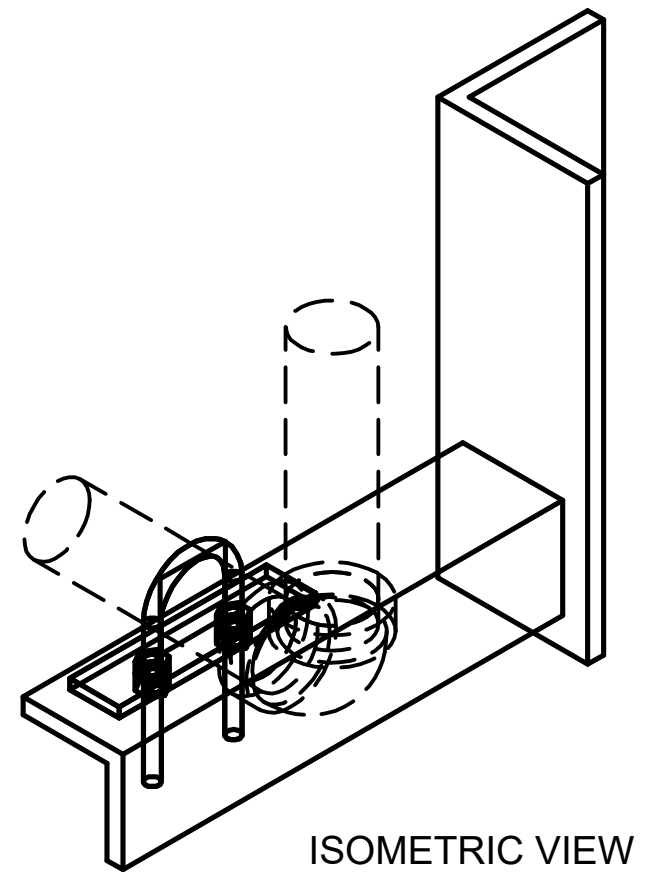

ISOMETRIC VIEW

4 L50x50x6

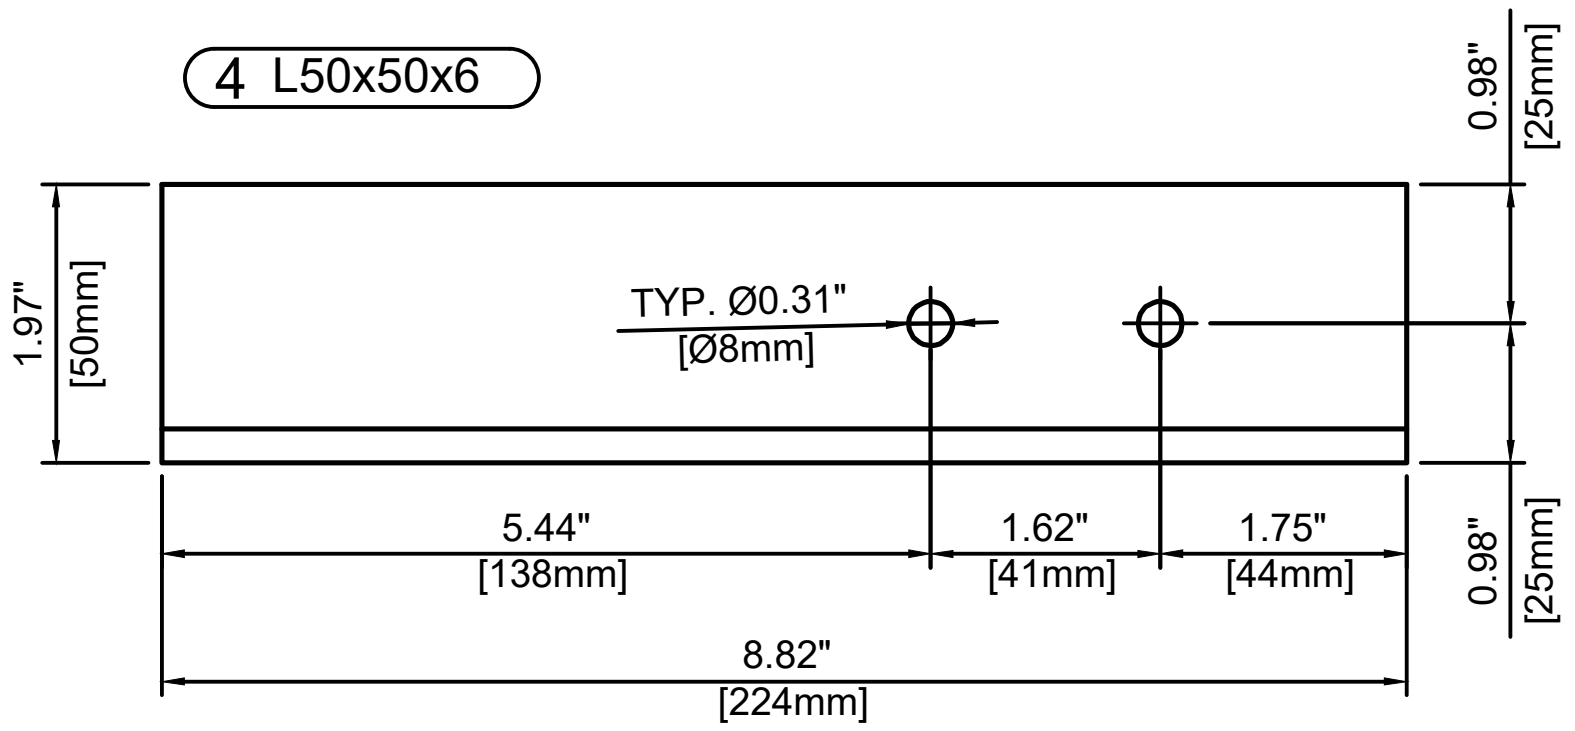

0.98"
[25mm]
1.97"
[50mm]
TYP. Ø0.31"
[Ø8mm]
5.44"
[138mm]
1.62"
[41mm]
1.75"
[44mm]
8.82"
[224mm]
0.98"
[25mm]

1:2.5

3 PL5*25*100

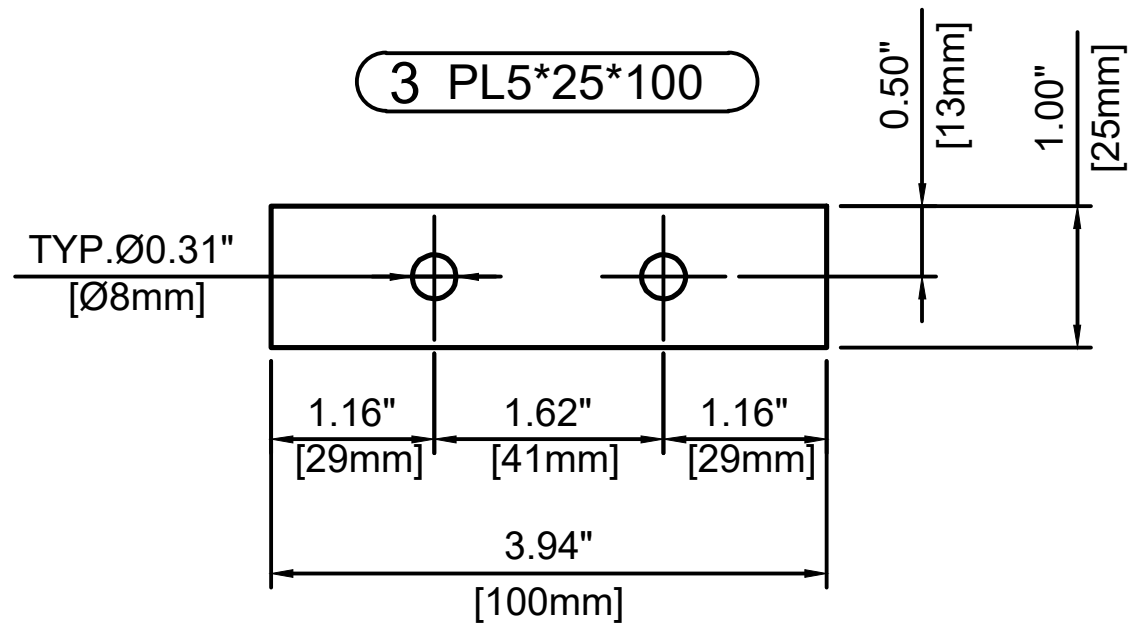

0.50"
[13mm]
1.00"
[25mm]
TYP.Ø0.31"
[Ø8mm]
1.16"
[29mm]
1.62"
[41mm]
1.16"
[29mm]
3.94"
[100mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1"	400348					1	0.13	0.06	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			8.82	224	1	2.19	0.99	SS400
5	L75x75x9	JIS G 3192			8.98	228	1	5.01	2.27	SS400
							TOTAL	7.59	3.44	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-06

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR120

Pipe OD = 1.90 inch
Pipe DesignTemp.= 140 °F
Insul= No Ins.

NODE: No C2
LINE NO: **QFF11BR111

Pipe OD = 0.84 inch
Pipe DesignTemp.= 140 °F
Insul= 0 inch

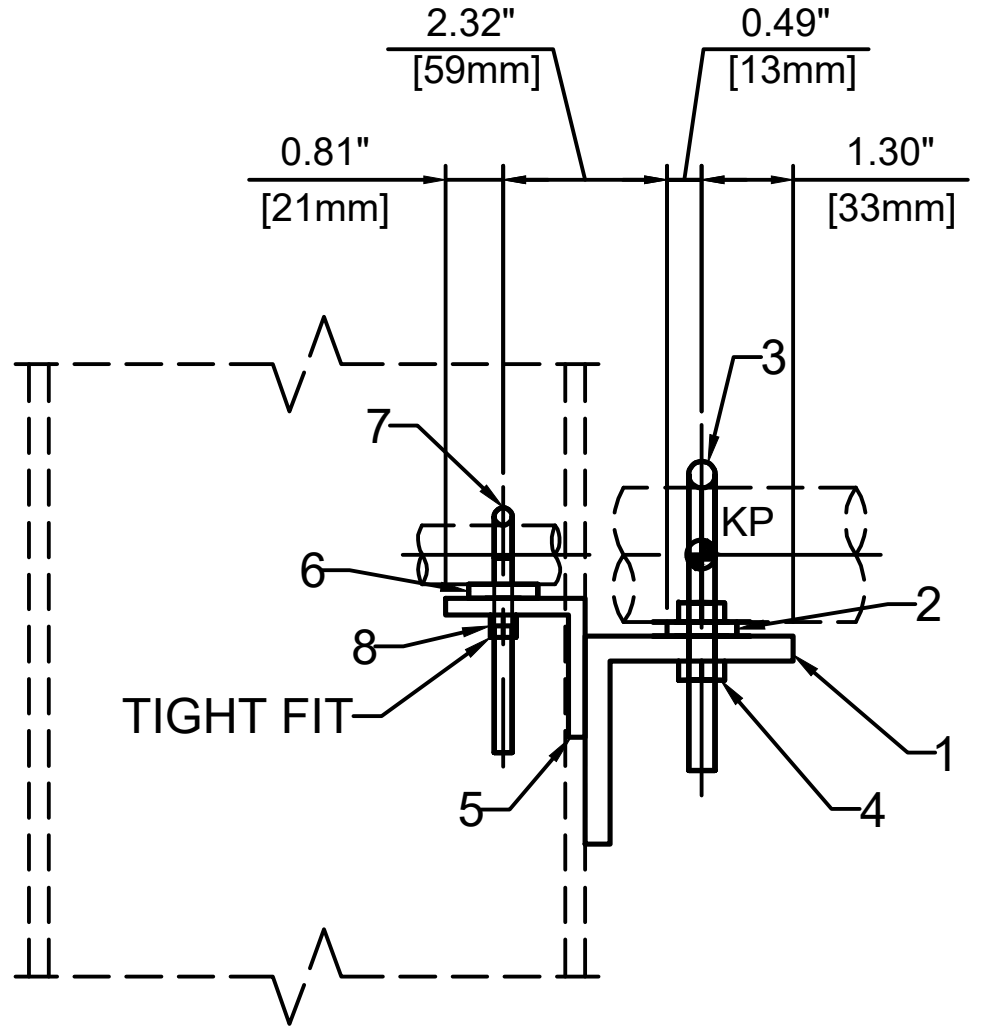

2.32"
[59mm]
0.49"
[13mm]
0.81"
[21mm]
1.30"
[33mm]
7
3
KP
6
2
8
TIGHT FIT
1
5
4

LOOKING EXHAUST SIDE
1:5

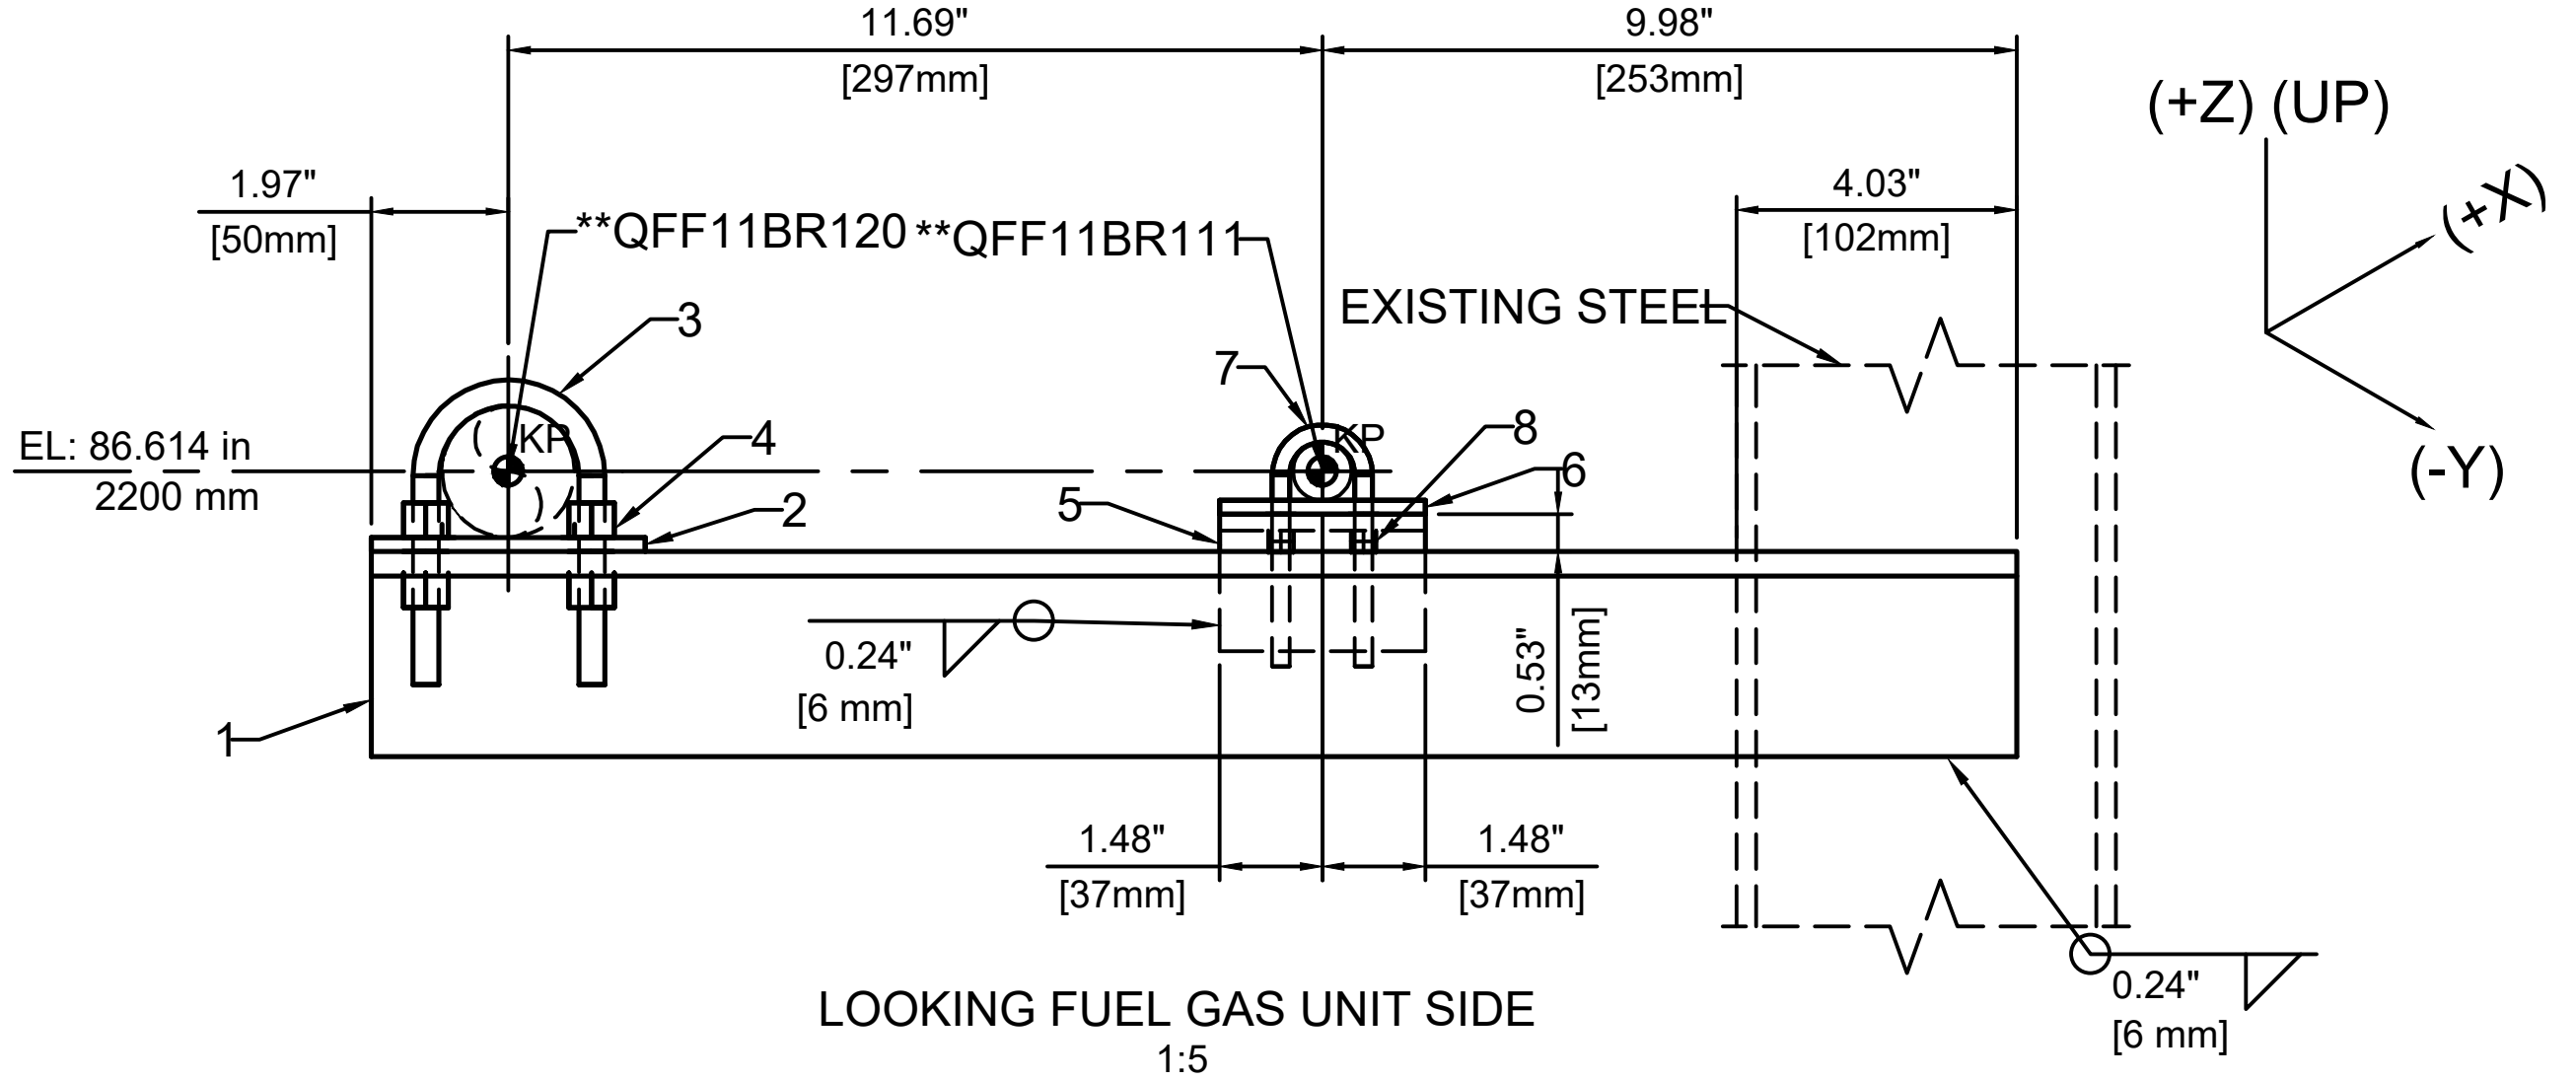

11.69"
[297mm]
9.98"
[253mm]
1.97"
[50mm]
**QFF11BR120
**QFF11BR111
4.03"
[102mm]
EXISTING STEEL
3
7
EL: 86.614 in
2200 mm
KP
4
2
KP
8
6
5
0.24"
[6 mm]
0.53"
[13mm]
1
1.48"
[37mm]
1.48"
[37mm]
0.24"
[6 mm]
(+Z) (UP)
(+X)
(-Y)

LOOKING FUEL GAS UNIT SIDE
1:5

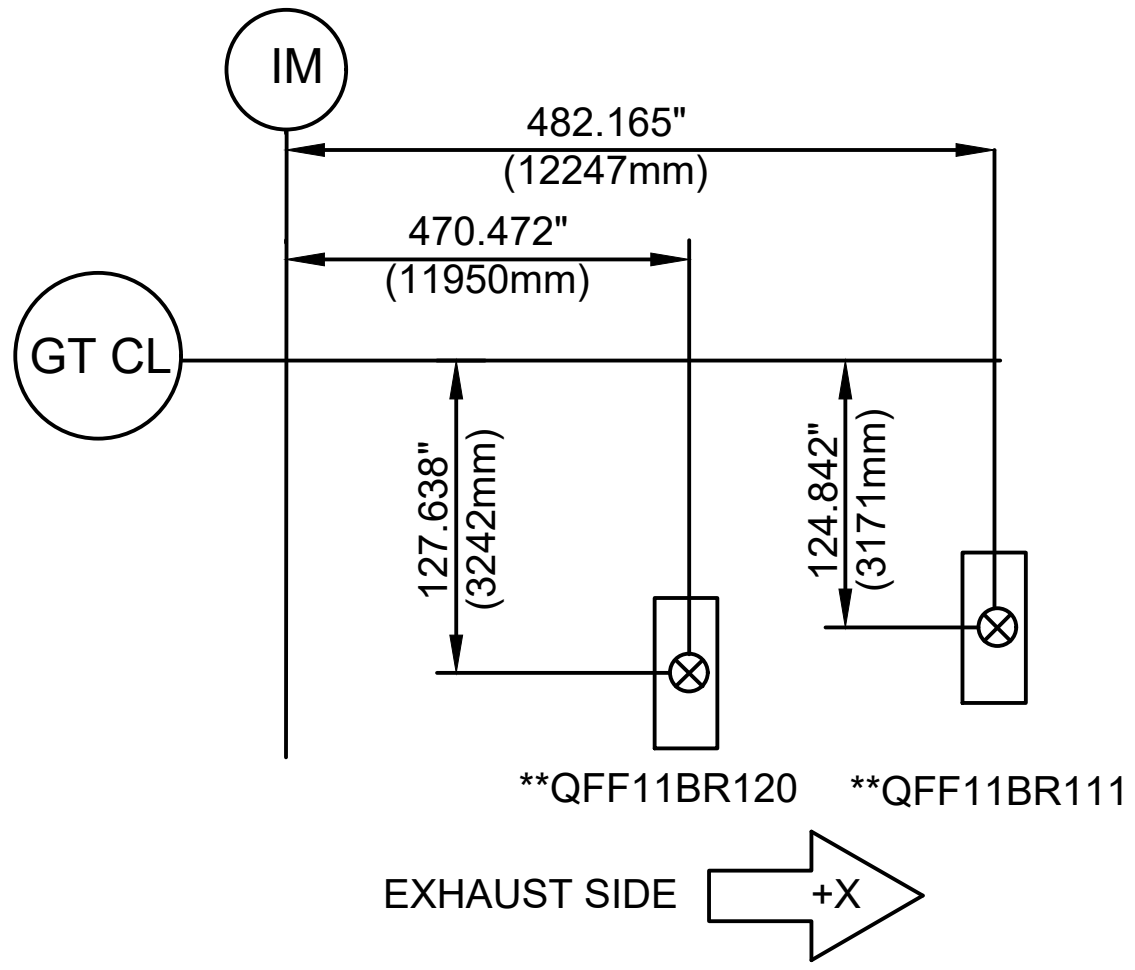

IM
482.165"
(12247mm)
470.472"
(11950mm)
GT CL
127.638"
(3242mm)
124.842"
(3171mm)
**QFF11BR120
**QFF11BR111
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

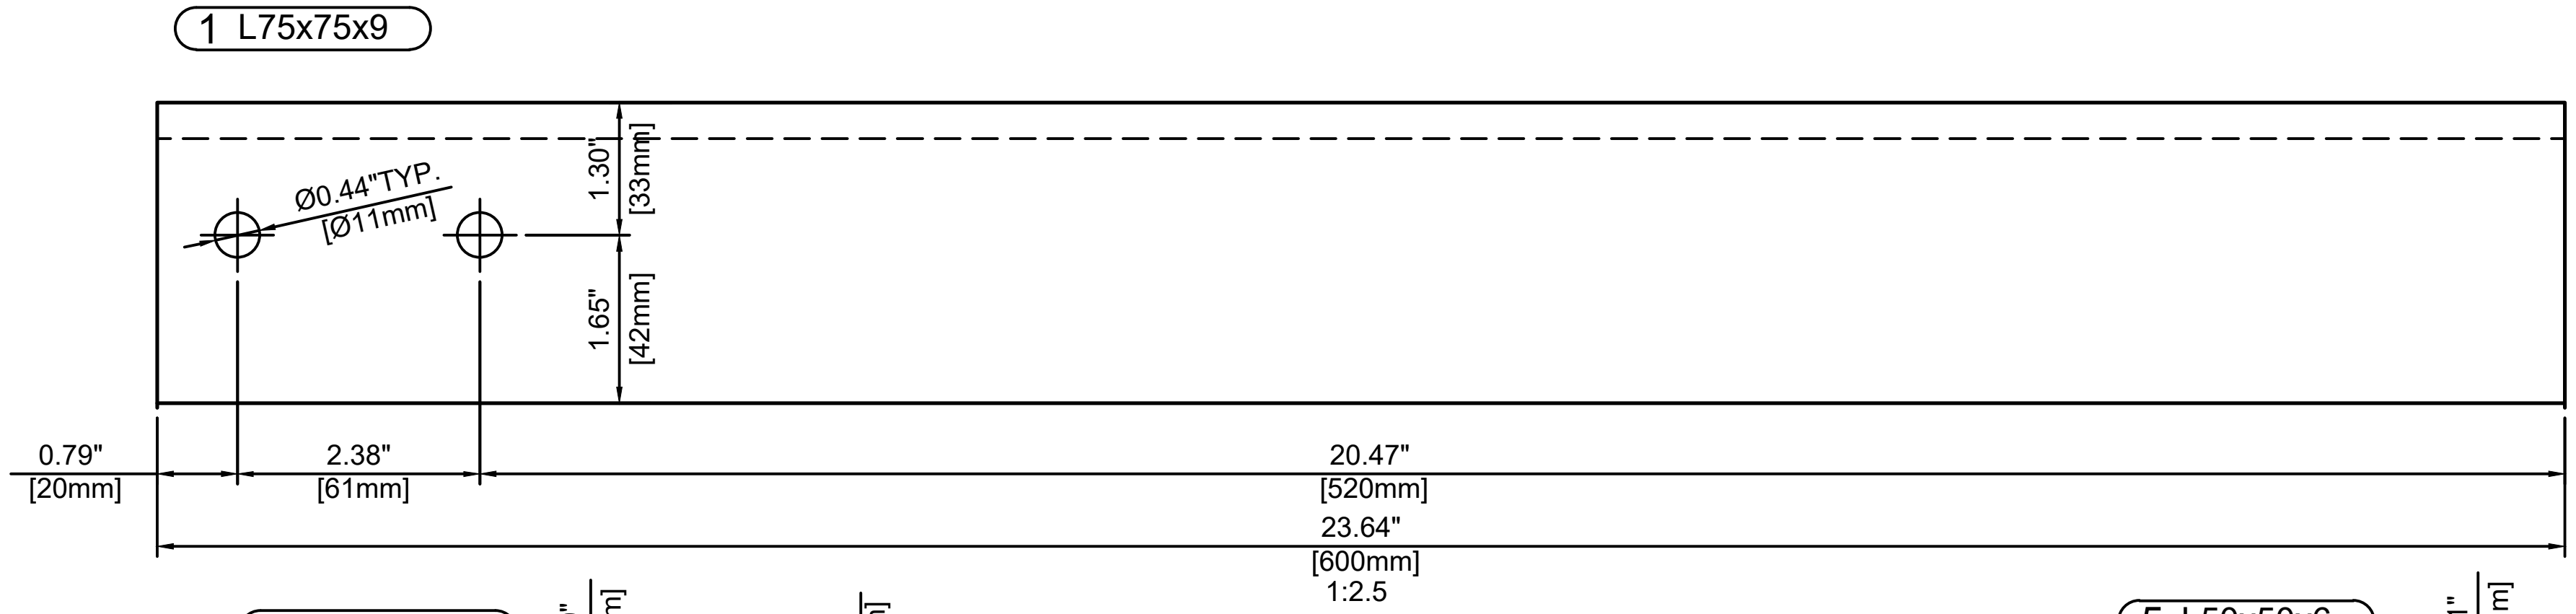

1 L75x75x9
Ø0.44"TYP.
[Ø11mm]
1.30"
[33mm]
1.65"
[42mm]
0.79"
[20mm]
2.38"
[61mm]
20.47"
[520mm]
23.64"
[600mm]
1:2.5

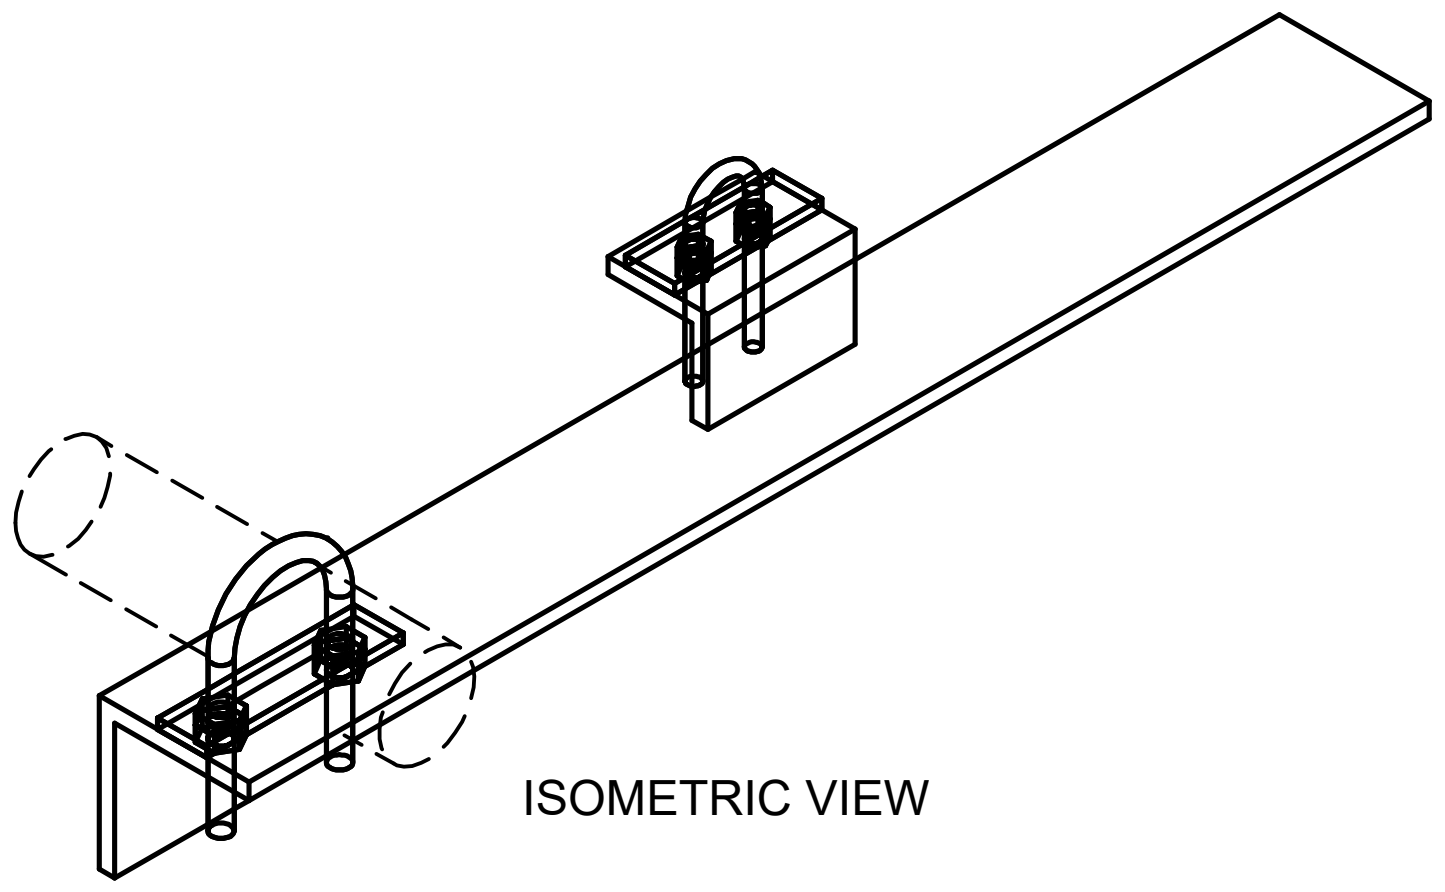

ISOMETRIC VIEW

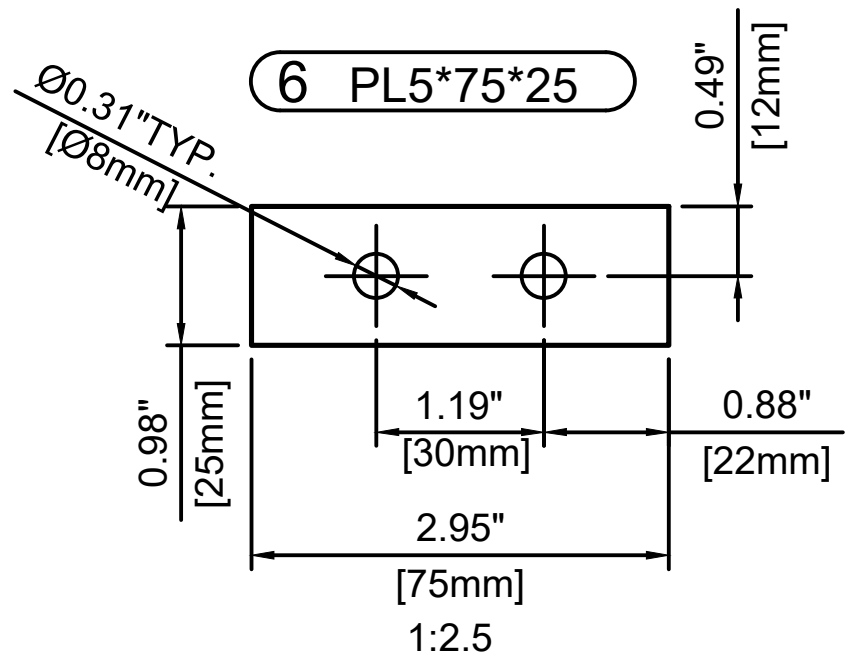

6 PL5*75*25
Ø0.31"TYP.
[Ø8mm]
0.49"
[12mm]
0.98"
[25mm]
1.19"
[30mm]
0.88"
[22mm]
2.95"
[75mm]
1:2.5

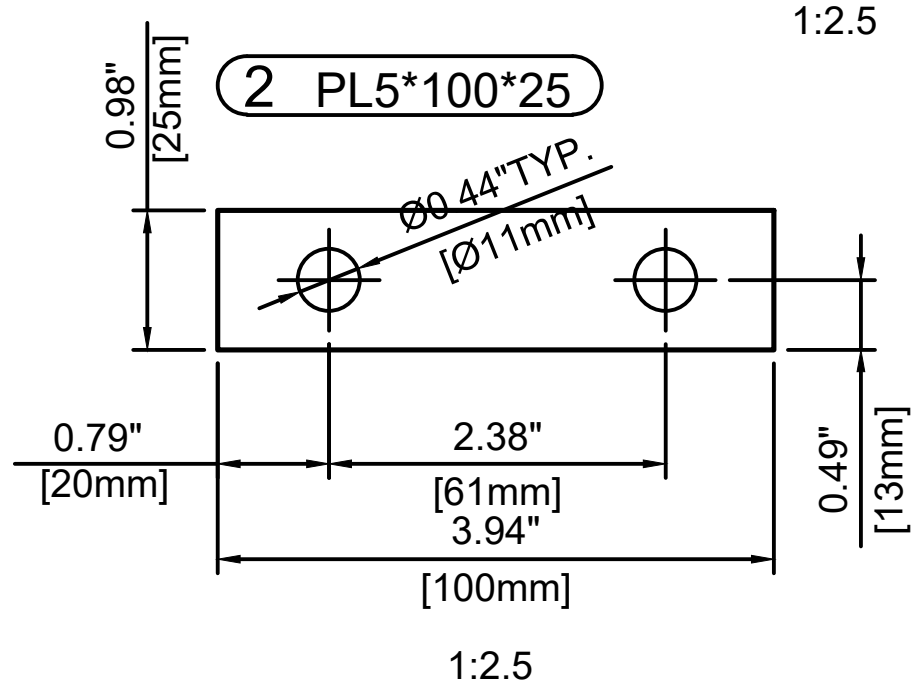

2 PL5*100*25
0.98"
[25mm]
Ø0.44"TYP.
[Ø11mm]
0.79"
[20mm]
2.38"
[61mm]
3.94"
[100mm]
0.49"
[13mm]
1:2.5

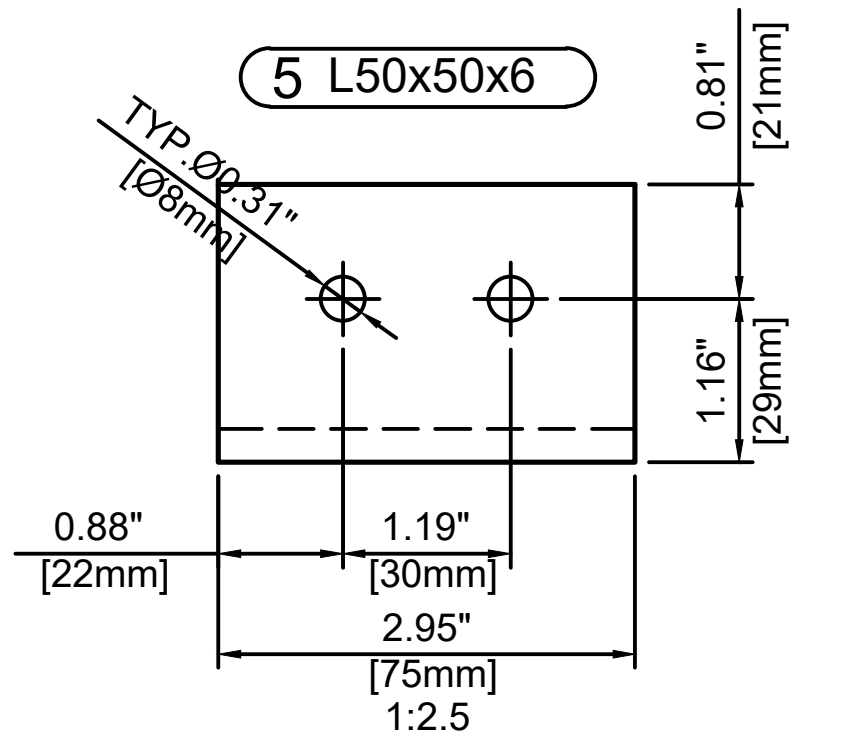

5 L50x50x6
TYP Ø0.31"
[Ø8mm]
0.81"
[21mm]
1.16"
[29mm]
0.88"
[22mm]
1.19"
[30mm]
2.95"
[75mm]
1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	L75x75x9	JIS G 3192			23.64	600	1	13.18	5.98	SS400
2	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
5	L50x50x6	JIS G 3192			2.95	75	1	0.73	0.33	SS400
6	PL5		0.98	25	2.95	75	1	0.16	0.07	ASTM A240-304
7	Standard U-Bolt, 1/2"	400148					1	0.11	0.05	A193GrB8Cl1
8	Heavy Hex Nut for U-Bolt 1/4"						4	0.02	0.01	STAINLESS STEEL
							TOTAL	14.90	6.76	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-13

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations. diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	NO C2
LINE NO:	**QFF11BR120

Pipe OD =	1.9 inch
Pipe DesignTemp.=	140 °F
Insul=	No Ins.

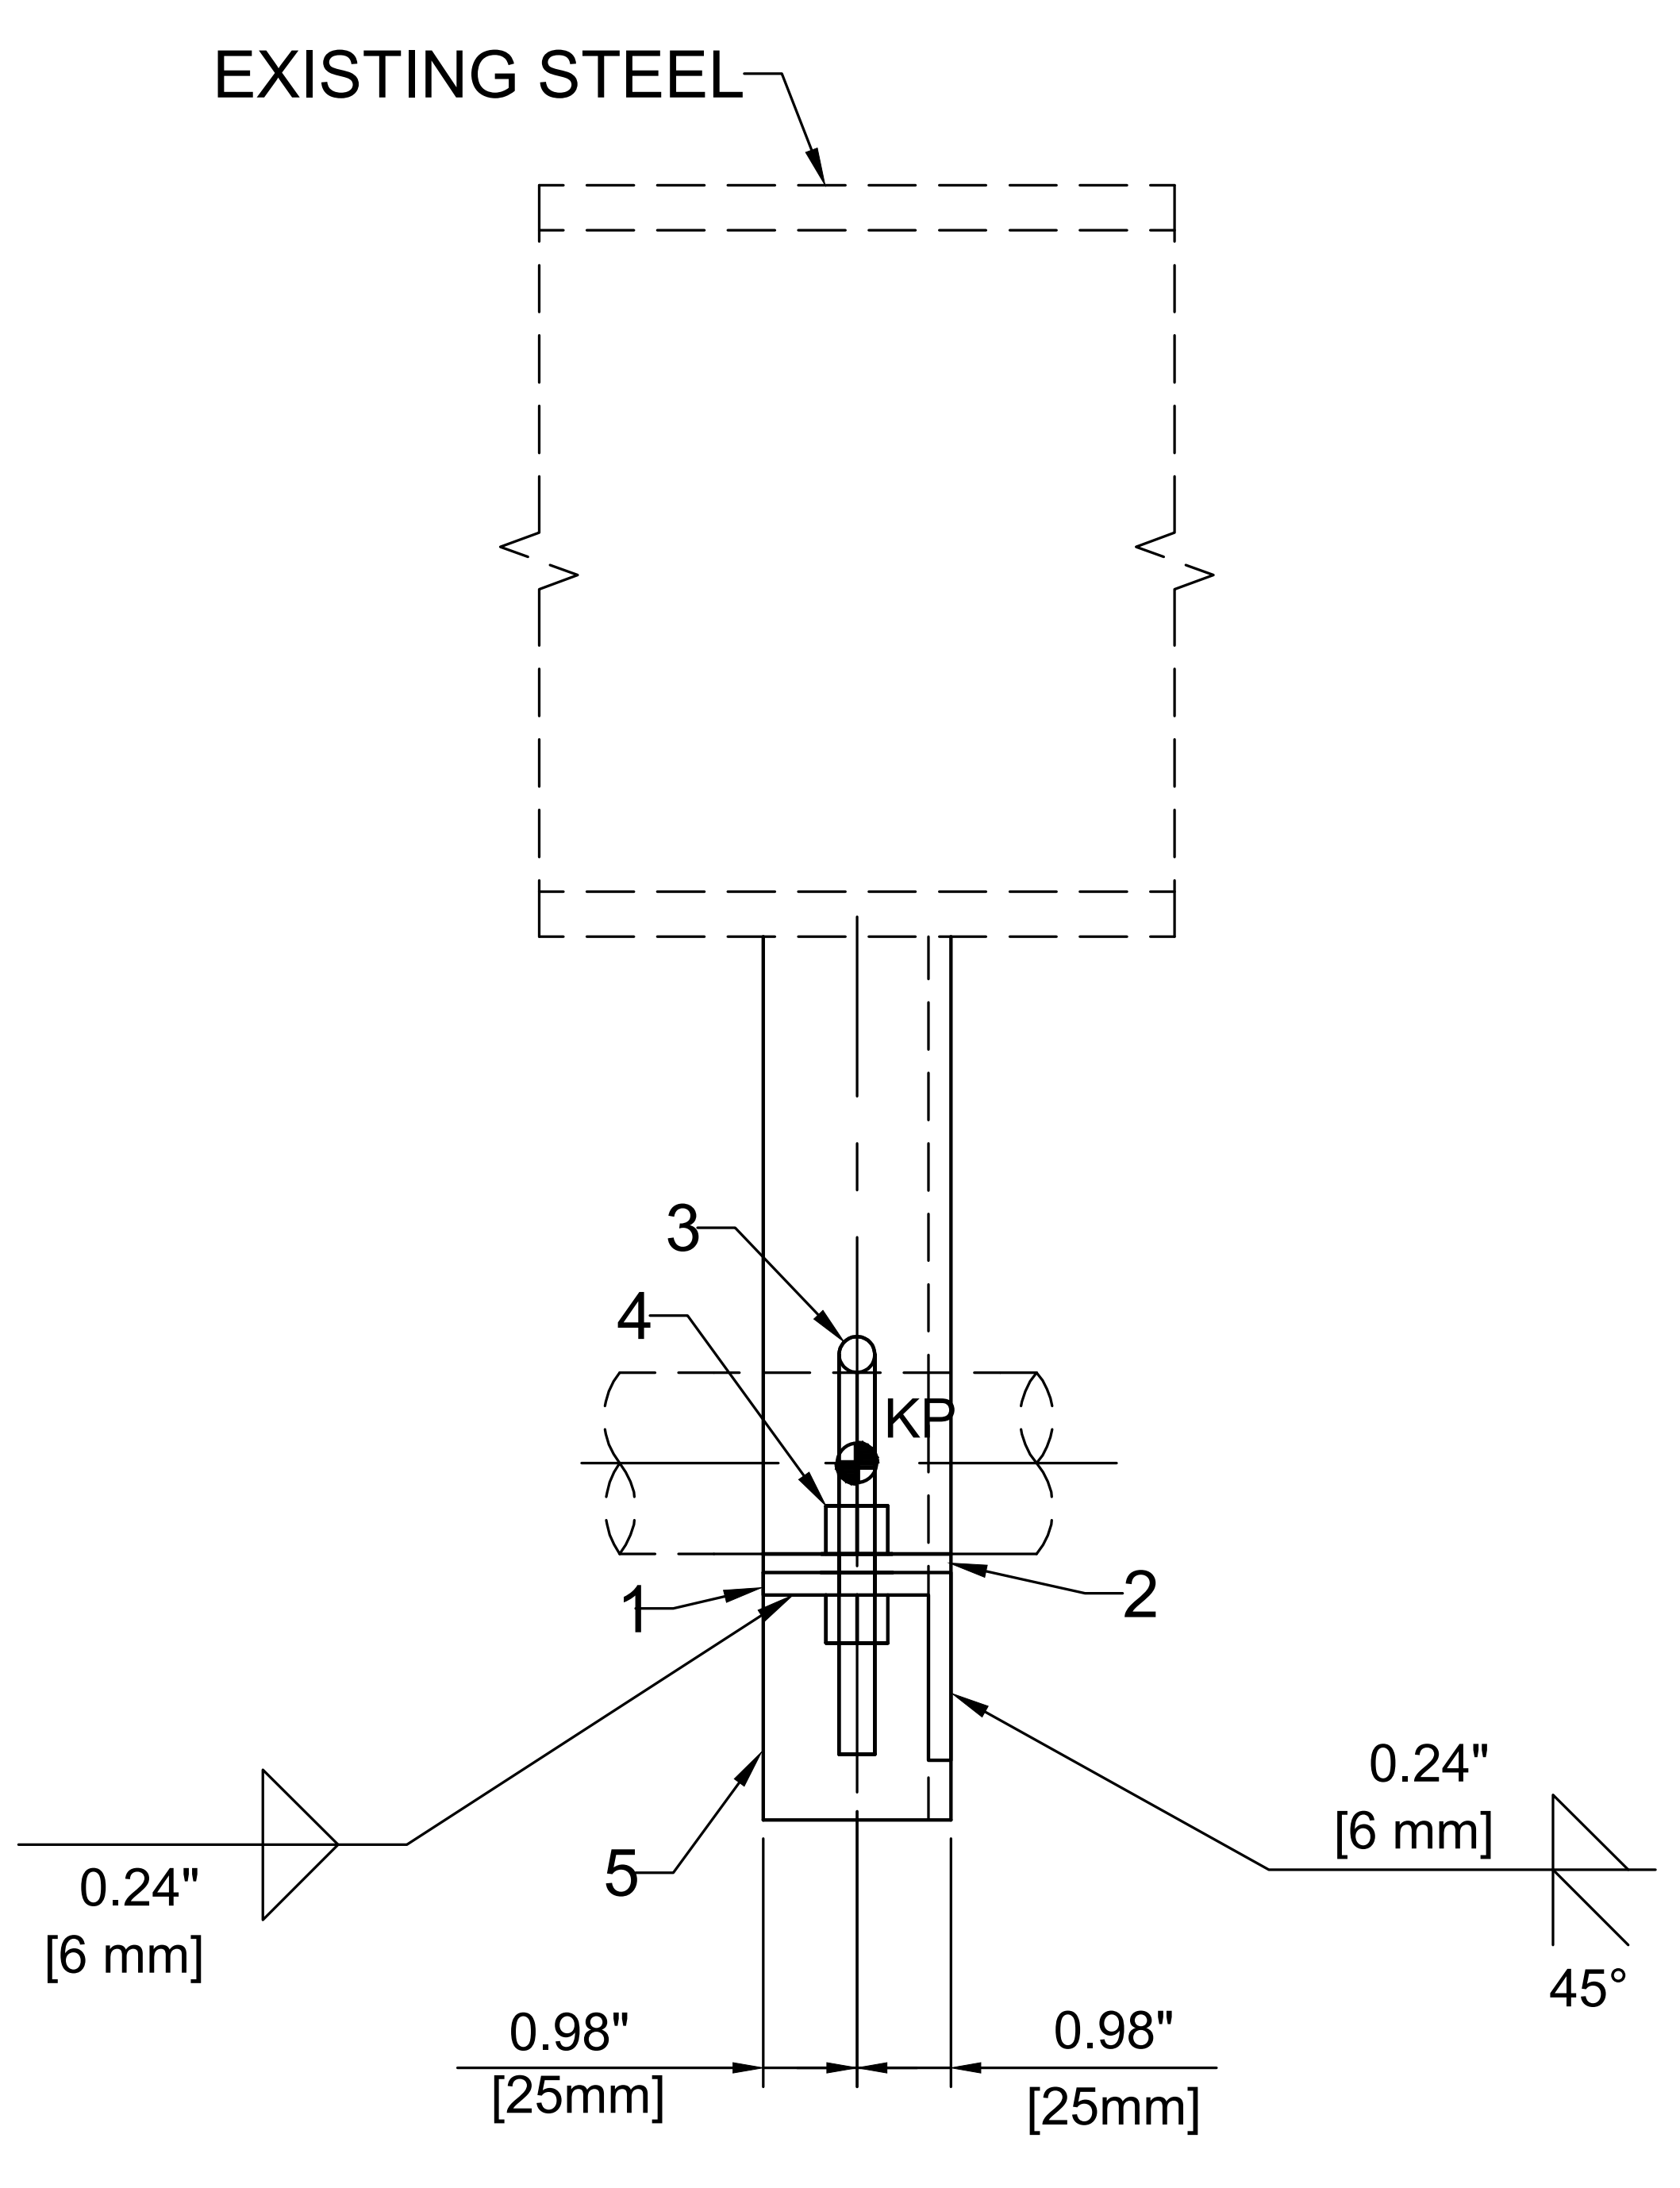

EXISTING STEEL
3
4
KP
1
2
5
0.24"
[6 mm]
0.24"
[6 mm]
45°
0.98"
[25mm]
0.98"
[25mm]

LOOKING FUEL GAS UNIT SIDE
1:5

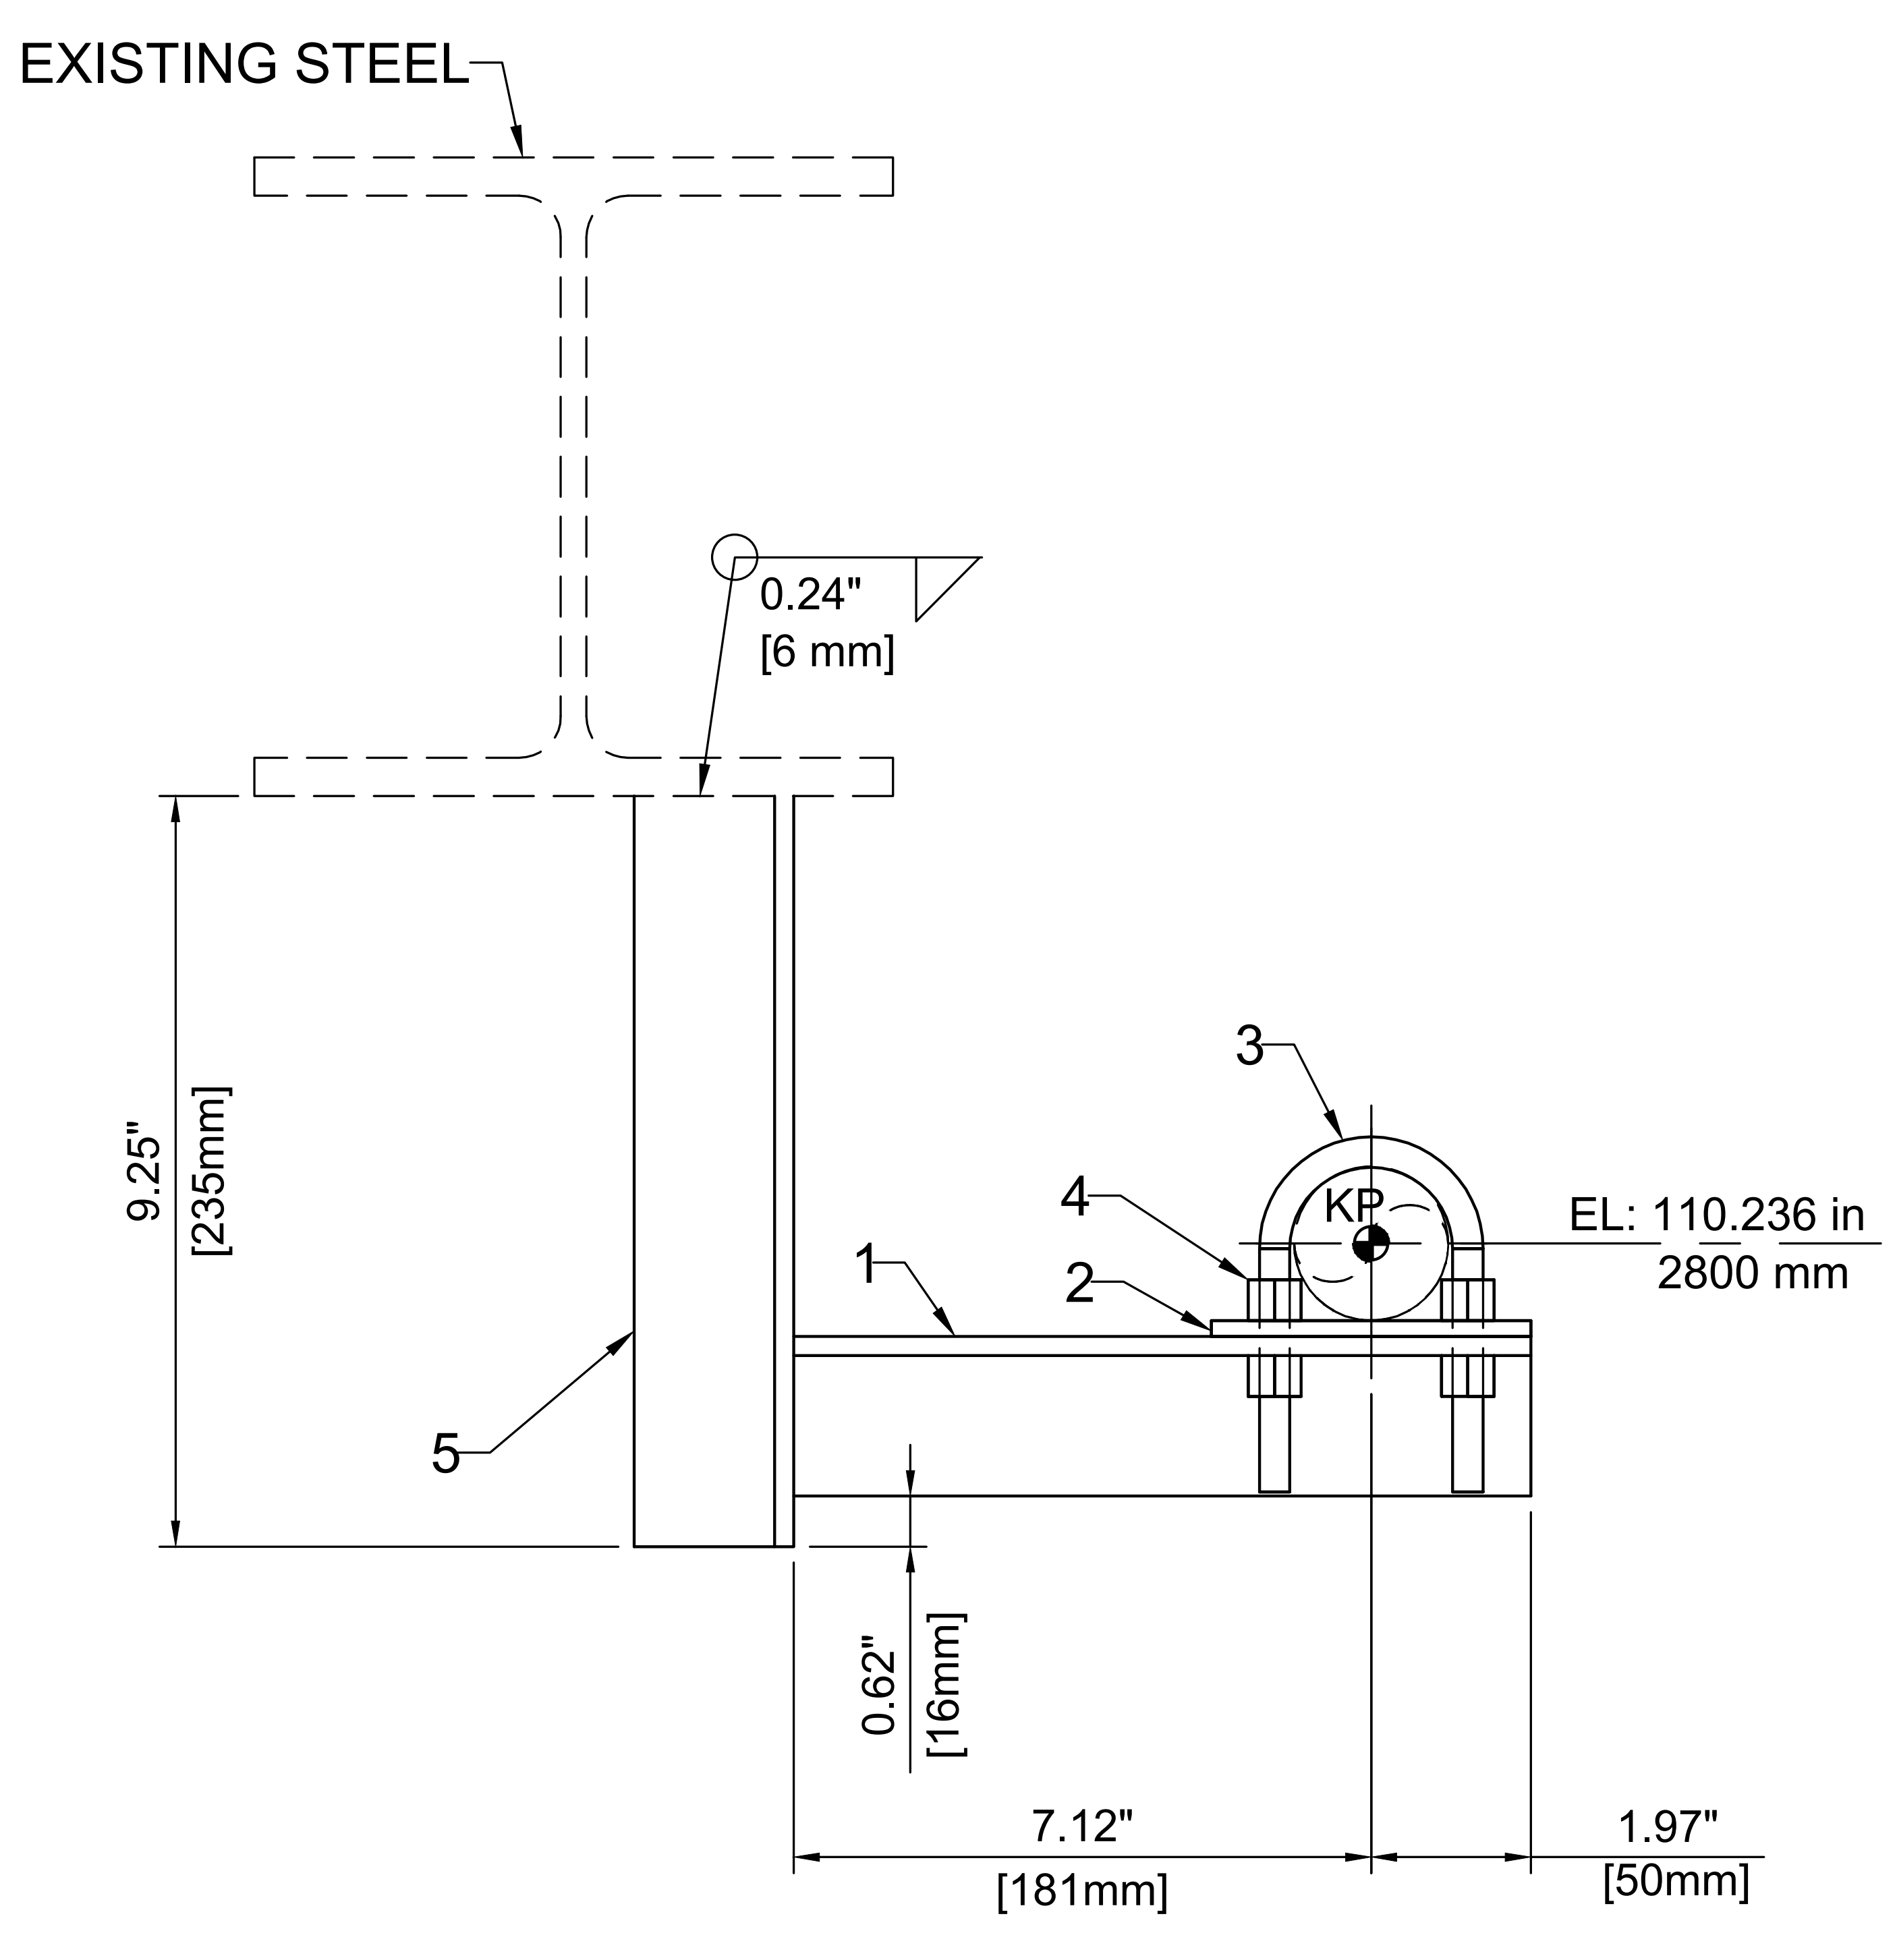

EXISTING STEEL
0.24"
[6 mm]
9.25"
[235mm]
3
4
KP
1
2
5
EL: 110.236 in
2800 mm
0.62"
[16mm]
7.12"
[181mm]
1.97"
[50mm]

LOOKING EXHAUST SIDE
1:5

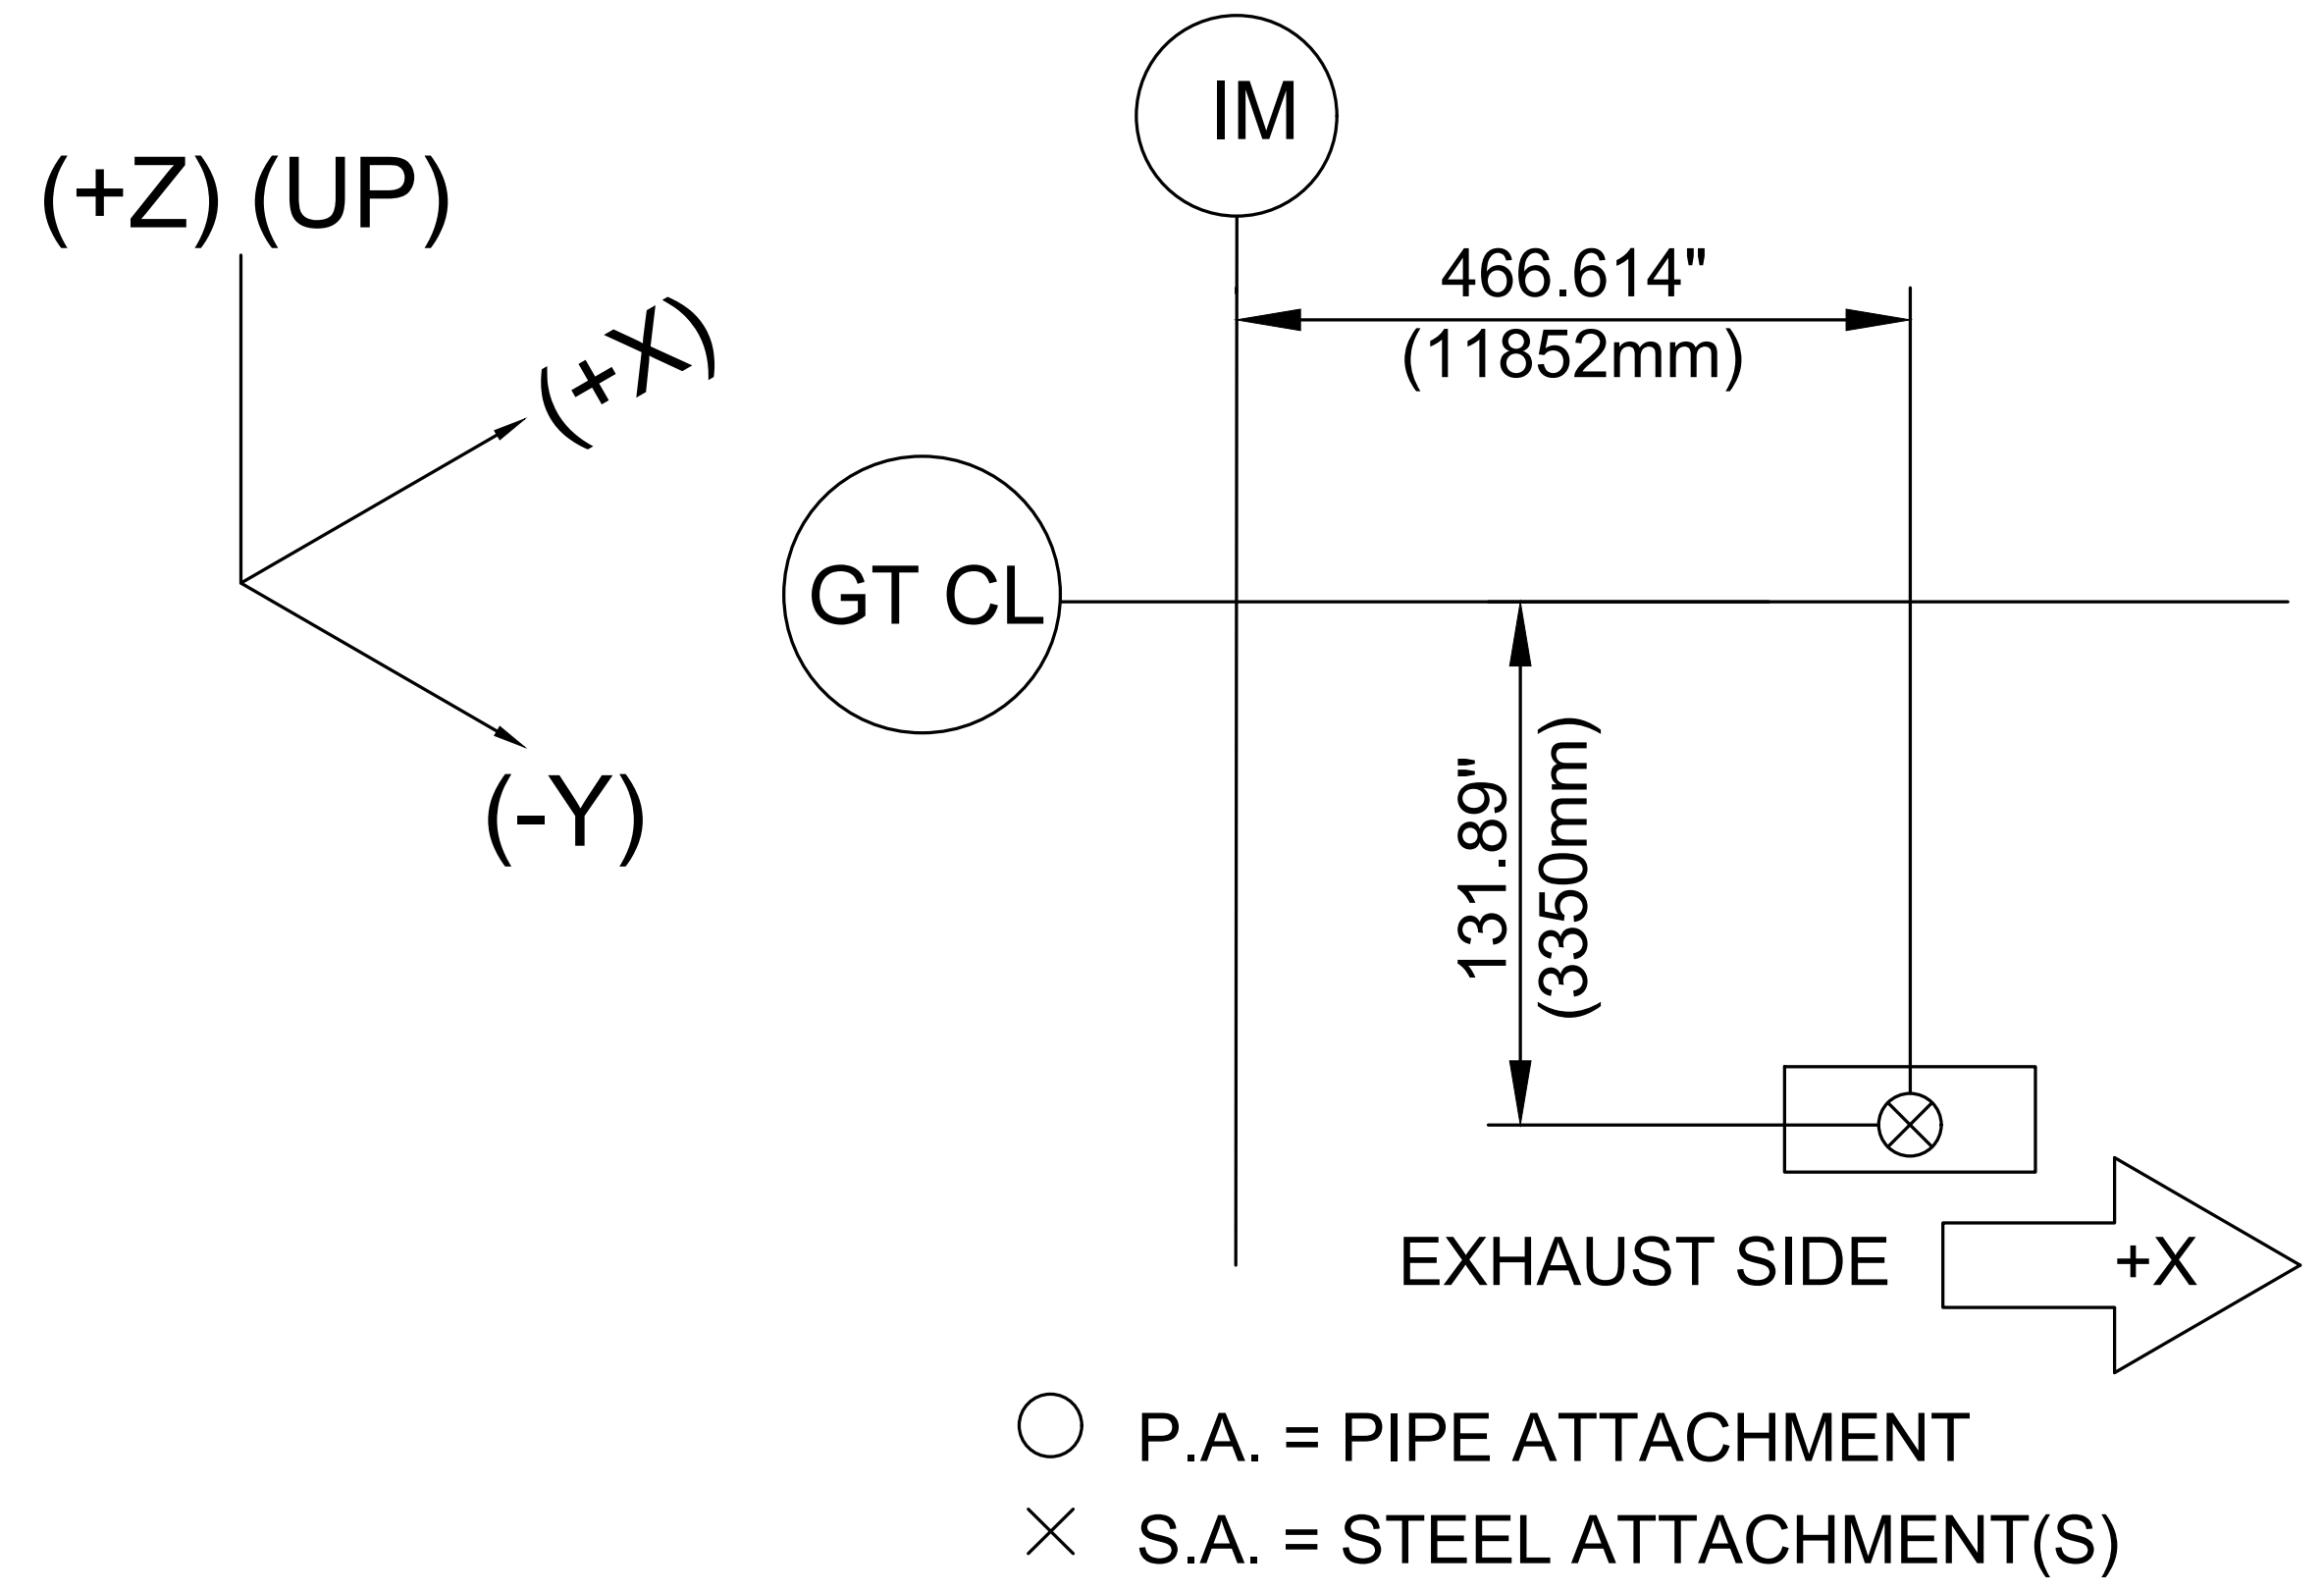

(+Z) (UP)
(+X)
(-Y)
IM
466.614"
(11852mm)
GT CL
131.89"
(3350mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

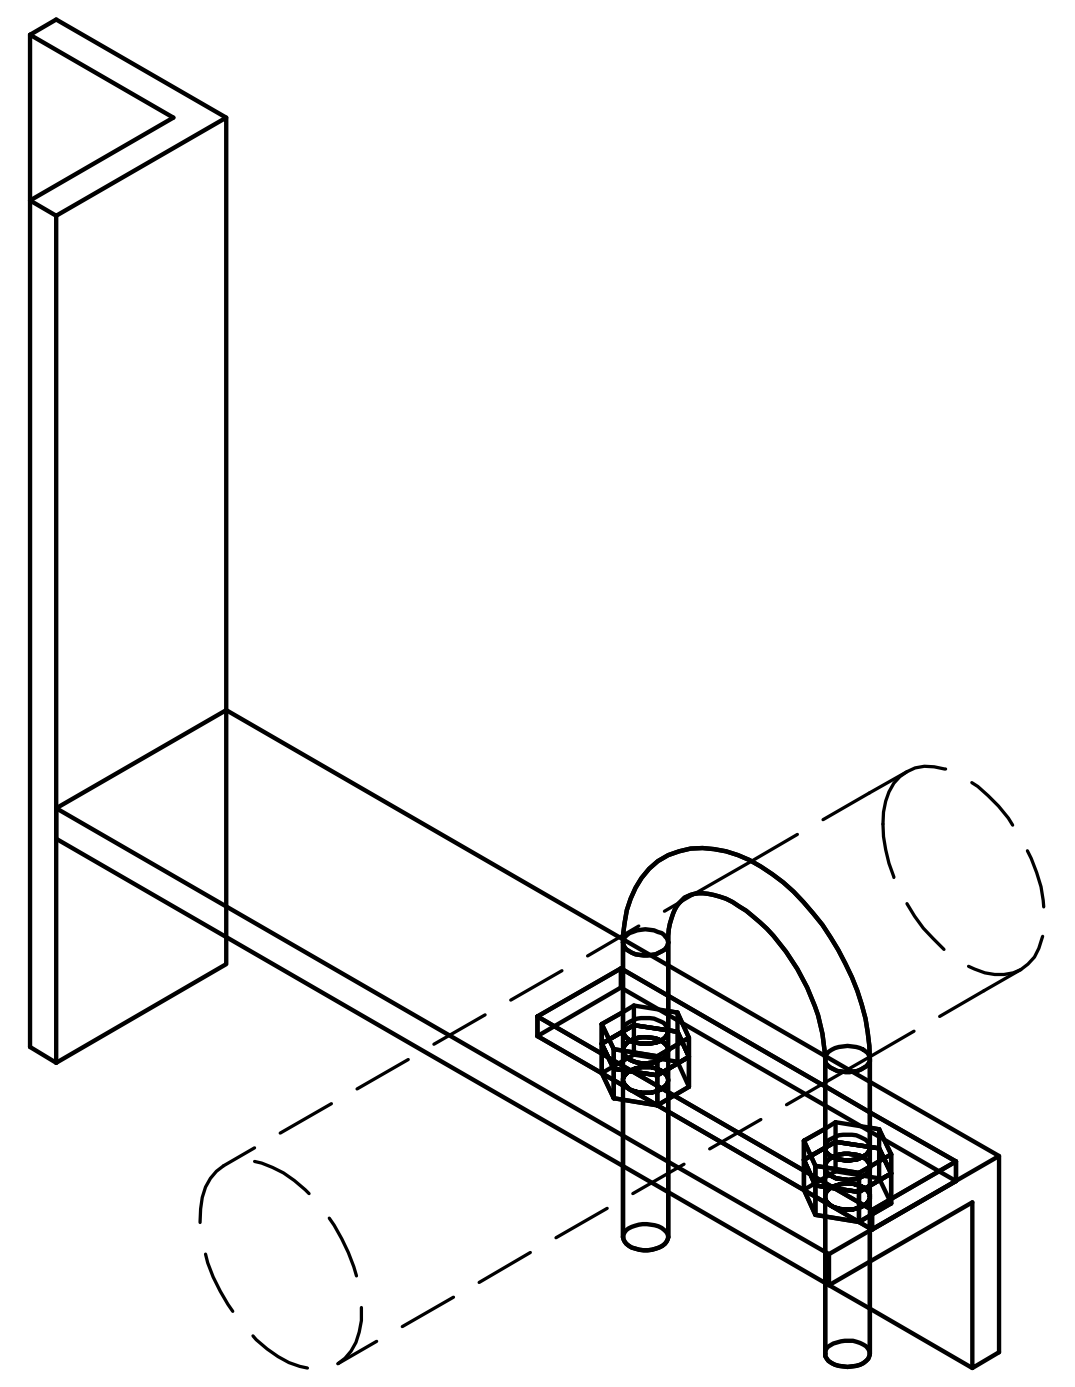

ISOMETRIC VIEW

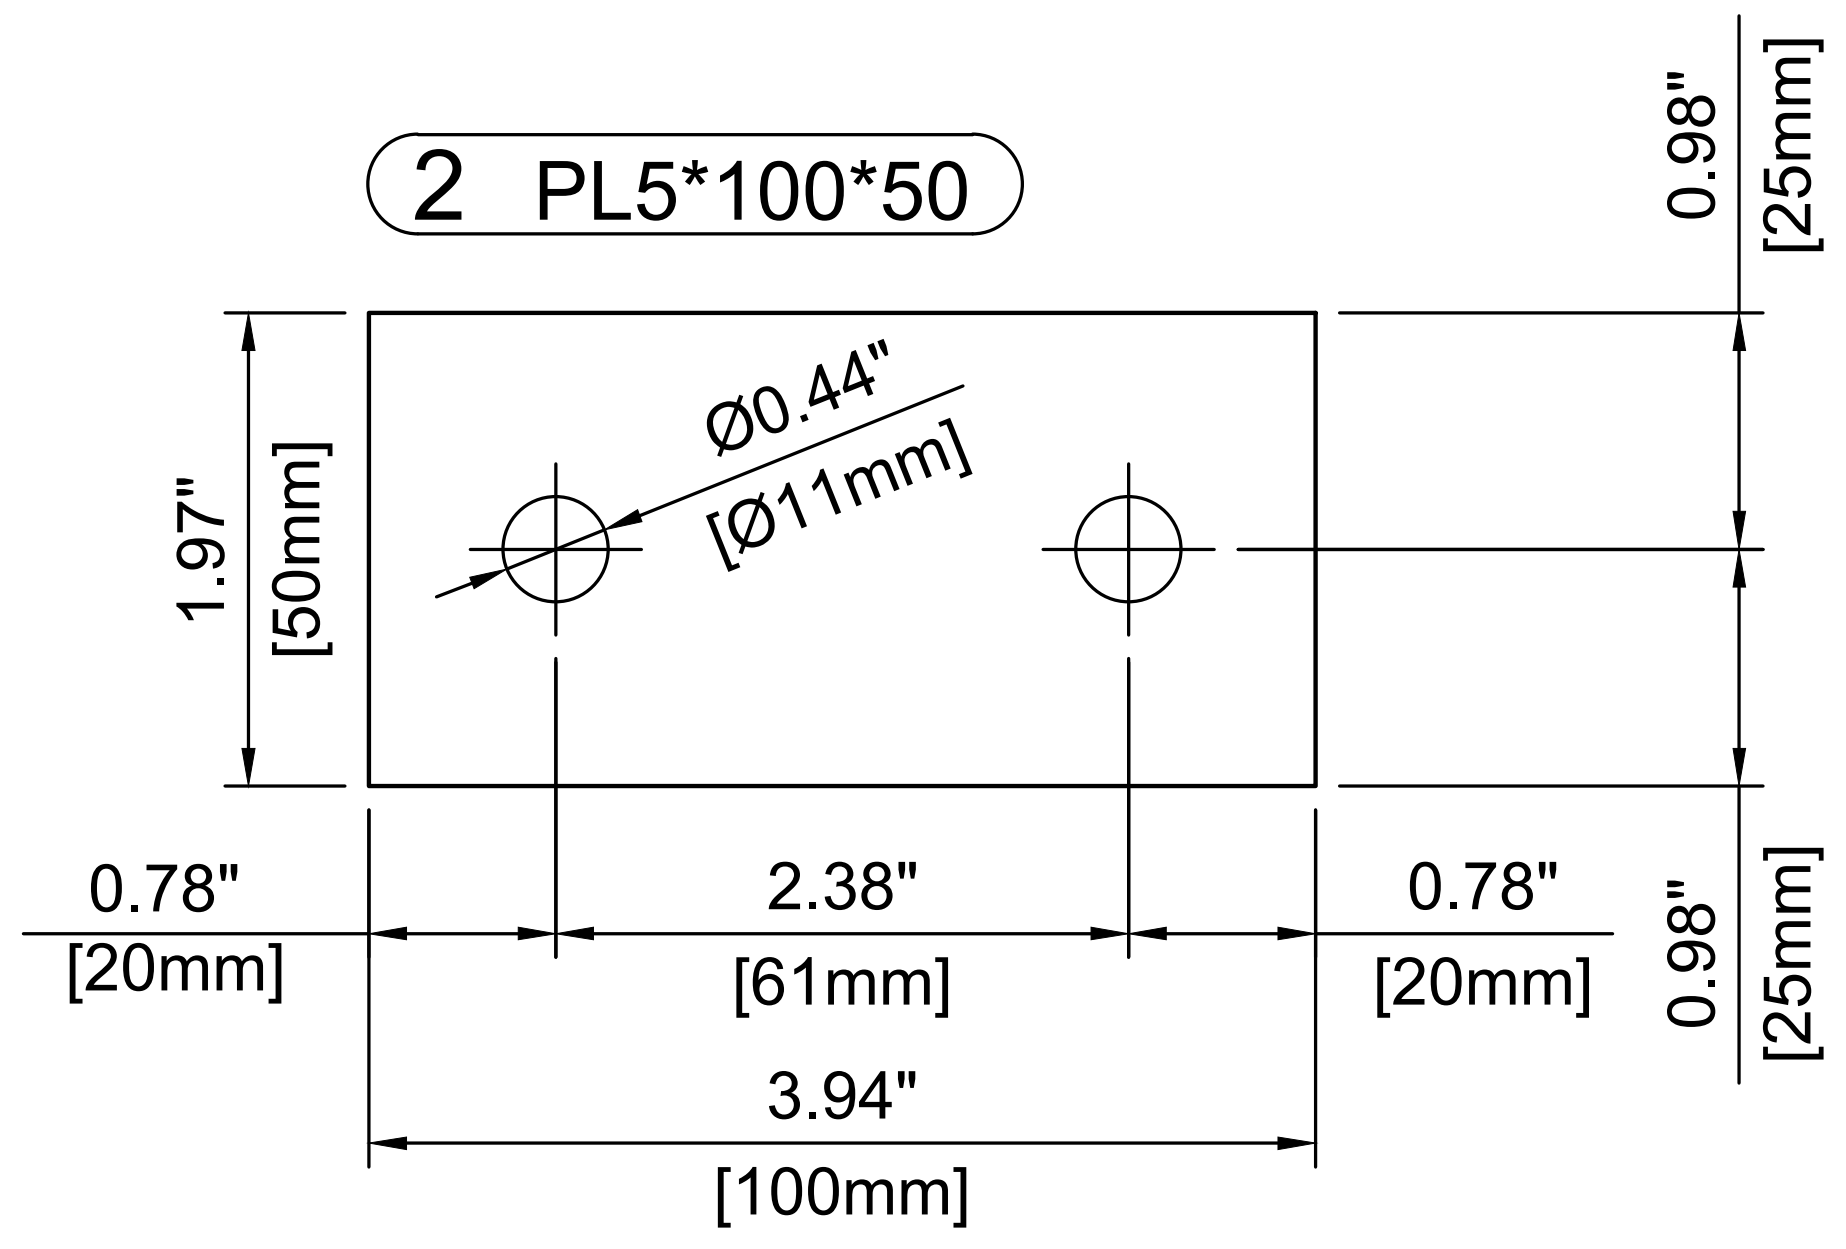

2 PL5*100*50
Ø0.44"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
0.98"
[25mm]
0.78"
[20mm]
2.38"
[61mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

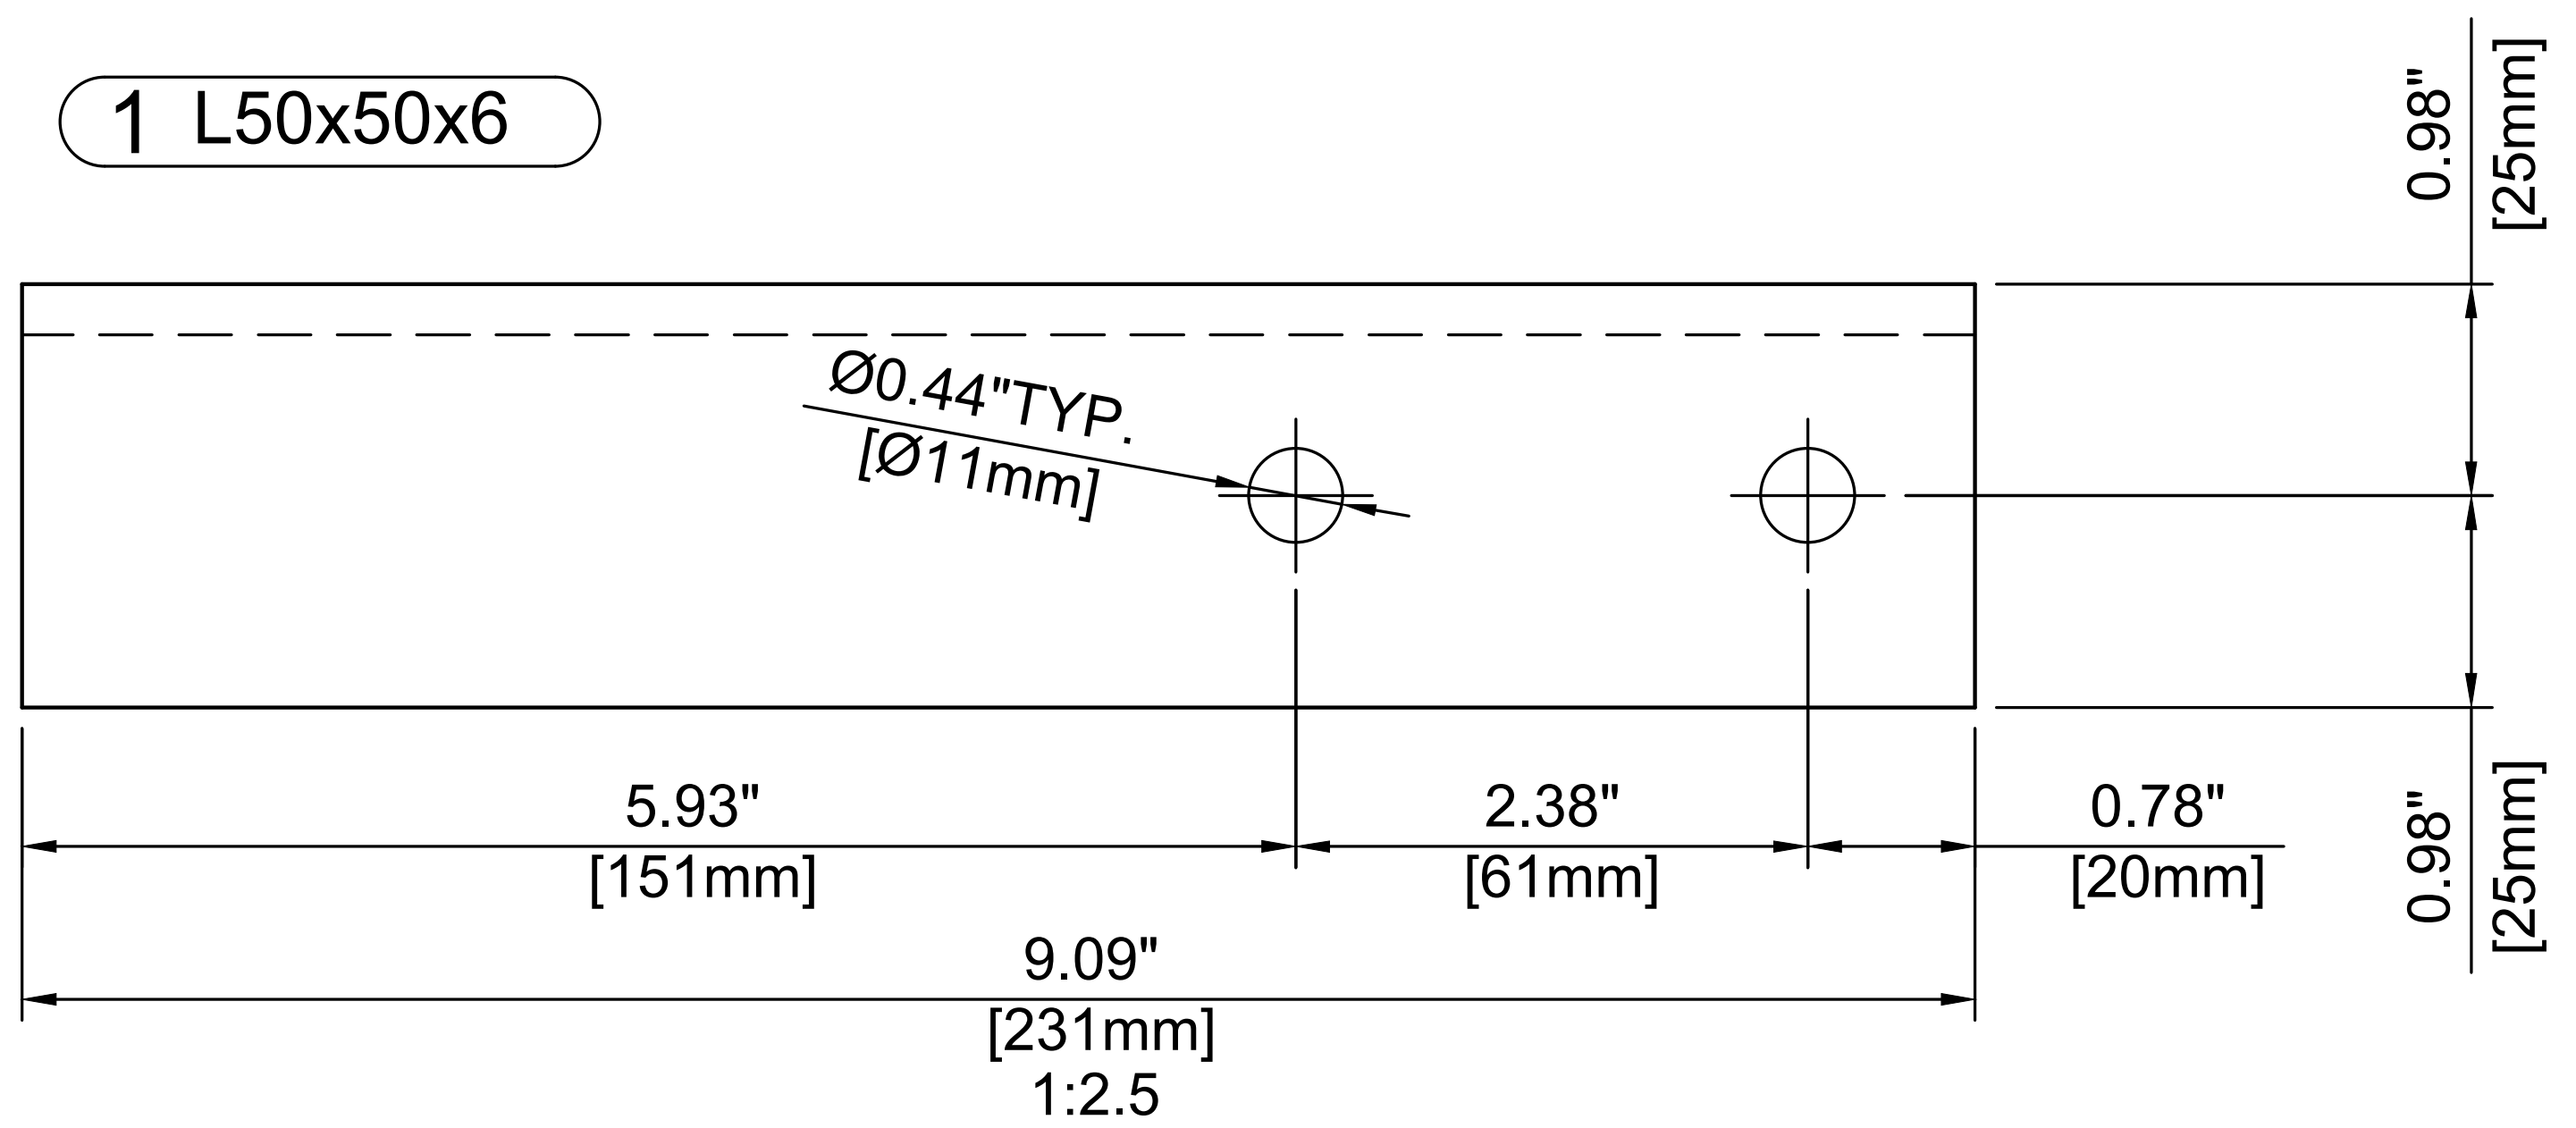

1 L50x50x6
Ø0.44"TYP.
[Ø11mm]
0.98"
[25mm]
0.98"
[25mm]
5.93"
[151mm]
2.38"
[61mm]
0.78"
[20mm]
9.09"
[231mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			9.09	231	1	2.26	1.02	SS400
2	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
5	L50x50x6	JIS G 3192			9.25	235	1	5.16	2.34	SS400
							TOTAL	8.32	3.77	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-21

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR120

Pipe OD =	1.9 inch
Pipe DesignTemp.=	140 °F
Insul=	No Ins.

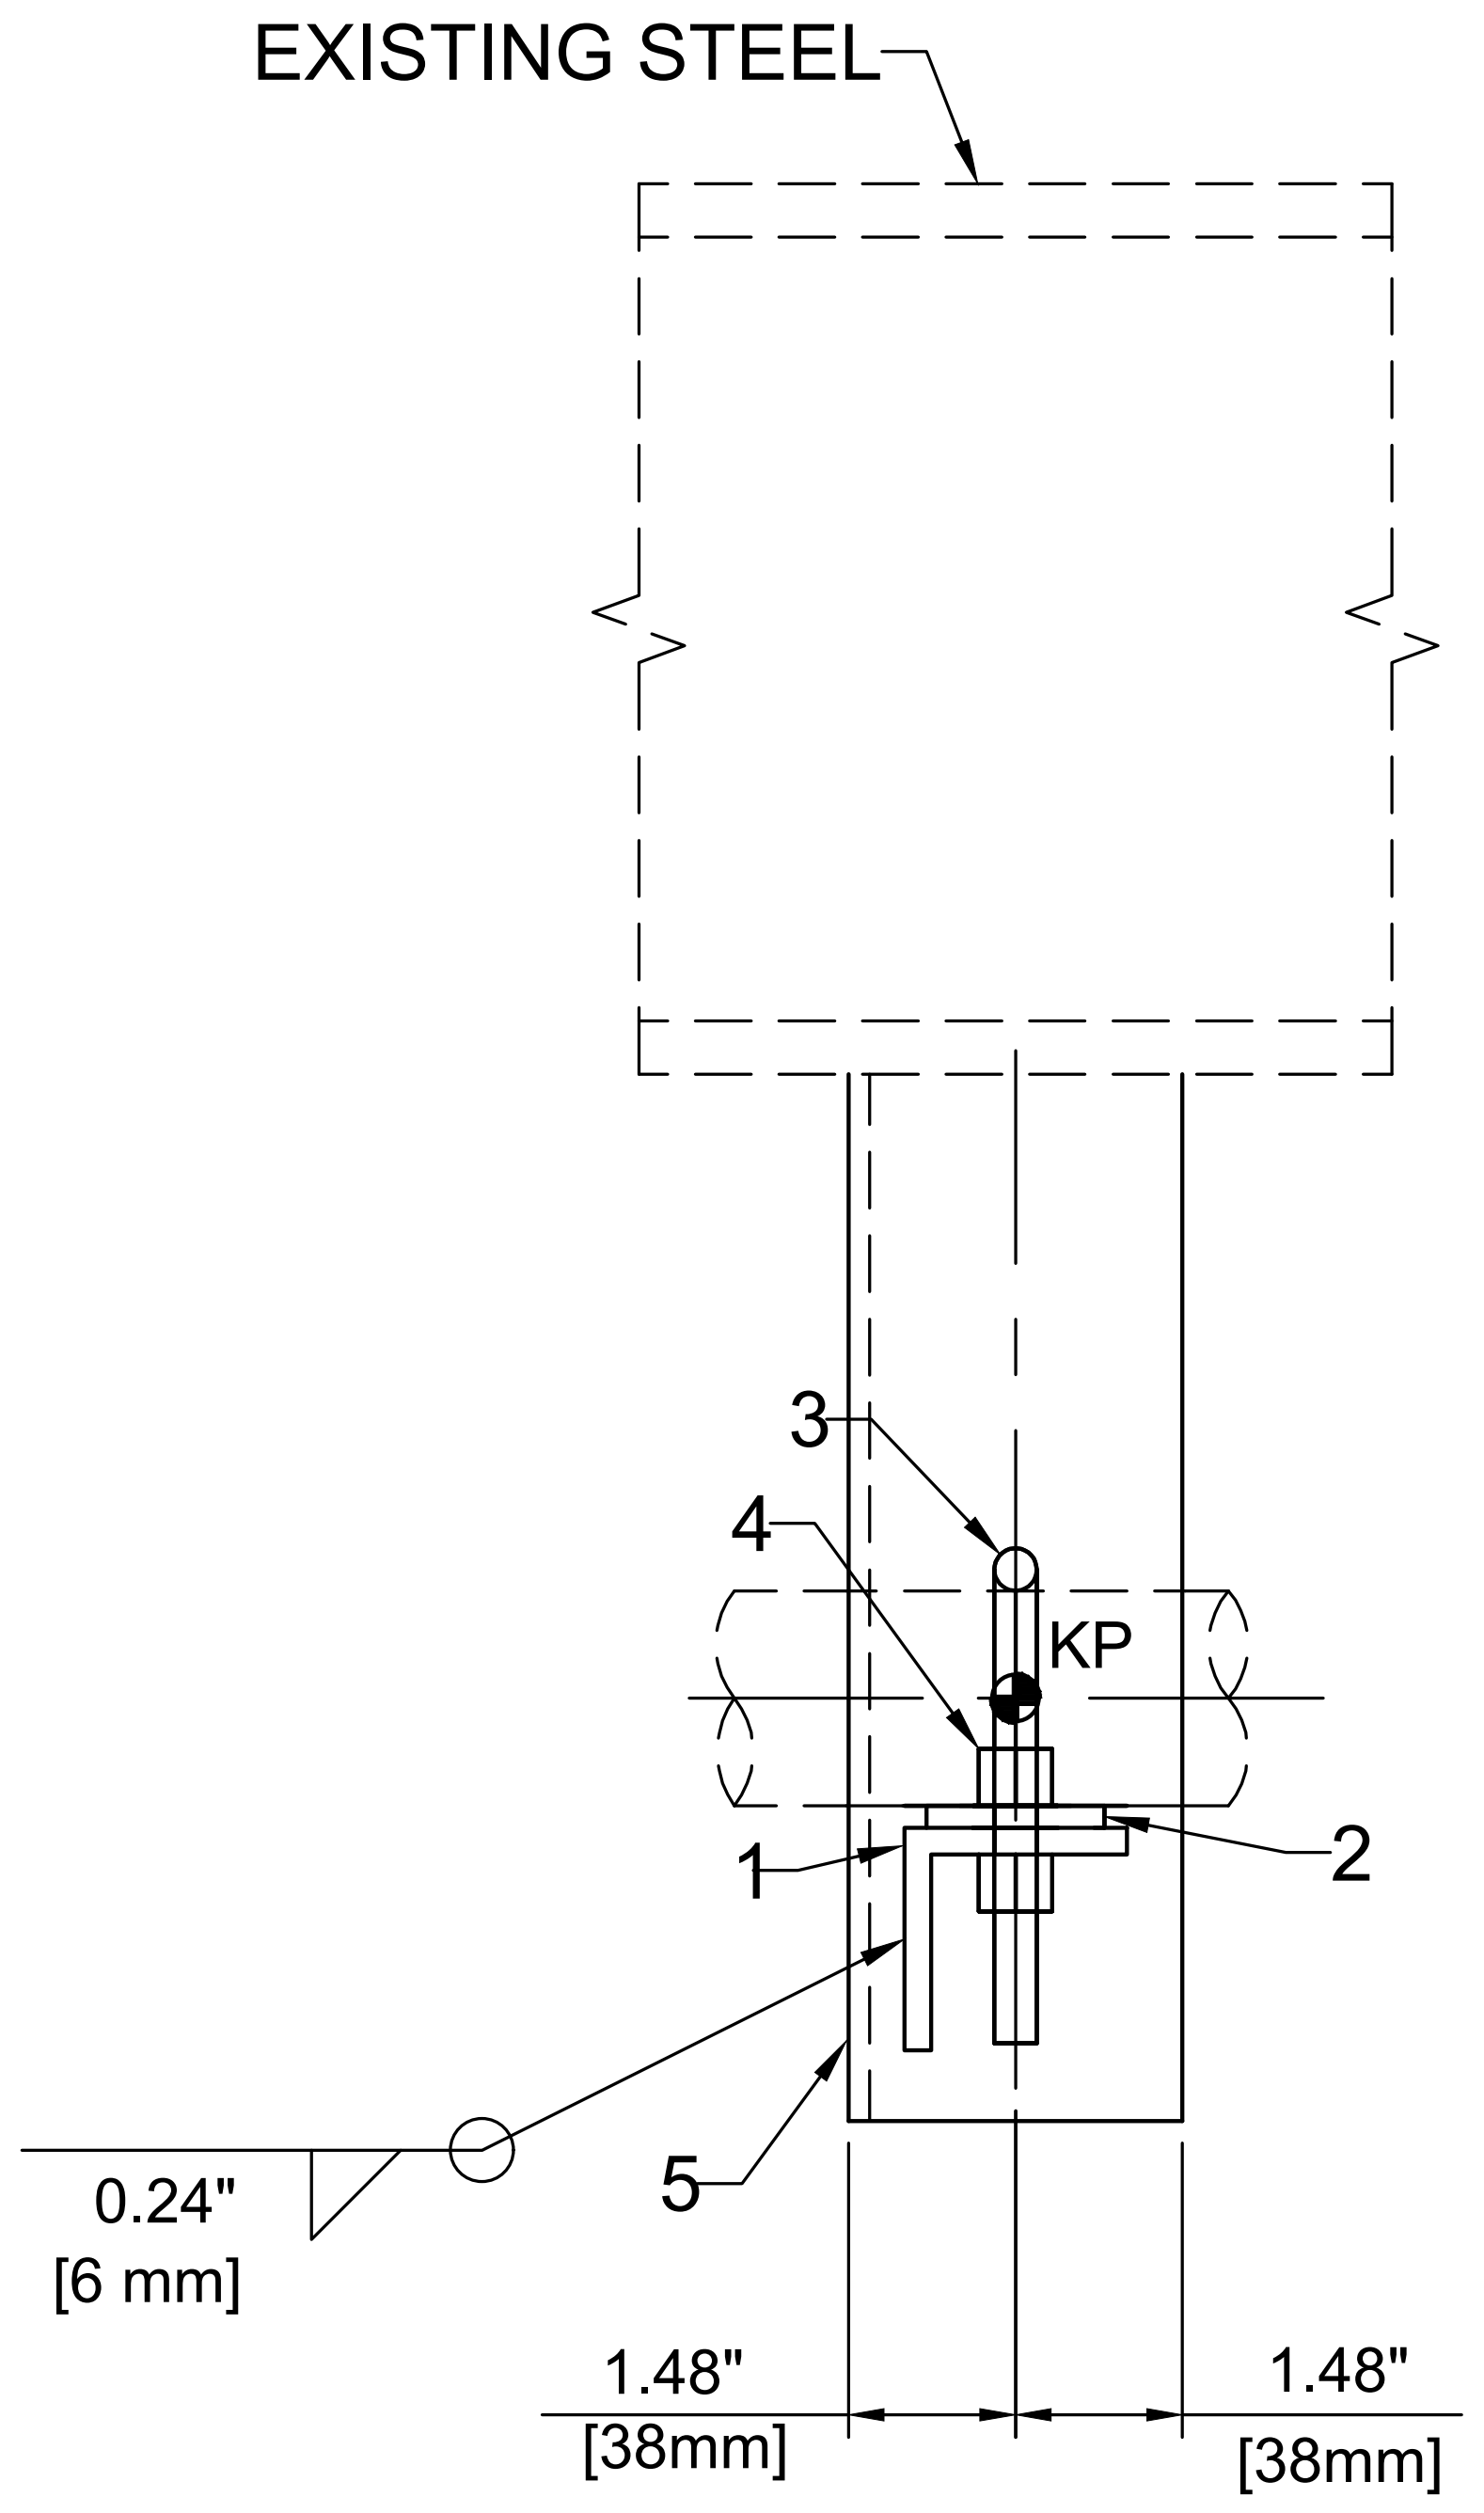
EXISTING STEEL
3
4
KP
1
2
0.24"
[6 mm]
5
1.48"
[38mm]
1.48"
[38mm]

LOOKING FUEL GAS UNIT SIDE
1:5

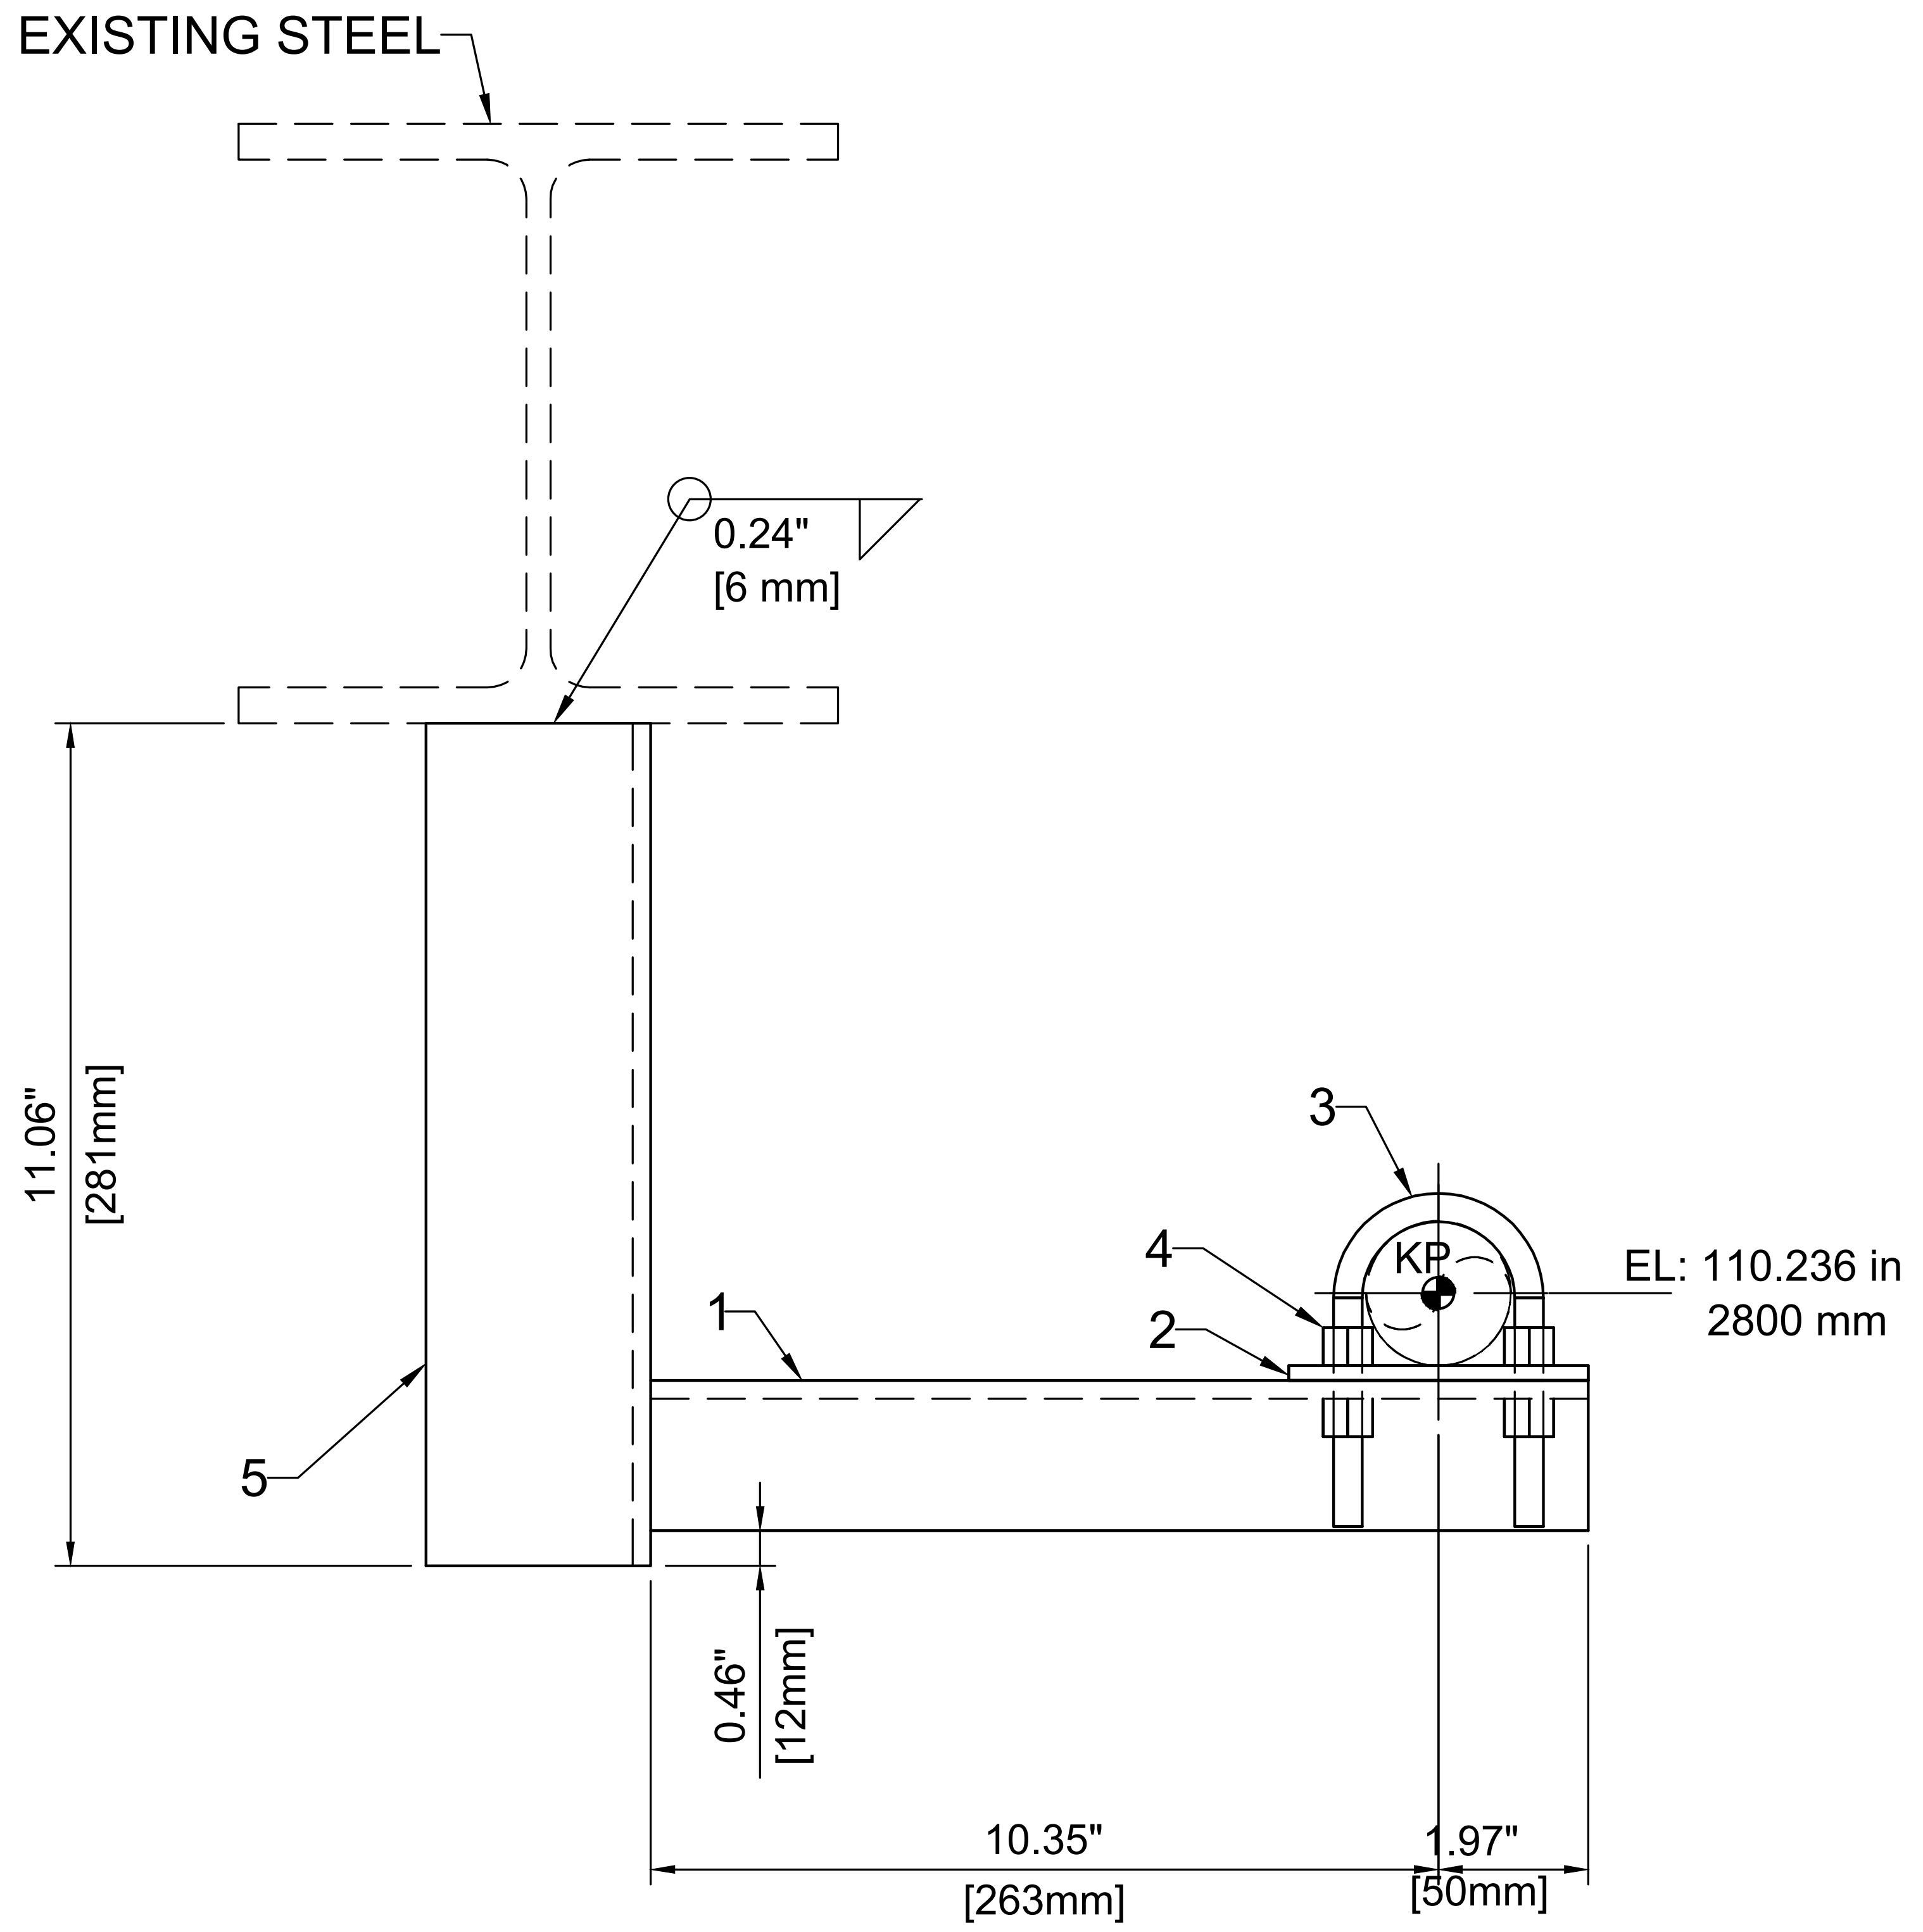
EXISTING STEEL
0.24"
[6 mm]
11.06"
[281mm]
3
4
KP
2
1
EL: 110.236 in
2800 mm
5
0.46"
[12mm]
10.35"
[263mm]
1.97"
[50mm]

LOOKING EXHAUST SIDE
1:5

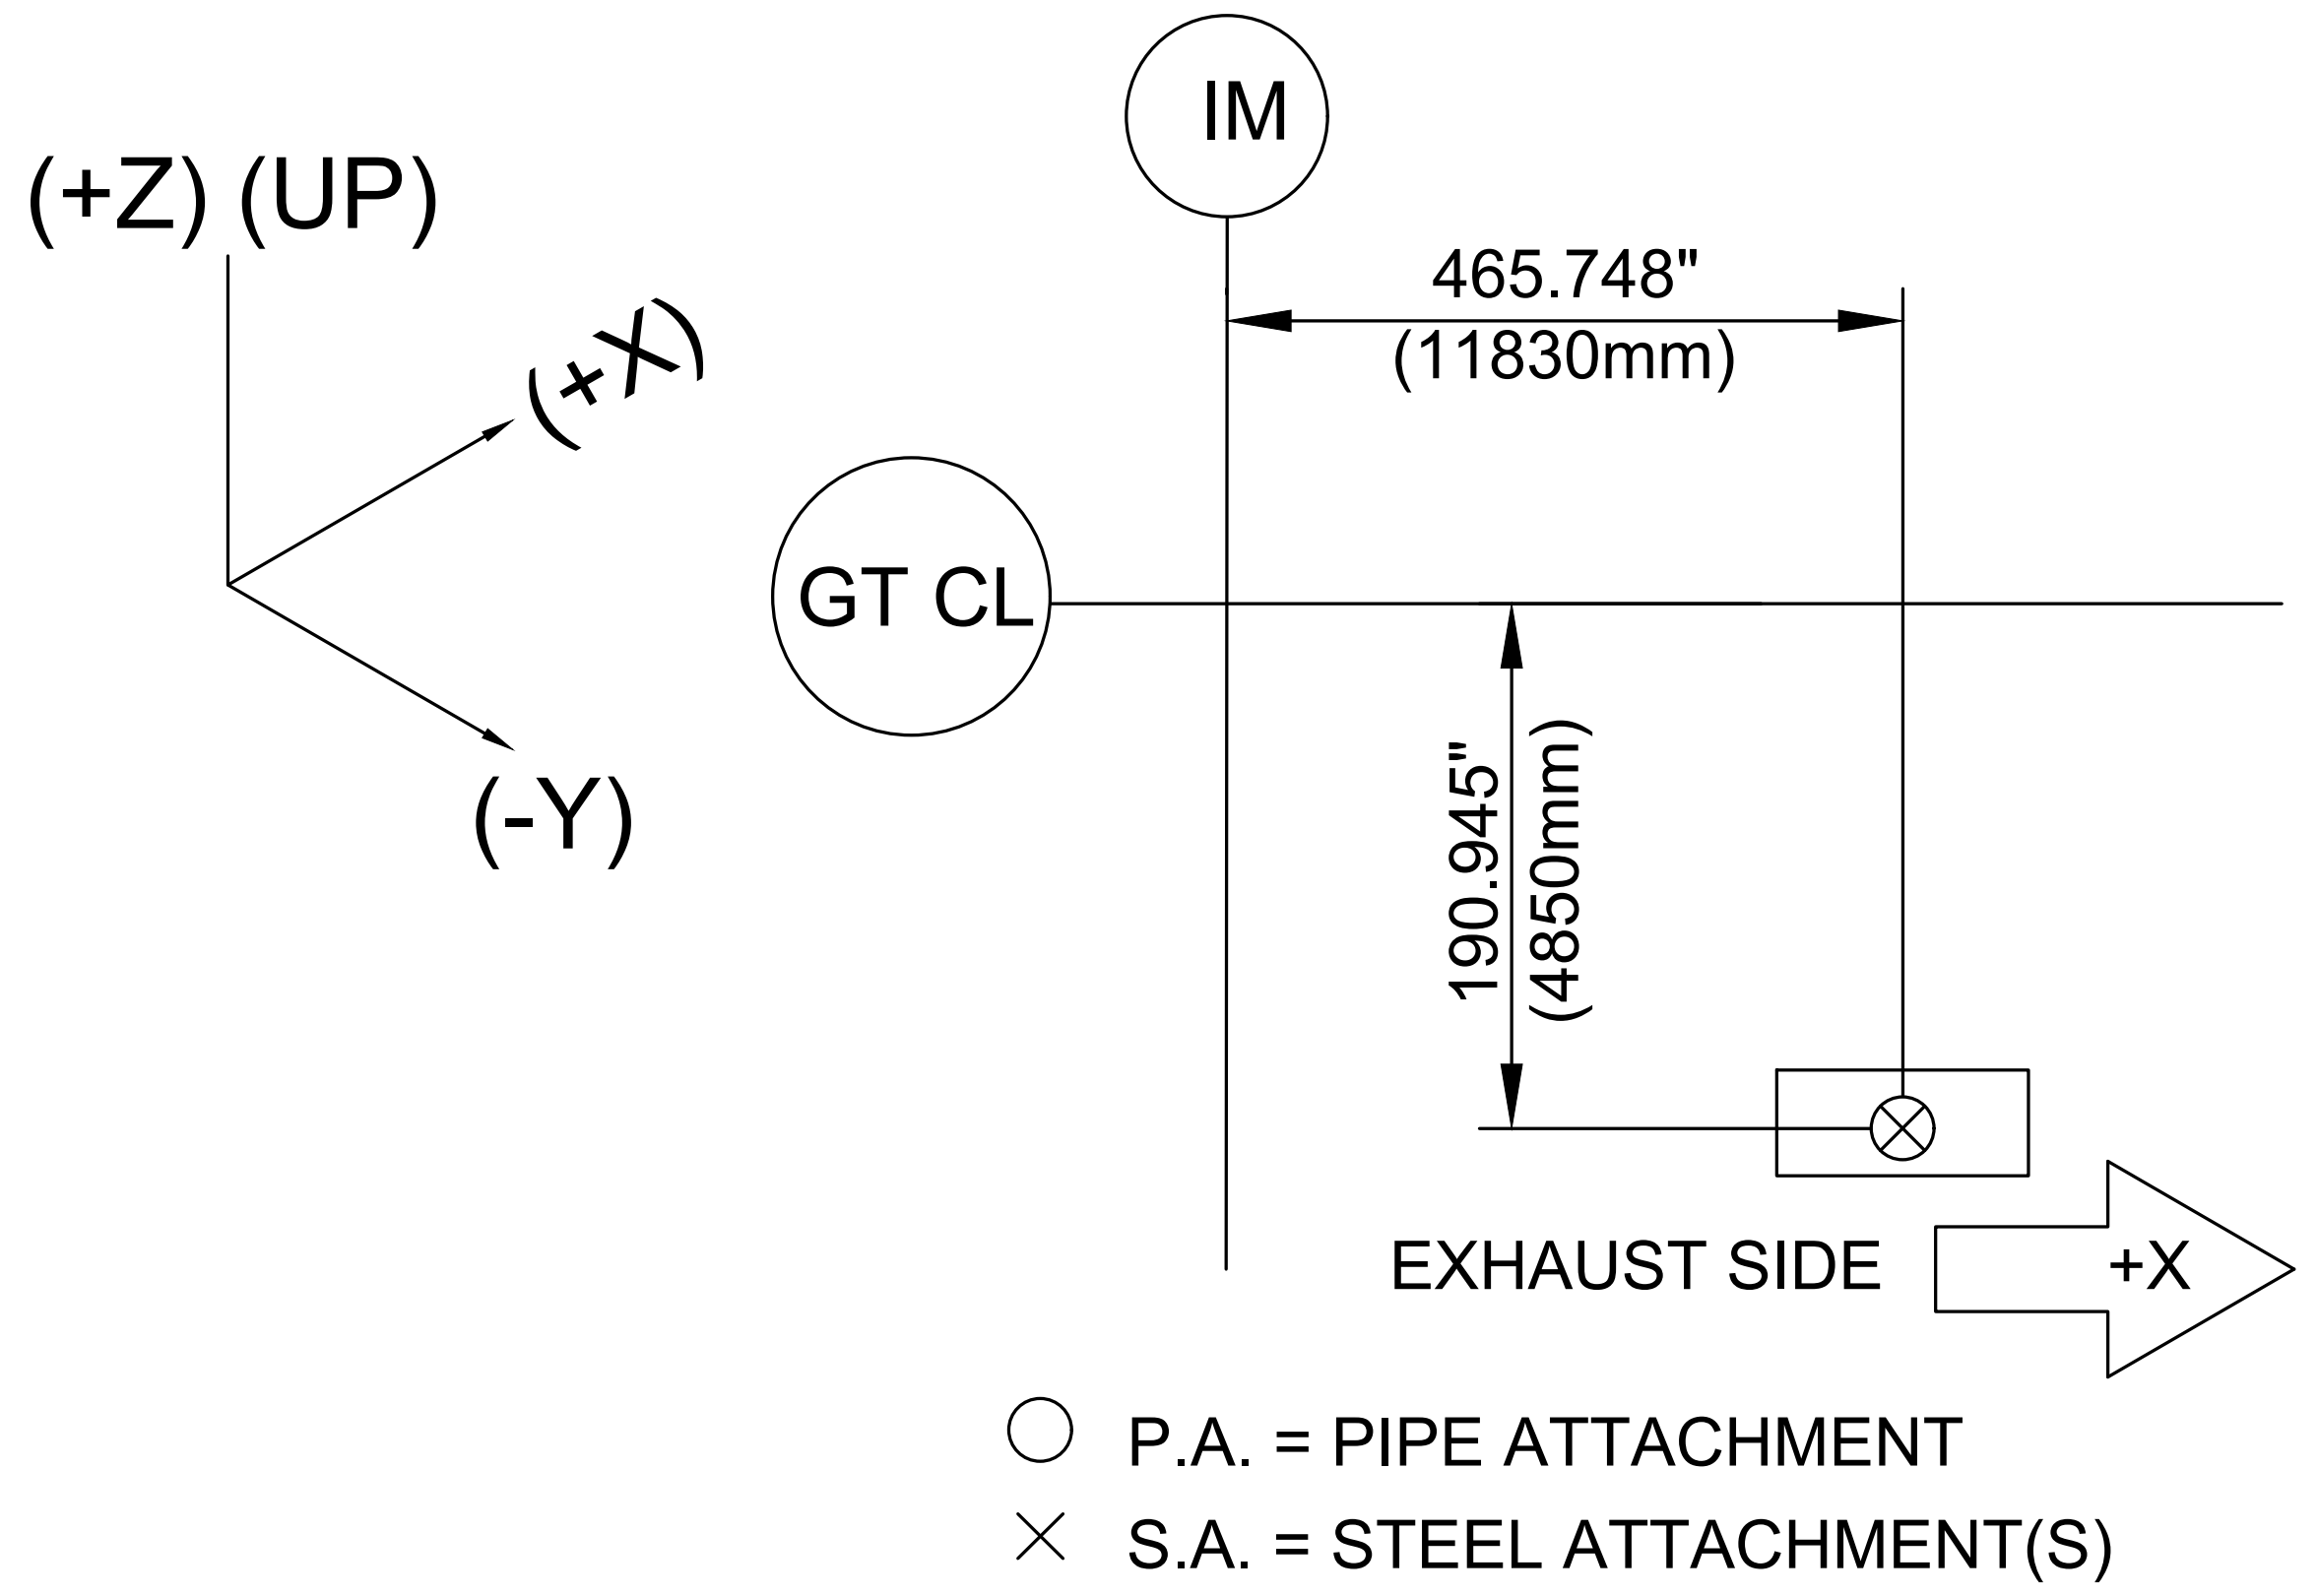
(+Z) (UP)
(+X)
(-Y)
IM
465.748"
(11830mm)
GT CL
190.945"
(4850mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

② PL5*100*40

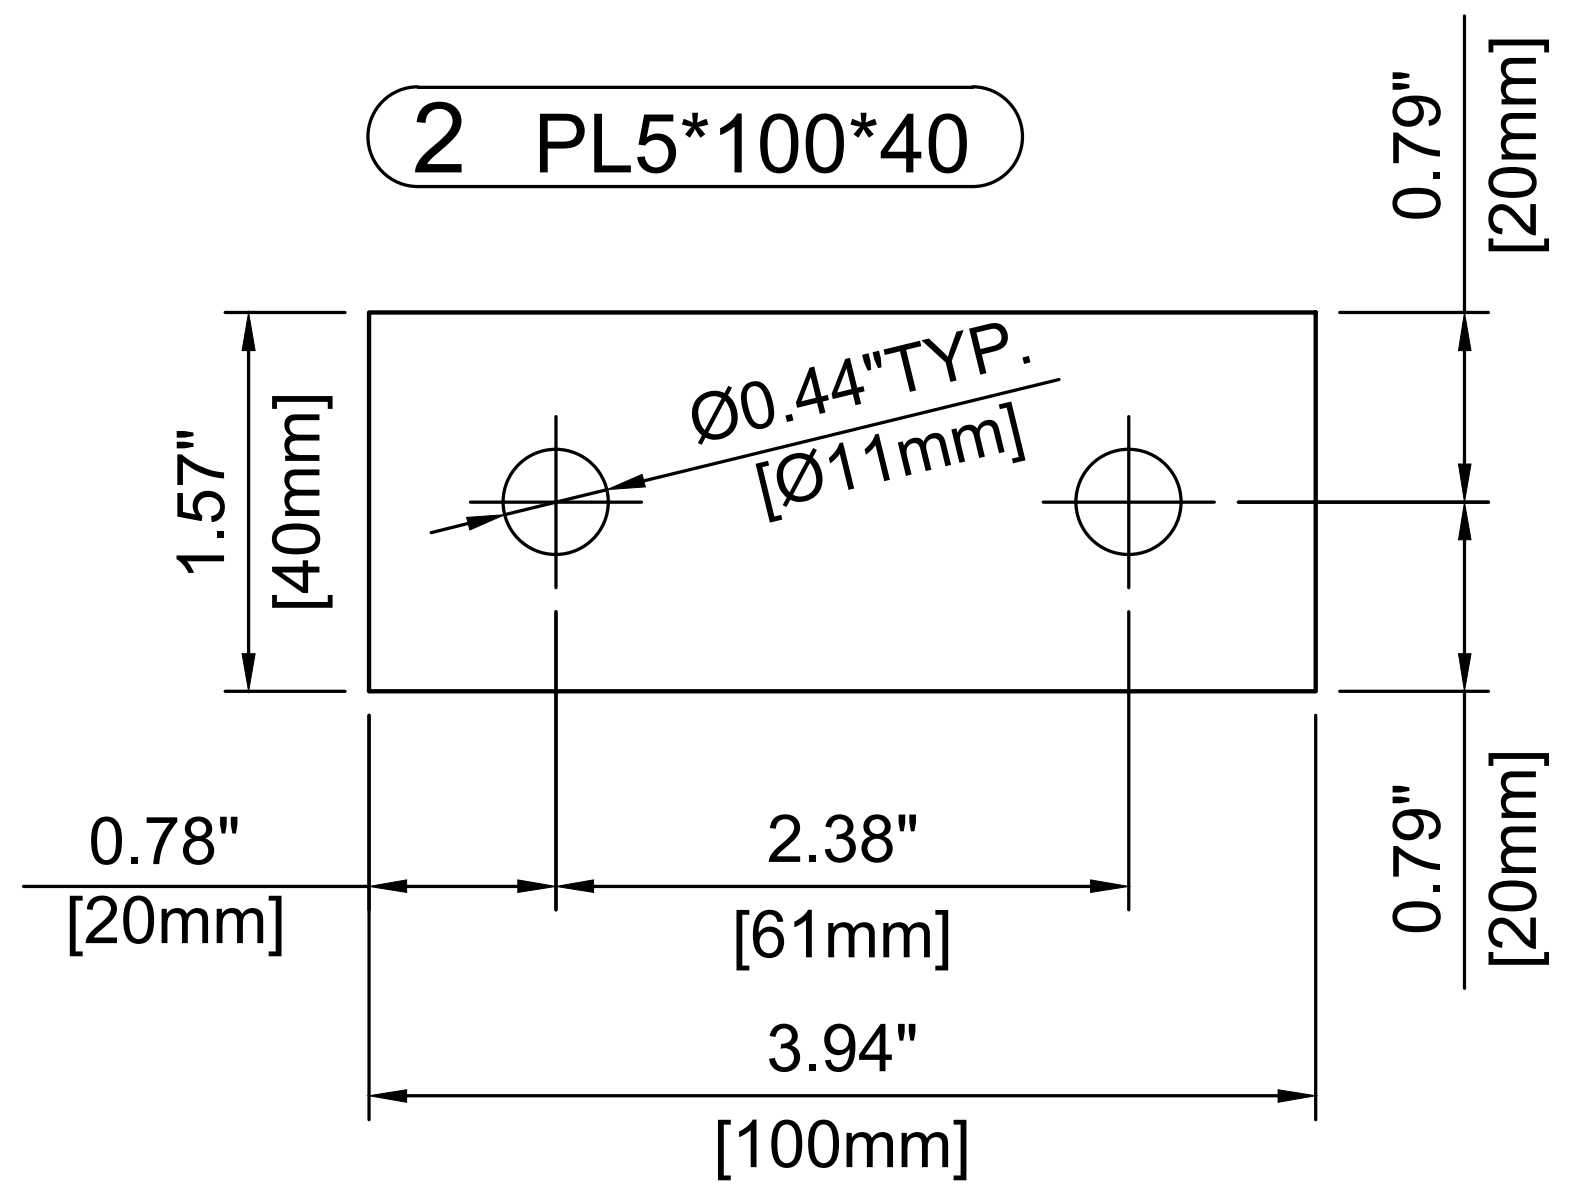
Ø0.44"TYP.
[Ø11mm]
1.57"
[40mm]
0.79"
[20mm]
0.79"
[20mm]
0.78"
[20mm]
2.38"
[61mm]
3.94"
[100mm]

1:2.5

① L50x50x6

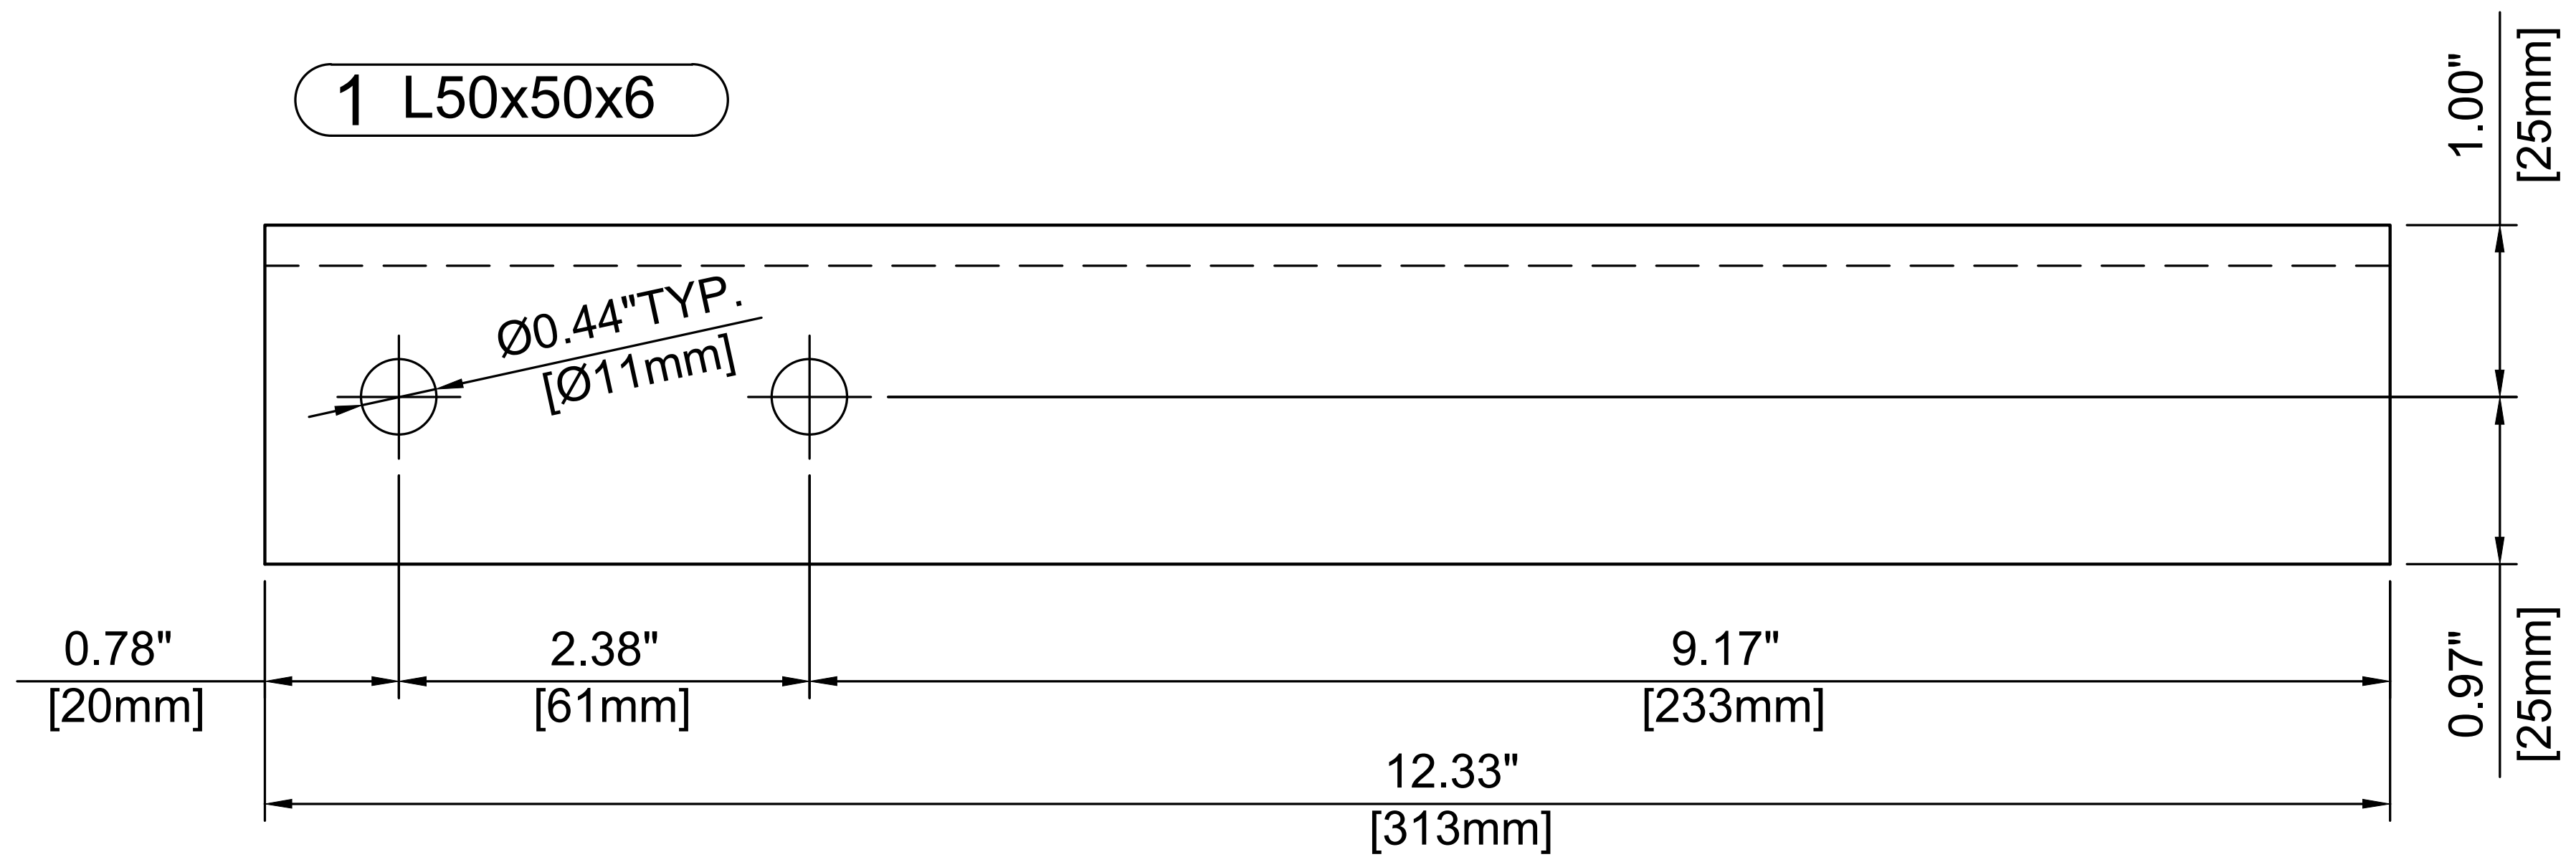
Ø0.44"TYP.
[Ø11mm]
1.00"
[25mm]
0.97"
[25mm]
0.78"
[20mm]
2.38"
[61mm]
9.17"
[233mm]
12.33"
[313mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			12.32	313	1	3.06	1.39	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
5	L75x75x9	JIS G 3192			11.06	281	1	2.74	1.24	SS400
						TOTAL		6.62	3.00	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-22

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

6. Ø11 mm HOLES TO BE DRILLED ON EXISTING STEEL FOR U-BOLT

NODE:	No C2
LINE NO:	**QFF11BR120

Pipe OD =	1.9 inch
Pipe DesignTemp.=	140 °F
Insul=	No Ins.

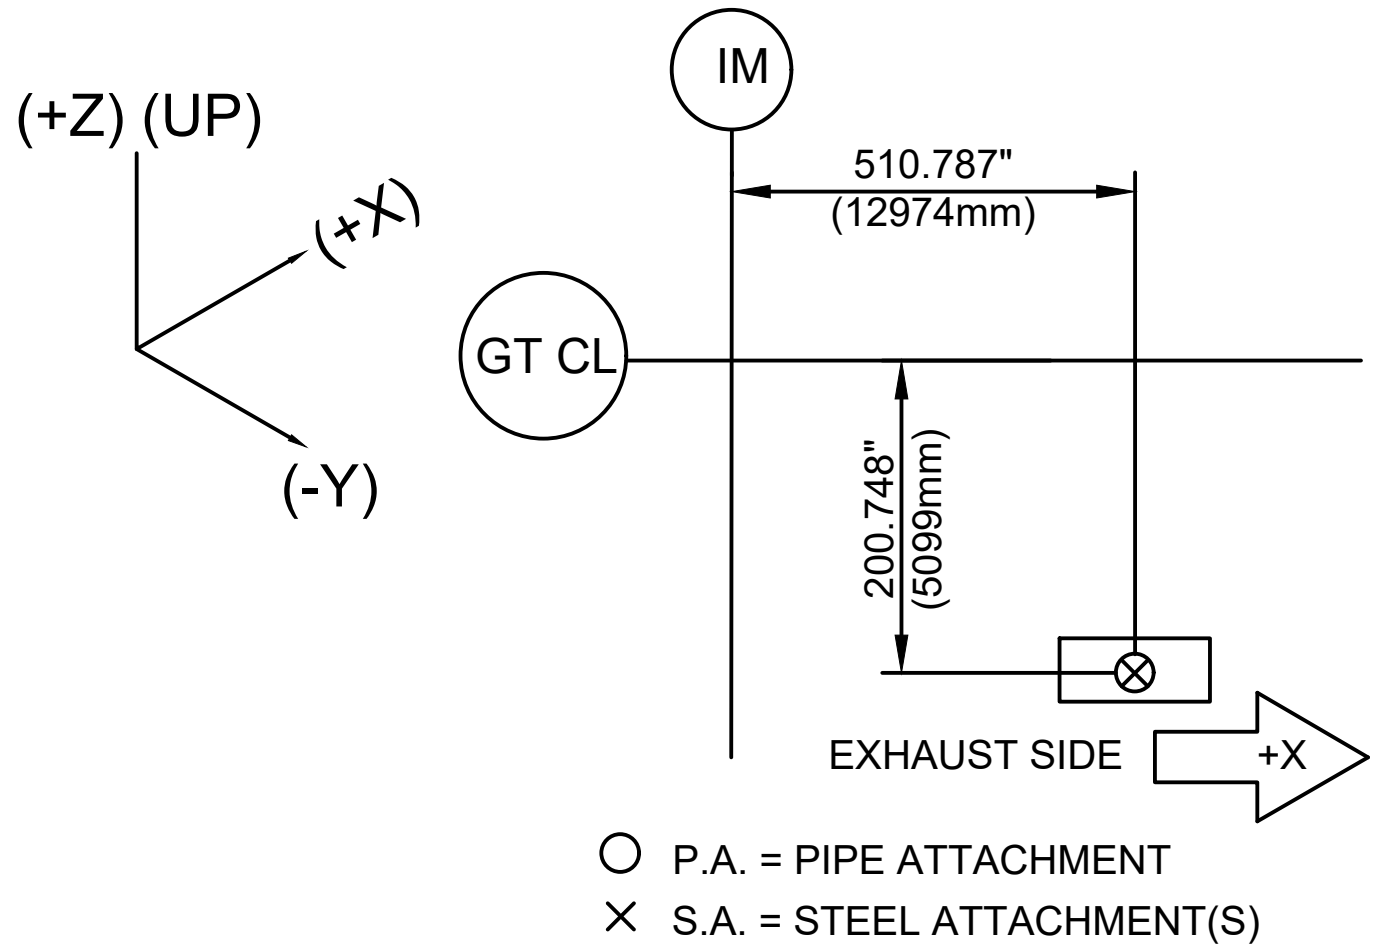
(+Z) (UP)
(+X)
(-Y)
IM
510.787"
(12974mm)
GT CL
200.748"
(5099mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

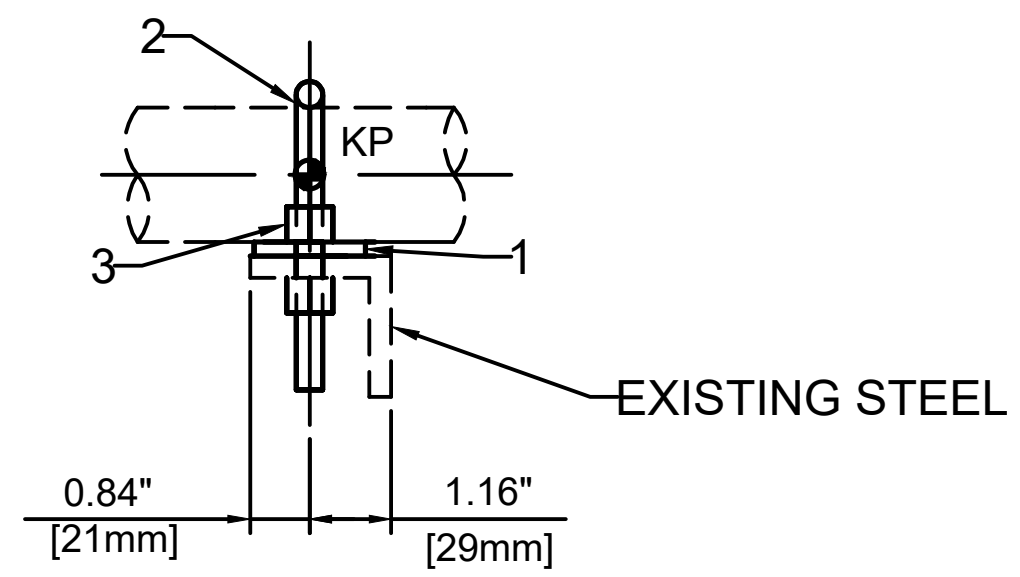
2
KP
3
1
EXISTING STEEL
0.84"
[21mm]
1.16"
[29mm]

LOOKING LUBE OIL UNIT SIDE
1:5

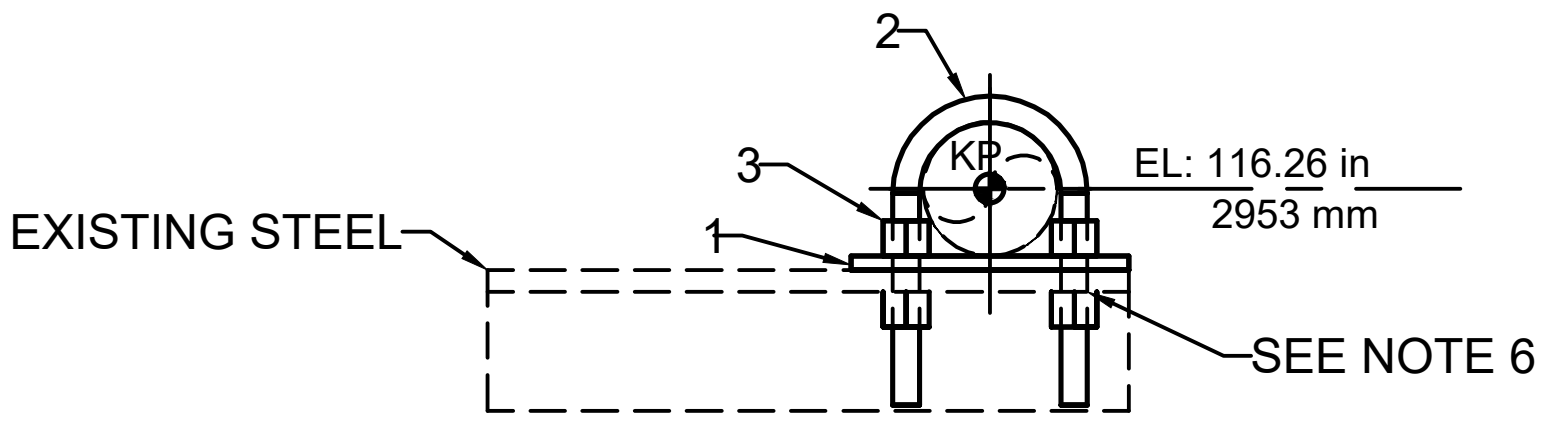
2
3
KP
EL: 116.26 in
2953 mm
EXISTING STEEL
1
SEE NOTE 6

LOOKING INLET MANIFOLD SIDE
1:5

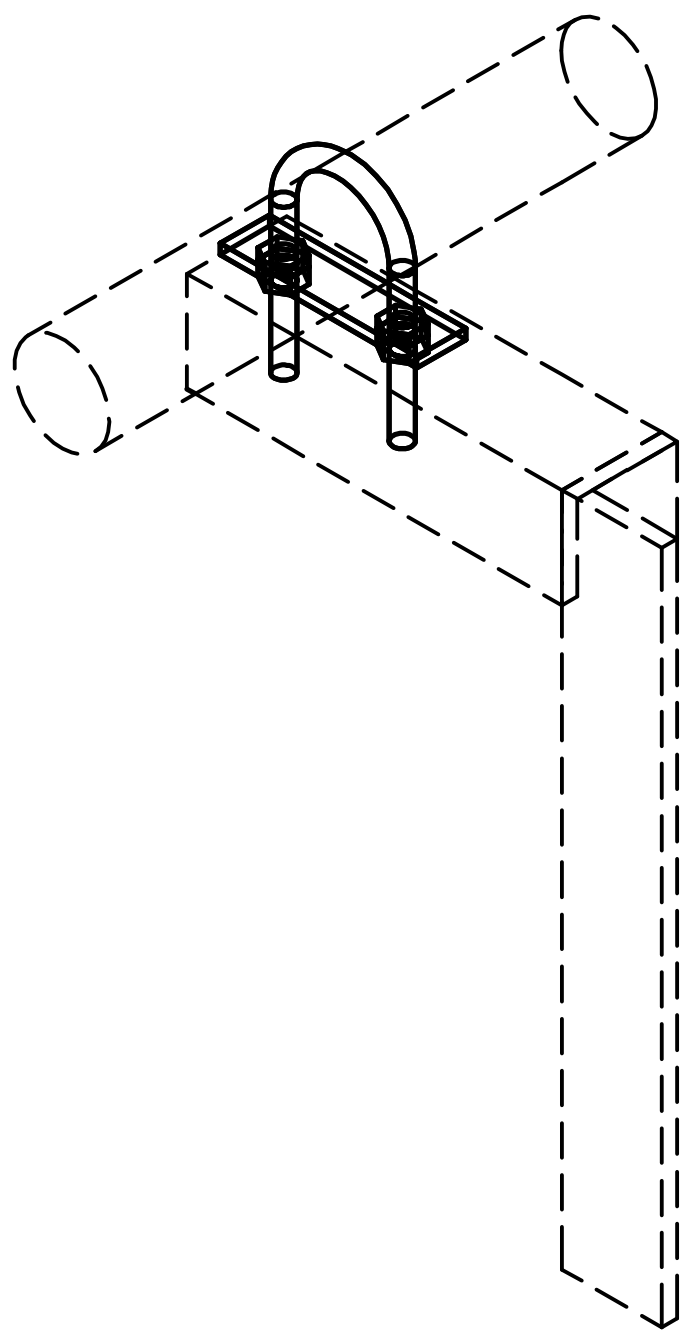

ISOMETRIC VIEW

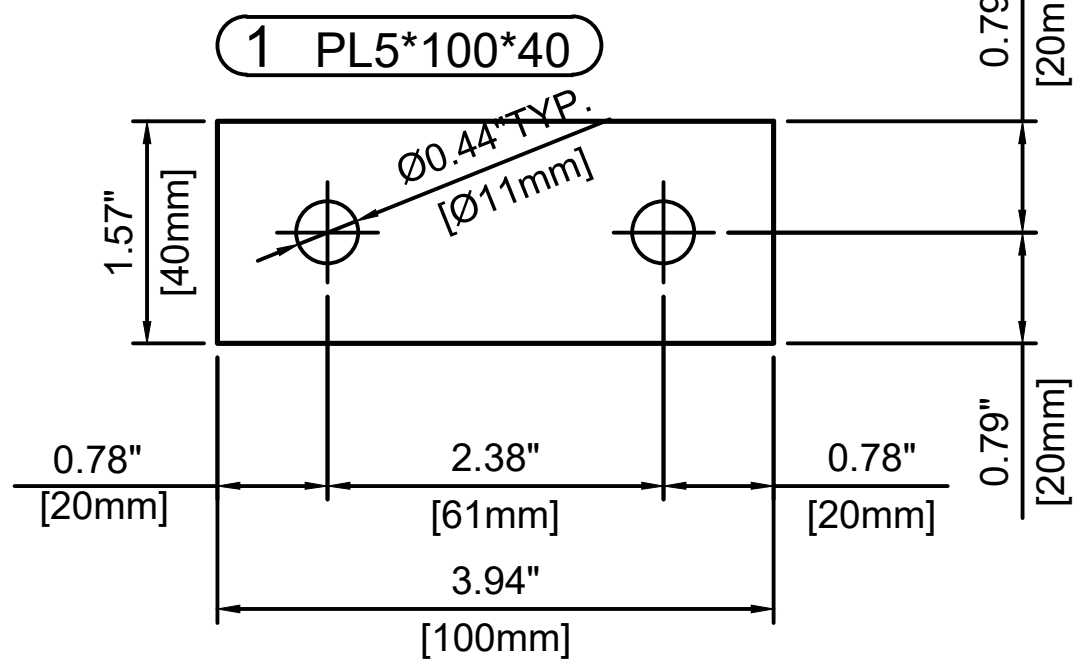
1 PL5*100*40
Ø0.44" TYP.
[Ø11mm]
1.57"
[40mm]
0.79"
[20mm]
0.79"
[20mm]
0.78"
[20mm]
2.38"
[61mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
2	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
3	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
							TOTAL	0.82	0.37	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-23

PROPRIETARY AND CONFIDENTIAL:

PAGE NUMBER:	1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR120

Pipe OD = 1.90 inch
Pipe DesignTemp.= 140 °F
Insul= 0 inch

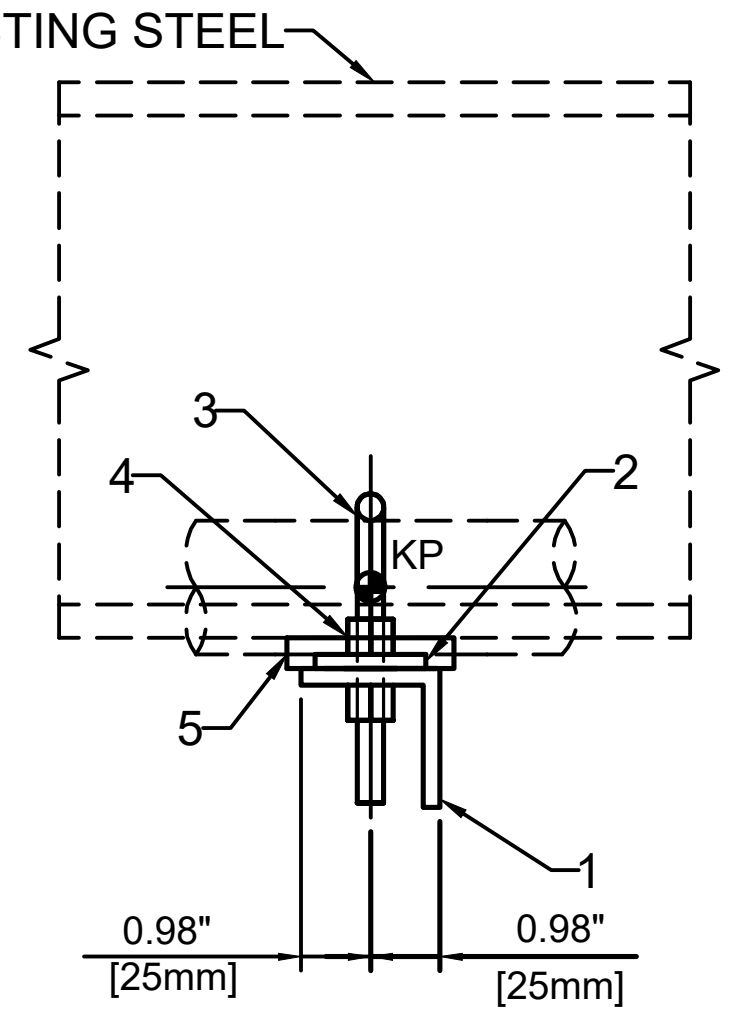
EXISTING STEEL
3
4
2
KP
5
1
0.98"
[25mm]
0.98"
[25mm]

LOOKING EXHAUST SIDE
1:5

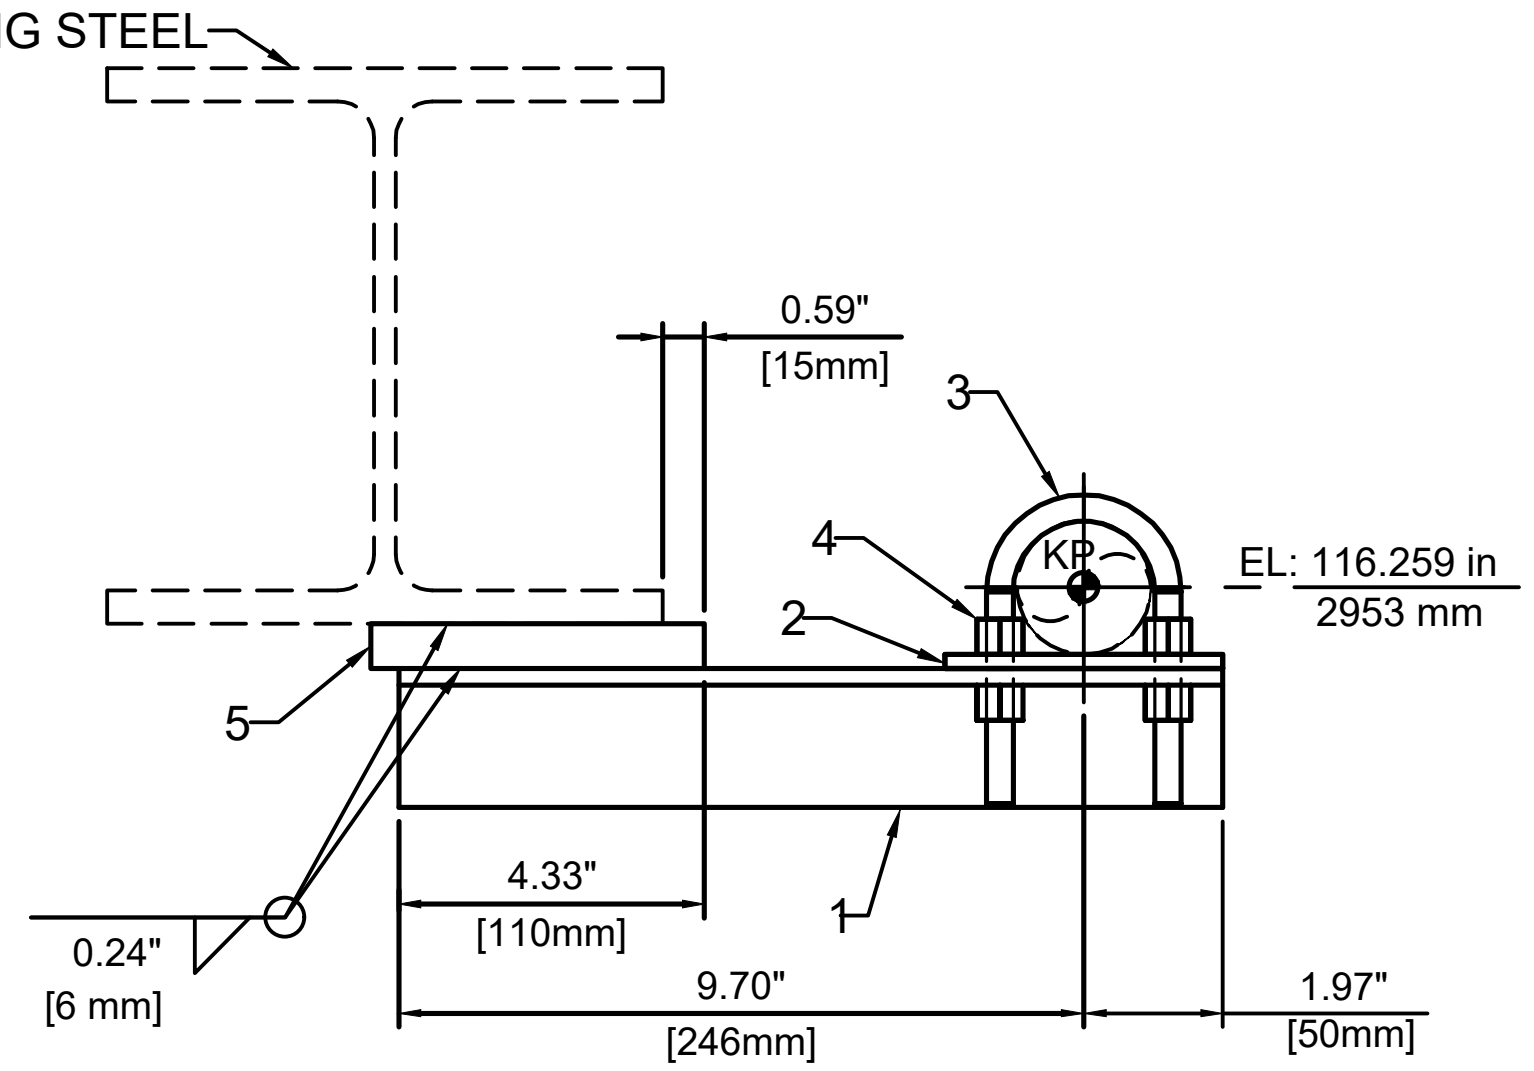
EXISTING STEEL
0.59"
[15mm]
3
4
2
KP
EL: 116.259 in
2953 mm
5
0.24"
[6 mm]
4.33"
[110mm]
1
9.70"
[246mm]
1.97"
[50mm]

LOOKING LUBE OIL UNIT SIDE
1:5

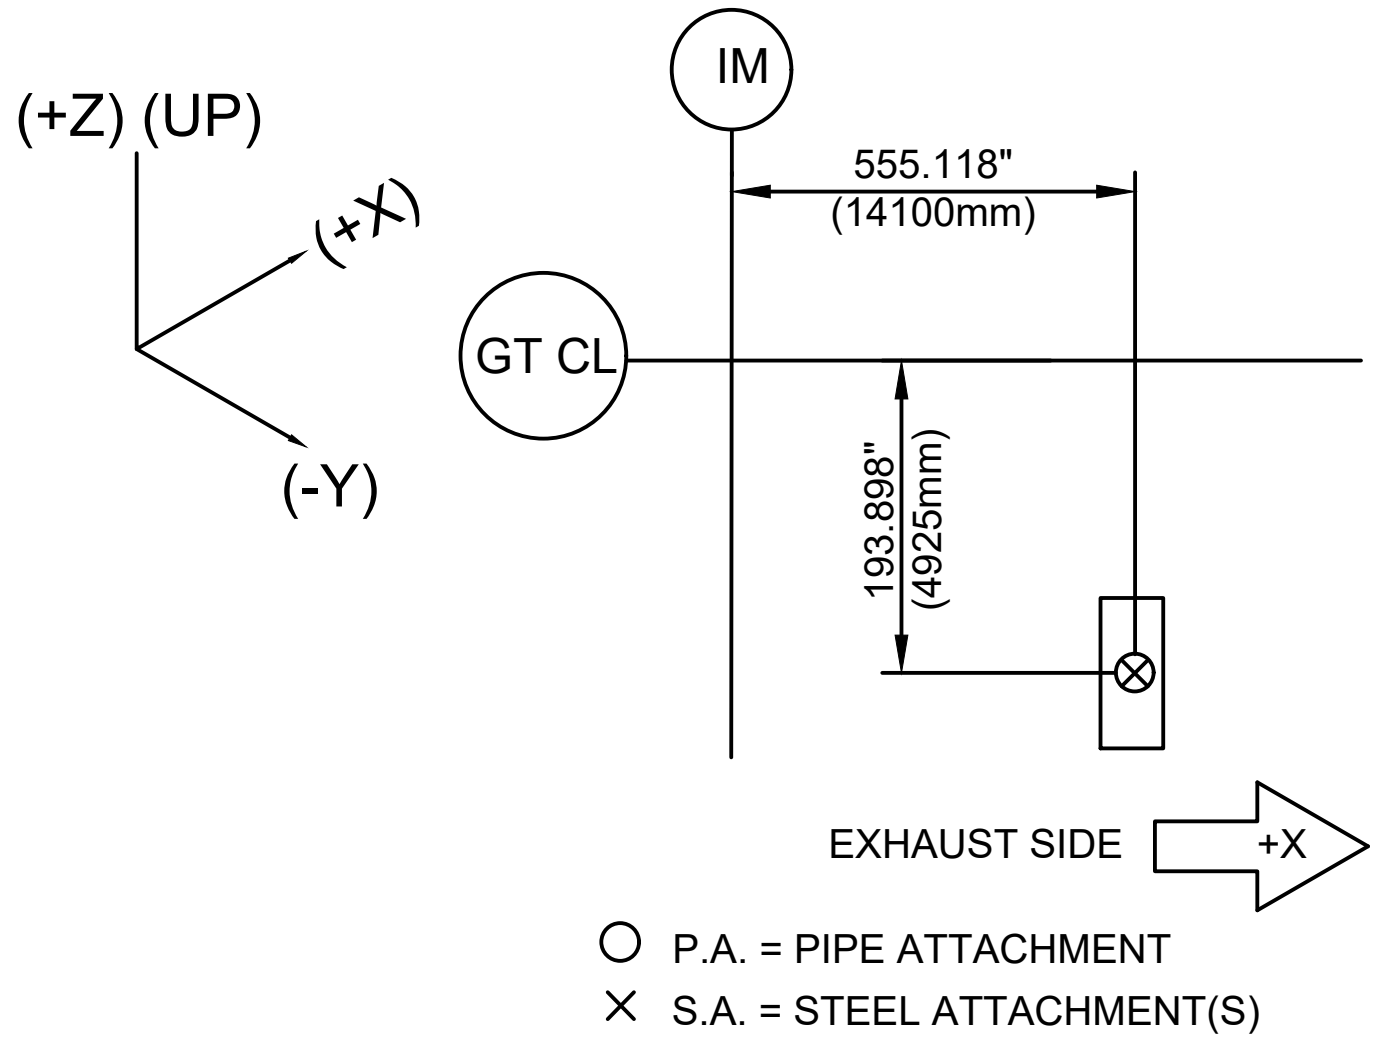
(+Z) (UP)
(+X)
(-Y)
IM
555.118"
(14100mm)
GT CL
193.898"
(4925mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

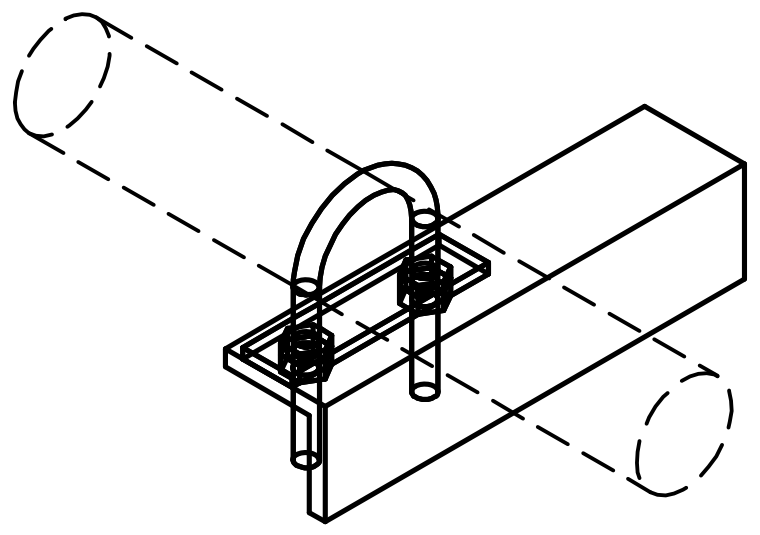

ISOMETRIC VIEW

2 PL5*100*40

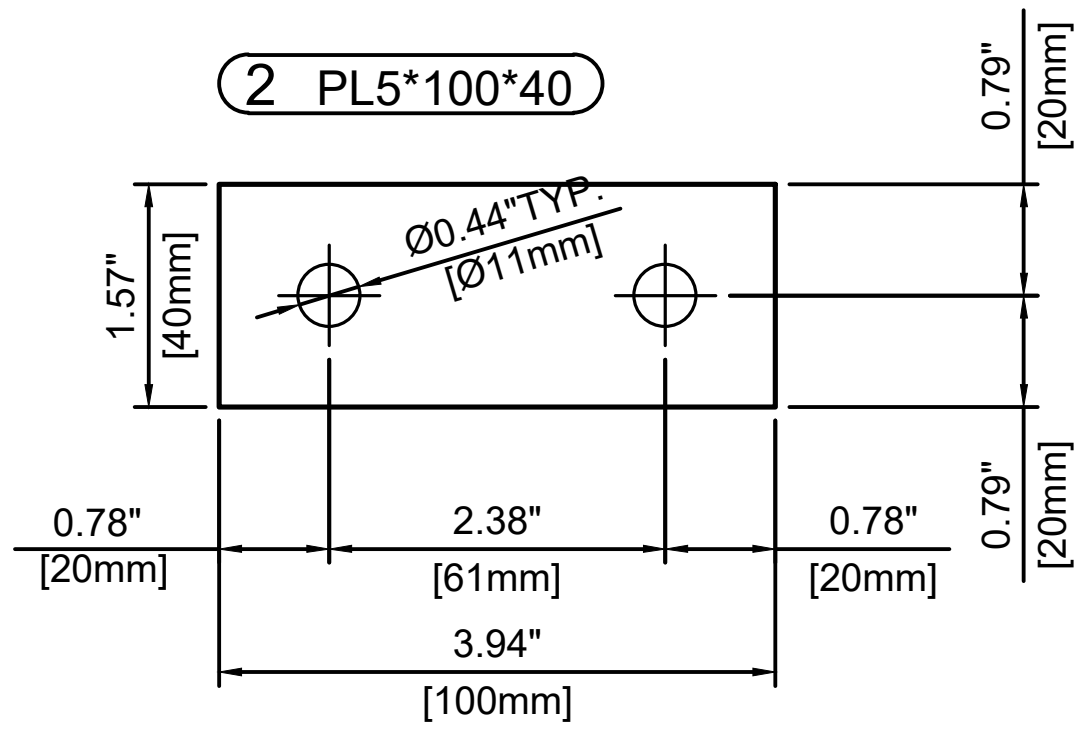
0.79"
[20mm]
1.57"
[40mm]
Ø0.44"TYP.
[Ø11mm]
0.79"
[20mm]
0.78"
[20mm]
2.38"
[61mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

1 L50x50x6

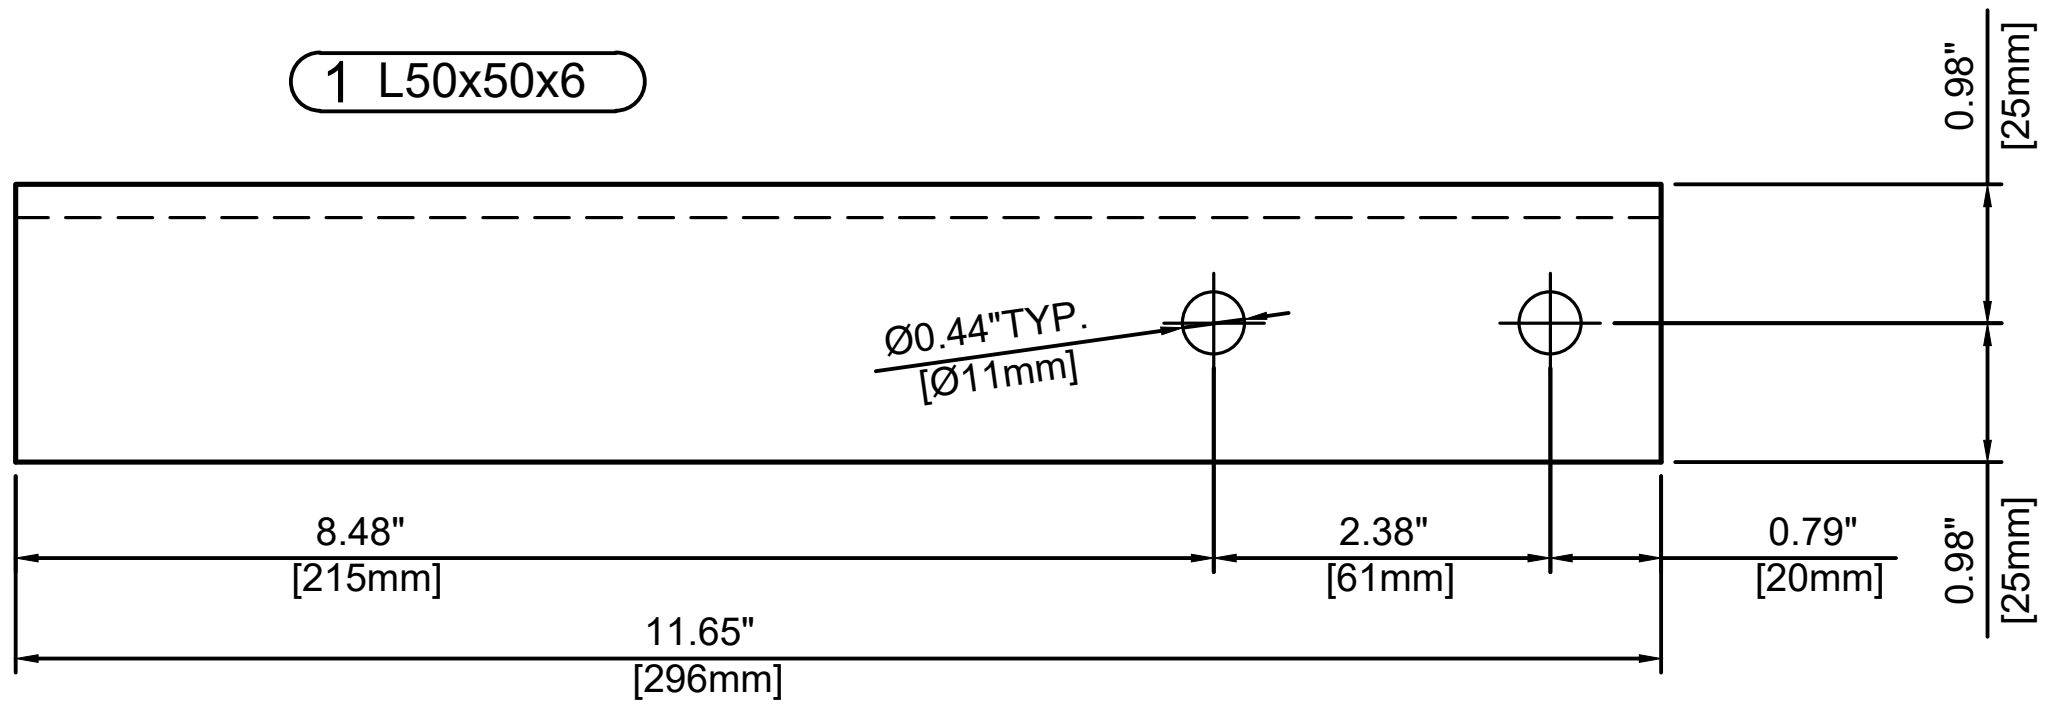
0.98"
[25mm]
Ø0.44"TYP.
[Ø11mm]
0.98"
[25mm]
8.48"
[215mm]
2.38"
[61mm]
0.79"
[20mm]
11.65"
[296mm]

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			11.65	296	1	2.89	1.31	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
5	PL16		2.36	60	4.72	120	1	0.62	0.28	ASTM A36
						GRAND TOTAL		4.32	1.96	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **24A0A-PS-24

PROPRIETARY AND CONFIDENTIAL:

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR031

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

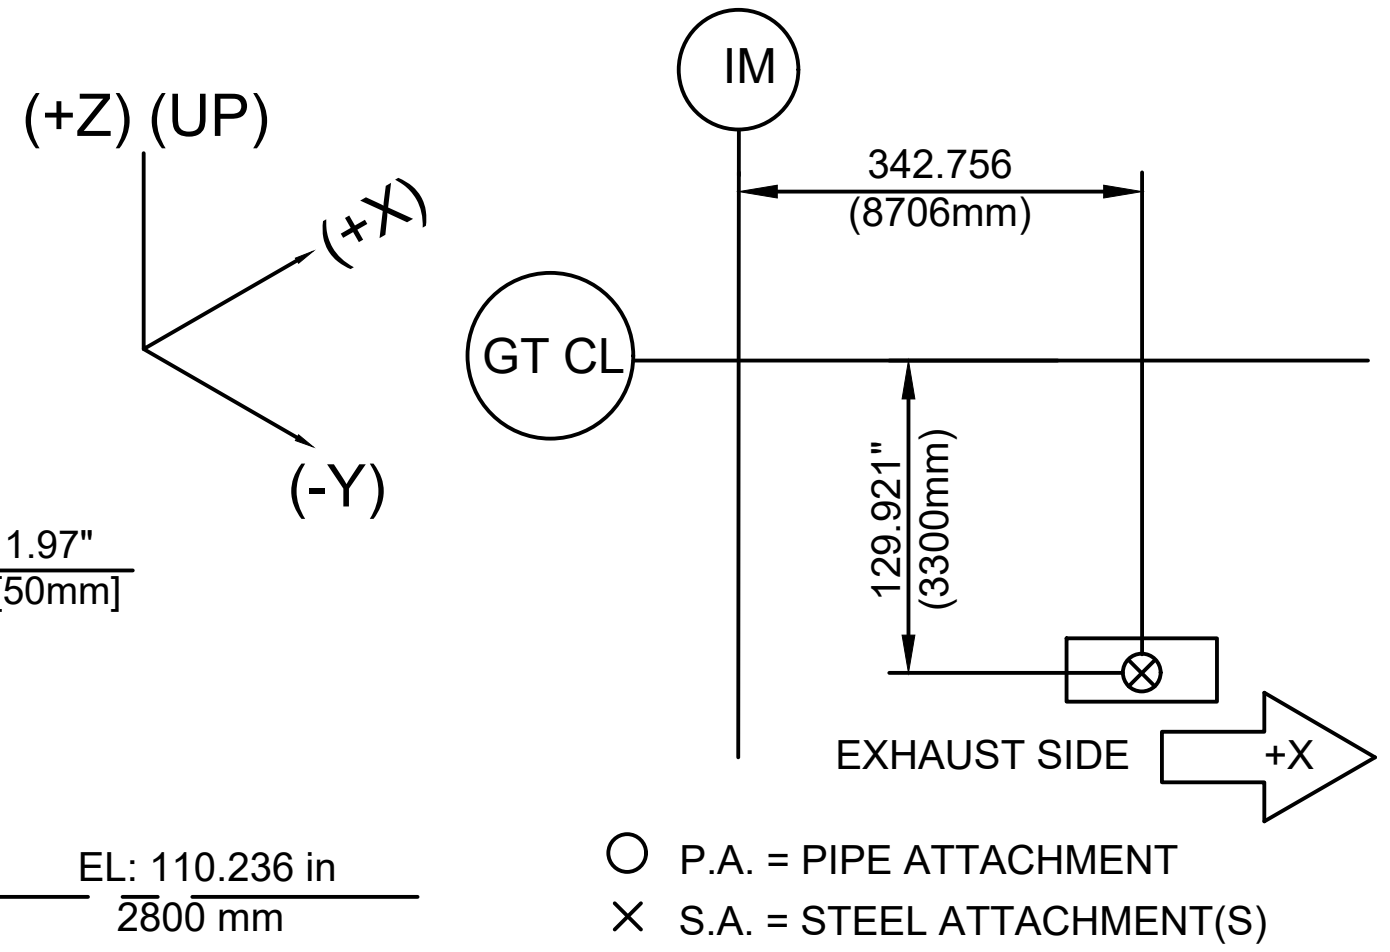
(+Z) (UP)
(+X)
(-Y)
IM
342.756
(8706mm)
GT CL
129.921"
(3300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

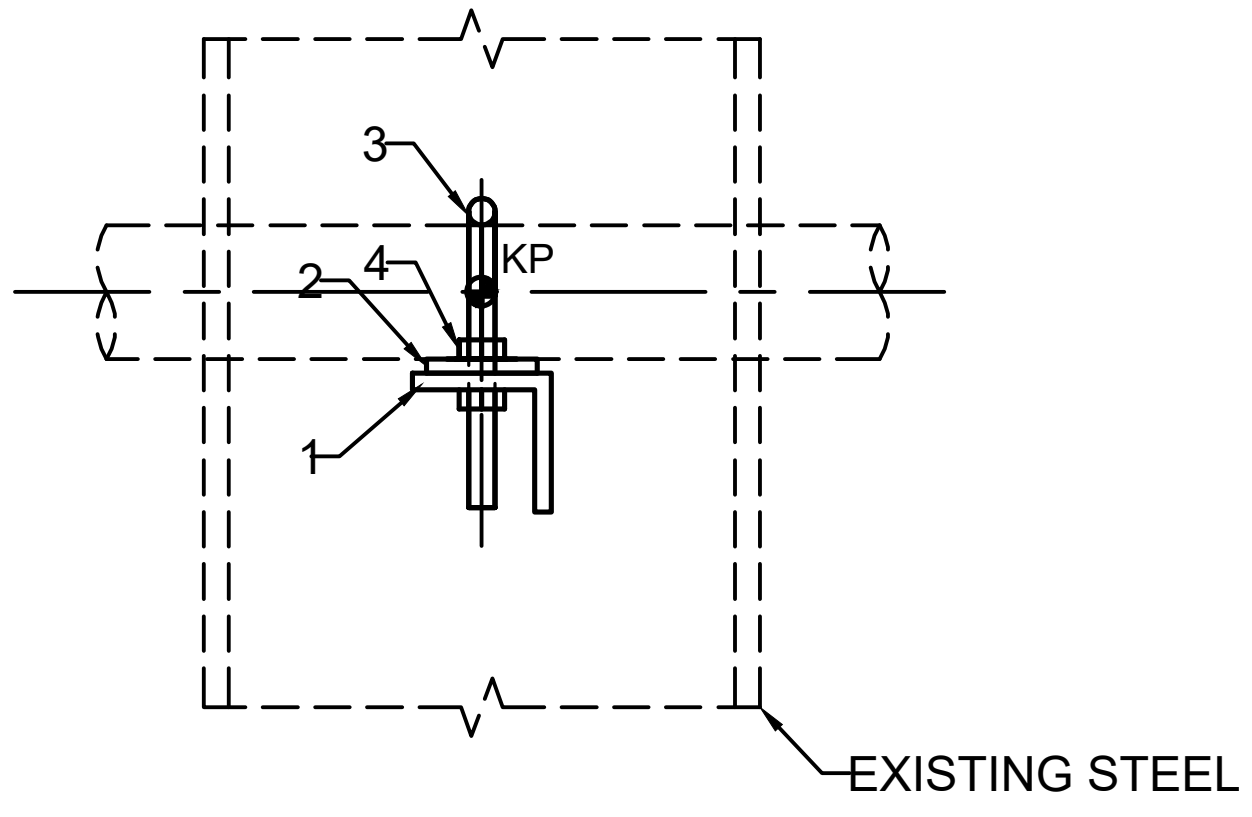
3
4
2
1
KP
EXISTING STEEL

LOOKING FUEL GAS UNIT SIDE
1:5

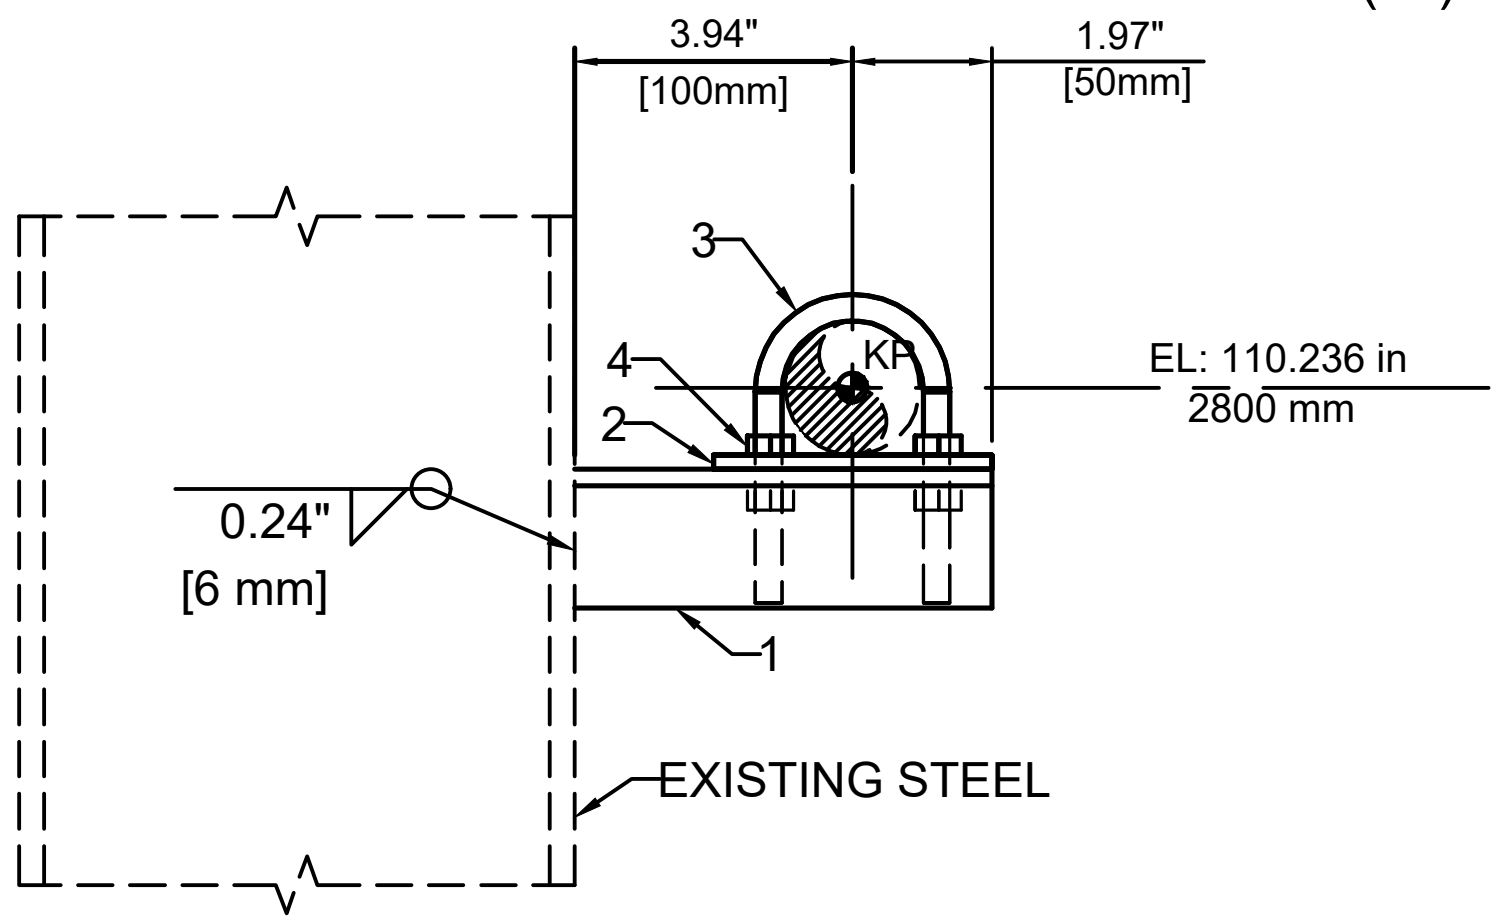
3.94"
[100mm]
1.97"
[50mm]
3
4
2
KP
1
0.24"
[6 mm]
EL: 110.236 in
2800 mm
EXISTING STEEL

LOOKING EXHAUST SIDE
1:5



ISOMETRIC VIEW

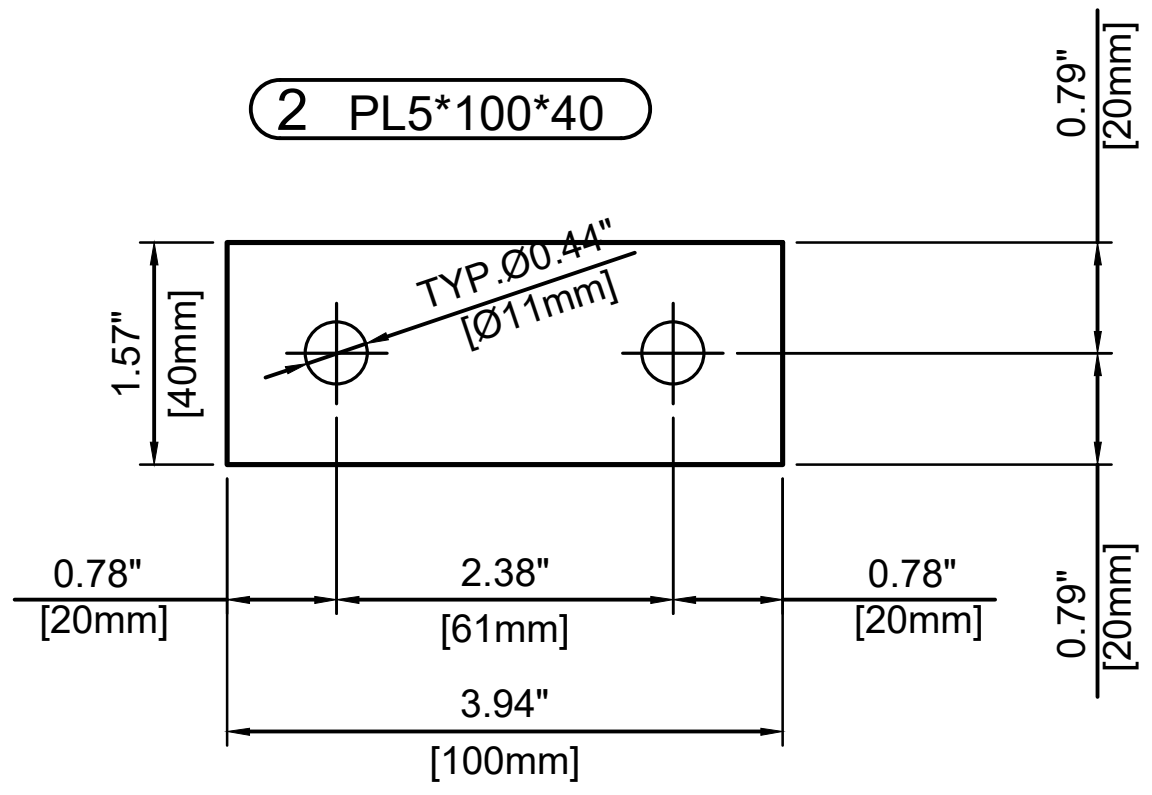
2 PL5*100*40
TYP Ø0.44"
[Ø11mm]
1.57"
[40mm]
0.79"
[20mm]
0.79"
[20mm]
0.78"
[20mm]
2.38"
[61mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

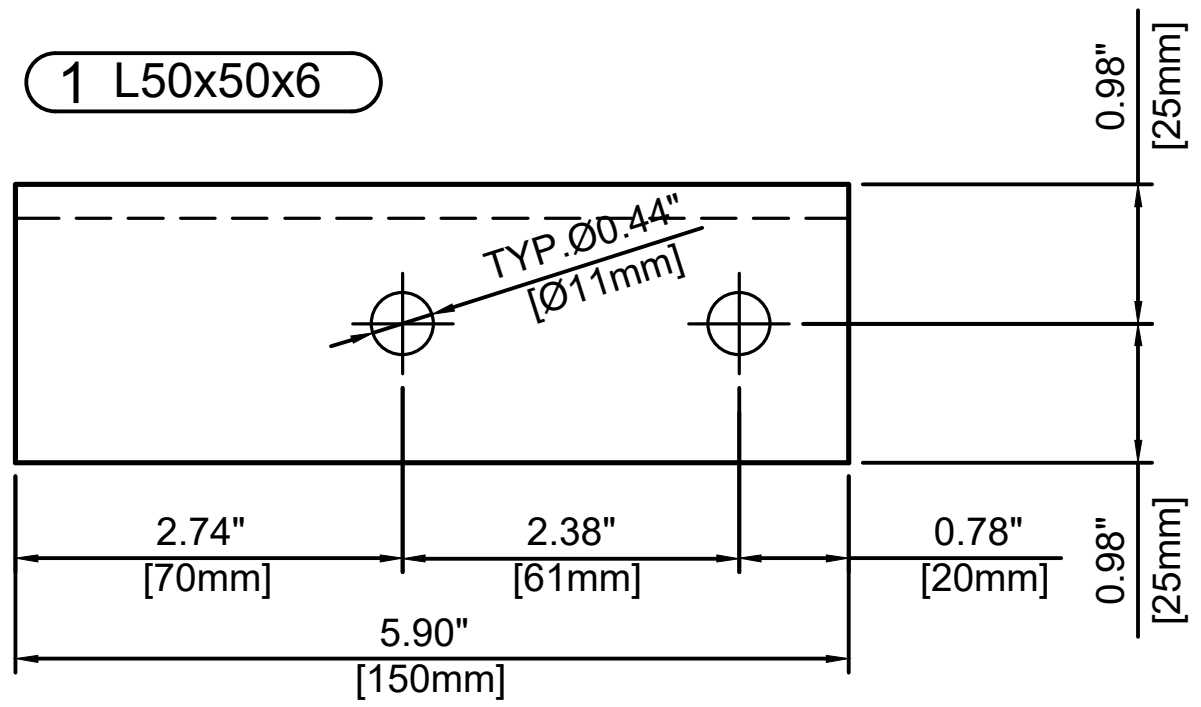
1 L50x50x6
TYP Ø0.44"
[Ø11mm]
0.98"
[25mm]
0.98"
[25mm]
2.74"
[70mm]
2.38"
[61mm]
0.78"
[20mm]
5.90"
[150mm]

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			5.91	150	1	1.46	0.66	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
GRAND TOTAL								2.27	1.03	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-30

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR123

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

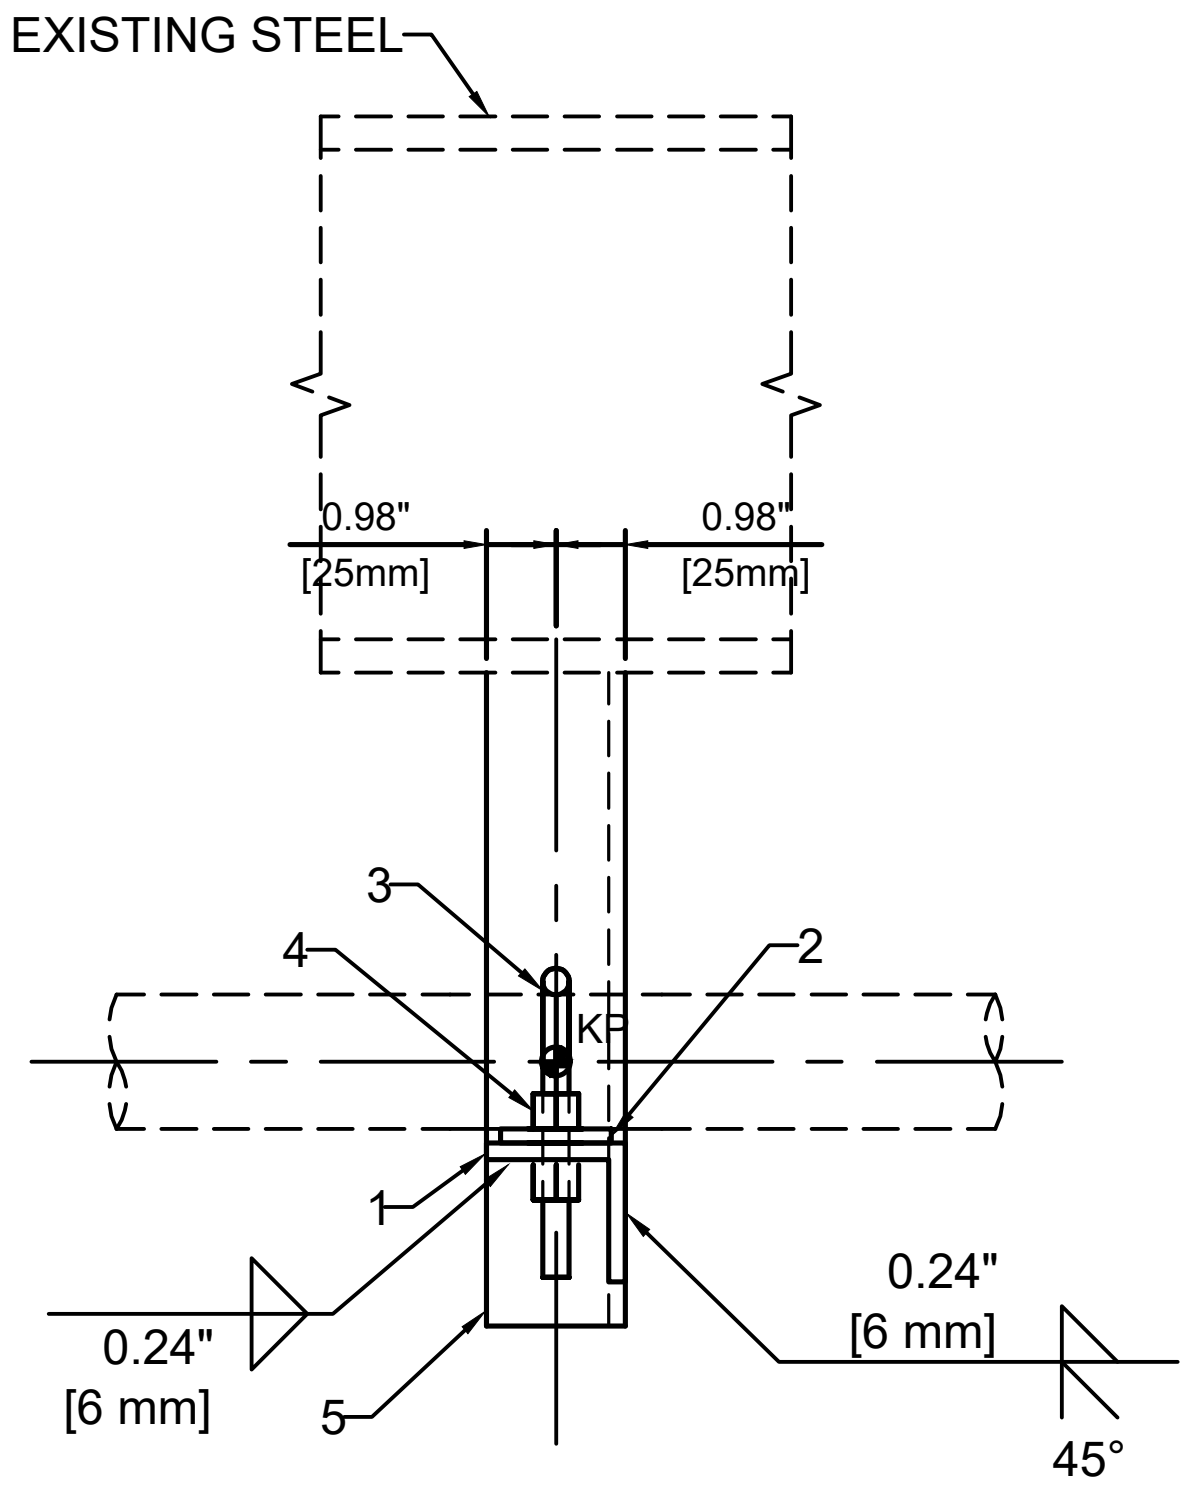

EXISTING STEEL
0.98"
[25mm]
0.98"
[25mm]
3
4
2
KP
1
0.24"
[6 mm]
5
0.24"
[6 mm]
45°

LOOKING FUEL GAS UNIT SIDE
1:5

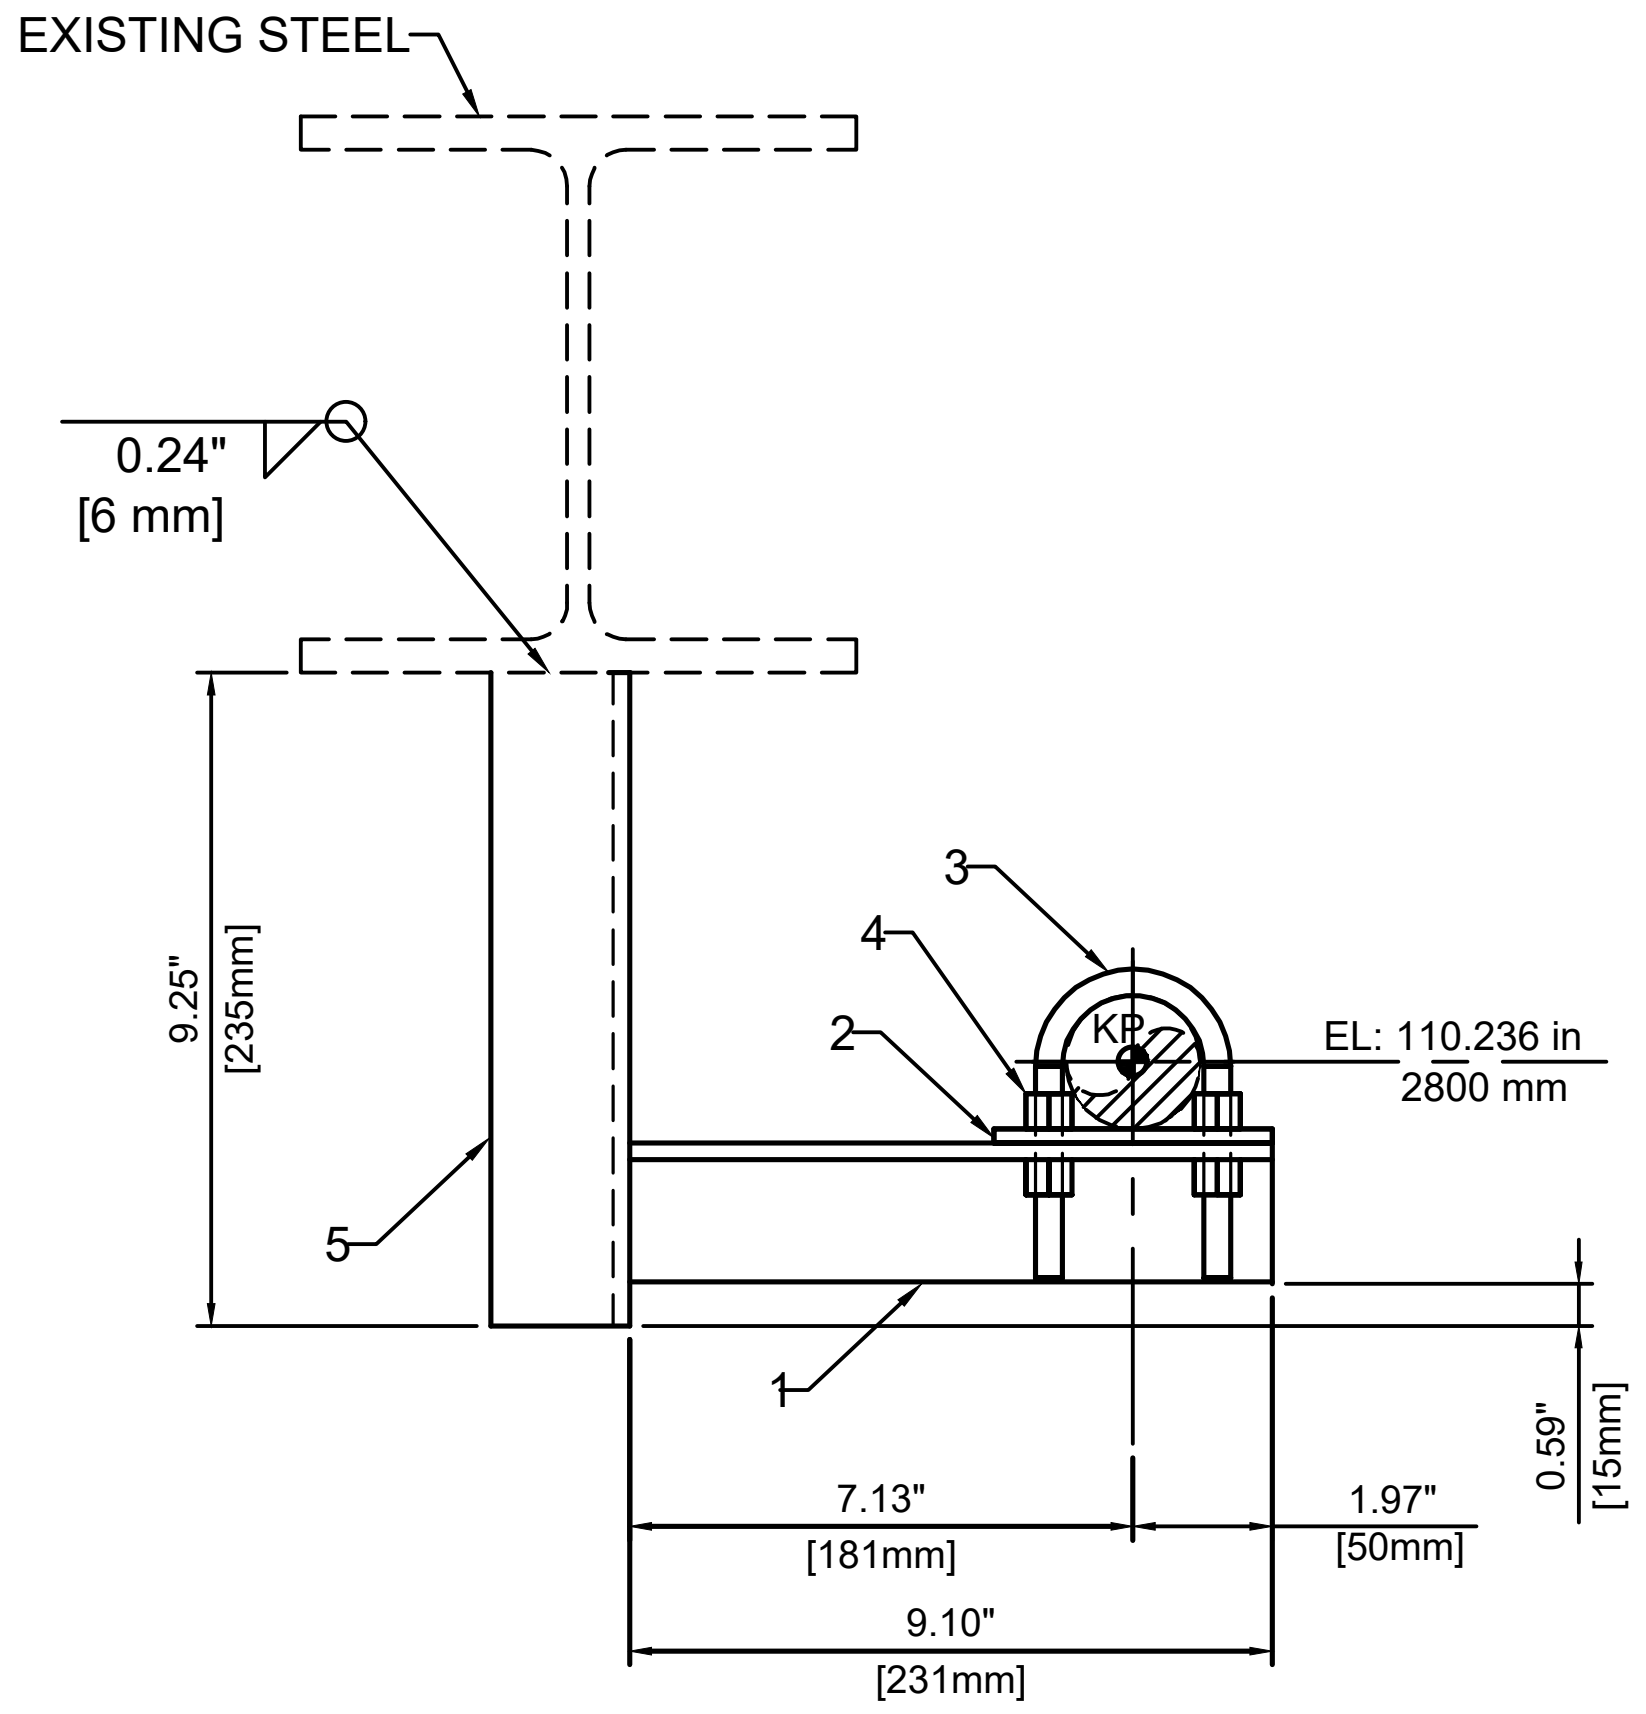

EXISTING STEEL
0.24"
[6 mm]
9.25"
[235mm]
3
4
2
KP
EL: 110.236 in
2800 mm
5
1
0.59"
[15mm]
7.13"
[181mm]
1.97"
[50mm]
9.10"
[231mm]

LOOKING EXHAUST SIDE
1:5

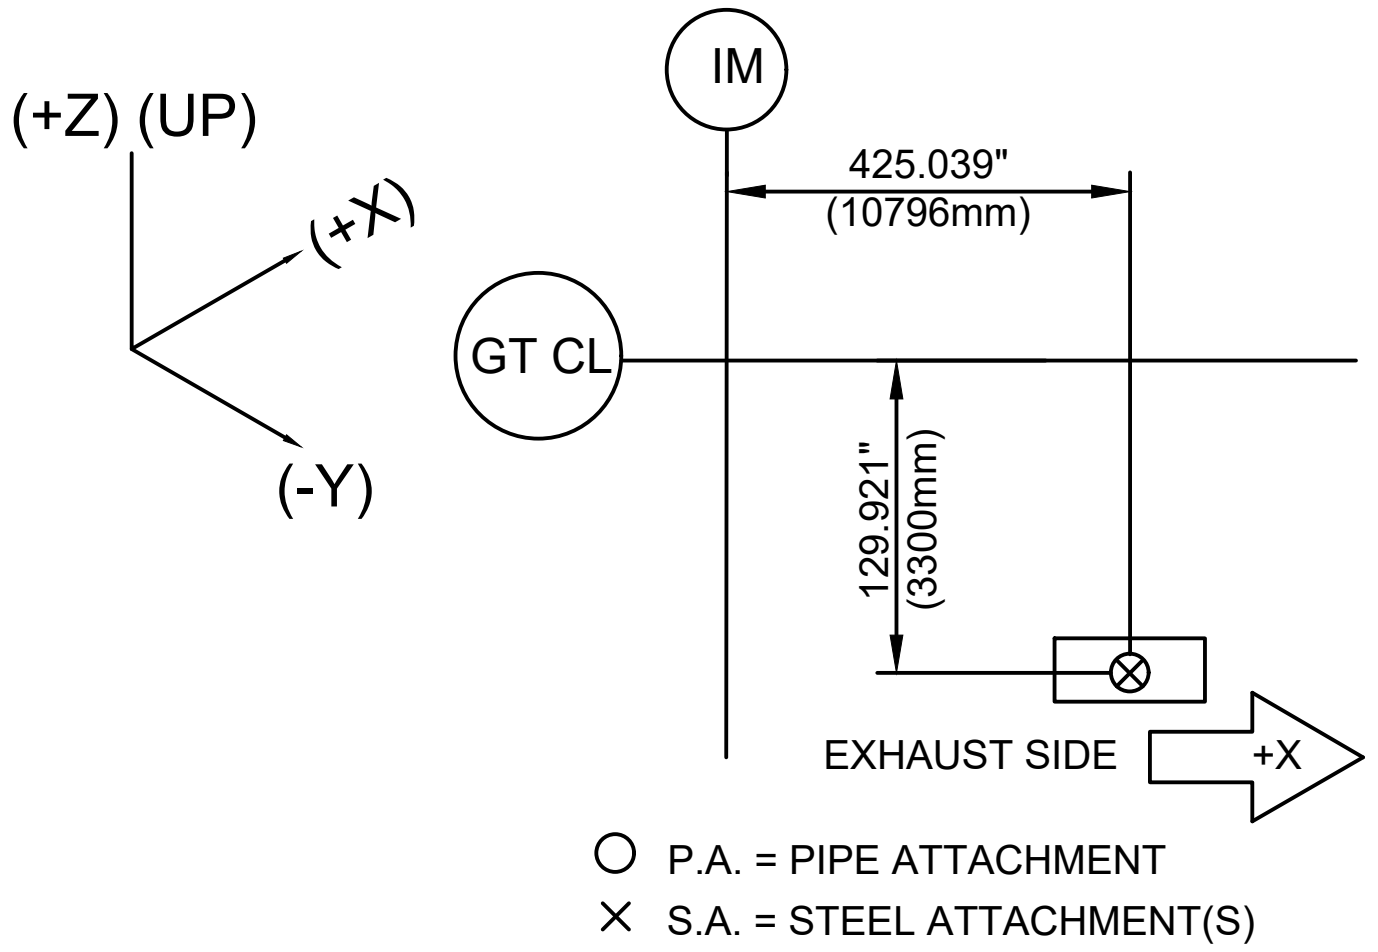

(+Z) (UP)
(+X)
(-Y)
IM
GT CL
425.039"
(10796mm)
129.921"
(3300mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

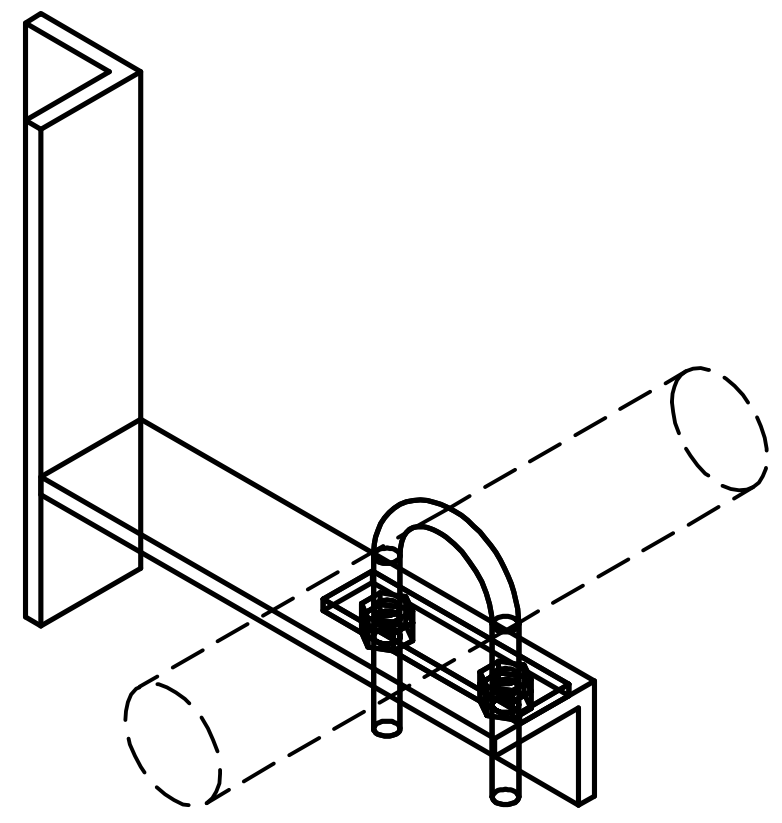

ISOMETRIC VIEW

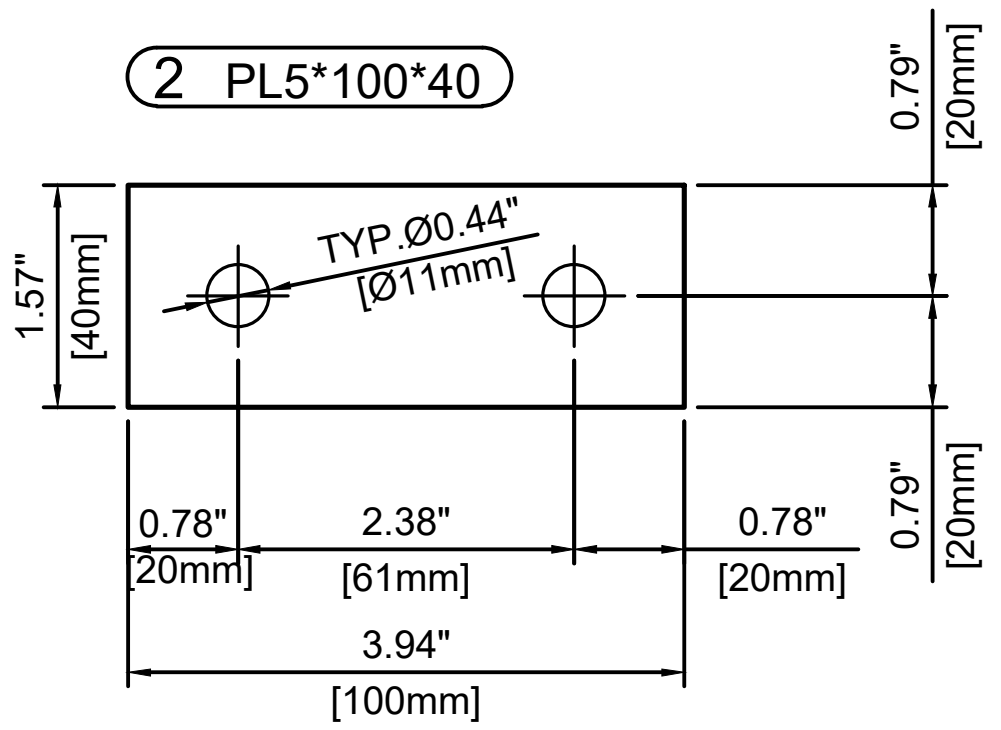

2 PL5*100*40
TYP.Ø0.44"
[Ø11mm]
1.57"
[40mm]
0.79"
[20mm]
0.79"
[20mm]
0.78"
[20mm]
2.38"
[61mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

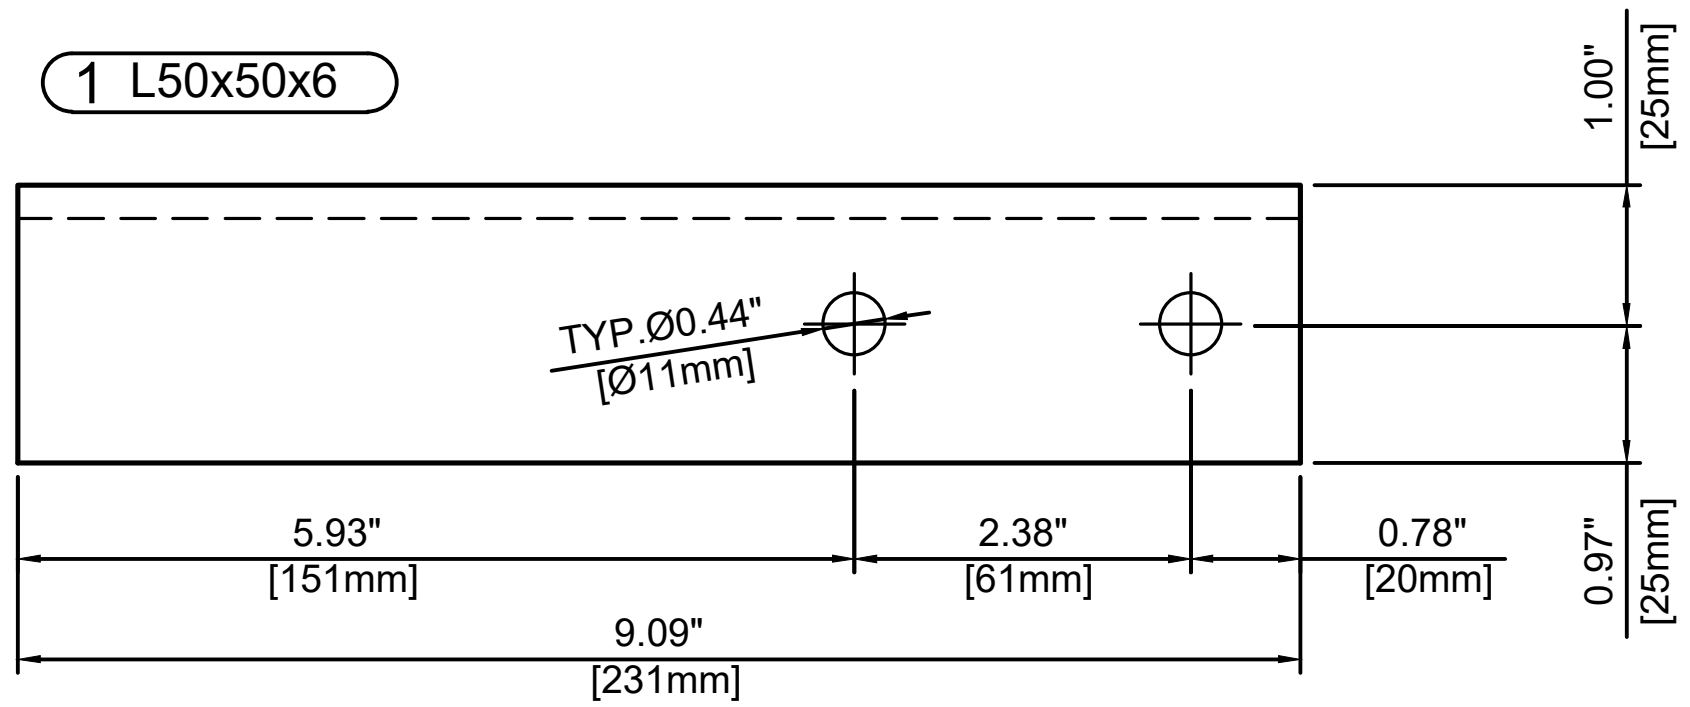

1 L50x50x6
TYP.Ø0.44"
[Ø11mm]
1.00"
[25mm]
0.97"
[25mm]
5.93"
[151mm]
2.38"
[61mm]
0.78"
[20mm]
9.09"
[231mm]

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			9.09	231	1	2.26	1.02	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
5	L50x50x6	JIS G 3192			9.25	235	1	2.30	1.04	SS400
							GRAND TOTAL	5.36	2.43	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT:	MITSUBISHI POWER ENGINEERING
SECTION:	PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-31

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR660

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

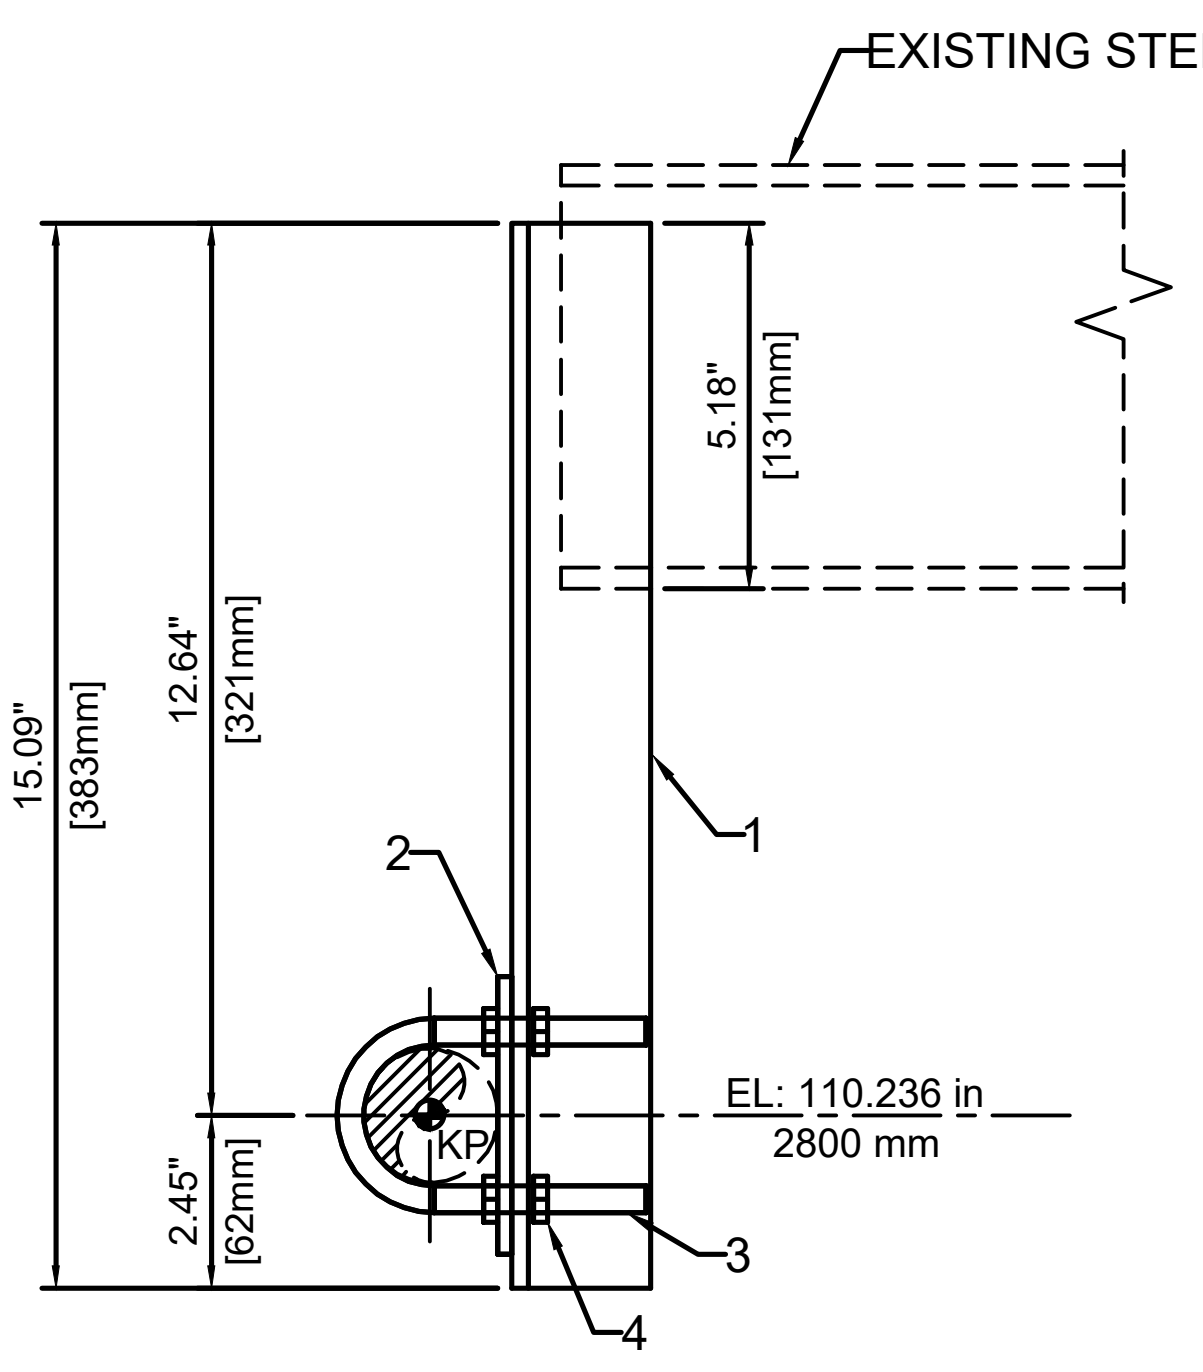
EXISTING STEEL
5.18"
[131mm]
15.09"
[383mm]
12.64"
[321mm]
2.45"
[62mm]
1
2
3
4
KP
EL: 110.236 in
2800 mm

LOOKING INLET MANIFOLD SIDE
1:5

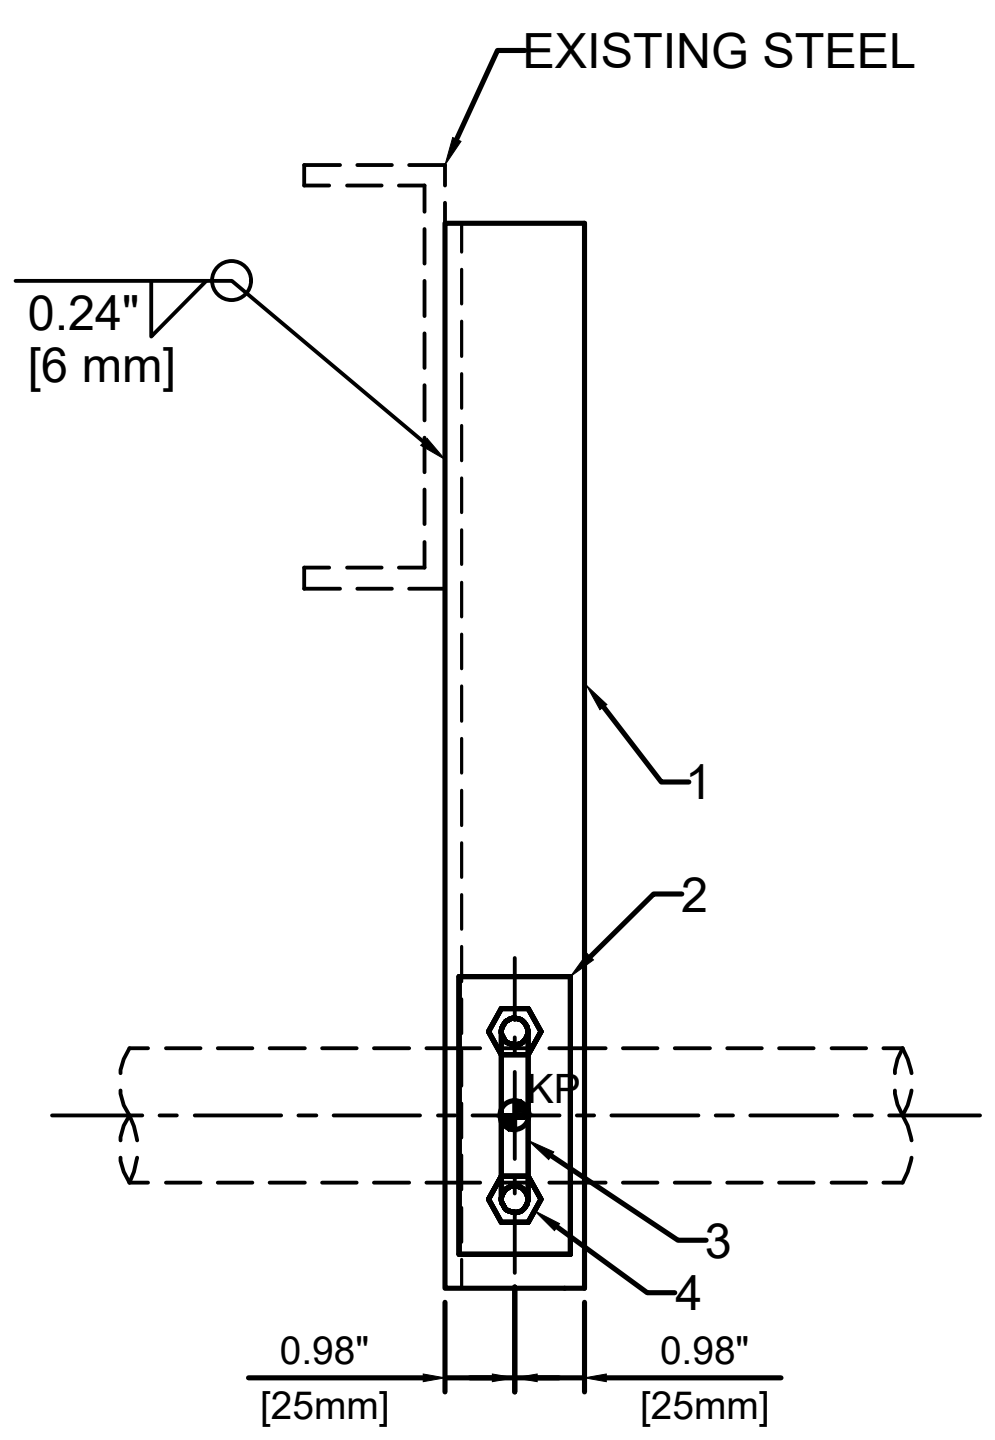
EXISTING STEEL
0.24"
[6 mm]
1
2
3
4
KP
0.98"
[25mm]
0.98"
[25mm]

LOOKING FUEL GAS UNIT SIDE
1:5



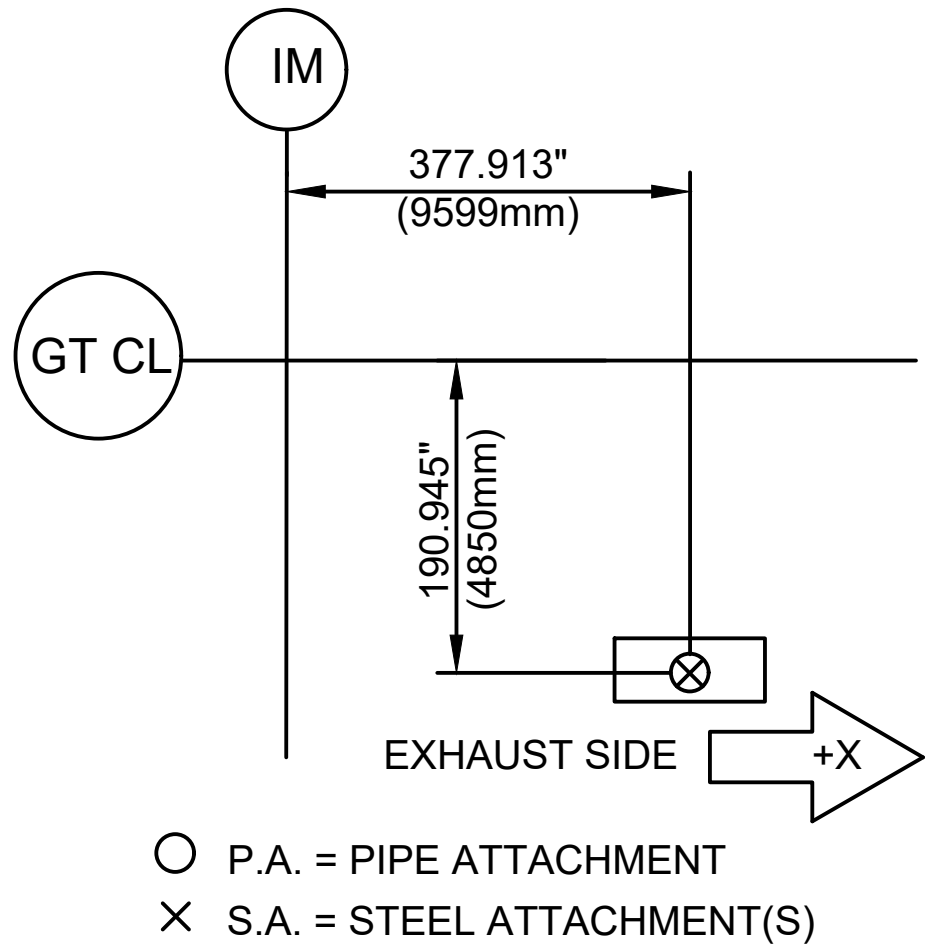
IM
GT CL
377.913"
(9599mm)
190.945"
(4850mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

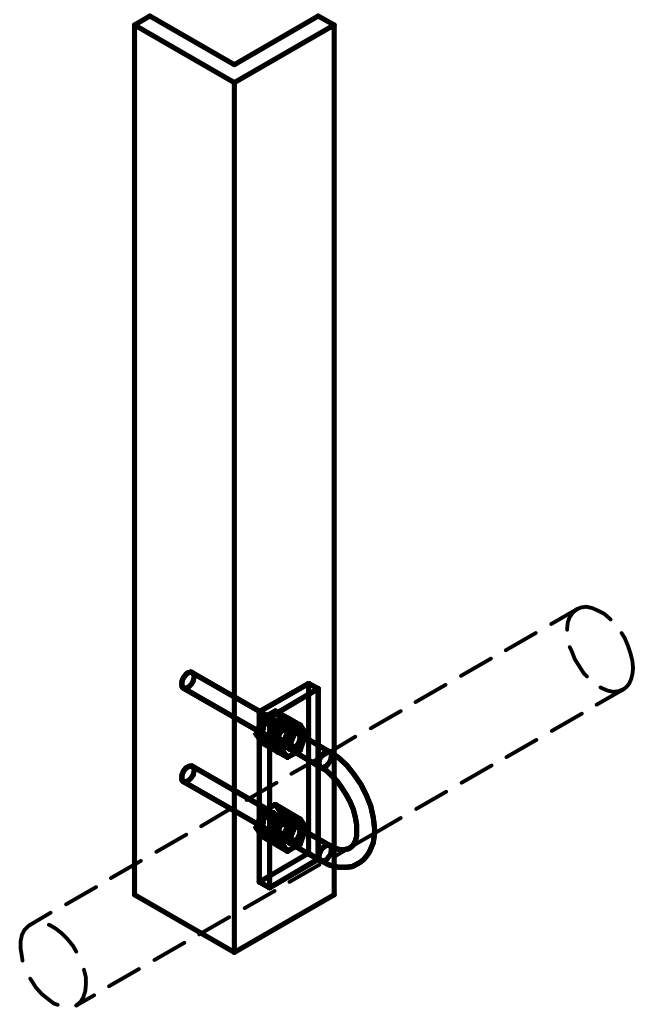

ISOMETRIC VIEW

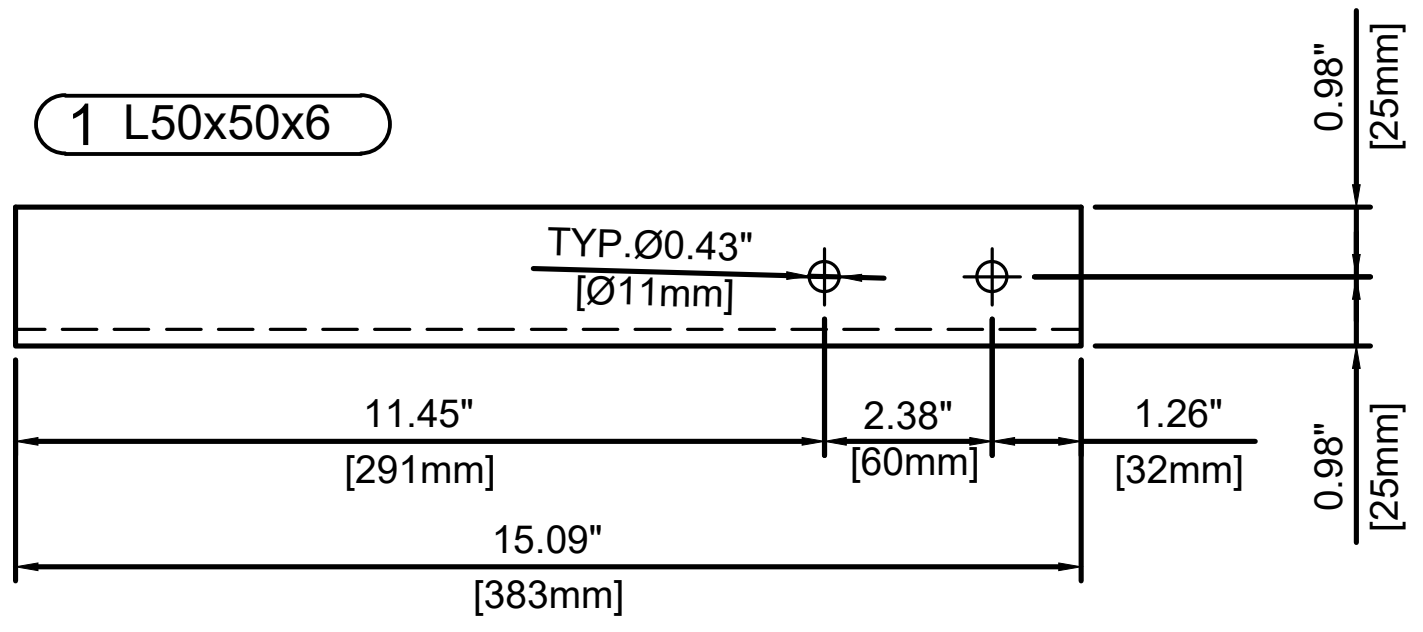
1 L50x50x6
TYP.Ø0.43"
[Ø11mm]
11.45"
[291mm]
2.38"
[60mm]
1.26"
[32mm]
15.09"
[383mm]
0.98"
[25mm]
0.98"
[25mm]

1:5

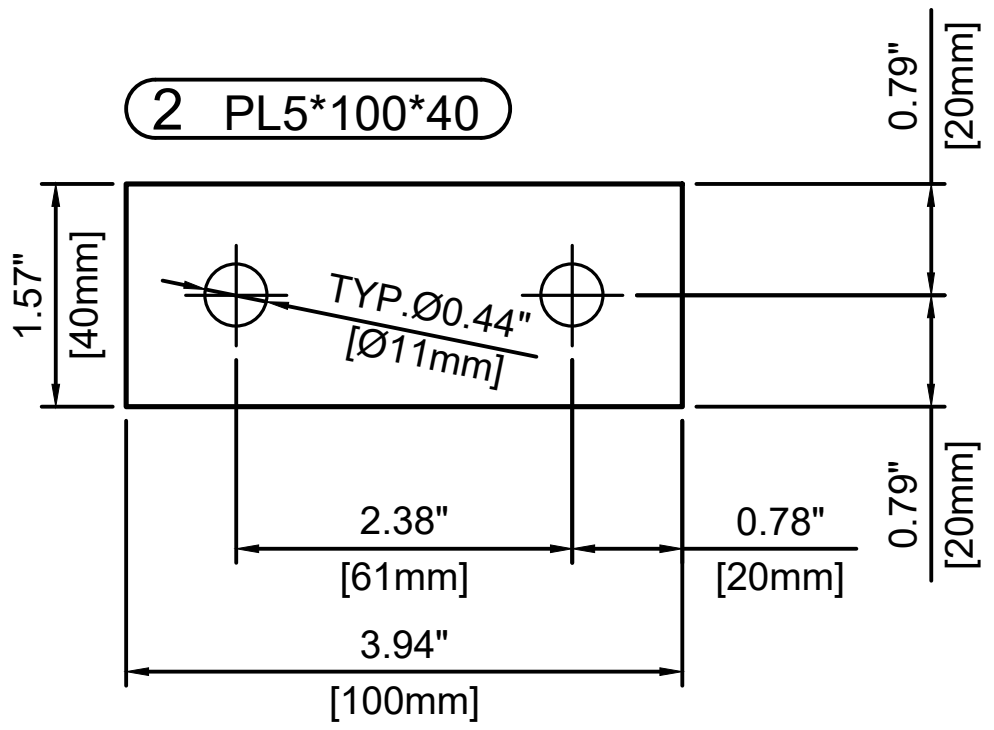
2 PL5*100*40
TYP.Ø0.44"
[Ø11mm]
1.57"
[40mm]
2.38"
[61mm]
0.78"
[20mm]
3.94"
[100mm]
0.79"
[20mm]
0.79"
[20mm]

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50X50X6	JIS G 3192			15.08	383	1	3.74	1.70	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.13	0.06	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
							GRAND TOTAL	4.31	1.95	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-73

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR122

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

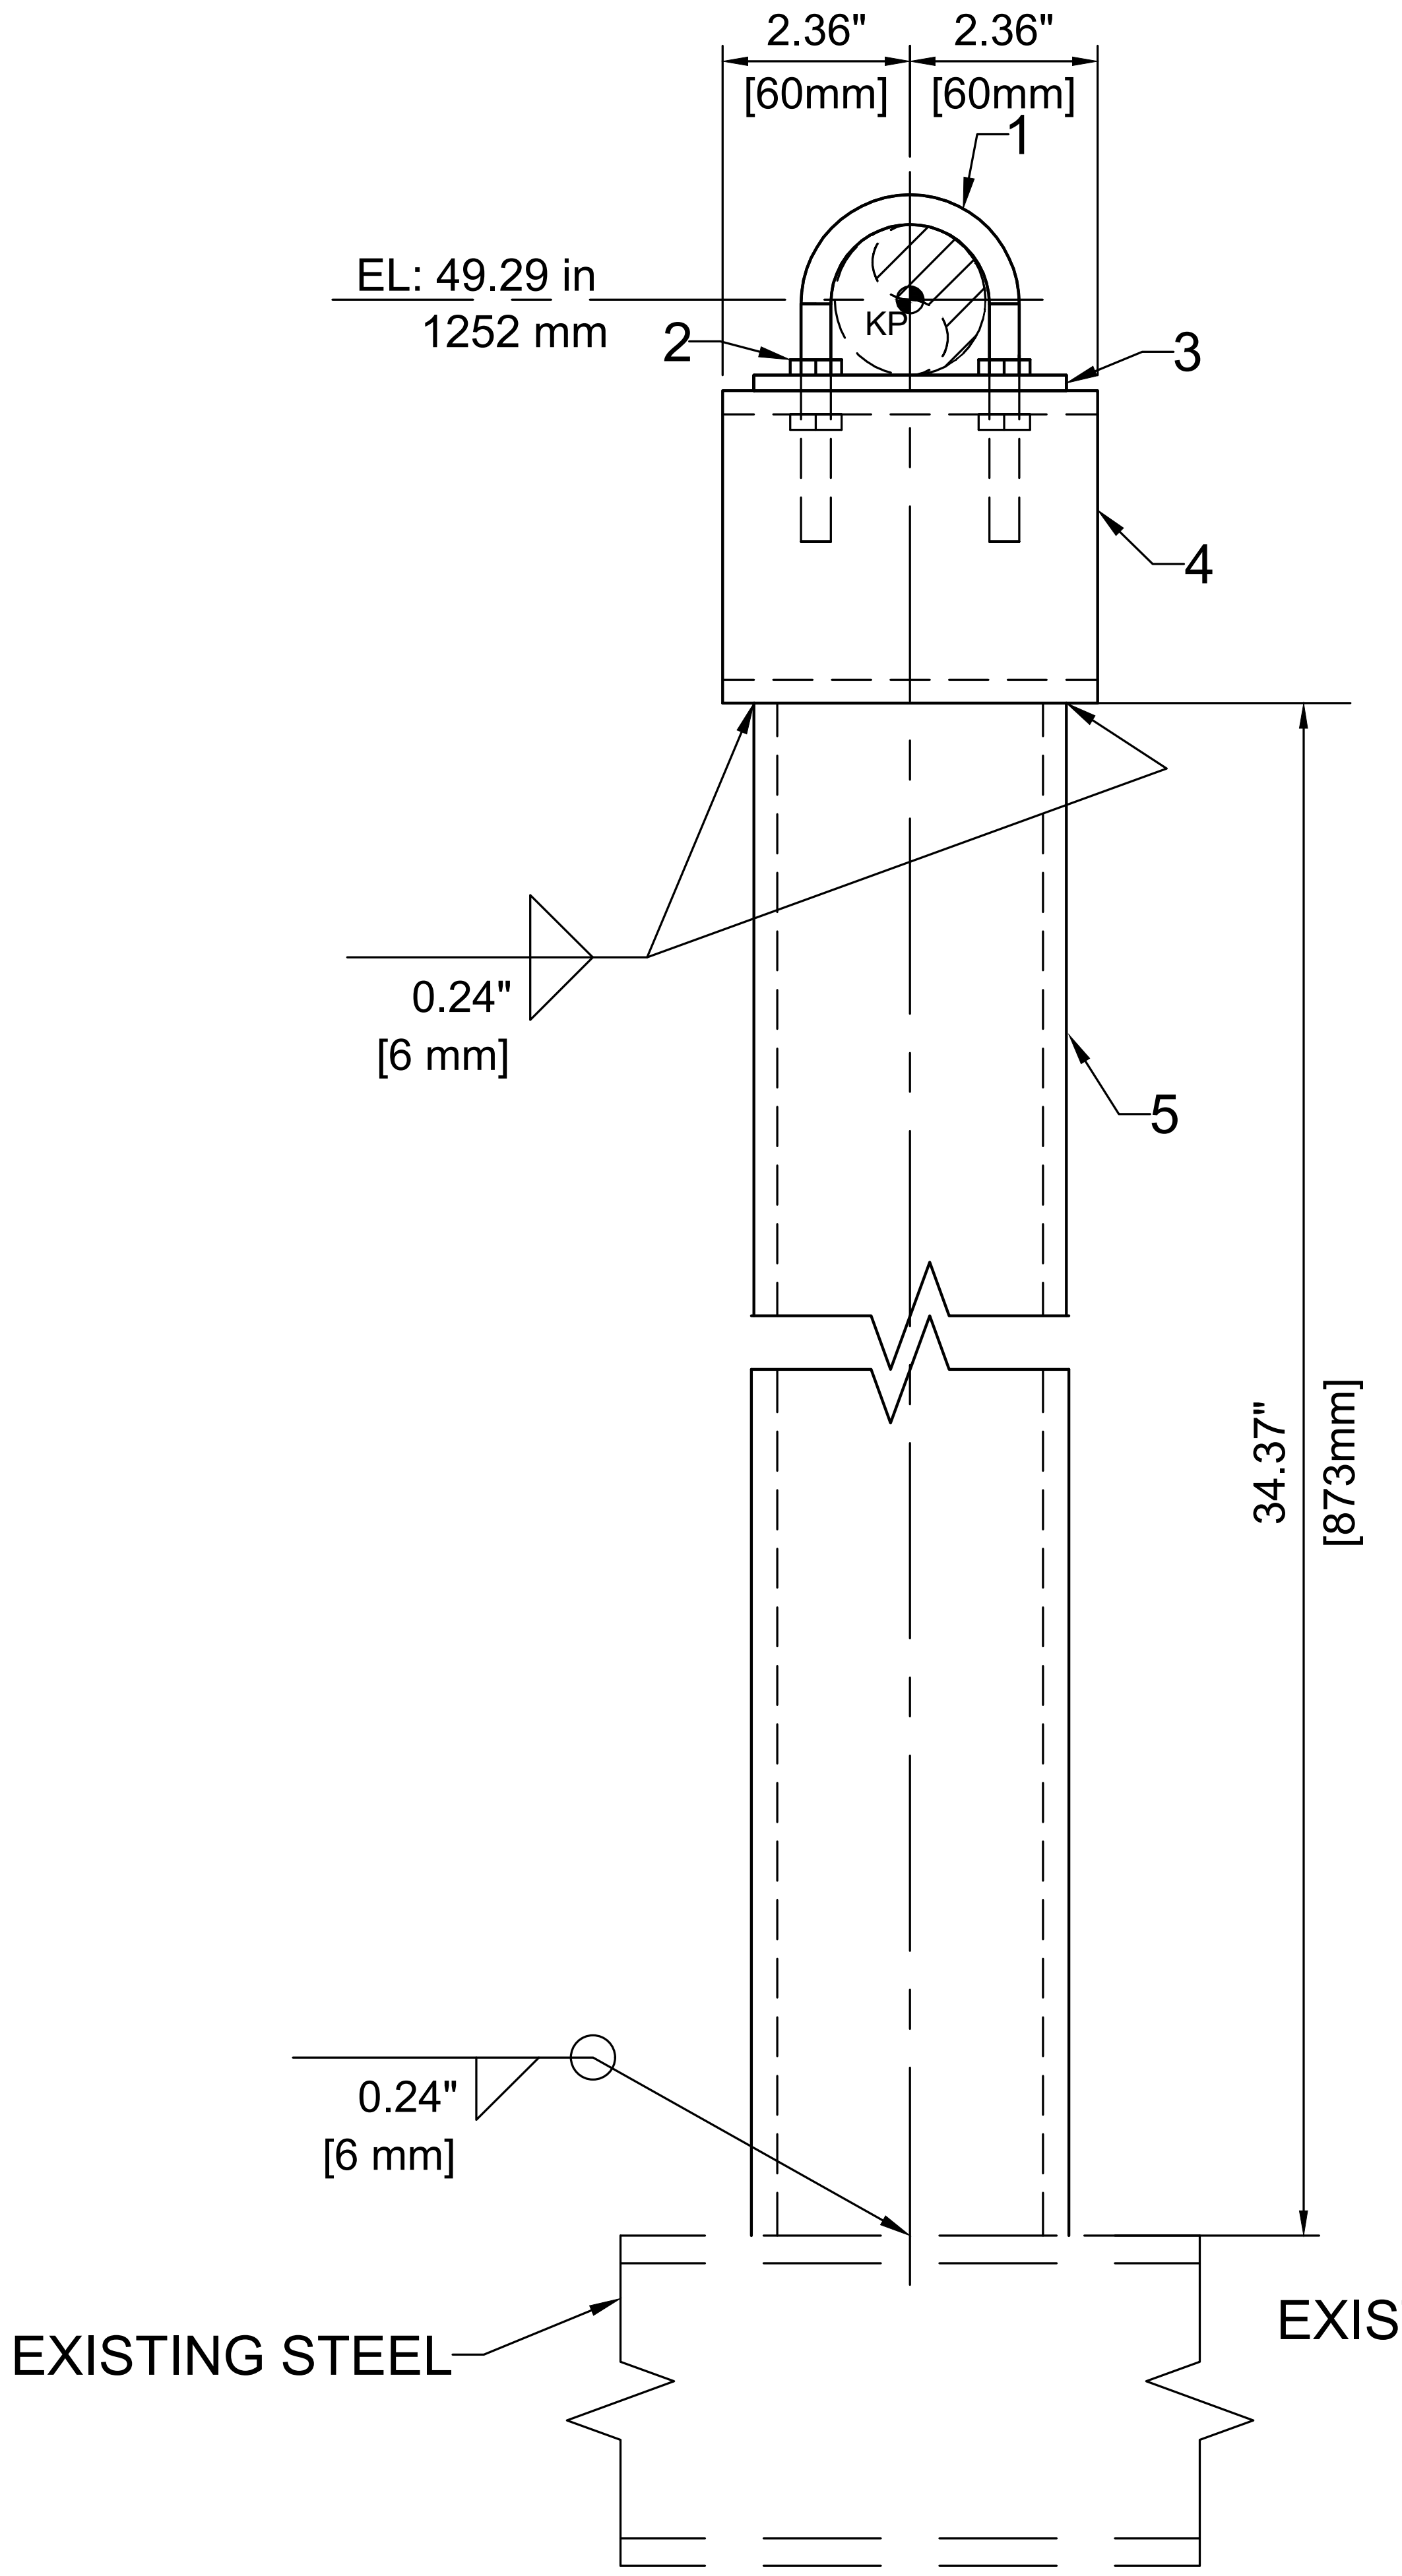

2.36"
[60mm]
2.36"
[60mm]
1
EL: 49.29 in
1252 mm
2
3
KP
4
0.24"
[6 mm]
5
34.37"
[873mm]
0.24"
[6 mm]
EXISTING STEEL

LOOKING EXHAUST SIDE
1:5

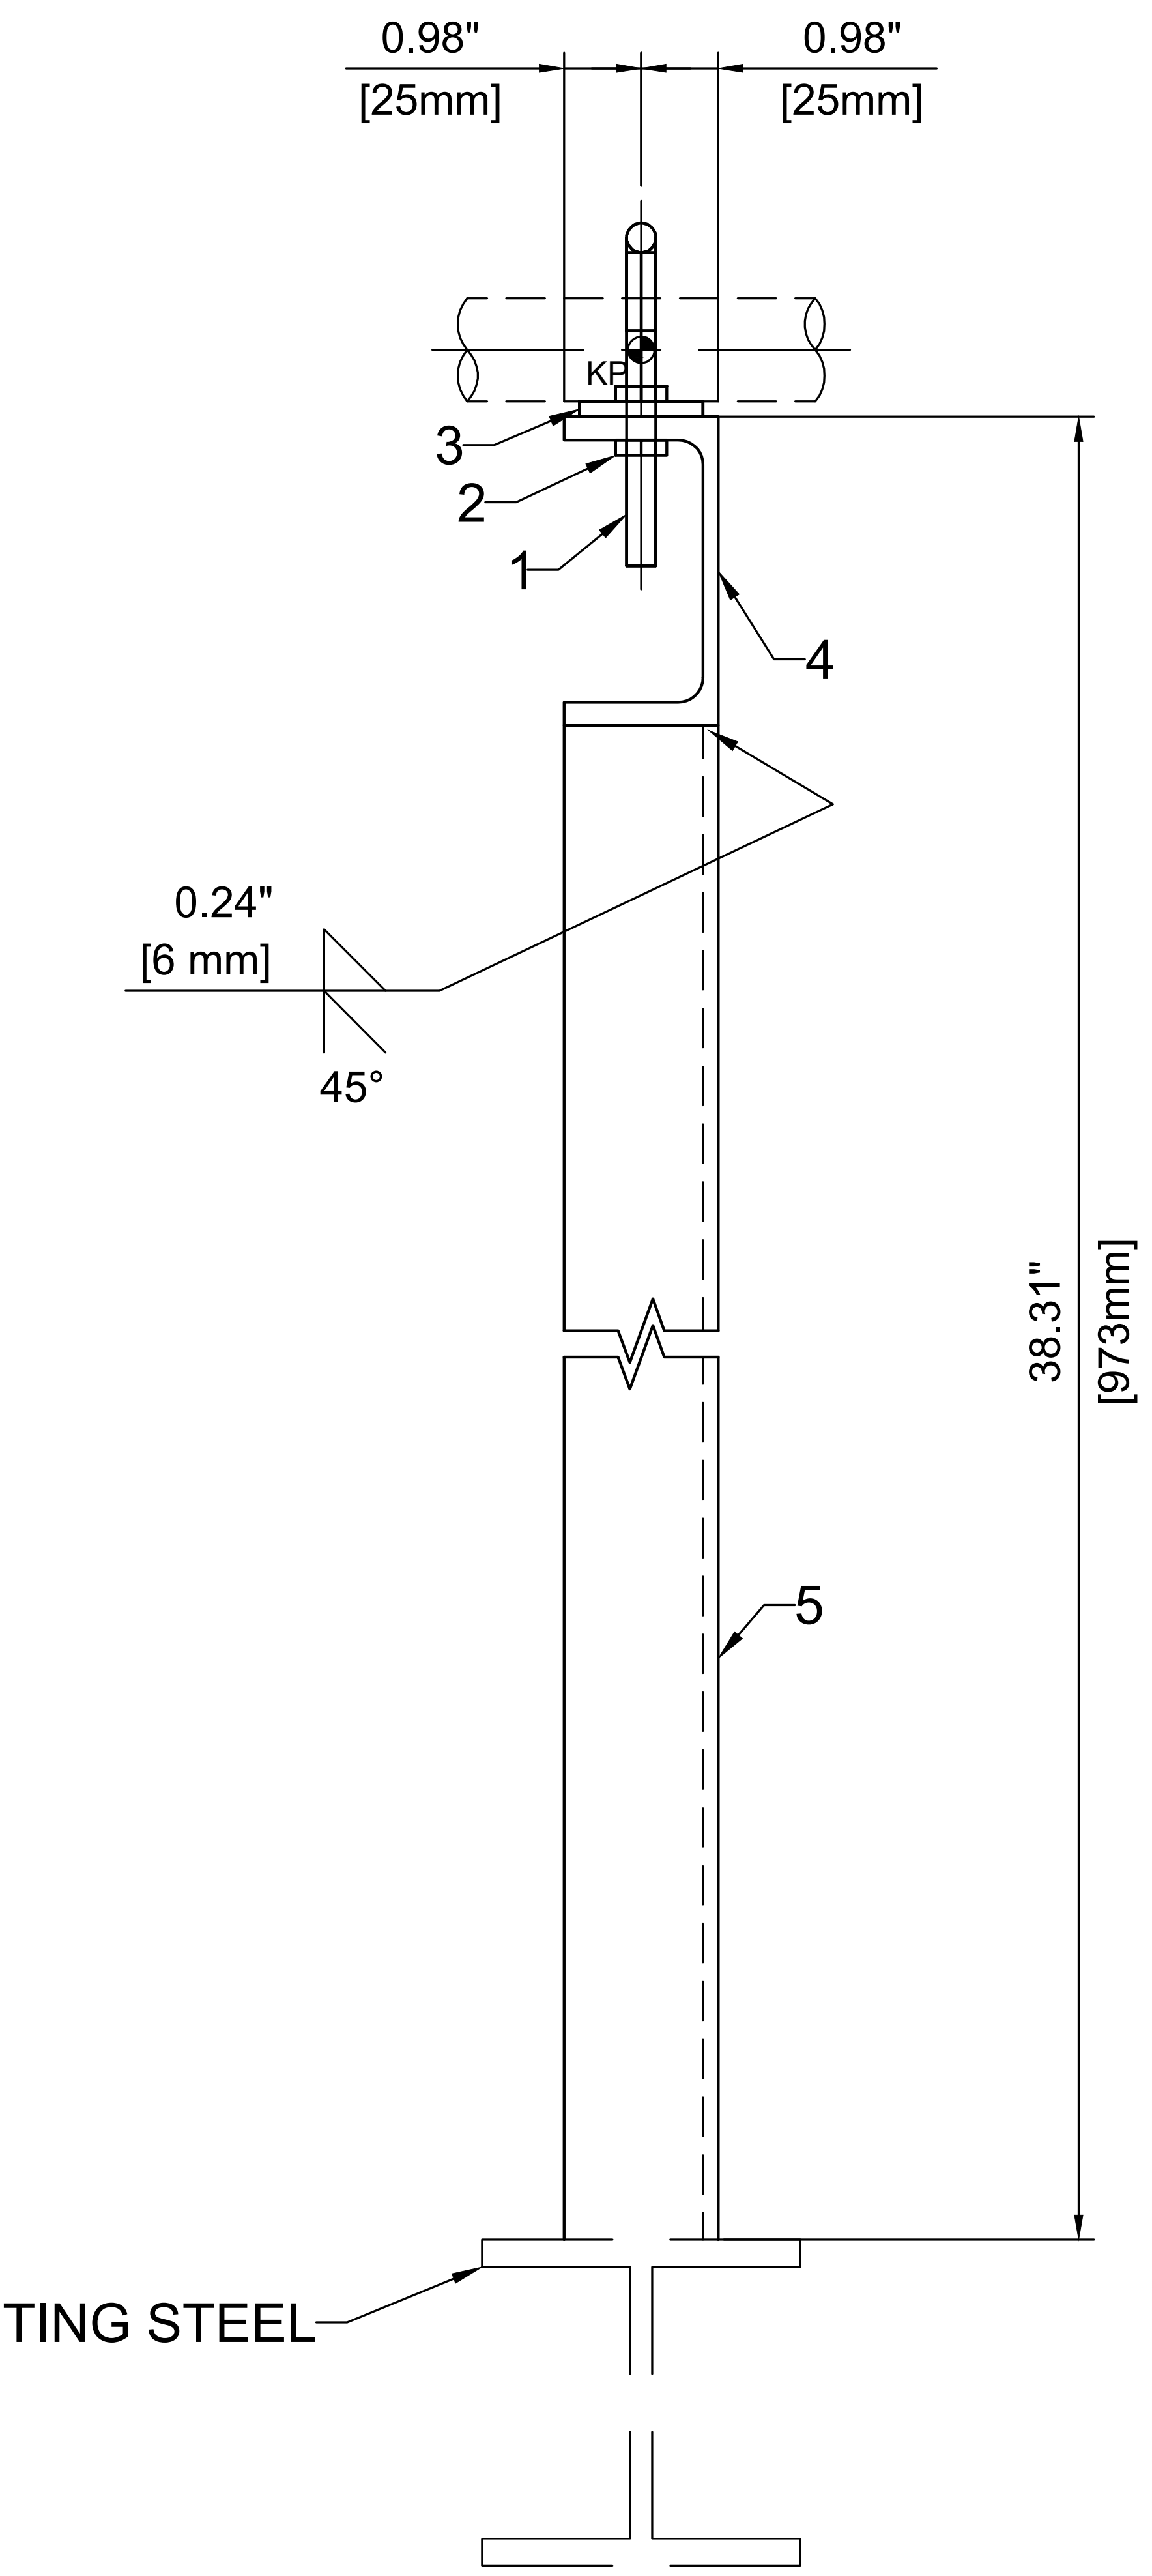

0.98"
[25mm]
0.98"
[25mm]
KP
3
2
1
4
0.24"
[6 mm]
45°
5
38.31"
[973mm]
EXISTING STEEL

LOOKING LUBE OIL UNIT SIDE
1:5

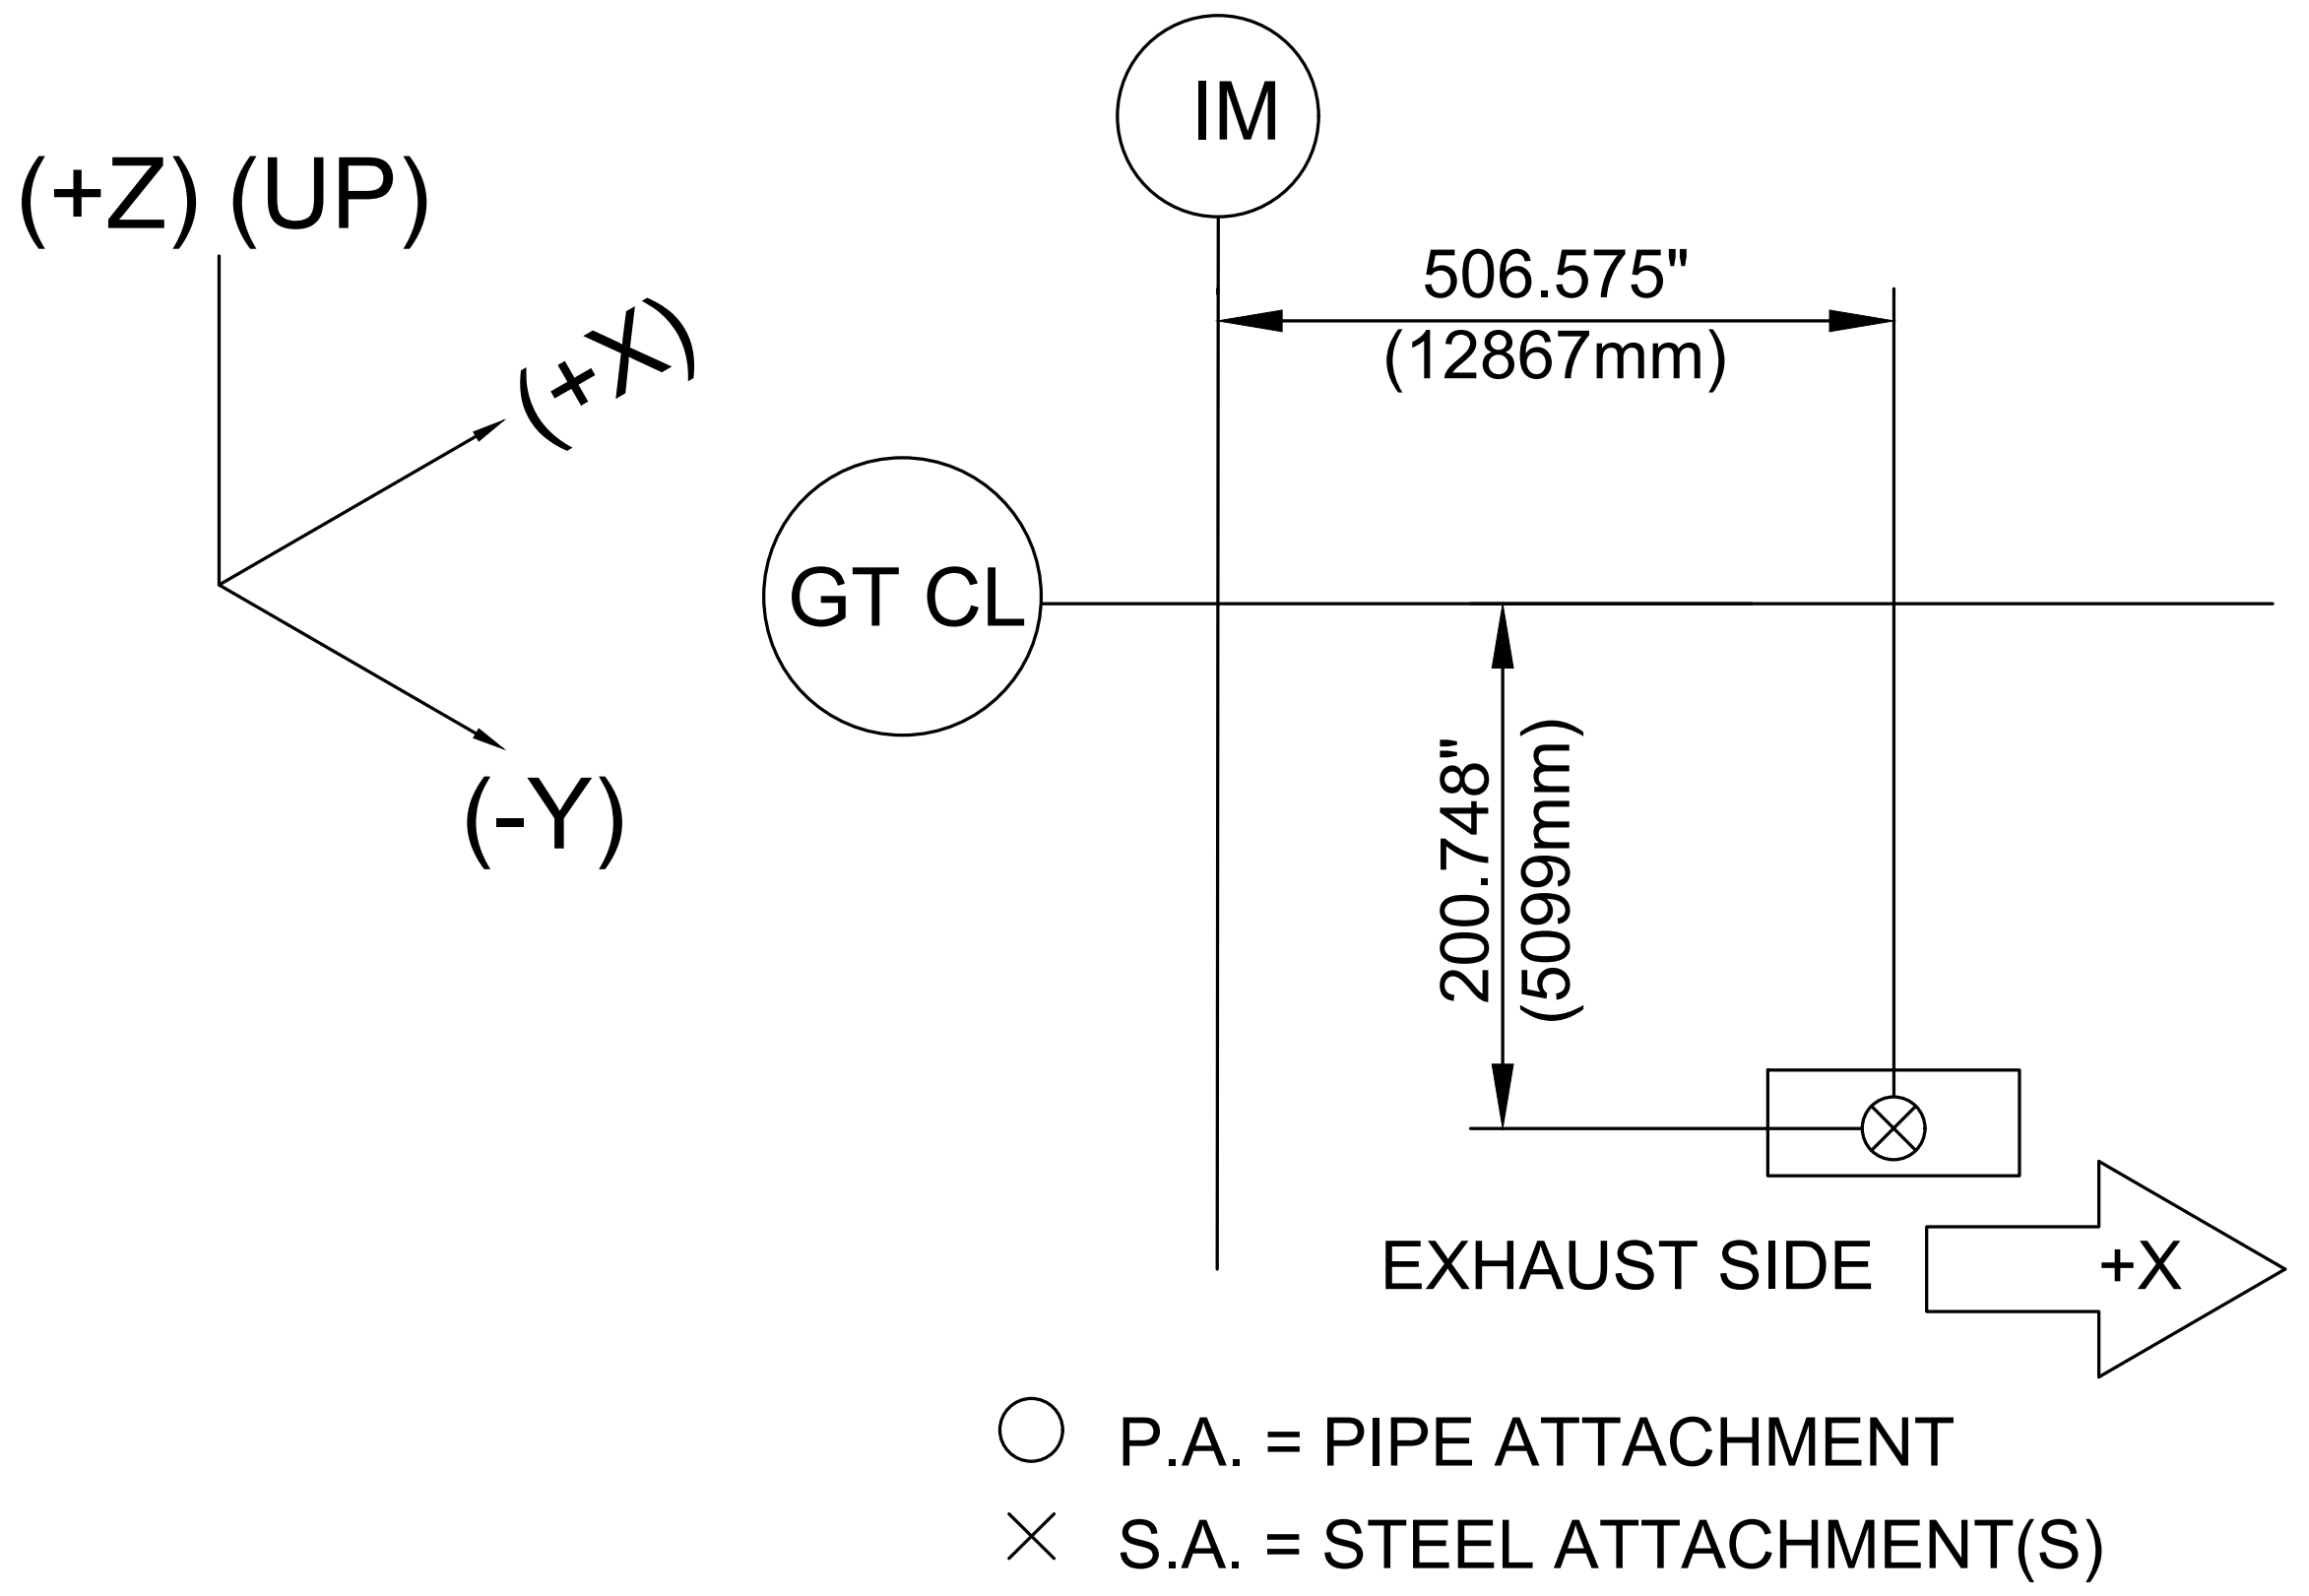

(+Z) (UP)
(+X)
(-Y)
IM
GT CL
506.575"
(12867mm)
200.748"
(5099mm)
EXHAUST SIDE
+X
○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

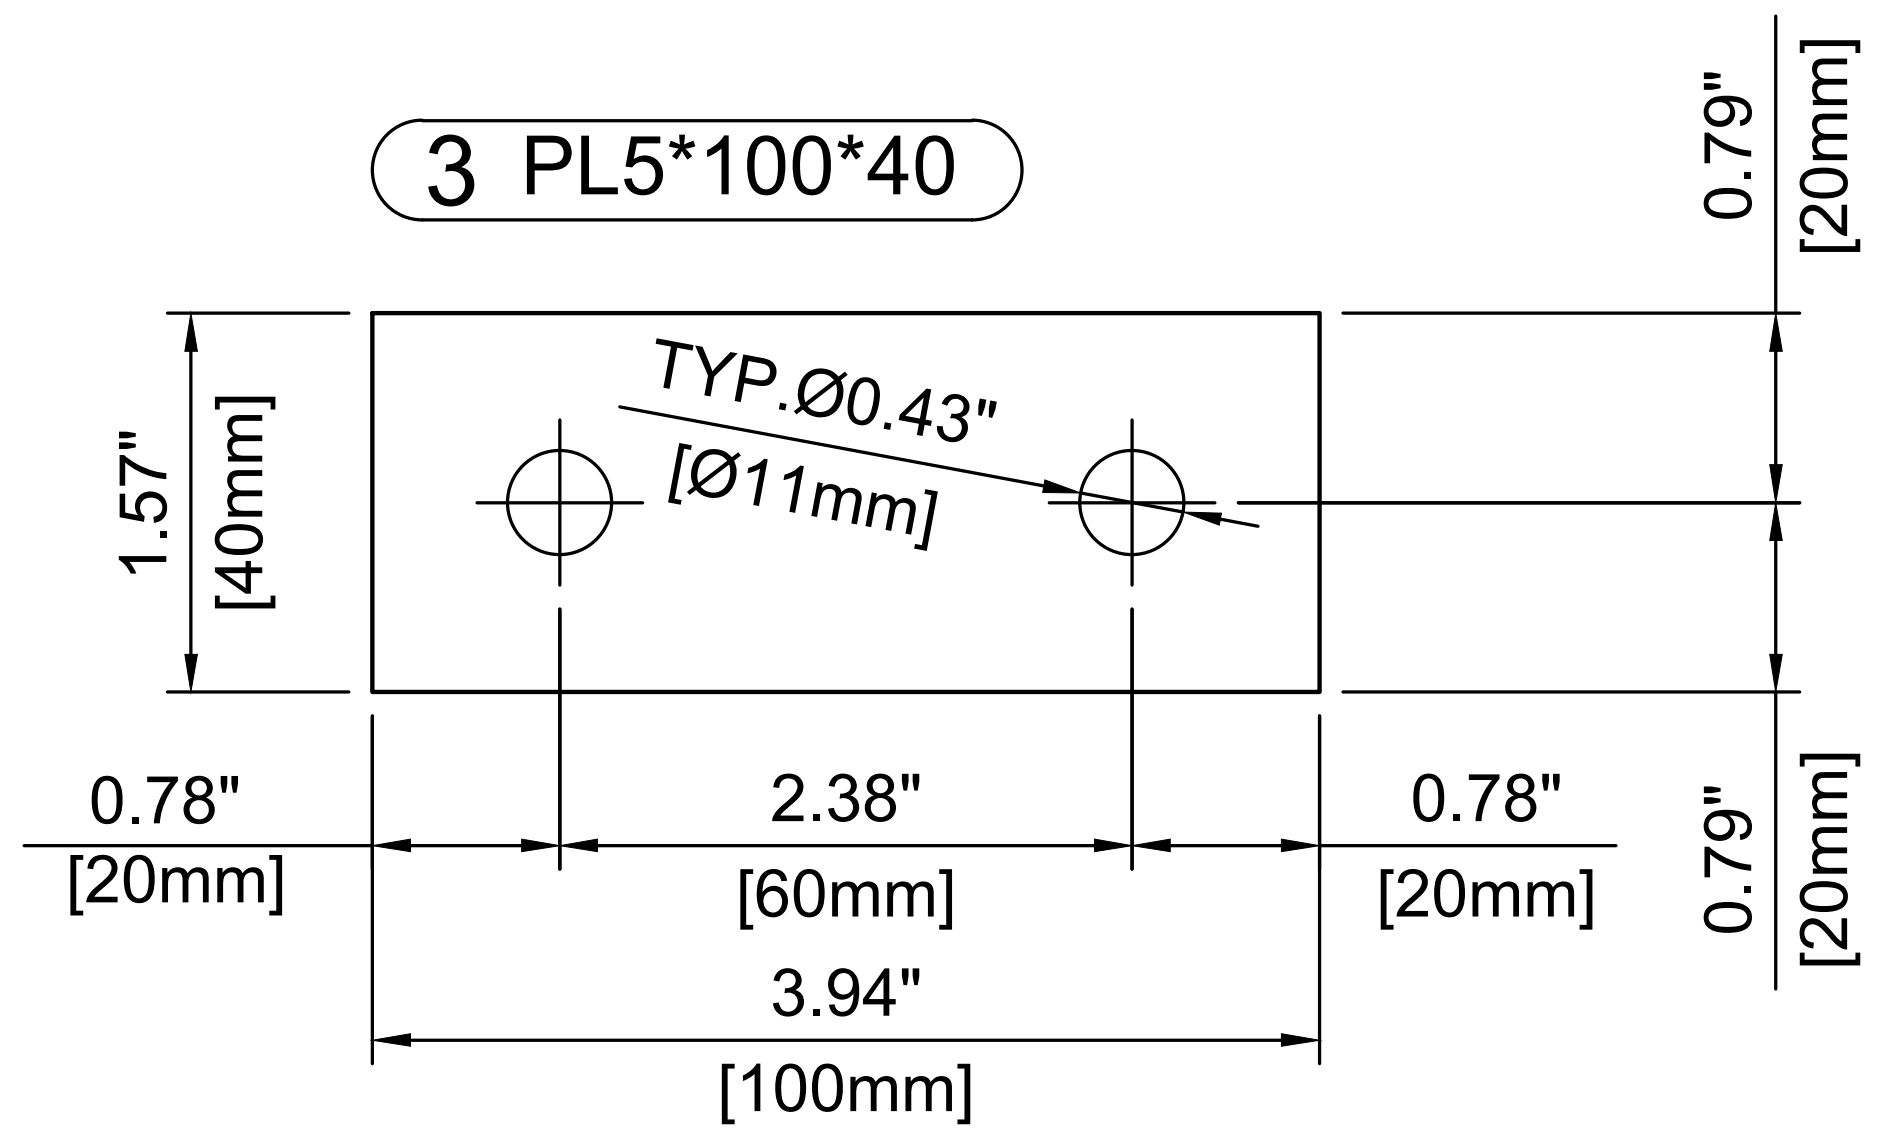

3 PL5*100*40
TYP.Ø0.43"
[Ø11mm]
1.57"
[40mm]
0.79"
[20mm]
0.79"
[20mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

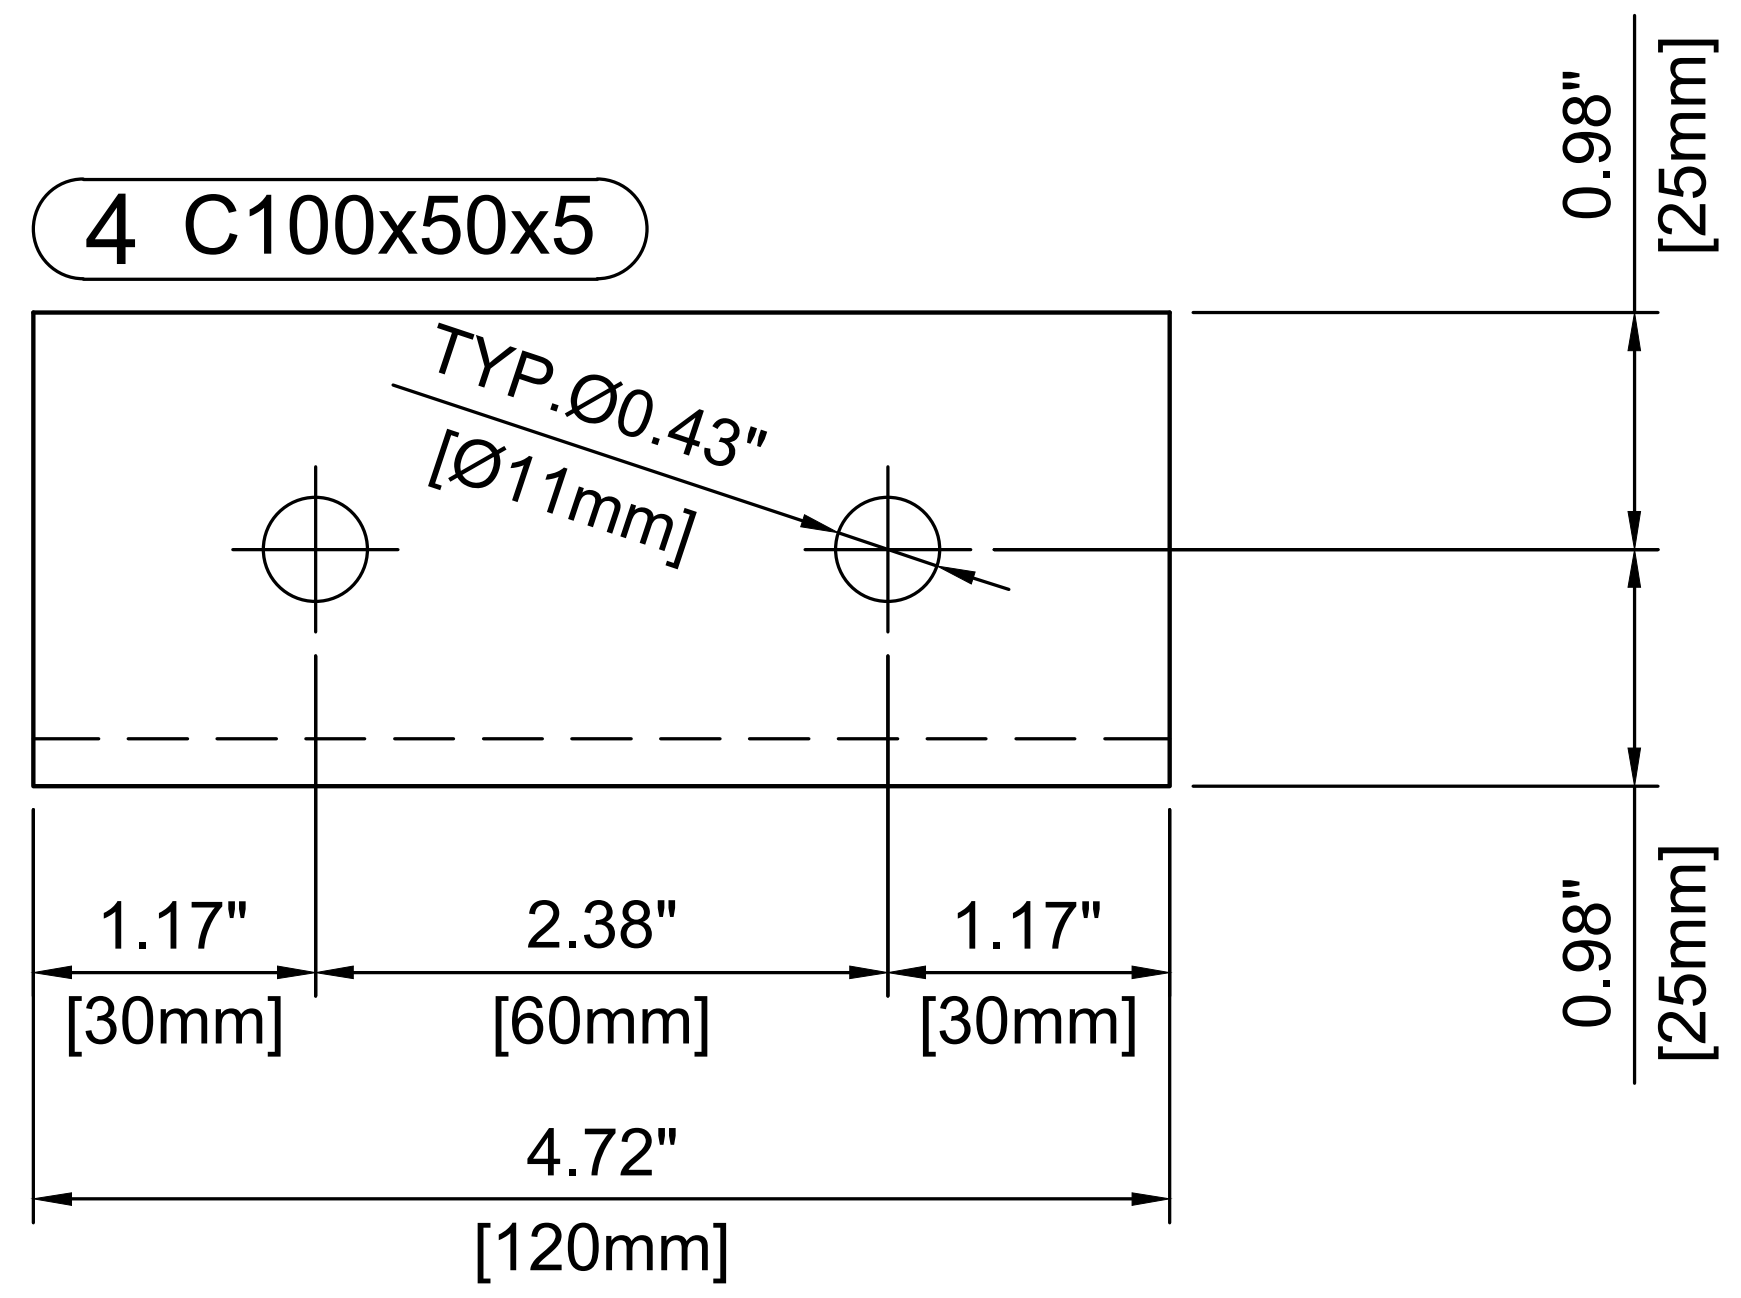

4 C100x50x5
TYP.Ø0.43"
[Ø11mm]
0.98"
[25mm]
0.98"
[25mm]
1.17"
[30mm]
2.38"
[60mm]
1.17"
[30mm]
4.72"
[120mm]

1:2.5

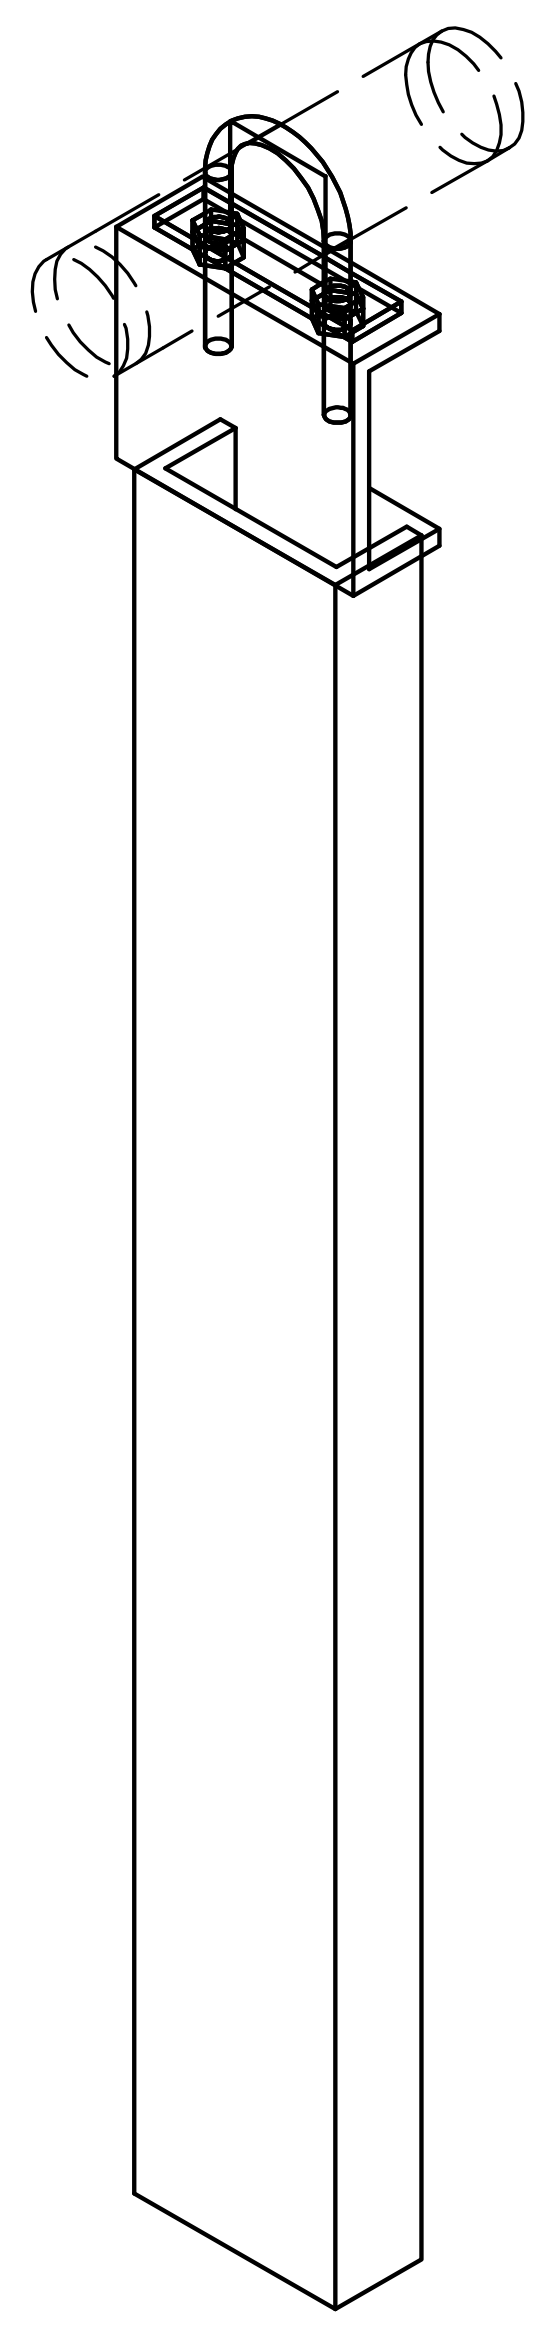

ISOMETRIC VIEW

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
4	C100x50x5	JIS G 3192			4.72	120	1	2.48	1.12	SS400
5	C100x50x5	JIS G 3192			34.37	873	1	18.01	8.17	SS400
						GRAND TOTAL		21.30	9.66	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-77

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	NO C2
LINE NO:	**QFF11BR030

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

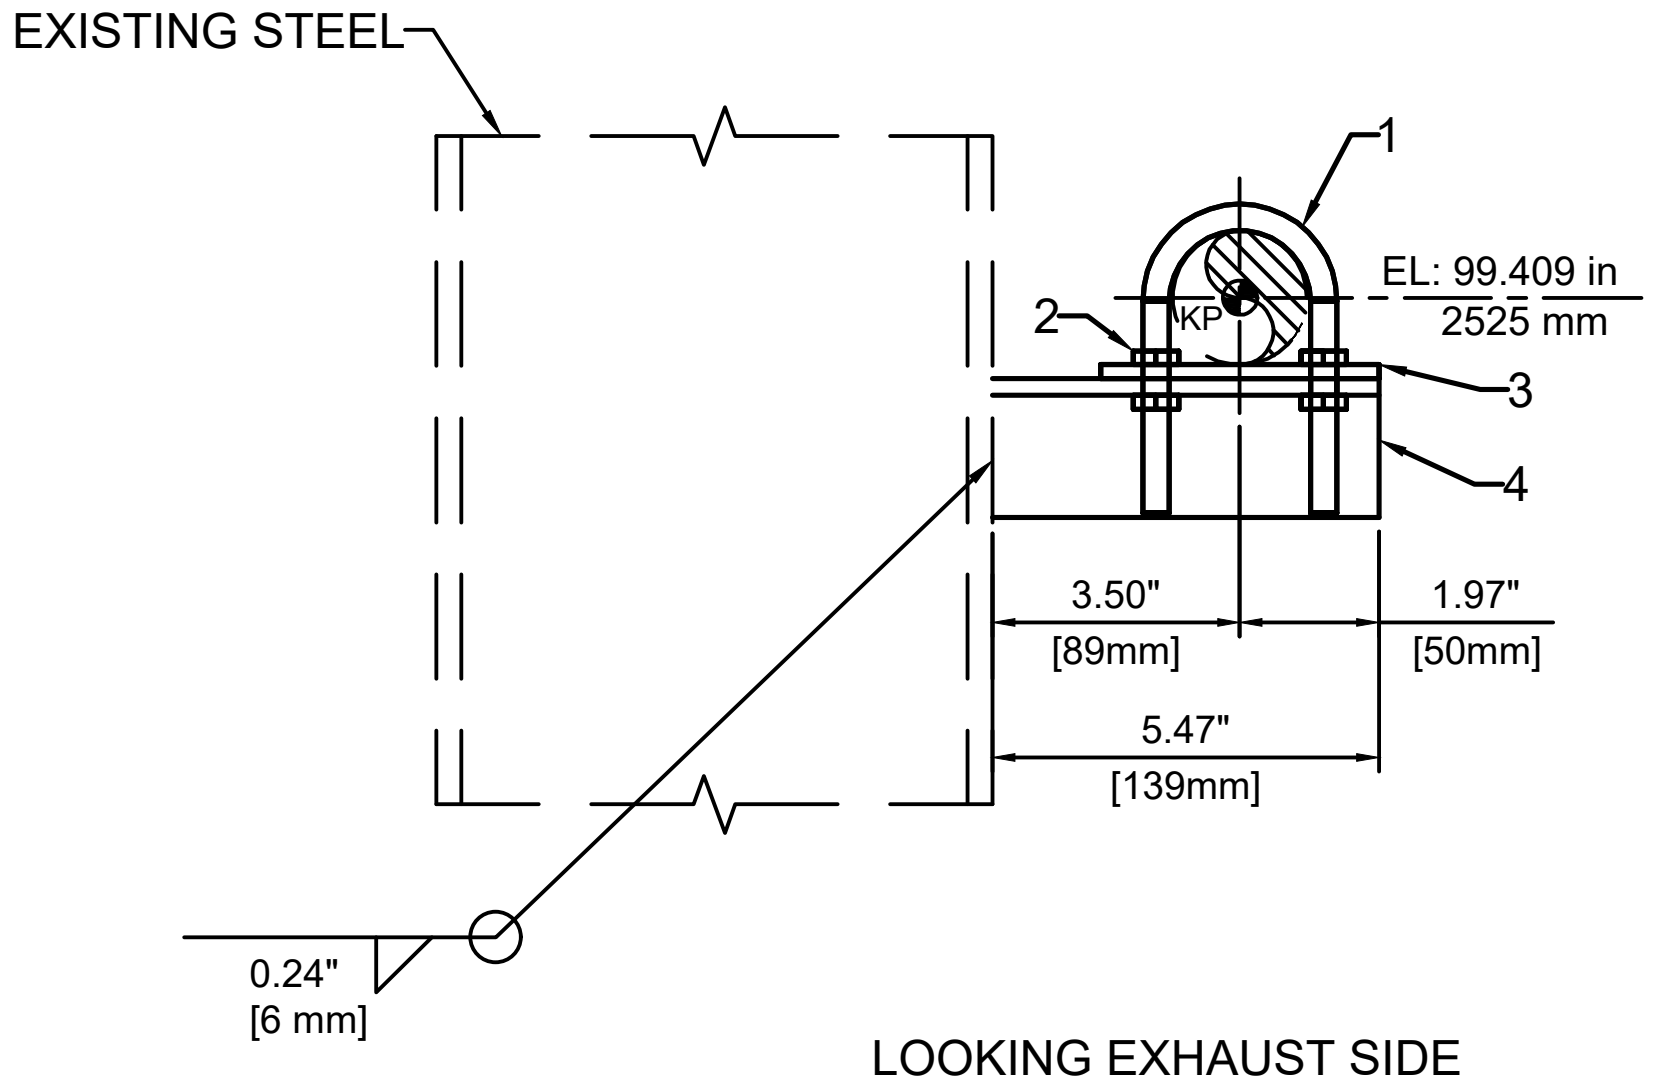
EXISTING STEEL
1
2
KP
EL: 99.409 in
2525 mm
3
4
3.50"
[89mm]
1.97"
[50mm]
5.47"
[139mm]
0.24"
[6 mm]

LOOKING EXHAUST SIDE
1:5

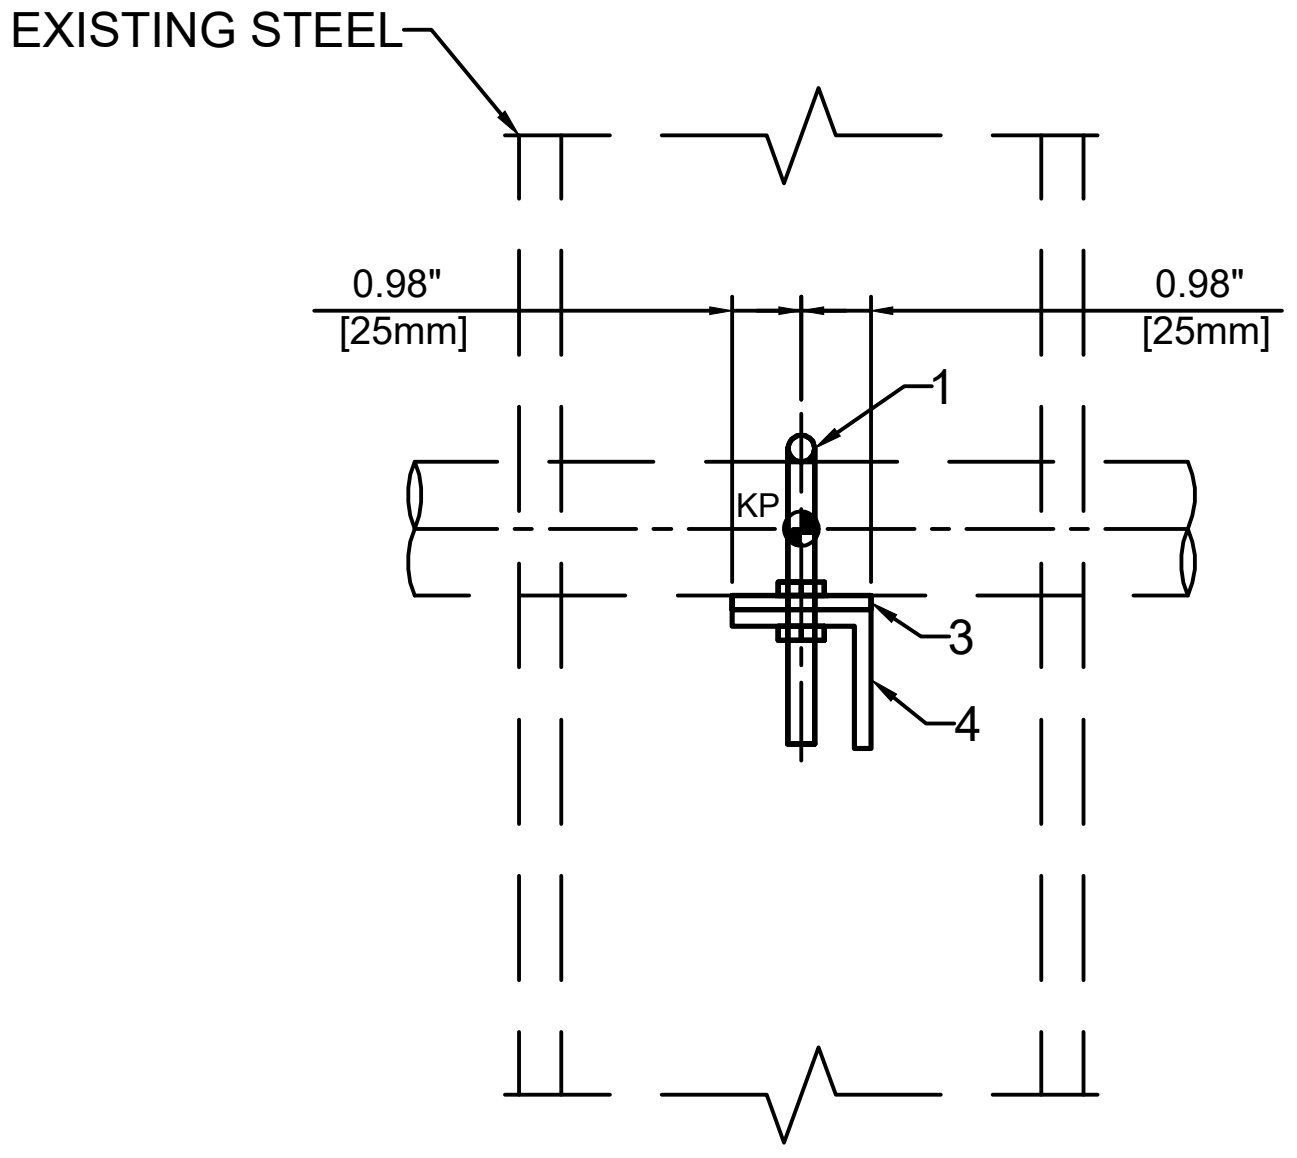
EXISTING STEEL
0.98"
[25mm]
0.98"
[25mm]
1
KP
3
4

LOOKING FUEL GAS UNIT SIDE
1:5

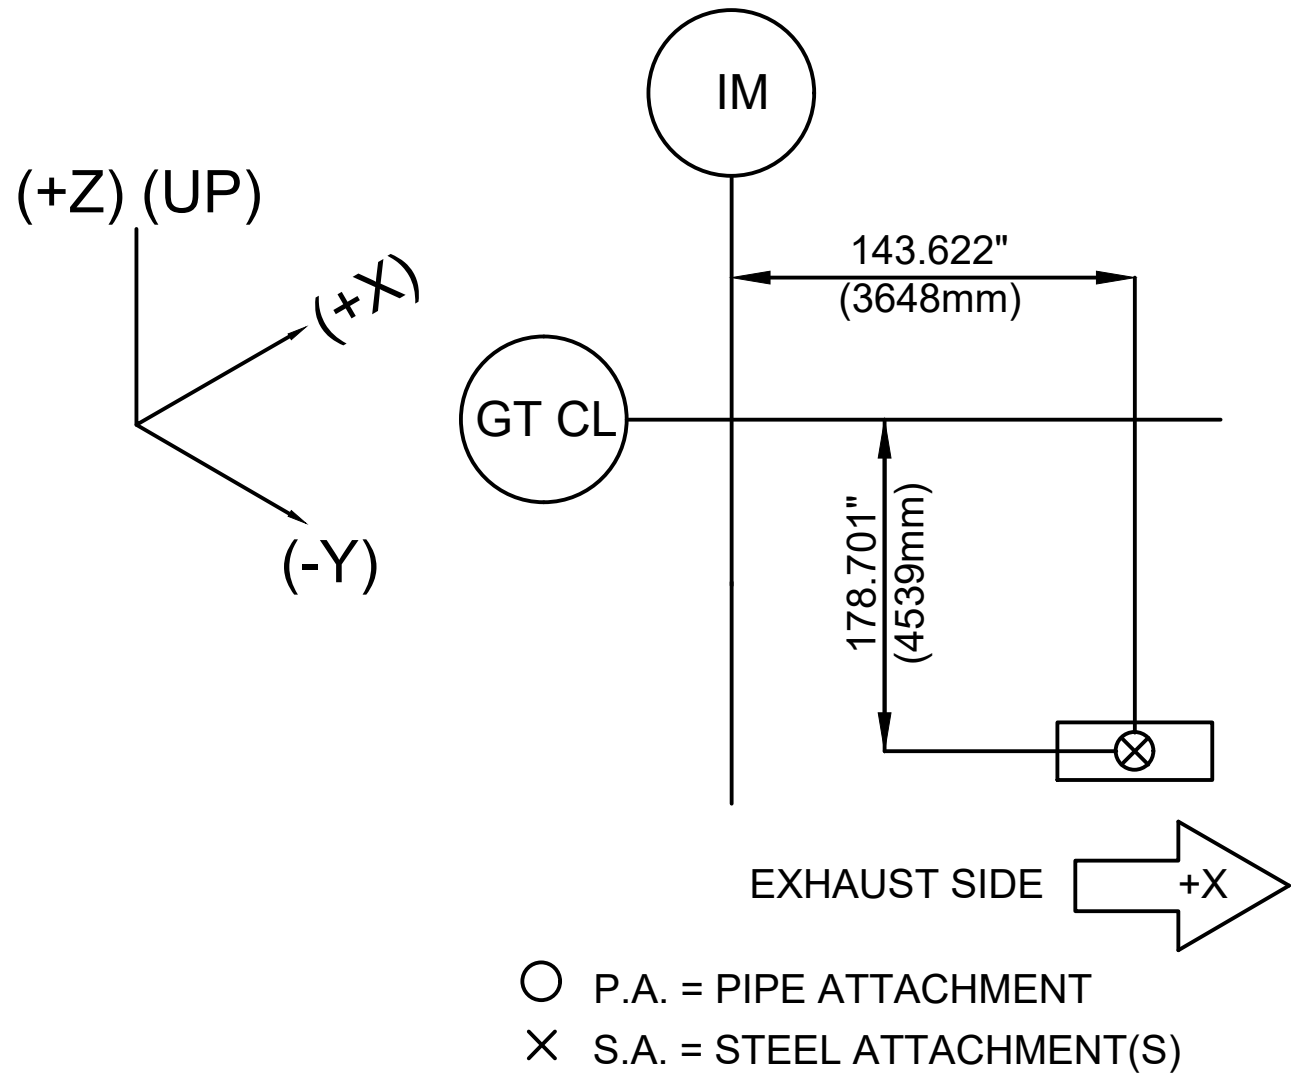
(+Z) (UP)
(+X)
(-Y)
IM
GT CL
143.622"
(3648mm)
178.701"
(4539mm)
EXHAUST SIDE
+X
○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

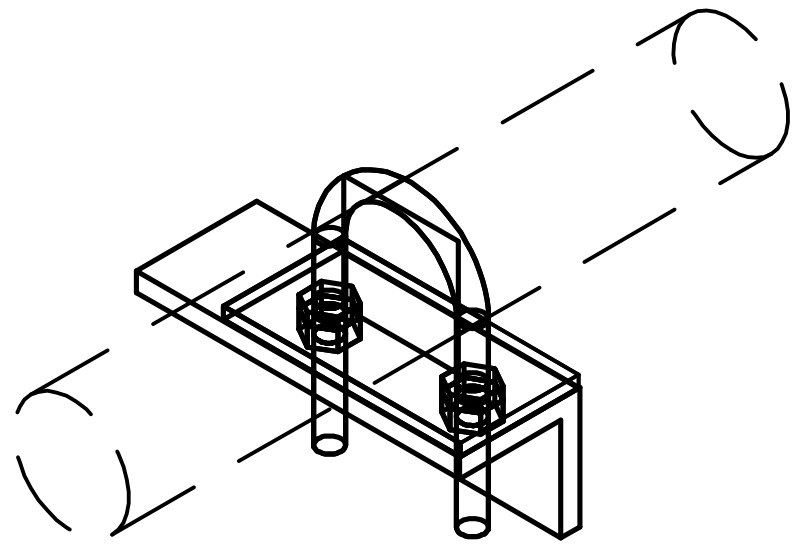

ISOMETRIC VIEW

4 L50x50x6

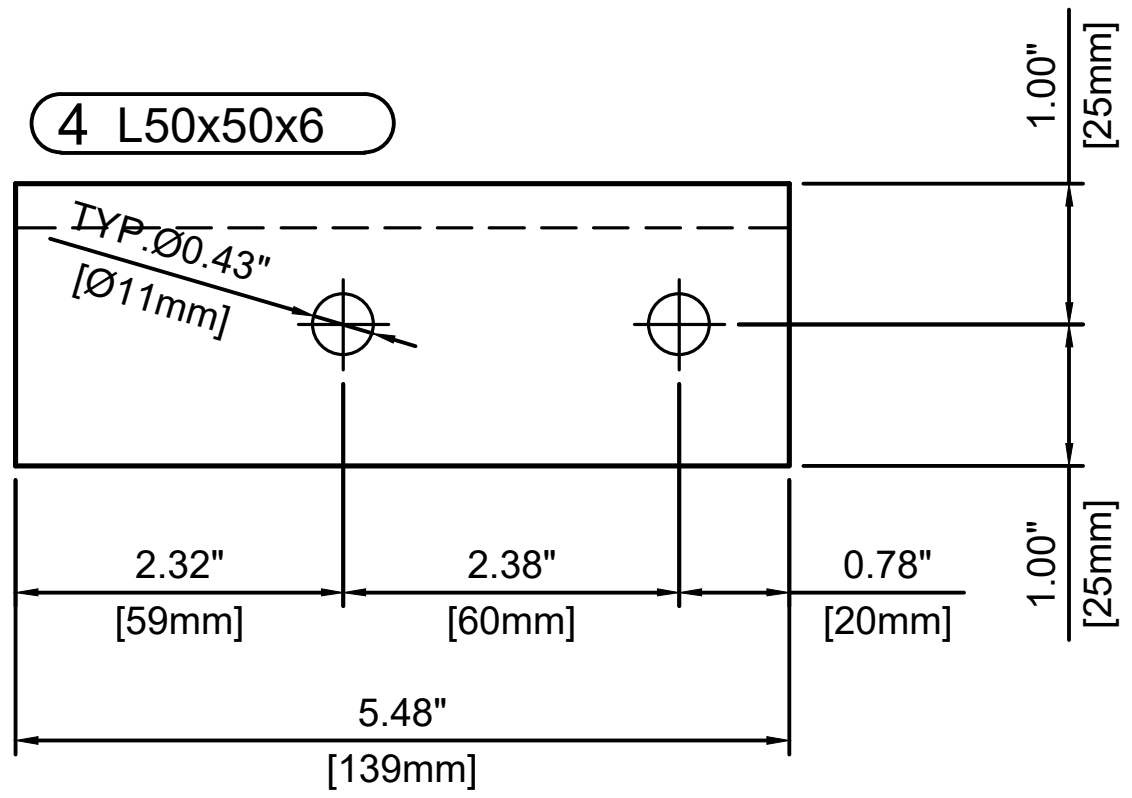
TYP.Ø0.43"
[Ø11mm]
1.00"
[25mm]
1.00"
[25mm]
2.32"
[59mm]
2.38"
[60mm]
0.78"
[20mm]
5.48"
[139mm]

3 PL5x100x50

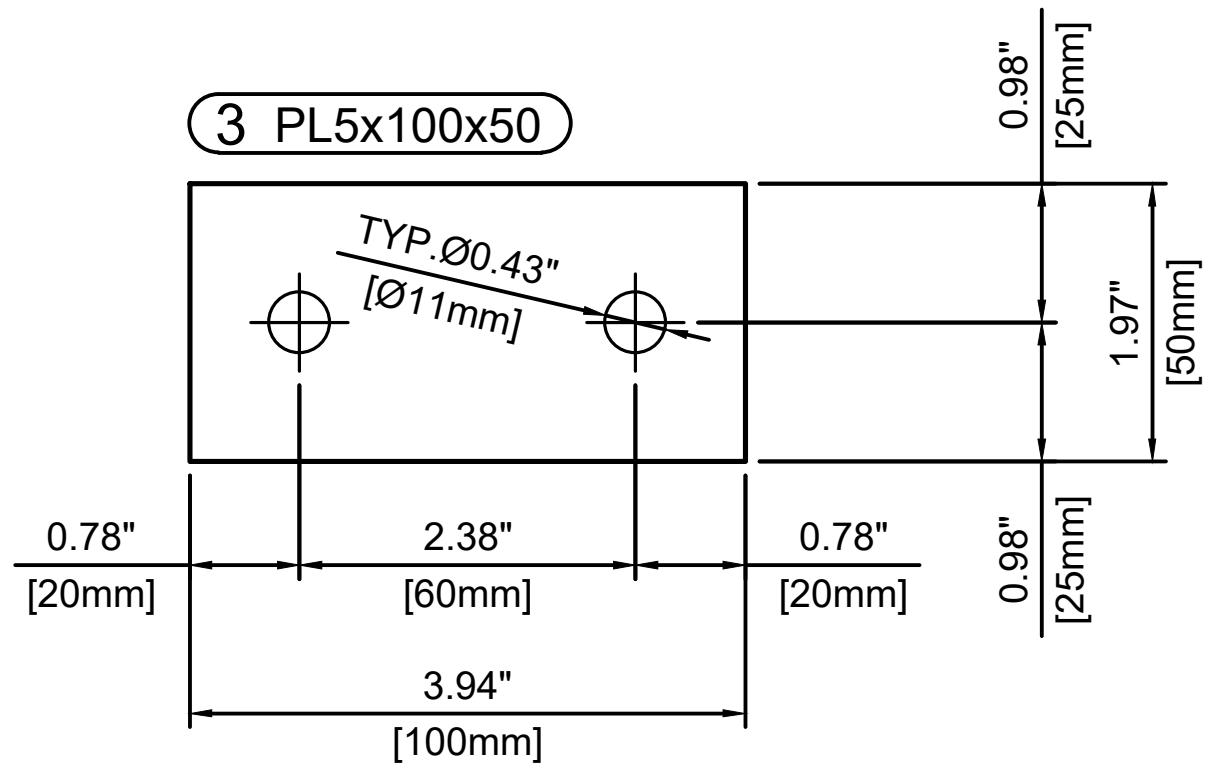
TYP.Ø0.43"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
0.98"
[25mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
4	L50x50x6	JIS G 3192			5.47	139	1	1.36	0.62	SS400
							GRAND TOTAL	2.25	1.02	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING

SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-108

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: NO C2
LINE NO: **QFF11BR030

Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

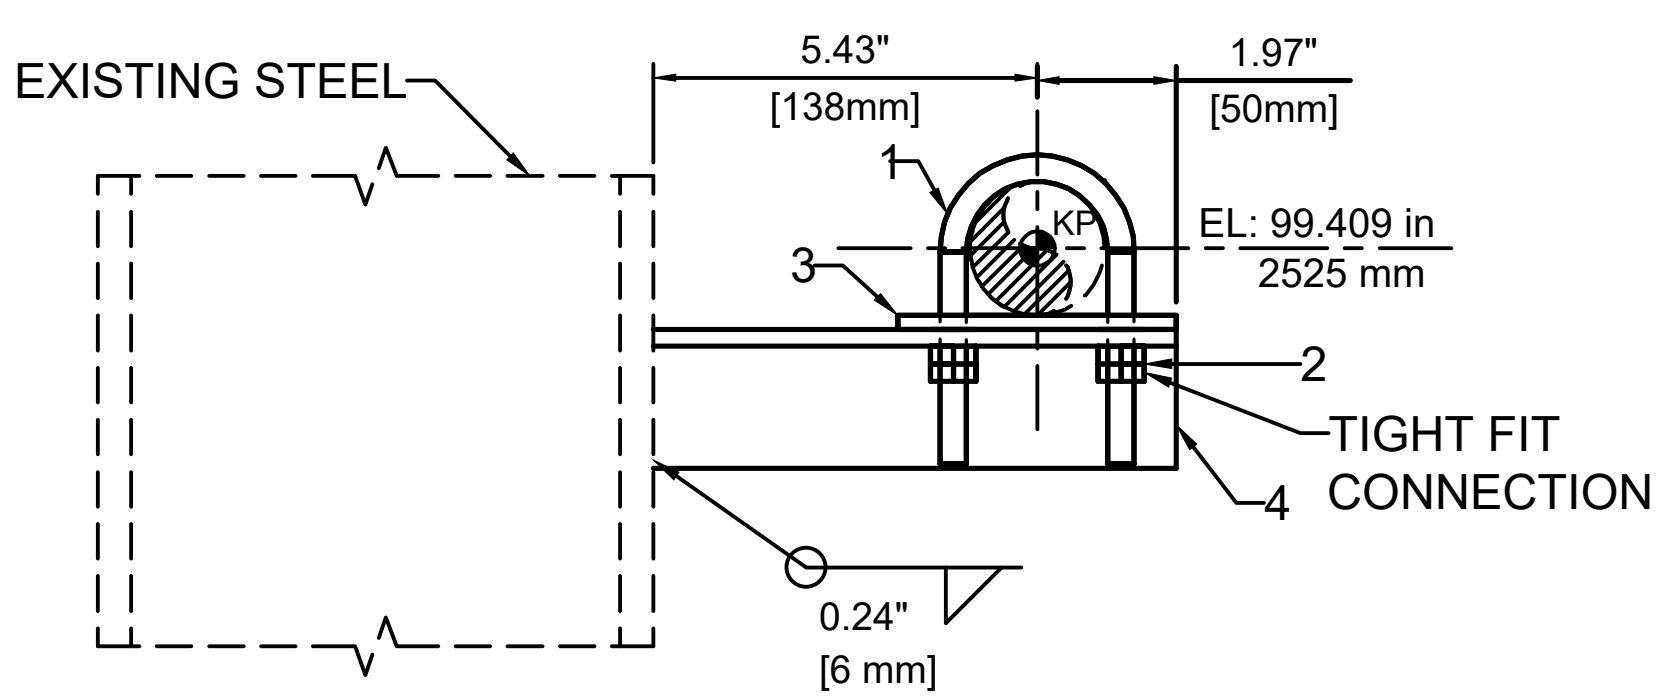
EXISTING STEEL
5.43"
[138mm]
1.97"
[50mm]
1
3
KP
EL: 99.409 in
2525 mm
2
TIGHT FIT
CONNECTION
4
0.24"
[6 mm]

LOOKING FUEL GAS UNIT SIDE
1:5

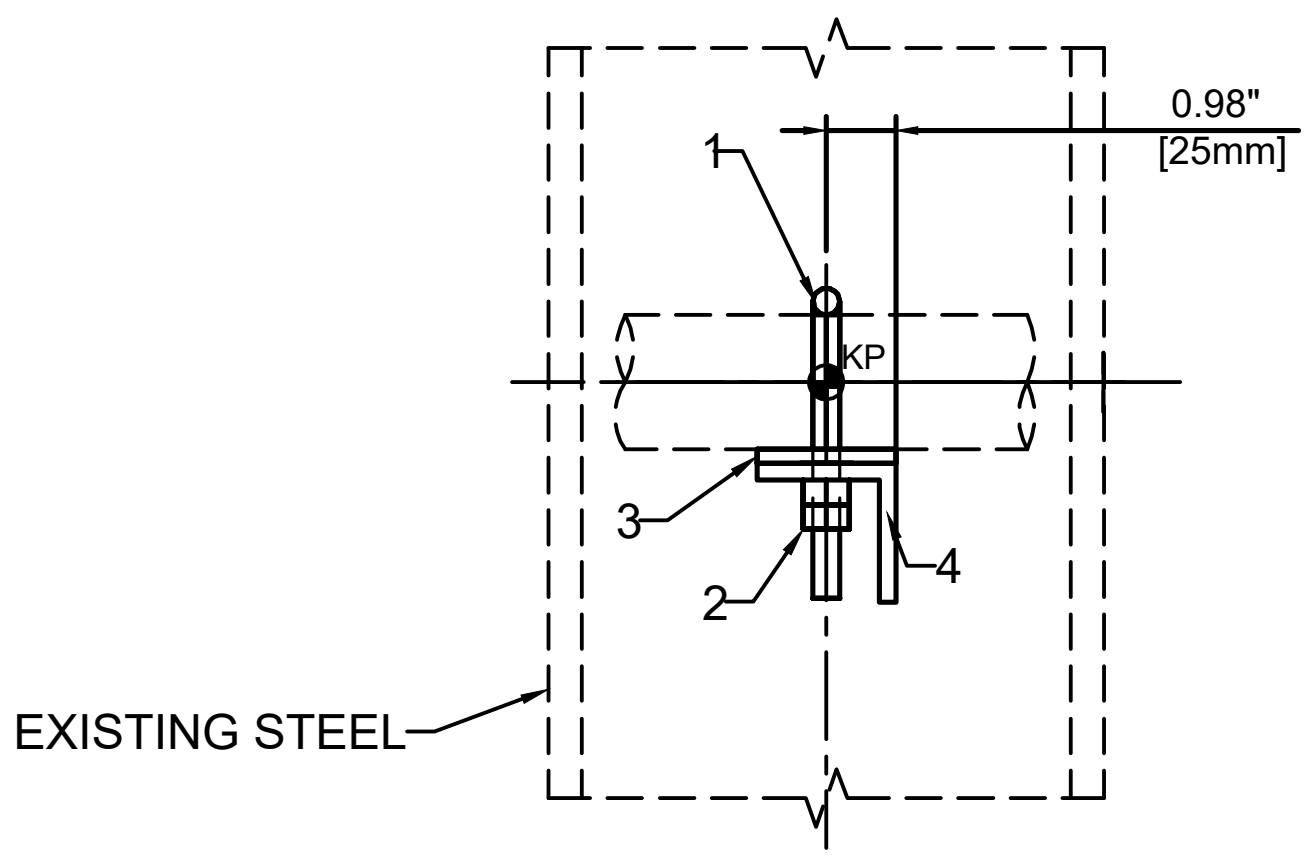
0.98"
[25mm]
1
KP
3
4
2
EXISTING STEEL

LOOKING INLET MANIFOLD SIDE
1:5



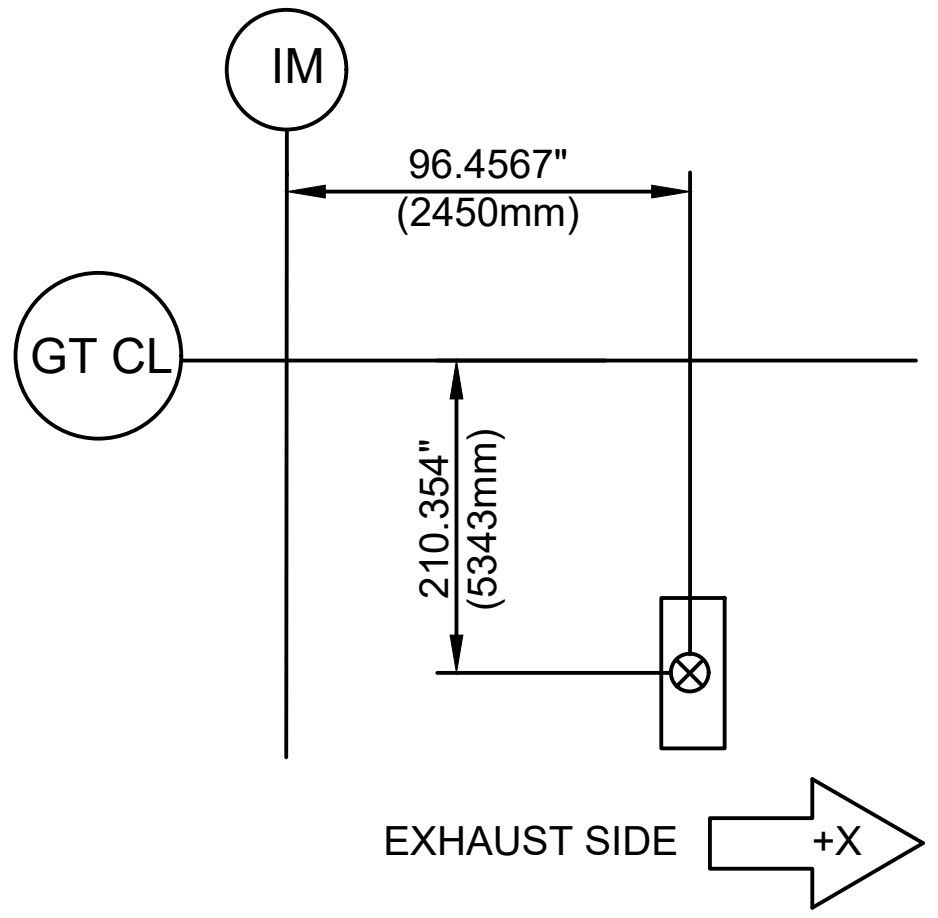
IM
96.4567"
(2450mm)
GT CL
210.354"
(5343mm)
EXHAUST SIDE
+X

○ P.A. = PIPE ATTACHMENT
✕ S.A. = STEEL ATTACHMENT(S)

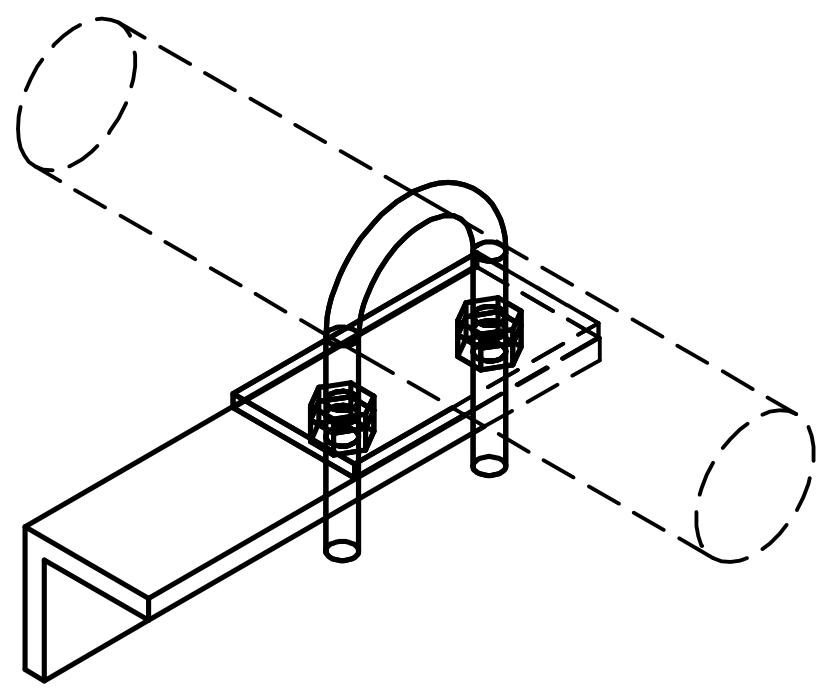

ISOMETRIC VIEW

4 L50x50x6

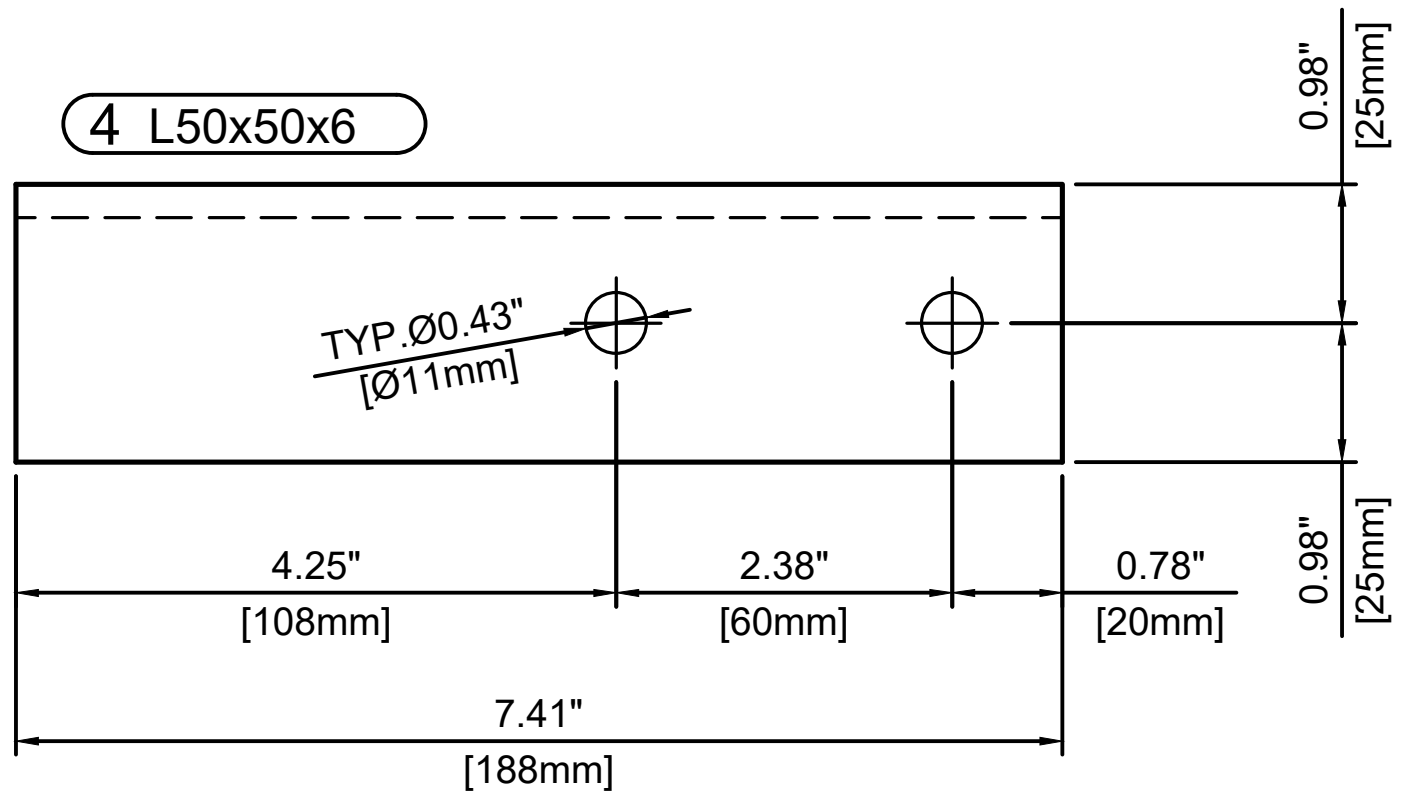
TYP.Ø0.43"
[Ø11mm]
0.98"
[25mm]
0.98"
[25mm]
4.25"
[108mm]
2.38"
[60mm]
0.78"
[20mm]
7.41"
[188mm]

1:2.5

3 PL5x100x50

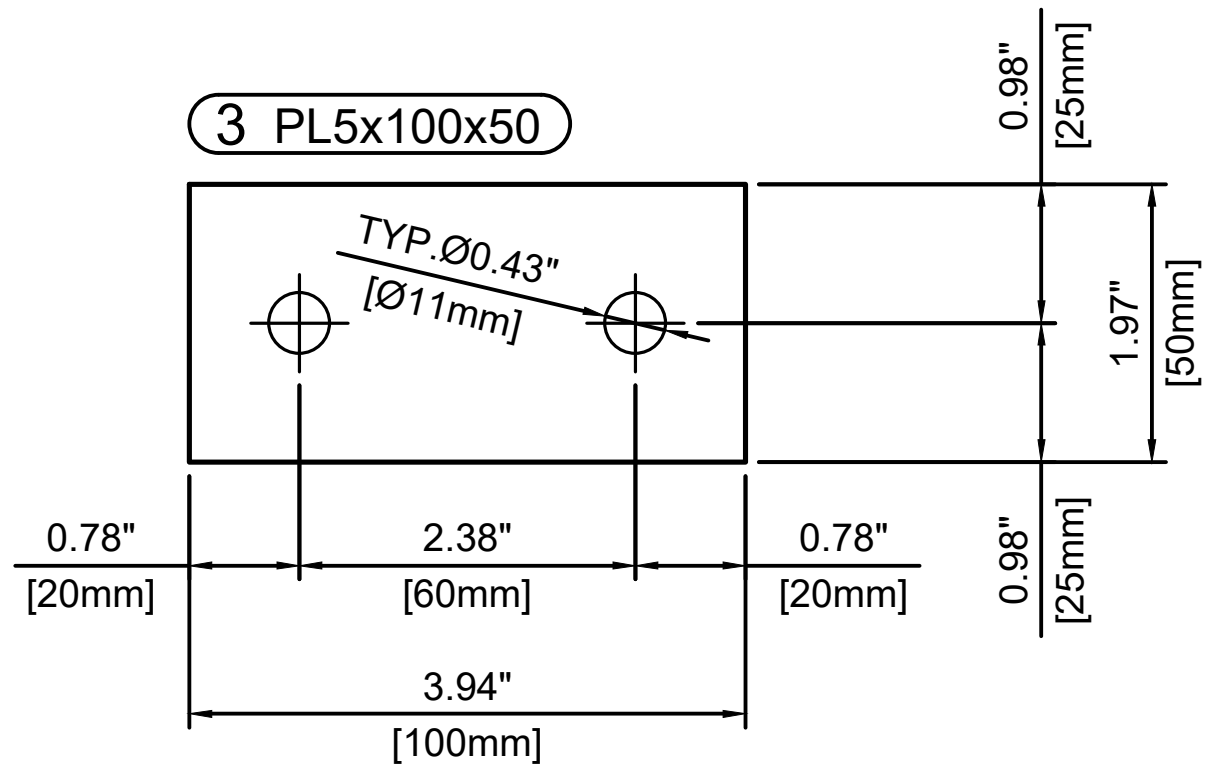
TYP.Ø0.43"
[Ø11mm]
0.98"
[25mm]
1.97"
[50mm]
0.98"
[25mm]
0.78"
[20mm]
2.38"
[60mm]
0.78"
[20mm]
3.94"
[100mm]

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
4	L50x50x6	JIS G 3192			7.40	188	1	1.84	0.83	SS400
						GRAND TOTAL		2.73	1.24	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **24A0A-PS-109

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1