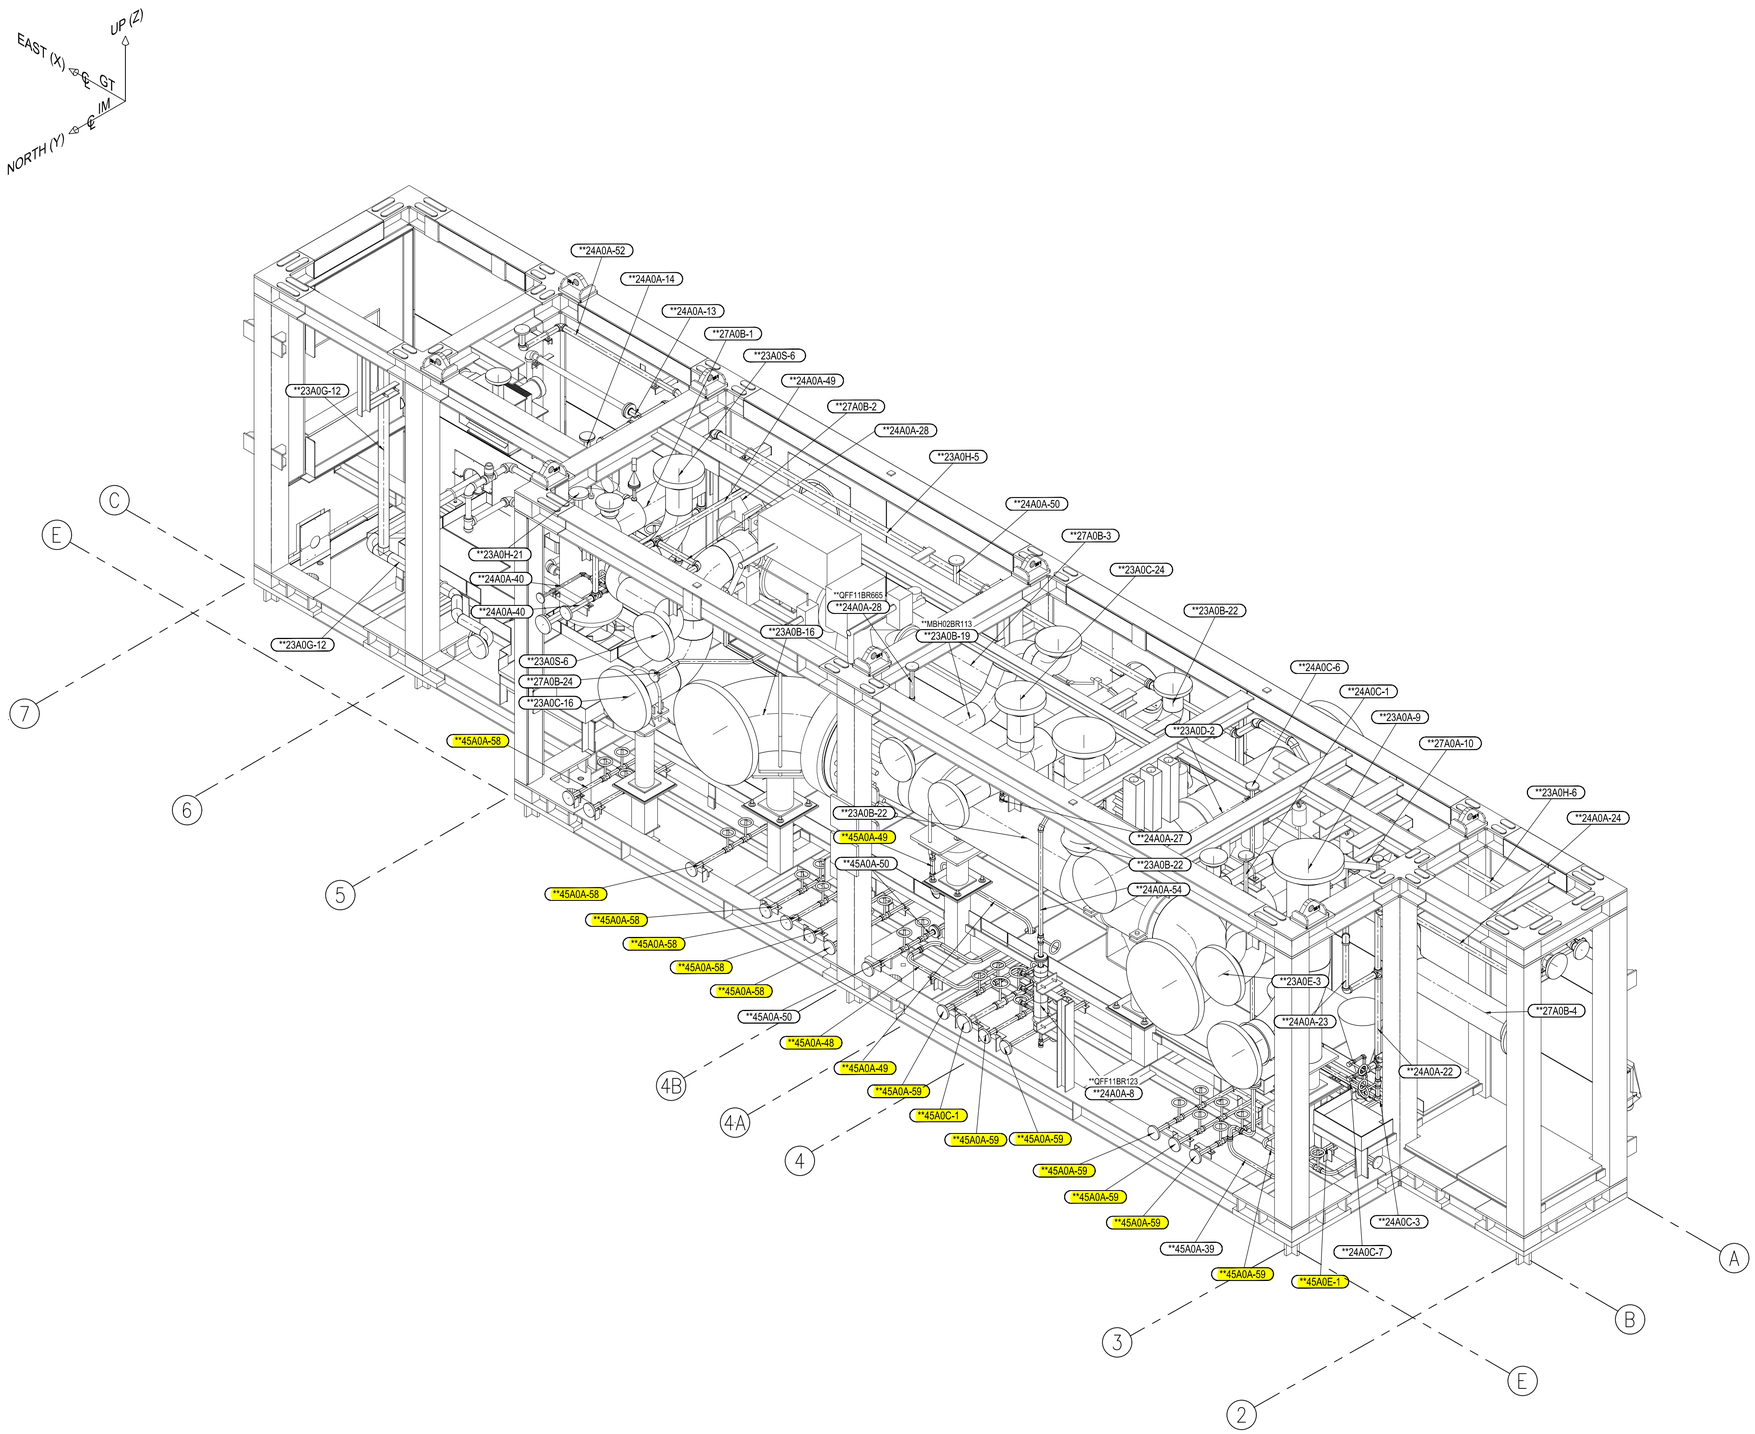


MD-1.1 ISOMETRIC VIEW
LOOKING SOUTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL–150

DWG NAME: MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.: –

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140–PI–094–001–MD–1.1

REV.: 0

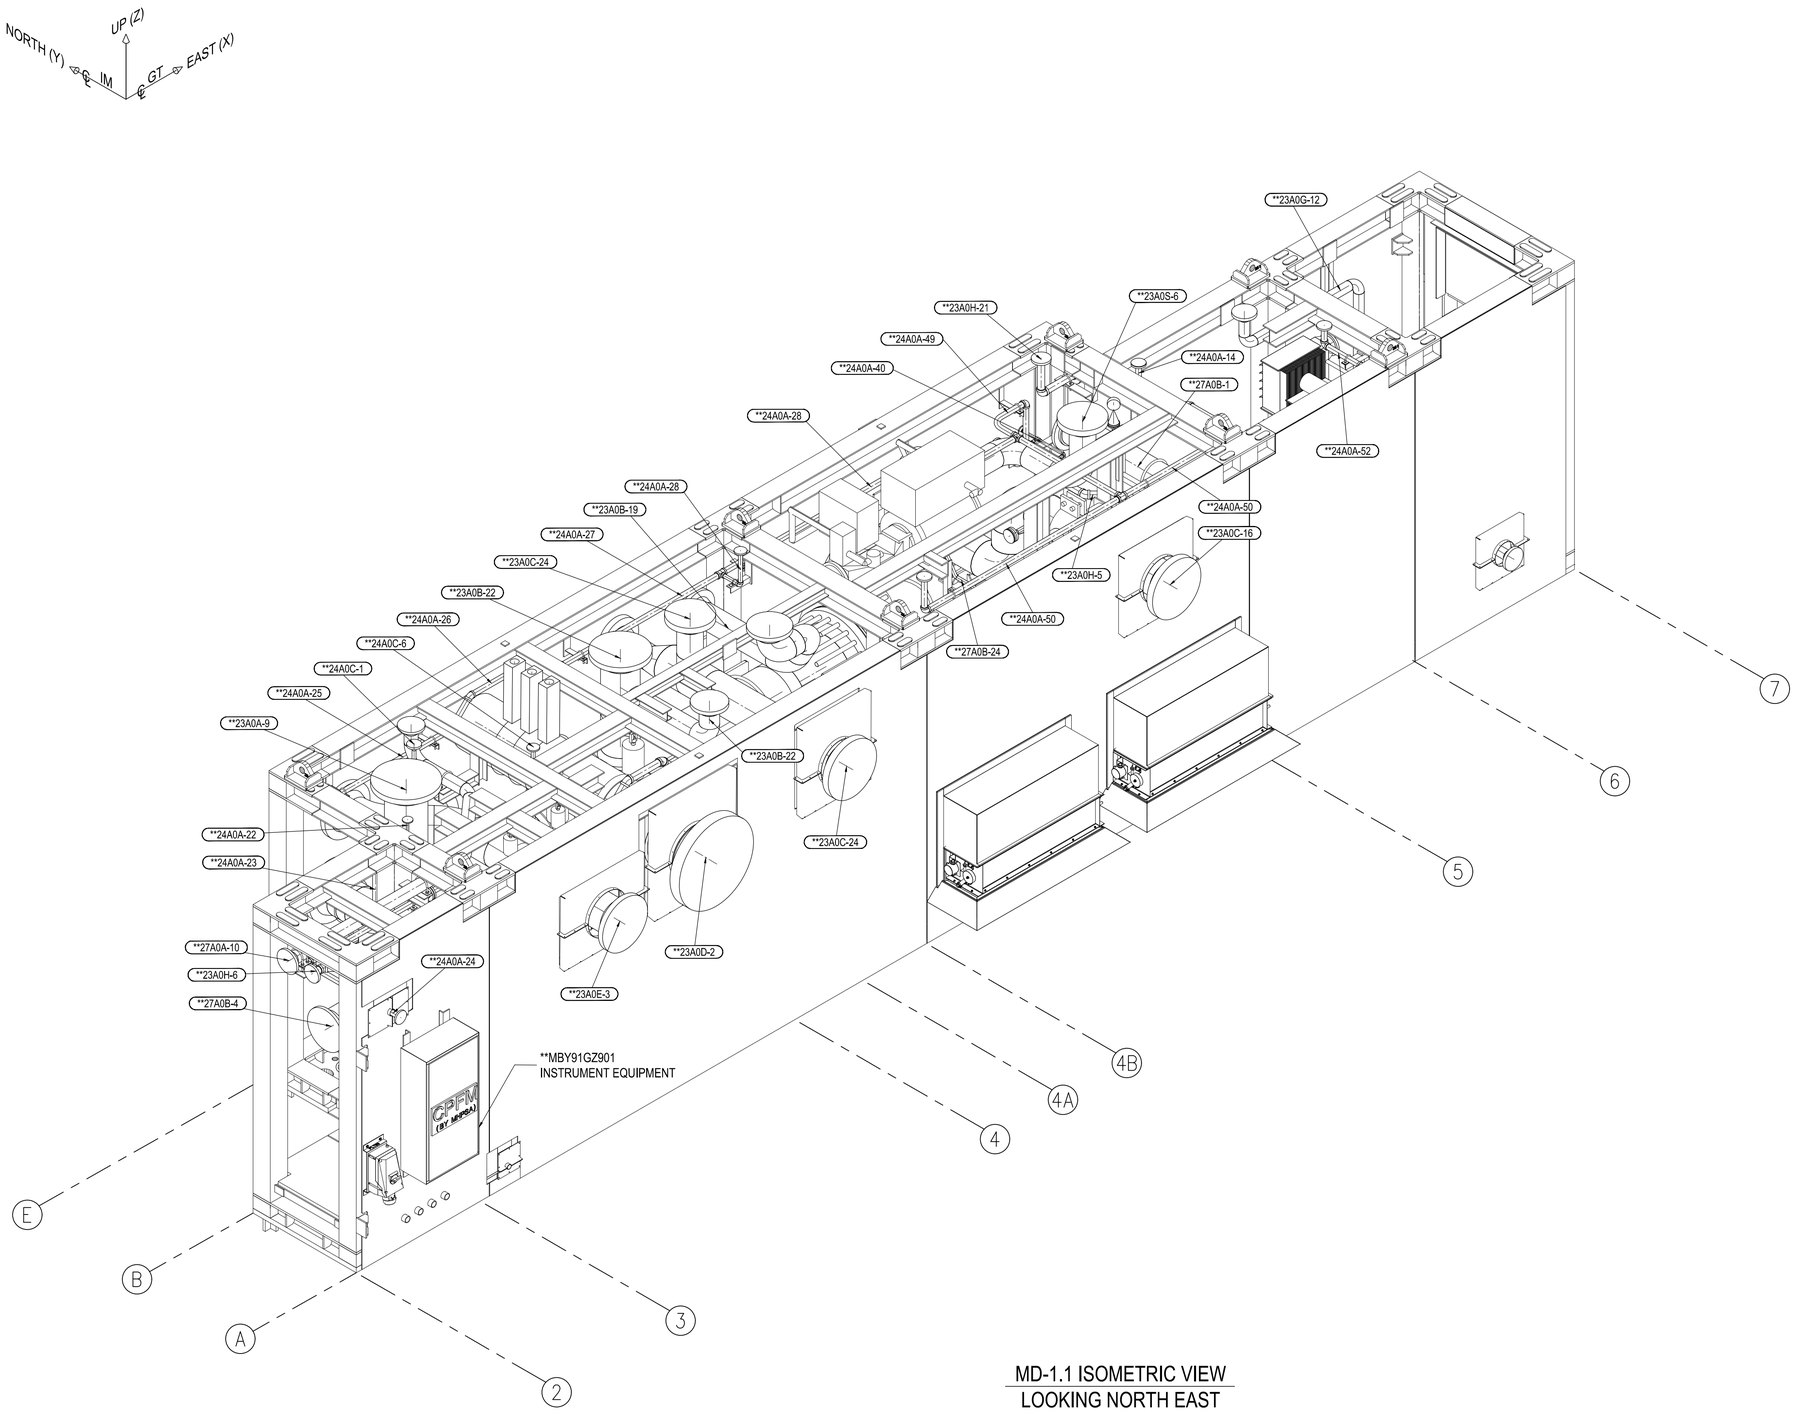

MD-1.1 ISOMETRIC VIEW
LOOKING NORTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-MD-1.1

REV.: 0

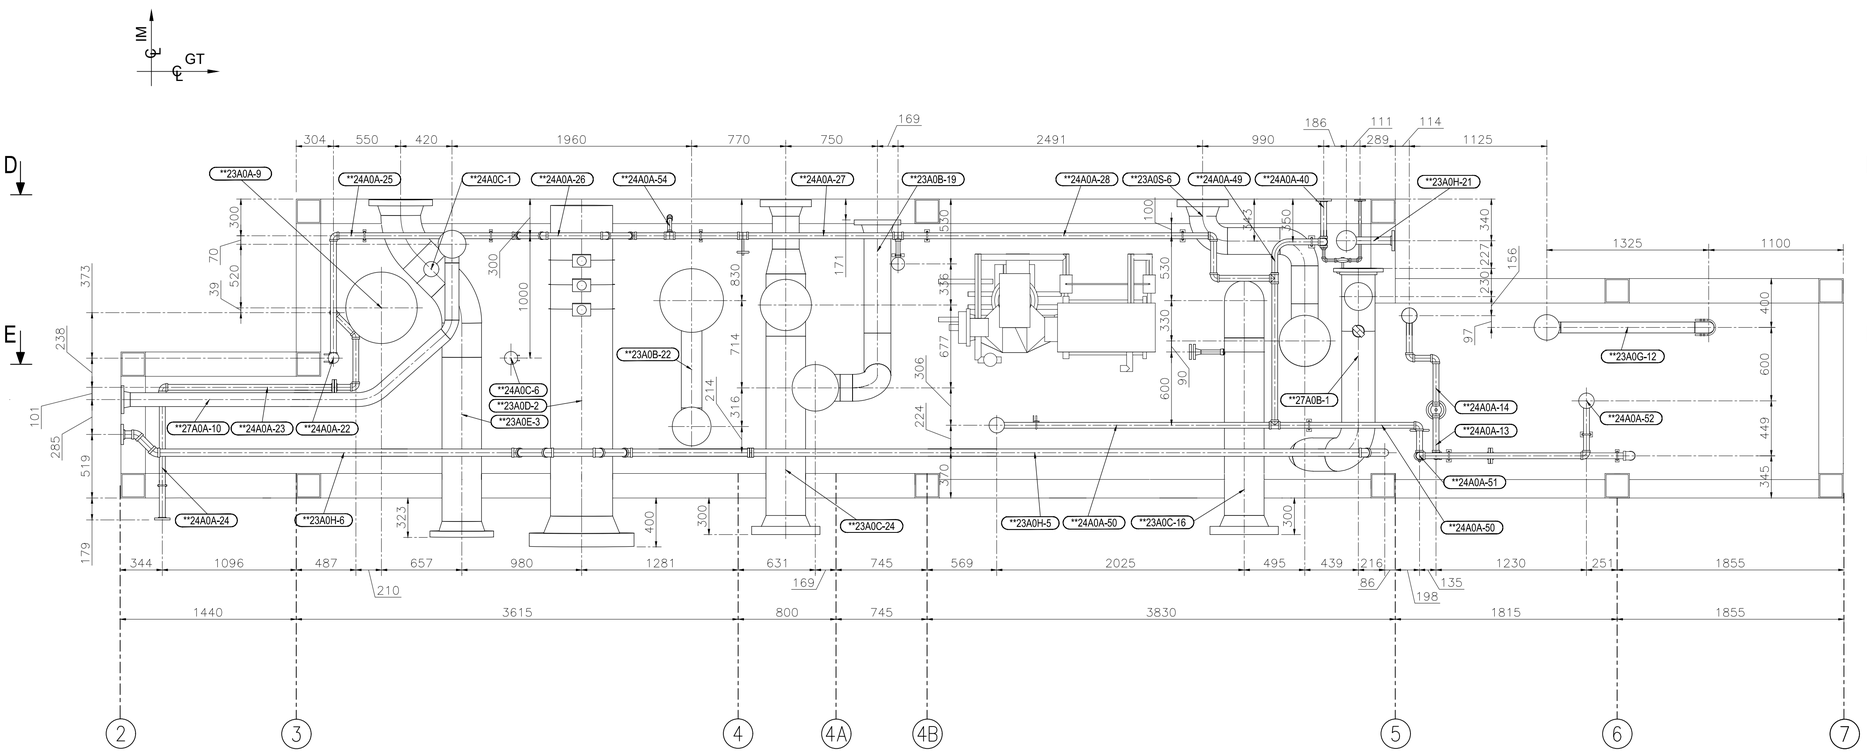

MD-1.1 PLAN VIEW
SECTION 'A-A'

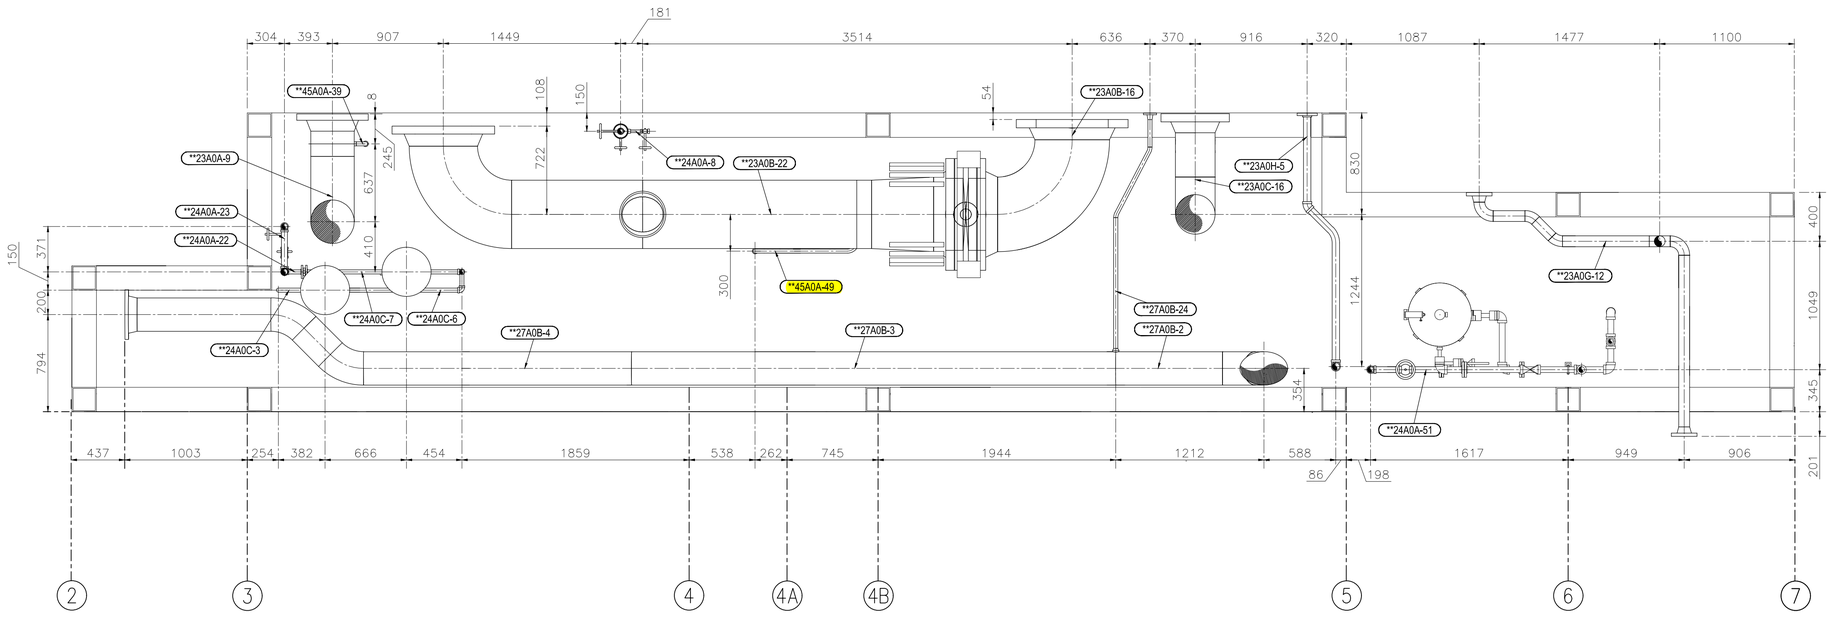

MD-1.1 PLAN VIEW
SECTION 'B-B'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL–150

DWG NAME: MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140–PI–094–001–MD–1.1

REV.: 0

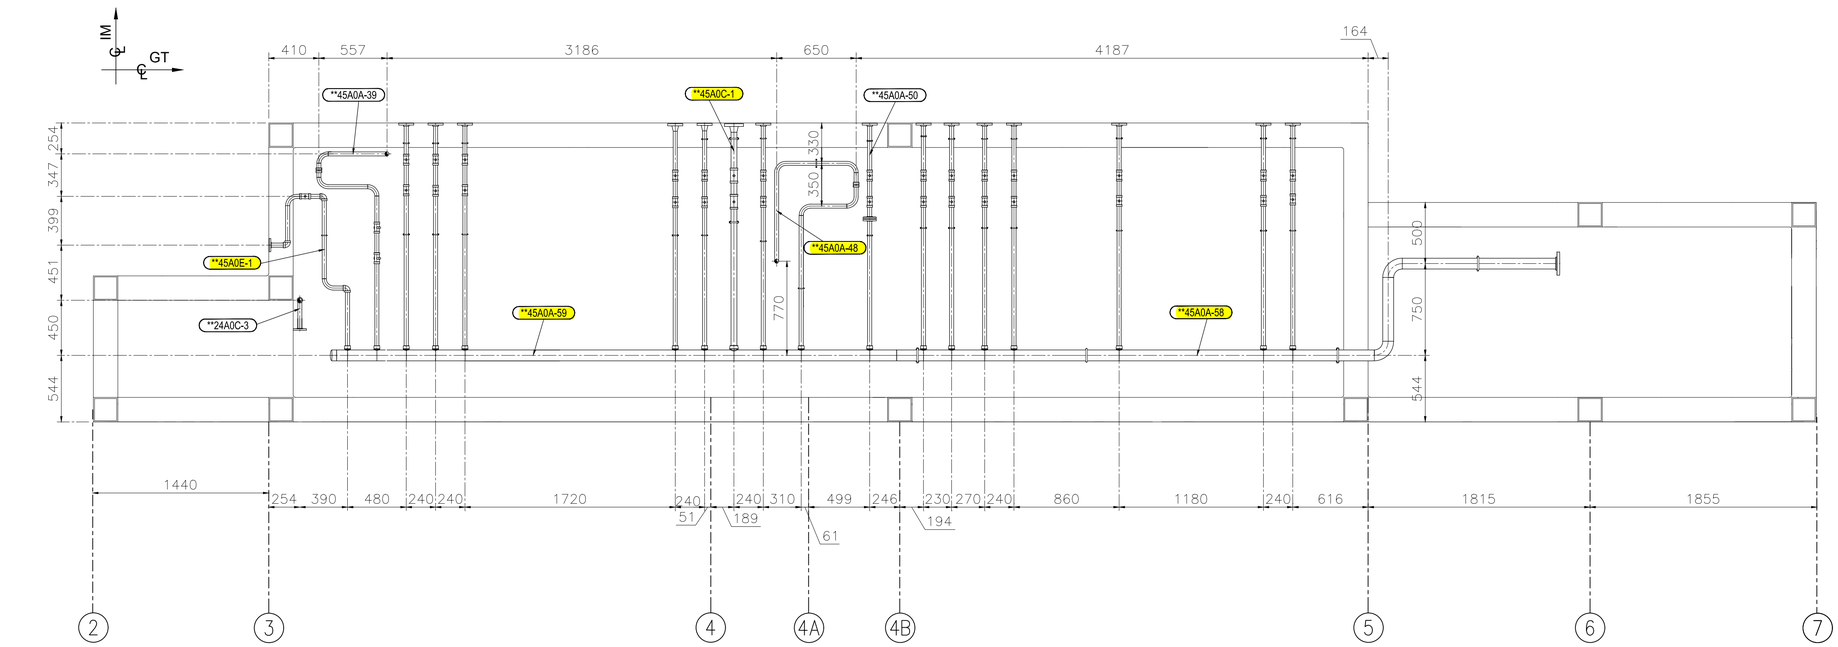

MD-1.1 PLAN VIEW
SECTION 'C-C'

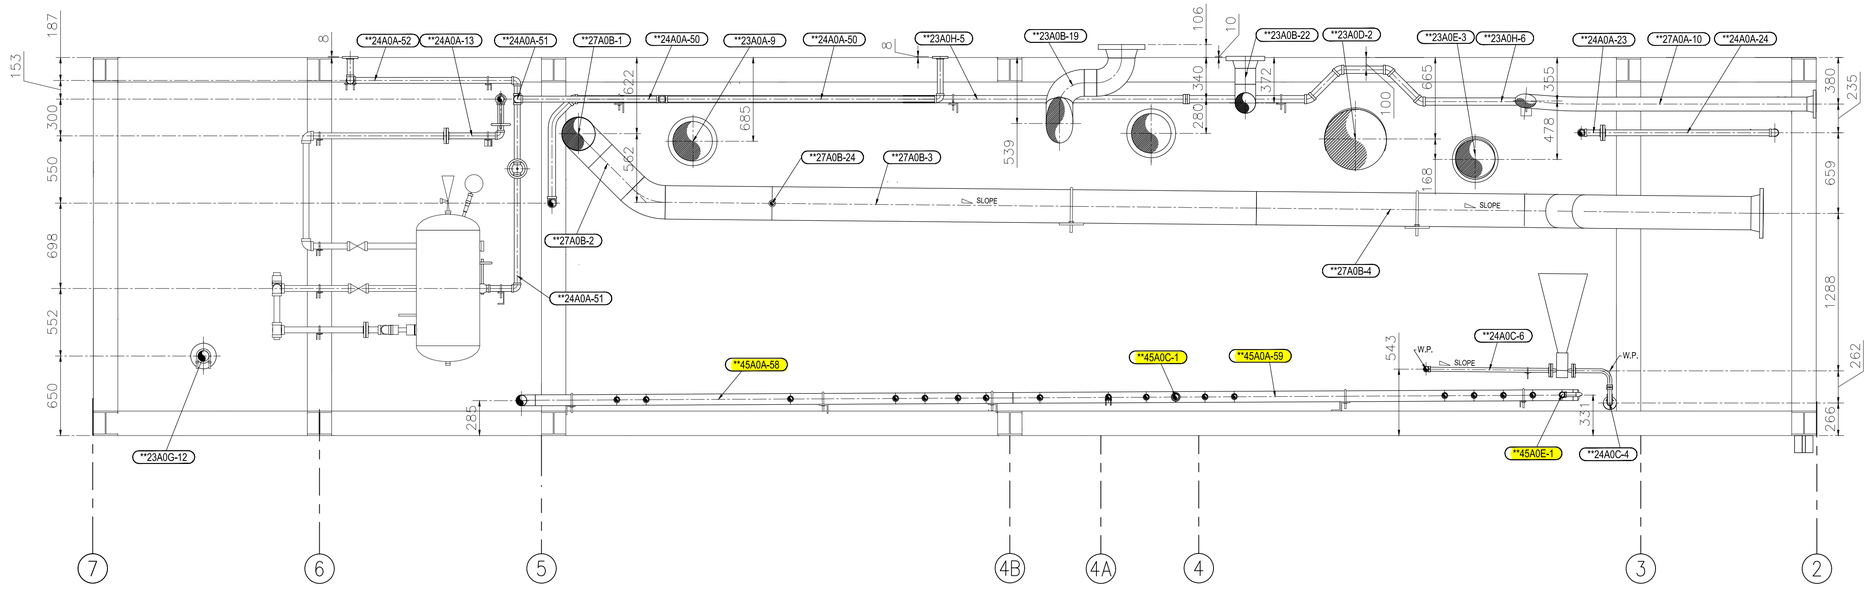

MD-1.1 ELEVATION VIEW
SECTION 'E-E'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX —— PIPE LINE
   - (××XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL-150

DWG NAME
MD-1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.
–

PREPARED BY
cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140-PI-094-001-MD-1.1


REV.
0

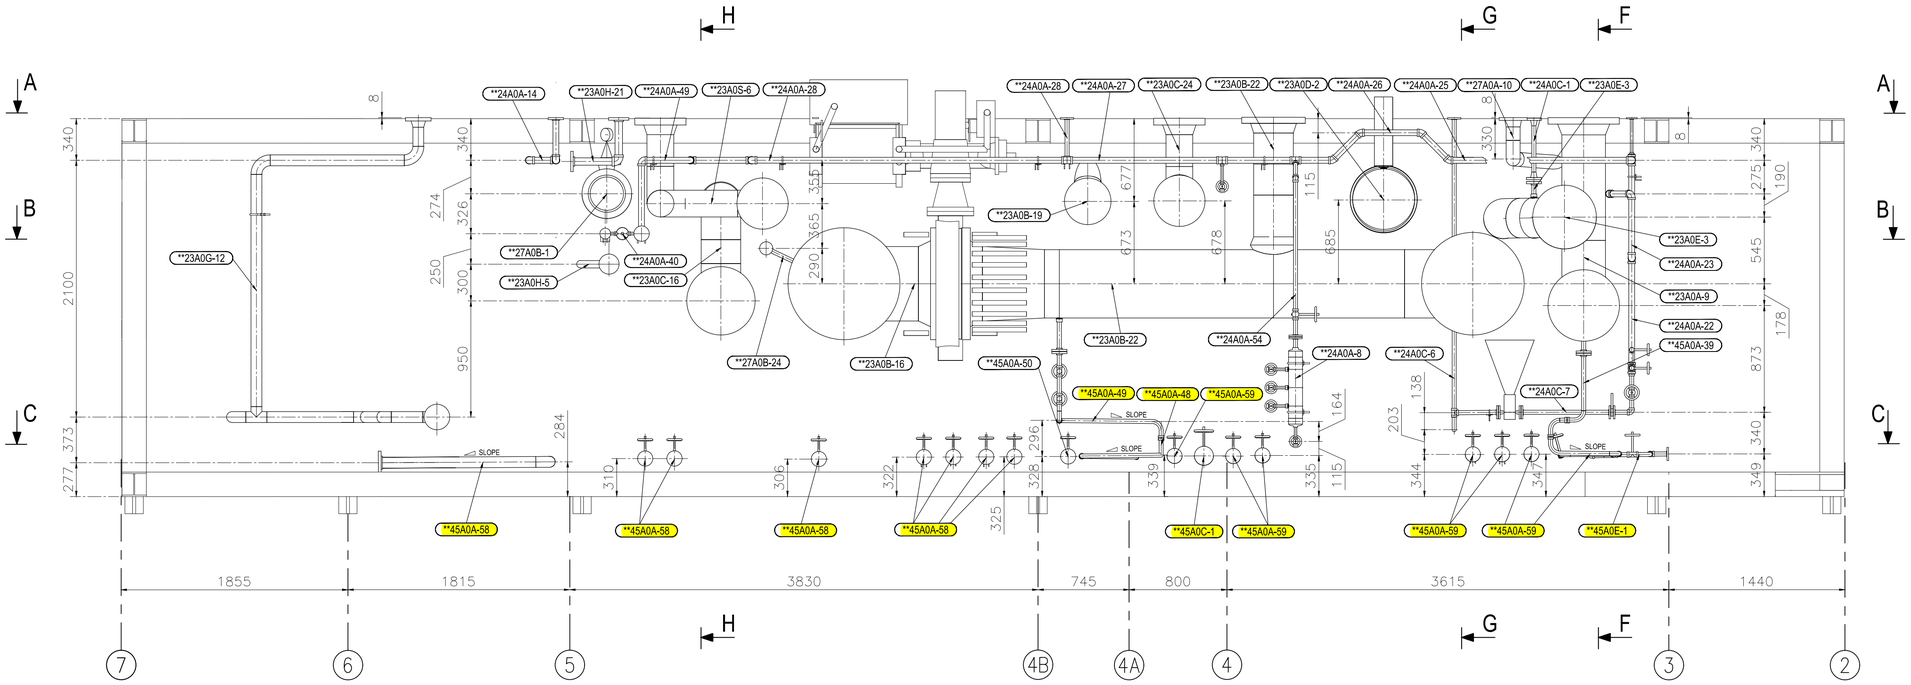


MD-1.1 ELEVATION VIEW
SECTION 'D-D'

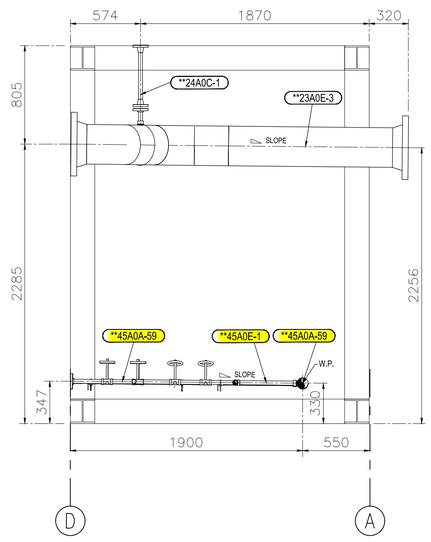

MD-1.1 SECTION 'F-F'
(LOOKING WEST)

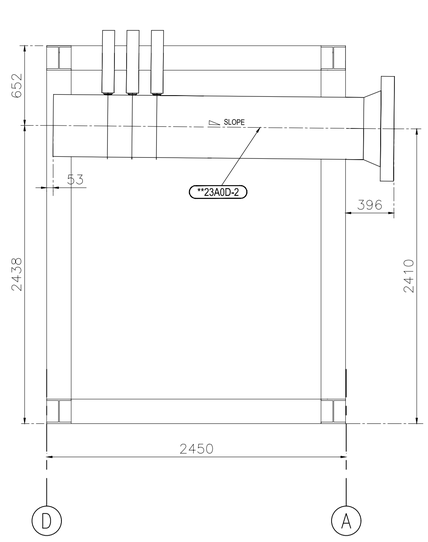

MD-1.1 SECTION 'G-G'
(LOOKING WEST)

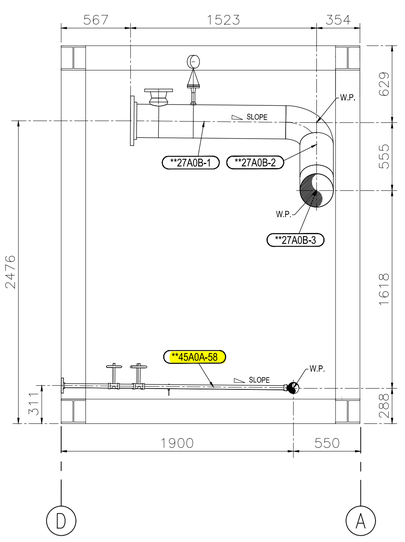

MD-1.1 SECTION 'H-H'
(LOOKING WEST)

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.
–

PREPARED BY


cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–1.1

REV.
0

REVISION RECORD

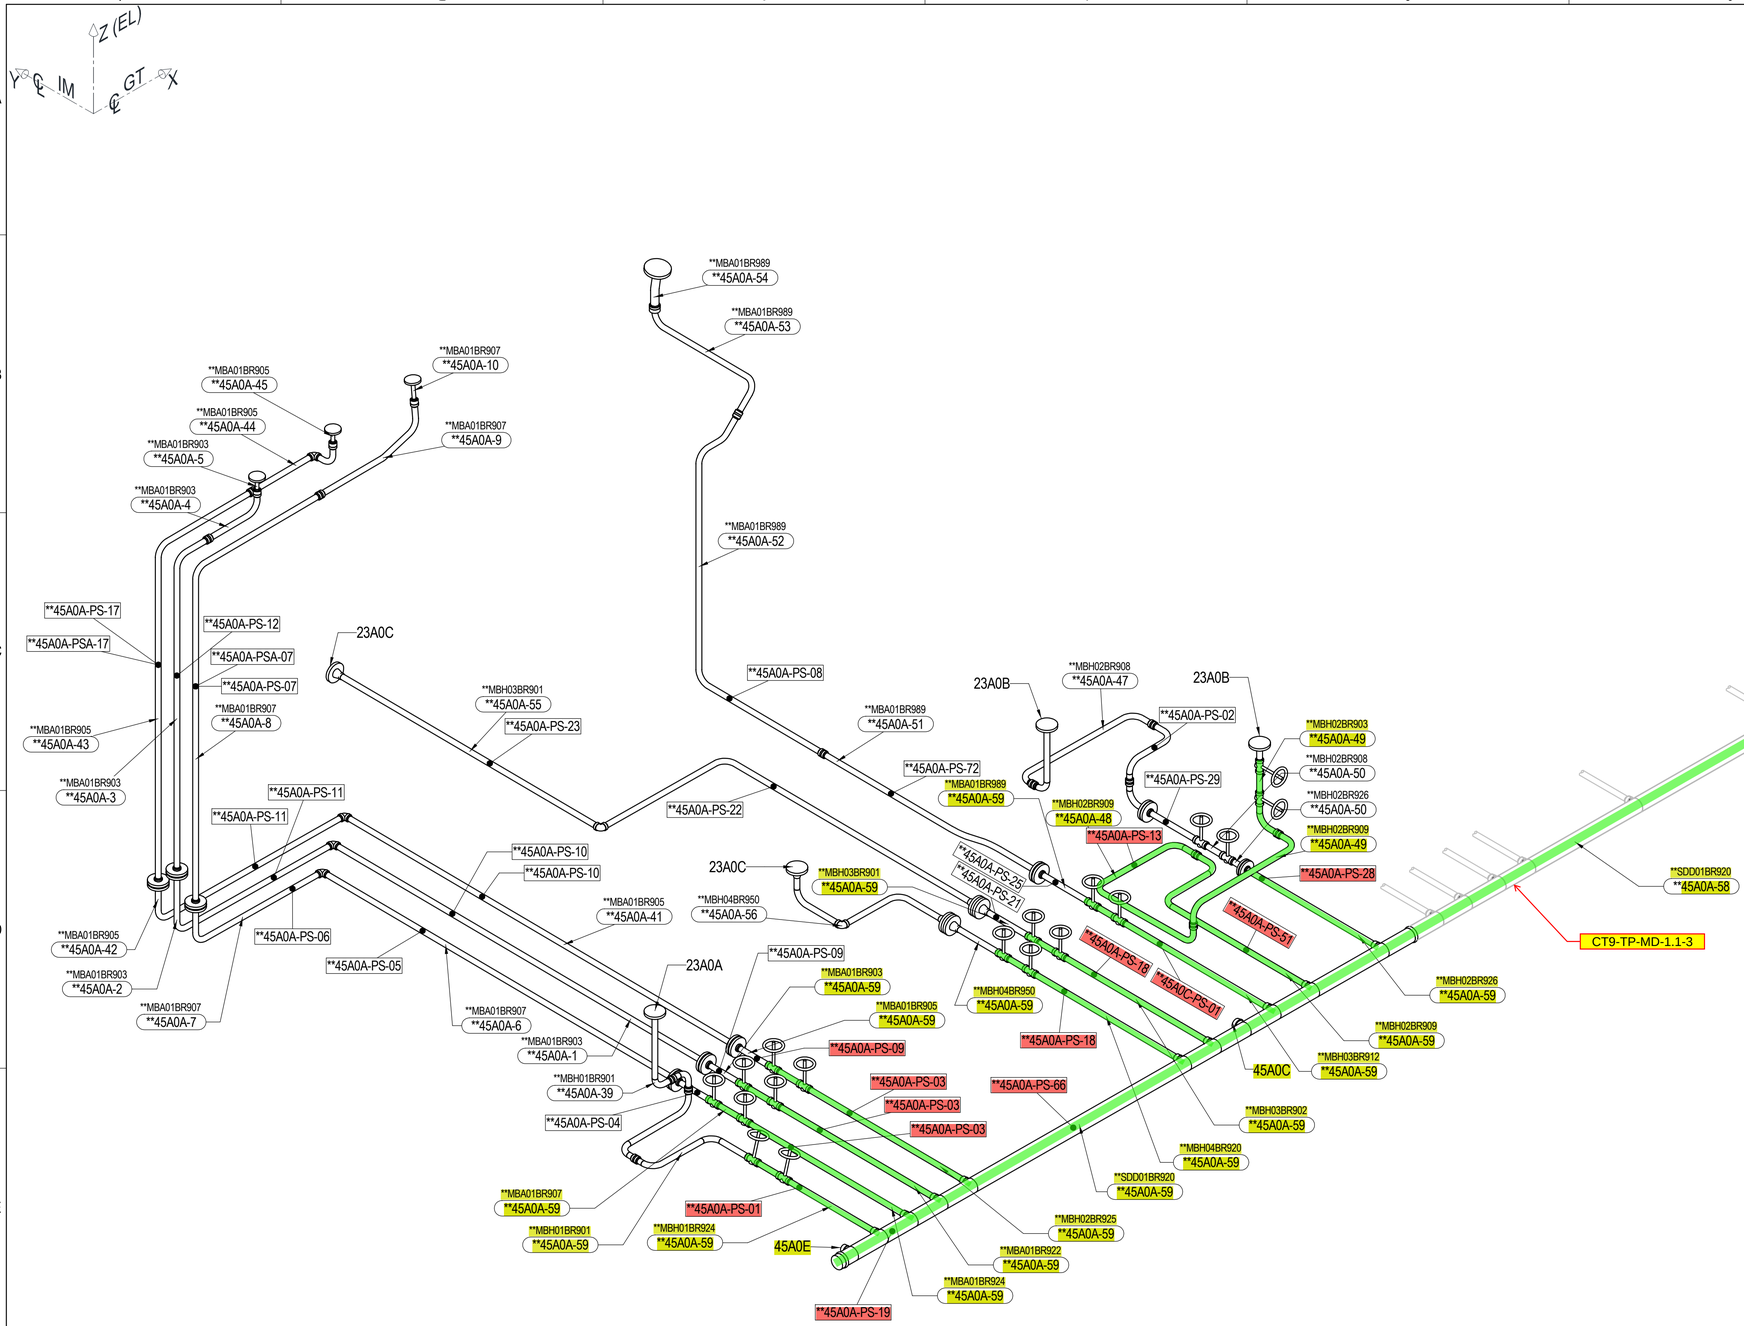

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


N05-ISO-SDD-BR-AA
P&ID DRAWING NUMBER:N01-PID-SDD-00-03
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
-		2 OF 5	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

REVISION RECORD

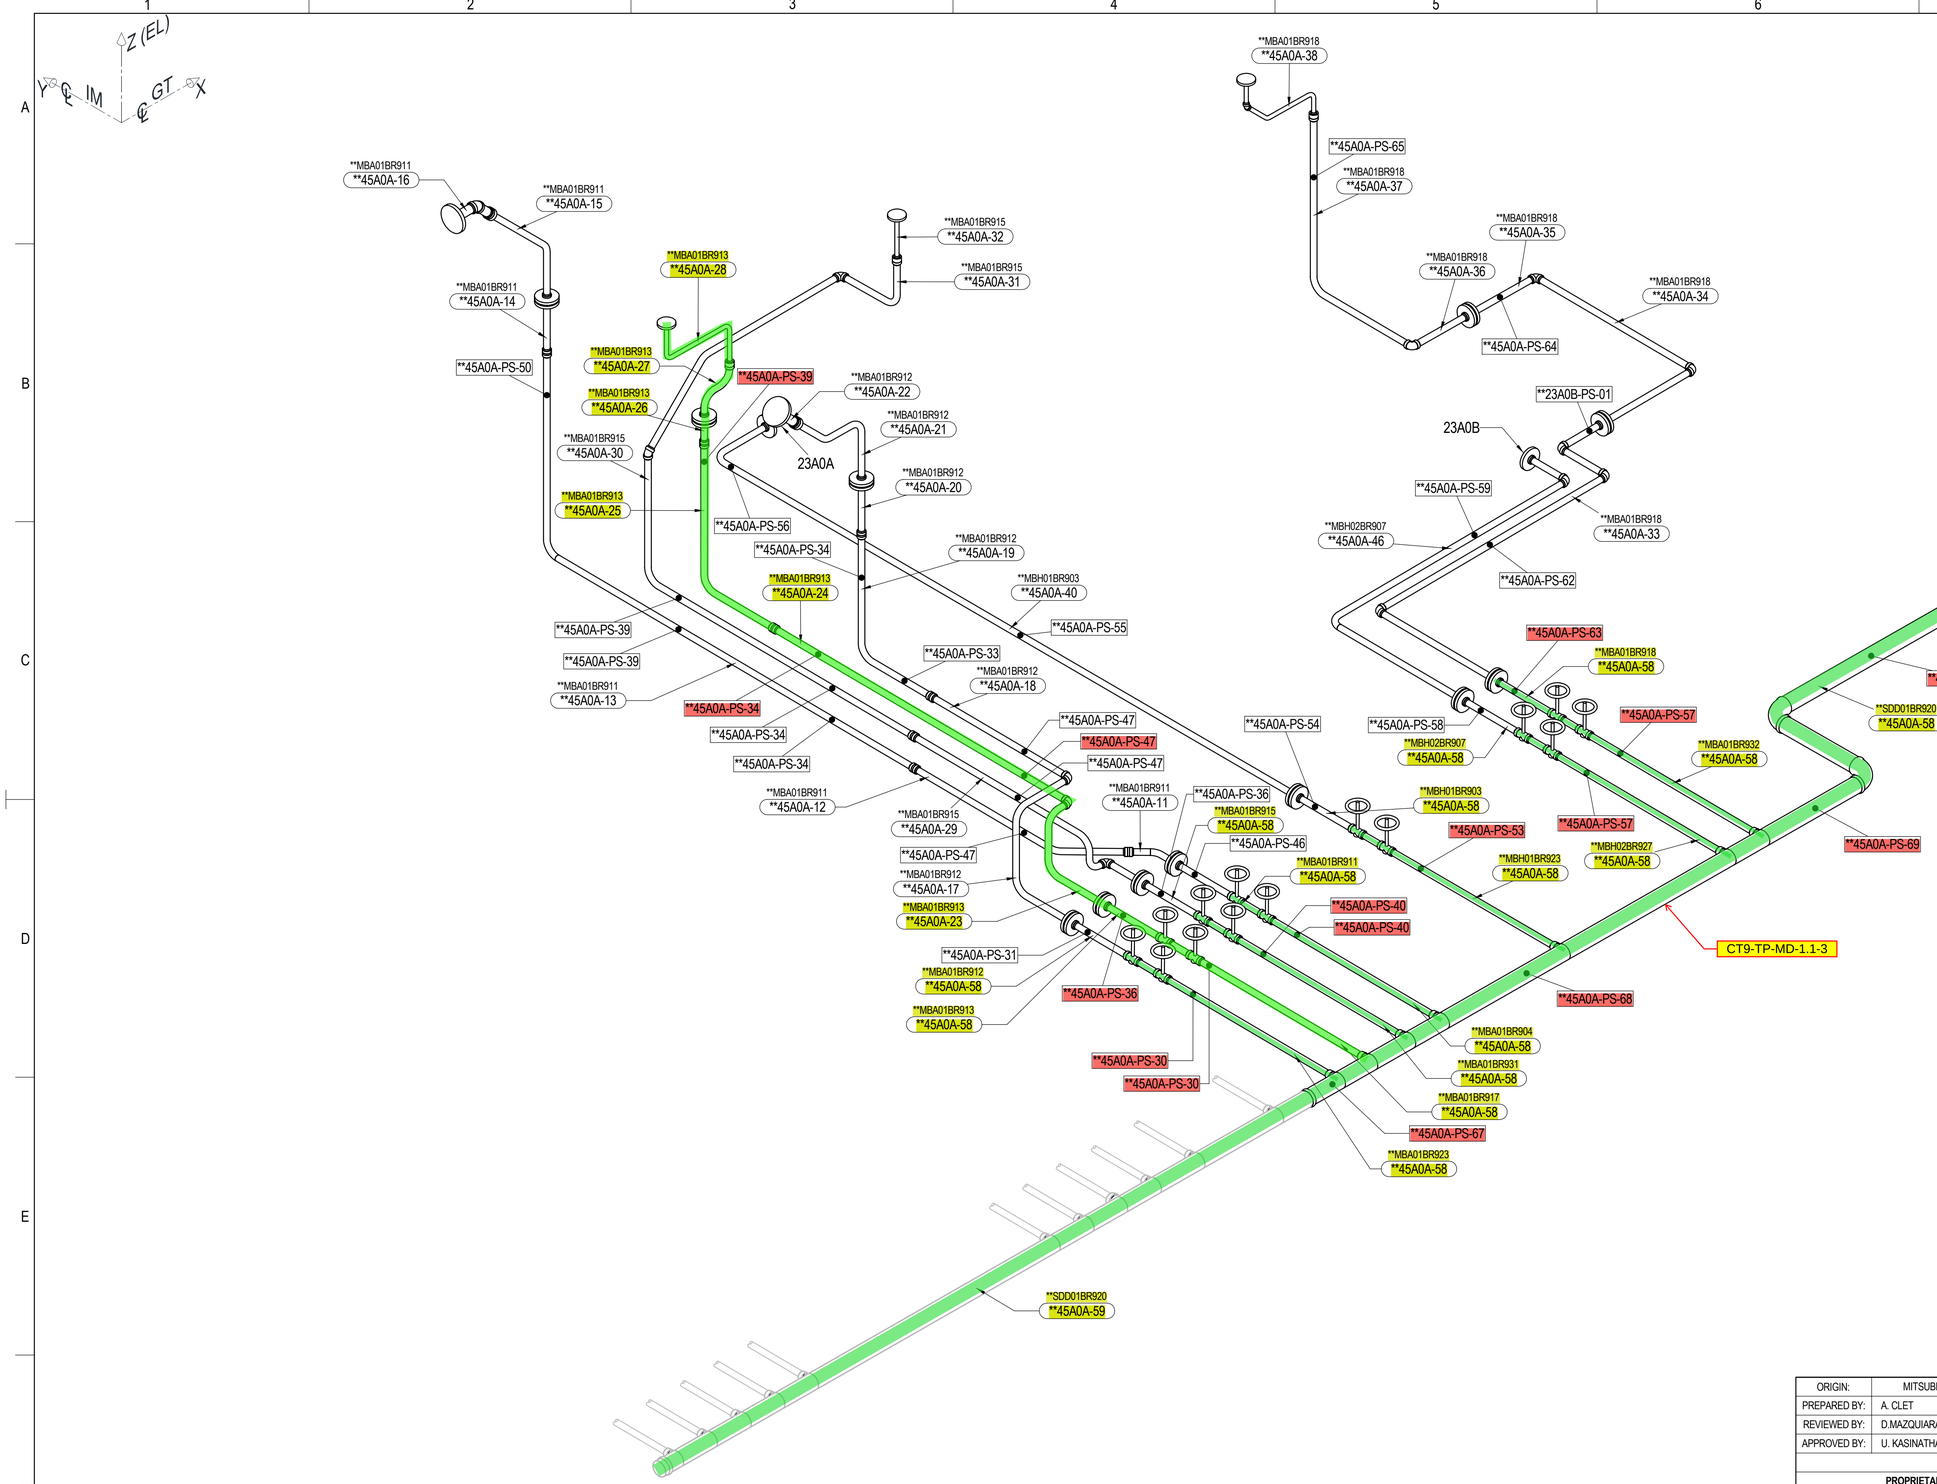

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

	N05-ISO-SDD-BR-AA
	P&ID DRAWING NUMBER:N01-PID-SDD-00-03
	M501JAC GAS TURBINE
PROJECT CODE: -	P&ID: -
PIPELINE:	PAGE NUMBER:
-	3 OF 5

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd


SL2


MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

REVISION RECORD



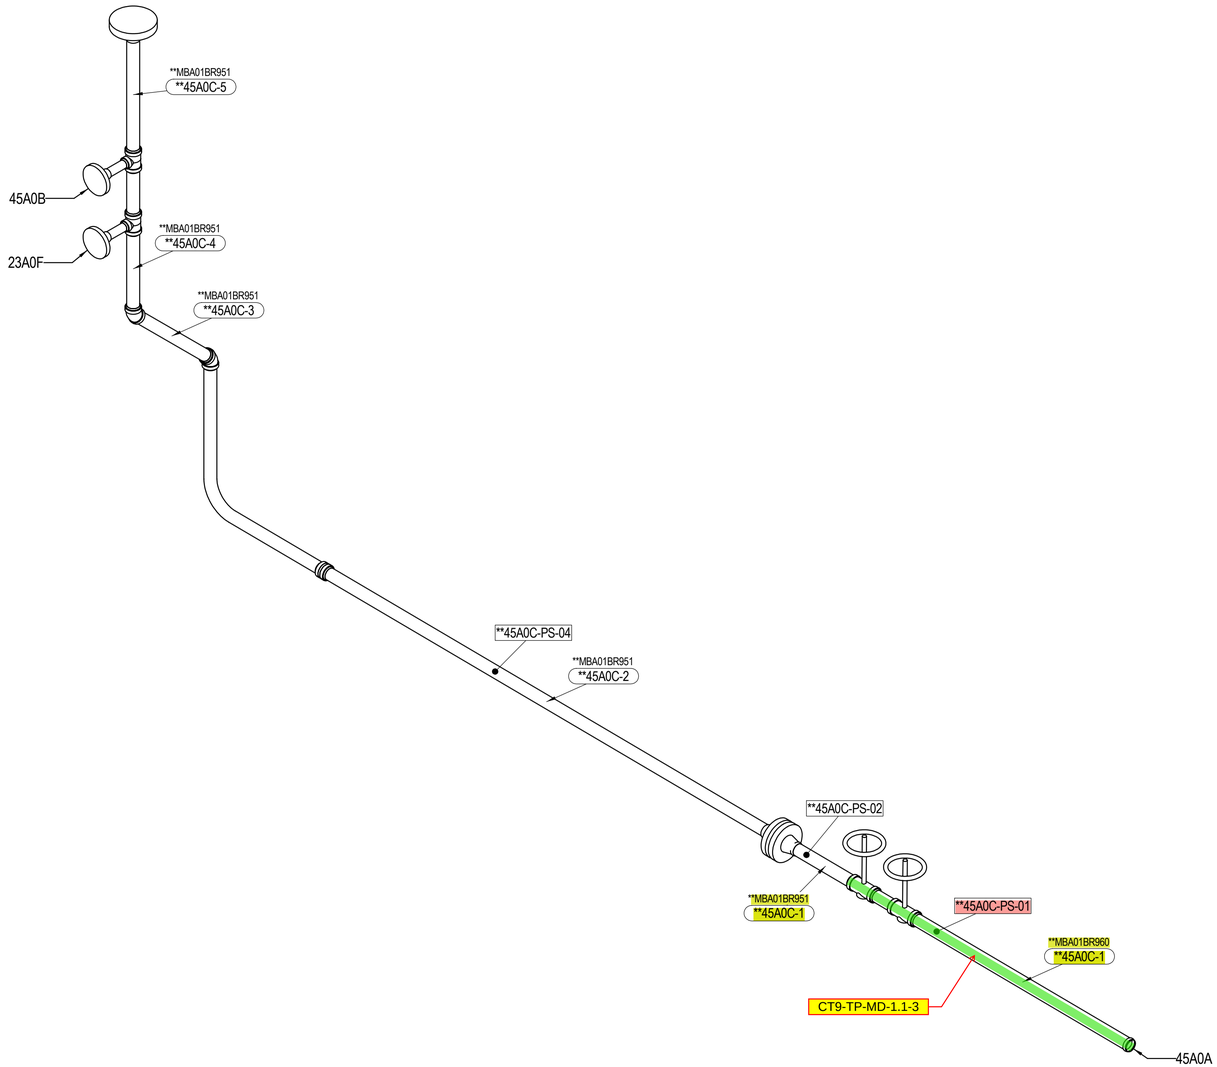

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	R.KUMAR	10/22/2025	**N05-003530**	**0**	**45A0C**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**COMBUSTOR CYLINDER DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBA-BR-AC		
			P&ID DRAWING NUMBER: N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 2 OF 4	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd


SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

REVISION RECORD



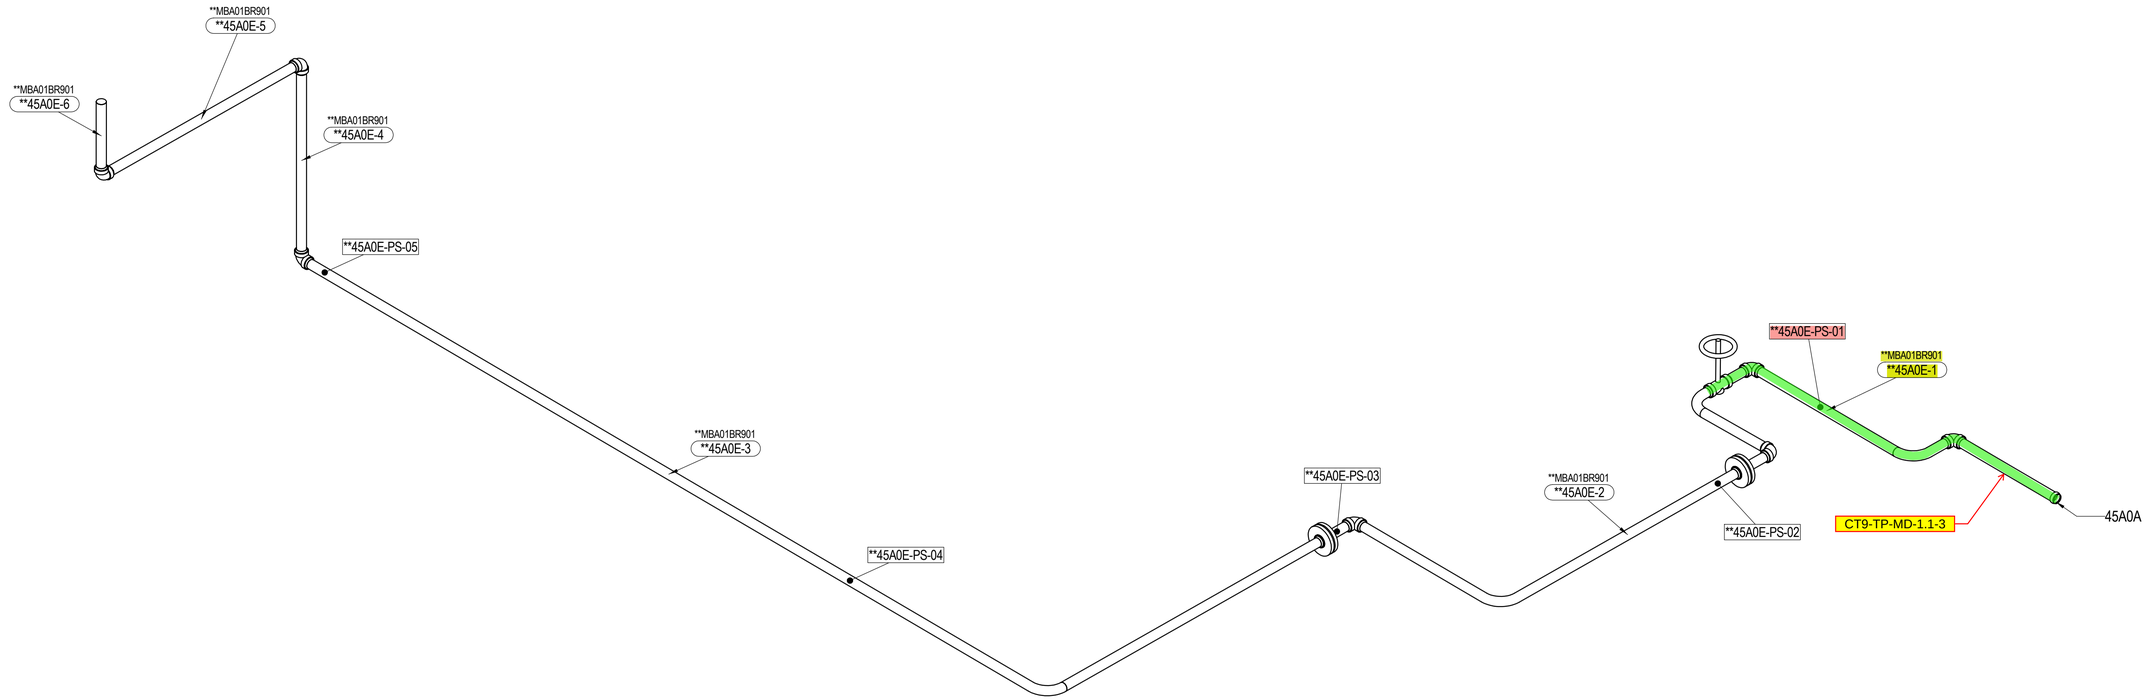

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003531**	**0**	**45A0E**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INLET MANIFOLD DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBA-BR-AF		
			P&ID DRAWING NUMBER: N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 2 OF 4	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

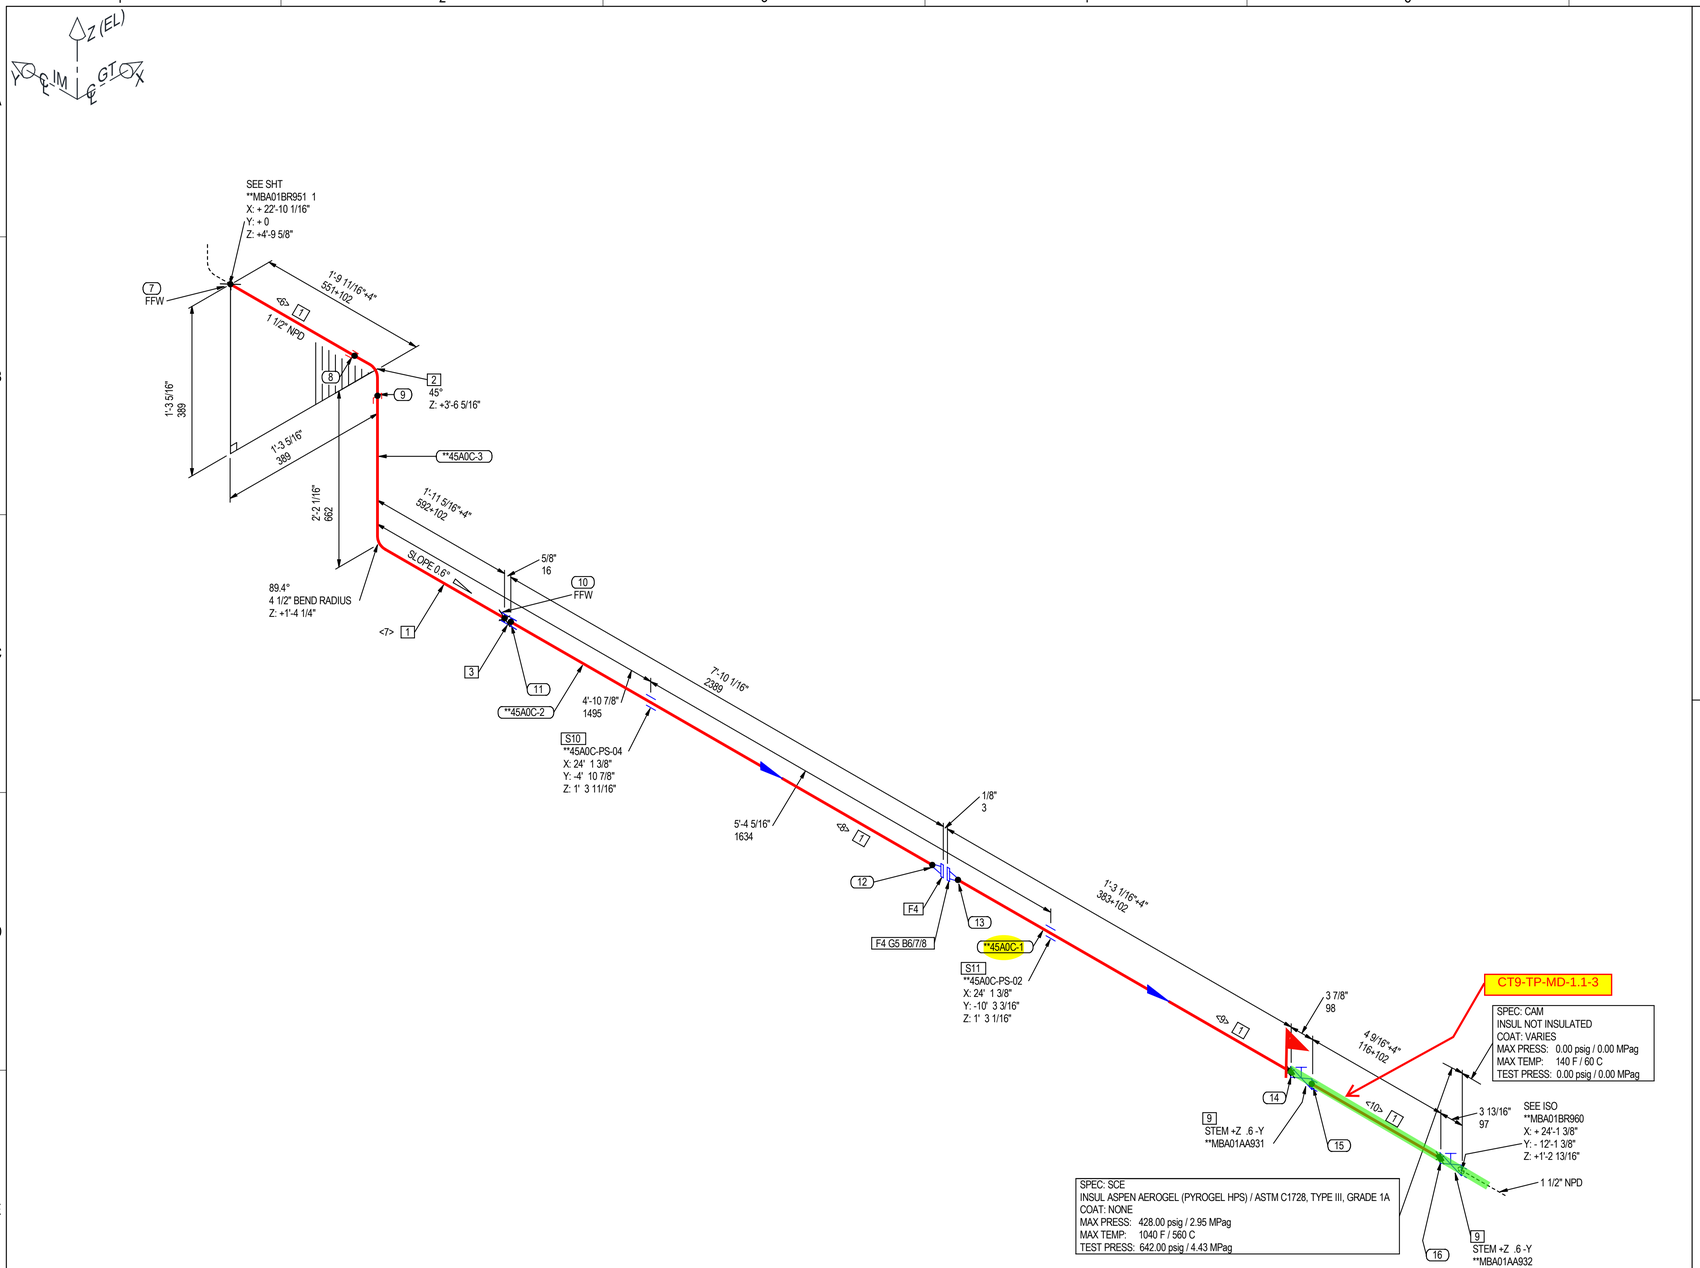

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304H, SEAMLESS	1 1/2	MPAAZZBPZZABBANJ	16.0'
2	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1 1/2	MMBWAWBVZZAAGALP	1
3	COUPLING, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1 1/2	MMAKAWBVZZAAGALP	1
4	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304H, S-40S bore	1 1/2	MFAAAPDCZZAADALP	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1 1/2	MDAPAXAAKXAKUS	1
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B16, 10-UNC - 5 in. Length	3/4	MBAZZAEZZIAGBFXZ	4
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-7, 10-UNC	3/4	MNOZZAEAAZPCEACU	8
8	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	3/4	MWQZZZZBXIBDAMDP	8
9	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316H	1 1/2	MVAAAQBVZZAATALT	2
	PIPE SUPPORTS			
10	PIPE SUPPORT	1 1/2	**45A0C-PS-04	1
11	PIPE SUPPORT	1 1/2	**45A0C-PS-02	1
	SPOOLS			
	**45A0C-1, **45A0C-2, **45A0C-3			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<6>	2'0 13/16"	1 1/2	FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<7>	4'2 5/8"	1 1/2	PLD BEND(1) FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<8>	7'7 1/16"	1 1/2		SQ.CUT	BEVEL	MPAAZZBPZZABBANJ
<9>	1'4 1/16"	1 1/2		BEVEL	SQ.CUT	MPAAZZBPZZABBANJ
<10>	8 9/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
7	SW	F	1 1/2"	1
8	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
10	SW	F	1 1/2"	1
11	SW	S	1 1/2"	1
12	BW	S	1 1/2"	1
13	BW	S	1 1/2"	1
14	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1

PIPING SPEC:	SCE	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	428.00 psig / 2.95 MPag							
TEST PRESS.:	642.00 psig / 4.43 MPag							
MAX. TEMP:	1040 F / 560 C							
INSULATION SPEC:	LU-00331							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:
PREPARED BY:	R.KUMAR	10/22/2025
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025
APPROVED BY:	U. KASINATHAN	10/31/2025


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
N05-003530	0	45A0C
COMBUSTOR CYLINDER DRAIN PIPING		
INTERNAL TO GT PACKAGE		
FOR FABRICATION & ERECTION		
N05-ISO-MBA-BR-AC		
P&ID DRAWING NUMBER: N01-PID-SDD-00-03		
M501JAC GAS TURBINE		
PROJECT CODE: -	P&ID: -	
PIPELINE:	PAGE NUMBER:	
**MBA01BR951	2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

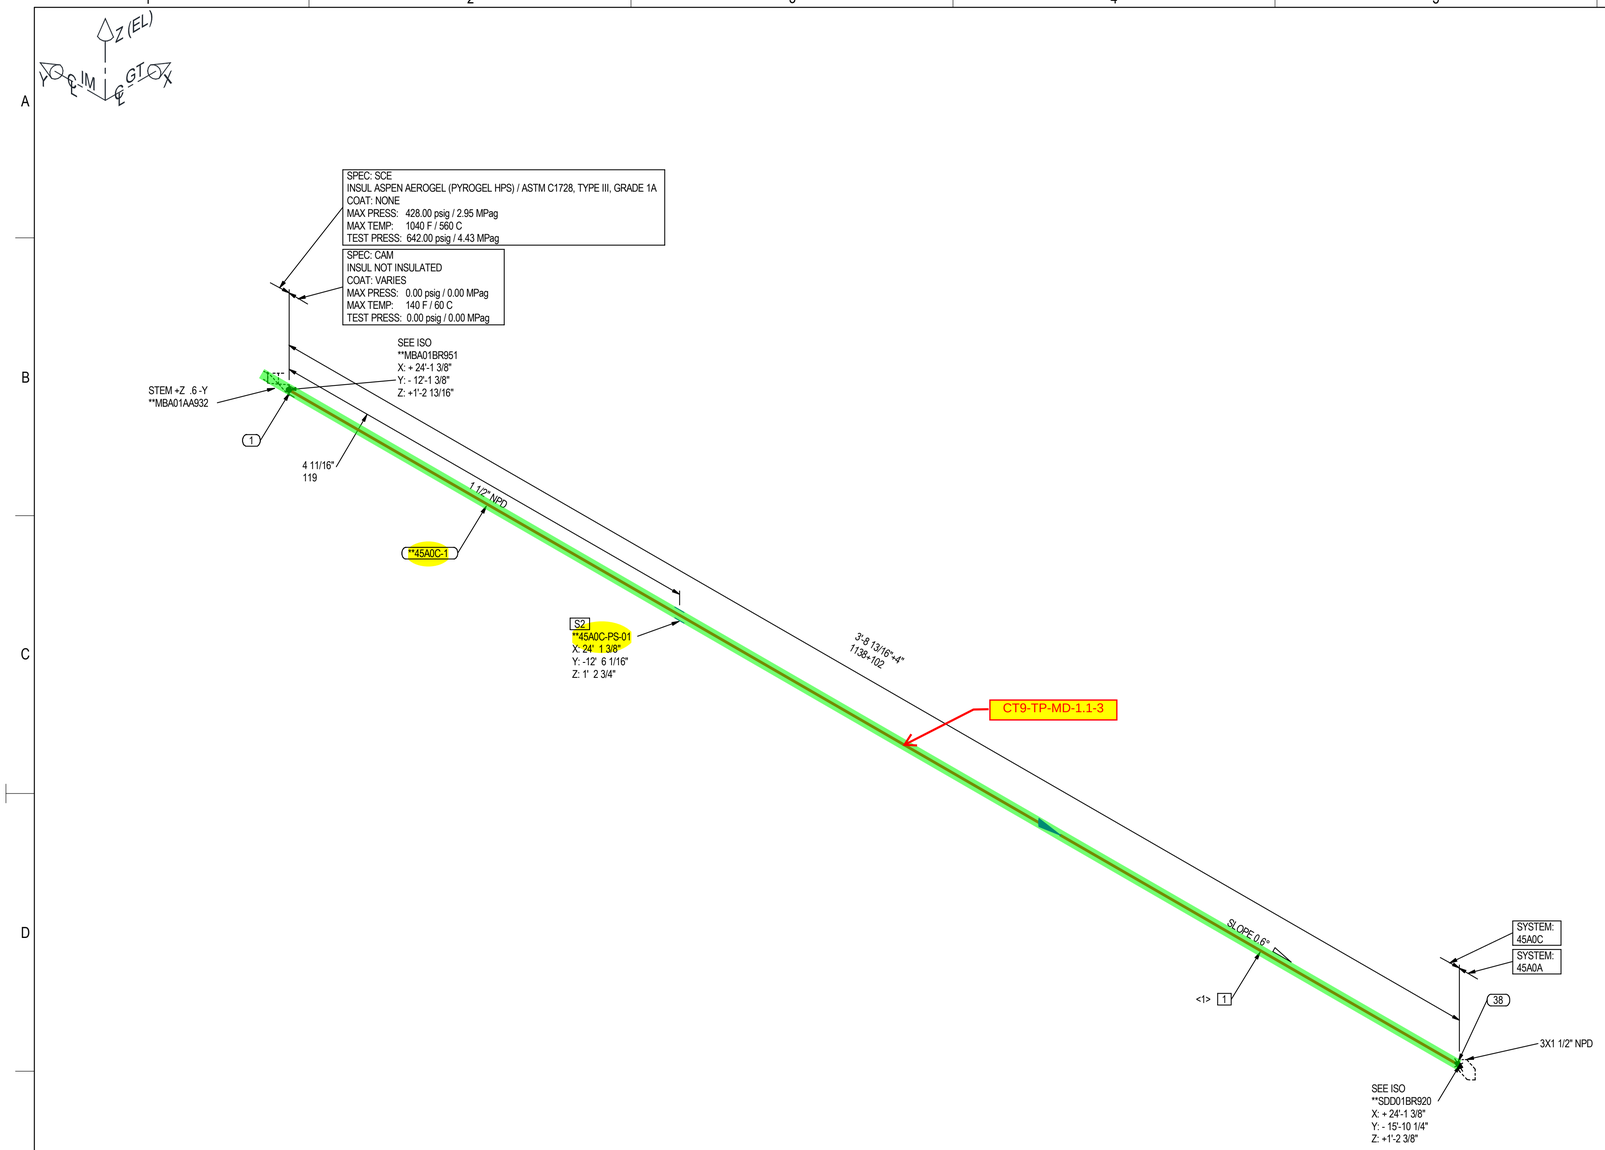

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1 1/2	MPAAZZBPZZABAABS	4.1'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1 1/2	**45A0C-PS-01	1
	SPOOLS			
	**45A0C-1			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	4'0 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX##-### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1 1/2"	1
38	SW	S	1 1/2"	1

PIPING SPEC:	CAM
FLUID CODE:	ZW, WASHING WATER
MAX. PRESS.:	0.00 psig / 0.00 MPag
TEST PRESS.:	0.00 psig / 0.00 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REV. #	DESCRIPTION	BY	CHK	APP	DATE
	REVISION RECORD				

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✖ FW - FIELD WELD
✖ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	R.KUMAR	10/22/2025	**N05-003530**	**0**	**45A0C**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**COMBUSTOR CYLINDER DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION
N05-ISO-MBA-BR-AC
P&ID DRAWING NUMBER: N01-PID-SDD-00-03
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**MBA01BR960		1 OF 1	

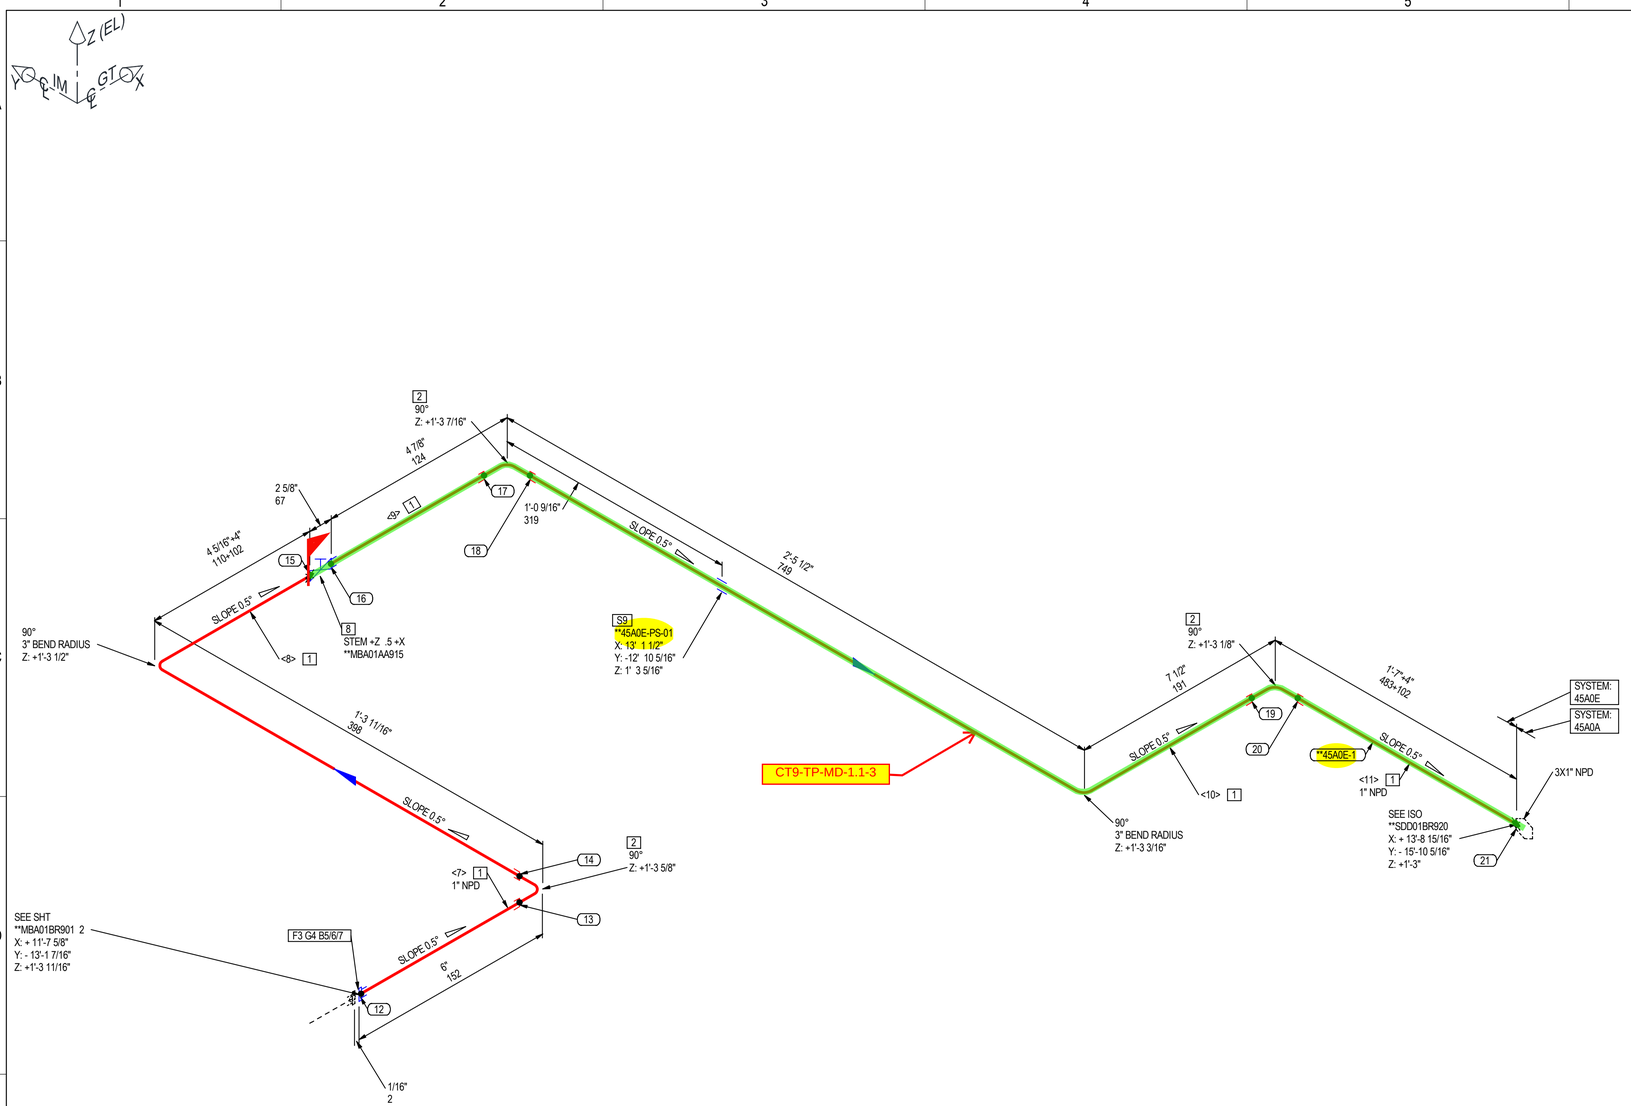

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	7.2'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A105	1	MMCKAWBVZZAAGABQ	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A105	1	MFABAHABZZAADABQ	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBEUZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 13-UNC	1/2	MNOZZACAAZBGAAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A1008 CS-B	1/2	MWQZZZZBUIBBXADP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	1
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0E-PS-01	1
	SPOOLS			
	**45A0E-1			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<7>	4 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<8>	1'9 3/4"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<9>	3 15/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<10>	2'9 13/16"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<11>	1'10 1/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX##-### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH # SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK # ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
12	SW	S	1"	1
13	SW	S	1"	1
14	SW	S	1"	1
15	SW	S	1"	1
16	SW	S	1"	1
17	SW	S	1"	1
18	SW	S	1"	1
19	SW	S	1"	1
20	SW	S	1"	1
21	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003531 / 0 / 45A0E
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INLET MANIFOLD DRAIN PIPING
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-MBA-BR-AF
			P&ID DRAWING NUMBER: N01-PID-SDD-00-03
			M501JAC GAS TURBINE
PROJECT CODE:	-	P&ID:	-
PIPELINE:	**MBA01BR901	PAGE NUMBER:	3 OF 3

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

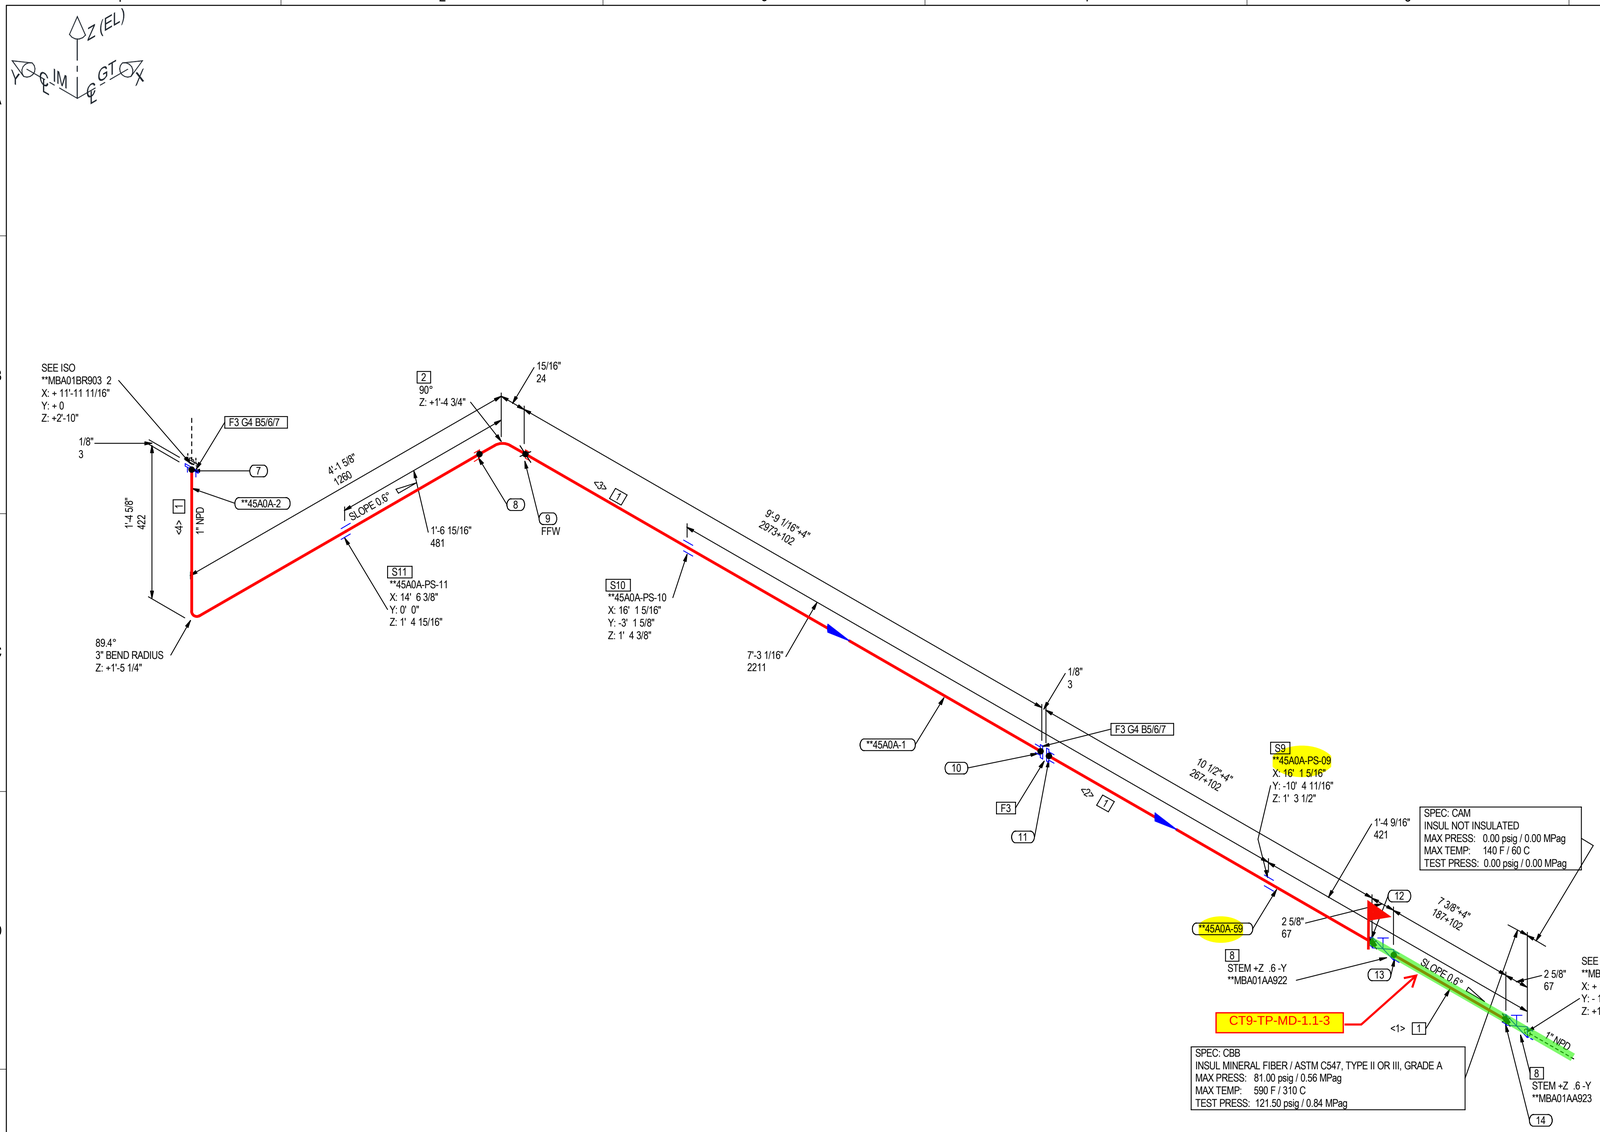

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	17.5'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A105	1	MMCKAWBVZZAAGABQ	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAJUS	2
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	16
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A1008 CS-B	5/8	MWQZZZZBXIBCXADP	16
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-09	1
10	PIPE SUPPORT	1	**45A0A-PS-10	1
11	PIPE SUPPORT	1	**45A0A-PS-11	1
	SPOOLS			
	**45A0A-1, **45A0A-2, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	11 3/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	1'1 7/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<3>	10'0 7/16"	1	FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<4>	5'3 7/16"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
14	SW	S	1"	1
13	SW	S	1"	1
12	SW	S	1"	1
11	SW	S	1"	1
10	SW	S	1"	1
9	SW	F	1"	1
8	SW	S	1"	1
7	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD						
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	81.00 psig / 0.56 MPag							
TEST PRESS.:	121.50 psig / 0.84 MPag							
MAX. TEMP:	590 F / 310 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR903	1 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

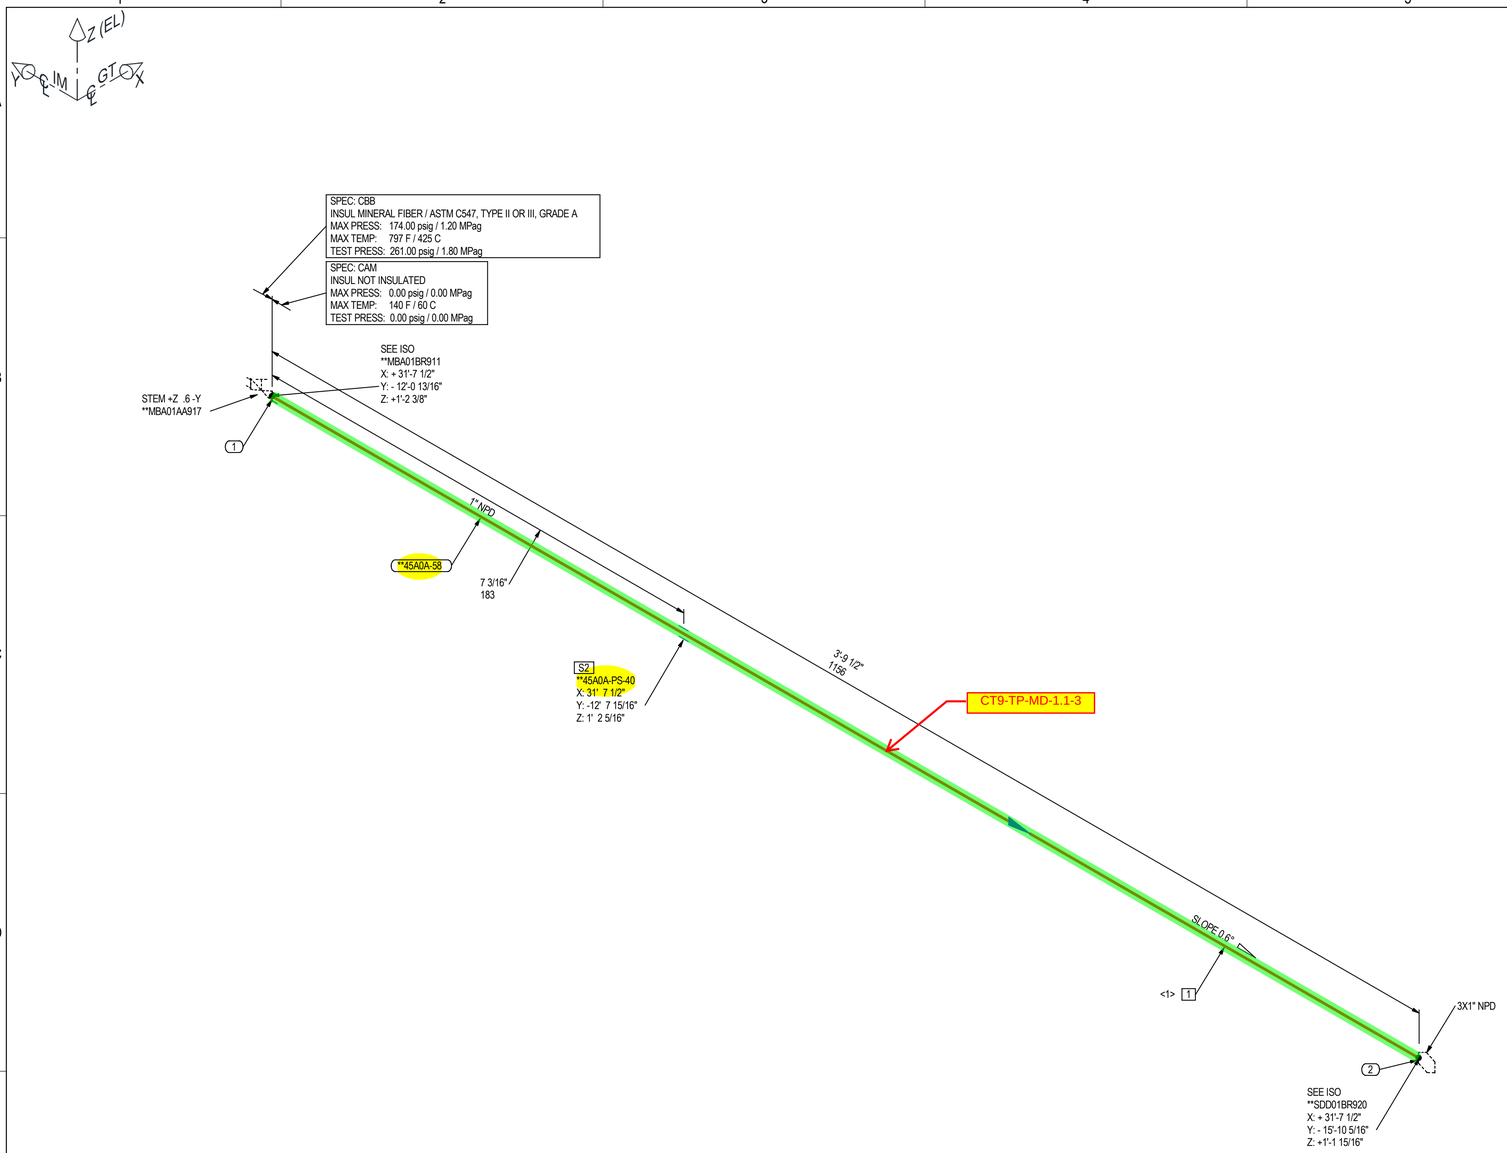

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-40	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR904	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

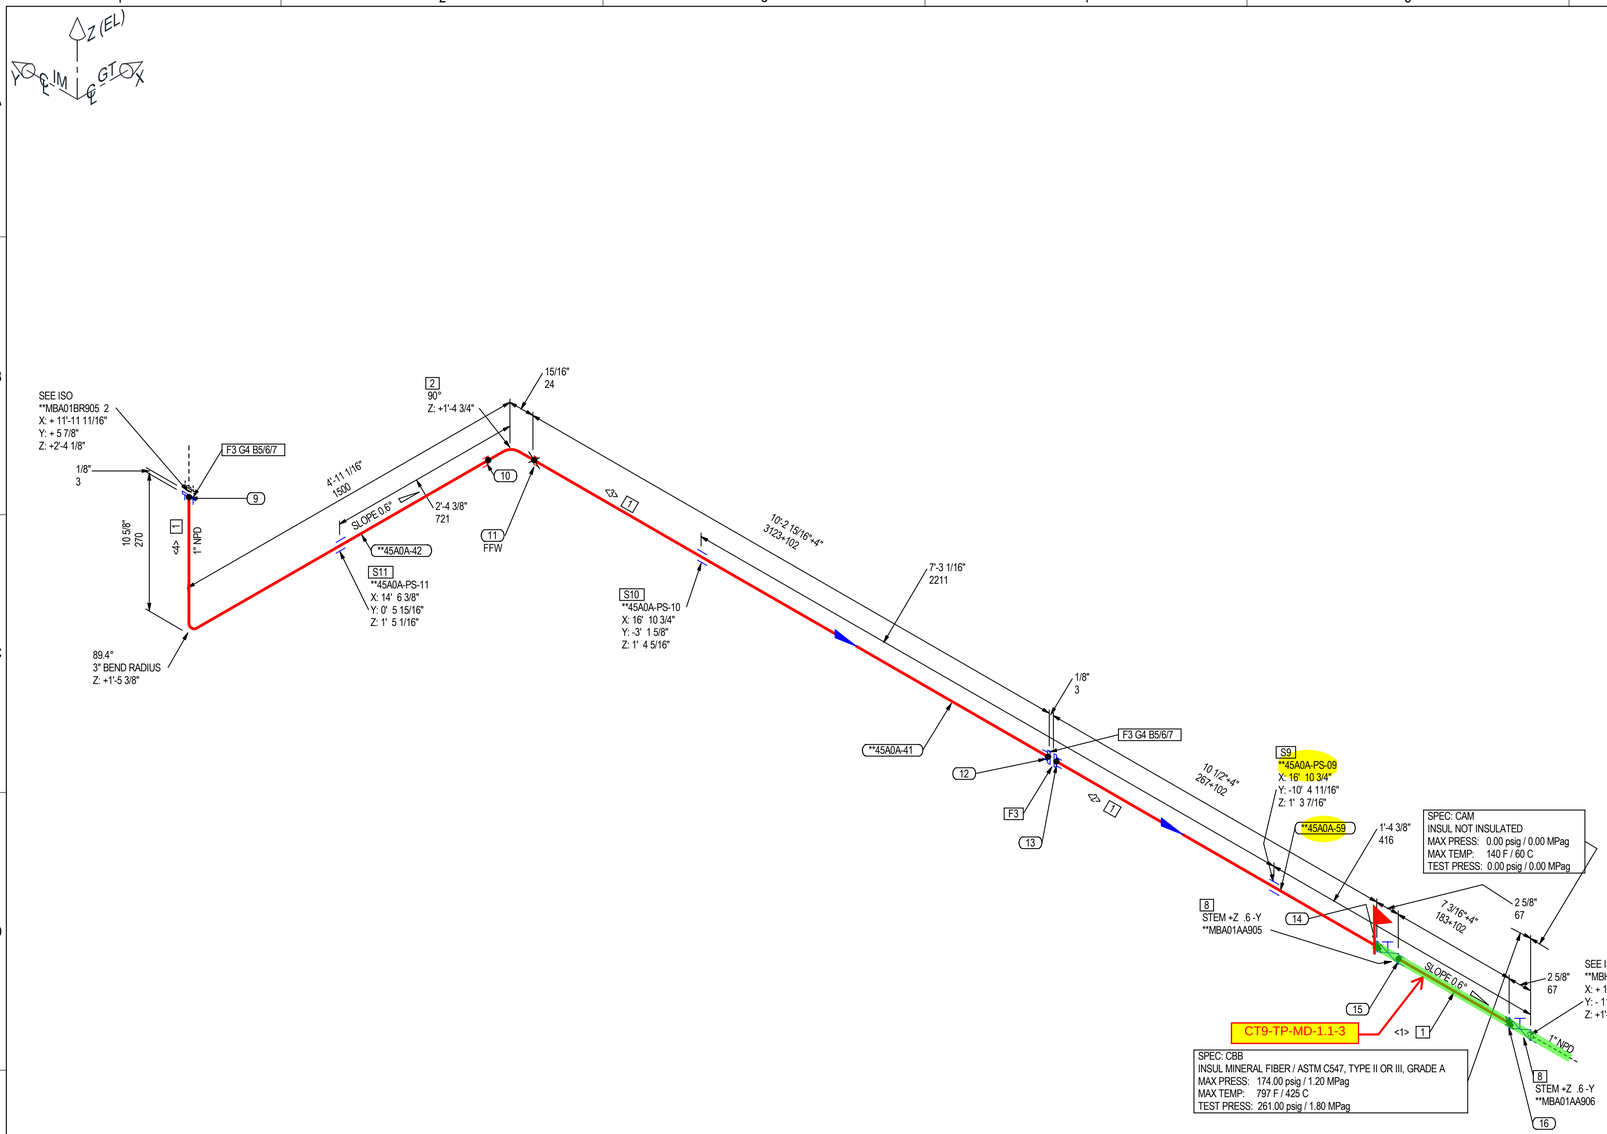

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	18.2'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A105	1	MMCKAWBVZZAAGABQ	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	2
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	16
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	16
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-09	1
10	PIPE SUPPORT	1	**45A0A-PS-10	1
11	PIPE SUPPORT	1	**45A0A-PS-11	1
	SPOOLS			
	**45A0A-41, **45A0A-42, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	11 3/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	1'1 7/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<3>	10'6 5/16"	1	FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<4>	5'6 7/8"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
16	SW	S	1"	1
15	SW	S	1"	1
14	SW	S	1"	1
13	SW	S	1"	1
12	SW	S	1"	1
11	SW	F	1"	1
10	SW	S	1"	1
9	SW	S	1"	1

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	174.00 psig / 1.20 MPag							
TEST PRESS.:	261.00 psig / 1.80 MPag							
MAX. TEMP:	797 F / 425 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/15/2023	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR905	1 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

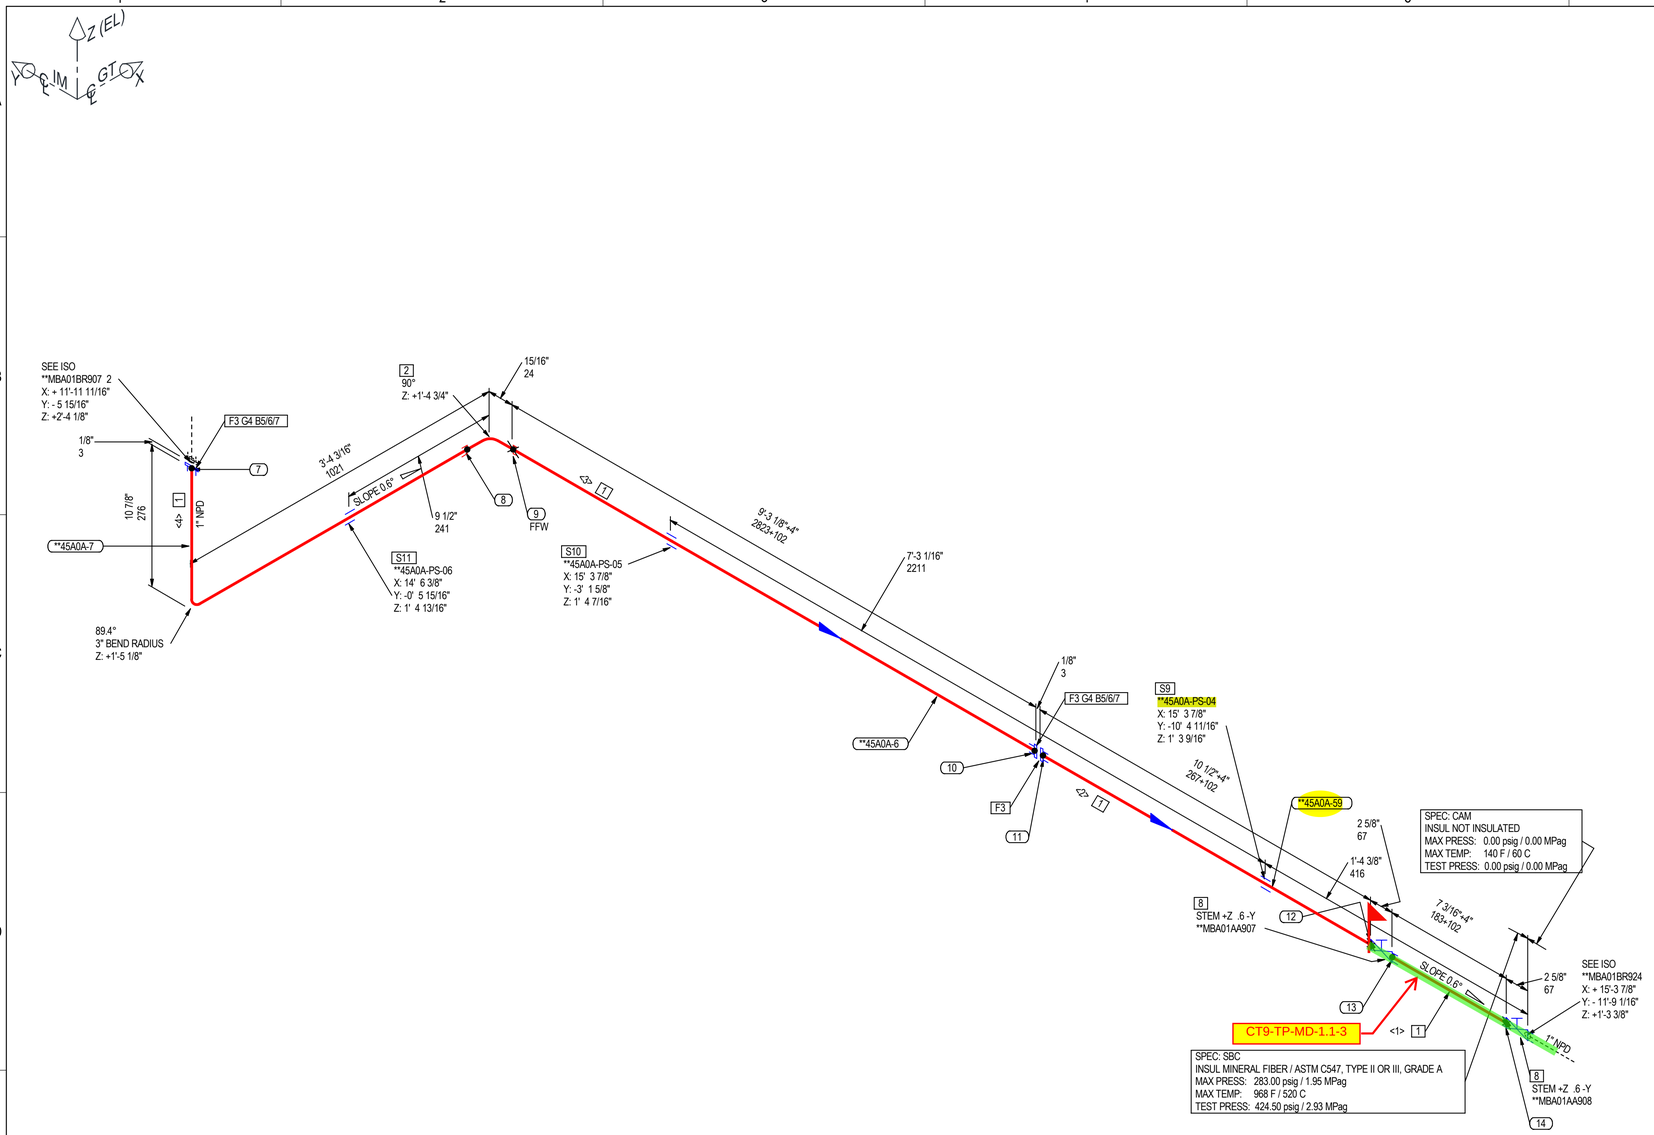

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	15.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMCKAWBVZZAAGALO	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304	1	MFABAMABZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	2
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B16, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBFXZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-7, 11-UNC	5/8	MNOZZADAAZPCEADU	16
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	16
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1	MVAAAQBVZZAATALS	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-04	1
10	PIPE SUPPORT	1	**45A0A-PS-05	1
11	PIPE SUPPORT	1	**45A0A-PS-06	1
	SPOOLS			
	**45A0A-6, **45A0A-7, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	11 3/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	1'1 7/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	9'6 1/2"	1	FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	4'0 3/16"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
14	SW	S	1"	1
13	SW	S	1"	1
12	SW	S	1"	1
11	SW	S	1"	1
10	SW	S	1"	1
9	SW	F	1"	1
8	SW	S	1"	1
7	SW	S	1"	1

PIPING SPEC:	SBC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	283.00 psig / 1.95 MPag							
TEST PRESS.:	424.50 psig / 2.93 MPag							
MAX. TEMP:	968 F / 520 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR907	1 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

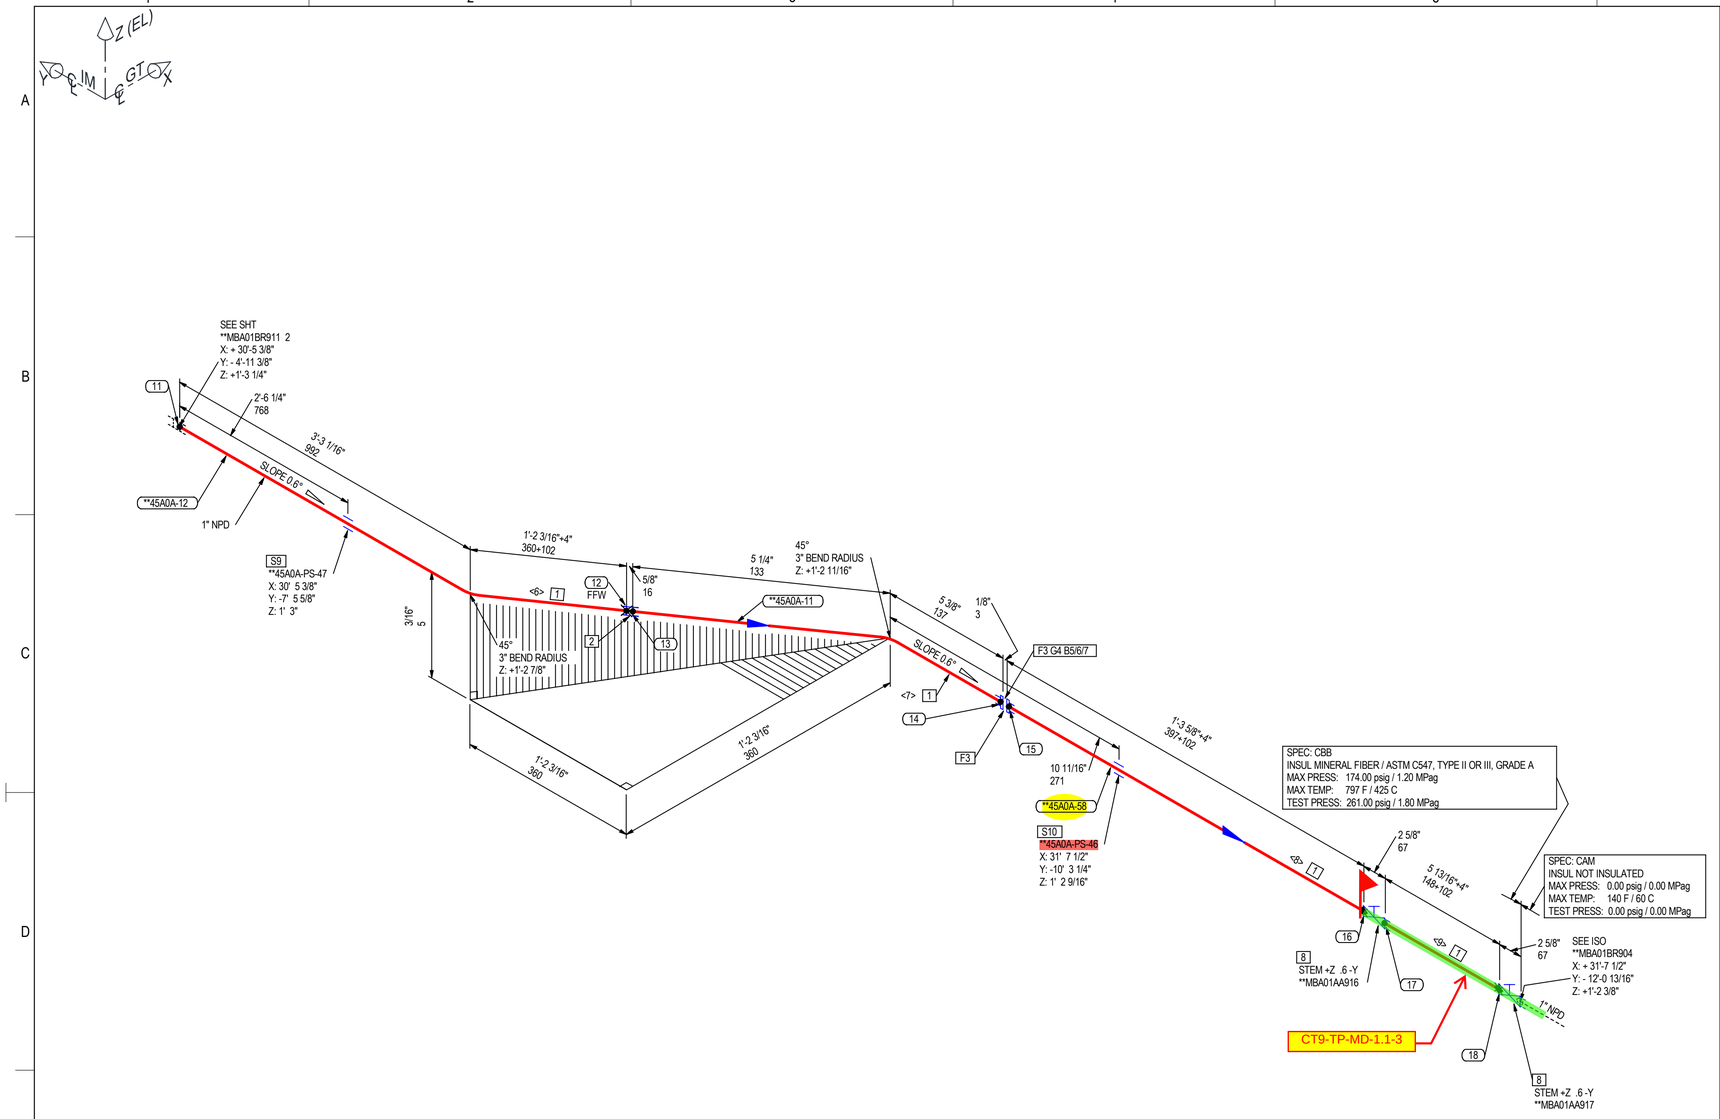

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	8.0'
2	COUPLING, CL3000, SWE, ASME B16.11, ASTM A105	1	MMAKAWBVZZAAGABQ	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-47	1
10	PIPE SUPPORT	1	**45A0A-PS-46	1
	SPOOLS			
	**45A0A-11, **45A0A-12, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<6>	4'9 1/16"	1	PLD BEND(1) FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<7>	9 7/8"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<8>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<9>	9 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
11	SW	S	1"	1
12	SW	F	1"	1
13	SW	S	1"	1
14	SW	S	1"	1
15	SW	S	1"	1
16	SW	S	1"	1
17	SW	S	1"	1
18	SW	S	1"	1

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	174.00 psig / 1.20 MPag							
TEST PRESS.:	261.00 psig / 1.80 MPag							
MAX. TEMP:	797 F / 425 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR911	3 OF 3	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST



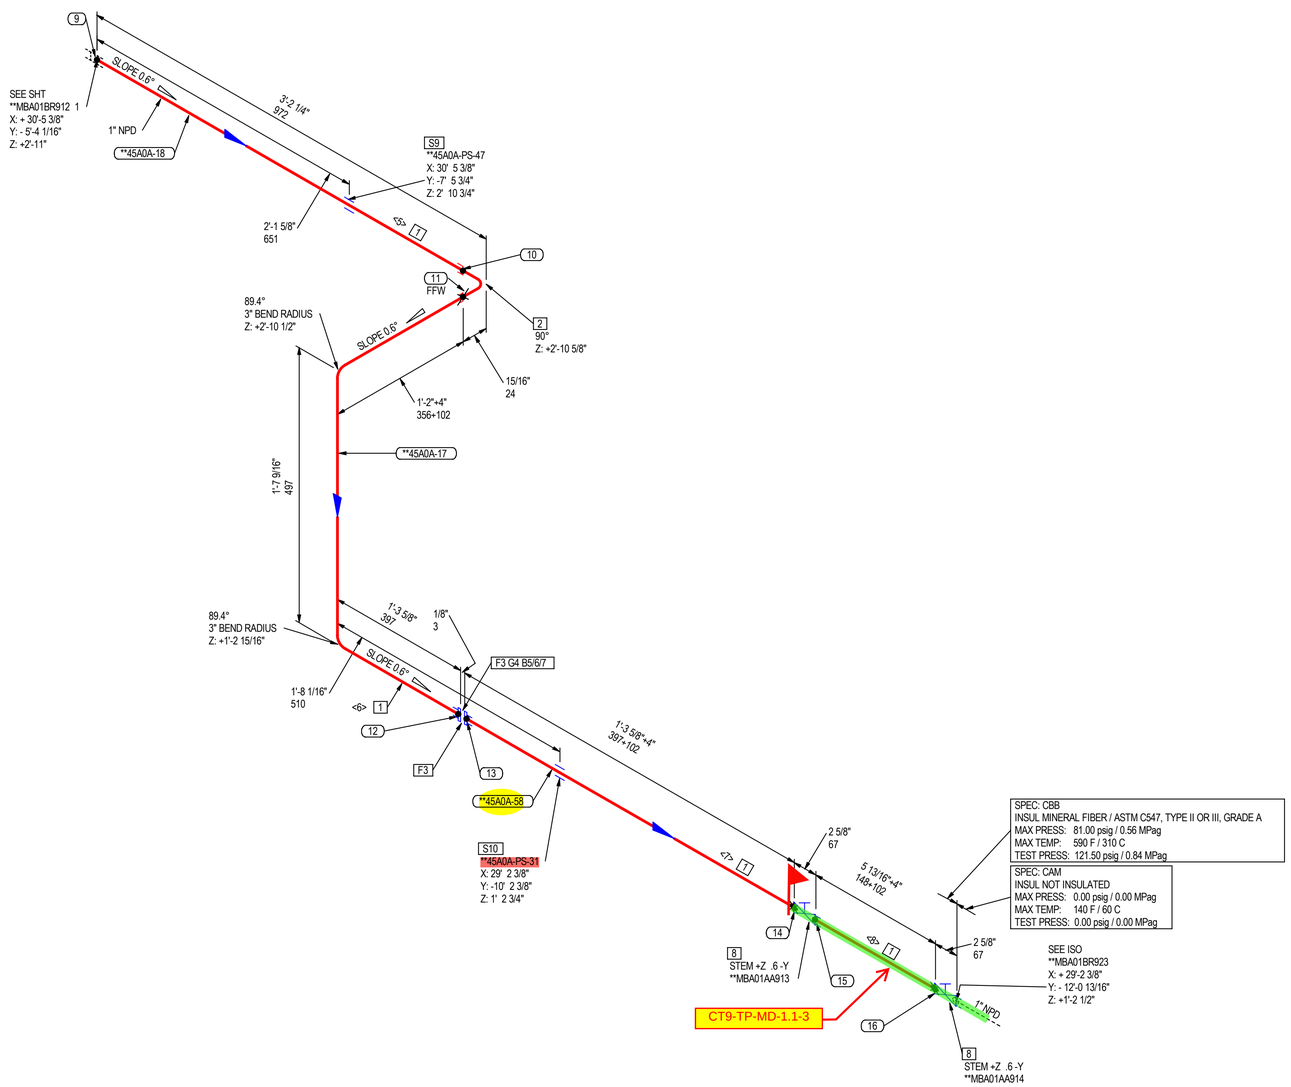

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	9.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A105	1	MMCKAWBVZZAAGABQ	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAJUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A1008 CS-B	5/8	MWQZZZZBXIBCXADP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-47	1
10	PIPE SUPPORT	1	**45A0A-PS-31	1

SPOOLS

**45A0A-17, **45A0A-18, **45A0A-58

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	3'1 5/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<6>	4'2 1/16"	1	PLD BEND(2) FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<7>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<8>	9 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
9	SW	S	1"	1
10	SW	S	1"	1
11	SW	F	1"	1
12	SW	S	1"	1
13	SW	S	1"	1
14	SW	S	1"	1
15	SW	S	1"	1
16	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	81.00 psig / 0.56 MPag							
TEST PRESS.:	121.50 psig / 0.84 MPag							
MAX. TEMP:	590 F / 310 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR912	2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST



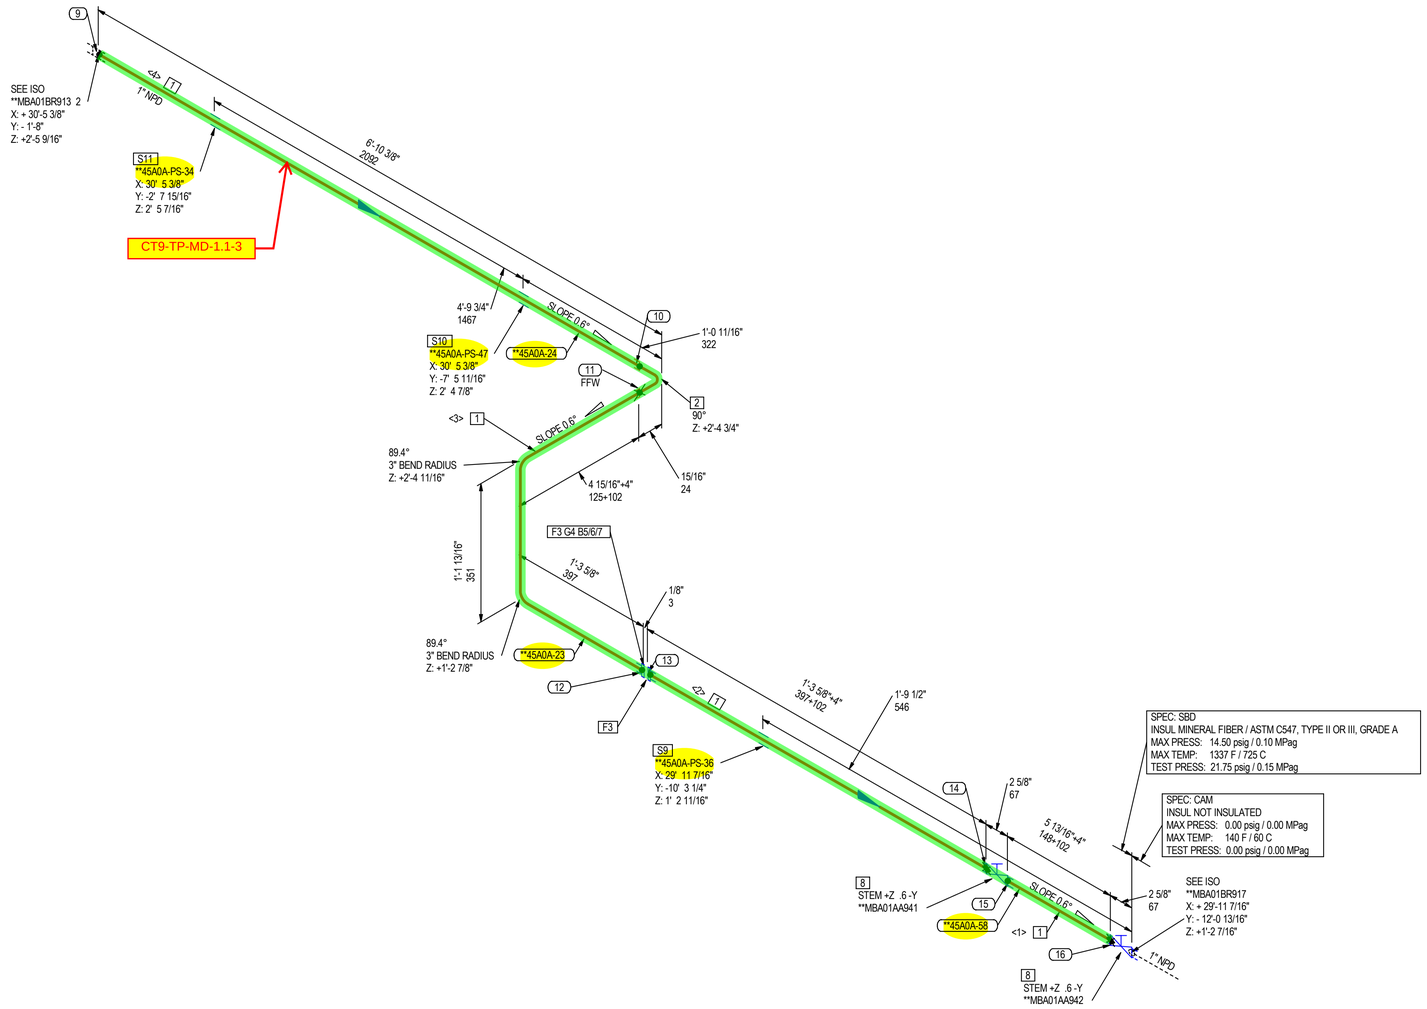

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304H, SEAMLESS	1	MPAAZZBPZZABBANJ	12.2'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1	MMCKAWBVZZAAGALP	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304H	1	MFABAMABZZAADALP	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 11-UNC	5/8	MNOZZADAAZPCJADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F304H	1	MVAAAQBVZZAATALP	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-36	1
10	PIPE SUPPORT	1	**45A0A-PS-47	1
11	PIPE SUPPORT	1	**45A0A-PS-34	1
	SPOOLS			
	**45A0A-23, **45A0A-24, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<2>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<3>	2'11 1/4"	1	PLD BEND(2) FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<4>	6'9 7/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
16	SW	S	1"	1
15	SW	S	1"	1
14	SW	S	1"	1
13	SW	S	1"	1
12	SW	S	1"	1
11	SW	F	1"	1
10	SW	S	1"	1
9	SW	S	1"	1

PIPING SPEC:	SBD	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	1337 F / 725 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR913	1 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



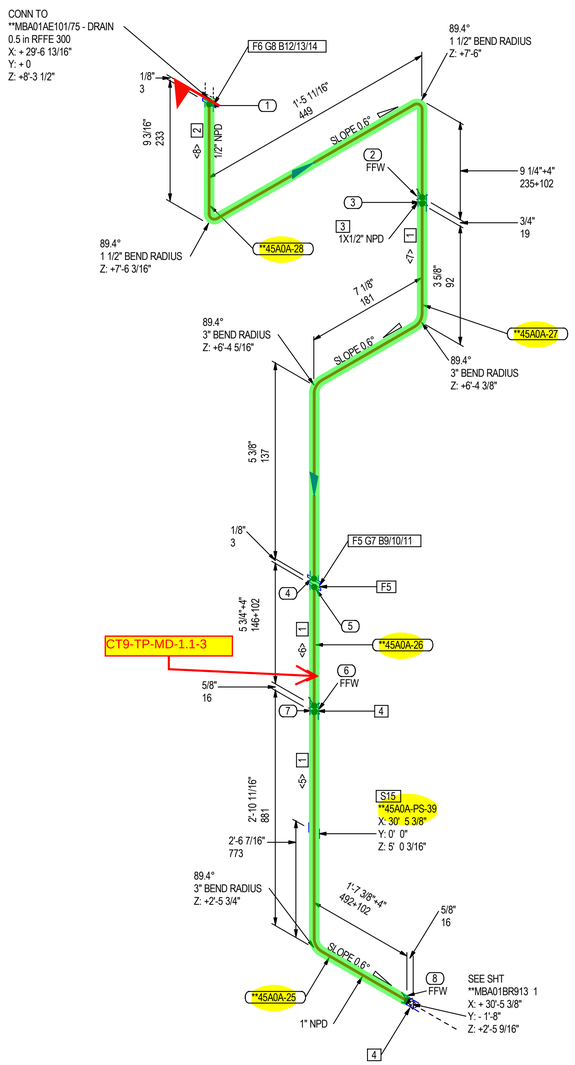

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304H, SEAMLESS	1	MPAAZZBPZZABBANJ	6.6'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304H, SEAMLESS	1/2	MPAAZZBPZZABBANJ	3.2'
3	COUPLING REDUCING, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1X1/2	MMBEAWBVZZAAGALP	1
4	COUPLING, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1	MMAKAWBVZZAAGALP	2
5	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304H	1	MFABAMABZZAADALP	2
6	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304H	1/2	MFABAMABZZAADALP	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
7	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	1
8	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1/2	MDAMAXAAKXAKUS	1
9	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBLJZ	4
10	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 11-UNC	5/8	MNOZZADAAZPCJADU	8
11	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	8
12	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
13	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
14	WASHER, SPECIAL SHAPED LOCK, 0.5in NPD, 0.8mm THK, MHPSA G1-90943, ASTM A240-304	1/2	MWQZZZZBUIBCAMDP	8
	PIPE SUPPORTS			
15	PIPE SUPPORT	1	**45A0A-PS-39	1

SPOOLS

**45A0A-25, **45A0A-26, **45A0A-27, **45A0A-28

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	4'8 13/16"	1	PLD BEND(1) FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<6>	9 1/8"	1	FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<7>	1'1"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<8>	3'2 1/4"	1/2	PLD BEND(2) FF WELD(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
8	SW	F	1"	1
7	SW	S	1"	1
6	SW	F	1"	1
5	SW	S	1"	1
4	SW	S	1"	1
3	SW	S	1"	1
2	SW	F	1/2"	1
1	SW	S	1/2"	1

PIPING SPEC:	SBD	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	1337 F / 725 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR913	2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

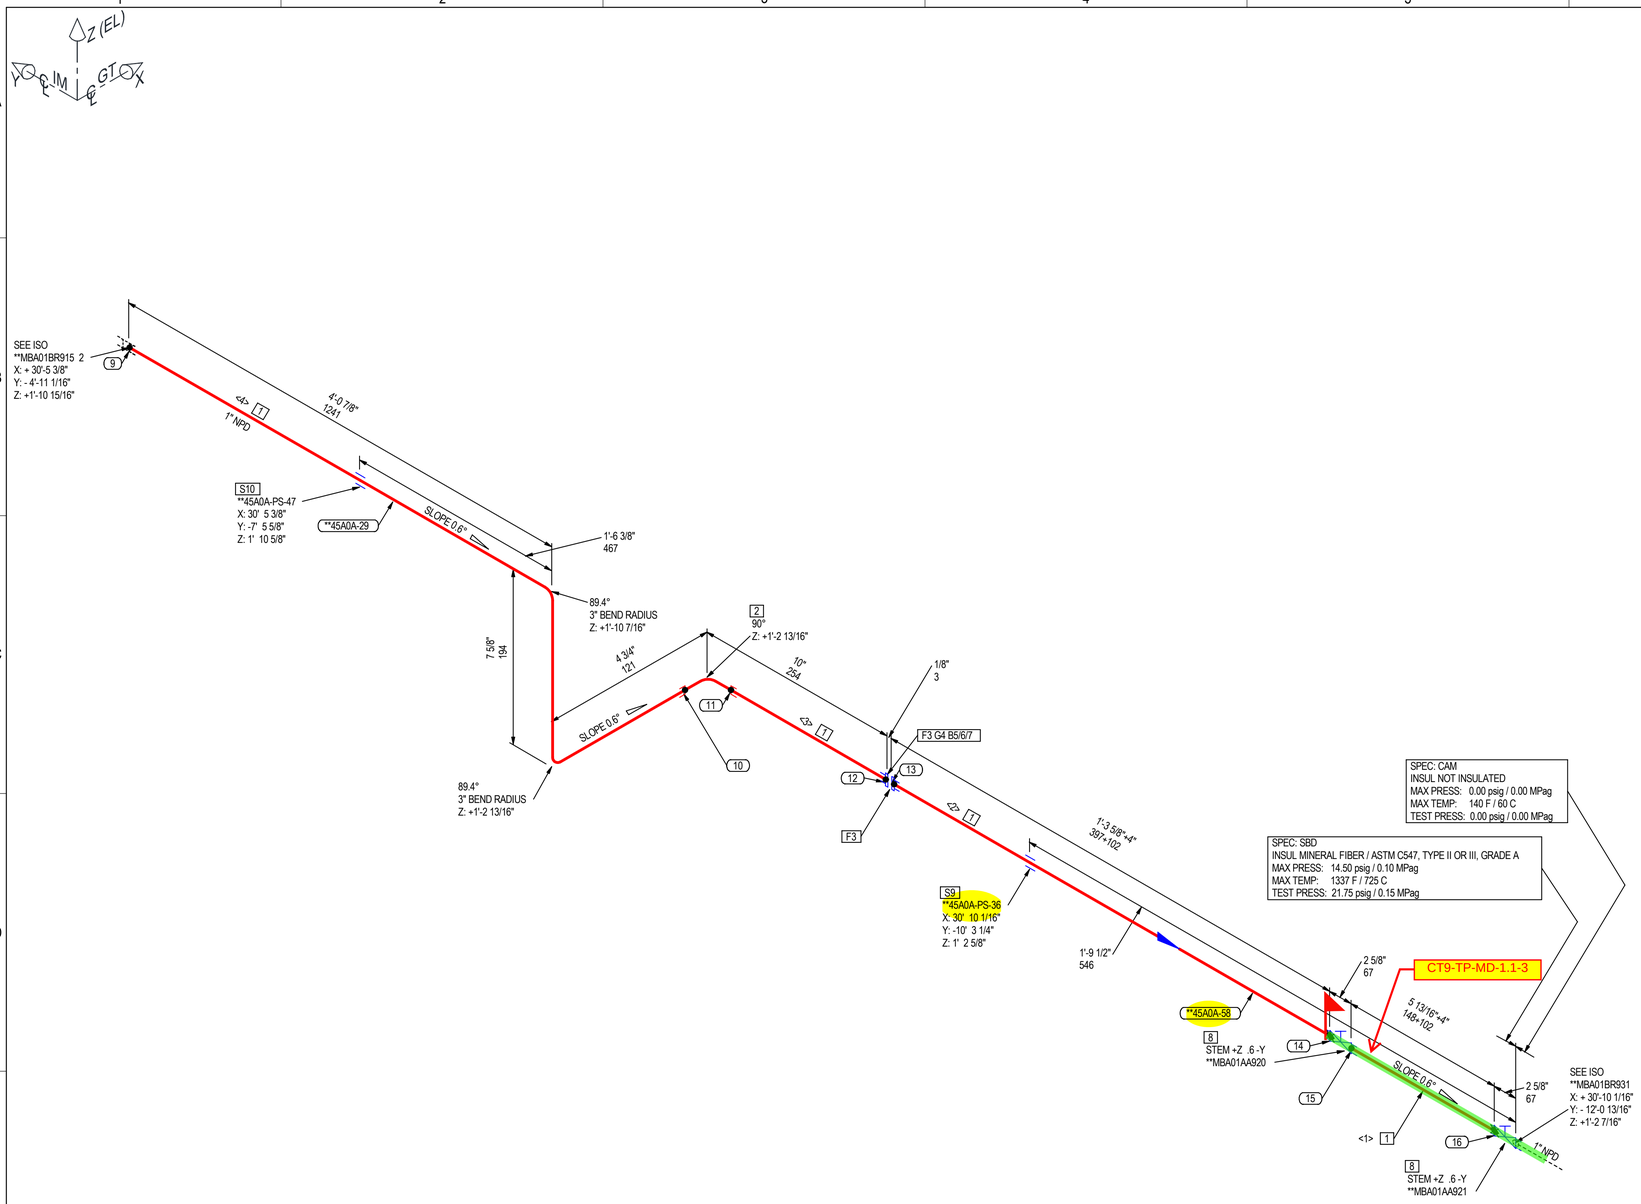

SPEC: CAM
INSUL NOT INSULATED
MAX PRESS: 0.00 psig / 0.00 MPag
MAX TEMP: 140 F / 60 C
TEST PRESS: 0.00 psig / 0.00 MPag

SPEC: SBD
INSUL MINERAL FIBER / ASTM C547, TYPE II OR III, GRADE A
MAX PRESS: 14.50 psig / 0.10 MPag
MAX TEMP: 1337 F / 725 C
TEST PRESS: 21.75 psig / 0.15 MPag

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304H, SEAMLESS	1	MPAAZZBPZZABBANJ	8.0'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1	MMCKAWBVZZAAGALP	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304H	1	MFABAMABZZAADALP	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 11-UNC	5/8	MNOZZADAAZPCJADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F304H	1	MVAAAQBVZZAATALP	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-36	1
10	PIPE SUPPORT	1	**45A0A-PS-47	1
	SPOOLS			
	**45A0A-29, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<2>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<3>	8 7/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<4>	4'9 13/16"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
16	SW	S	1"	1
15	SW	S	1"	1
14	SW	S	1"	1
13	SW	S	1"	1
12	SW	S	1"	1
11	SW	S	1"	1
10	SW	S	1"	1
9	SW	S	1"	1

PIPING SPEC:	SBD	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	1337 F / 725 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583 / 0 / 45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-SDD-BR-AA
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03
			M501JAC GAS TURBINE
PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**MBA01BR915		1 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING / PLANT ENGINEERING

DEPARTMENT: / SECTION:

DRAWING DISTRIBUTION LIST

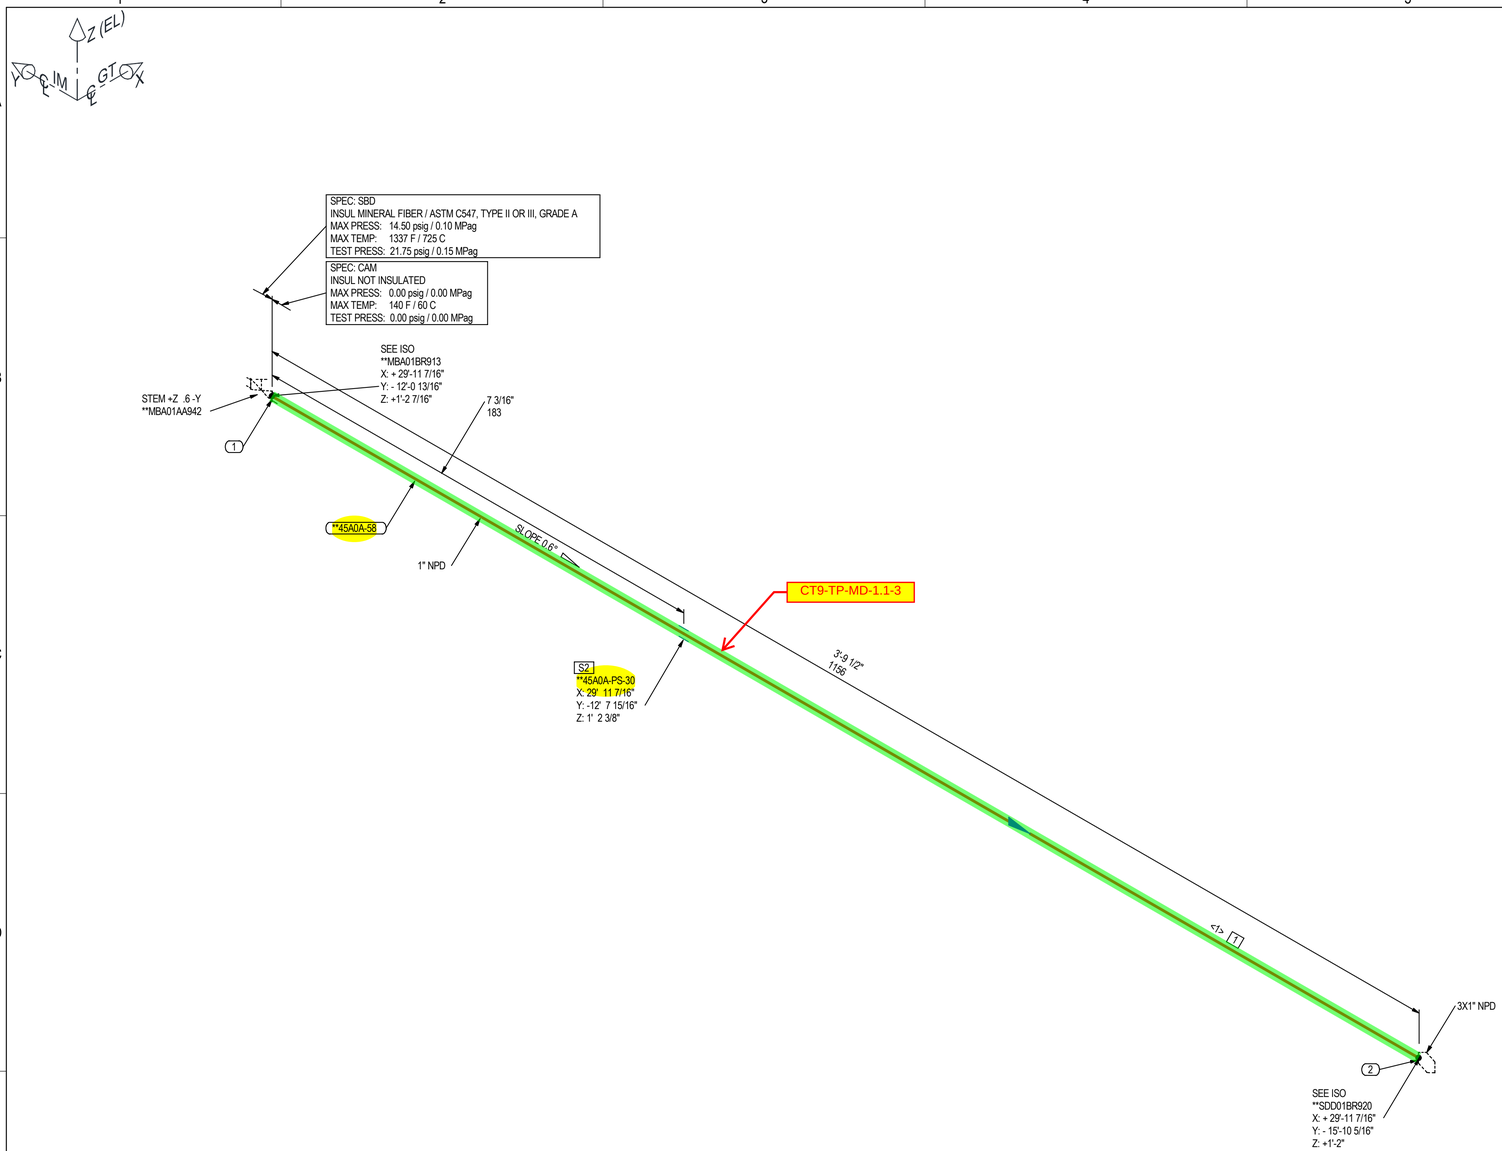

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-30	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR917	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

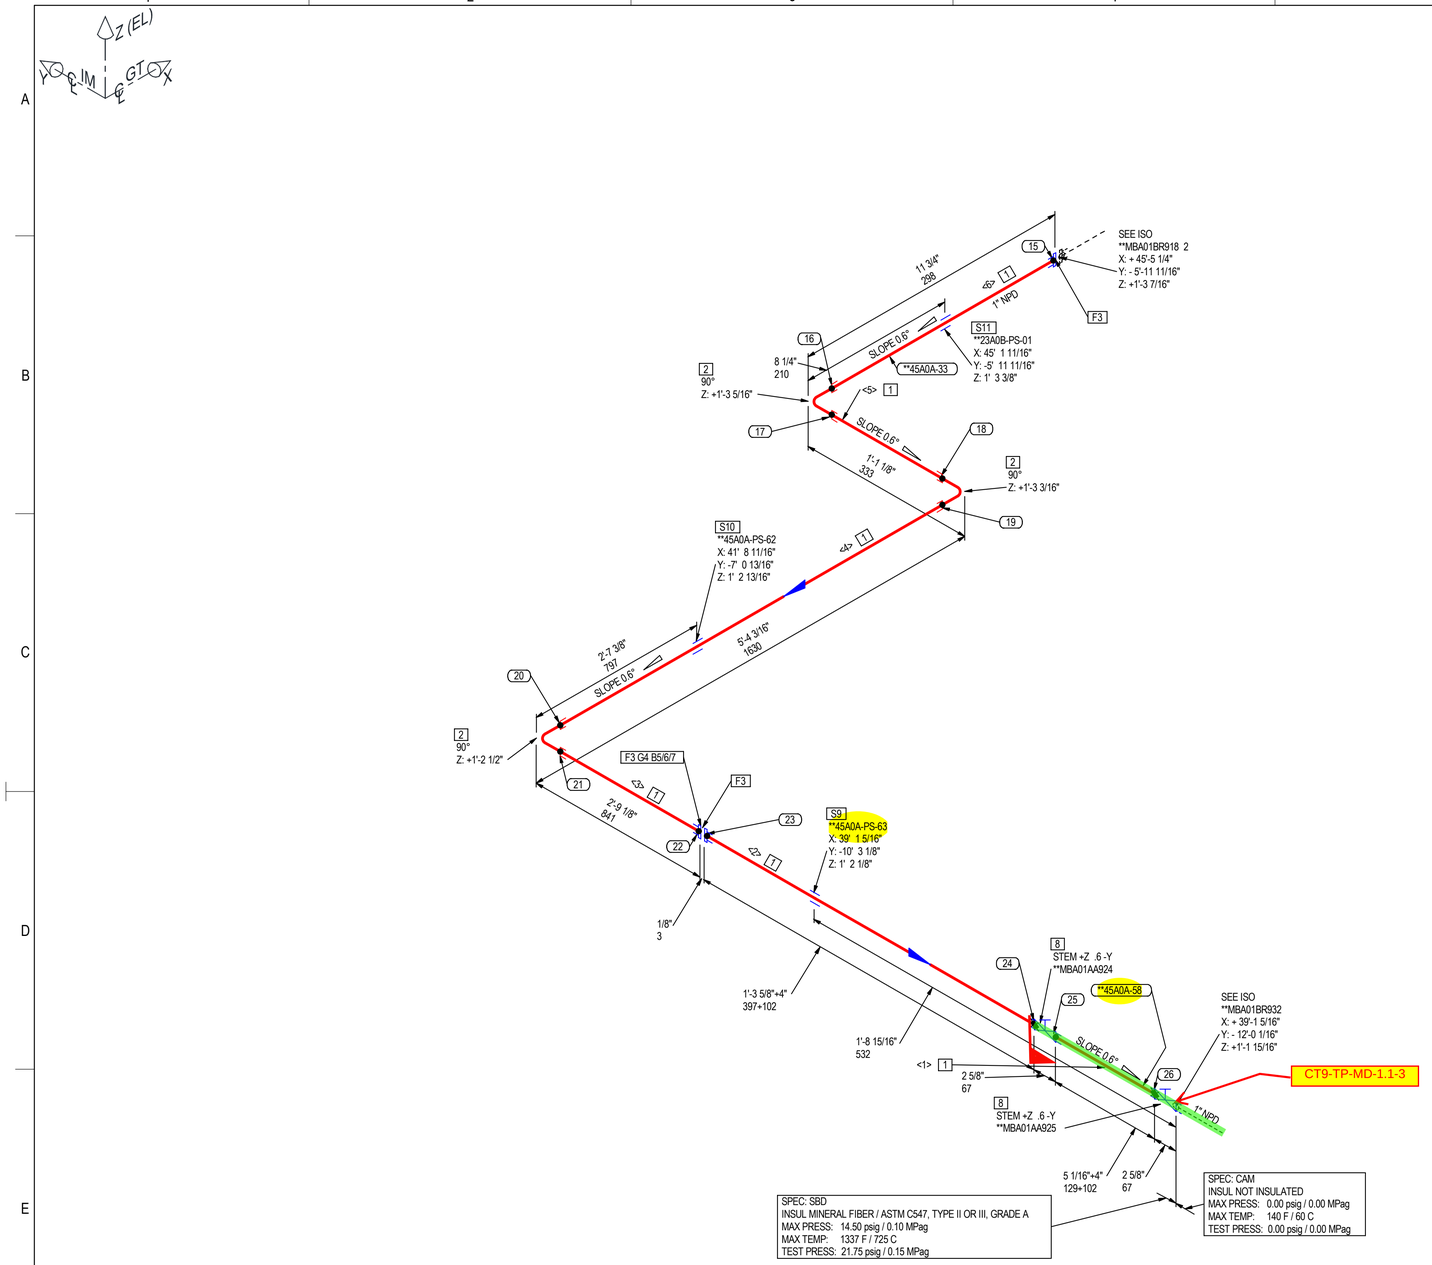

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304H, SEAMLESS	1	MPAAZZBPZZABBANJ	12.0'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304H	1	MMCKAWBVZZAAGALP	3
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304H	1	MFABAMABZZAADALP	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 11-UNC	5/8	MNOZZADAAZPCJADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F304H	1	MVAAAQBVZZAATALP	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-63	1
10	PIPE SUPPORT	1	**45A0A-PS-62	1
11	PIPE SUPPORT	1	**23A0B-PS-01	1
	SPOOLS			
	**45A0A-33, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 1/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<2>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<3>	2'7 9/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<4>	5'2 5/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<5>	11 1/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ
<6>	10 3/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANJ

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
26	SW	S	1"	1
25	SW	S	1"	1
24	SW	S	1"	1
23	SW	S	1"	1
22	SW	S	1"	1
21	SW	S	1"	1
20	SW	S	1"	1
19	SW	S	1"	1
18	SW	S	1"	1
17	SW	S	1"	1
16	SW	S	1"	1
15	SW	S	1"	1

PIPING SPEC:	SBD	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	1337 F / 725 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR918	1 OF 3	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

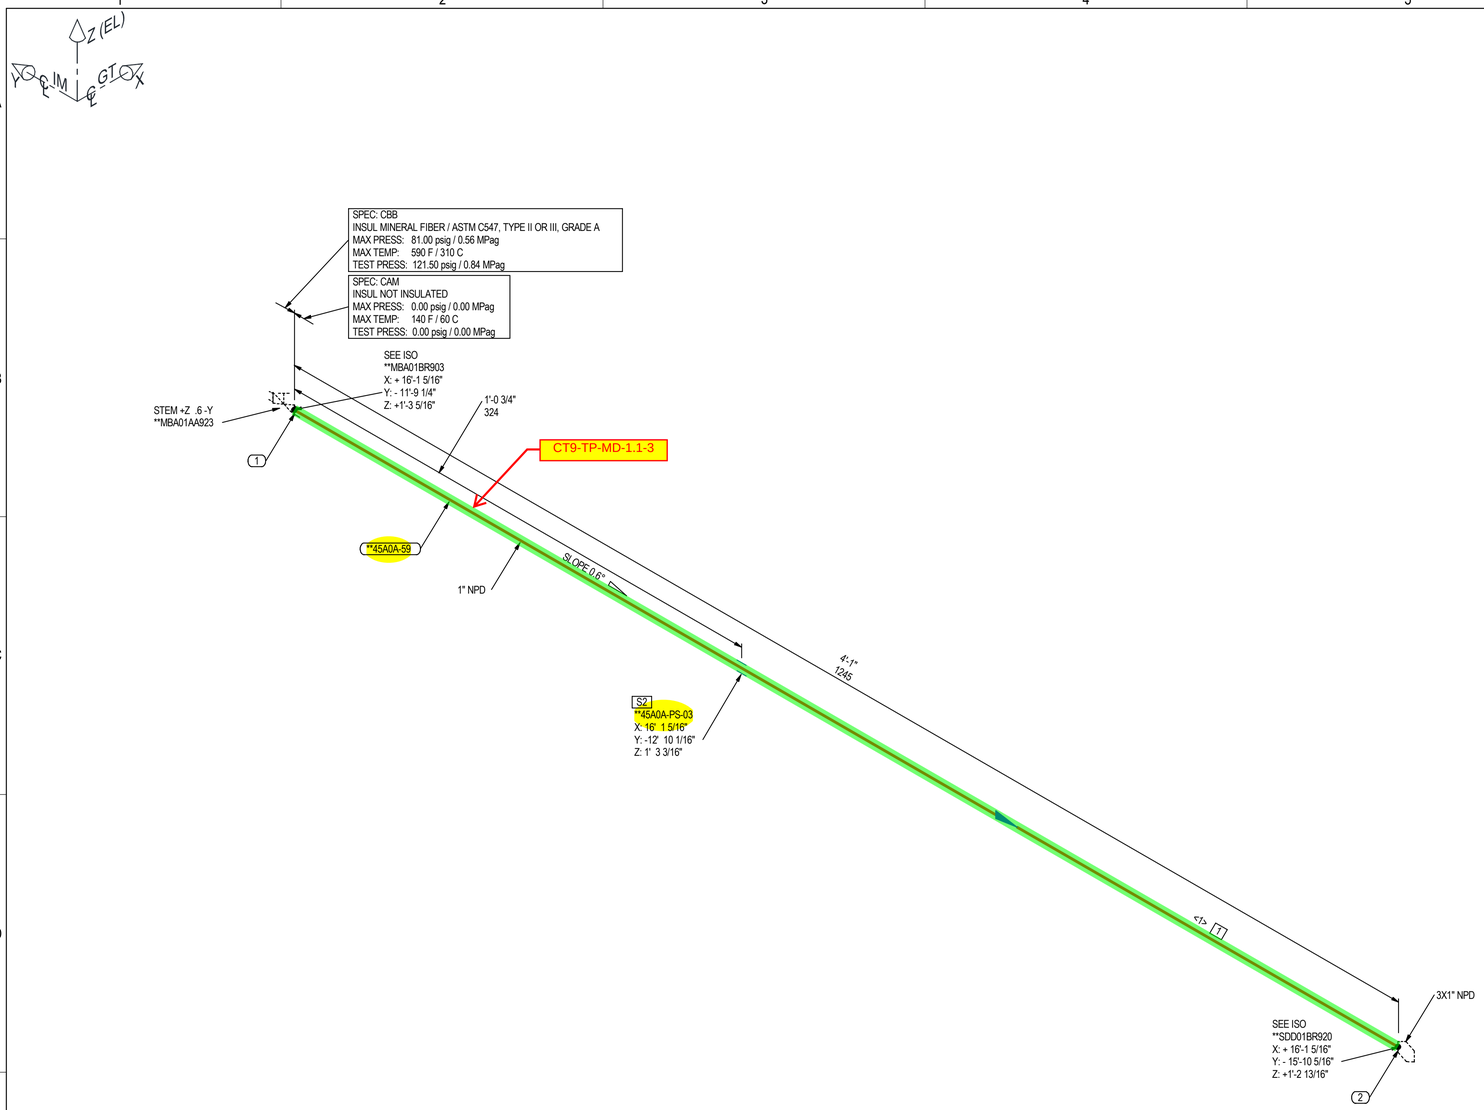

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	4.1'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-03	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	4'1"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	0.00 psig / 0.00 MPag				
TEST PRESS.:	0.00 psig / 0.00 MPag				
MAX. TEMP:	140 F / 60 C				
INSULATION SPEC:	NOT INSULATED				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBA01BR922	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

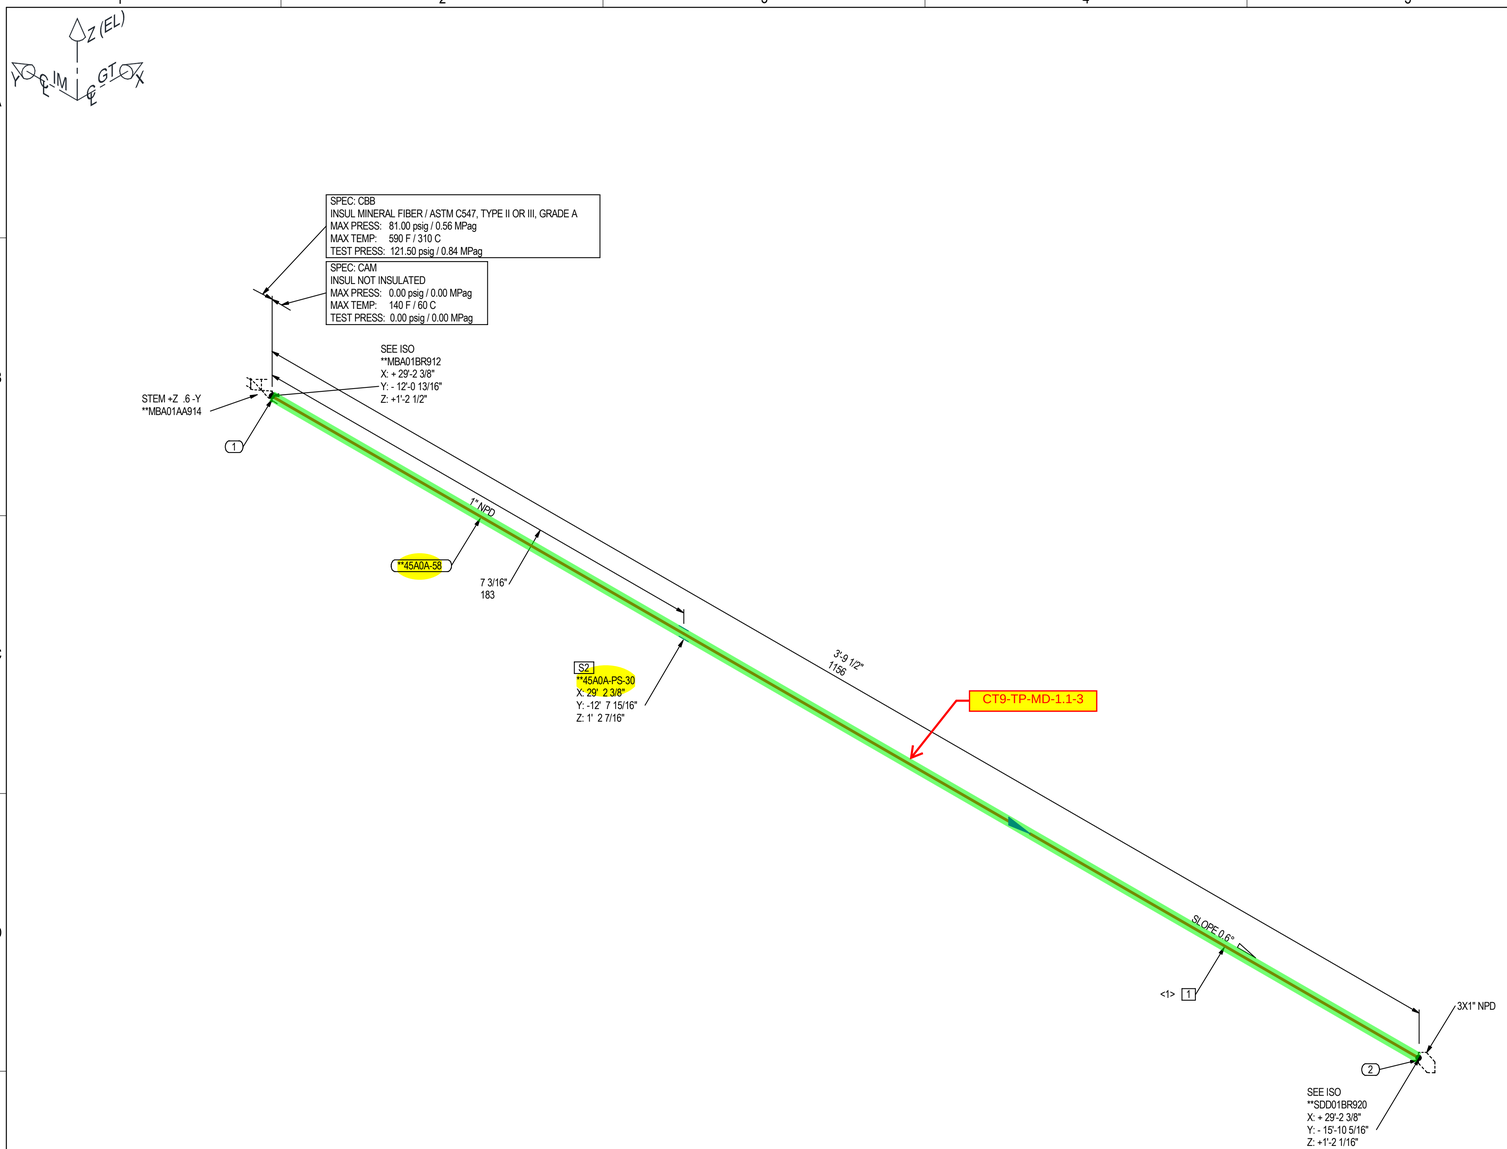

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-30	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR923	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

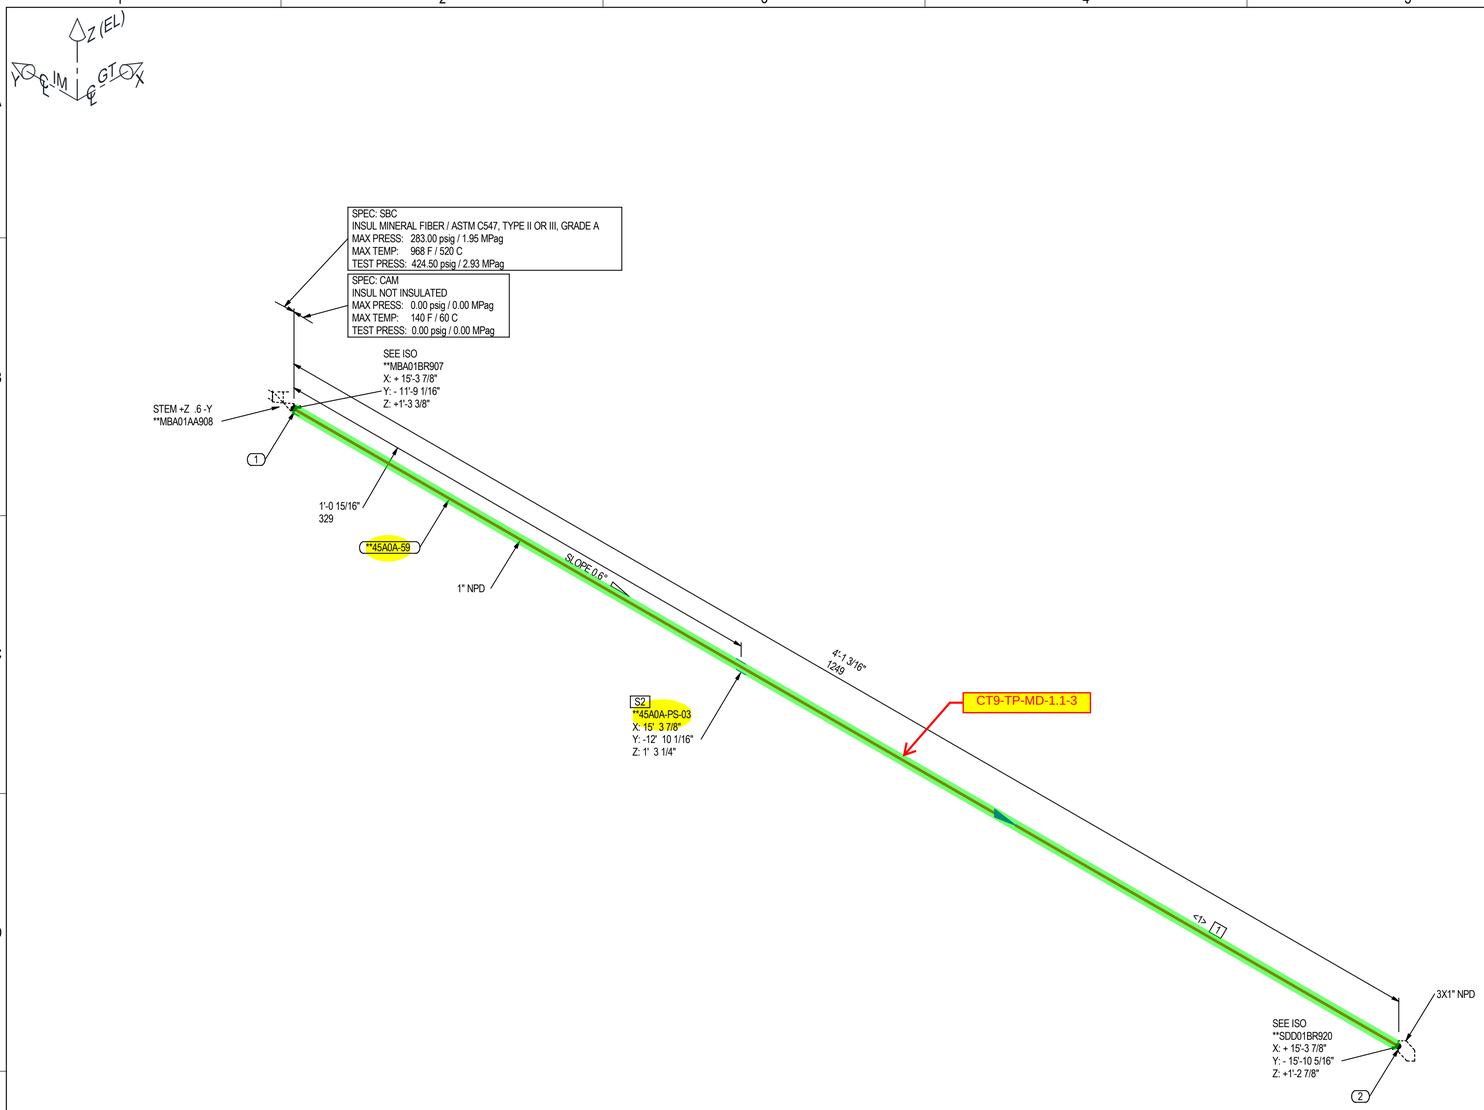

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	4.1'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-03	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	4'1 3/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	0.00 psig / 0.00 MPag	
TEST PRESS.:	0.00 psig / 0.00 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBA01BR924	PAGE NUMBER: 1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

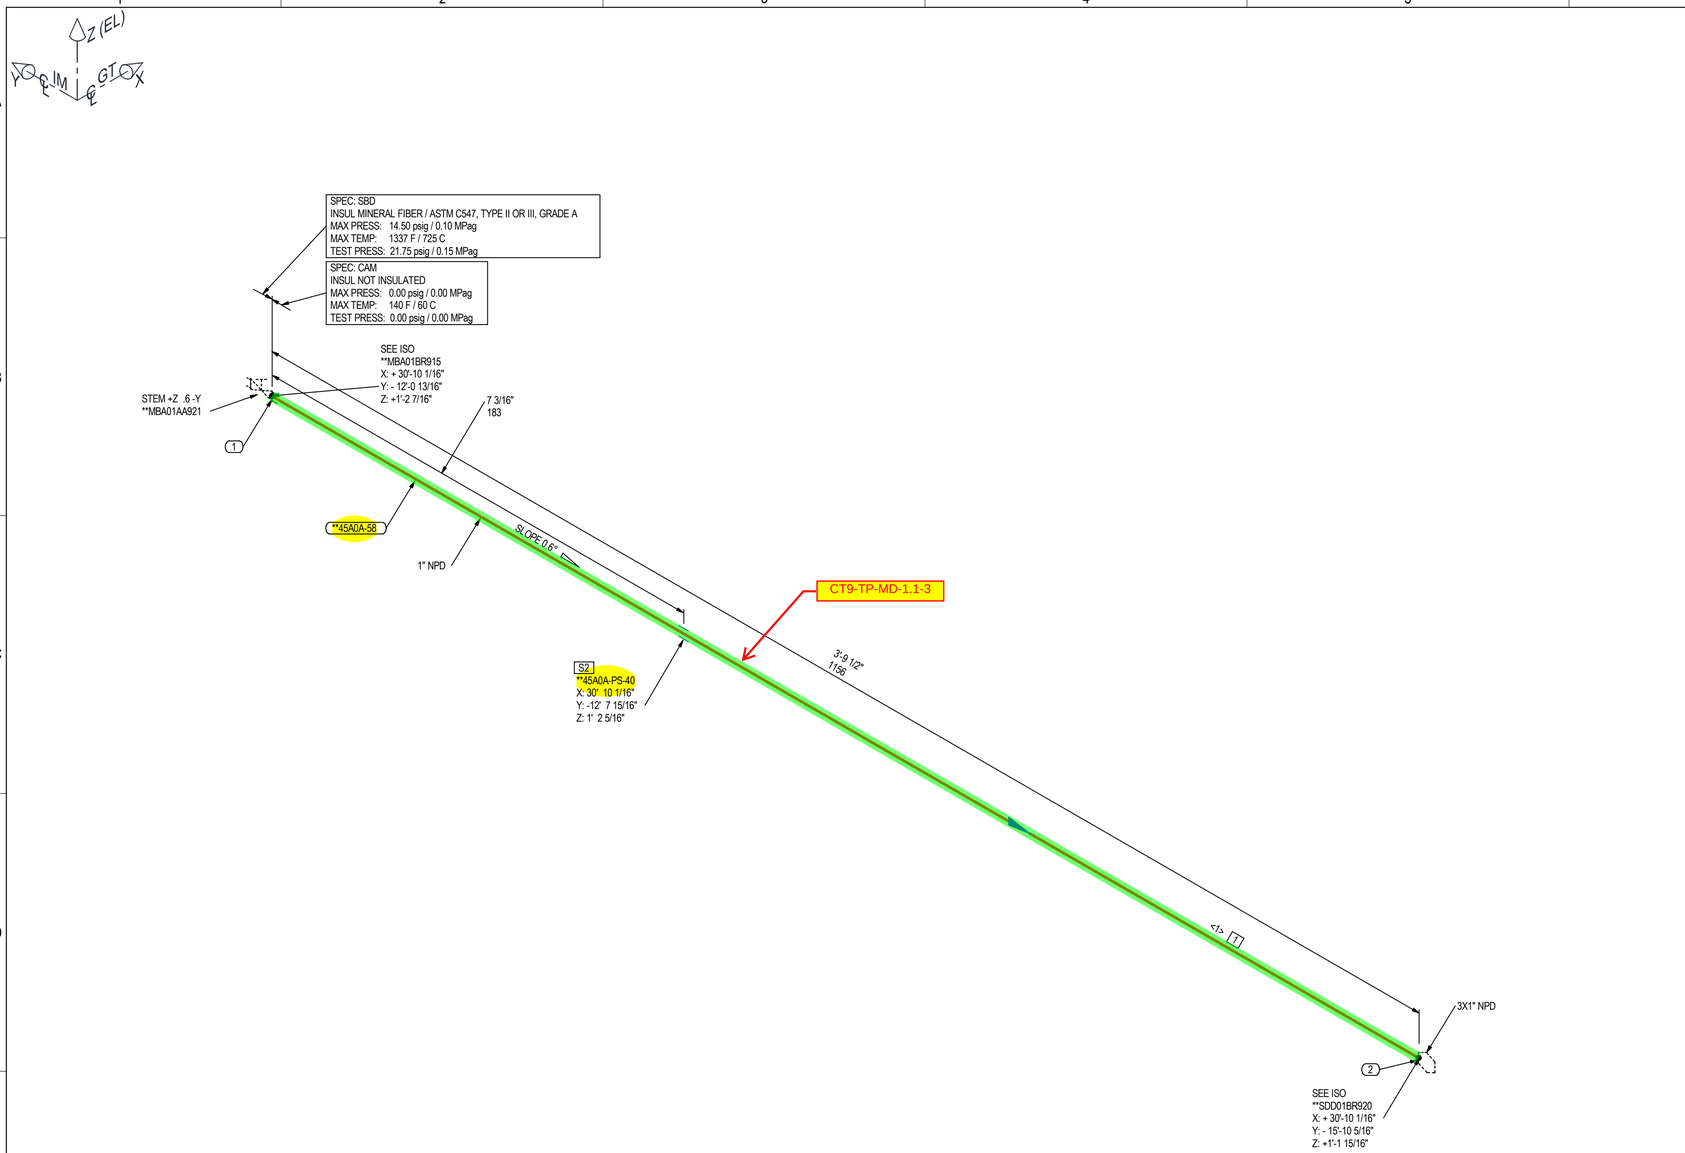

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-40	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR931	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

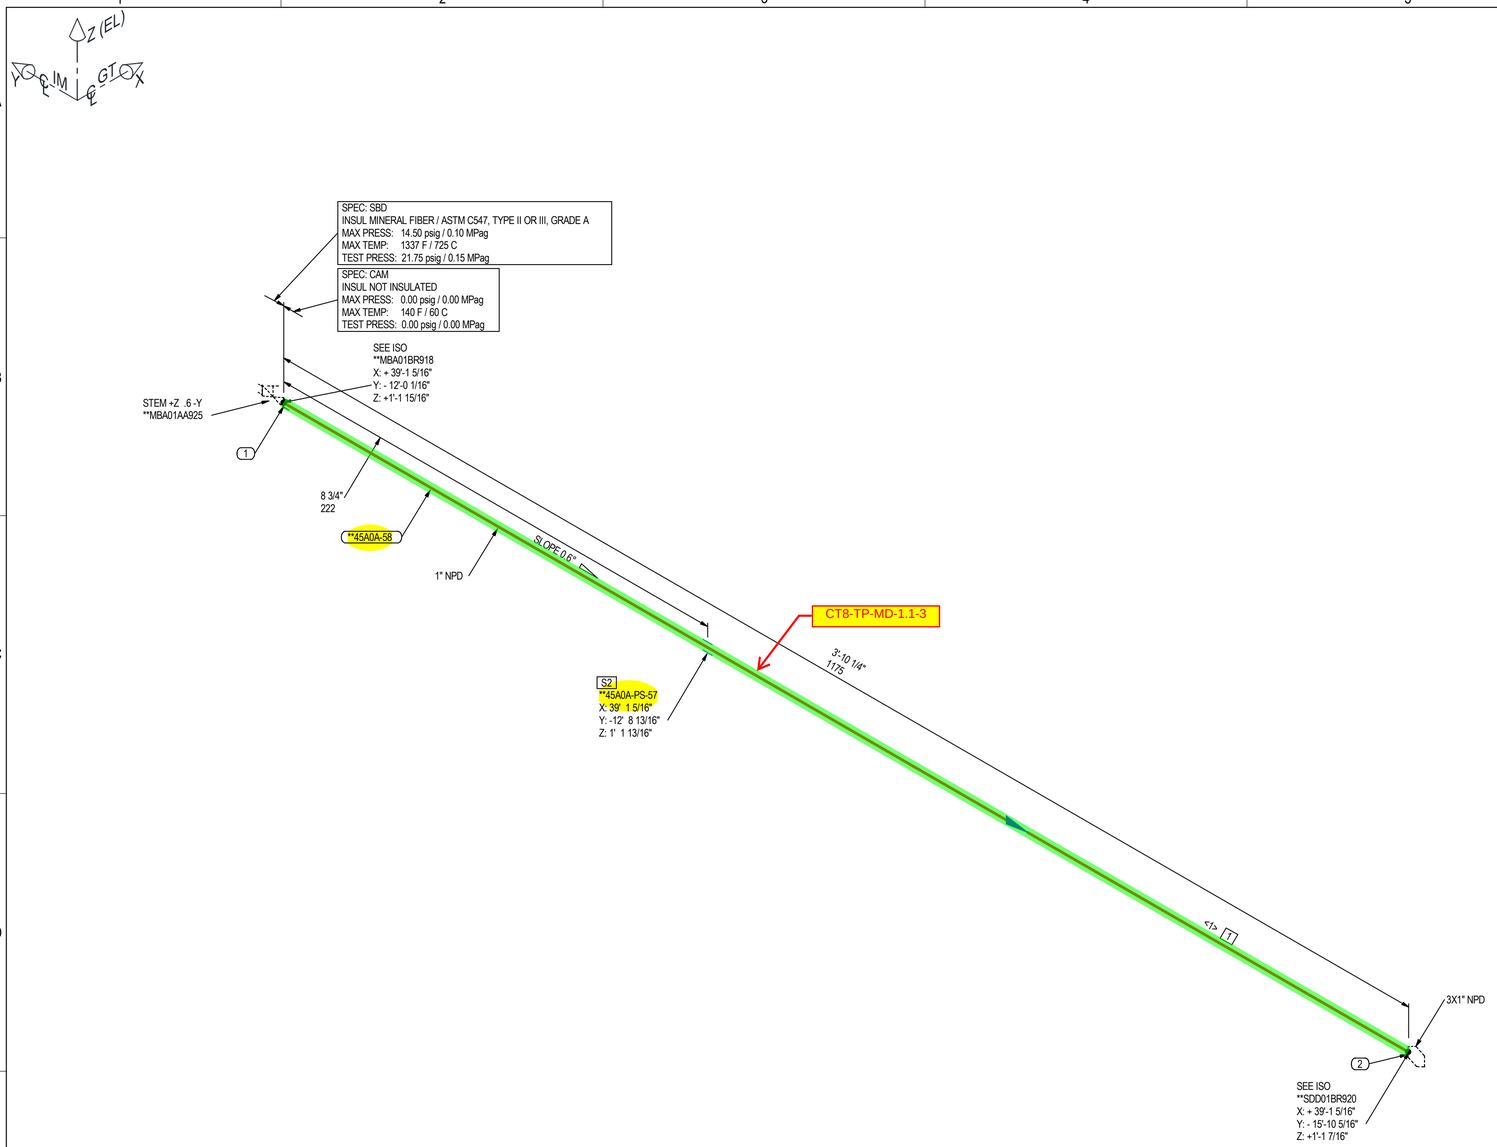

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.9'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-57	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'10 1/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING


DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR932	1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

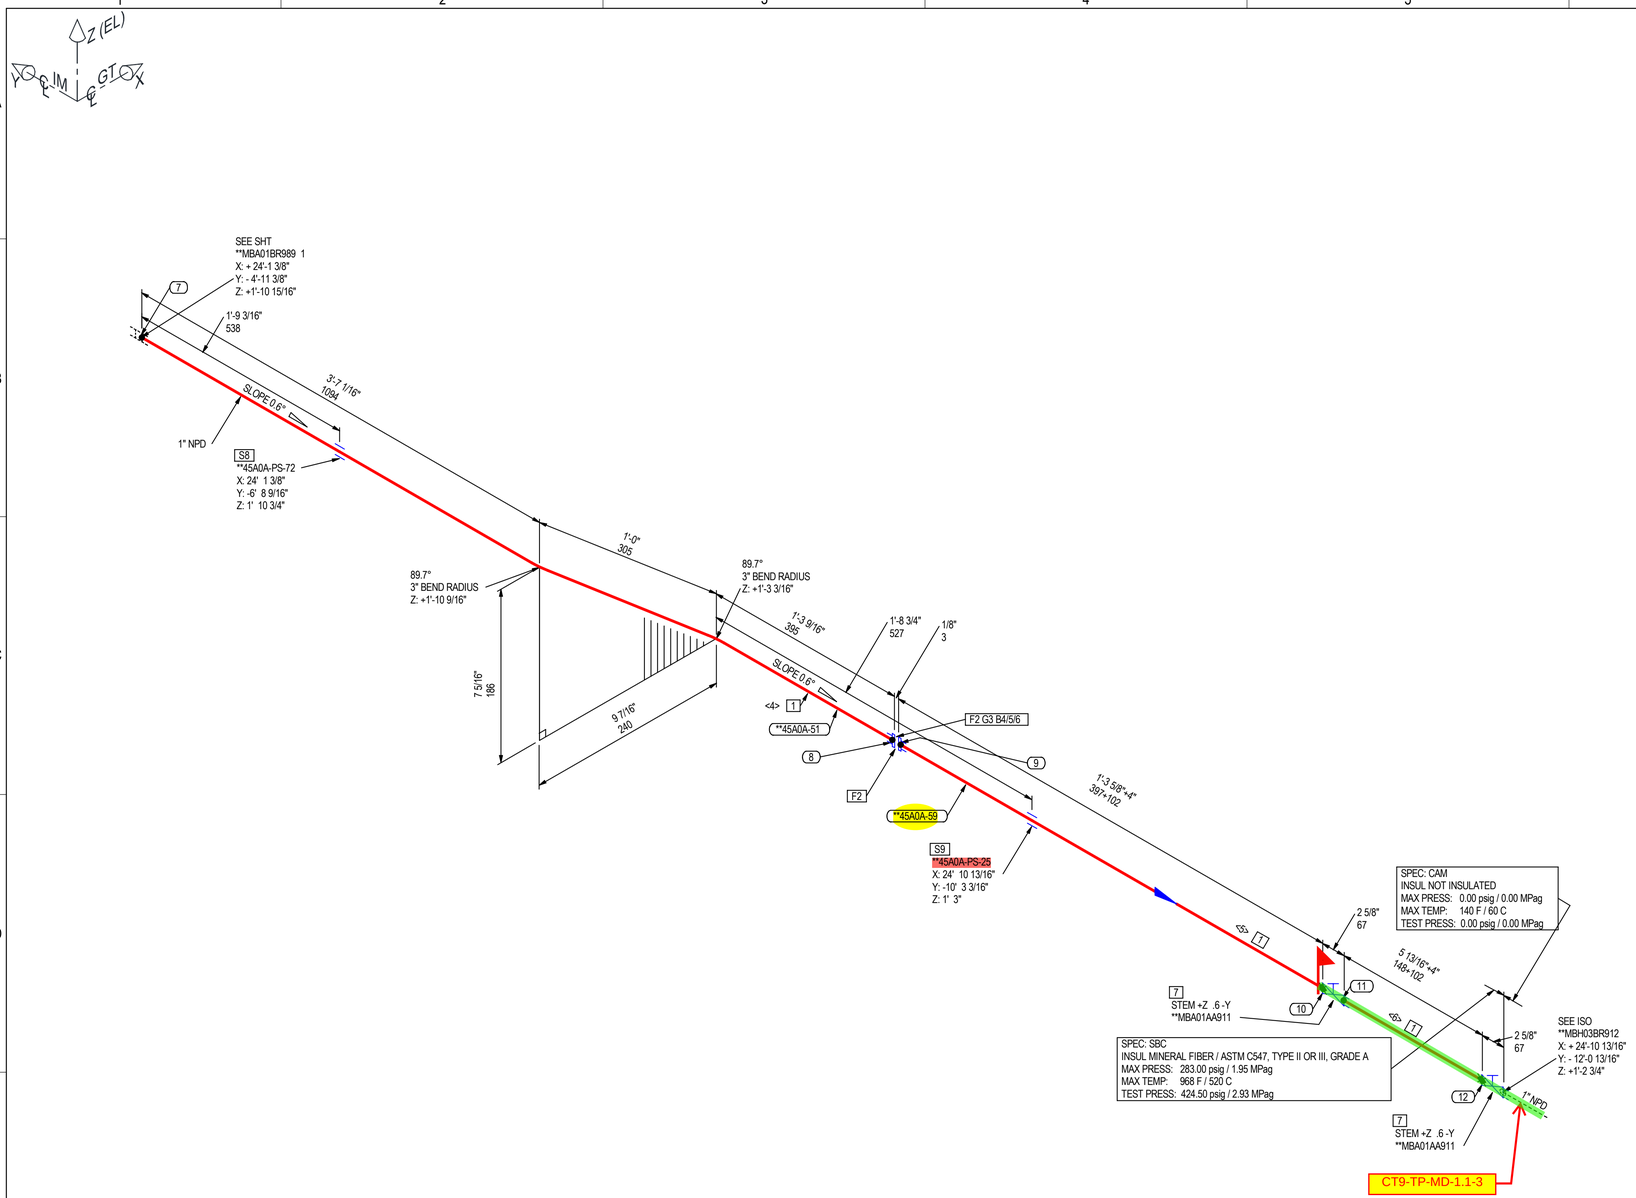

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	8.1'
2	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304	1	MFABAMABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	1
4	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B16, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBFXZ	4
5	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-7, 11-UNC	5/8	MNOZZADAAZPCEADU	8
6	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	8
7	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1	MVAAAQBVZZAATALS	2
	PIPE SUPPORTS			
8	PIPE SUPPORT	1	**45A0A-PS-72	1
9	PIPE SUPPORT	1	**45A0A-PS-25	1
	SPOOLS			
	**45A0A-51, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<4>	5'7 7/16"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	9 13/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
7	SW	S	1"	1
8	SW	S	1"	1
9	SW	S	1"	1
10	SW	S	1"	1
11	SW	S	1"	1
12	SW	S	1"	1

PIPING SPEC:	SBC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	283.00 psig / 1.95 MPag							
TEST PRESS.:	424.50 psig / 2.93 MPag							
MAX. TEMP:	968 F / 520 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBA01BR989	2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2


MITSUBISHI POWER ENGINEERING


PLANT ENGINEERING


DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST



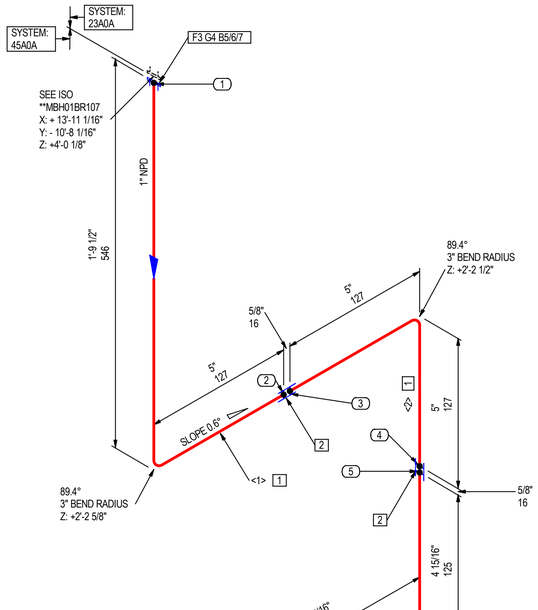

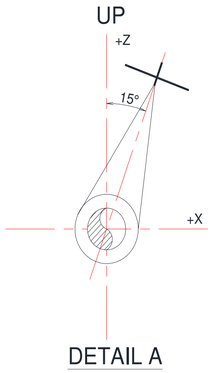

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	9.6'
2	COUPLING, CL3000, SWE, ASME B16.11, ASTM A105	1	MMAKAWBVZZAAGABQ	3
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAJUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A1008 CS-B	5/8	MWQZZZZBXIBCXADP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2

SPOOLS

**45A0A-39, **45A0A-59

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	2'0 5/8"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	8 3/4"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<3>	2'5 5/16"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<4>	3'4 15/16"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<5>	11 3/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	SW	S	1"	1
5	SW	S	1"	1
6	SW	S	1"	1
7	SW	S	1"	1
8	SW	S	1"	1
9	SW	S	1"	1
10	SW	S	1"	1

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	81.00 psig / 0.56 MPag							
TEST PRESS.:	121.50 psig / 0.84 MPag							
MAX. TEMP:	590 F / 310 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: K-GREC1	P&ID: -	
			PIPELINE: **MBH01BR901	PAGE NUMBER: 1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations. diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

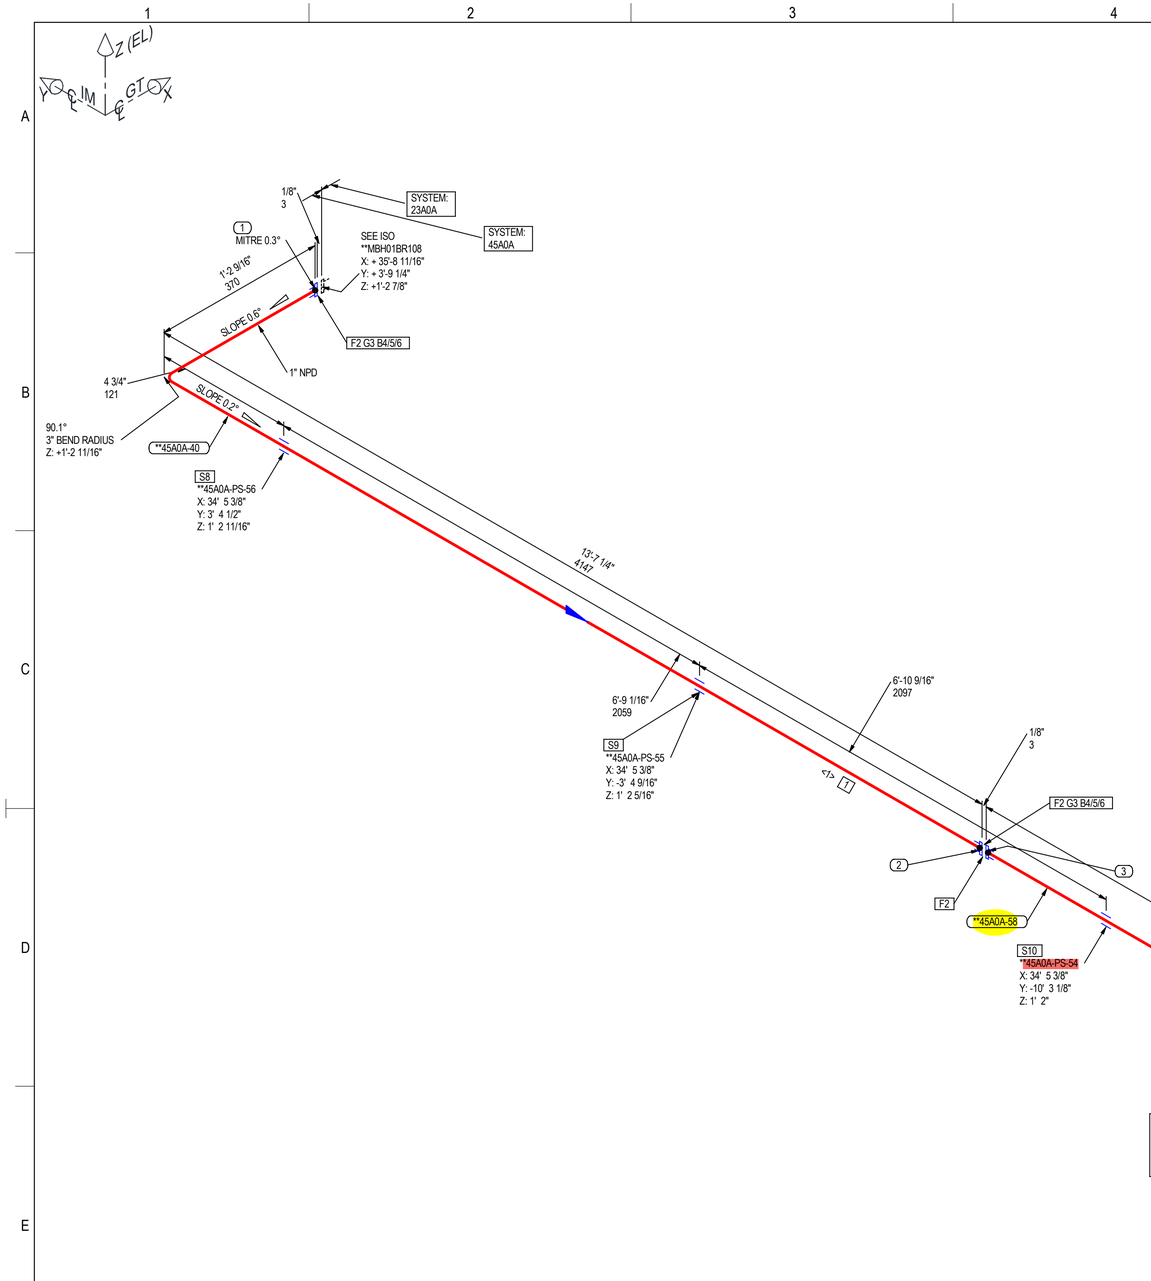

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	17.1'
2	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAJUS	2
4	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	8
5	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	16
6	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A1008 CS-B	5/8	MWQZZZZBXIBCXADP	16
7	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2
	PIPE SUPPORTS			
8	PIPE SUPPORT	1	**45A0A-PS-56	1
9	PIPE SUPPORT	1	**45A0A-PS-55	1
10	PIPE SUPPORT	1	**45A0A-PS-54	1
	SPOOLS			
	**45A0A-40, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	14'7 7/8"	1	PLD BEND(1)	MITRED	SQ.CUT	MPAAZZBPZZABAABS
<2>	1'7"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<3>	9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	SW	S	1"	1
5	SW	S	1"	1
6	SW	S	1"	1

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	590 F / 310 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✎ FW - FIELD WELD
✎ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: K-GREC1	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH01BR903	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

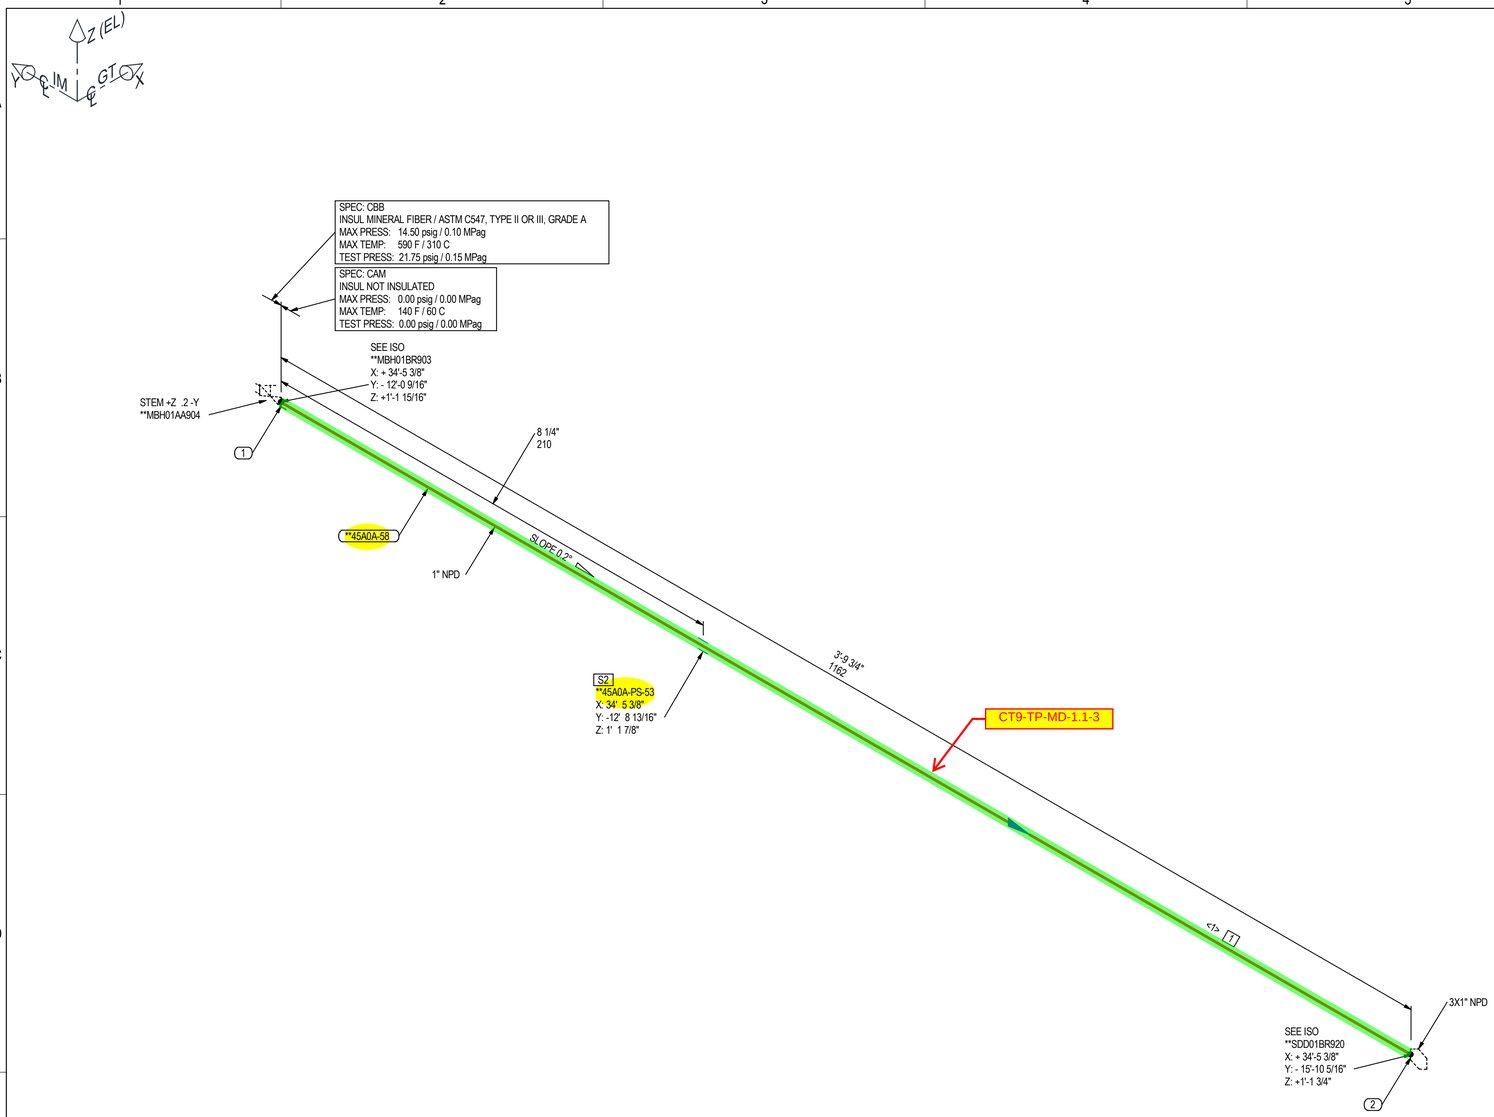

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.9'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-53	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 3/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	0.00 psig / 0.00 MPag				
TEST PRESS.:	0.00 psig / 0.00 MPag				
MAX. TEMP:	140 F / 60 C				
INSULATION SPEC:	NOT INSULATED				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.: / SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0 / 45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING	
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE	
			FOR FABRICATION & ERECTION	
			N05-ISO-SDD-BR-AA	
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03	
			M501JAC GAS TURBINE	
			PROJECT CODE: K-GREC1 / P&ID: -	
			PIPELINE: **MBH01BR923 / PAGE NUMBER: 1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

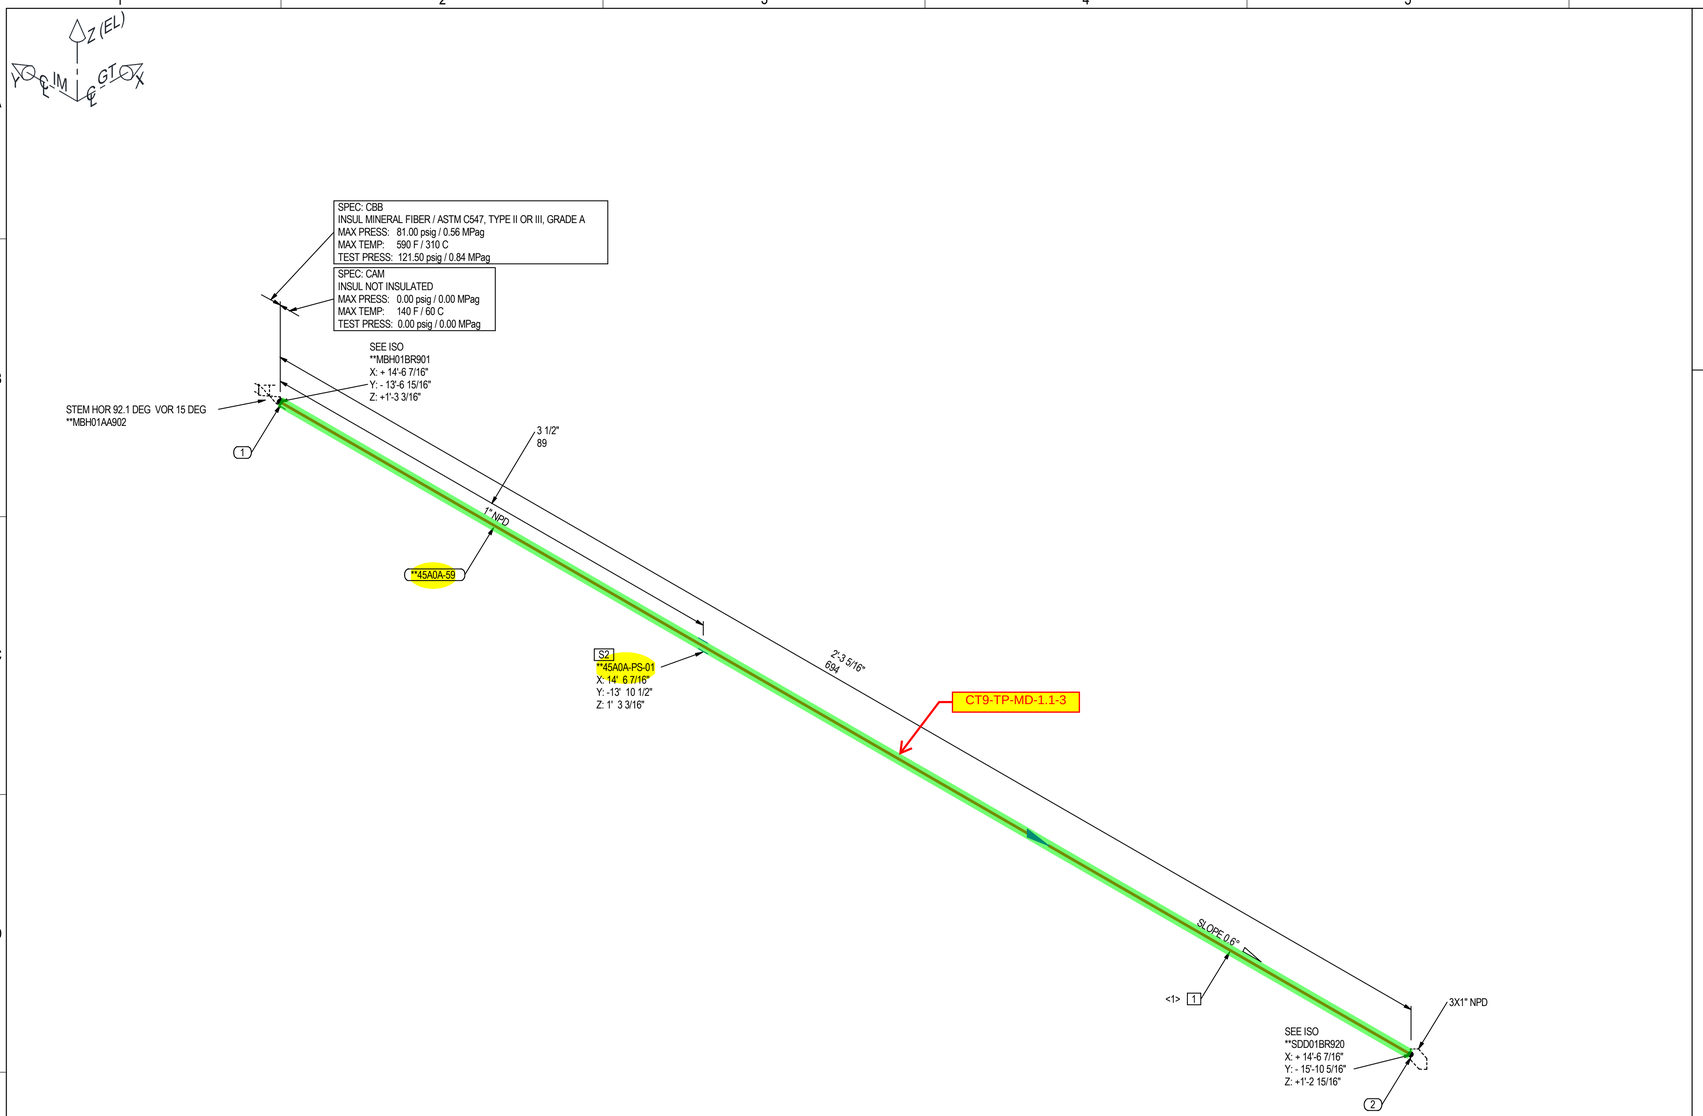

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	2.3'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-01	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	2'3 5/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583 / 0 / 45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-SDD-BR-AA
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03
			M501JAC GAS TURBINE
PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**MBH01BR924		1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING / PLANT ENGINEERING

DEPARTMENT: / SECTION:

DRAWING DISTRIBUTION LIST



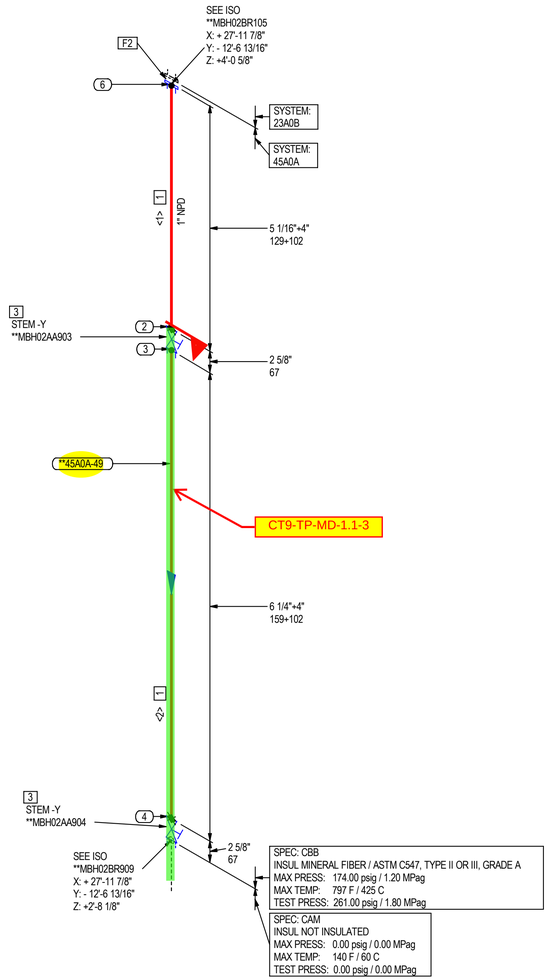

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	1.6'
2	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2

SPOOLS

**45A0A-49

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	8 7/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	10 1/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
6	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	SW	S	1"	1

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	174.00 psig / 1.20 MPag							
TEST PRESS.:	261.00 psig / 1.80 MPag							
MAX. TEMP:	797 F / 425 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH02BR903	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



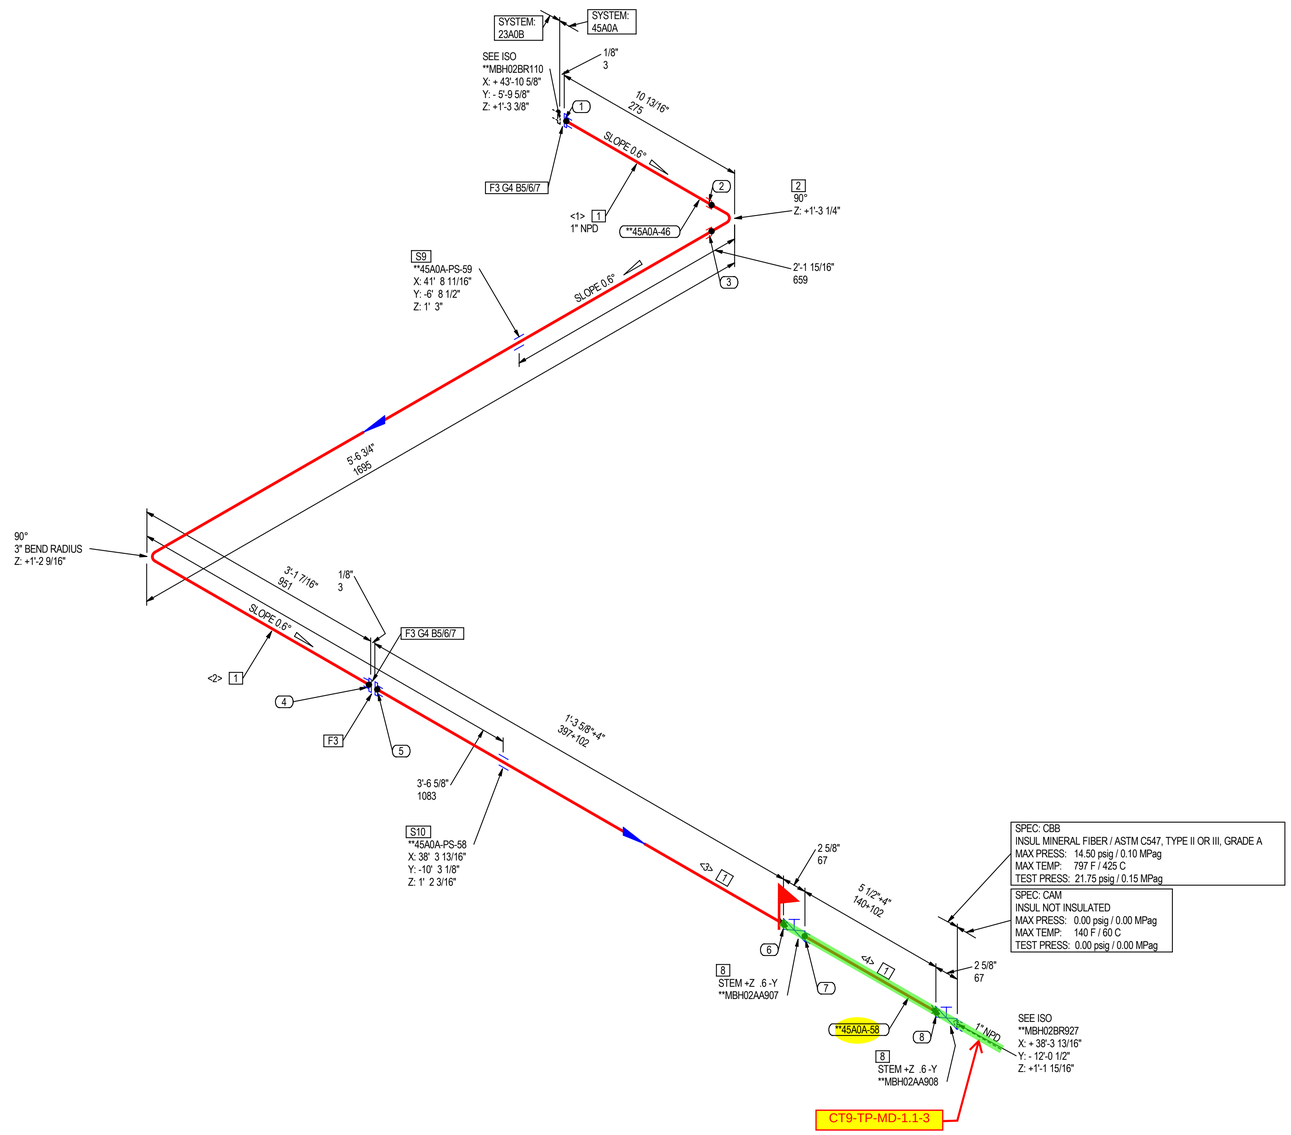

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	11.6'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A105	1	MMCKAWBVZZAAGABQ	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A105	1	MFABAMABZZAADABQ	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAMAXAAKXAKUS	2
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4 in. Length	5/8	MBAZZADZZIAGBEUZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	16
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	5/8	MWQZZZZBXIBCAMDP	16
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A105	1	MVAAAQBVZZAATABQ	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-59	1
10	PIPE SUPPORT	1	**45A0A-PS-58	1
	SPOOLS			
	**45A0A-46, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 1/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	8'5 3/8"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<3>	1'7 1/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<4>	9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	SW	S	1"	1
5	SW	S	1"	1
6	SW	S	1"	1
7	SW	S	1"	1
8	SW	S	1"	1

PIPING SPEC:	CBB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	797 F / 425 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH02BR907	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST



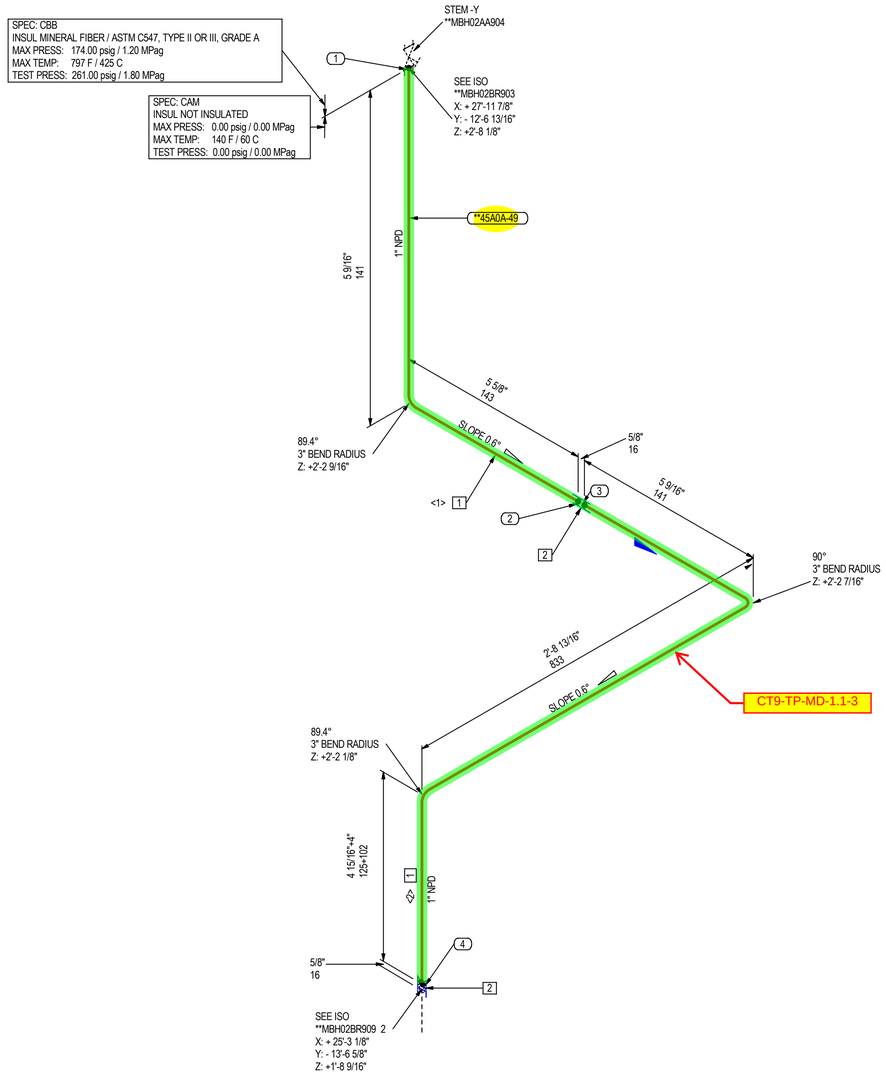

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	CAM
FLUID CODE:	ZW, WASHING WATER
MAX. PRESS.:	0.00 psig / 0.00 MPag
TEST PRESS.:	0.00 psig / 0.00 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	SW	S	1"	1

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✖ F/W - FIELD WELD
✖ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	4.6'
2	COUPLING, CL3000, SWE, ASME B16.11, ASTM A105	1	MMAKAWBVZZAAGABQ	2

SPOOLS
**45A0A-49

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 15/16"	1	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	3'8 13/16"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.


ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH02BR909	1 OF 2	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

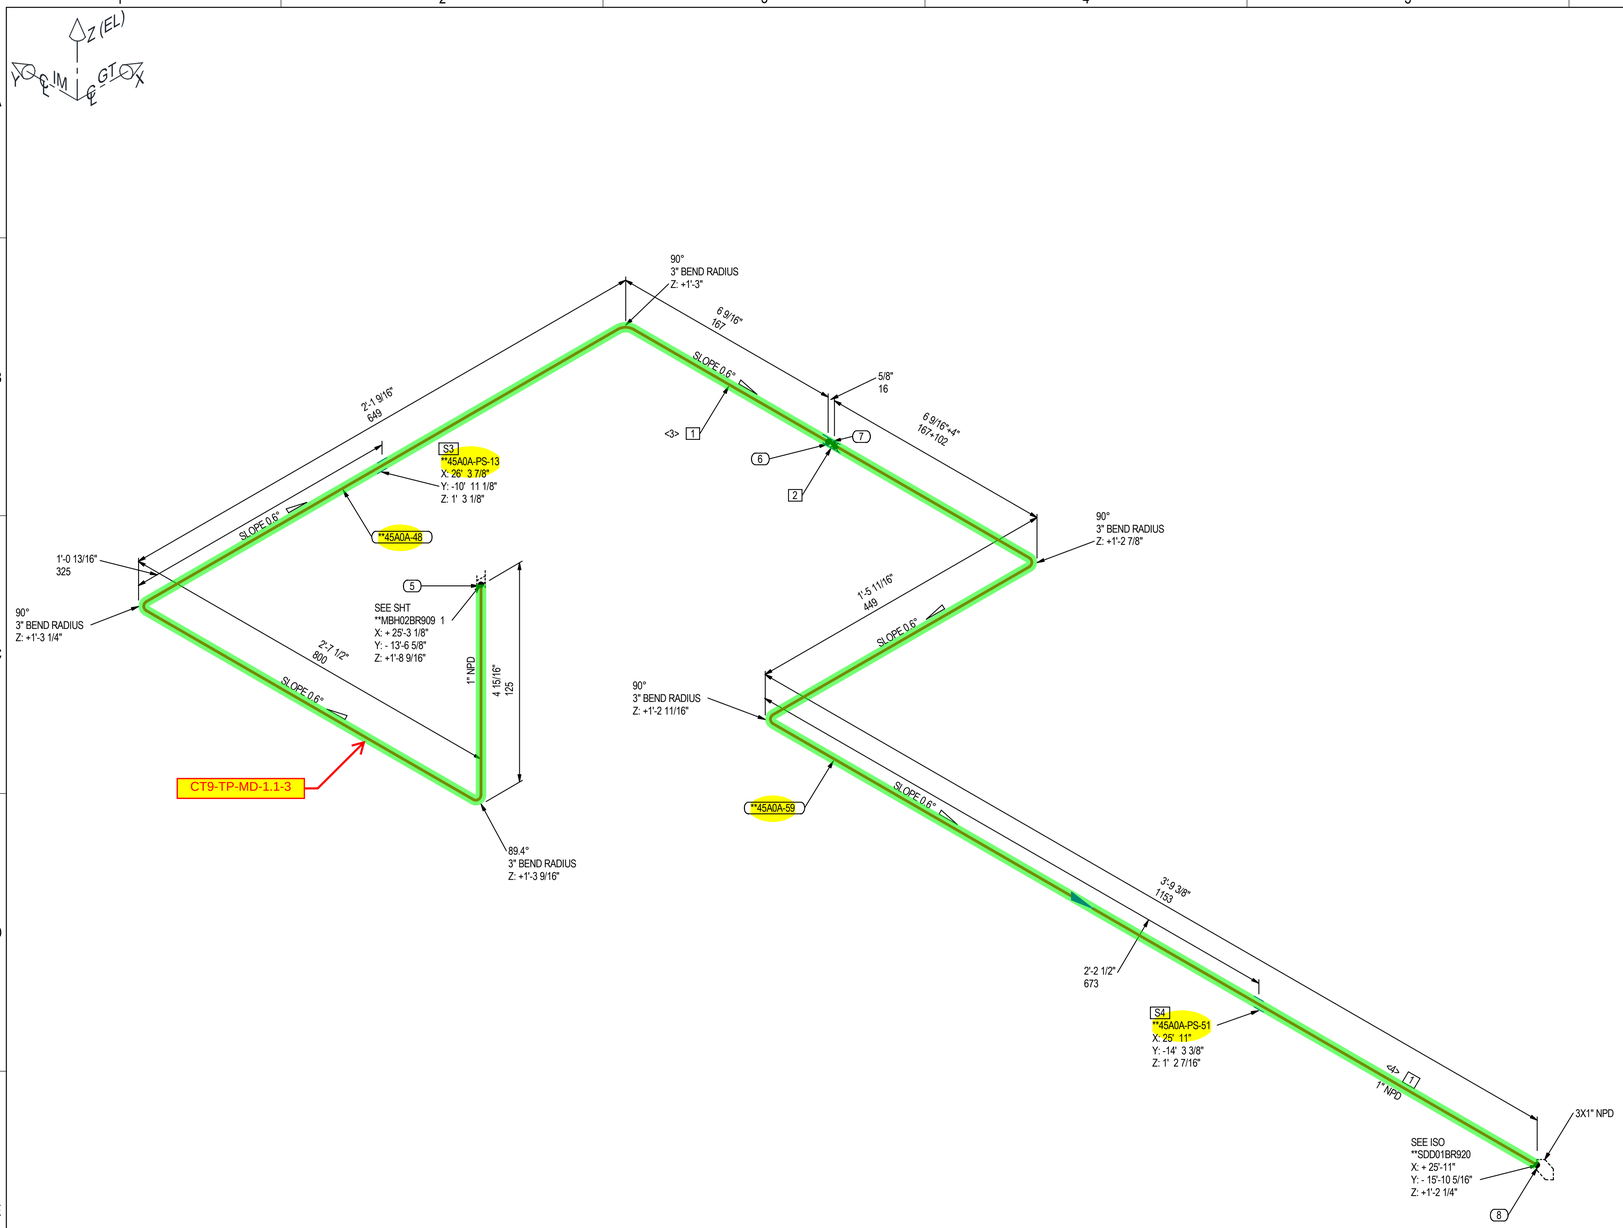

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	11.4'
2	COUPLING, CL3000, SWE, ASME B16.11, ASTM A105	1	MMAKAWBVZZAAGABQ	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
3	PIPE SUPPORT	1	**45A0A-PS-13	1
4	PIPE SUPPORT	1	**45A0A-PS-51	1
	SPOOLS			
	**45A0A-48, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<3>	5'4 3/4"	1	PLD BEND(3)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<4>	5'11 1/16"	1	PLD BEND(2)	SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX##-### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
5	SW	S	1"	1
6	SW	S	1"	1
7	SW	S	1"	1
8	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.: SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0 45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING	
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE	
			FOR FABRICATION & ERECTION	
			N05-ISO-SDD-BR-AA	
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03	
			M501JAC GAS TURBINE	
			PROJECT CODE: - P&ID: -	
			PIPELINE:	PAGE NUMBER:
			**MBH02BR909	2 OF 2

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

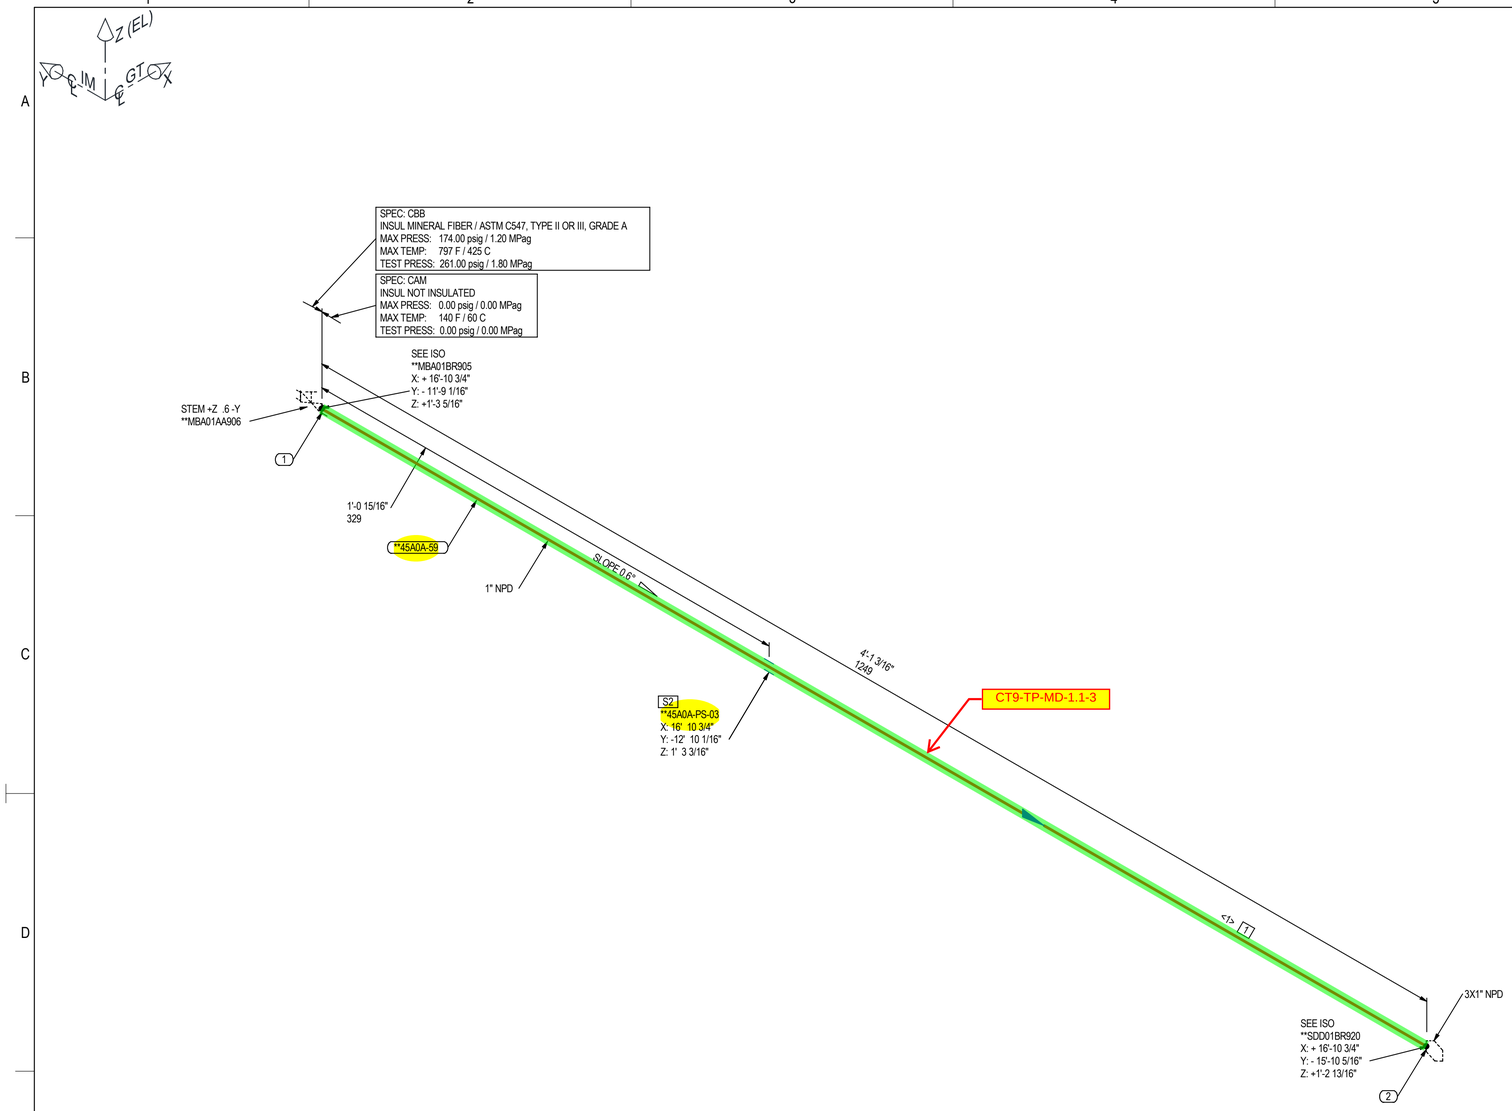

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	4.1'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-03	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	4'1 3/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBH02BR925	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

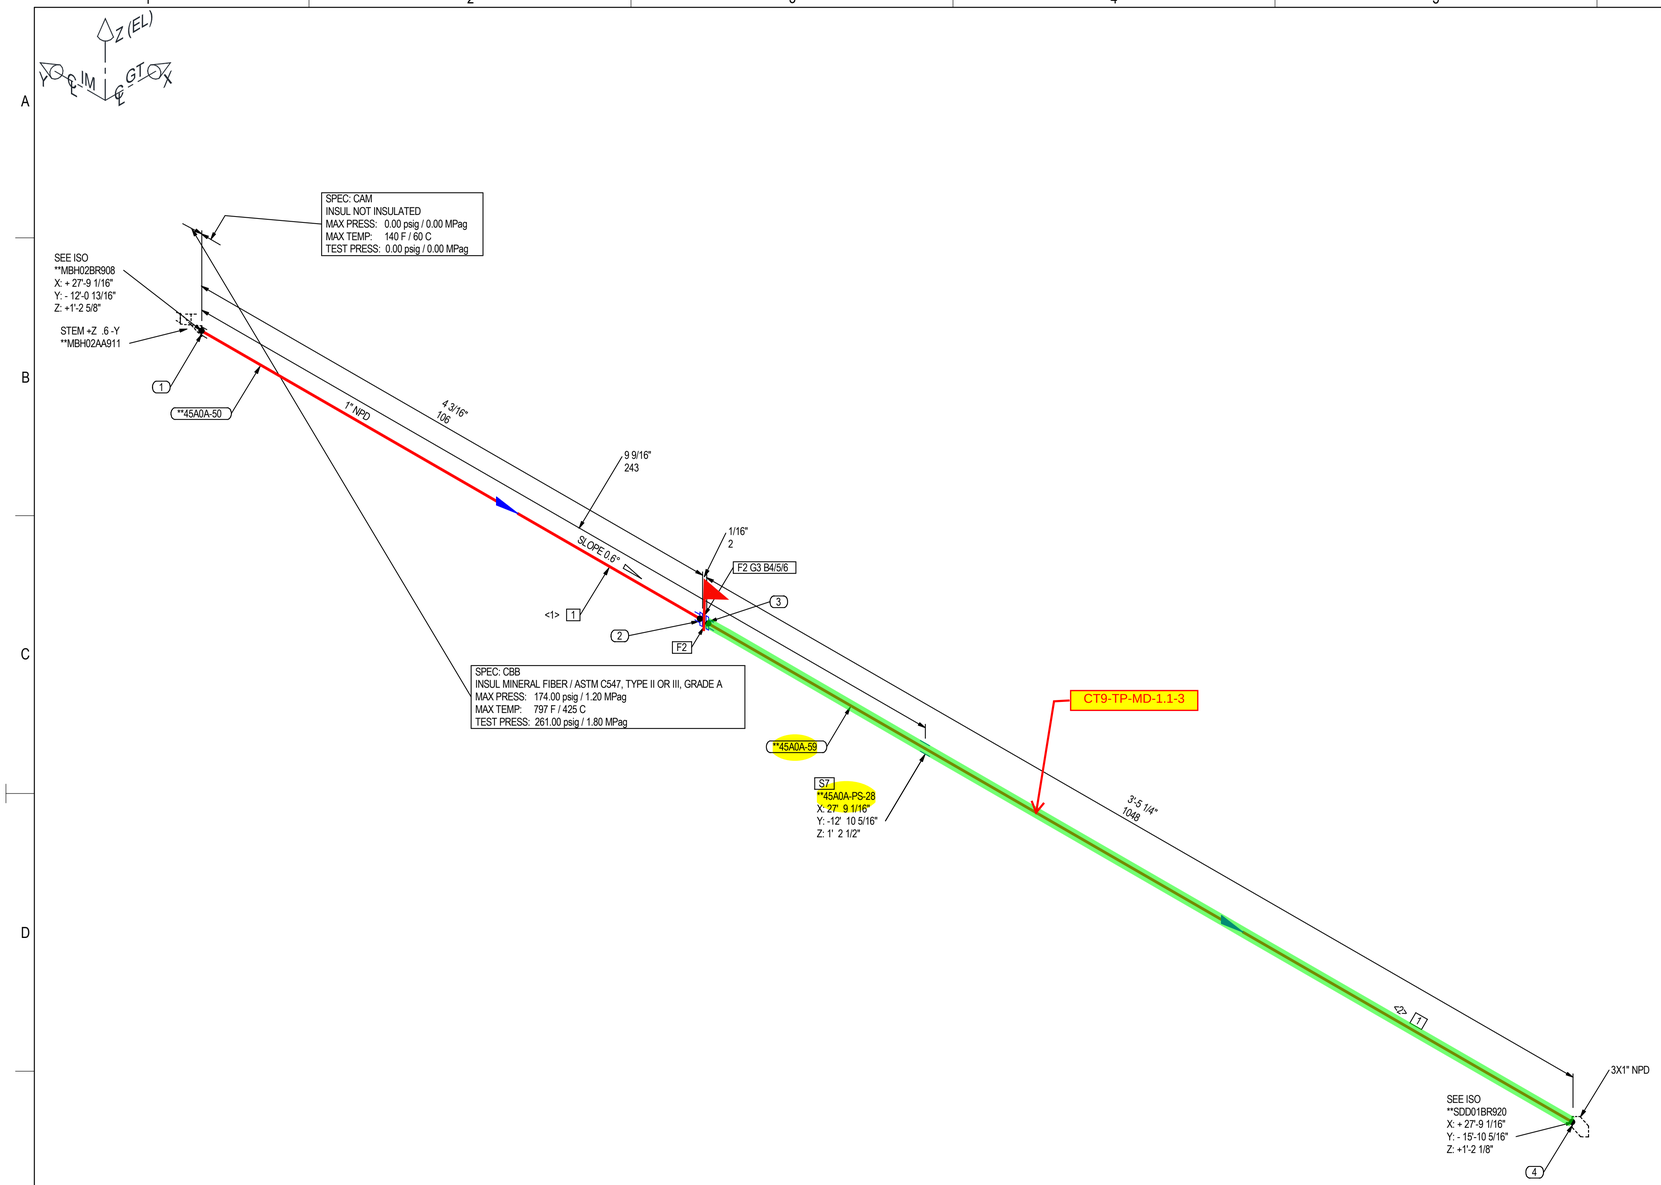

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'
2	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A105	1	MFABAHABZZAADABQ	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1	MITAHAAAALBMNUS	1
4	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBEUZ	4
5	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 13-UNC	1/2	MNOZZACAAZBGAAFU	8
6	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A1008 CS-B	1/2	MWQZZZZBUIBBXADP	8
	PIPE SUPPORTS			
7	PIPE SUPPORT	1	**45A0A-PS-28	1
	SPOOLS			
	**45A0A-50, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 15/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS
<2>	3'5"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	0.00 psig / 0.00 MPag				
TEST PRESS.:	0.00 psig / 0.00 MPag				
MAX. TEMP:	140 F / 60 C				
INSULATION SPEC:	NOT INSULATED				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH02BR926	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

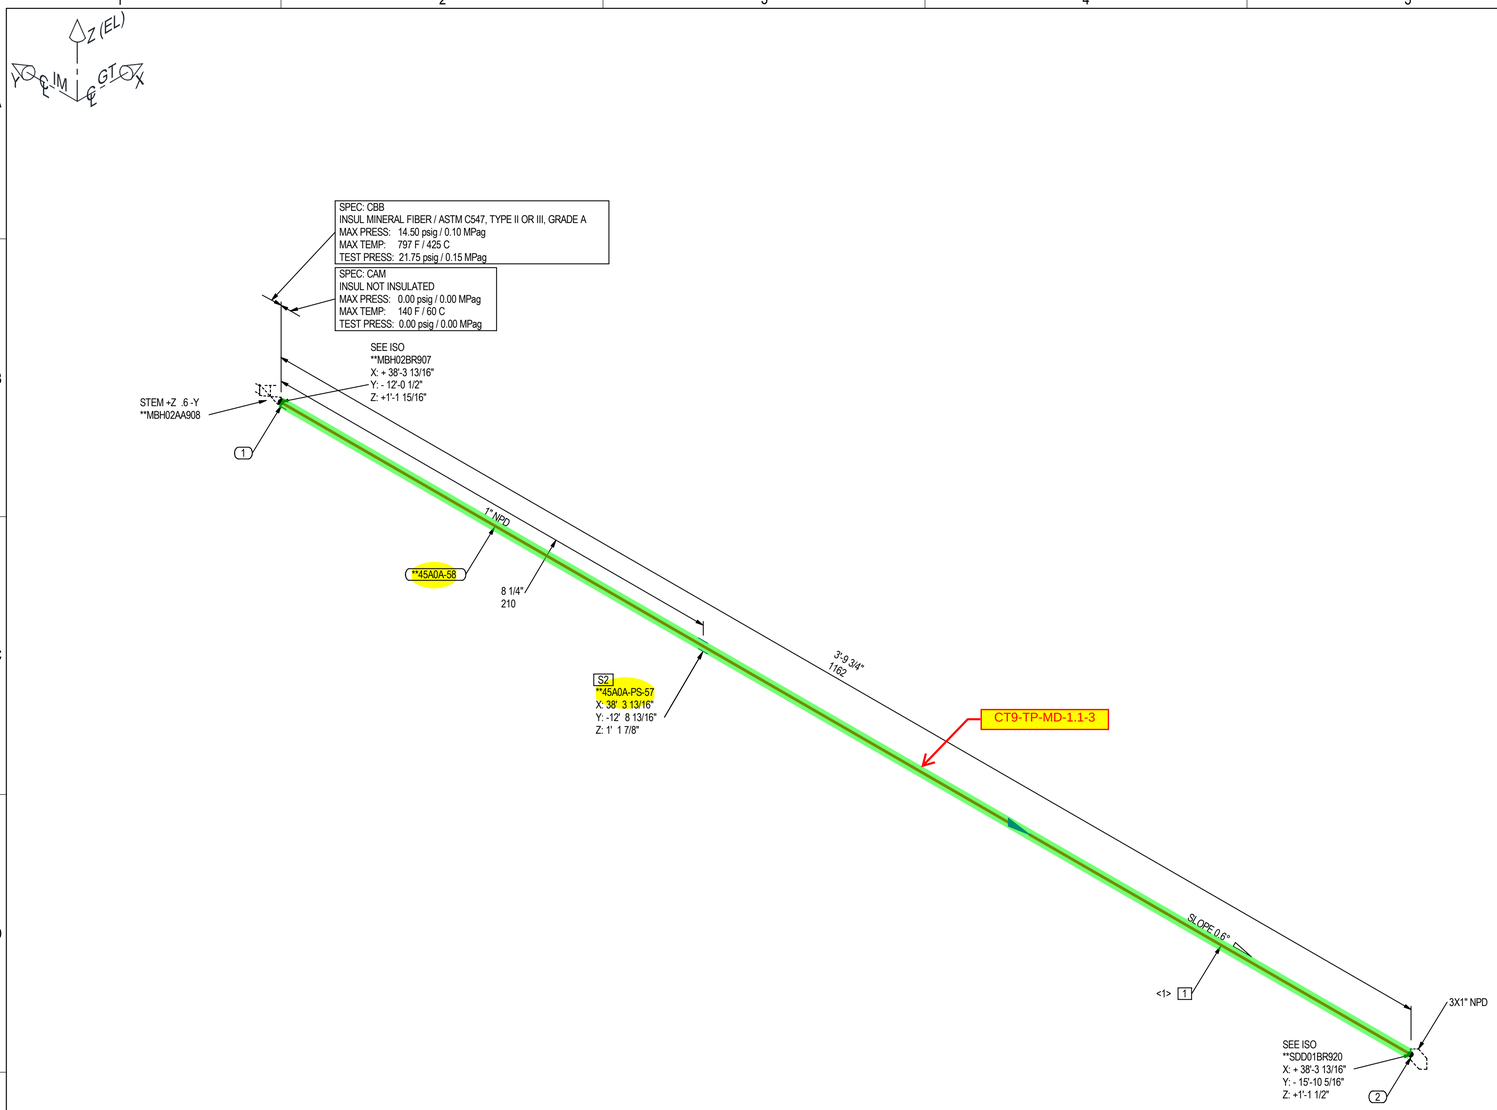

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.9'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-57	1
	SPOOLS			
	**45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 3/4"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX##-###〉 INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	0.00 psig / 0.00 MPag				
TEST PRESS.:	0.00 psig / 0.00 MPag				
MAX. TEMP:	140 F / 60 C				
INSULATION SPEC:	NOT INSULATED				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583 / 0 / 45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-SDD-BR-AA
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03
			M501JAC GAS TURBINE
			PROJECT CODE: - P&ID: -
			PIPELINE: **MBH02BR927 PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

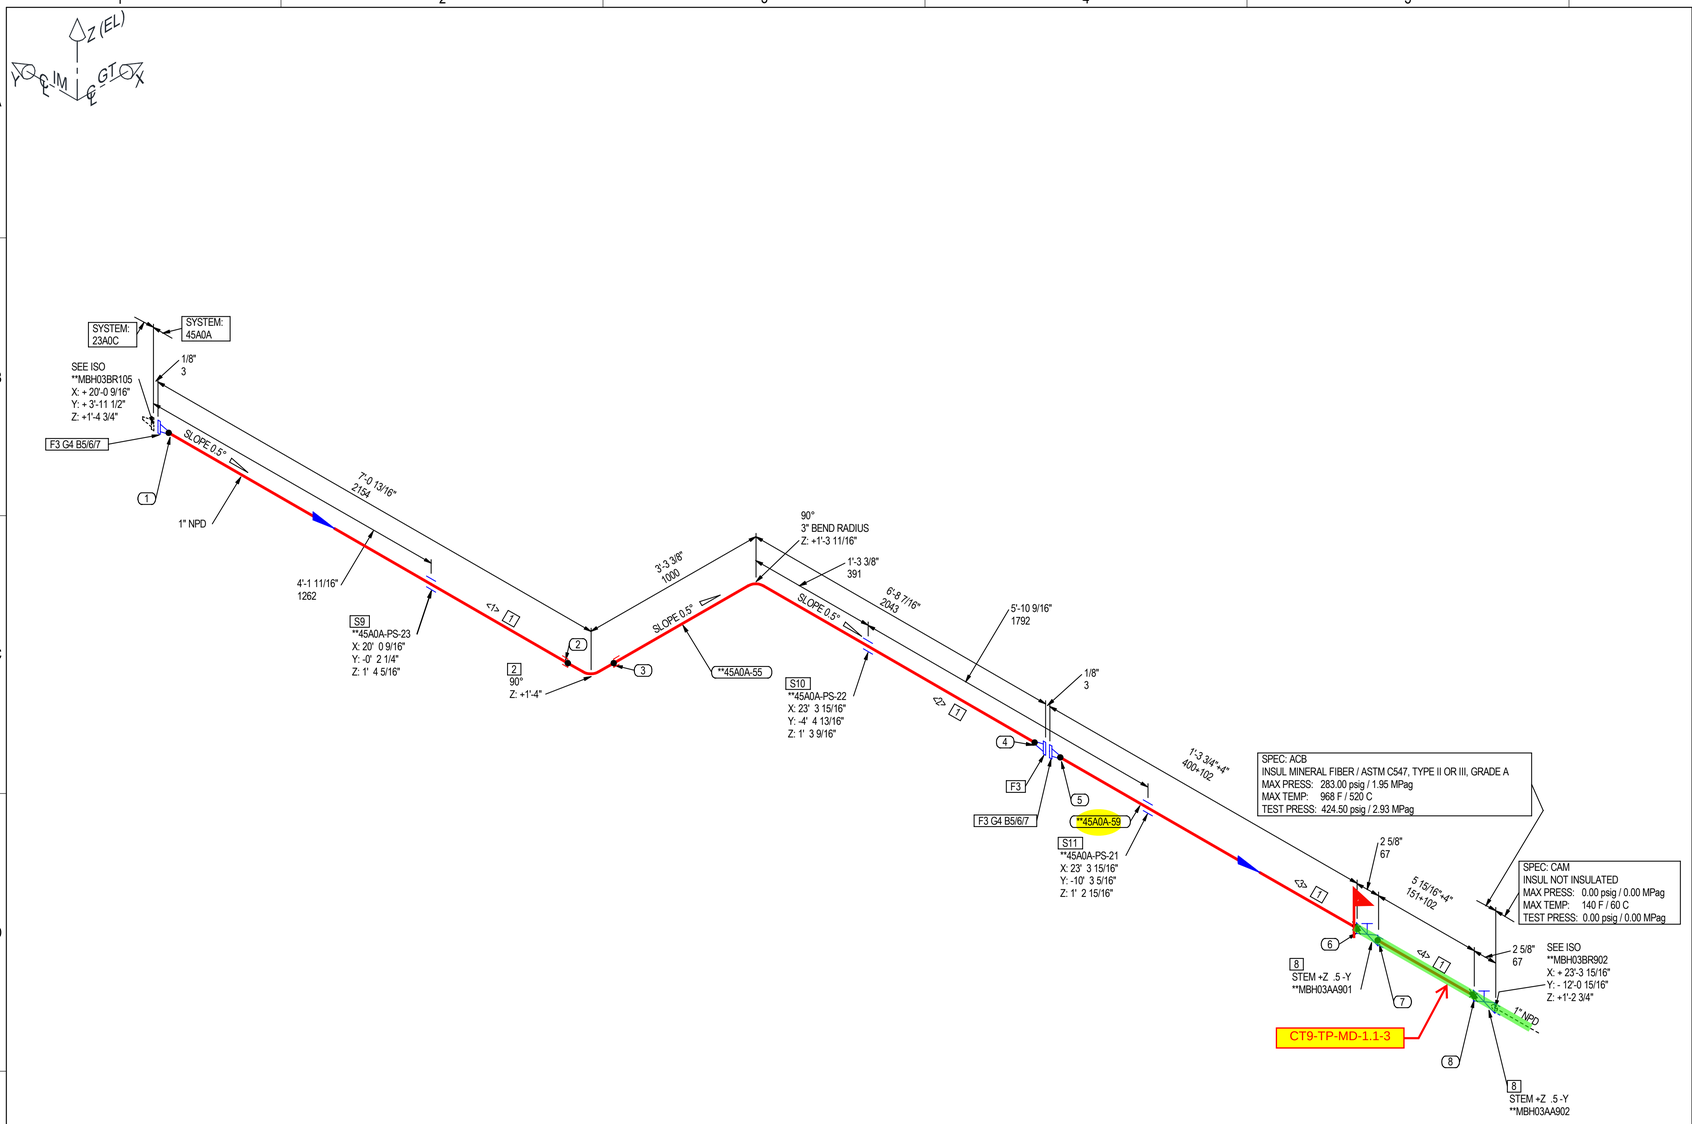

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A335-P11, SEAMLESS	1	MPAAZZBPZZABAAIF	18.6'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F11-CL 2	1	MMCKAWBVZZAAGAGG	1
3	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F11-CL 2, S-80 bore	1	MFAAAPDCZZAADAGG	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAPAXAAKXAKUS	2
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B16, 11-UNC - Length 4.5 in.	5/8	MBAZZADZZIAGBFXZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-7, 11-UNC	5/8	MNOZZADAAZPCEADU	16
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	5/8	MWQZZZZBXIBDAMDP	16
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F11-CL 2	1	MVAAAQBVZZAATAGG	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1	**45A0A-PS-23	1
10	PIPE SUPPORT	1	**45A0A-PS-22	1
11	PIPE SUPPORT	1	**45A0A-PS-21	1
	SPOOLS			
	**45A0A-55, **45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	6'9 3/16"	1		BEVEL	SQ.CUT	MPAAZZBPZZABAAIF
<2>	9'6 15/16"	1	PLD BEND(1)	SQ.CUT	BEVEL	MPAAZZBPZZABAAIF
<3>	1'5 1/16"	1		BEVEL	SQ.CUT	MPAAZZBPZZABAAIF
<4>	9 15/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAAIF

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	BW	S	1"	1
5	BW	S	1"	1
6	SW	S	1"	1
7	SW	S	1"	1
8	SW	S	1"	1

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	ACB	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	AC, GT COMPRESSED AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	283.00 psig / 1.95 MPag							
TEST PRESS.:	424.50 psig / 2.93 MPag							
MAX. TEMP:	968 F / 520 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
▭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH03BR901	1 OF 1	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

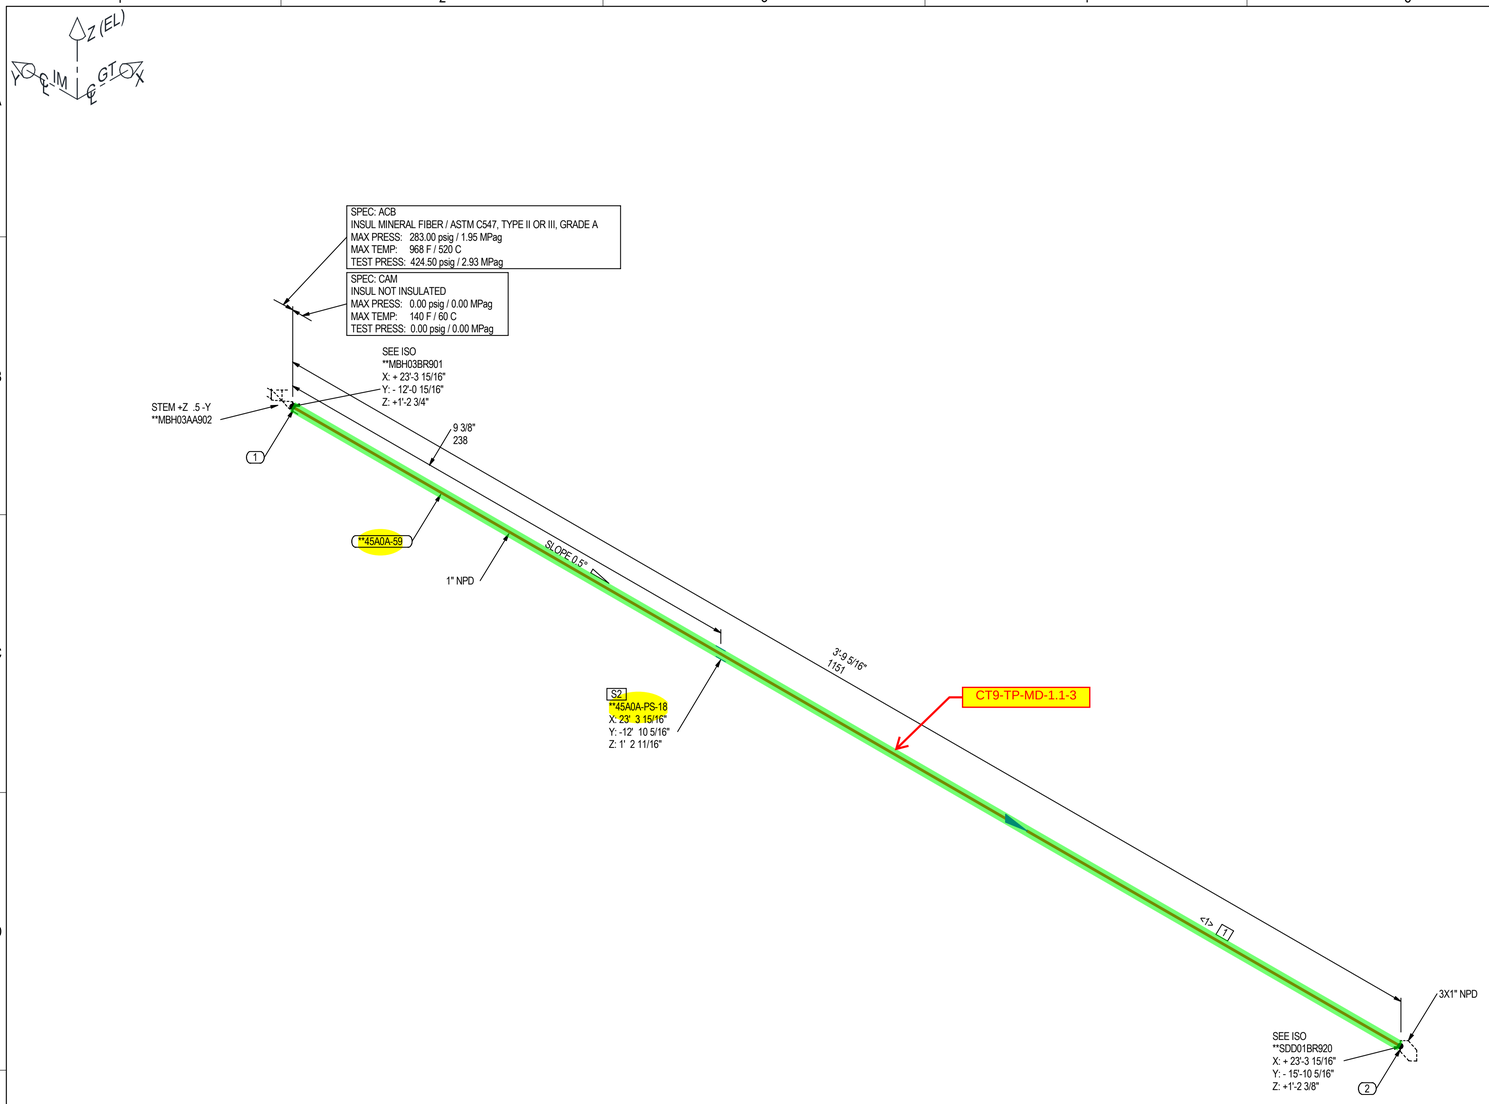

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-18	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 5/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	0.00 psig / 0.00 MPag				
TEST PRESS.:	0.00 psig / 0.00 MPag				
MAX. TEMP:	140 F / 60 C				
INSULATION SPEC:	NOT INSULATED				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBH03BR902	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

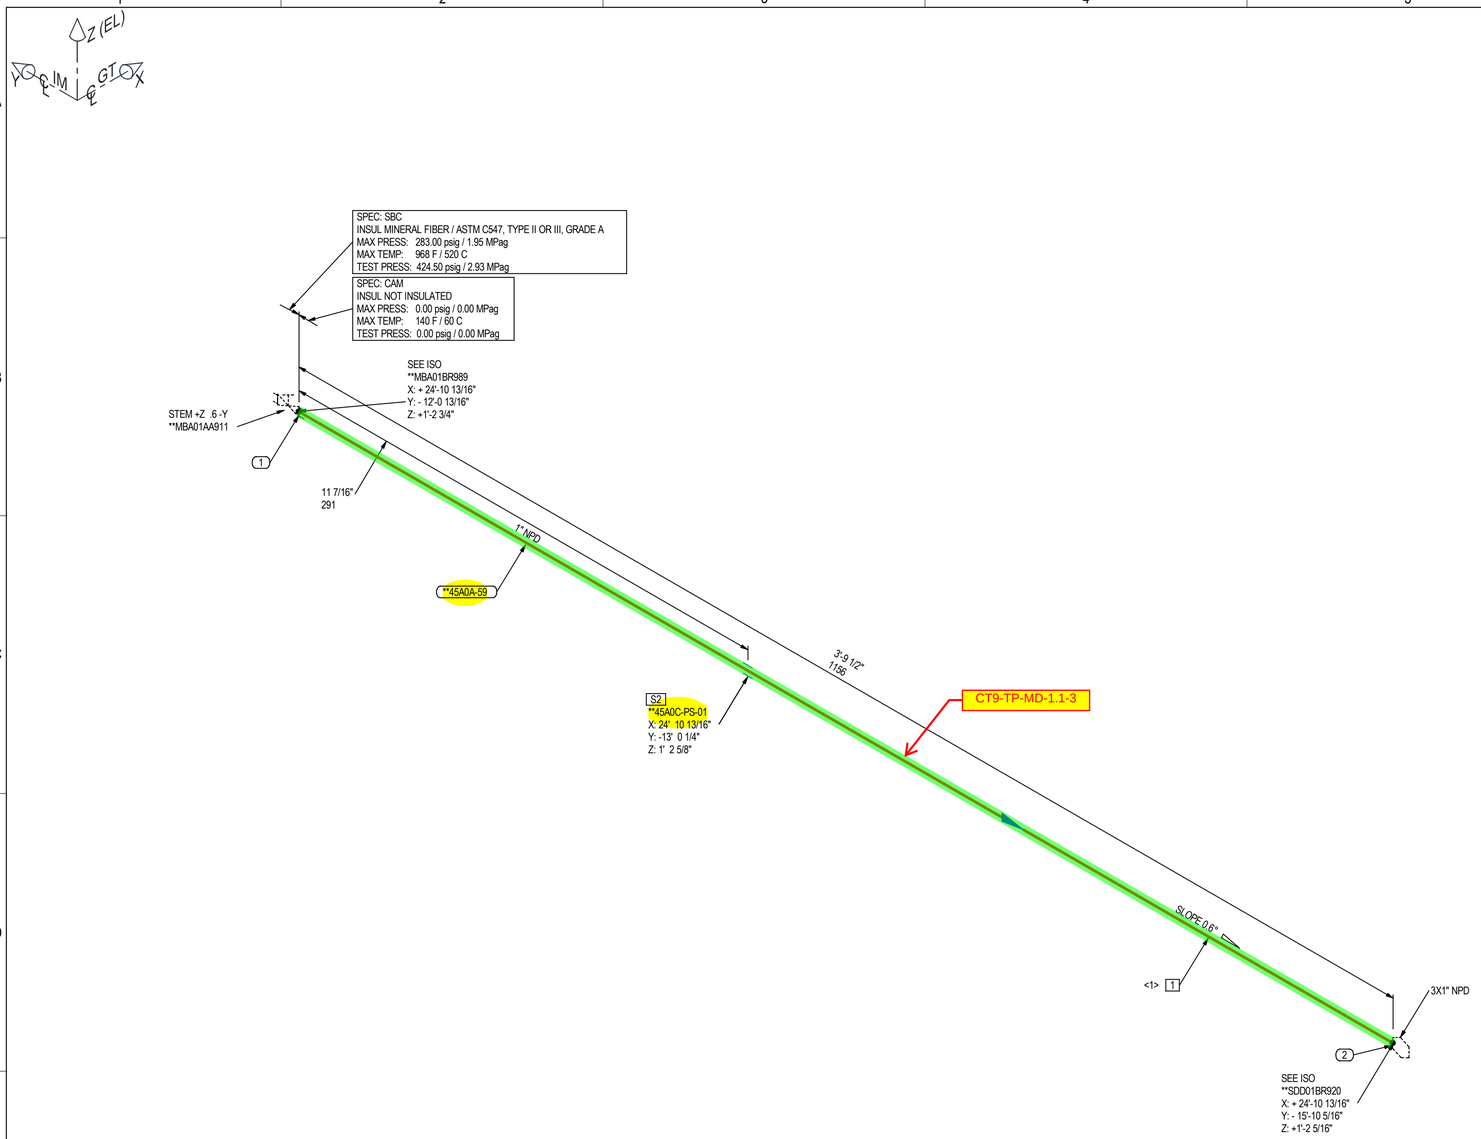

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0C-PS-01	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	0.00 psig / 0.00 MPag				
TEST PRESS.:	0.00 psig / 0.00 MPag				
MAX. TEMP:	140 F / 60 C				
INSULATION SPEC:	NOT INSULATED				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBH03BR912	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

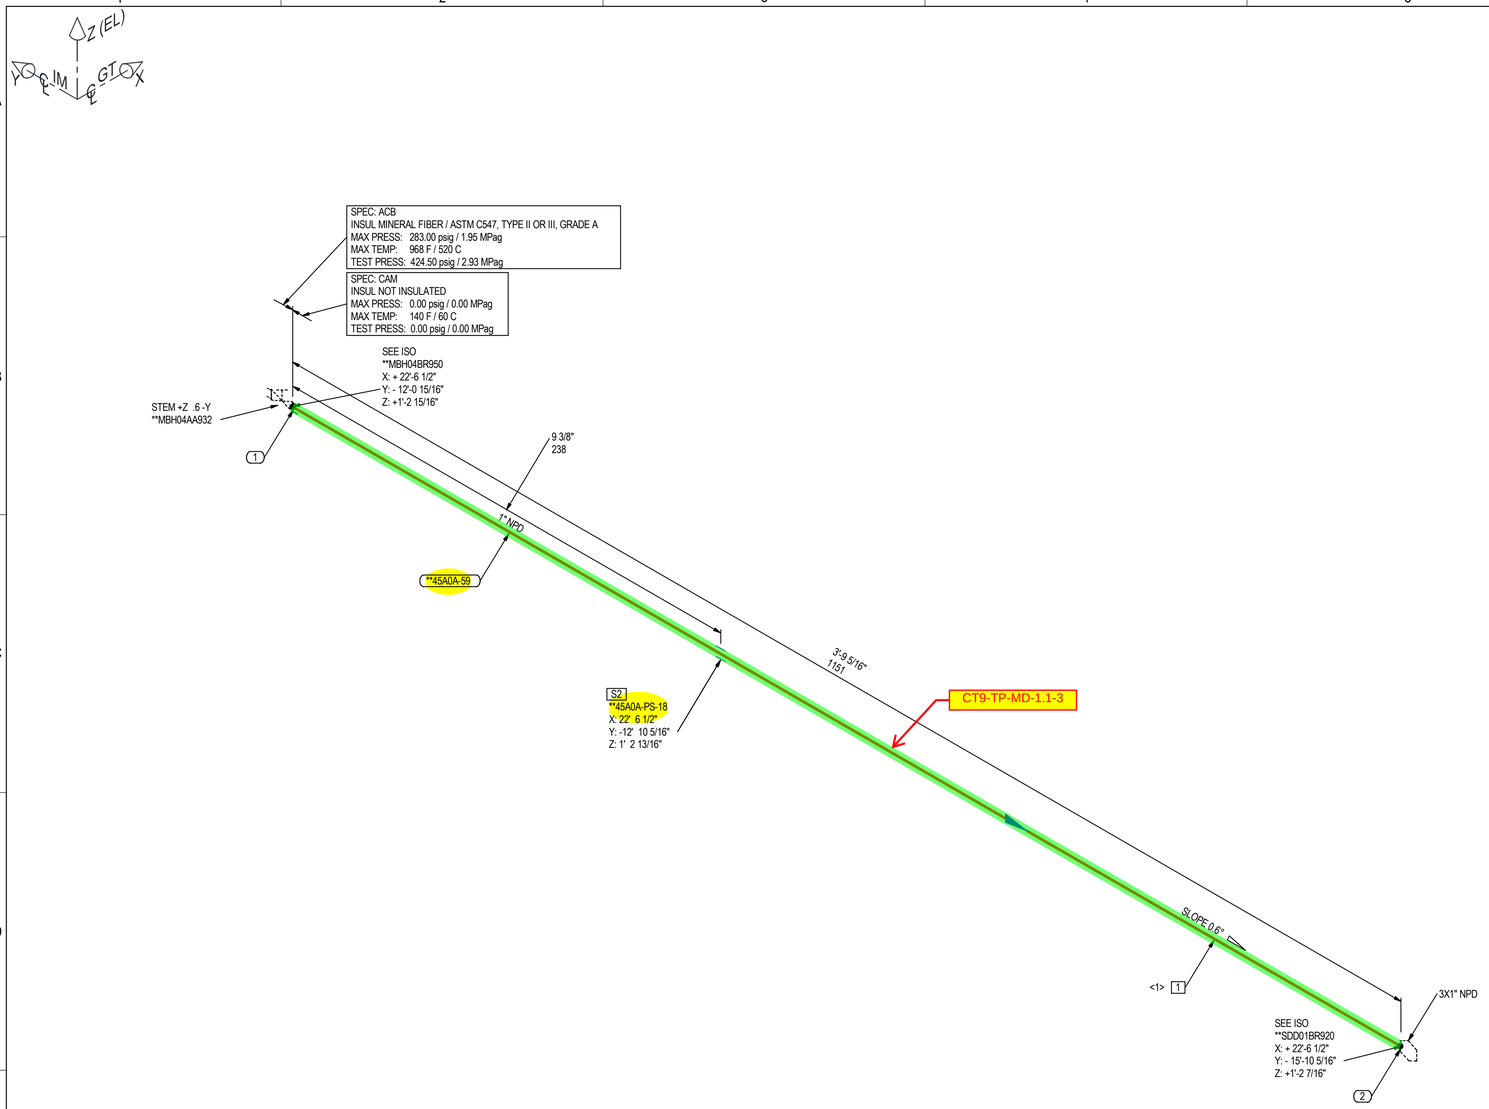

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A106-B, SEAMLESS	1	MPAAZZBPZZABAABS	3.8'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	1	**45A0A-PS-18	1
	SPOOLS			
	**45A0A-59			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3'9 5/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBH04BR920	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

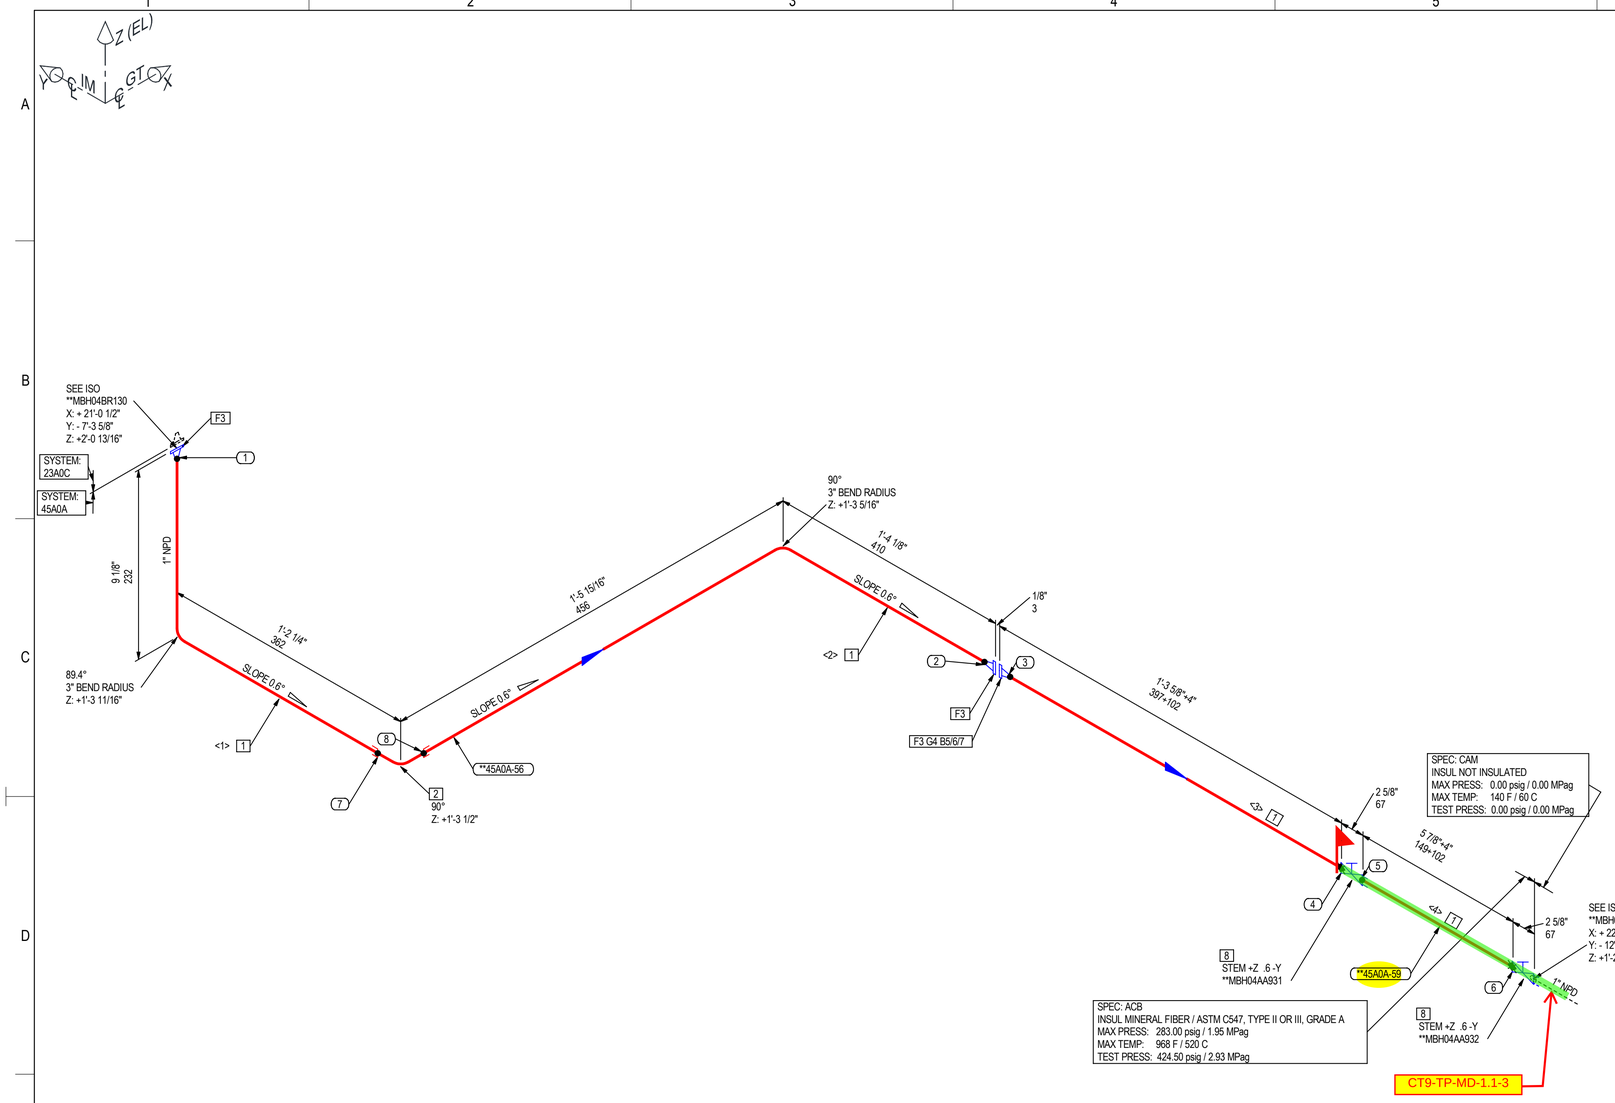

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80, PE, ASME B36.10M, ASTM A335-P11, SEAMLESS	1	MPAAZZBPZZABAAIF	6.3'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F11-CL 2	1	MMCKAWBVZZAAGAGG	1
3	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F11-CL 2, S-80 bore	1	MFAAAPDCZZAADAGG	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING INCONEL X750HT/FILLER THERMICULITE 835, INNER RING 316L/CENTERING RING 316	1	MDAPAXAAKXAKUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B16, 11-UNC - 4.5 in. Length	5/8	MBAZZADZZIAGBFXZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-7, 11-UNC	5/8	MNOZZADAAZPCEADU	8
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	5/8	MWQZZZZBXIBDAMDP	8
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F11-CL 2	1	MVAAAQBVZZAATAGG	2

SPOOLS

**45A0A-56, **45A0A-59

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	1'6 1/2"	1	PLD BEND(1)	BEVEL	SQ.CUT	MPAAZZBPZZABAAIF
<2>	2'5 3/16"	1	PLD BEND(1)	SQ.CUT	BEVEL	MPAAZZBPZZABAAIF
<3>	1'4 15/16"	1		BEVEL	SQ.CUT	MPAAZZBPZZABAAIF
<4>	9 15/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABAAIF

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	1"	1
7	SW	S	1"	1
8	SW	S	1"	1
2	BW	S	1"	1
3	BW	S	1"	1
4	SW	S	1"	1
5	SW	S	1"	1
6	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	ACB
FLUID CODE:	AC, GT COMPRESSED AIR
MAX. PRESS.:	283.00 psig / 1.95 MPag
TEST PRESS.:	424.50 psig / 2.93 MPag
MAX. TEMP:	968 F / 520 C
INSULATION SPEC:	LU-00332

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD				
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBH04BR950	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations. diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

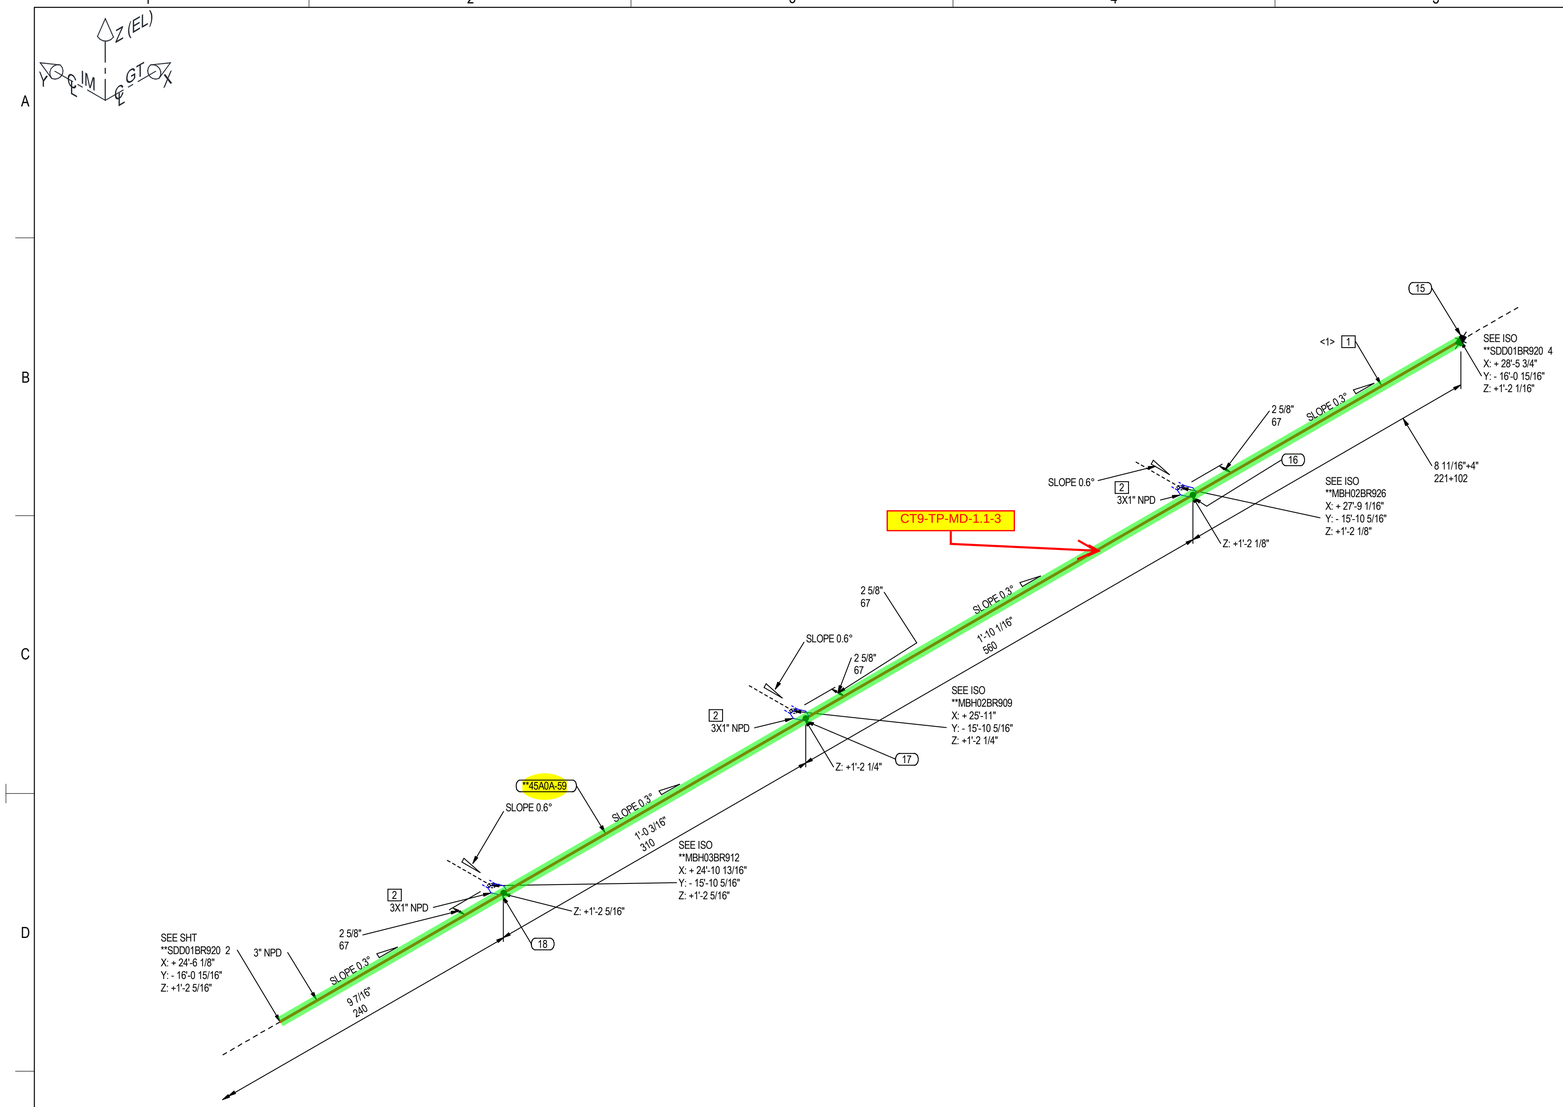

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40, BE, ASME B36.10M, ASTM A106-B, SEAMLESS	3	MPAAZZBOZZABAABS	15.4'
2	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A105	3X1	MMELAWBVZZGKGABQ	3

SPOOLS

**45A0A-59

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	15'4 5/16"	3		BEVEL	BEVEL	MPAAZZBOZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
18	LET	S	1"	1
17	LET	S	1"	1
16	LET	S	1"	1
15	BW	S	3"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**SDD01BR920	3 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

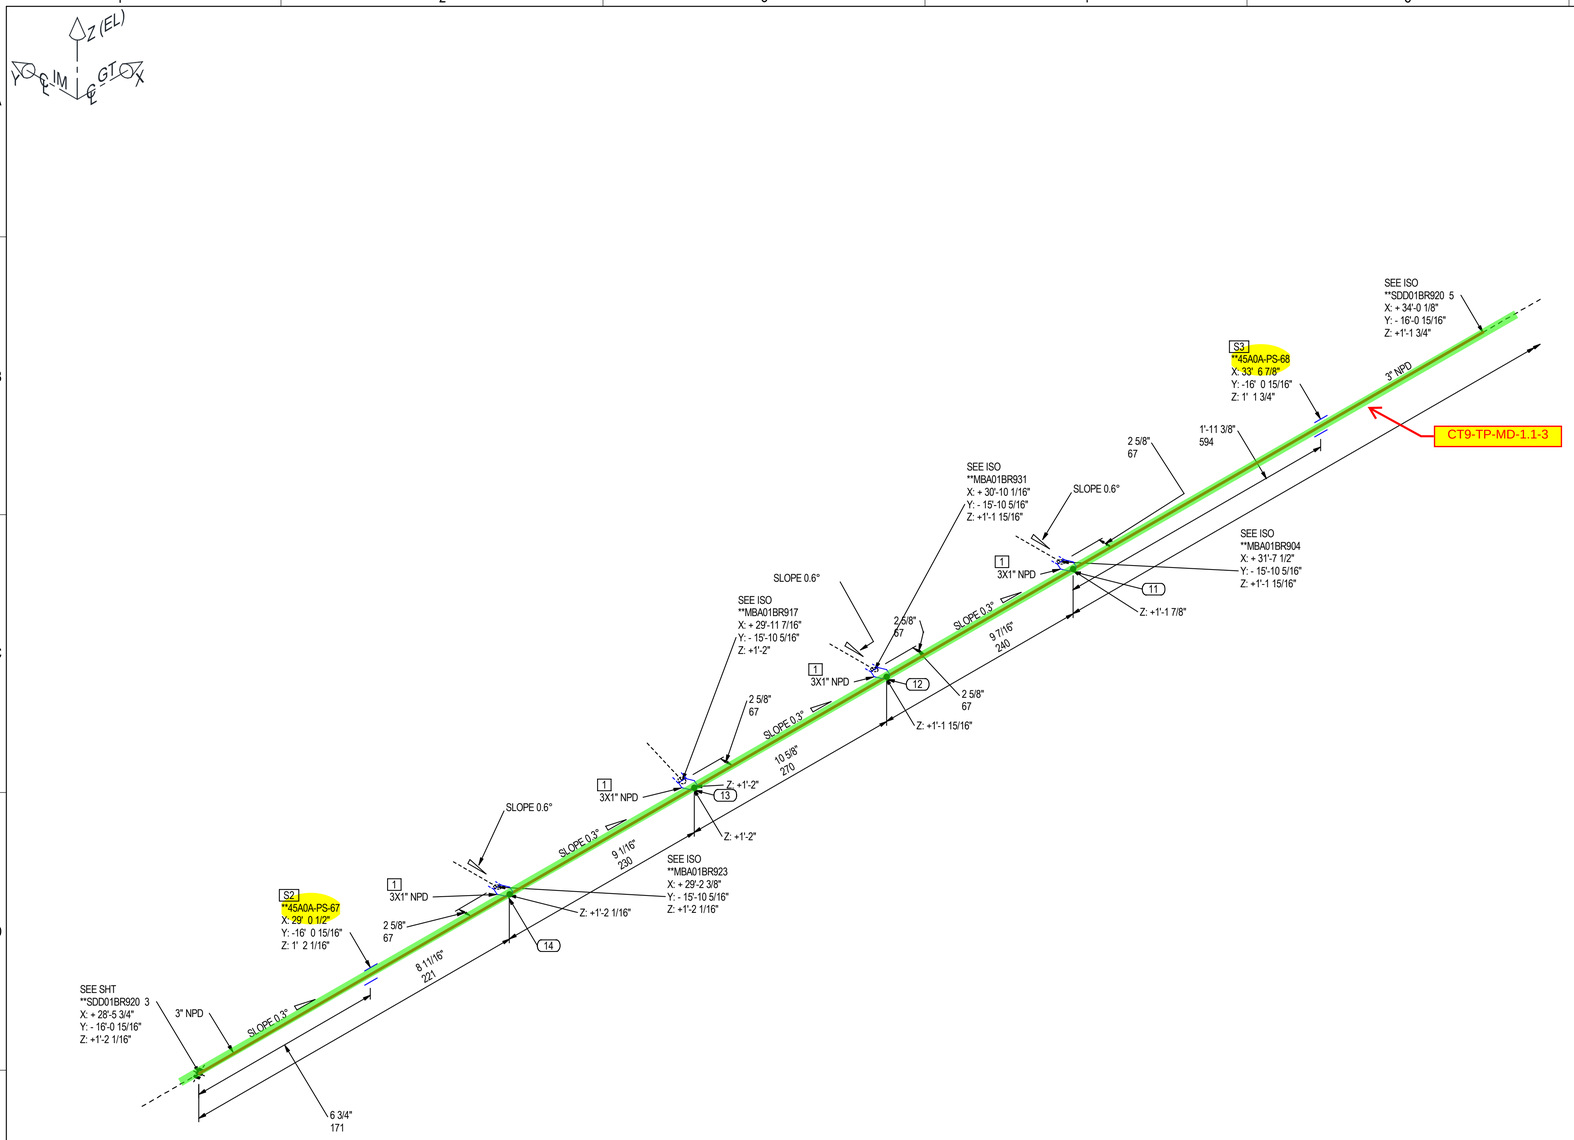

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A105	3X1	MMELAWBVZZGKGABQ	4

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
2	PIPE SUPPORT	3	**45A0A-PS-67	1
3	PIPE SUPPORT	3	**45A0A-PS-68	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
14	LET	S	1"	1
13	LET	S	1"	1
12	LET	S	1"	1
11	LET	S	1"	1

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	**N05-003583**	**0**	**45A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	**BLADE WASHING DRAIN PIPING**		
APPROVED BY:	U. KASINATHAN	11/28/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **SDD01BR920	PAGE NUMBER: 4 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT: SECTION:
DRAWING DISTRIBUTION LIST

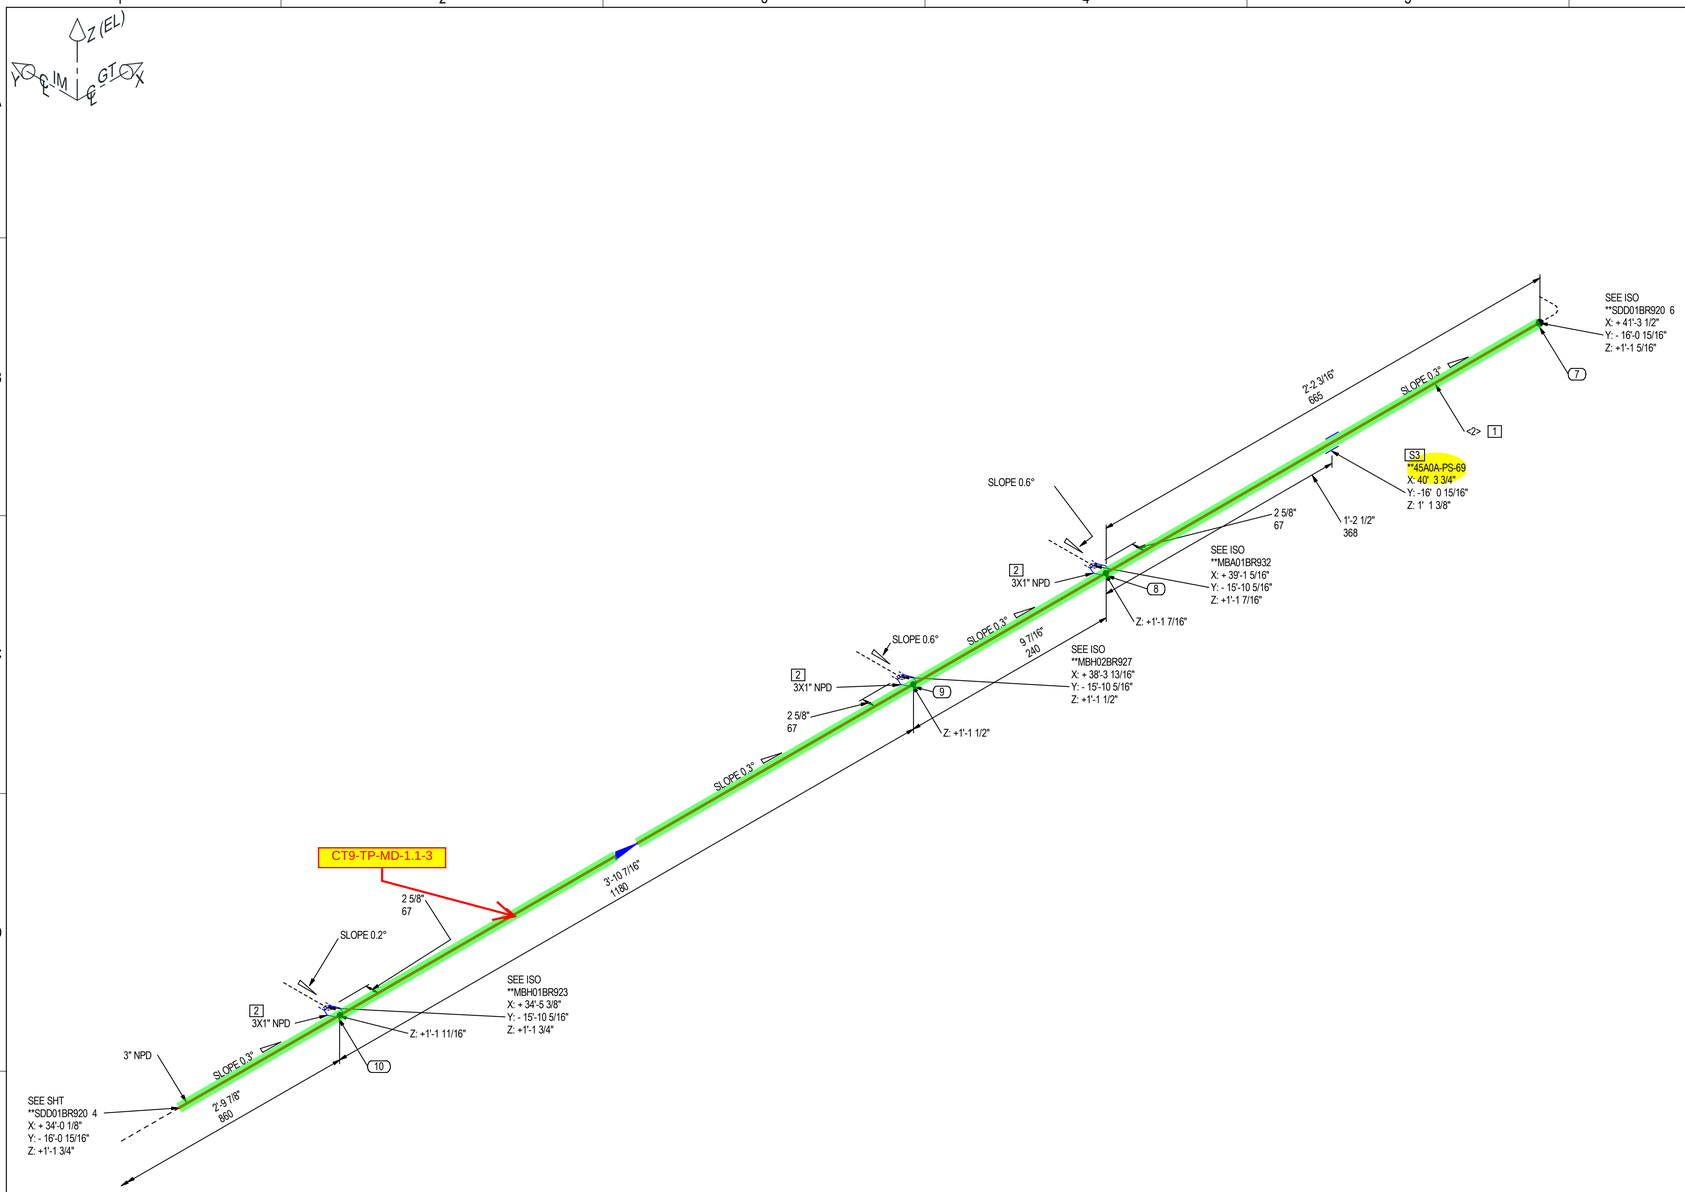

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40, BE, ASME B36.10M, ASTM A106-B, SEAMLESS	3	MPAAZZBOZZABAABS	12.9'
2	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A105	3X1	MMELAWBVZZGKGABQ	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
3	PIPE SUPPORT	3	**45A0A-PS-69	1

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<2>	12'9 3/4"	3		BEVEL	BEVEL	MPAAZZBOZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
10	LET	S	1"	1
9	LET	S	1"	1
8	LET	S	1"	1
7	BW	S	3"	1

PIPING SPEC:	CAM
FLUID CODE:	ZW, WASHING WATER
MAX. PRESS.:	0.00 psig / 0.00 MPag
TEST PRESS.:	0.00 psig / 0.00 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊠ FW - FIELD WELD
⊠ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		

FOR FABRICATION & ERECTION

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

N05-ISO-SDD-BR-AA
P&ID DRAWING NUMBER:N01-PID-SDD-00-03
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**SDD01BR920		5 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

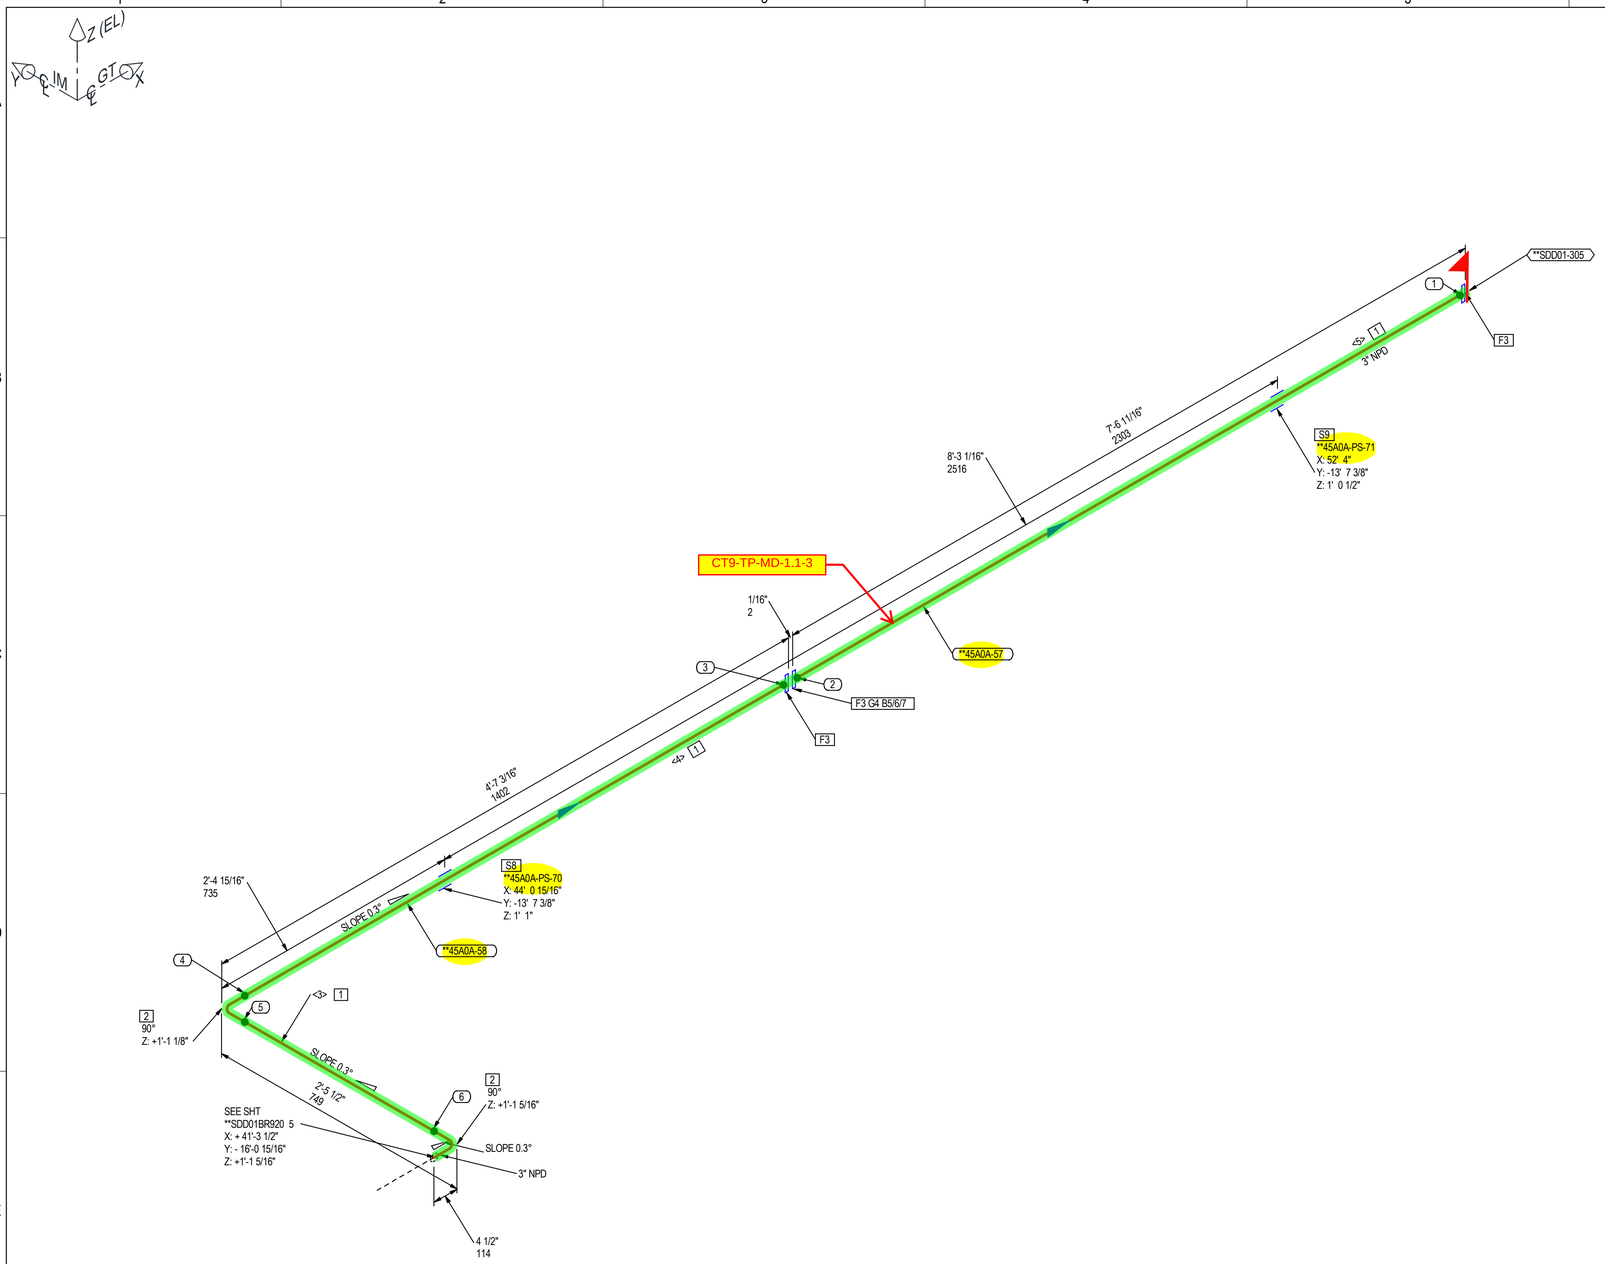

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40, BE, ASME B36.10M, ASTM A106-B, SEAMLESS	3	MPAAZZBOZZABAABS	13.5'
2	90 DEG ELBOW LR, S-40, BE, ASME B16.9, ASTM A234-WPB, SEAMLESS	3	MMCMZZBOZZAAEADC	2
3	FLANGE SLIP-ON, CL150, RFFE, ASME B16.5, ASTM A105	3	MFAIAHABZZAADABQ	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	3	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4.5 in. Length	5/8	MBAZZADZZIAGBEUZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	8
7	WASHER, SPECIAL SHAPED LOCK, 3in NPD, 1.2mm THK, MHPSA G1-90942, ASTM A1008 CS-B	5/8	MWQZZZZBXIBBXADP	8
	PIPE SUPPORTS			
8	PIPE SUPPORT	3	**45A0A-PS-70	1
9	PIPE SUPPORT	3	**45A0A-PS-71	1
	SPOOLS			
	**45A0A-57, **45A0A-58			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<3>	1'8 1/2"	3		BEVEL	BEVEL	MPAAZZBOZZABAABS
<4>	4'2 3/8"	3		BEVEL	SQ.CUT	MPAAZZBOZZABAABS
<5>	7'6 1/16"	3		SQ.CUT	SQ.CUT	MPAAZZBOZZABAABS

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
6	BW	S	3"	1
5	BW	S	3"	1
4	BW	S	3"	1
3	SOF	S	3"	2
2	SOF	S	3"	2
1	SOF	S	3"	2

PIPING SPEC:	CAM	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	ZW, WASHING WATER	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	11/19/2025	N05-003583	0	45A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	11/24/2025	BLADE WASHING DRAIN PIPING		
APPROVED BY:	U. KASINATHAN	11/28/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-SDD-BR-AA		
			P&ID DRAWING NUMBER:N01-PID-SDD-00-03		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER: 6 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-05	**23A0A-9	
2	**23A0B-PS-03	**23A0B-16	
3	**23A0B-PS-04	**23A0B-22	
4	**23A0B-PS-05	**23A0B-22	
5	**23A0B-PS-12	**23A0B-15	SEE NOTE 5
6	**23A0C-PS-10	**23A0C-16	
7	**23A0C-PS-11	**23A0C-16	
8	**23A0C-PS-17	**23A0C-24	
9	**23A0D-PS-01	**23A0D-2	
10	**23A0E-PS-01	**23A0E-3	
11	**23A0G-PS-01	**23A0G-12	
12	**23A0G-PS-02	**23A0G-12	
13	**23A0G-PS-03	**23A0G-12	
14	**23A0H-PS-07	**23A0H-6	
15	**23A0H-PS-08	**23A0H-6	
16	**23A0H-PS-09	**23A0H-5	
17	**23A0H-PS-10	**23A0H-5	
18	**23A0H-PS-25	**23A0H-21	
19	**23A0S-PS-07	**23A0S-24	SEE NOTE 5
20	**23A0U-PS-07	**23A0U-24	
21	**24A0A-PS-01	**24A0A-22	
22	**24A0A-PS-02	**24A0A-22	
23	**24A0A-PS-03	**24A0A-25	
24	**24A0A-PS-04	**24A0A-25	
25	**24A0A-PS-05	**24A0A-27	
26	**24A0A-PS-06	**24A0A-28	
27	**24A0A-PS-100	**24A0A-13	
28	**24A0A-PS-108	**24A0A-24	
29	**24A0A-PS-109	**24A0A-24	
30	**24A0A-PS-122	AIR CHAMBER	
31	**24A0A-PS-123	AIR CHAMBER	
32	**24A0A-PS-124	AIR CHAMBER	
33	**24A0A-PS-125	AIR CHAMBER	
34	**24A0A-PS-13	**24A0A-40	
35	**24A0A-PS-14	**24A0A-8	
36	**24A0A-PS-21	**24A0A-49	
37	**24A0A-PS-22	**24A0A-50	
38	**24A0A-PS-23	**24A0A-52	
39	**24A0A-PS-24	**24A0A-52	
40	**24A0A-PS-30	**24A0A-28	
41	**24A0A-PS-31	**24A0A-28	
42	**24A0A-PS-73	**24A0A-50	
43	**24A0A-PS-77	**24A0A-51	
44	**24A0A-PS-99	**24A0A-14	
45	**24A0C-PS-01	**24A0C-4	
46	**24A0C-PS-02	**24A0C-3	
47	**24A0C-PS-03	**24A0C-6	
48	**24A0C-PS-04	**24A0C-6	
49	**24A0C-PS-05	**24A0C-6	
50	**27A0A-PS-01	**27A0A-6	
51	**27A0A-PS-07	**27A0A-10	
52	**27A0A-PS-08	**27A0A-10	
53	**27A0A-PS-09	**27A0A-10	
54	**27A0B-PS-01	**27A0B-1	
55	**27A0B-PS-02	**27A0B-3	
56	**27A0B-PS-03	**27A0B-3	
57	**27A0B-PS-04	**27A0B-4	
58	**27A0B-PS-05	**27A0B-5	
59	**27A0B-PS-09	**27A0B-24	
60	**27A0F-PS-01	**27A0F-6	SEE NOTE 5
61	**45A0A-PS-01	**45A0A-59	
62	**45A0A-PS-02	**45A0A-47	SEE NOTE 5
63	**45A0A-PS-03	**45A0A-59	
64	**45A0A-PS-04	**45A0A-59	
65	**45A0A-PS-09	**45A0A-59	
66	**45A0A-PS-13	**45A0A-48	
67	**45A0A-PS-18	**45A0A-59	
68	**45A0A-PS-19	**45A0A-59	
69	**45A0A-PS-21	**45A0A-59	
70	**45A0A-PS-25	**45A0A-59	
71	**45A0A-PS-28	**45A0A-59	
72	**45A0A-PS-29	**45A0A-50	
73	**45A0A-PS-30	**45A0A-58	
74	**45A0A-PS-31	**45A0A-58	
75	**45A0A-PS-36	**45A0A-58	
76	**45A0A-PS-40	**45A0A-58	
77	**45A0A-PS-46	**45A0A-58	
78	**45A0A-PS-51	**45A0A-59	
79	**45A0A-PS-53	**45A0A-58	
80	**45A0A-PS-54	**45A0A-58	
81	**45A0A-PS-57	**45A0A-58	
82	**45A0A-PS-58	**45A0A-58	
83	**45A0A-PS-63	**45A0A-58	
84	**45A0A-PS-66	**45A0A-59	
85	**45A0A-PS-67	**45A0A-58	
86	**45A0A-PS-68	**45A0A-58	
87	**45A0A-PS-69	**45A0A-58	
88	**45A0A-PS-70	**45A0A-58	
89	**45A0A-PS-71	**45A0A-57	
90	**45A0C-PS-01	**45A0A-59 **45A0C-1	
91	**45A0C-PS-02	**45A0C-1	
92	**45A0E-PS-01	**45A0E-1	
93	**64A0A-PS-01	FFS	
94	**64A0A-PS-02	FFS	

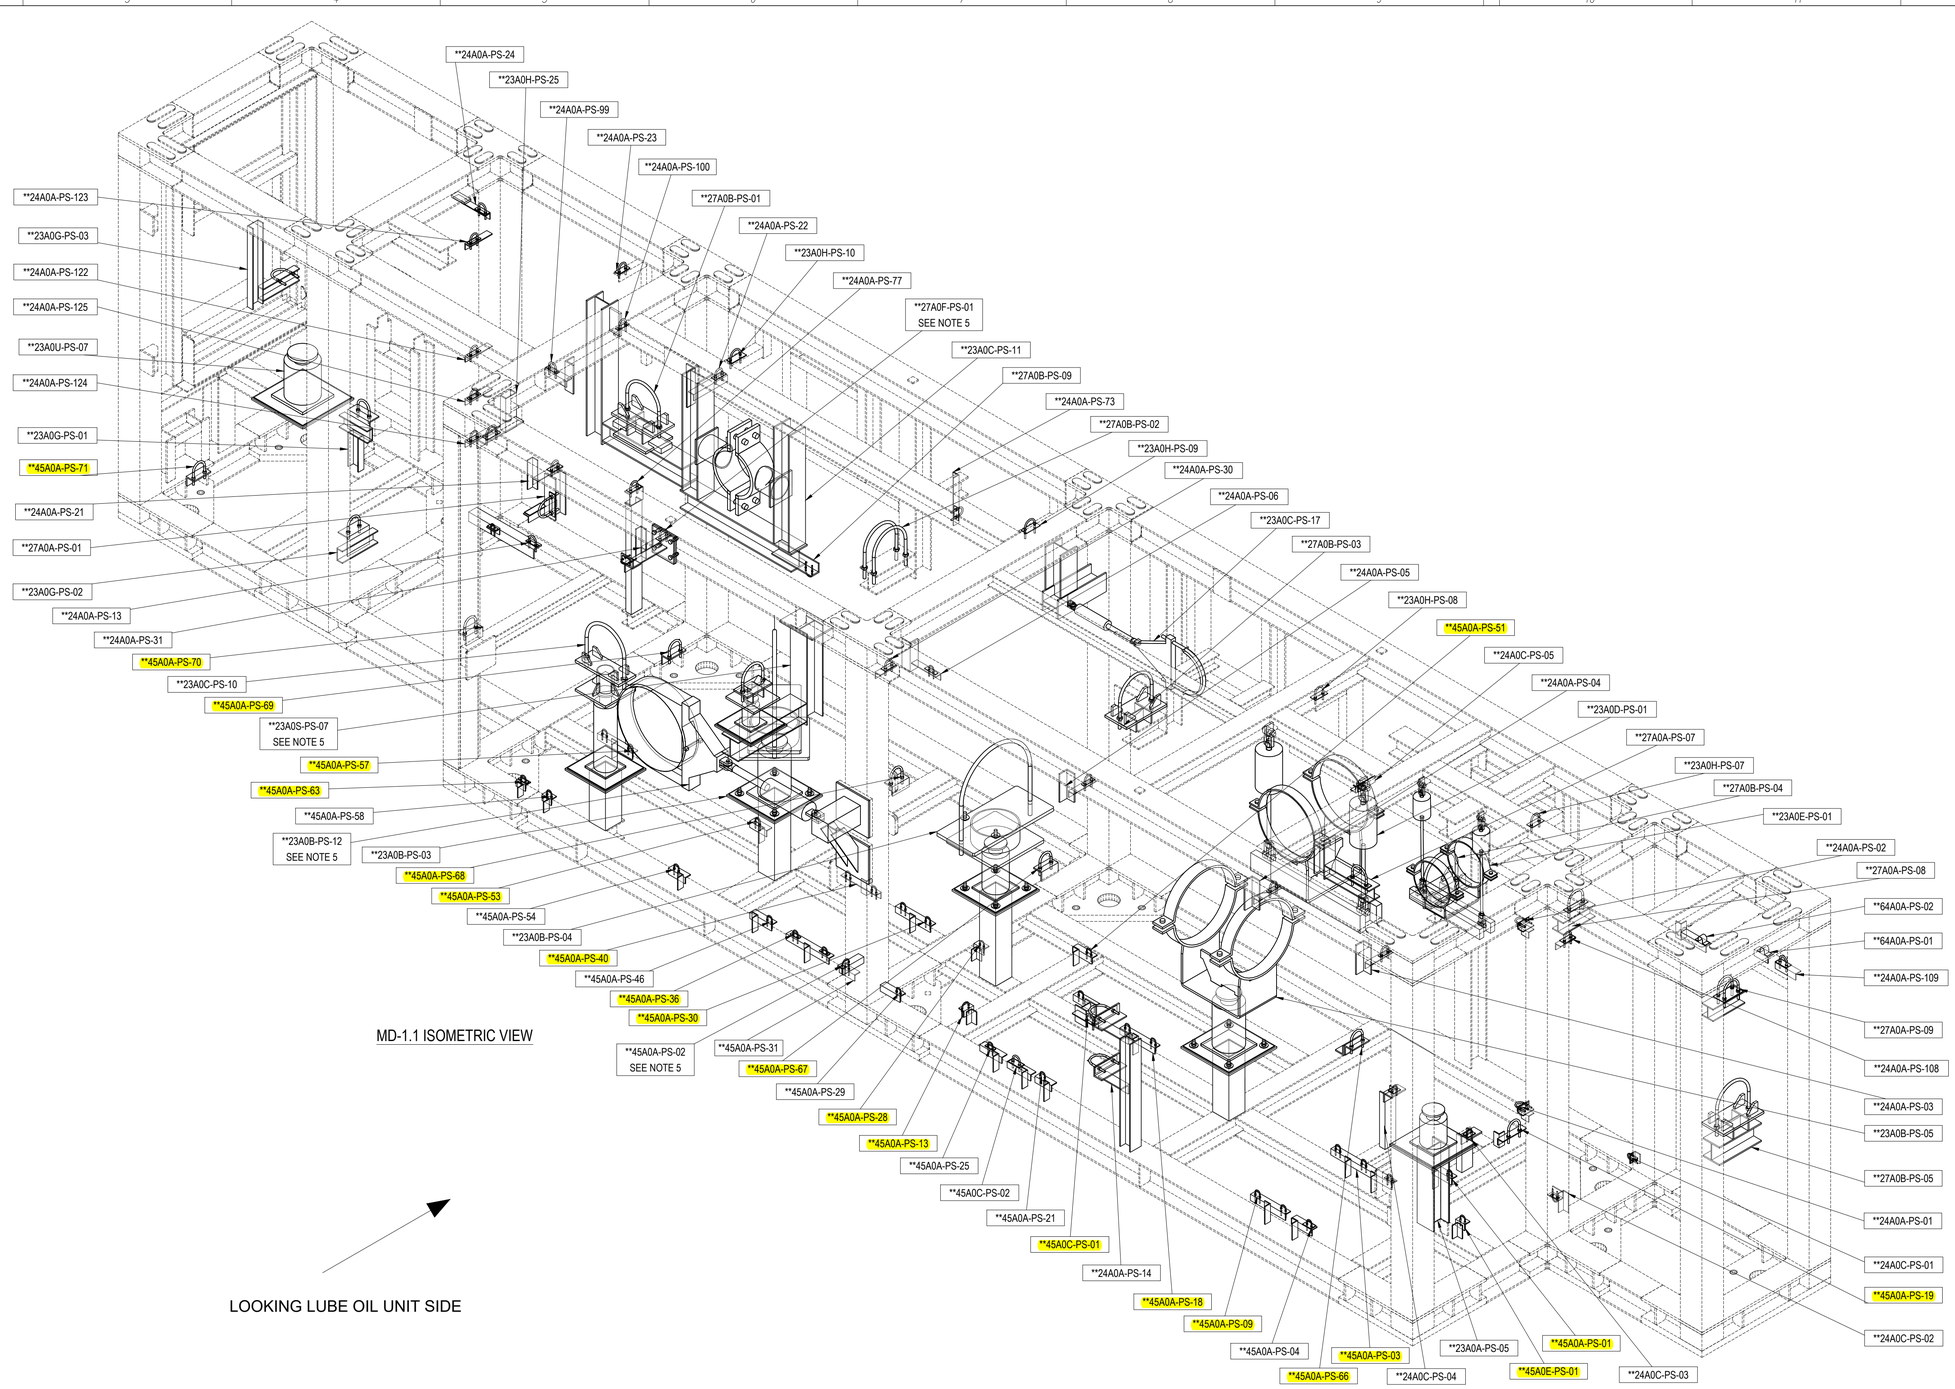

MD-1.1 ISOMETRIC VIEW

LOOKING LUBE OIL UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME

MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -


PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-05	**23A0A-9	
2	**23A0B-PS-03	**23A0B-16	
3	**23A0B-PS-04	**23A0B-22	
4	**23A0B-PS-05	**23A0B-22	
5	**23A0B-PS-12	**23A0B-15	SEE NOTE 5
6	**23A0C-PS-10	**23A0C-16	
7	**23A0C-PS-11	**23A0C-16	
8	**23A0C-PS-17	**23A0C-24	
9	**23A0D-PS-01	**23A0D-2	
10	**23A0E-PS-01	**23A0E-3	
11	**23A0G-PS-01	**23A0G-12	
12	**23A0G-PS-02	**23A0G-12	
13	**23A0G-PS-03	**23A0G-12	
14	**23A0H-PS-07	**23A0H-6	
15	**23A0H-PS-08	**23A0H-6	
16	**23A0H-PS-09	**23A0H-5	
17	**23A0H-PS-10	**23A0H-5	
18	**23A0H-PS-25	**23A0H-21	
19	**23A0S-PS-07	**23A0S-24	SEE NOTE 5
20	**23A0U-PS-07	**23A0U-24	
21	**24A0A-PS-01	**24A0A-22	
22	**24A0A-PS-02	**24A0A-22	
23	**24A0A-PS-03	**24A0A-25	
24	**24A0A-PS-04	**24A0A-25	
25	**24A0A-PS-05	**24A0A-27	
26	**24A0A-PS-06	**24A0A-28	
27	**24A0A-PS-100	**24A0A-13	
28	**24A0A-PS-108	**24A0A-24	
29	**24A0A-PS-109	**24A0A-24	
30	**24A0A-PS-122	AIR CHAMBER	
31	**24A0A-PS-123	AIR CHAMBER	
32	**24A0A-PS-124	AIR CHAMBER	
33	**24A0A-PS-125	AIR CHAMBER	
34	**24A0A-PS-13	**24A0A-40	
35	**24A0A-PS-14	**24A0A-8	
36	**24A0A-PS-21	**24A0A-49	
37	**24A0A-PS-22	**24A0A-50	
38	**24A0A-PS-23	**24A0A-52	
39	**24A0A-PS-24	**24A0A-52	
40	**24A0A-PS-30	**24A0A-28	
41	**24A0A-PS-31	**24A0A-28	
42	**24A0A-PS-73	**24A0A-50	
43	**24A0A-PS-77	**24A0A-51	
44	**24A0A-PS-99	**24A0A-14	
45	**24A0C-PS-01	**24A0C-4	
46	**24A0C-PS-02	**24A0C-3	
47	**24A0C-PS-03	**24A0C-6	
48	**24A0C-PS-04	**24A0C-6	
49	**24A0C-PS-05	**24A0C-6	
50	**27A0A-PS-01	**27A0A-6	
51	**27A0A-PS-07	**27A0A-10	
52	**27A0A-PS-08	**27A0A-10	
53	**27A0A-PS-09	**27A0A-10	
54	**27A0B-PS-01	**27A0B-1	
55	**27A0B-PS-02	**27A0B-3	
56	**27A0B-PS-03	**27A0B-3	
57	**27A0B-PS-04	**27A0B-4	
58	**27A0B-PS-05	**27A0B-5	
59	**27A0B-PS-09	**27A0B-24	
60	**27A0F-PS-01	**27A0F-6	SEE NOTE 5
61	**45A0A-PS-01	**45A0A-59	
62	**45A0A-PS-02	**45A0A-47	SEE NOTE 5
63	**45A0A-PS-03	**45A0A-59	
64	**45A0A-PS-04	**45A0A-59	
65	**45A0A-PS-09	**45A0A-59	
66	**45A0A-PS-13	**45A0A-48	
67	**45A0A-PS-18	**45A0A-59	
68	**45A0A-PS-19	**45A0A-59	
69	**45A0A-PS-21	**45A0A-59	
70	**45A0A-PS-25	**45A0A-59	
71	**45A0A-PS-28	**45A0A-59	
72	**45A0A-PS-29	**45A0A-50	
73	**45A0A-PS-30	**45A0A-58	
74	**45A0A-PS-31	**45A0A-58	
75	**45A0A-PS-36	**45A0A-58	
76	**45A0A-PS-40	**45A0A-58	
77	**45A0A-PS-46	**45A0A-58	
78	**45A0A-PS-51	**45A0A-59	
79	**45A0A-PS-53	**45A0A-58	
80	**45A0A-PS-54	**45A0A-58	
81	**45A0A-PS-57	**45A0A-58	
82	**45A0A-PS-58	**45A0A-58	
83	**45A0A-PS-63	**45A0A-58	
84	**45A0A-PS-66	**45A0A-59	
85	**45A0A-PS-67	**45A0A-58	
86	**45A0A-PS-68	**45A0A-58	
87	**45A0A-PS-69	**45A0A-58	
88	**45A0A-PS-70	**45A0A-58	
89	**45A0A-PS-71	**45A0A-57	
90	**45A0C-PS-01	**45A0A-59 **45A0C-1	
91	**45A0C-PS-02	**45A0C-1	
92	**45A0E-PS-01	**45A0E-1	
93	**64A0A-PS-01	FFS	
94	**64A0A-PS-02	FFS	

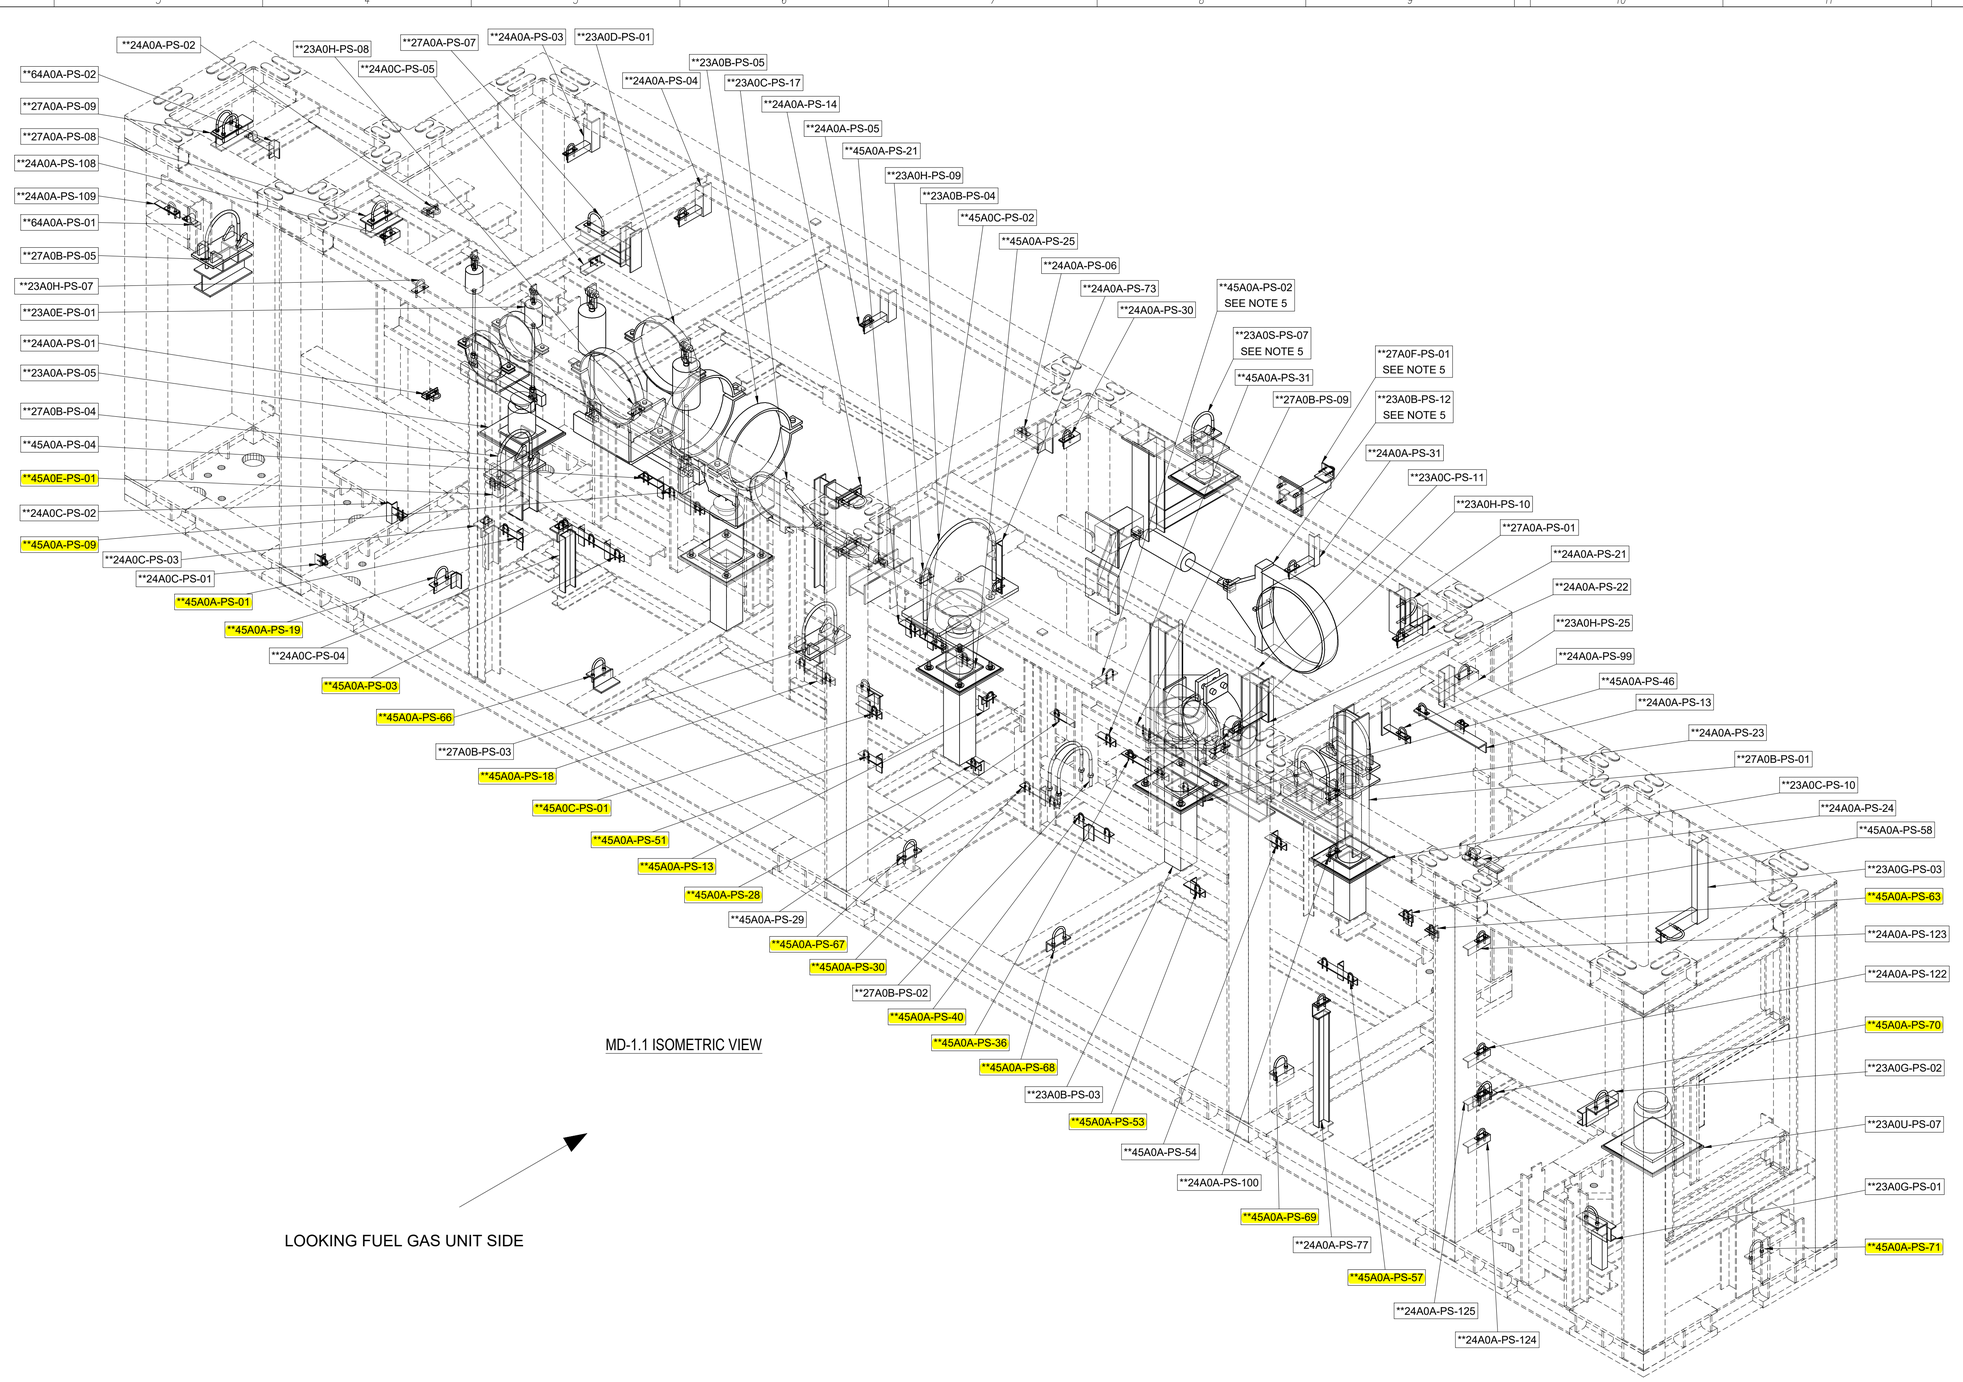

MD-1.1 ISOMETRIC VIEW

LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	2/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

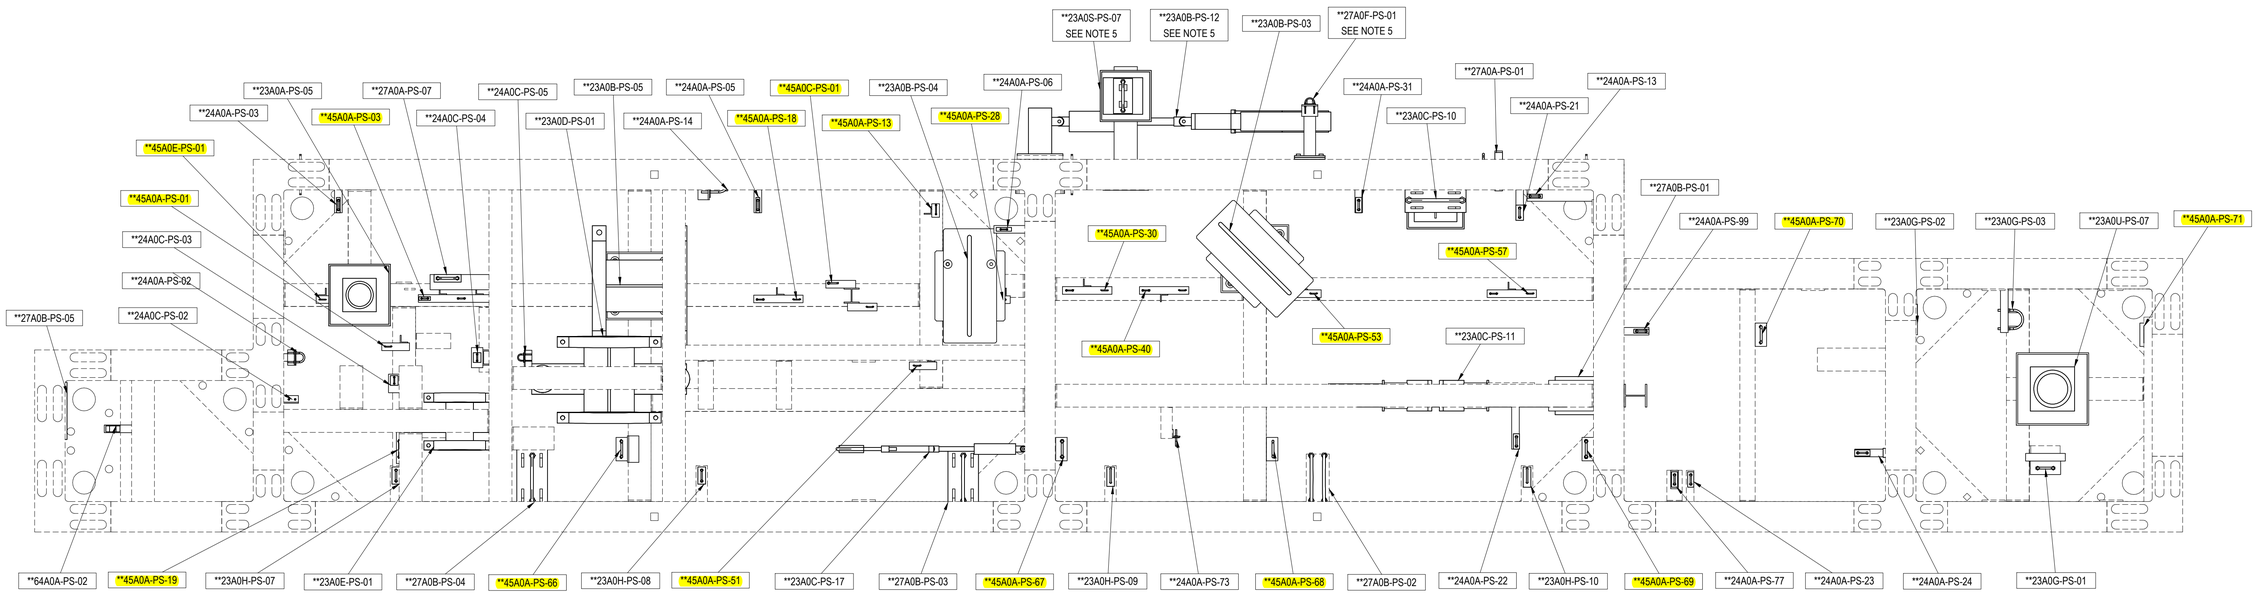

MD-1.1 PLAN VIEW

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	3/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

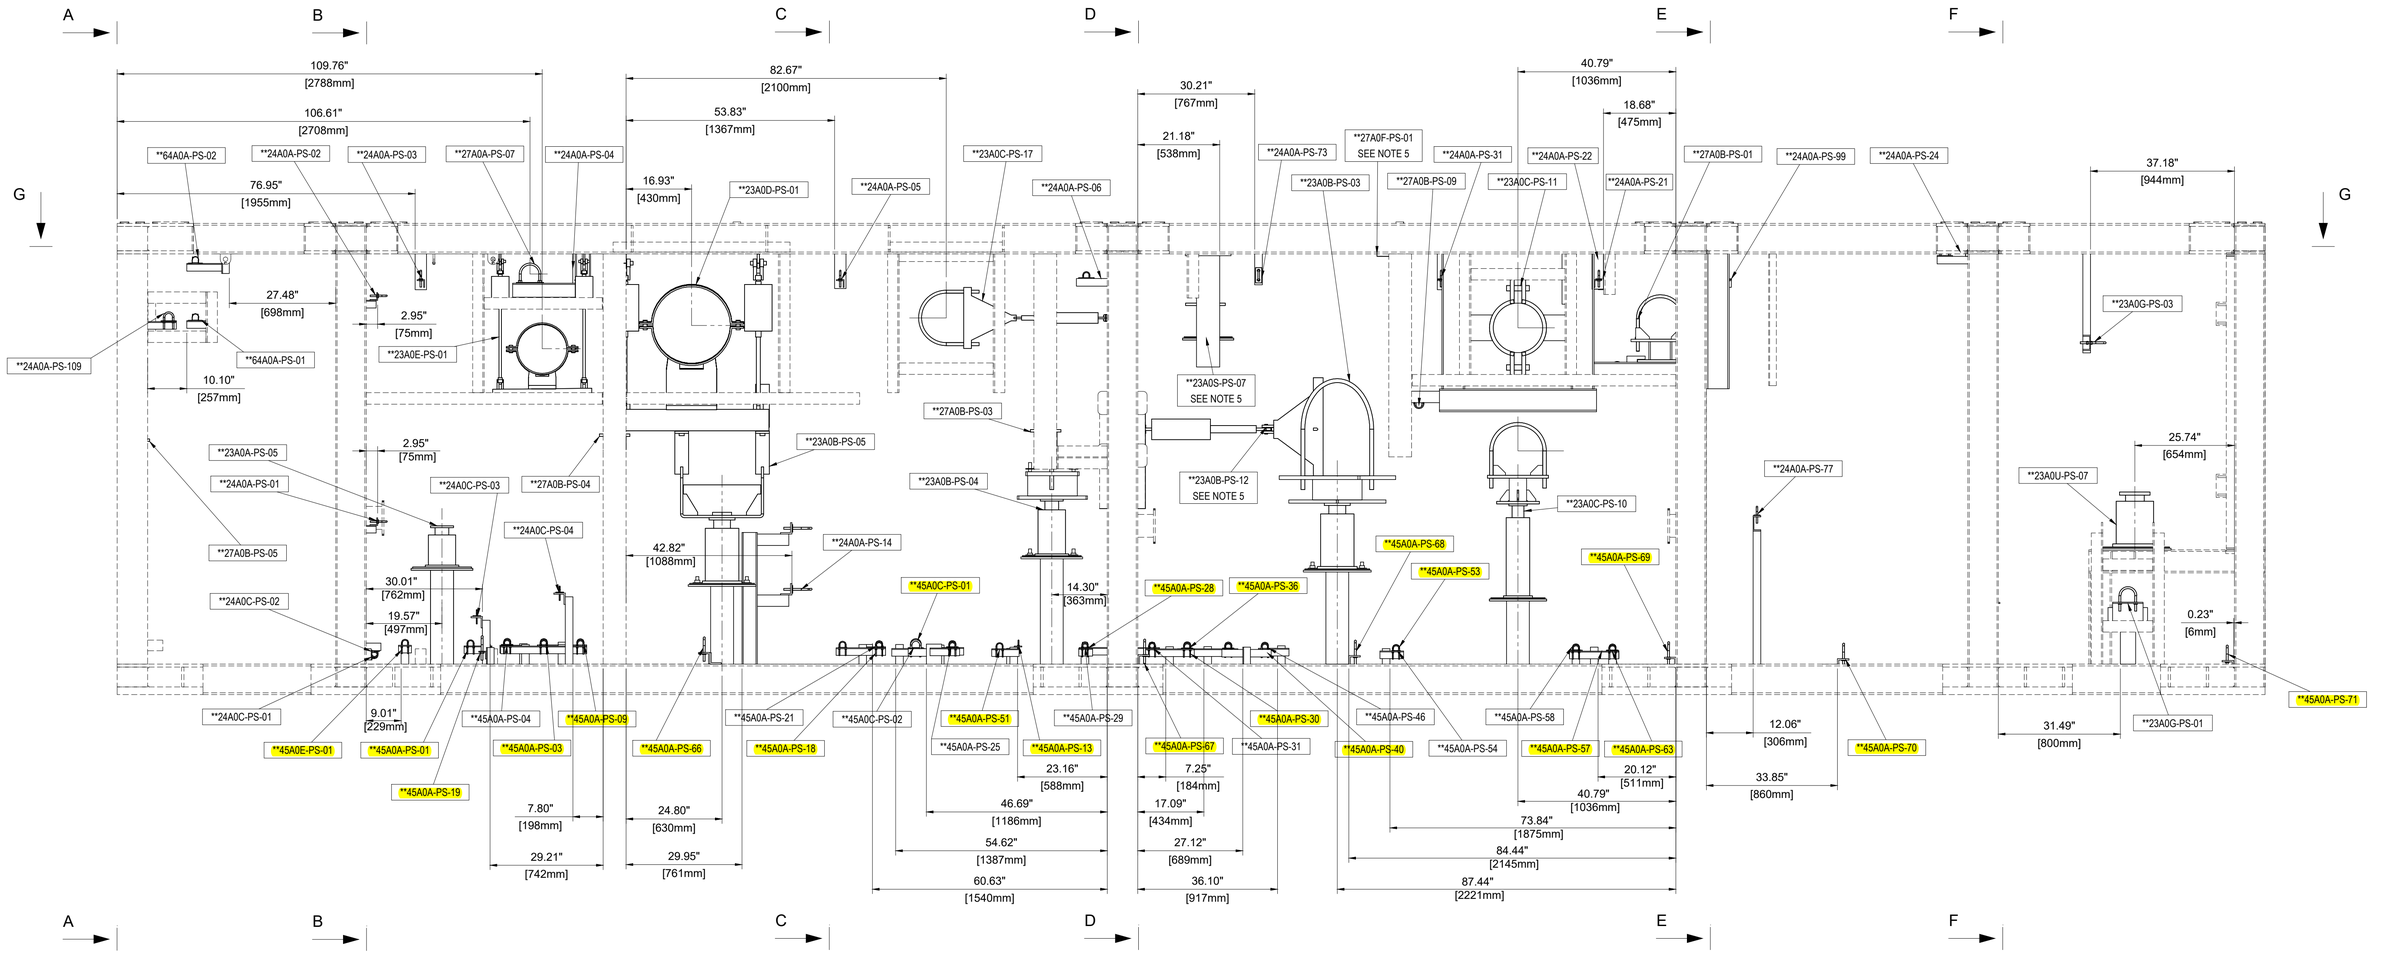

MD-1.1 LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	4/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150


REV.: 0

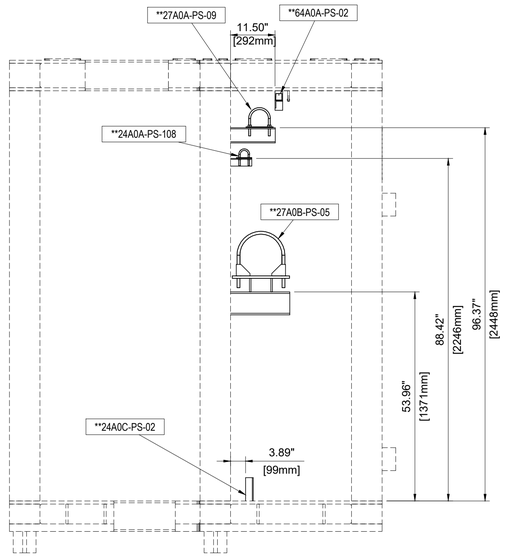


MD-1.1 SECTION A-A

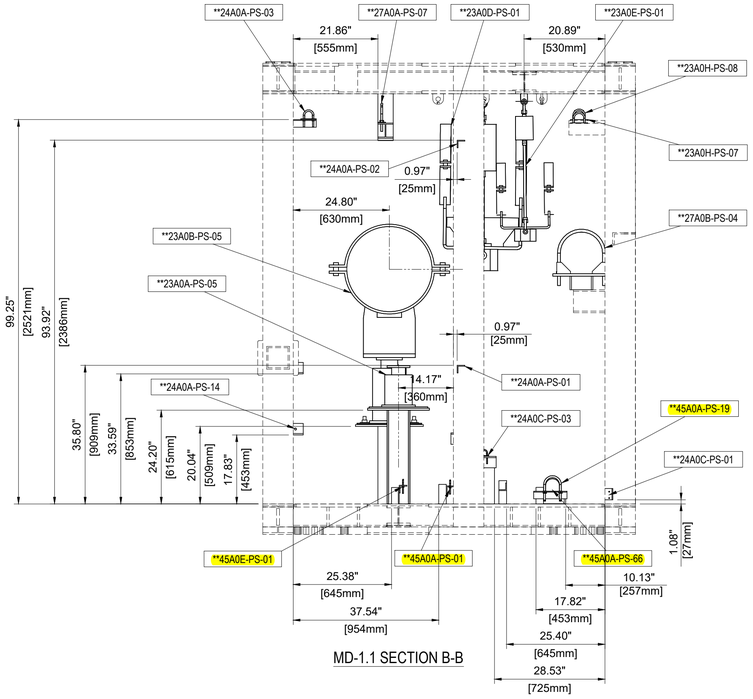


MD-1.1 SECTION B-B

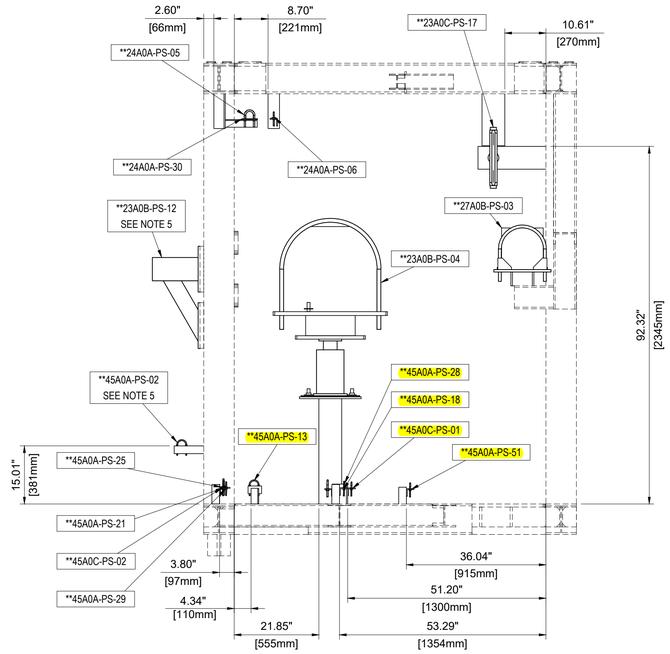


MD-1.1 SECTION C-C

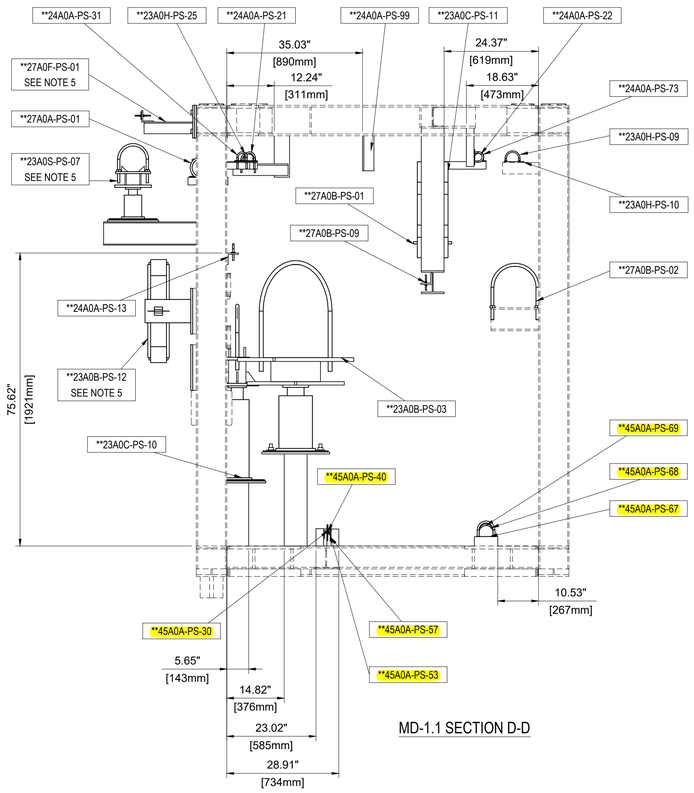

MD-1.1 SECTION D-D

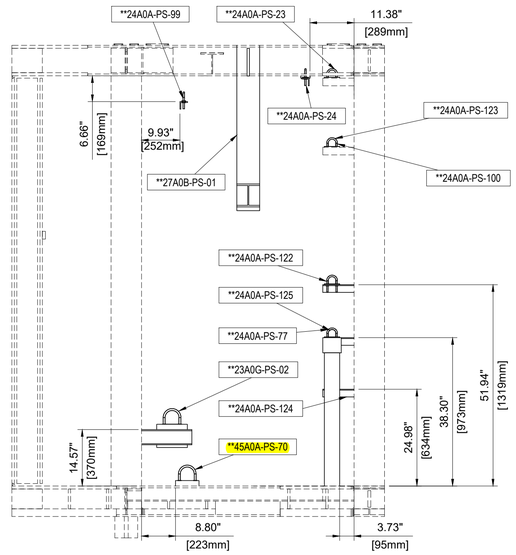

MD-1.1 SECTION E-E

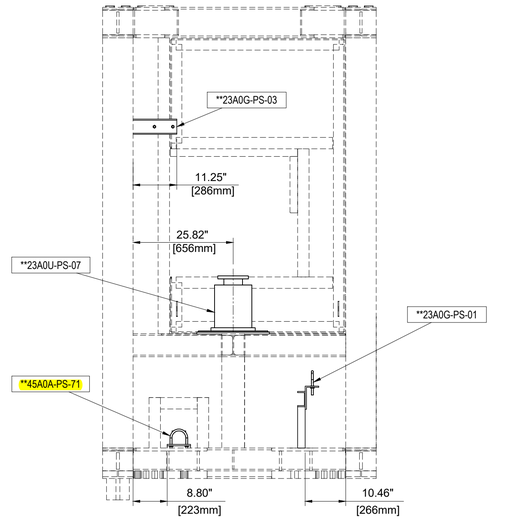

MD-1.1 SECTION F-F

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX** → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	5/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

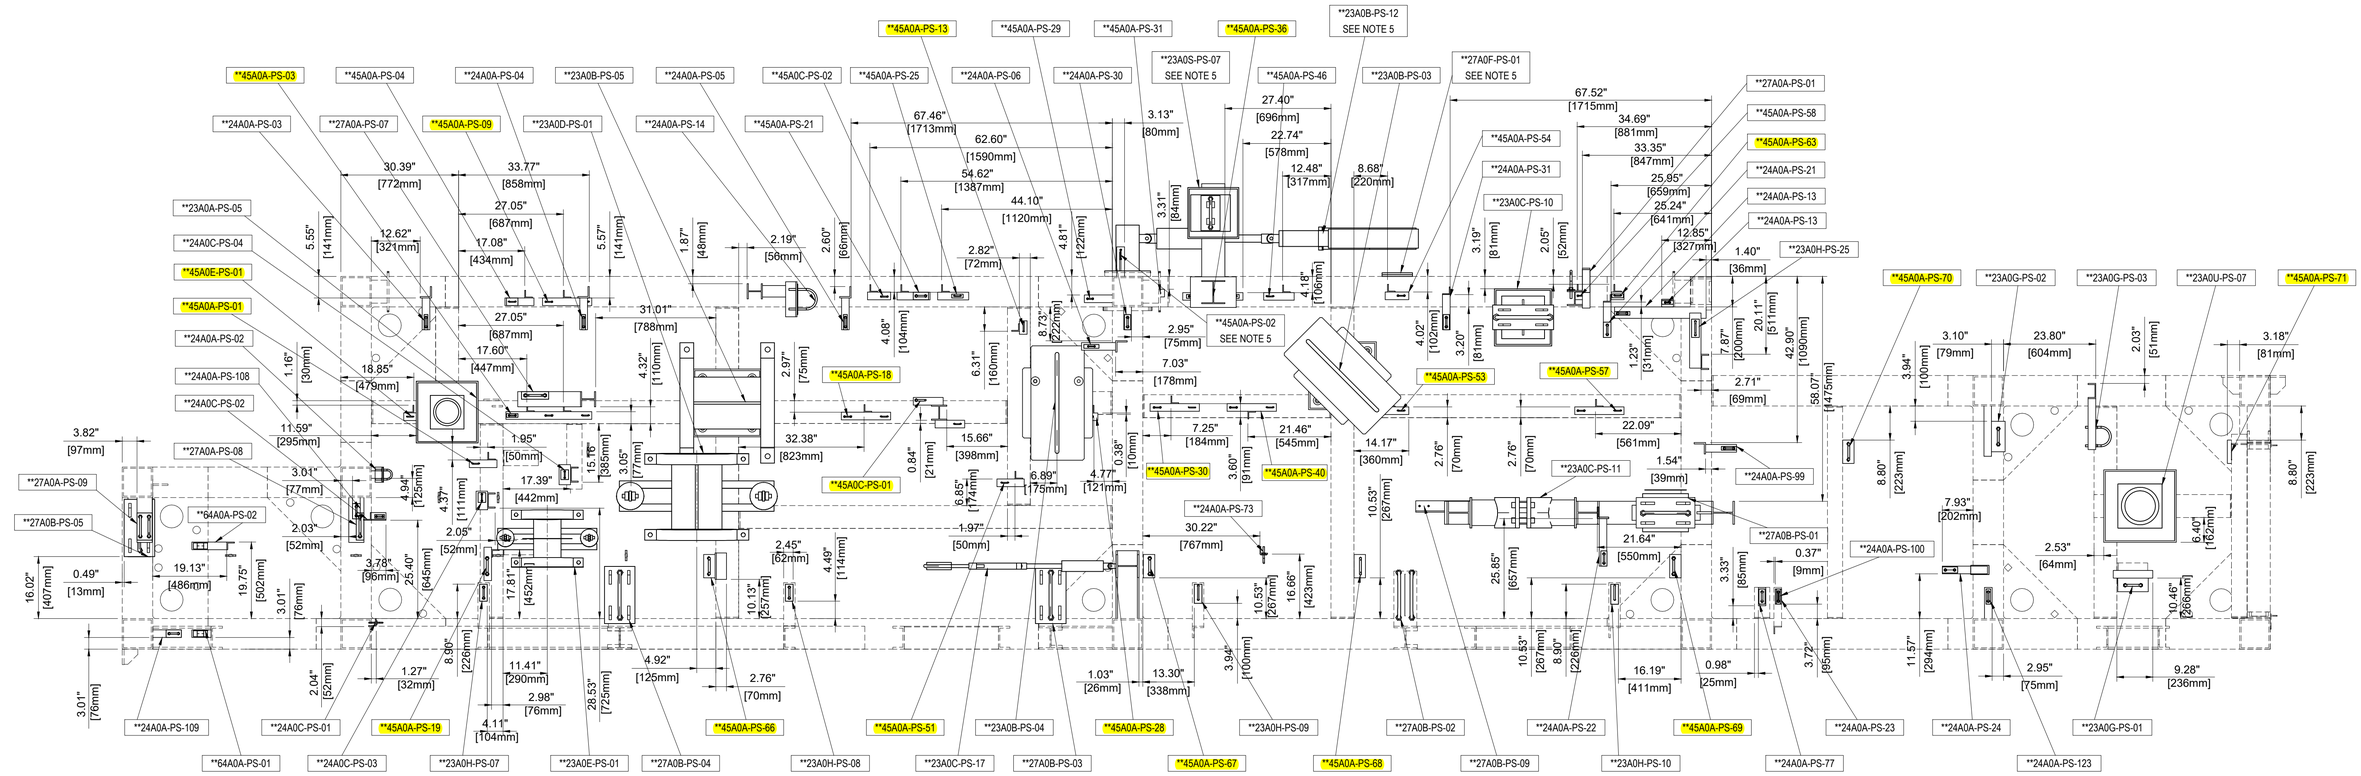

MD-1.1 SECTION G-G

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	6/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 970
LINE NO: **MBH01BR924


F(X) =	0	lbs
F(Y) =	0	lbs
F(Z) =	-222	lbs
(X)=	0.064	inch
(Y)=	-0.074	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

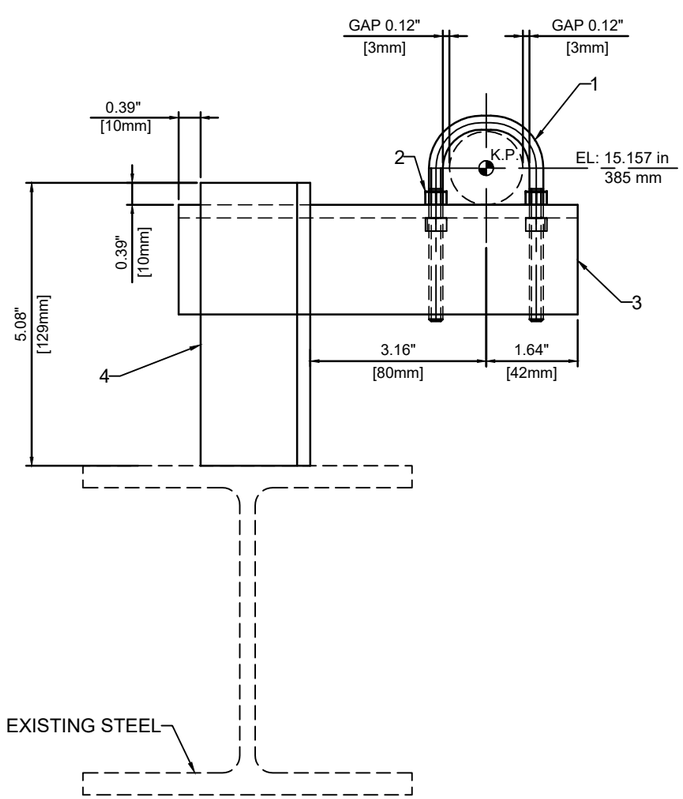


LOOKING LUBE OIL UNIT SIDE
1:2.5

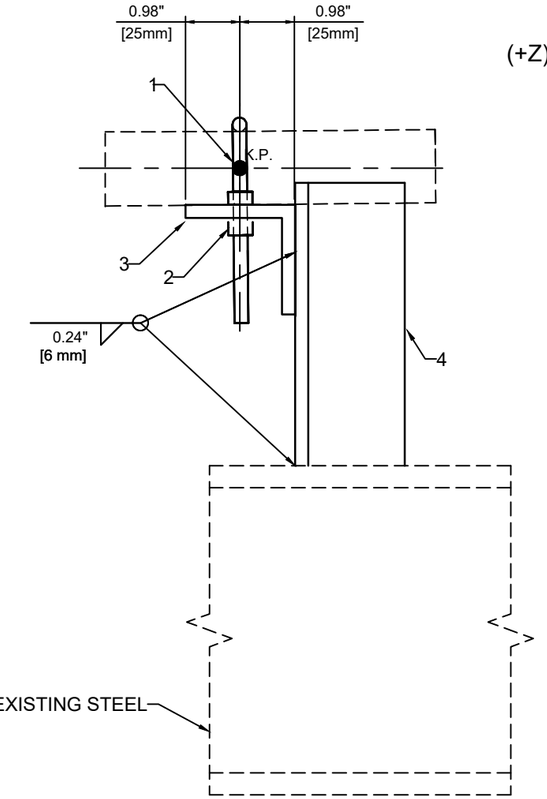


LOOKING INLET MANIFOLD SIDE
1:2.5

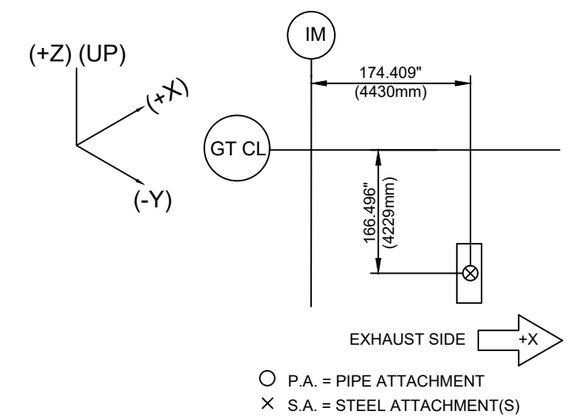




ISOMETRIC VIEW

3 L50x50x6

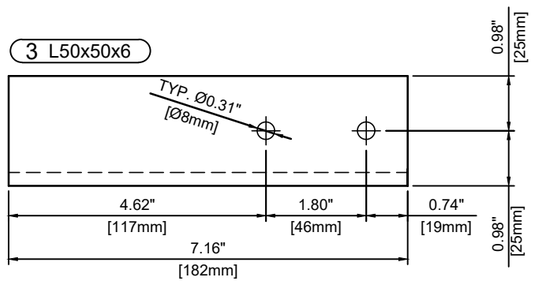

1:2.5

1 U-BOLT 1"

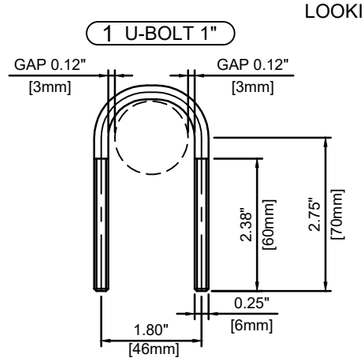

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Special U-Bolt, 1"	400328S					1	0.13	0.06	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	CARBON STEEL
3	L50x50x6	JIS G 3192			7.17	182	1	1.78	0.81	SS400
4	L50x50x6	JIS G 3192			5.08	129	1	1.26	0.57	SS400
						GRAND TOTAL		3.21	1.46	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SIL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **45A0A-PS-01

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	450
LINE NO:	**MBH02BR925
F(X) =	21 lbs
F(Y) =	0 lbs
F(Z) =	-4 lbs
(X)=	0 inch
(Y)=	-0.073 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch


NODE:	720
LINE NO:	**MBA01BR924
F(X) =	24 lbs
F(Y) =	0 lbs
F(Z) =	-5 lbs
(X)=	0 inch
(Y)=	-0.072 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch

NODE:	205
LINE NO:	**MBA01BR922
F(X) =	25 lbs
F(Y) =	0 lbs
F(Z) =	7 lbs
(X)=	0 inch
(Y)=	-0.072 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch


MODULE NO:
MD-1.1

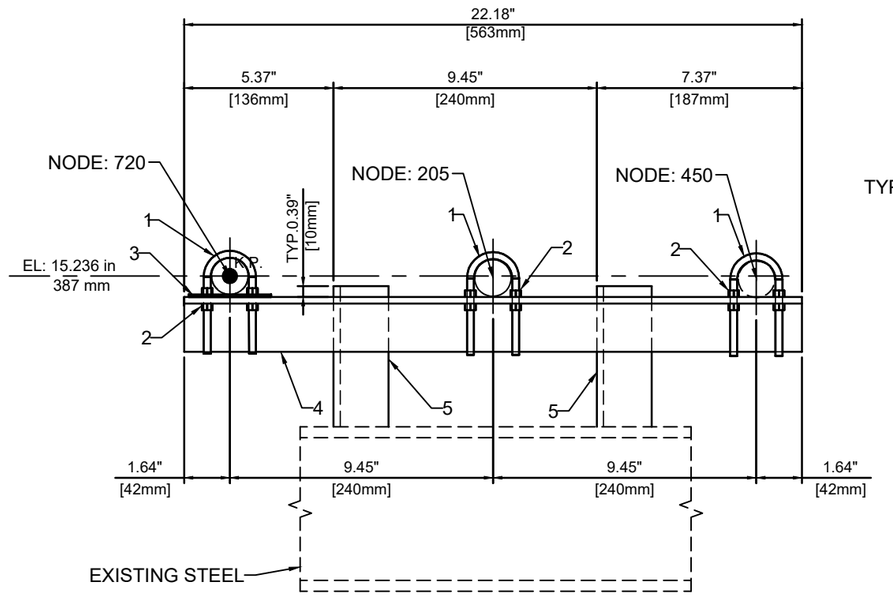


LOOKING FUEL GAS UNIT SIDE
1:5

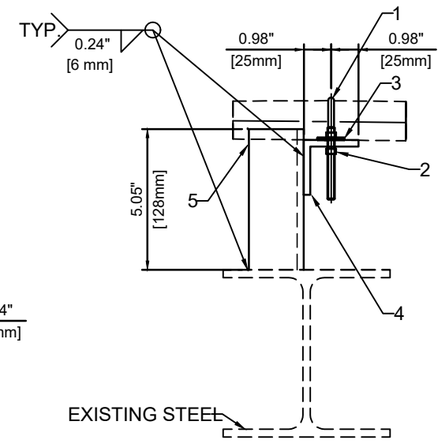


LOOKING EXHAUST SIDE
1:5

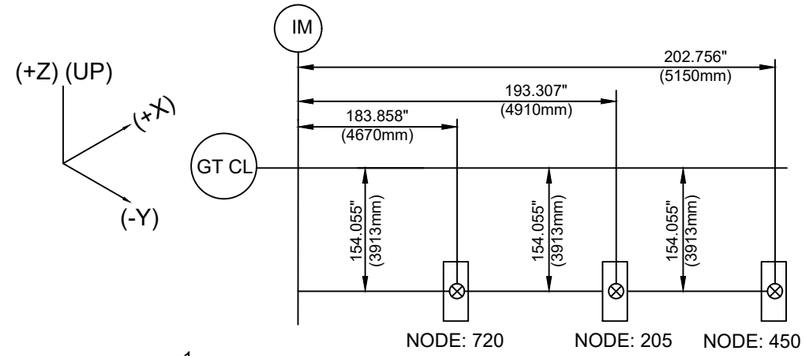




ISOMETRIC VIEW

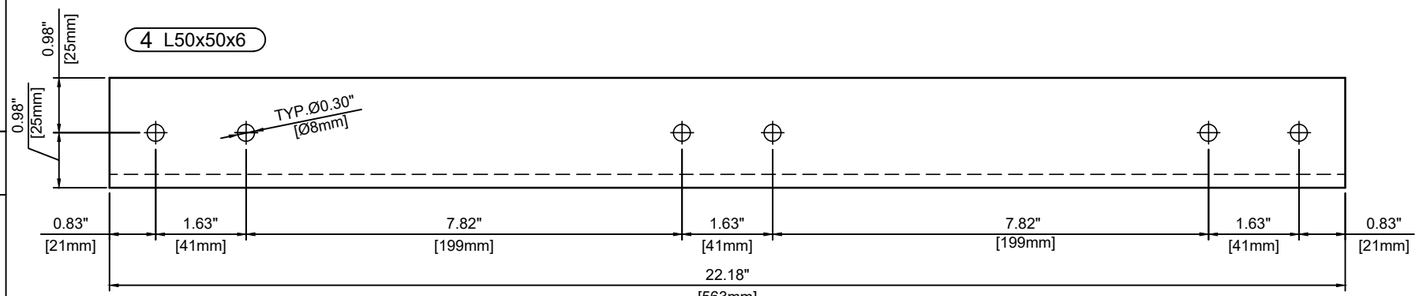

1:2.5

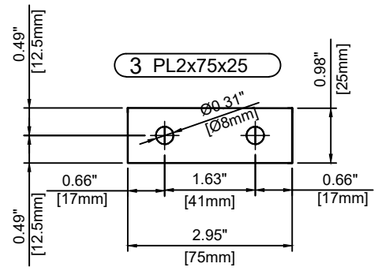

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.33"	400328					3	0.40	0.18	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						12	0.13	0.06	CARBON STEEL
3	PL2		0.98	25	2.95	75	1	0.06	0.03	ASTM A36
4	L50x50x6	JIS G 3192			22.17	563	1	5.50	2.49	SS400
5	L50x50x6	JIS G 3192			5.04	128	2	2.50	1.13	SS400
						GRAND TOTAL		8.59	3.90	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**45A0A-PS-03

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	155
LINE NO:	**MBA01BR903

F(X) =	-9 lbs
F(Y) =	0 lbs
F(Z) =	-45 lbs
(X)=	0 inch
(Y)=	-0.072 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch


NODE:	400
LINE NO:	**MBH02BR905

F(X) =	-1 lbs
F(Y) =	0 lbs
F(Z) =	-38 lbs
(X)=	0 inch
(Y)=	-0.073 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch


MODULE NO:
MD-1.1

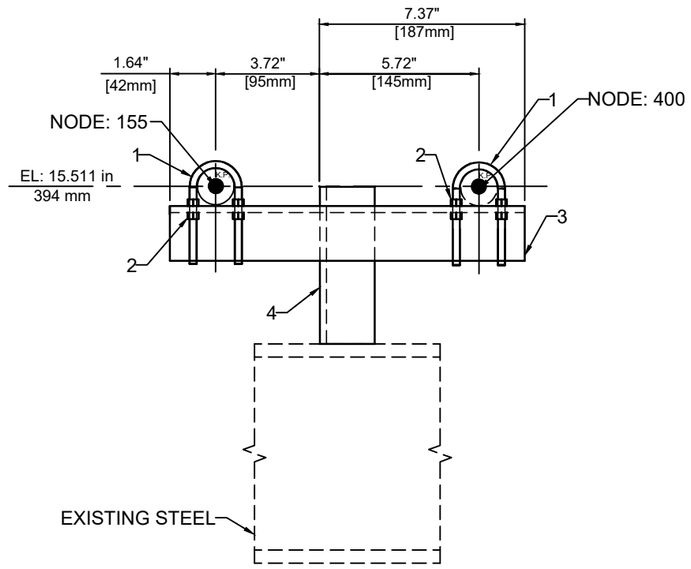


LOOKING FUEL GAS UNIT SIDE
1:5

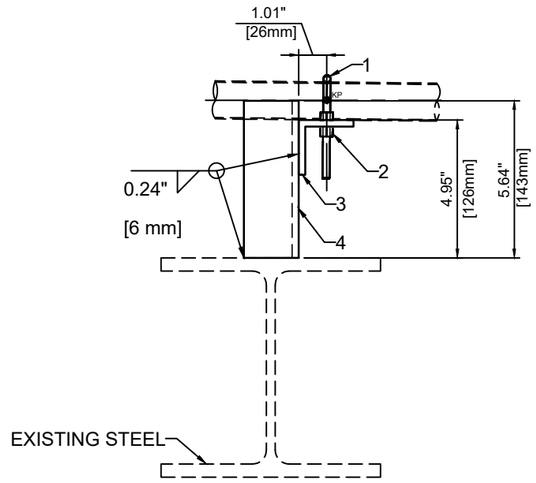


LOOKING EXHAUST SIDE
1:5

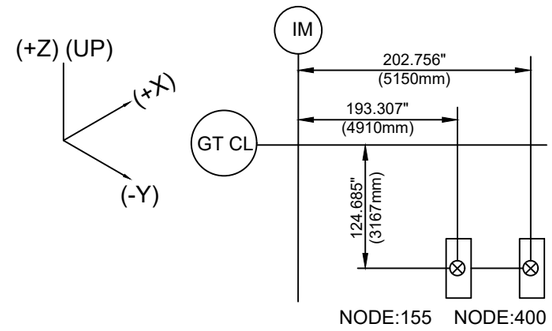


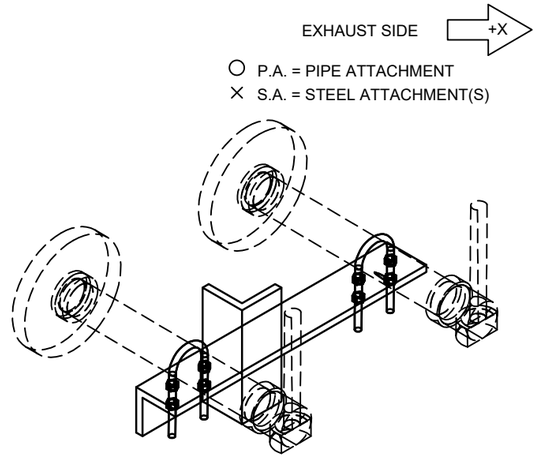

ISOMETRIC VIEW

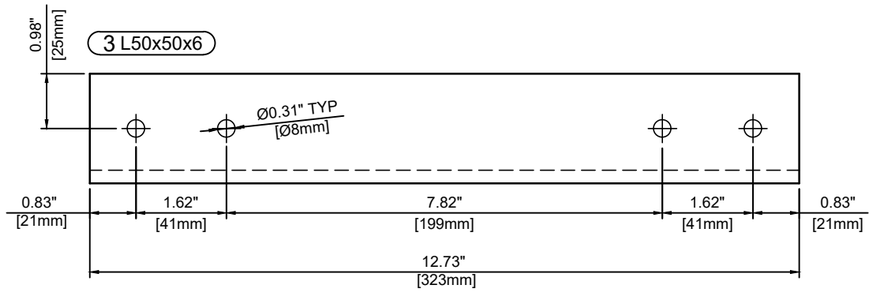

1:2.5

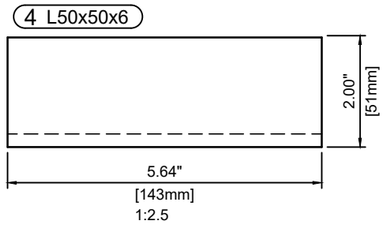

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1"	400328					2	0.26	0.12	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						8	0.09	0.04	CARBON STEEL
3	L50x50x6	JIS G 3192			12.72	323	1	3.15	1.43	SS400
4	L50x50x6	JIS G 3192			5.63	143	1	1.40	0.63	SS400
						GRAND TOTAL		4.90	2.22	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **45A0A-PS-09

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1139
LINE NO:	**MBH02BR909


F(X) =	0	lbs
F(Y) =	0	lbs
F(Z) =	-13	lbs
(X)=	0.619	inch
(Y)=	-0.205	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

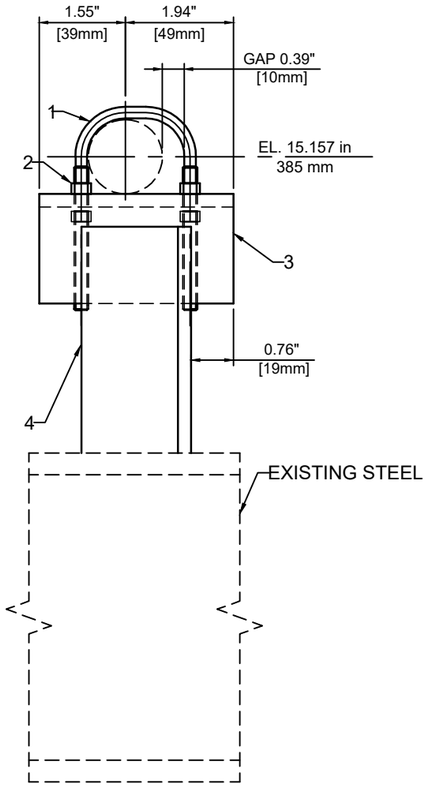


LOOKING EXHAUST SIDE
1:2.5

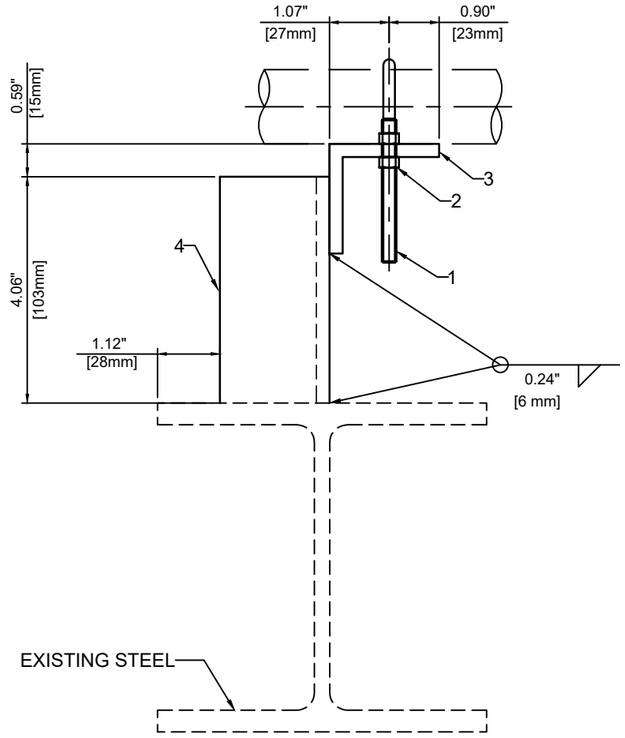

LOOKING FUEL GAS UNIT SIDE
1:2.5

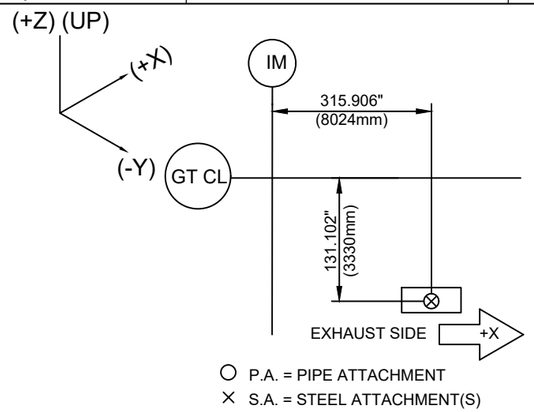


3 L50x50x6

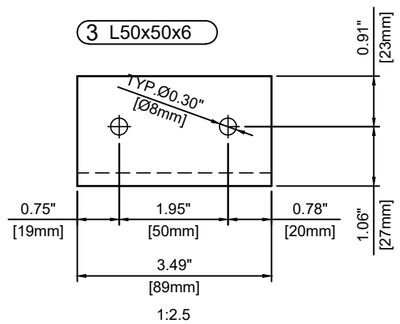

1:2.5

1 U-BOLT 1"

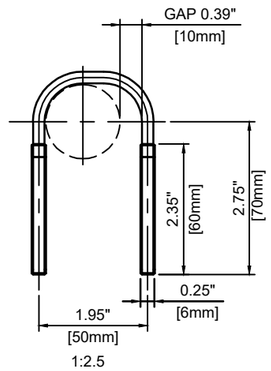

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Special U-Bolt, 1"	400328S					1	0.13	0.06	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	CARBON STEEL
3	L50x50x6	JIS G 3192			3.50	89	1	0.87	0.39	SS400
4	L50x50x6	JIS G 3192			4.06	103	1	1.01	0.46	SS400
						GRAND TOTAL		2.05	0.93	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**45A0A-PS-13

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	2340
LINE NO:	**MBH04BR920
F(X) =	54 lbs
F(Y) =	0 lbs
F(Z) =	-154 lbs
(X)=	0 inch
(Y)=	-0.067 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch

NODE:	1400
LINE NO:	**MBH03BR902
F(X) =	33 lbs
F(Y) =	0 lbs
F(Z) =	-11 lbs
(X)=	0 inch
(Y)=	-0.059 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch


MODULE NO:
MD-1.1

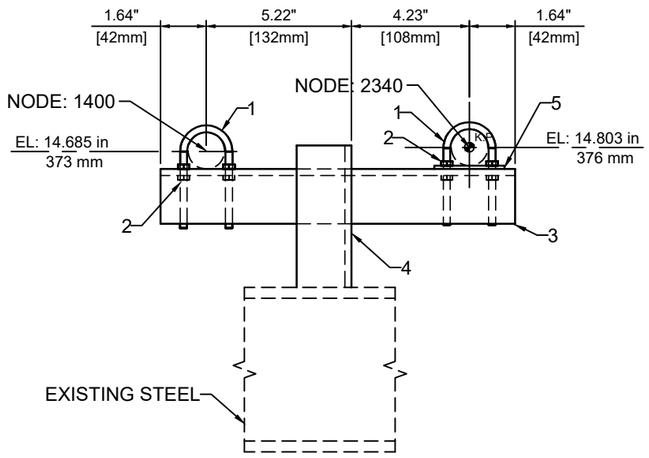


LOOKING LUBE OIL UNIT SIDE
1:5

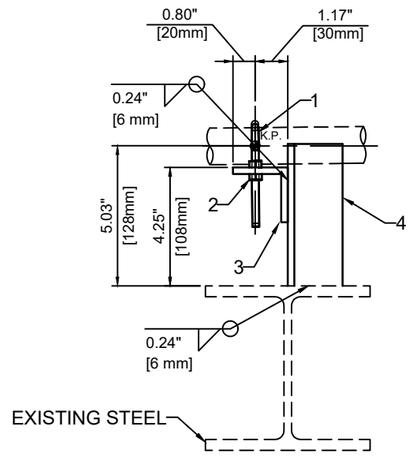


LOOKING INLET MANIFOLD SIDE
1:5

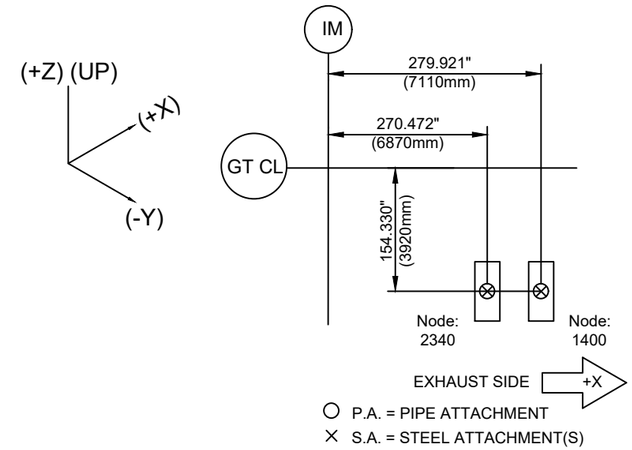

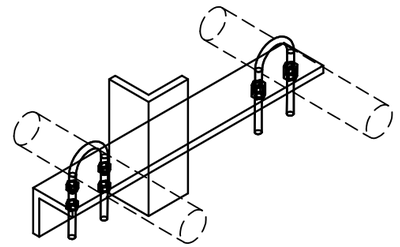


ISOMETRIC VIEW

3 L50x50x6

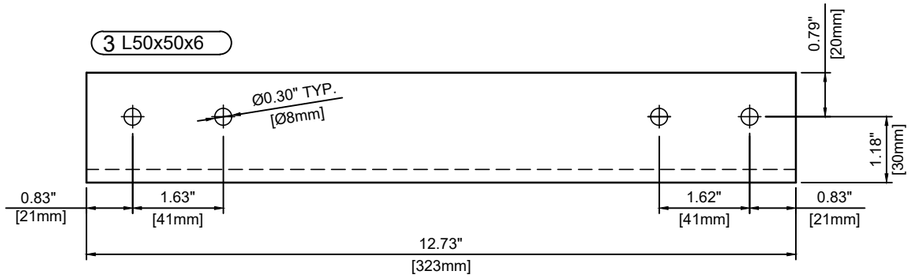


1:2.5

4 L50x50x6



1:2.5

5 PL1x64x30

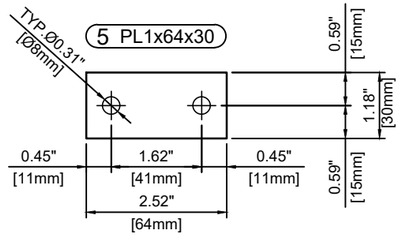

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1"	400328					2	0.26	0.12	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						8	0.09	0.04	CARBON STEEL
3	L50x50x6	JIS G 3192			12.72	323	1	3.15	1.43	SS400
4	L50x50x6	JIS G 3192			5.04	128	1	1.25	0.57	SS400
5	PL1		1.18	30	2.52	64	3	0.10	0.05	ASTM A36
						GRAND TOTAL		4.86	2.20	

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**45A0A-PS-18

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	4010
LINE NO:	**SDD01BR920


F(X) =	0	lbs
F(Y) =	0	lbs
F(Z) =	45	lbs
(X)=	0.033	inch
(Y)=	-0.073	inch
(Z)=	0	inch
Pipe OD =	3.50	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

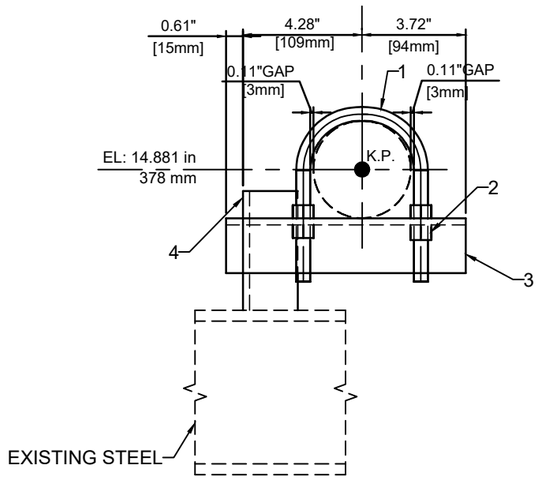


LOOKING EXHAUST SIDE
1:5

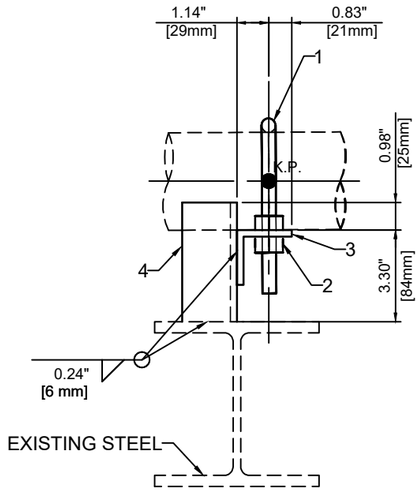


LOOKING LUBE OIL UNIT SIDE
1:5

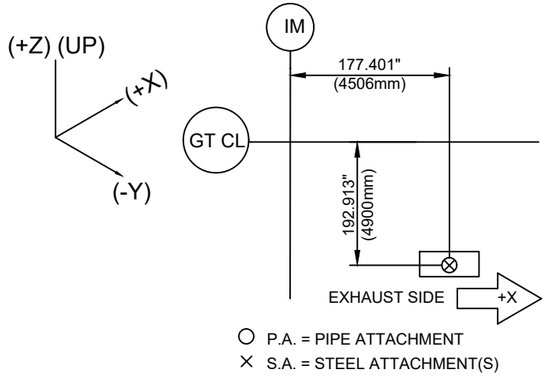




ISOMETRIC VIEW

1 U-BOLT 3.5"



1:5

3 L50x50x6

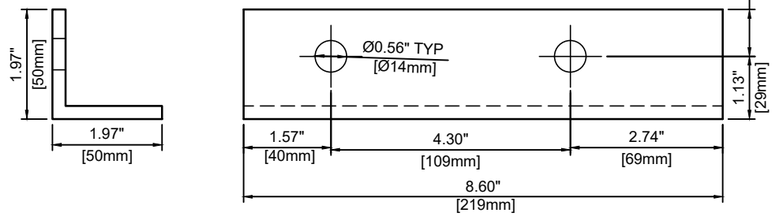

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Special U-Bolt, 3.50"	400928S					1	0.93	0.42	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/2"						4	0.26	0.12	CARBON STEEL
3	L50x50x6	JIS G 3192			8.62	219	1	2.14	0.97	SS400
4	L50x50x6	JIS G 3192			4.29	109	1	1.06	0.48	SS400
						GRAND TOTAL		4.39	1.99	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**45A0A-PS-19

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	2550
LINE NO:	**MBH02BR926


F(X) =	0	lbs
F(Y) =	0	lbs
F(Z) =	25	lbs
(X)=	0.363	inch
(Y)=	-0.009	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

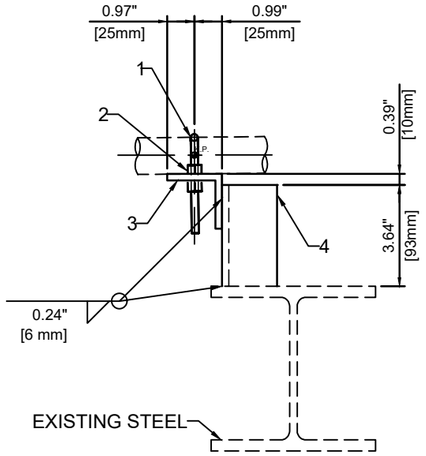


LOOKING INLET MANIFOLD SIDE
1:5

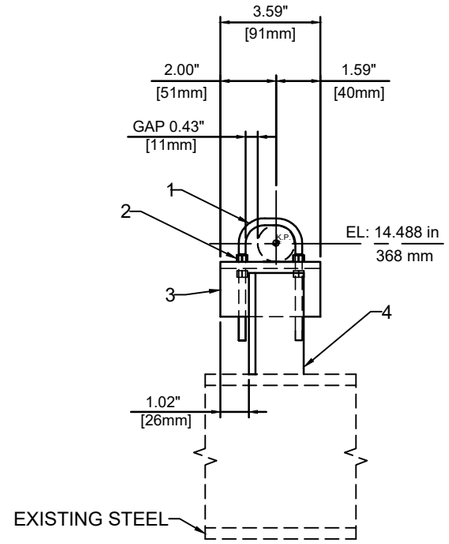

LOOKING LUBE OIL UNIT SIDE
1:5

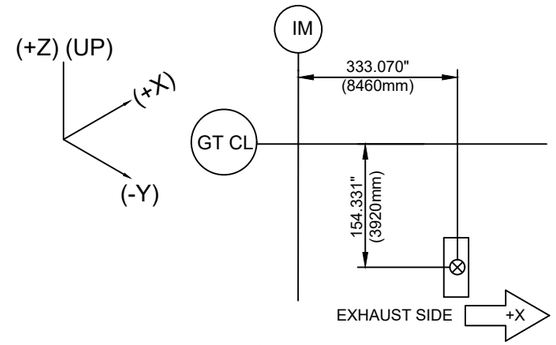


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)




ISOMETRIC VIEW

1 U BOLT 1"

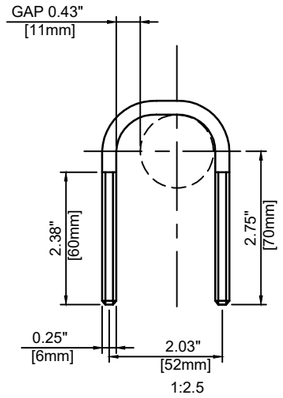

1:2.5

3 L50x50x6

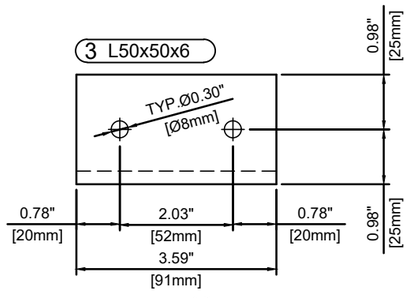

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Special U-Bolt, 1"	400328S					1	0.13	0.06	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	CARBON STEEL
3	L50x50x6	JIS G 3192			3.59	91	1	0.89	0.40	SS400
4	L50x50x6	JIS G 3192			3.66	93	1	0.91	0.41	SS400
						GRAND TOTAL		1.98	0.90	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **45A0A-PS-28

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	2160
LINE NO:	**MBA01BR923
F(X) =	-22 lbs
F(Y) =	0 lbs
F(Z) =	-11 lbs
(X)=	0 inch
(Y)=	0.001 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch

NODE:	2830
LINE NO:	**MBA01BR917
F(X) =	-10 lbs
F(Y) =	0 lbs
F(Z) =	-11 lbs
(X)=	0 inch
(Y)=	-0.002 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch


MODULE NO:
MD-1.1

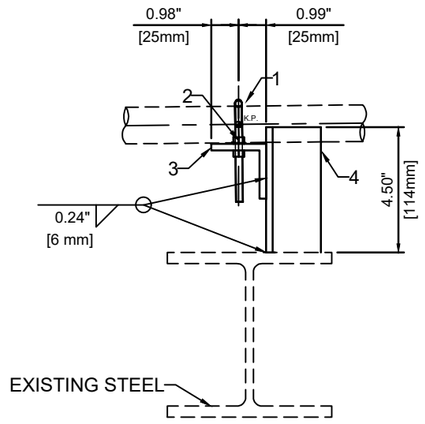


LOOKING INLET MANIFOLD SIDE
1:5

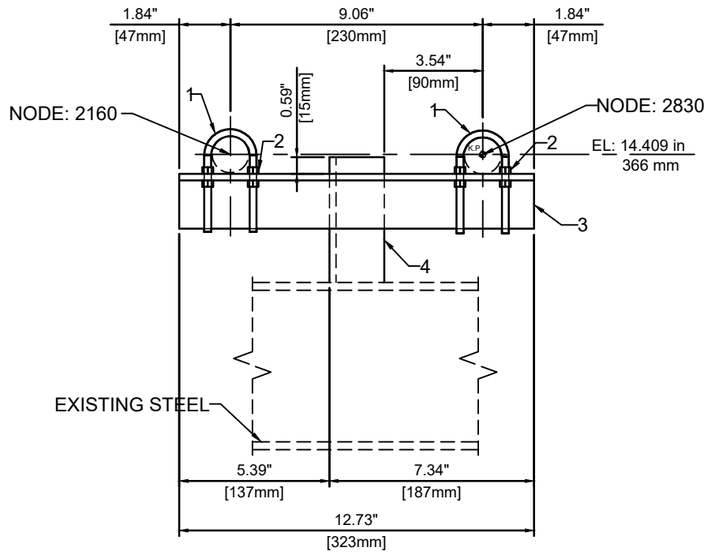


LOOKING FUEL GAS UNIT SIDE
1:5

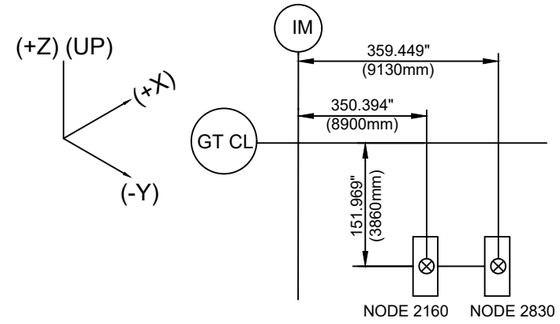

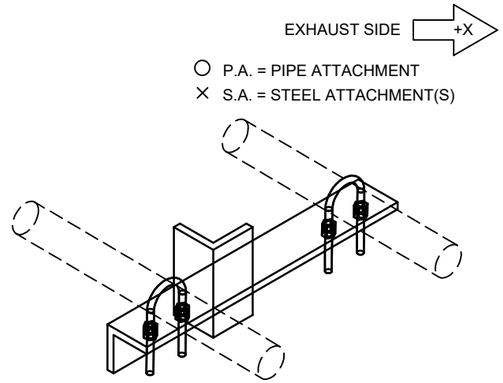

ISOMETRIC VIEW

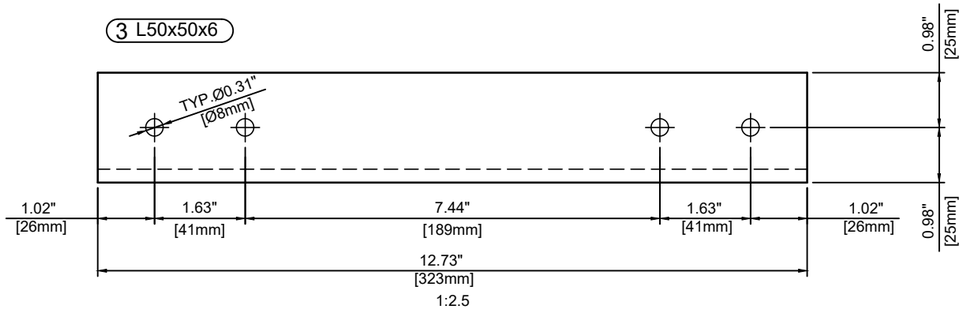

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1"	400328					2	0.26	0.12	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						8	0.09	0.04	CARBON STEEL
3	L50x50x6	JIS G 3192			12.72	323	1	3.15	1.43	SS400
4	L50x50x6	JIS G 3192			4.49	114	1	1.11	0.51	SS400
						GRAND TOTAL		4.62	2.10	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **45A0A-PS-30

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 1920	
LINE NO:	**MBV01BR122
F(X) =	-42 lbs
F(Y) =	56 lbs
F(Z) =	215 lbs
(X)=	1.316 inch
(Y)=	-0.117 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	194 °F
Insul=	0 inch


NODE: 2240	
LINE NO:	**MBV02BR104
F(X) =	0 lbs
F(Y) =	0 lbs
F(Z) =	-47 lbs
(X)=	0.337 inch
(Y)=	-0.102 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	194 °F
Insul=	0 inch

NODE: 2010	
LINE NO:	**MBA01BR912
F(X) =	-1 lbs
F(Y) =	-96 lbs
F(Z) =	0 lbs
(X)=	1.243 inch
(Y)=	0 inch
(Z)=	-0.108 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch


NODE: 2985	
LINE NO:	**MBA01BR915
F(X) =	-1 lbs
F(Y) =	0 lbs
F(Z) =	-13 lbs
(X)=	0.205 inch
(Y)=	0.013 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch


NODE: 1785	
LINE NO:	**MBA01BR911
F(X) =	-13 lbs
F(Y) =	0 lbs
F(Z) =	45 lbs
(X)=	0 inch
(Y)=	-0.005 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch


NODE: 2705	
LINE NO:	**MBA01BR913
F(X) =	0 lbs
F(Y) =	0 lbs
F(Z) =	-144 lbs
(X)=	0.609 inch
(Y)=	-0.079 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch

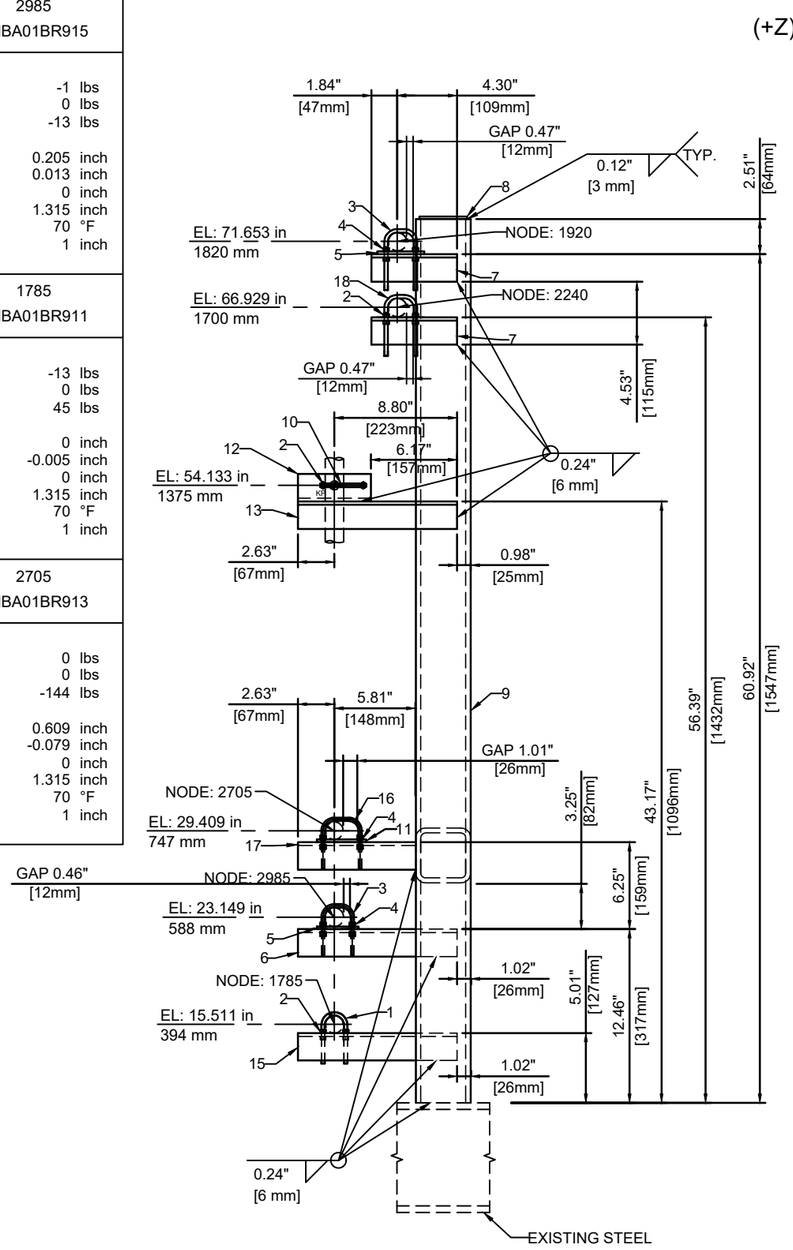



LOOKING FUEL GAS UNIT SIDE
1:10







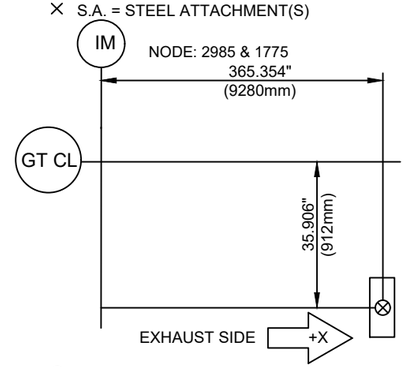

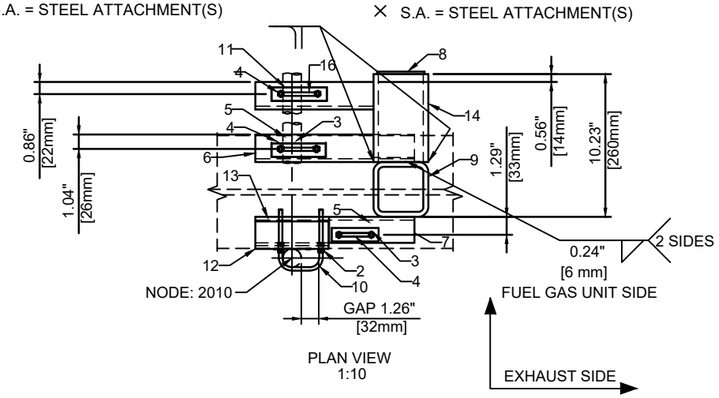

PLAN VIEW
1:10

MODULE NO:
SD-2

MITSUBISHI POWER HQ-LAKE MARY	
SUPPORT NUMBER:	**45A0A-PS-34

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	2780
LINE NO:	**MBA01BR913

F(X) =	6	lbs
F(Y) =	0	lbs
F(Z) =	-58	lbs
(X)=	0	inch
(Y)=	-0.002	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	1	inch


NODE:	3060
LINE NO:	**MBA01BR915

F(X) =	-16	lbs
F(Y) =	0	lbs
F(Z) =	-41	lbs
(X)=	0	inch
(Y)=	-0.003	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	1	inch


MODULE NO:
MD-1.1

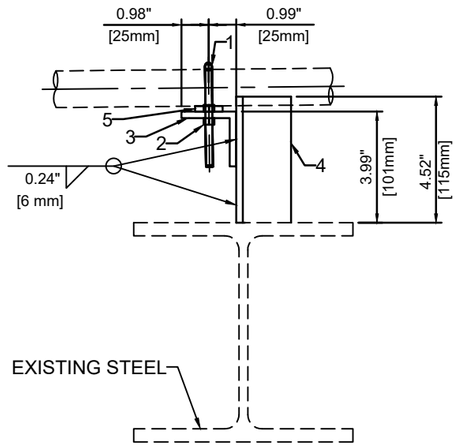

LOOKING INLET MANIFOLD SIDE
1:5

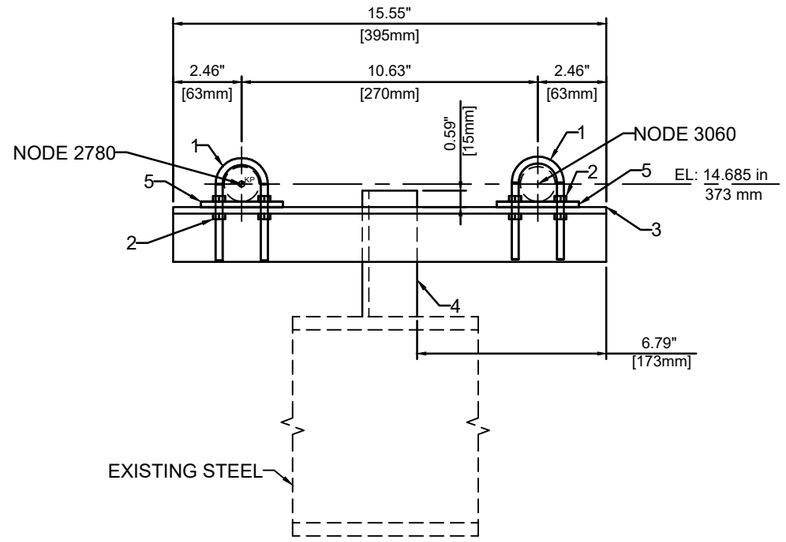


LOOKING FUEL GAS UNIT SIDE
1:5

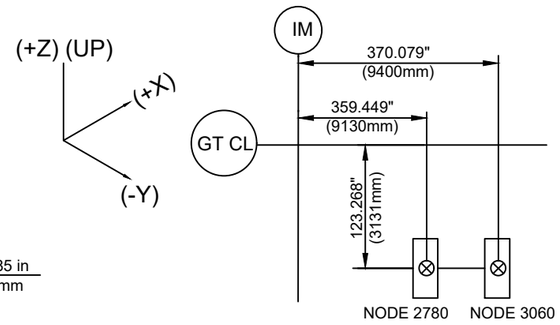


EXHAUST SIDE +X


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

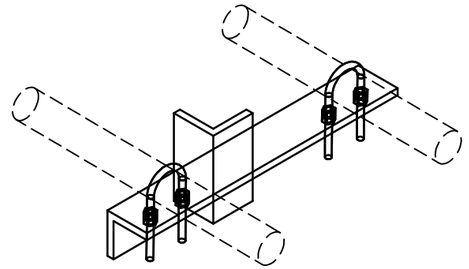

ISOMETRIC VIEW

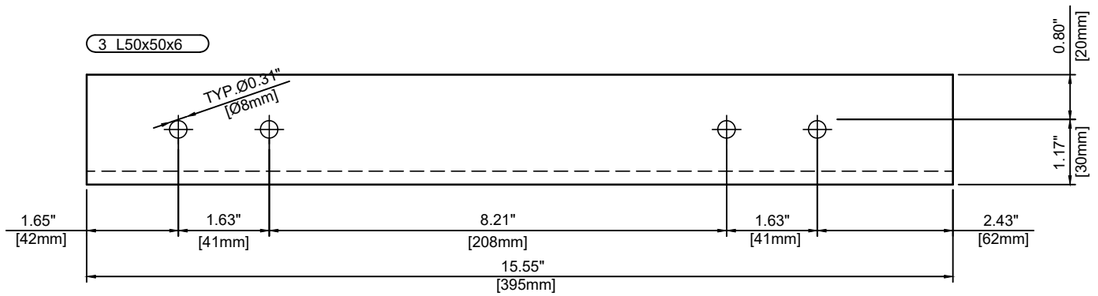

1:2.5

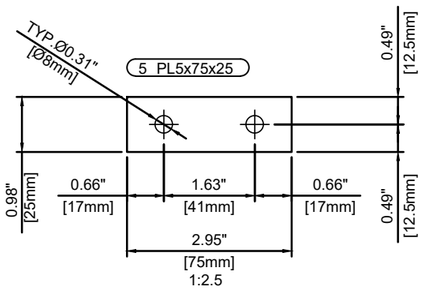

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1"	400348					2	0.26	0.12	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 1/4"						8	0.09	0.04	STAINLESS STEEL
3	L50x50x6	JIS G 3192			15.55	395	1	3.86	1.75	SS400
4	L50x50x6	JIS G 3192			4.53	115	1	1.12	0.51	SS400
5	PL5		0.98	25	2.95	75	2	0.52	0.24	ASTM A240-304
						GRAND TOTAL		5.85	2.65	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **45A0A-PS-36

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1930
LINE NO:	**MBV01BR122
F(X) =	17 lbs
F(Y) =	0 lbs
F(Z) =	16 lbs
(X)=	0 inch
(Y)=	-0.048 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	194 °F
Insul=	0 inch

NODE:	2230
LINE NO:	**MBV02BR104
F(X) =	12 lbs
F(Y) =	0 lbs
F(Z) =	16 lbs
(X)=	0 inch
(Y)=	-0.062 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	194 °F
Insul=	0 inch


NODE:	2680
LINE NO:	**MBA01BR913
F(X) =	12 lbs
F(Y) =	63 lbs
F(Z) =	0 lbs
(X)=	1.181 inch
(Y)=	0 inch
(Z)=	-0.423 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch

NODE:	2970
LINE NO:	**MBA01BR915
F(X) =	12 lbs
F(Y) =	0 lbs
F(Z) =	-25 lbs
(X)=	0.354 inch
(Y)=	0.013 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch

NODE:	1775
LINE NO:	**MBA01BR911
F(X) =	25 lbs
F(Y) =	0 lbs
F(Z) =	-169 lbs
(X)=	0 inch
(Y)=	-0.006 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	1 inch


MODULE NO:
SD-2

13 U-BOLT 1"




1:5


3 U-BOLT 1"





1:5

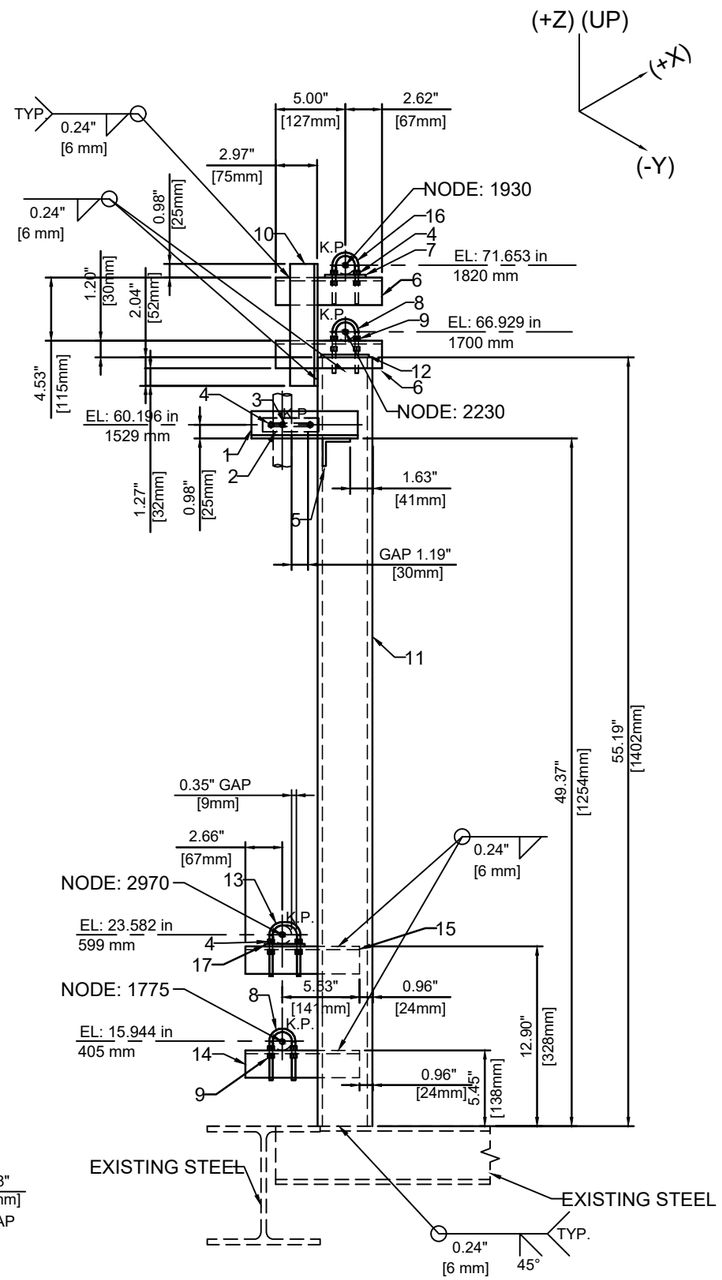


LOOKING FUEL GAS UNIT SIDE
1:10

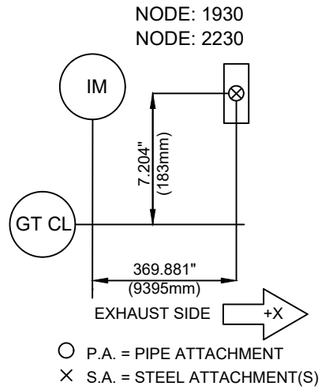

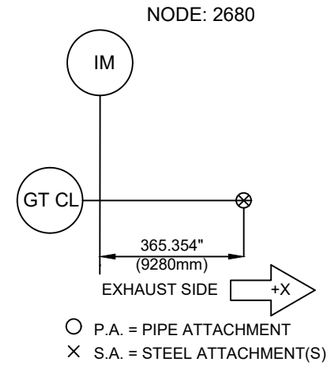

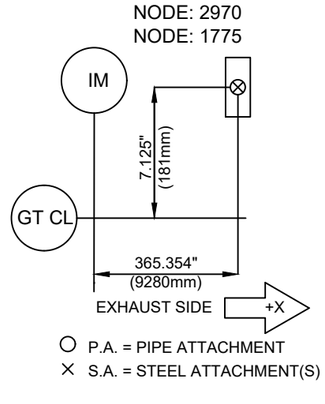

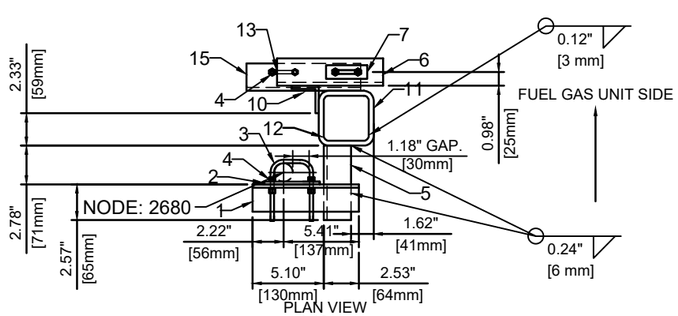

PLAN VIEW
1:10

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY	
SUPPORT NUMBER:	**45A0A-PS-39

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	3110
LINE NO:	**MBA01BR931

F(X) =	24	lbs
F(Y) =	0	lbs
F(Z) =	-13	lbs
(X)=	0	inch
(Y)=	-0.002	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch


NODE:	1900
LINE NO:	**MBA01BR904

F(X) =	21	lbs
F(Y) =	0	lbs
F(Z) =	-13	lbs
(X)=	0	inch
(Y)=	-0.001	inch
(Z)=	0	inch
Pipe OD =	1.31	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch


MODULE NO:
MD-1.1

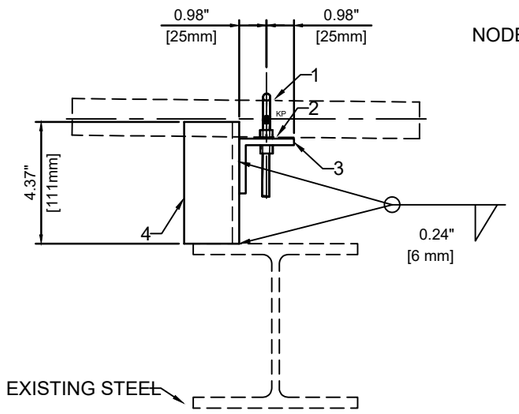


LOOKING INLET MANIFOLD SIDE
1:5

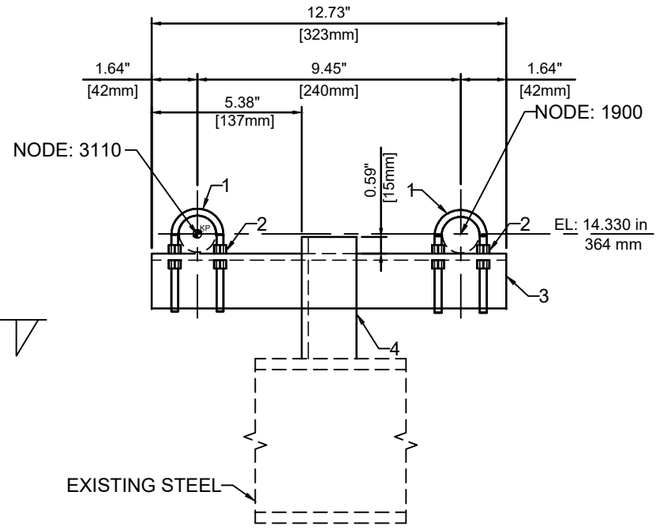


LOOKING FUEL GAS UNIT SIDE
1:5

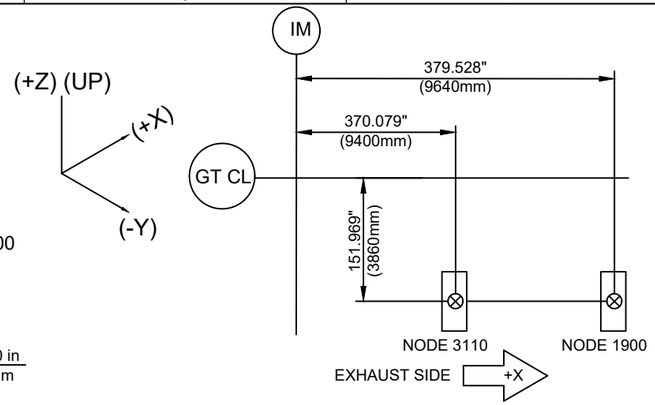

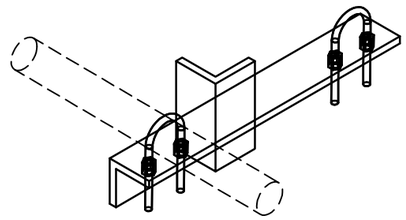

ISOMETRIC VIEW

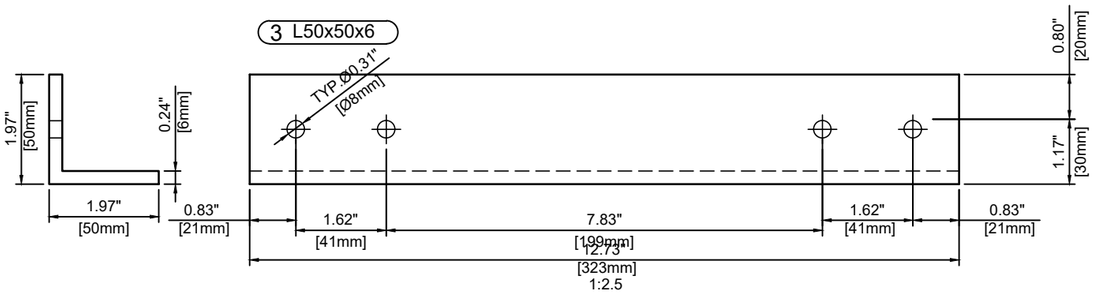

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1"	400328					2	0.26	0.12	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						8	0.09	0.04	CARBON STEEL
3	L50x50x6	JIS G 3192			12.72	323	1	3.15	1.43	SS400
4	L50x50x6	JIS G 3192			4.37	111	1	1.08	0.49	SS400
						GRAND TOTAL		4.59	2.08	

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**45A0A-PS-40
PAGE NUMBER:	1 OF 1

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING
DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1790
LINE NO:	**MBA01BR911

F(X) =	-41	lbs
F(Y) =	0	lbs
F(Z) =	-12	lbs
(X)=	0	inch
(Y)=	-0.005	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	1	inch

NODE:	2040
LINE NO:	**MBA01BR912

F(X) =	39	lbs
F(Y) =	0	lbs
F(Z) =	39	lbs
(X)=	0.236	inch
(Y)=	-0.113	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	1	inch


NODE:	2710
LINE NO:	**MBA01BR913

F(X) =	6	lbs
F(Y) =	0	lbs
F(Z) =	53	lbs
(X)=	0.236	inch
(Y)=	-0.079	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	1	inch


NODE:	2990
LINE NO:	**MBA01BR915

F(X) =	7	lbs
F(Y) =	0	lbs
F(Z) =	-12	lbs
(X)=	0.079	inch
(Y)=	0.013	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	1	inch


MODULE NO:
SD-2

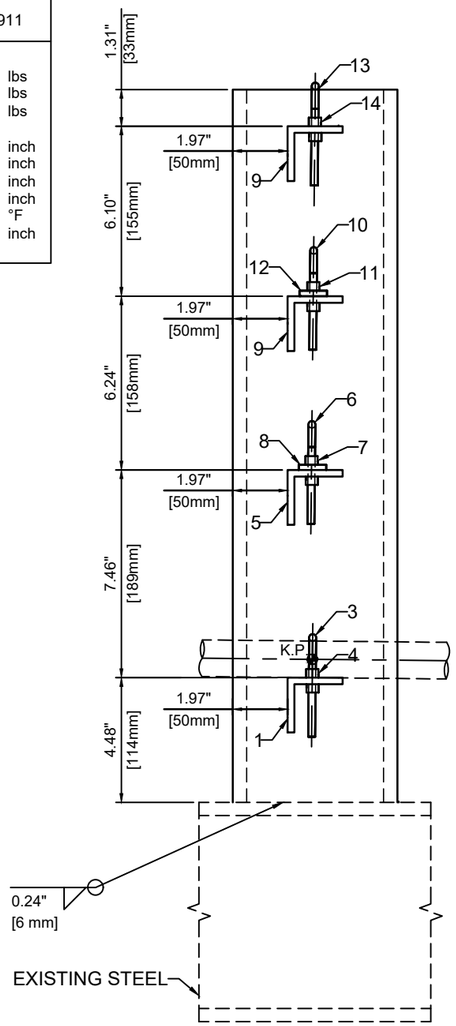


LOOKING EXHAUST SIDE
1:5

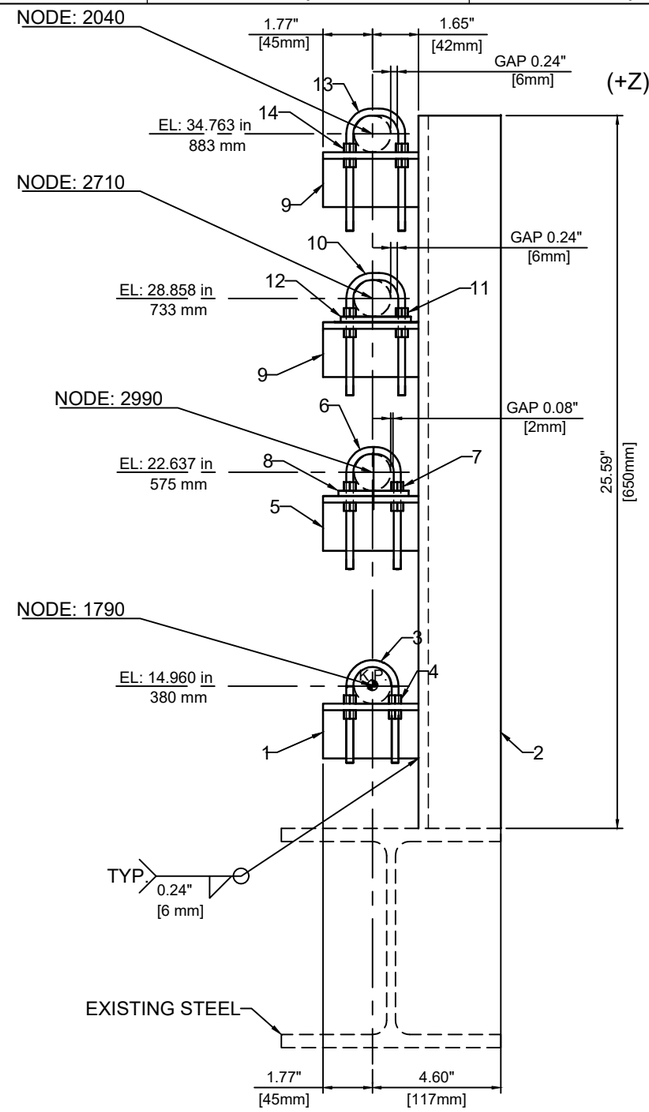

LOOKING FUEL GAS UNIT SIDE
1:5

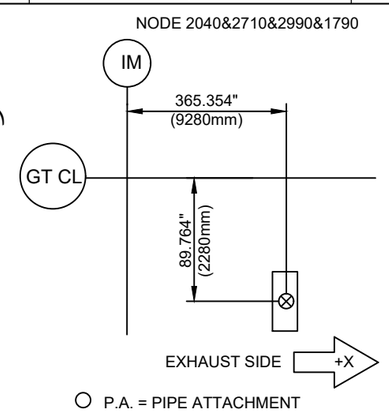



ISOMETRIC VIEW

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **45A0A-PS-47

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1180
LINE NO:	**MBH02BR909


F(X) =	0	lbs
F(Y) =	0	lbs
F(Z) =	-36	lbs
(X)=	0.124	inch
(Y)=	-0.028	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

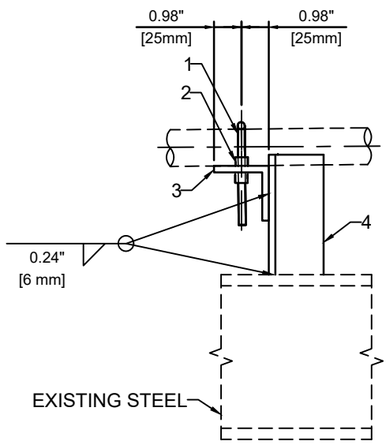


LOOKING INLET MANIFOLD SIDE
1:5

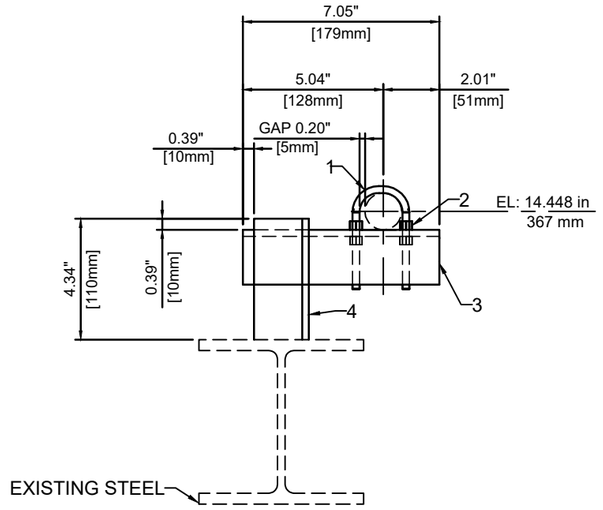


LOOKING LUBE OIL UNIT SIDE
1:5

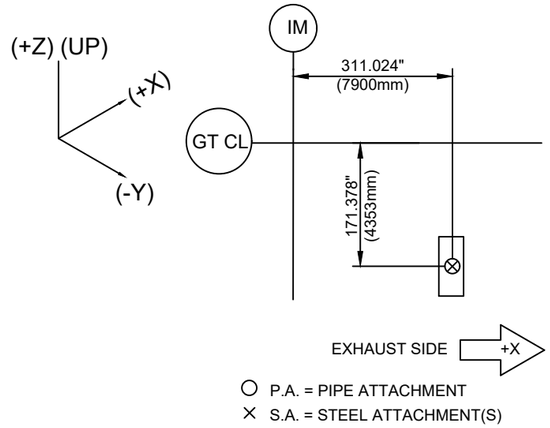



ISOMETRIC VIEW

3 L50x50x6

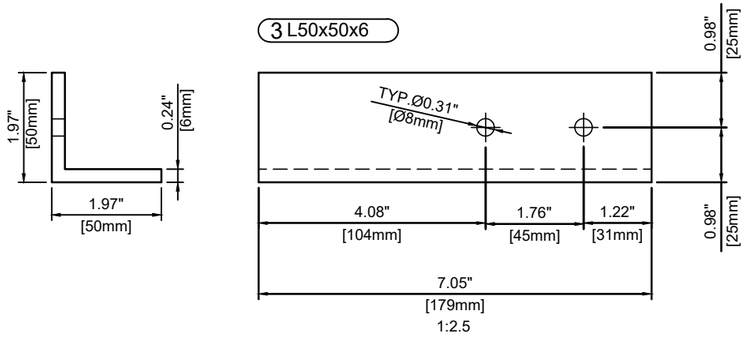

1:2.5

1 U-BOLT 1"

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Special U-Bolt, 1"	400328S					1	0.13	0.06	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	CARBON STEEL
3	L50x50x6	JIS G 3192			7.05	179	1	1.75	0.79	SS400
4	L50x50x6	JIS G 3192			4.33	110	1	1.07	0.49	SS400
						GRAND TOTAL		3.00	1.36	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **45A0A-PS-51

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	3610
LINE NO:	**MBH01BR923


F(X) =	-7	lbs
F(Y) =	0	lbs
F(Z) =	-10	lbs
(X)=	0	inch
(Y)=	0.001	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

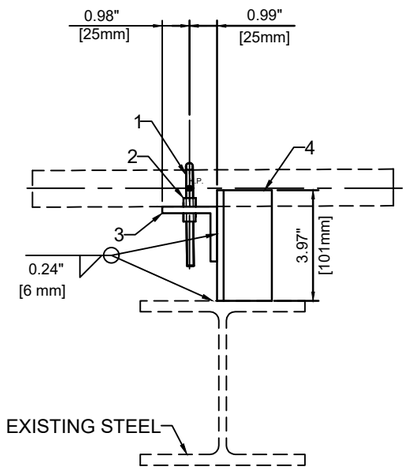


INLET MANIFOLD SIDE
1:5

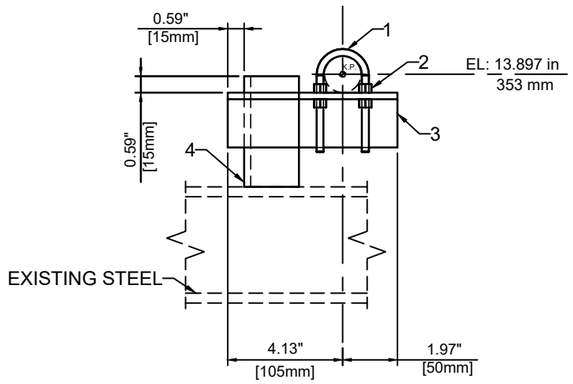


LOOKING FUEL GAS UNIT SIDE
1:5

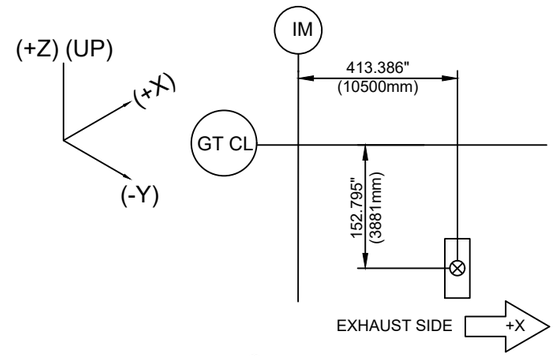



ISOMETRIC VIEW

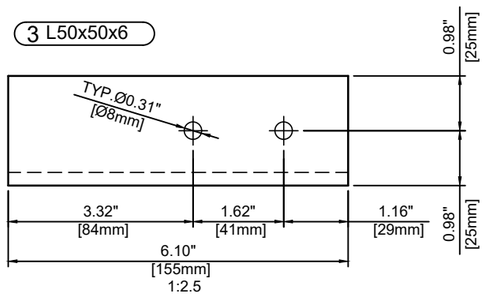

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1"	400328					1	0.13	0.06	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	CARBON STEEL
3	L50x50x6	JIS G 3192			6.10	155	1	1.51	0.69	SS400
4	L50x50x6	JIS G 3192			3.98	101	1	0.99	0.45	SS400
						GRAND TOTAL		2.68	1.21	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **45A0A-PS-53

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	4570
LINE NO:	**SDD01BR920


F(X) =	0	lbs
F(Y) =	-24	lbs
F(Z) =	-106	lbs
(X)=	0.036	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	3.50	inch
Pipe DesignTemp.=	70	°F
Insul=	0	inch

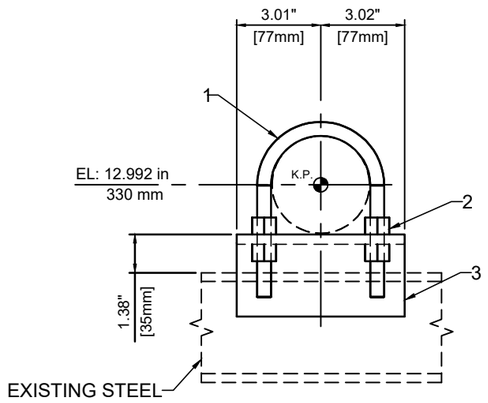


LOOKING EXHAUST SIDE
1:5

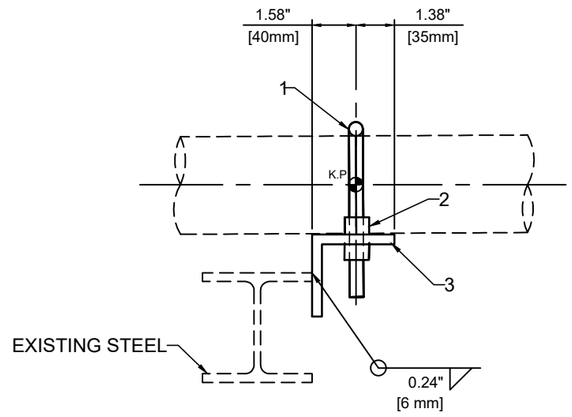

LOOKING FUEL GAS UNIT SIDE
1:5

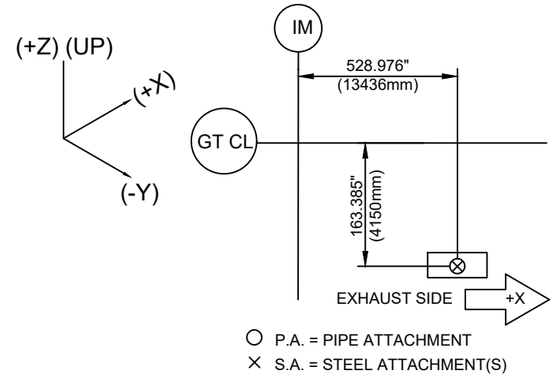

3 L75x75x9

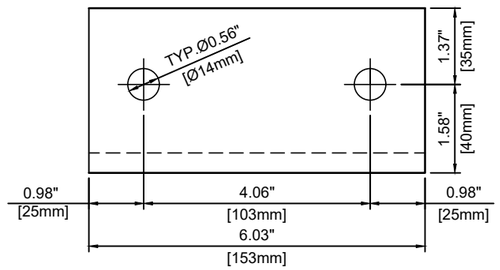

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 3.50"	400928					1	0.93	0.42	CARBON STEEL
2	Heavy Hex Nut for U-Bolt 1/2"						4	0.26	0.12	CARBON STEEL
3	L75x75x9	JIS G 3192			6.02	153	1	3.36	1.52	SS400
						GRAND TOTAL		4.55	2.06	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**45A0A-PS-70

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER