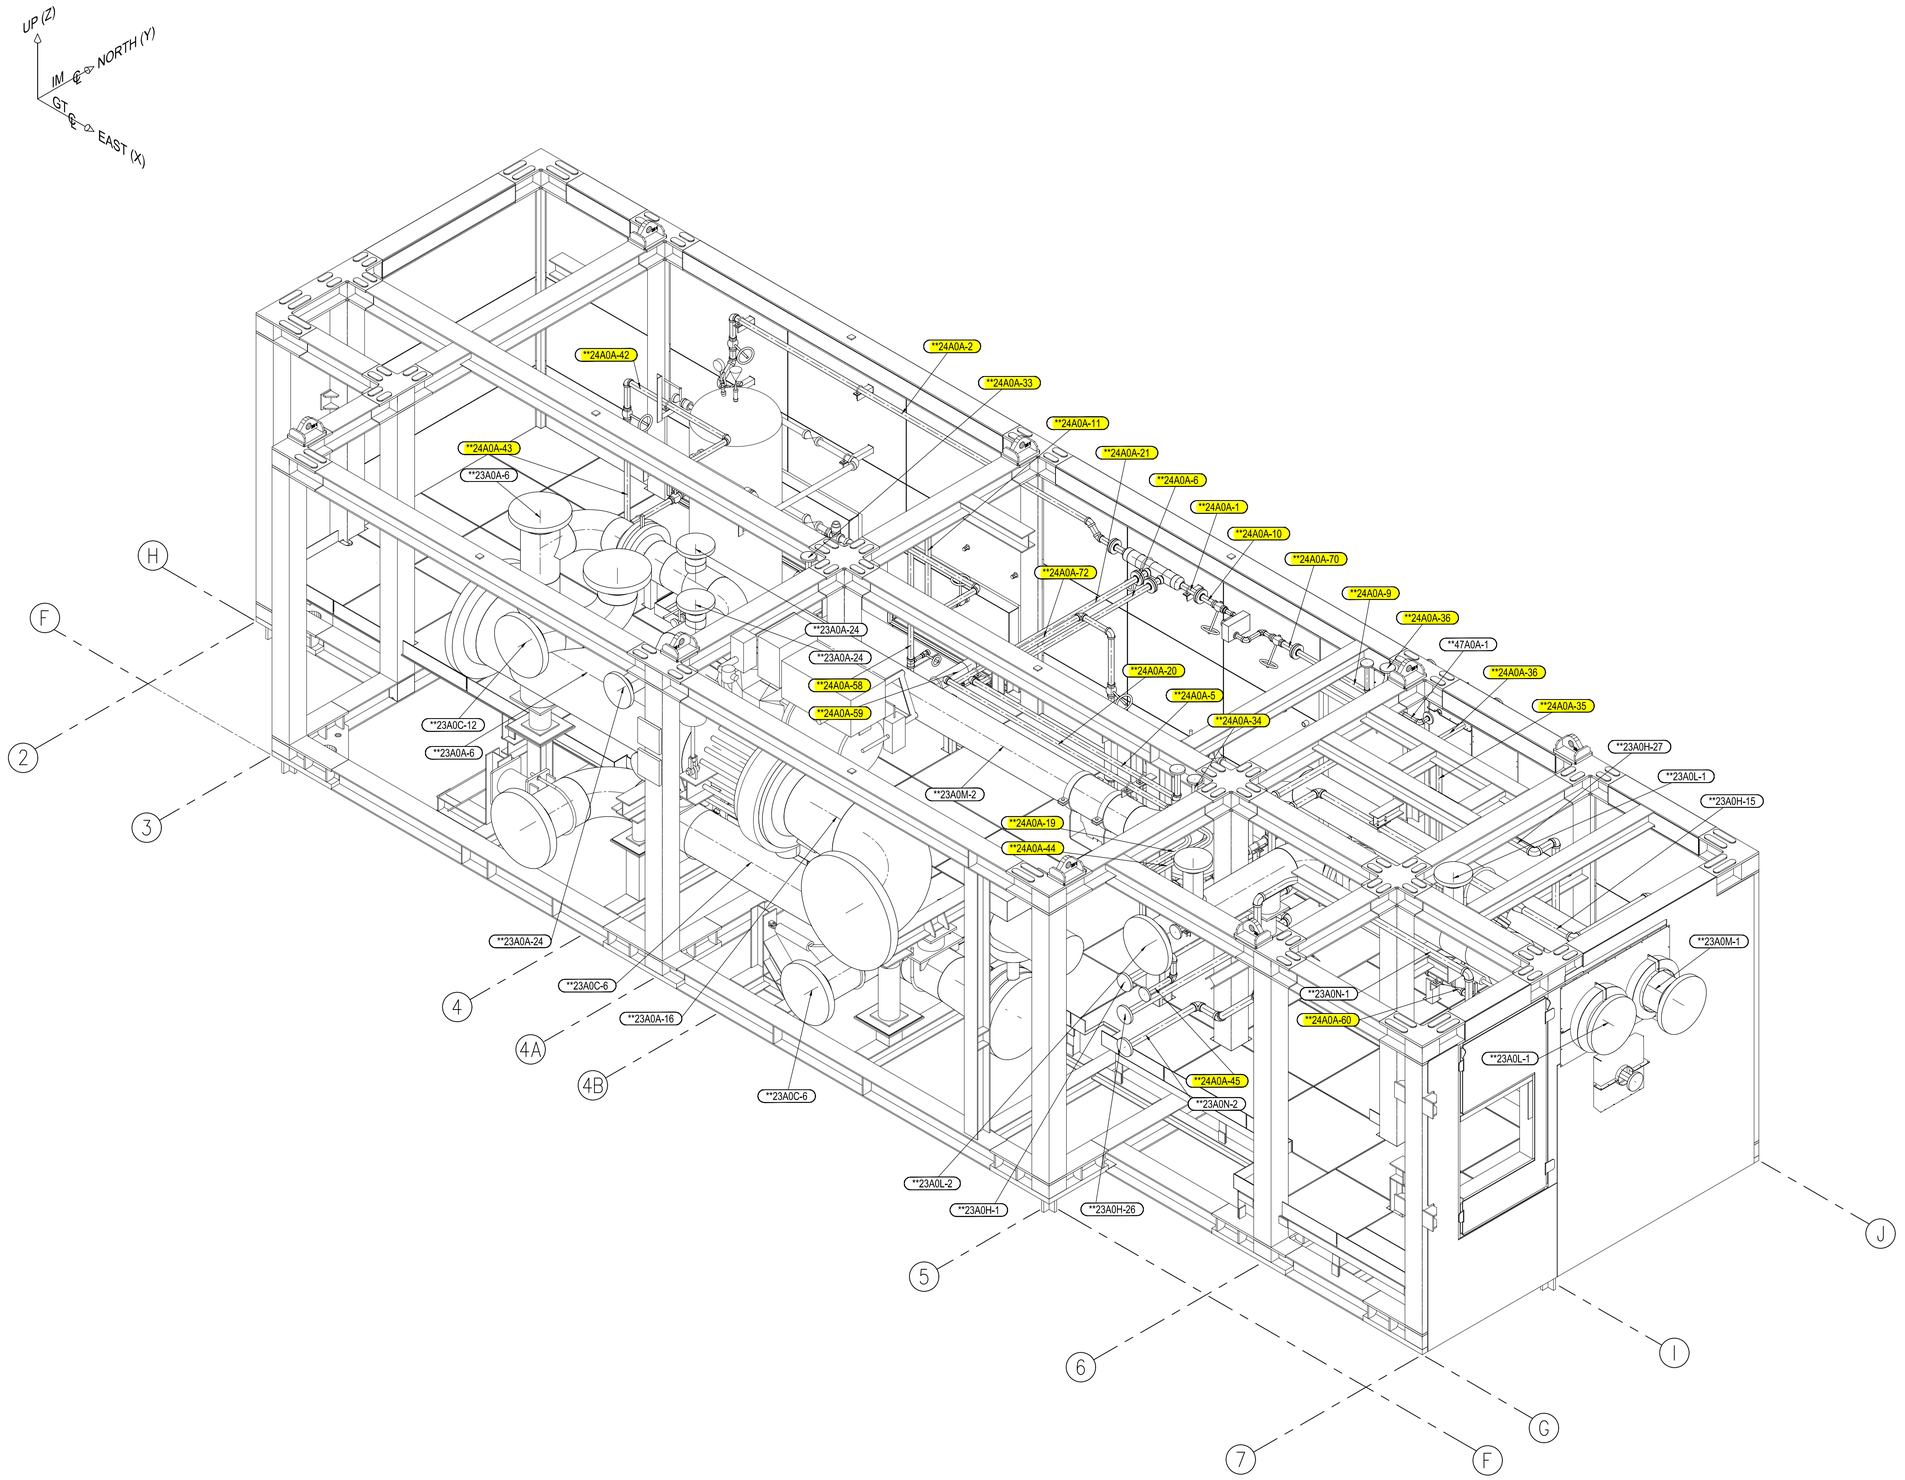


MD-1.2 ISOMETRIC VIEW
LOOKING NORTH WEST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-1.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-MD-1.2

REV.: 0

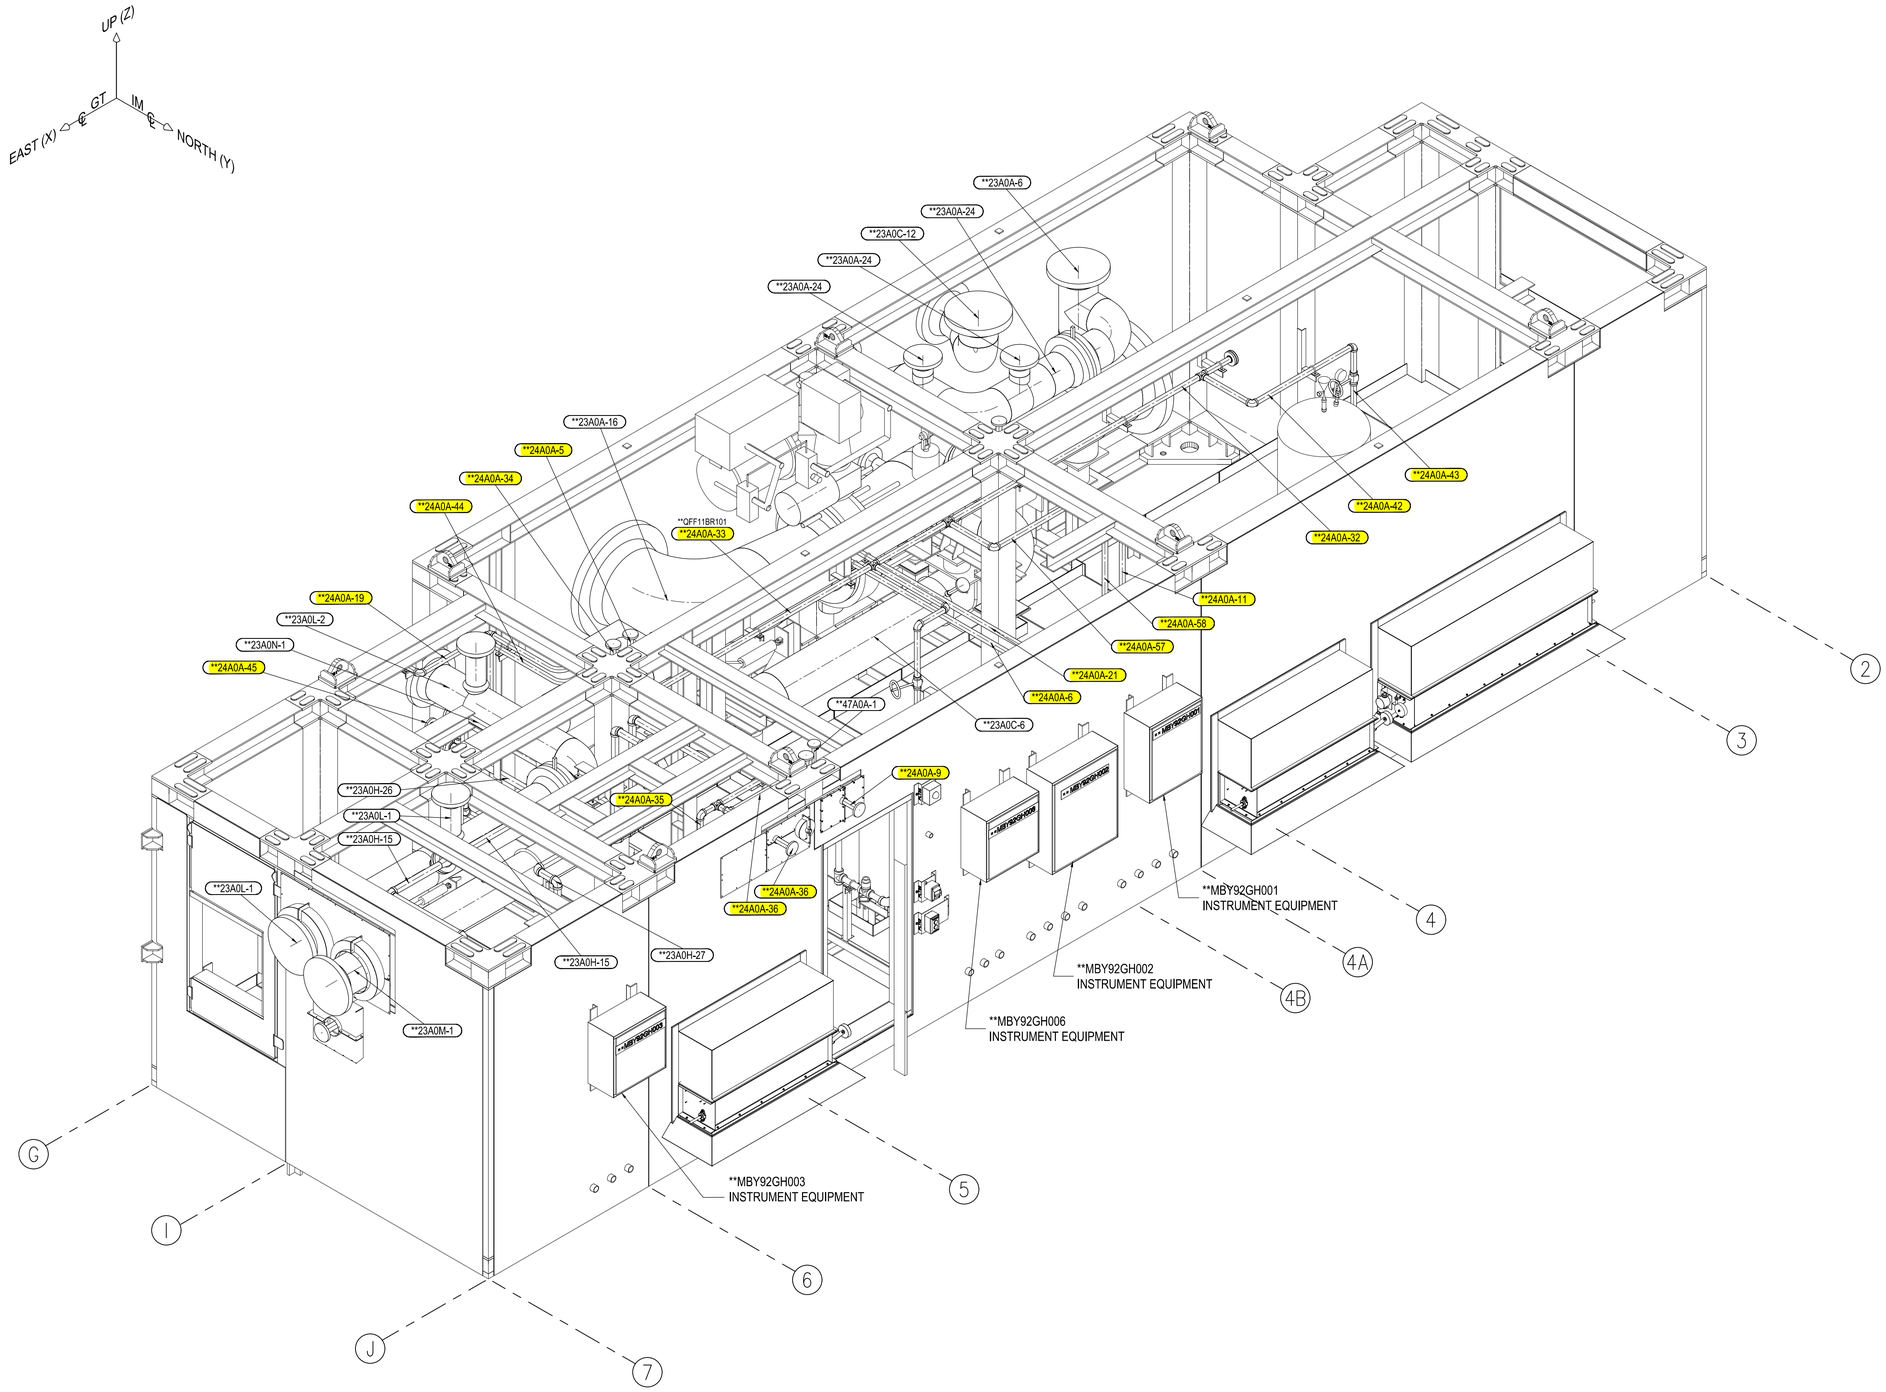

MD-1.2 ISOMETRIC VIEW
LOOKING SOUTH WEST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-1.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1


DRAWING NO: 2E00140-PI-094-001-MD-1.2

REV.: 0

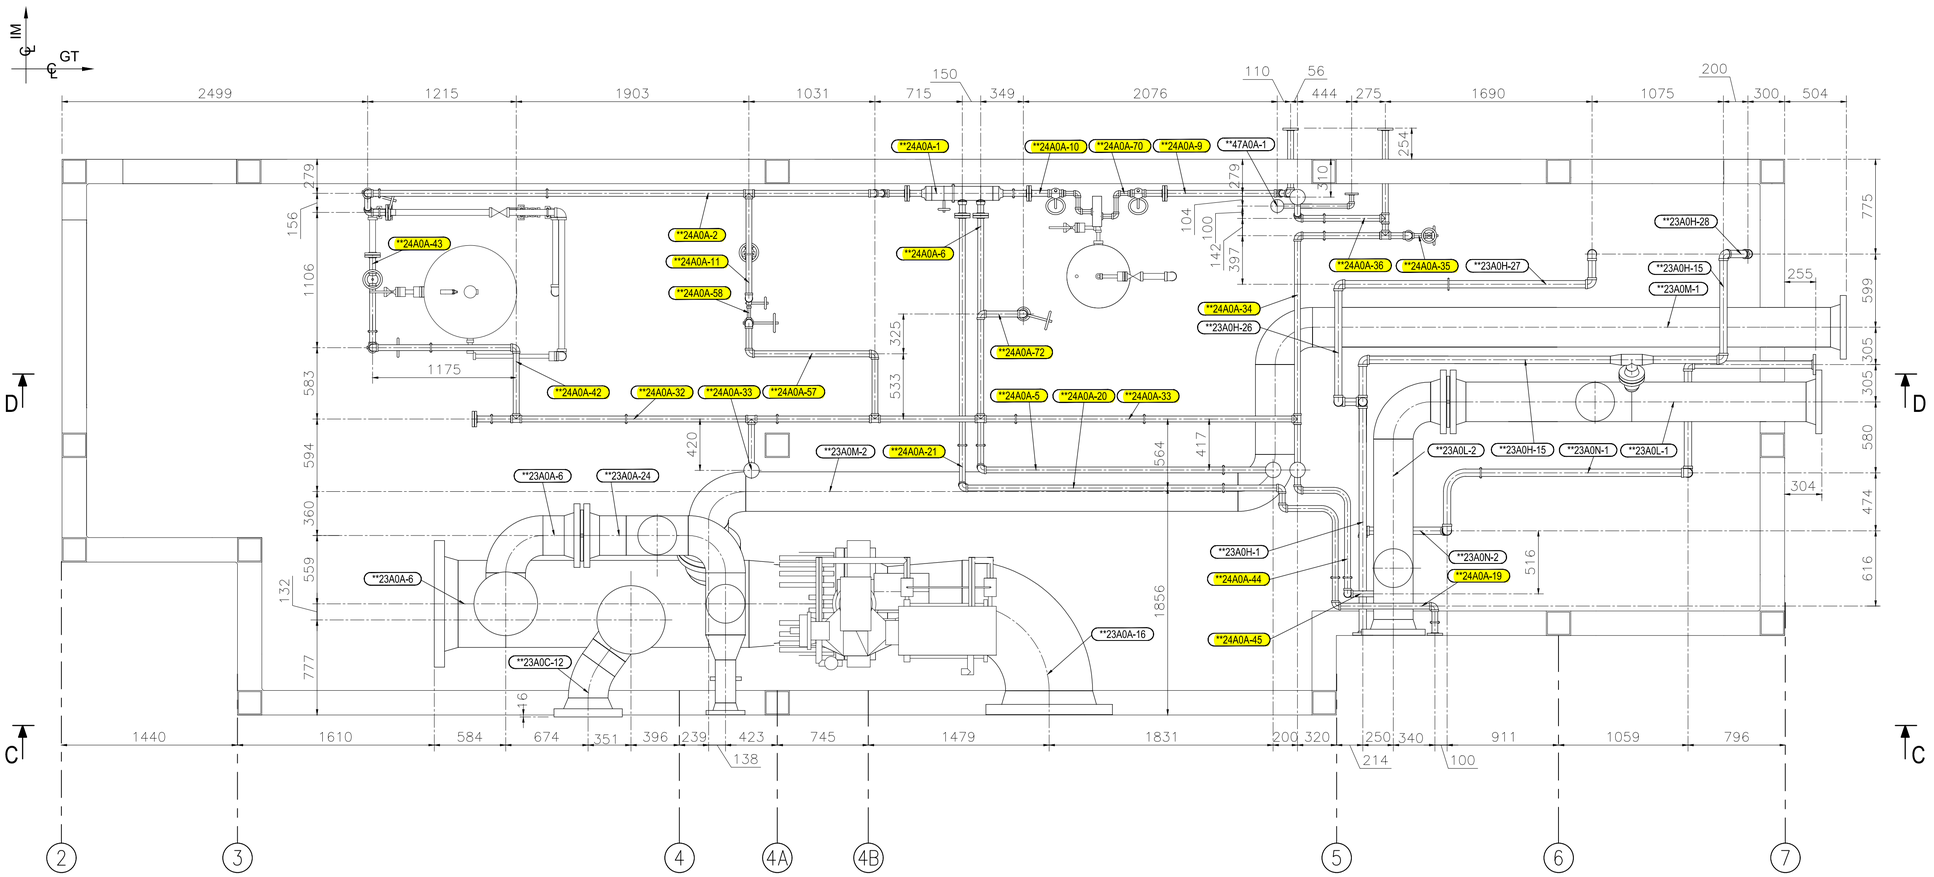

MD-1.2 PLAN VIEW

SECTION 'A-A'

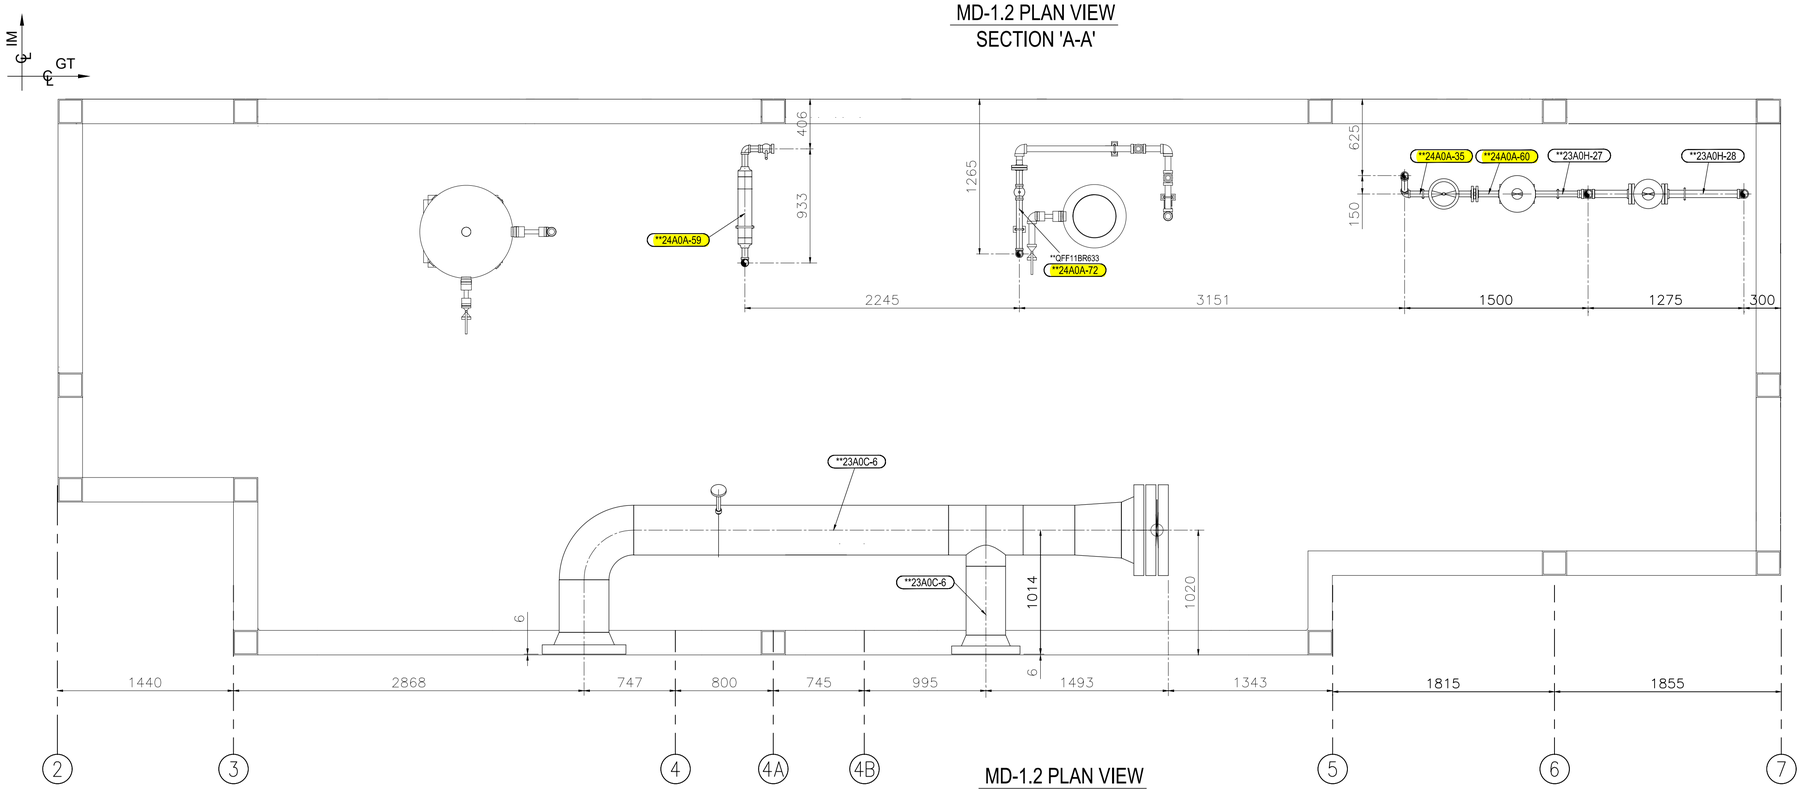

MD-1.2 PLAN VIEW

SECTION 'B-B'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL–150

DWG NAME: MD–1.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140–PI–094–001–MD–1.2

REV.: 0

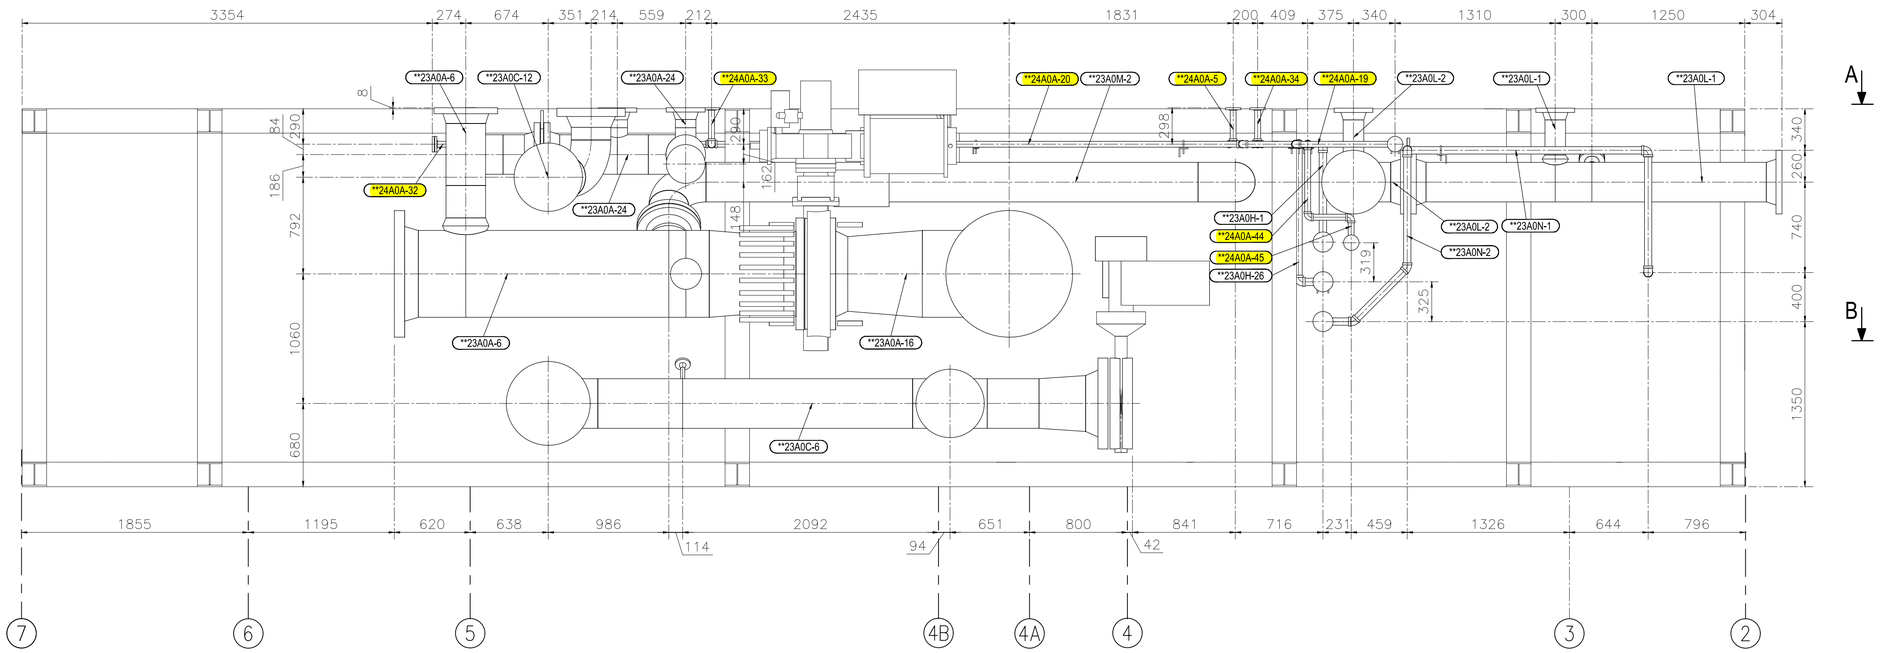

MD-1.2 ELEVATION VIEW
SECTION 'C-C'

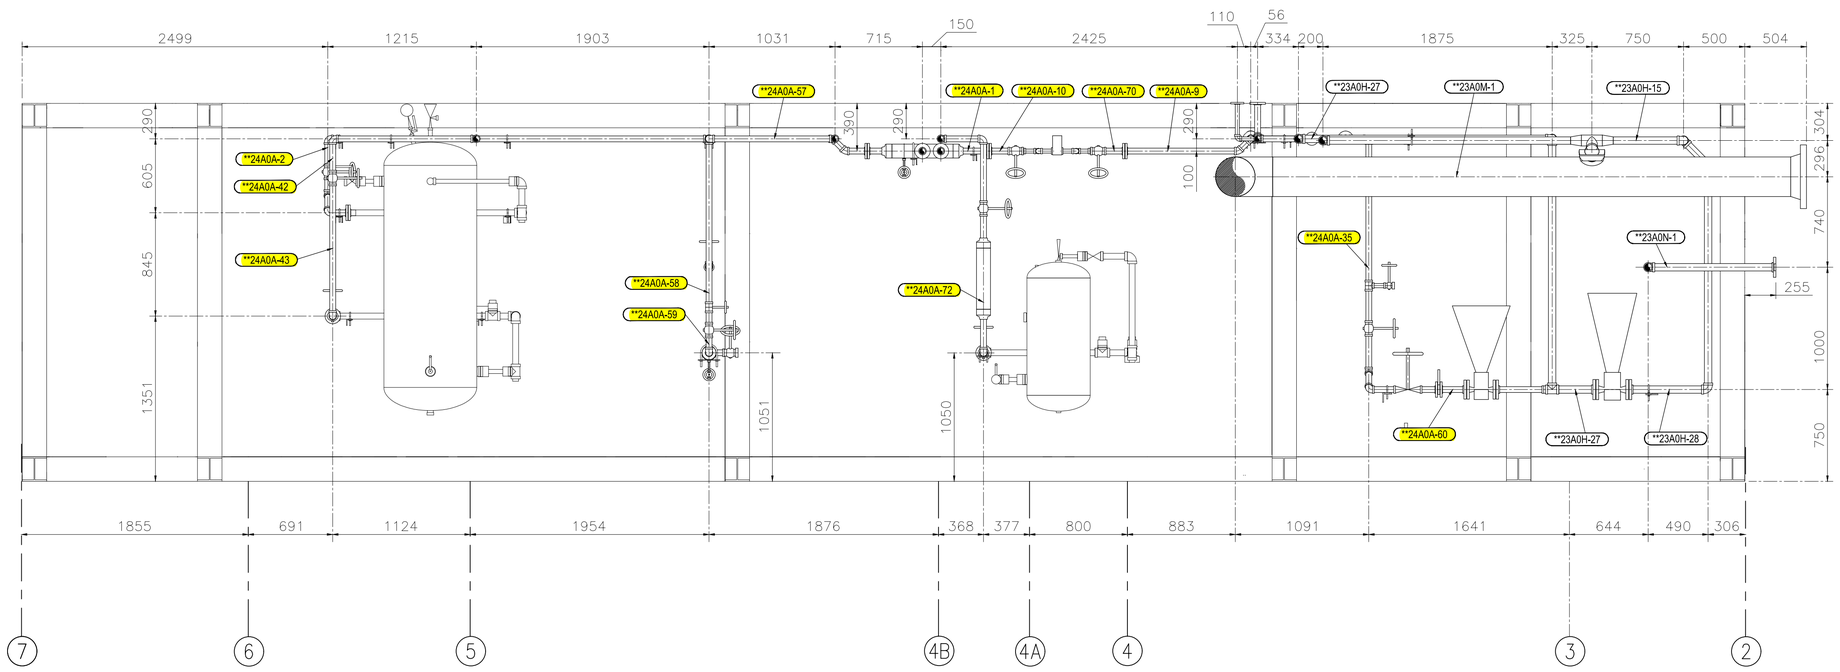

MD-1.2 ELEVATION VIEW
SECTION 'D-D'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX —— PIPE LINE
   - (××XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL–150

DWG NAME: MD–1.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**

REF.DWG.NO.: –


PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140–PI–094–001–MD–1.2

REV. 0

REVISION RECORD

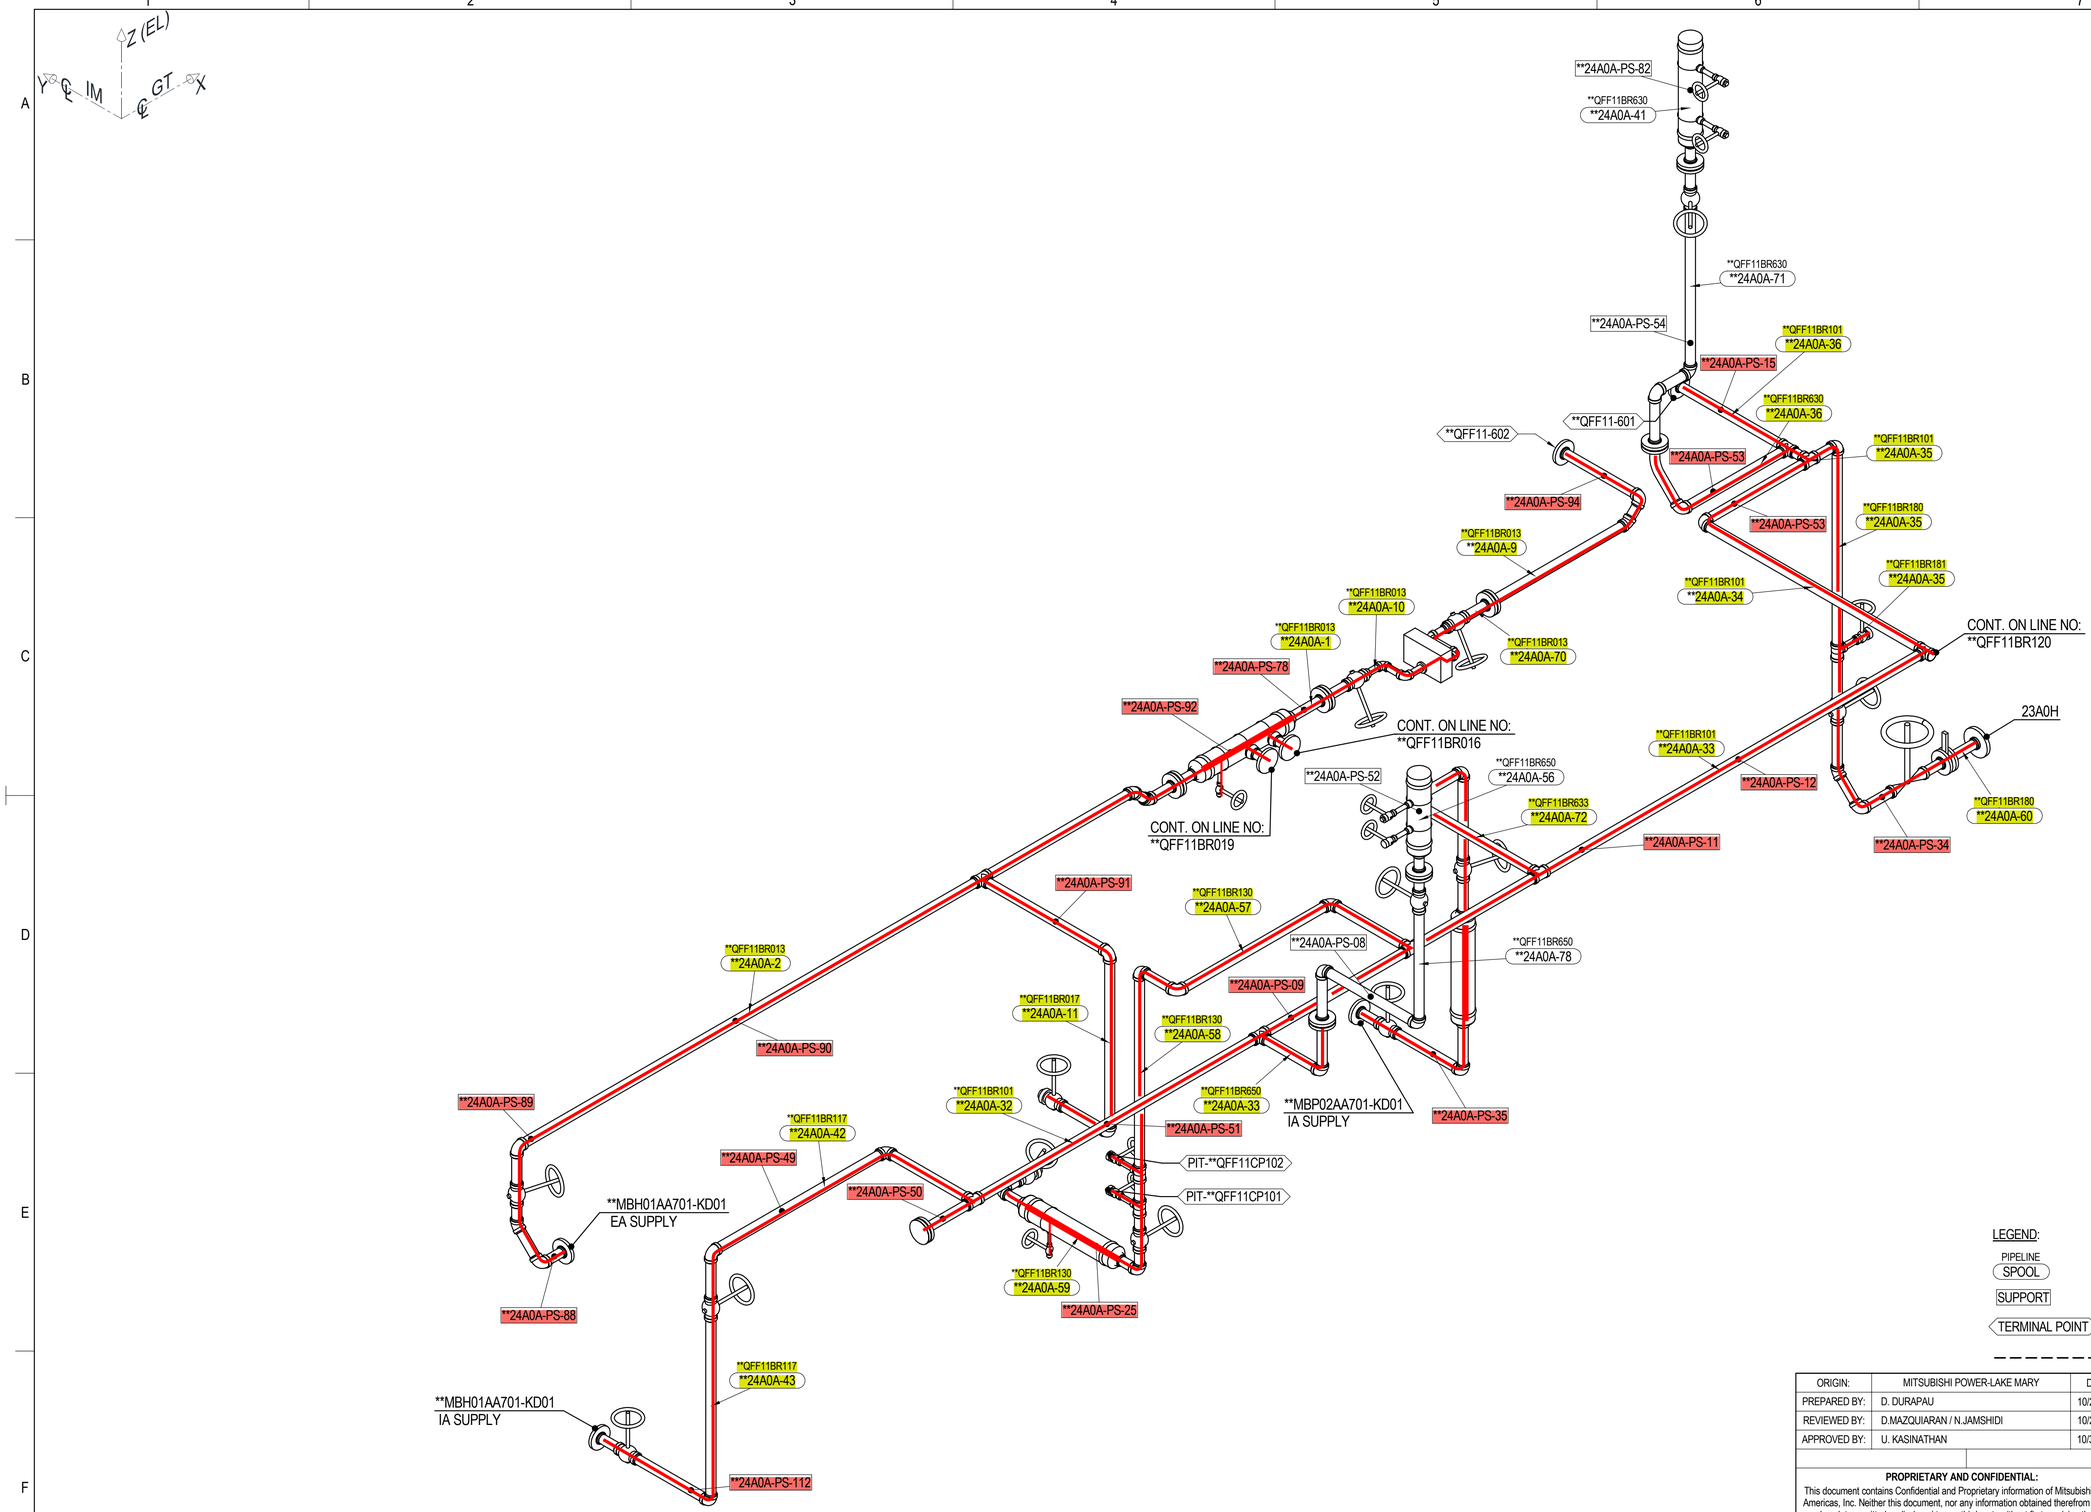

LEGEND:

PIPELINE SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 3 OF 8	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

REVISION RECORD

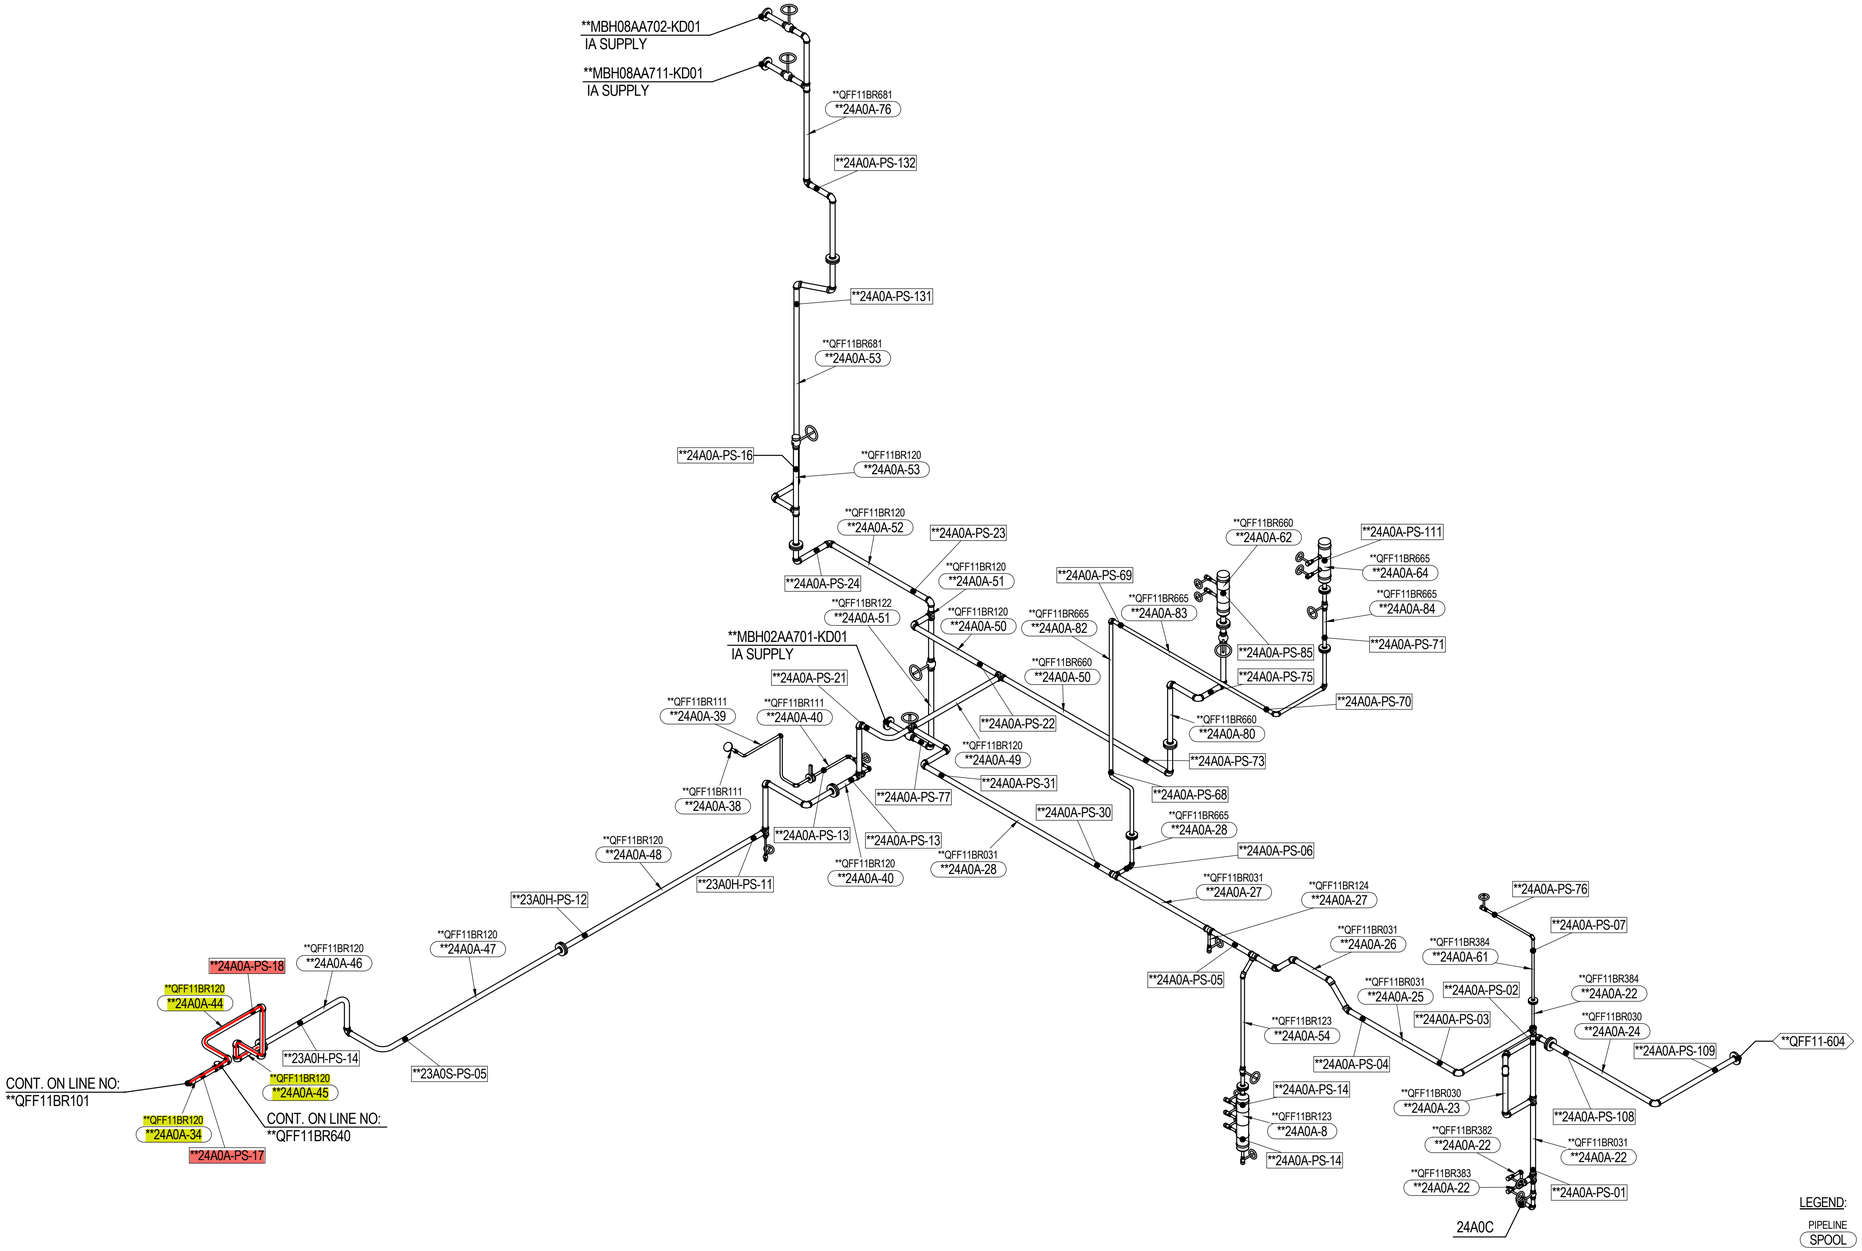

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 4 OF 8	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING


PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST

REVISION RECORD

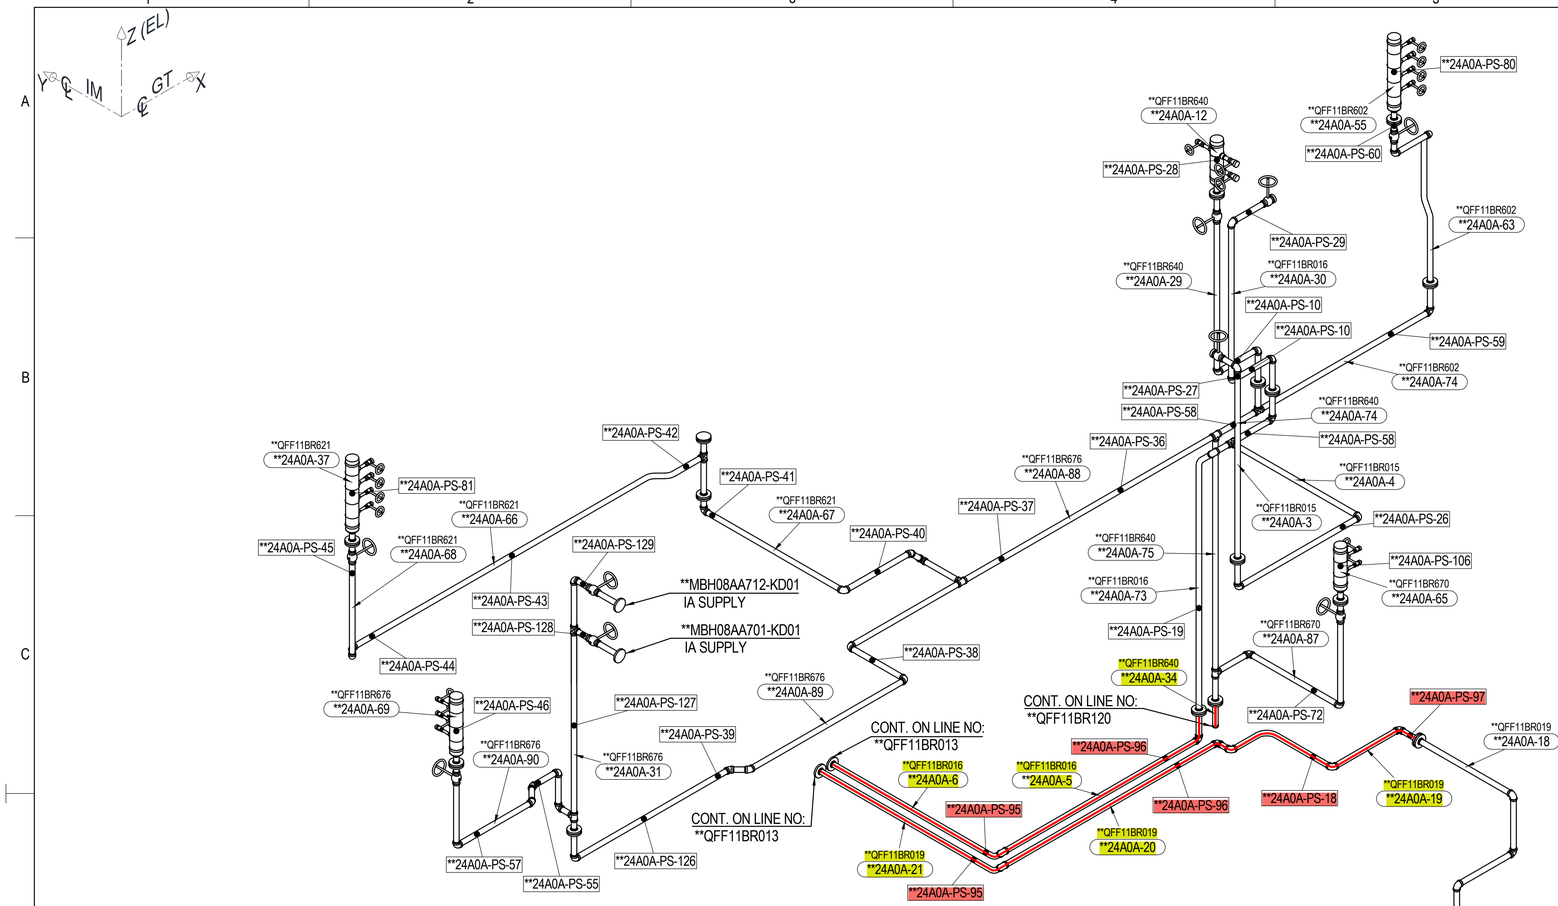

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 5 OF 8	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

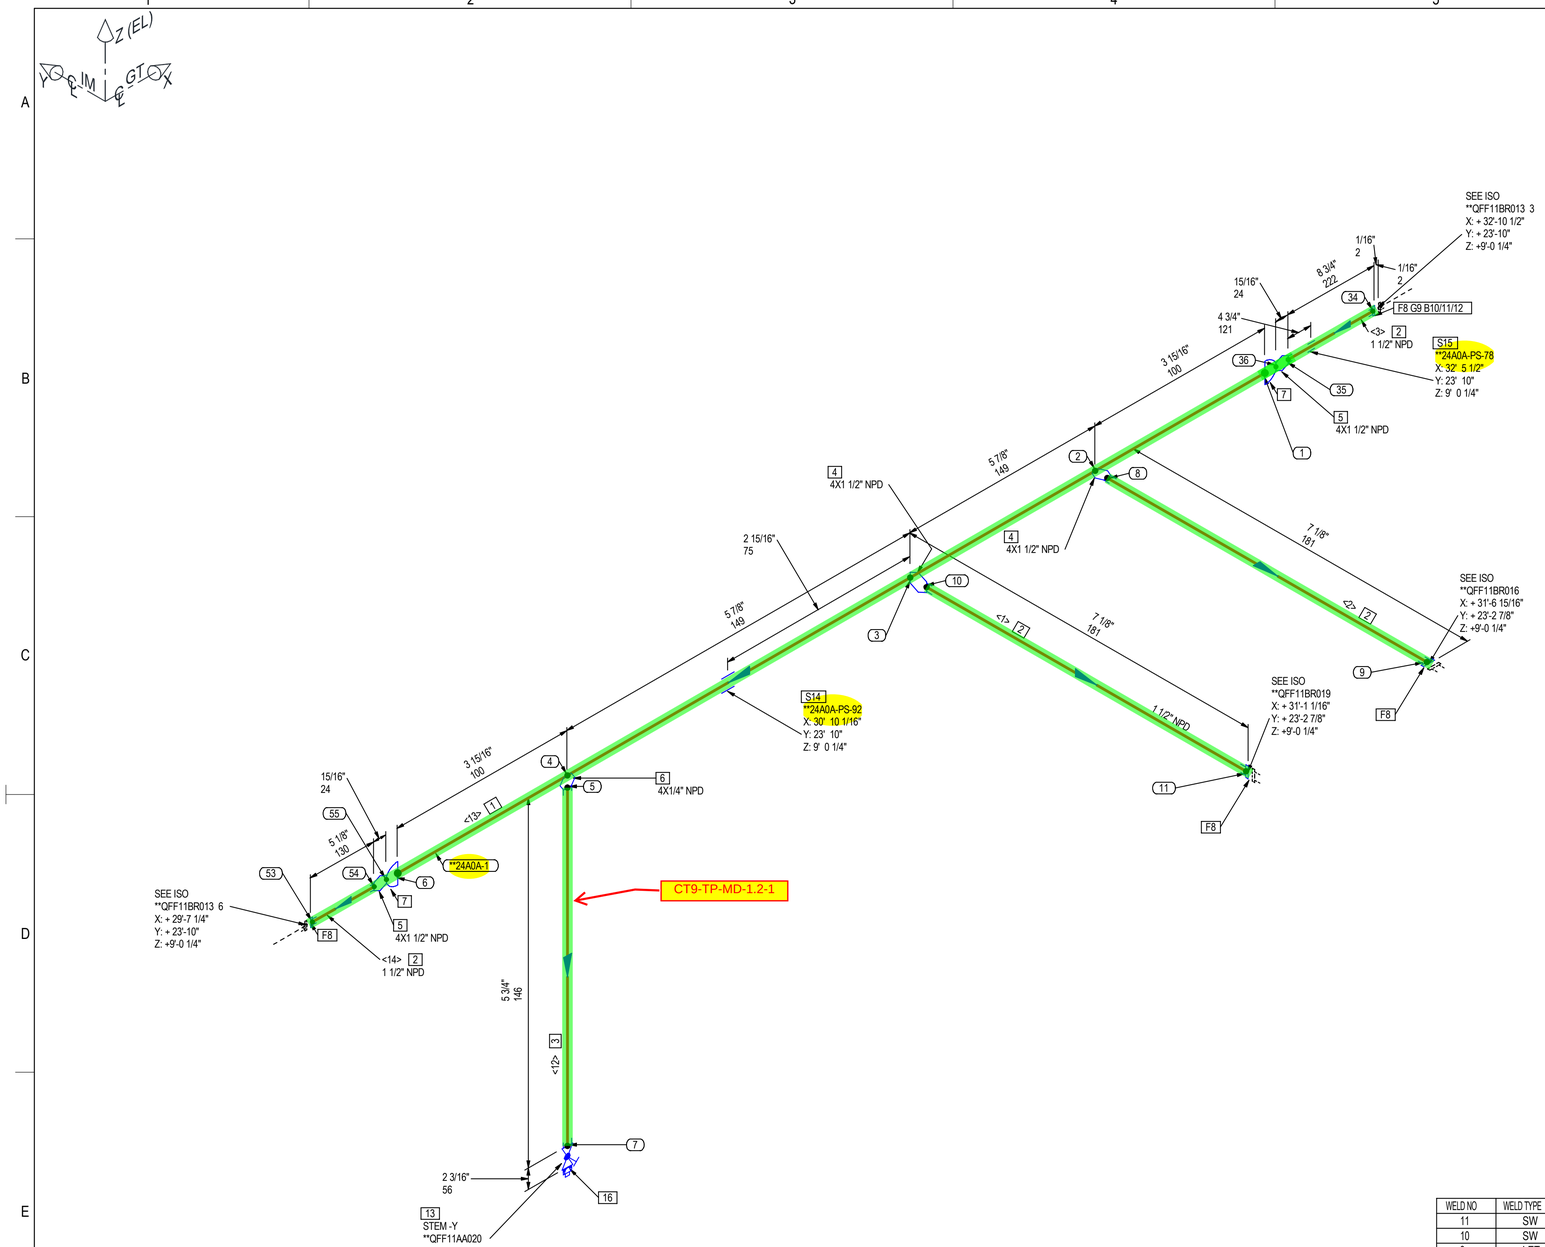

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	4	MPAAZZBOZZABBANI	1.7'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	1.8'
3	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1/4	MPAAZZBPZZABBANI	0.3'
4	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	4X1 1/2	MMELAWBVZZGKGALO	2
5	FLAT SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	4X1 1/2	MWACAWBVZZGKGALO	2
6	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	4X1/4	MMELAWBVZZGKGALO	1
7	CAP, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	4	MMFJZZBOZZAAEAPI	2
8	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	4

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
9	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
10	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
11	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
12	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
13	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1/4	MVALAQDHZZAATALS	1

PIPE SUPPORTS

14	PIPE SUPPORT	4	**24A0A-PS-92	1
15	PIPE SUPPORT	1 1/2	**24A0A-PS-78	1

SHOP LOOSE SHIPPED MATERIALS - ERECTION AND FABRICATION

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
16	PLUG, CL3000, MTE, ASME B16.11, ASTM A182-F304, HEX HEAD	1/4	MMFIAWBNZZAAGALO	1

SPOOLS

**24A0A-1

SEE SHT 2

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
11	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
3	LET	S	1 1/2"	1
2	LET	S	1 1/2"	1
8	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
1	BW	S	4"	1
36	LET	S	1 1/2"	1
35	SW	S	1 1/2"	1
34	SW	S	1 1/2"	1
4	LET	S	1/4"	1
5	SW	S	1/4"	1
7	SW	S	1/4"	1
6	BW	S	4"	1
55	LET	S	1 1/2"	1
54	SW	S	1 1/2"	1
53	SW	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REV. #	DESCRIPTION	BY	CHK	APP	DATE
	REVISION RECORD				

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:
PREPARED BY:	D. DURAPAU	10/22/2025
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025
APPROVED BY:	U. KASINATHAN	10/31/2025


MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
N05-003580	**0**	**24A0A**

INSTRUMENT AIR PIPING
INTERNAL TO GT PACKAGE
FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR013		1 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



SEE SHT 1

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	3 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	8 7/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<12>	3 1/16"	1/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<13>	1'7 11/16"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<14>	4 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR013	2 OF 6	

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER


SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST





DETAIL A

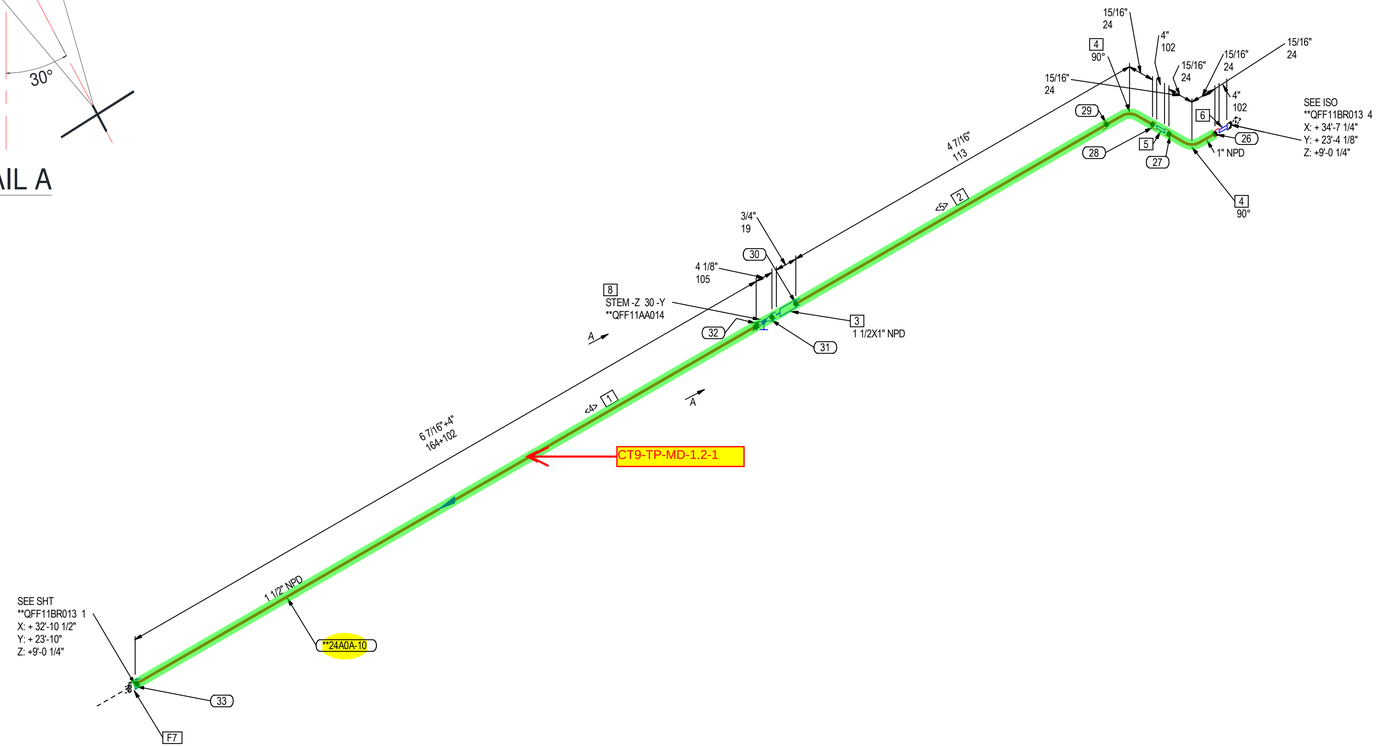

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	0.9'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	0.3'
3	REDUCER INSERT, CL3000, SWE, MSS-SP-79, ASTM A182-F304, TYPE 2	1 1/2X1	MMBHAWBVZZADOALO	1
4	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMCKAWBVZZAAGALO	2
5	NIPPLE, S-40S, PE x PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS, 4" LONG	1	MPBAZZBPZZABBANI	1
6	NIPPLE, S-80S, PE x MTE, ASME B36.19M, ASTM A312-TP304, SEAMLESS, 4" LONG	1	MPBAZZDNZZABBANI	1
7	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1

SPOOLS

**24A0A-10

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<4>	10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	3 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
33	SW	S	1 1/2"	1
32	SW	S	1 1/2"	1
31	SW	S	1 1/2"	1
30	SW	S	1"	1
29	SW	S	1"	1
28	SW	S	1"	1
27	SW	S	1"	1
26	SW	S	1"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	150.00 psig / 1.03 MPag		
TEST PRESS.:	225.00 psig / 1.55 MPag		
MAX. TEMP:	140 F / 60 C		
INSULATION SPEC:	NOT INSULATED		

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✖ FW - FIELD WELD
✖ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR013	3 OF 6	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING


DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST





DETAIL A

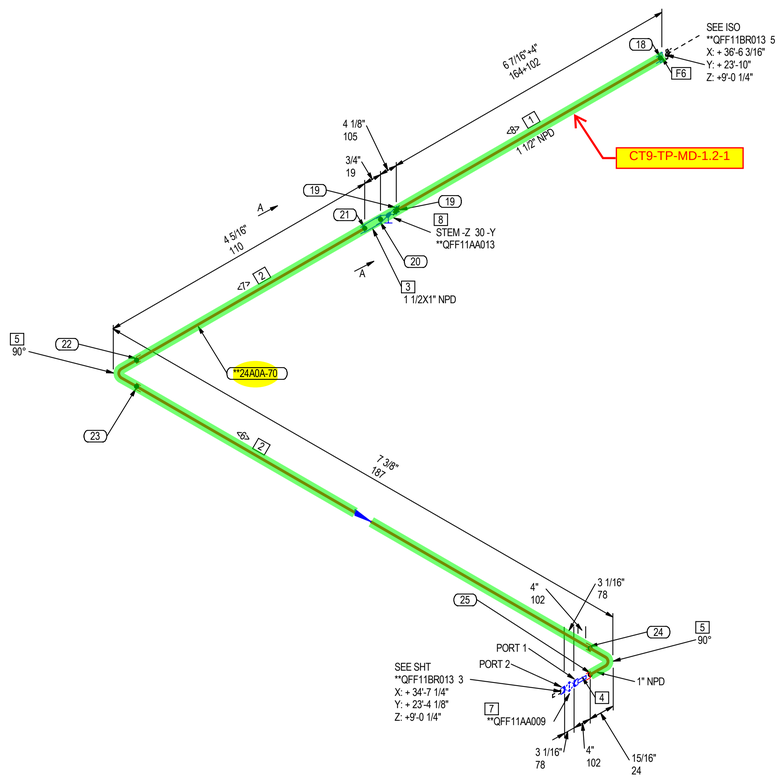

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
25	SW	S	1"	1
24	SW	S	1"	1
23	SW	S	1"	1
22	SW	S	1"	1
21	SW	S	1"	1
20	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
18	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	0.9'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	0.8'
3	REDUCER INSERT, CL3000, SWE, MSS-SP-79, ASTM A182-F304, TYPE 2	1 1/2X1	MMBHAWBVZZADOALO	1
4	NIPPLE, S-80S, PE x MTE, ASME B36.19M, ASTM A312-TP304, SEAMLESS, 4" LONG	1	MPBAZZDNZZABBANI	1
5	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMCKAWBVZZAAGALO	2
6	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
7	EMERGENCY AIR BOTTLE SOLENOID VALVE **QFF11AA009	1	**QFF11AA009	1
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1

SPOOLS
**24A0A-70

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<6>	5 1/2"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	3 3/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.


ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR013	4 OF 6	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

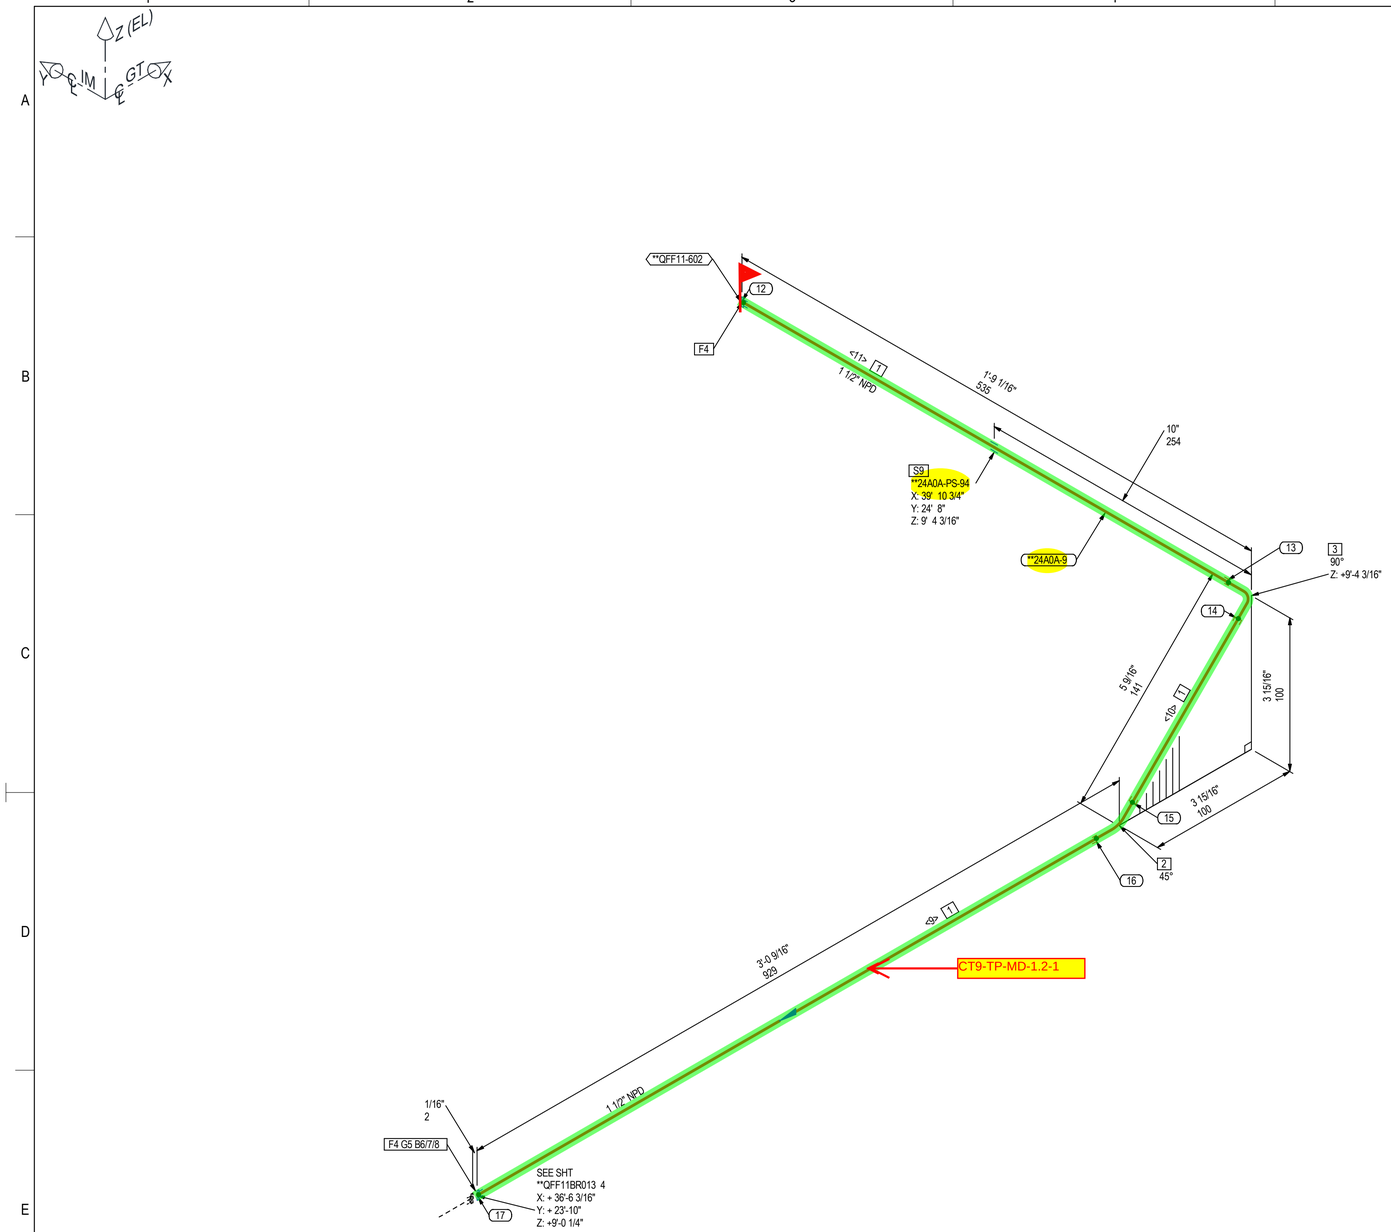

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	4.9'
2	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMBWAWBVZZAAGALO	1
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	1
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
8	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-94	1
	SPOOLS			
	**24A0A-9			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<9>	2'11 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	3 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	1'7 7/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
17	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
PROJECT CODE:	-	P&ID:	-		
PIPELINE:		PAGE NUMBER:			
**QFF11BR013		5 OF 6			

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

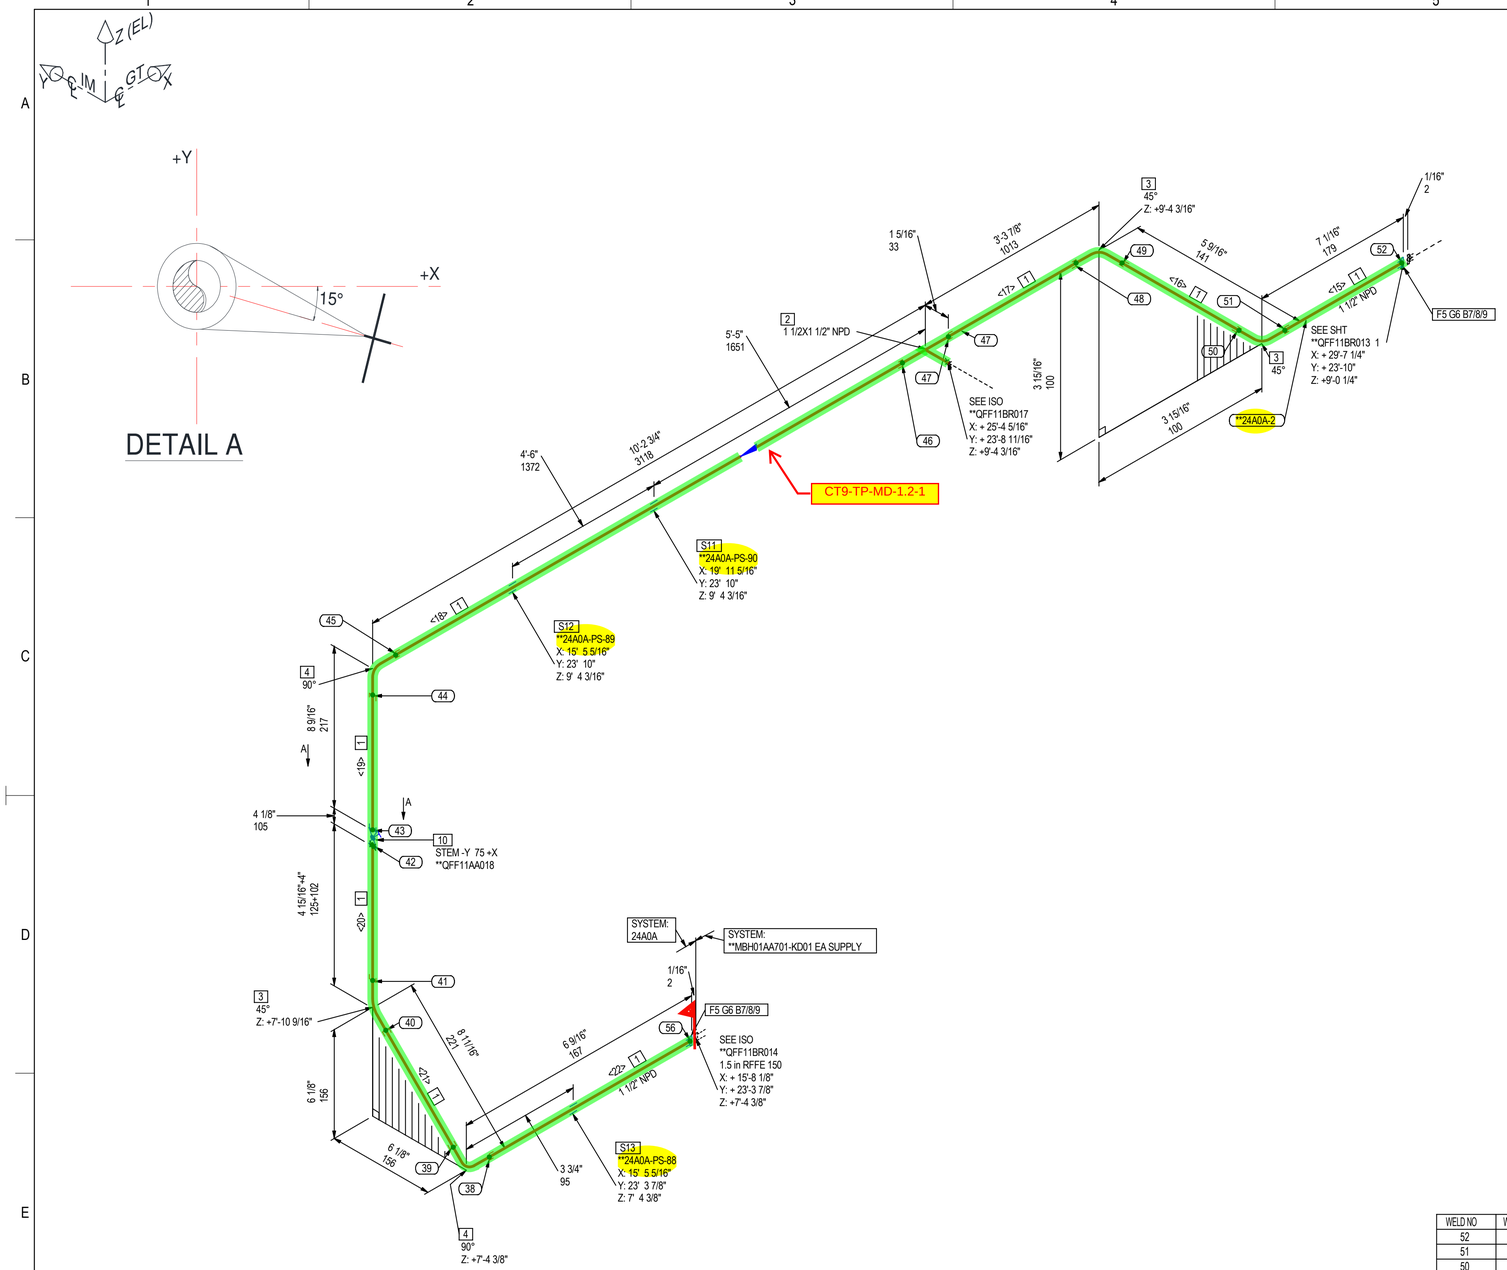

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	16.2'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	1
3	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMBWAWBVZZAAGALO	3
4	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2
5	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
6	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	2
7	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	8
8	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	16
9	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	16
10	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1
	PIPE SUPPORTS			
11	PIPE SUPPORT	1 1/2	**24A0A-PS-90	1
12	PIPE SUPPORT	1 1/2	**24A0A-PS-89	1
13	PIPE SUPPORT	1 1/2	**24A0A-PS-88	1
	SPOOLS			
	**24A0A-2			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<15>	5 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<16>	3 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<17>	3'1 11/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<18>	10'0 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<19>	7 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<20>	8 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<21>	6 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<22>	4 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
52	SW	S	1 1/2"	1
51	SW	S	1 1/2"	1
50	SW	S	1 1/2"	1
49	SW	S	1 1/2"	1
48	SW	S	1 1/2"	1
47	SW	S	1 1/2"	1
46	SW	S	1 1/2"	1
45	SW	S	1 1/2"	1
44	SW	S	1 1/2"	1
43	SW	S	1 1/2"	1
42	SW	S	1 1/2"	1
41	SW	S	1 1/2"	1
40	SW	S	1 1/2"	1
39	SW	S	1 1/2"	1
38	SW	S	1 1/2"	1
56	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION		
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129		
MAX. PRESS.:	150.00 psig / 1.03 MPag			
TEST PRESS.:	225.00 psig / 1.55 MPag			
MAX. TEMP:	140 F / 60 C			
INSULATION SPEC:	NOT INSULATED			

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR013	6 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

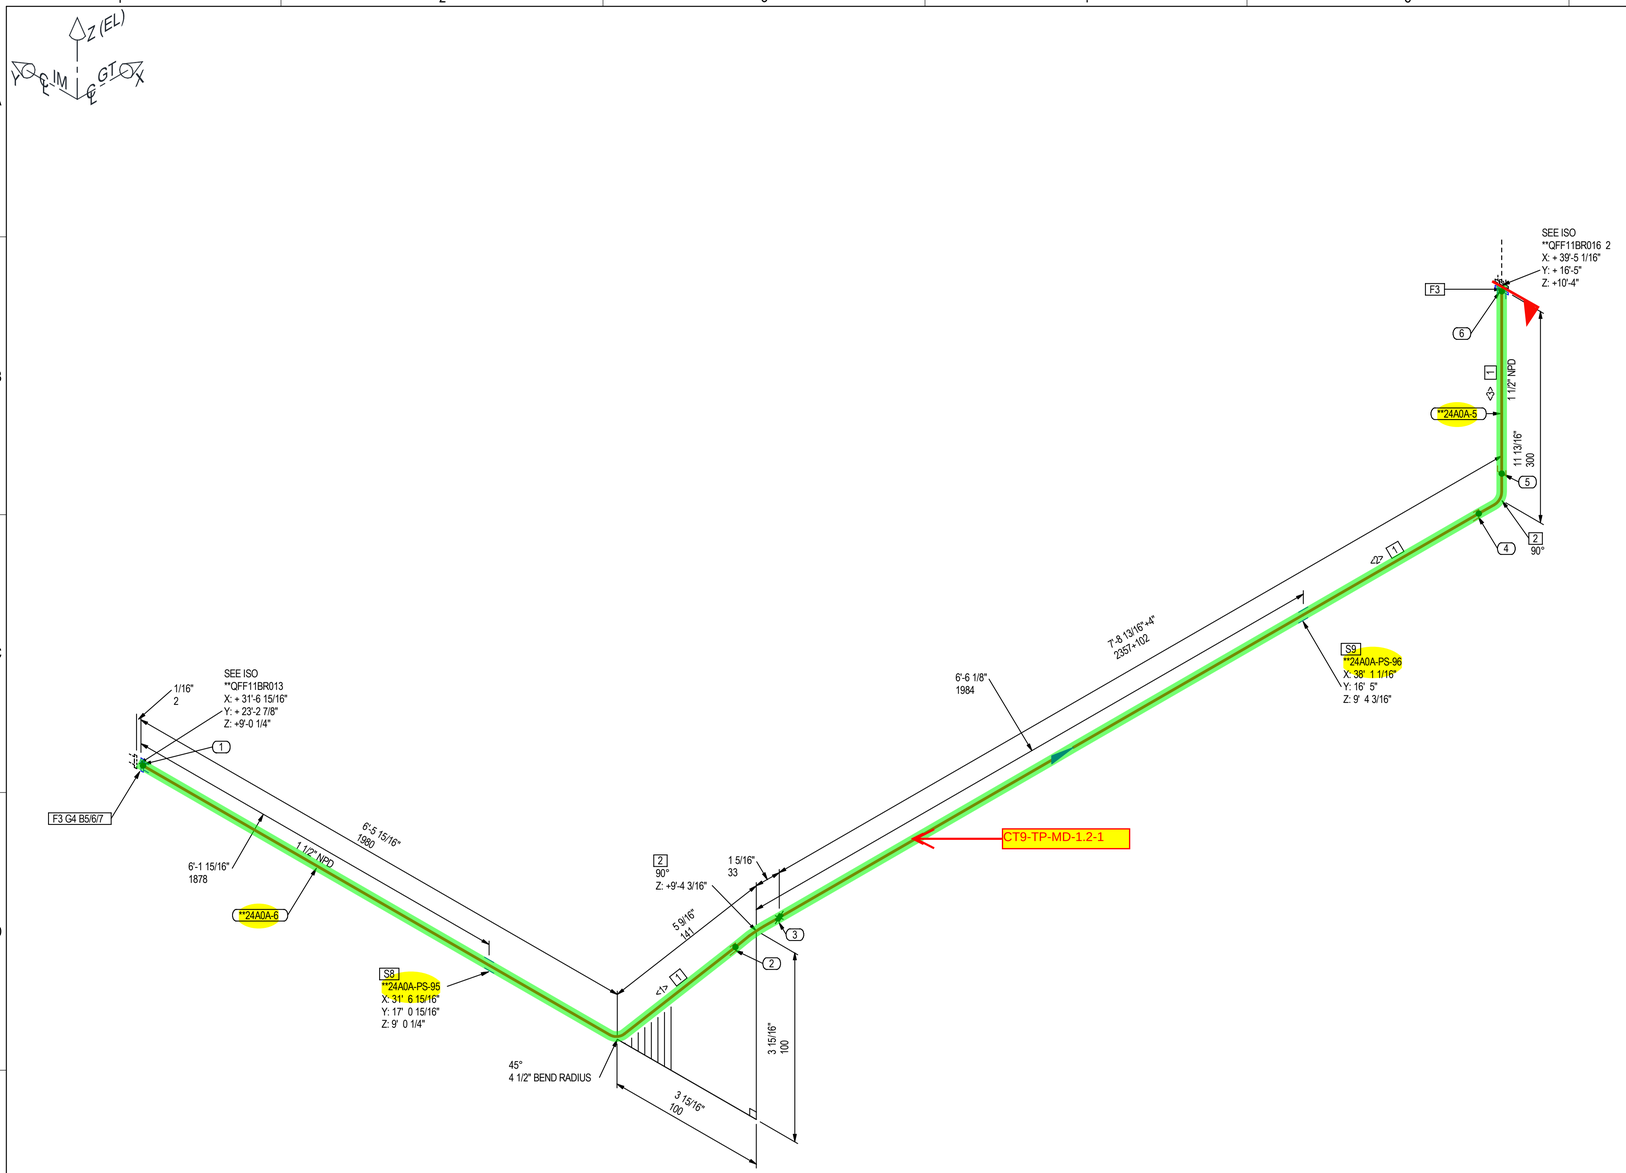

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1 1/2"	1
2	SW	S	1 1/2"	1
3	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1
5	SW	S	1 1/2"	1
6	SW	S	1 1/2"	1

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	15.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
8	PIPE SUPPORT	1 1/2	**24A0A-PS-95	1
9	PIPE SUPPORT	1 1/2	**24A0A-PS-96	1
	SPOOLS			
	**24A0A-5, **24A0A-6			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	6'9 11/16"	1 1/2	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	7'11 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	150.00 psig / 1.03 MPag	
TEST PRESS.:	225.00 psig / 1.55 MPag	
MAX. TEMP:	140 F / 60 C	
INSULATION SPEC:	NOT INSULATED	

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST


ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR016		1 OF 3	



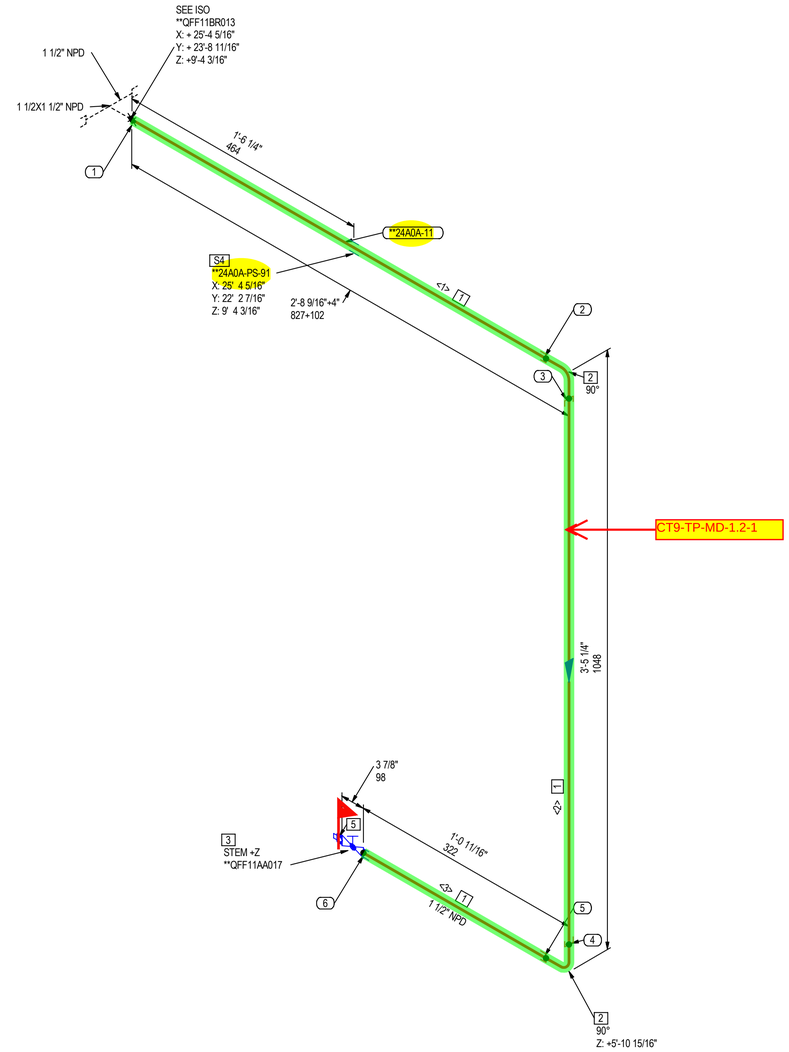

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	7.2'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQDHZZAATALS	1
	PIPE SUPPORTS			
4	PIPE SUPPORT	1 1/2	**24A0A-PS-91	1

SHOP LOOSE SHIPPED MATERIALS - ERECTION AND FABRICATION

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	PLUG, CL3000, MTE, ASME B16.11, ASTM A182-F304, HEX HEAD	1 1/2	MMFIAWBNZZAAGALO	1

SPOOLS

**24A0A-11

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	2'11 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	3'2 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	11 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1 1/2"	1
2	SW	S	1 1/2"	1
3	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1
5	SW	S	1 1/2"	1
6	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580 / 0 / 24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE
PROJECT CODE: - P&ID: -
PIPELINE: **QFF11BR017
PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

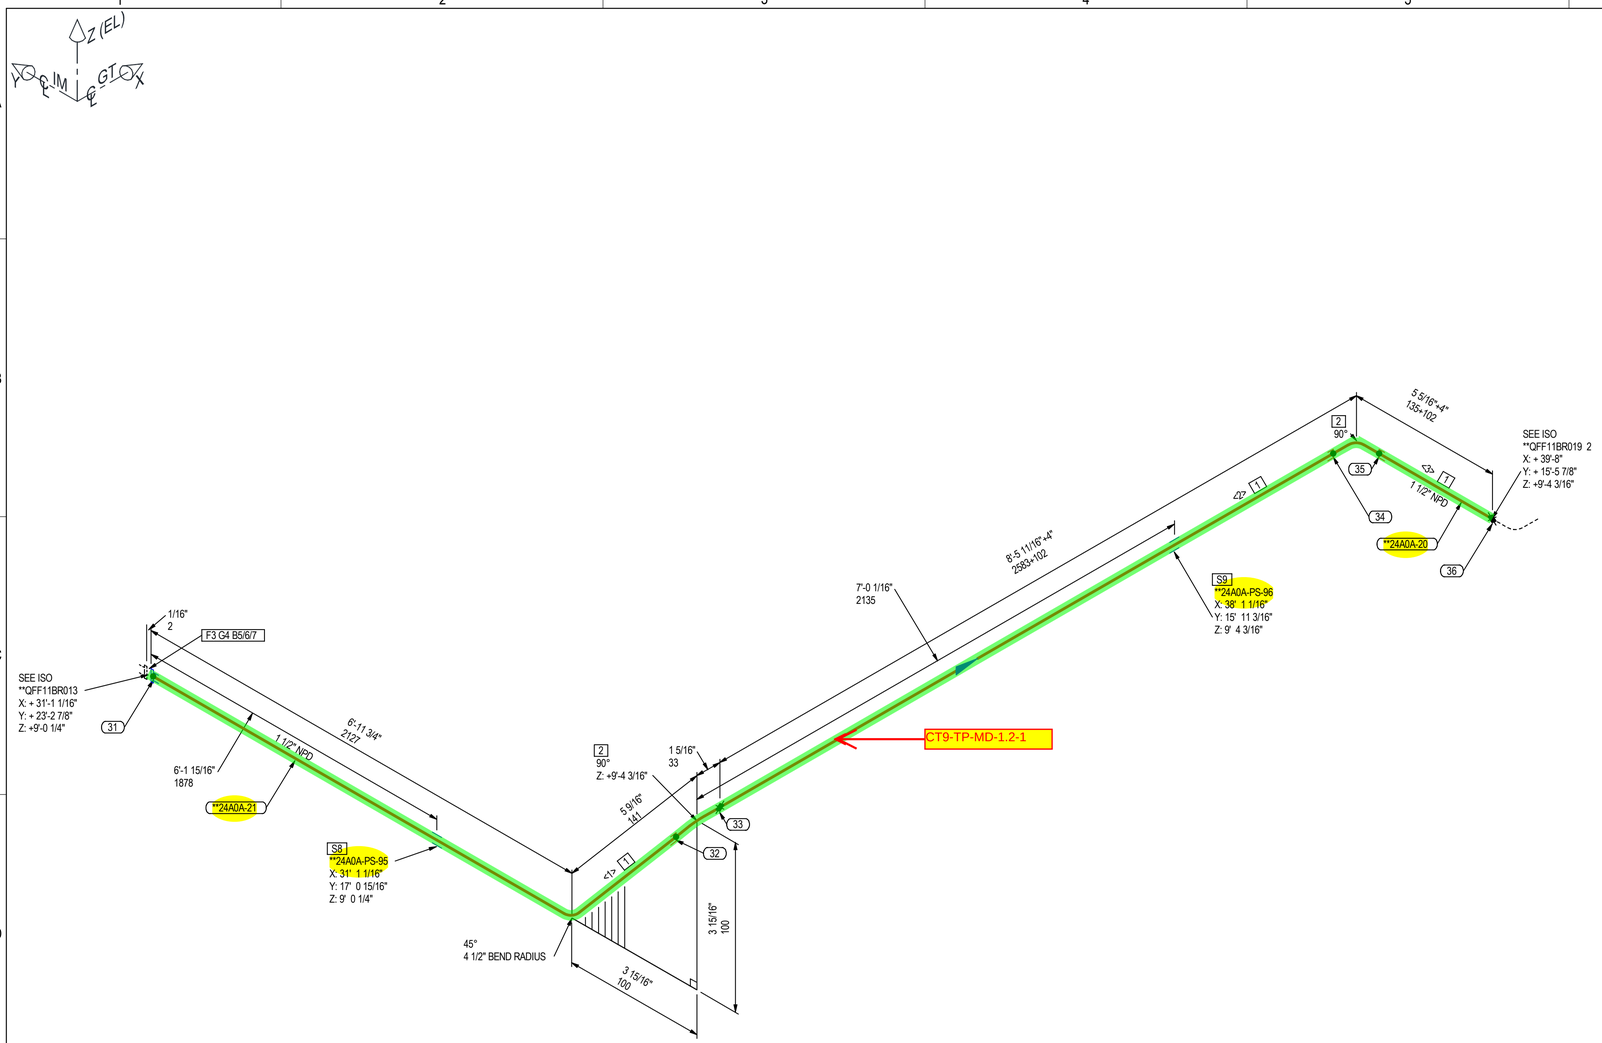

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	16.7'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
8	PIPE SUPPORT	1 1/2	**24A0A-PS-95	1
9	PIPE SUPPORT	1 1/2	**24A0A-PS-96	1
	SPOOLS			
	**24A0A-20, **24A0A-21			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	7'3 1/2"	1 1/2	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	8'8 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
31	SW	S	1 1/2"	1
32	SW	S	1 1/2"	1
33	SW	S	1 1/2"	1
34	SW	S	1 1/2"	1
35	SW	S	1 1/2"	1
36	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580 / 0 / 24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-QFF-BR-AA
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02
			M501JAC GAS TURBINE
PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR019		1 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

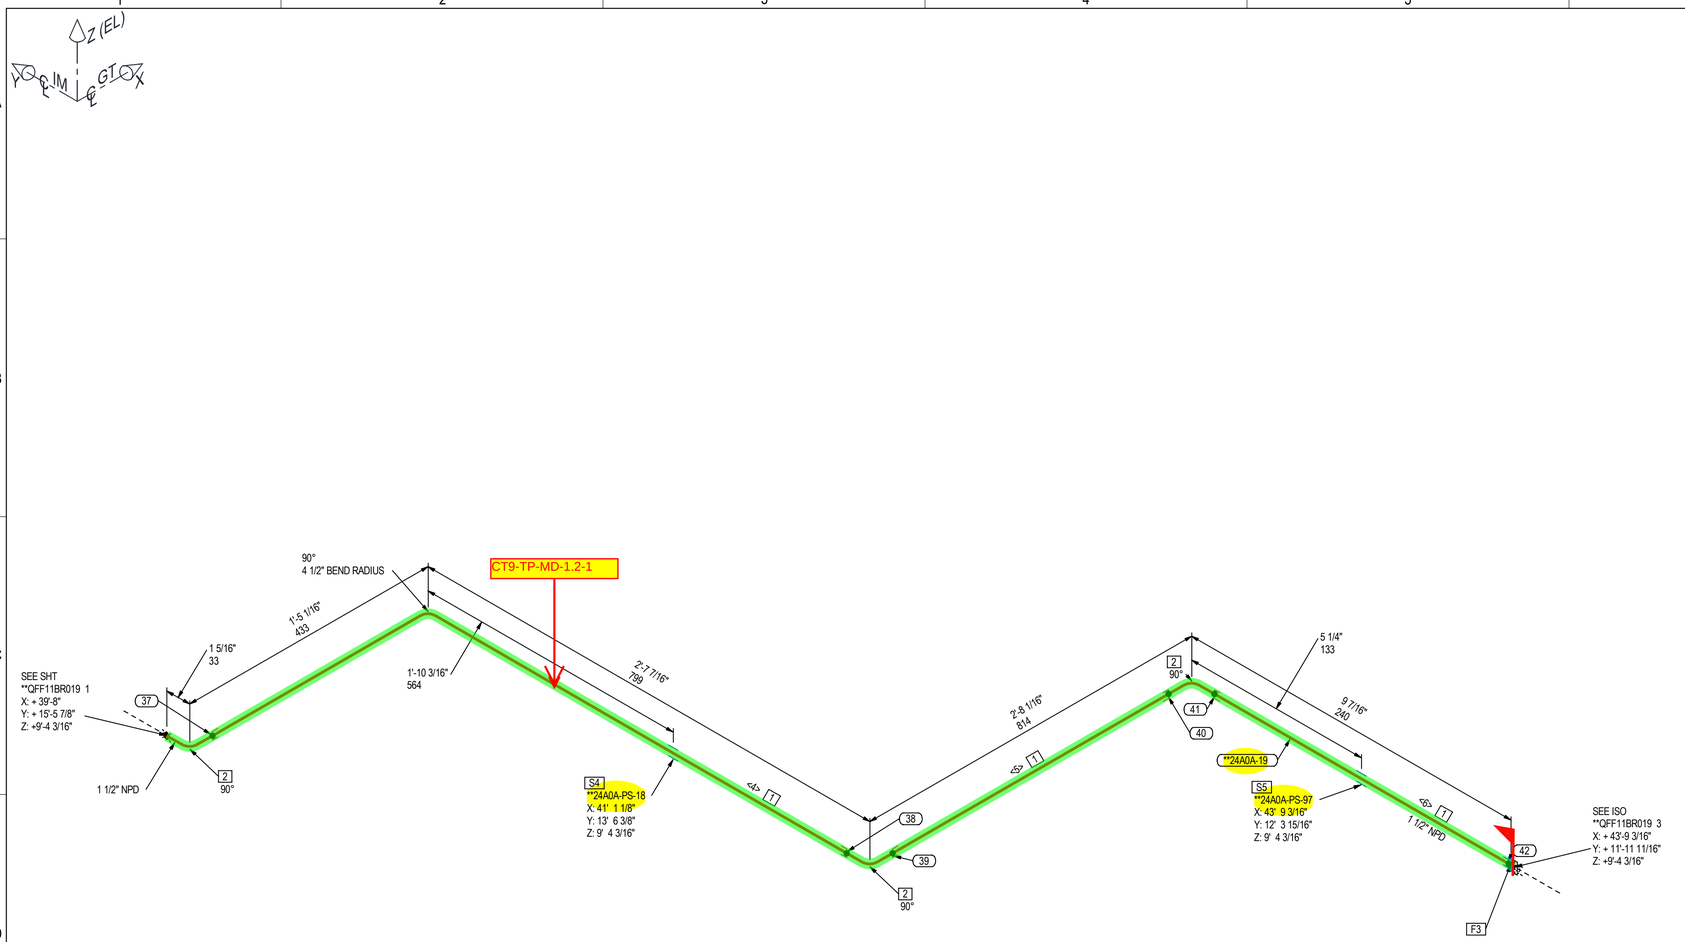

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
37	SW	S	1 1/2"	1
38	SW	S	1 1/2"	1
39	SW	S	1 1/2"	1
40	SW	S	1 1/2"	1
41	SW	S	1 1/2"	1
42	SW	S	1 1/2"	1

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	6.8'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
4	PIPE SUPPORT	1 1/2	**24A0A-PS-18	1
5	PIPE SUPPORT	1 1/2	**24A0A-PS-97	1
	SPOOLS			
	**24A0A-19			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<4>	3'7 15/16"	1 1/2	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	2'5 7/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	7 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	150.00 psig / 1.03 MPag		
TEST PRESS.:	225.00 psig / 1.55 MPag		
MAX. TEMP:	140 F / 60 C		
INSULATION SPEC:	NOT INSULATED		

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR019	2 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

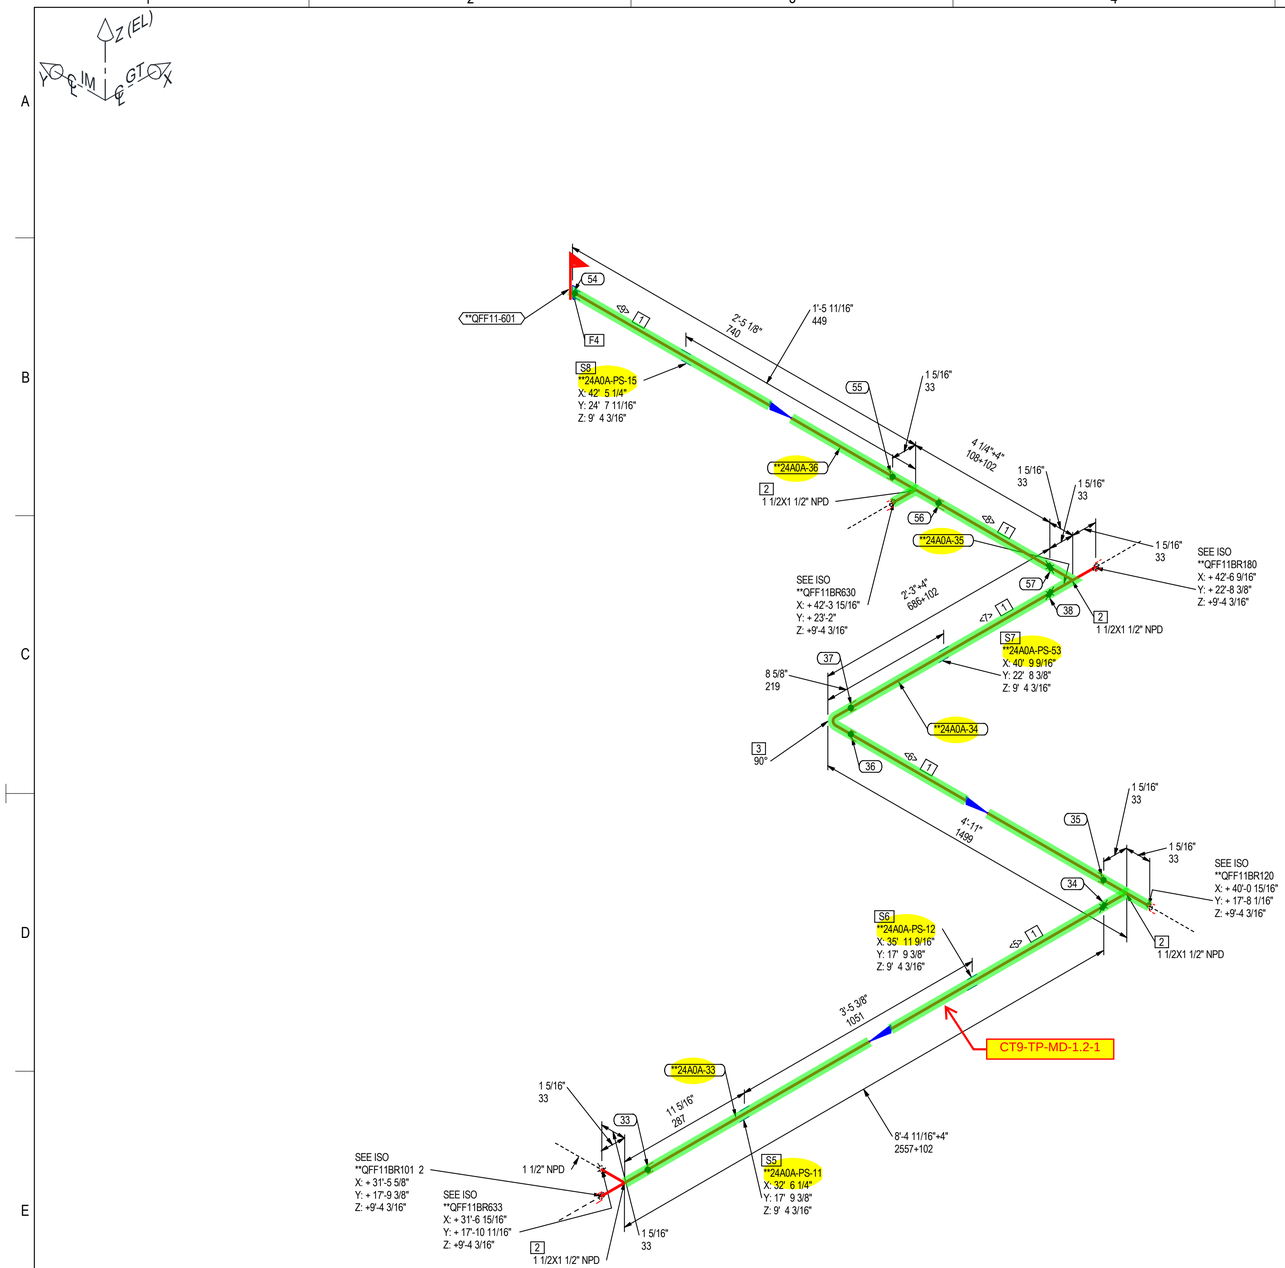

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	18.7'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	4
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	1
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
5	PIPE SUPPORT	1 1/2	**24A0A-PS-11	1
6	PIPE SUPPORT	1 1/2	**24A0A-PS-12	1
7	PIPE SUPPORT	1 1/2	**24A0A-PS-53	1
8	PIPE SUPPORT	1 1/2	**24A0A-PS-15	1
	SPOOLS			
	**24A0A-33, **24A0A-34, **24A0A-35, **24A0A-36			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	8'7 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	4'8 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	2'5 11/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	6 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	2'3 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
33	SW	S	1 1/2"	1
34	SW	S	1 1/2"	1
35	SW	S	1 1/2"	1
36	SW	S	1 1/2"	1
37	SW	S	1 1/2"	1
38	SW	S	1 1/2"	1
57	SW	S	1 1/2"	1
56	SW	S	1 1/2"	1
55	SW	S	1 1/2"	1
54	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR101	1 OF 2	

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

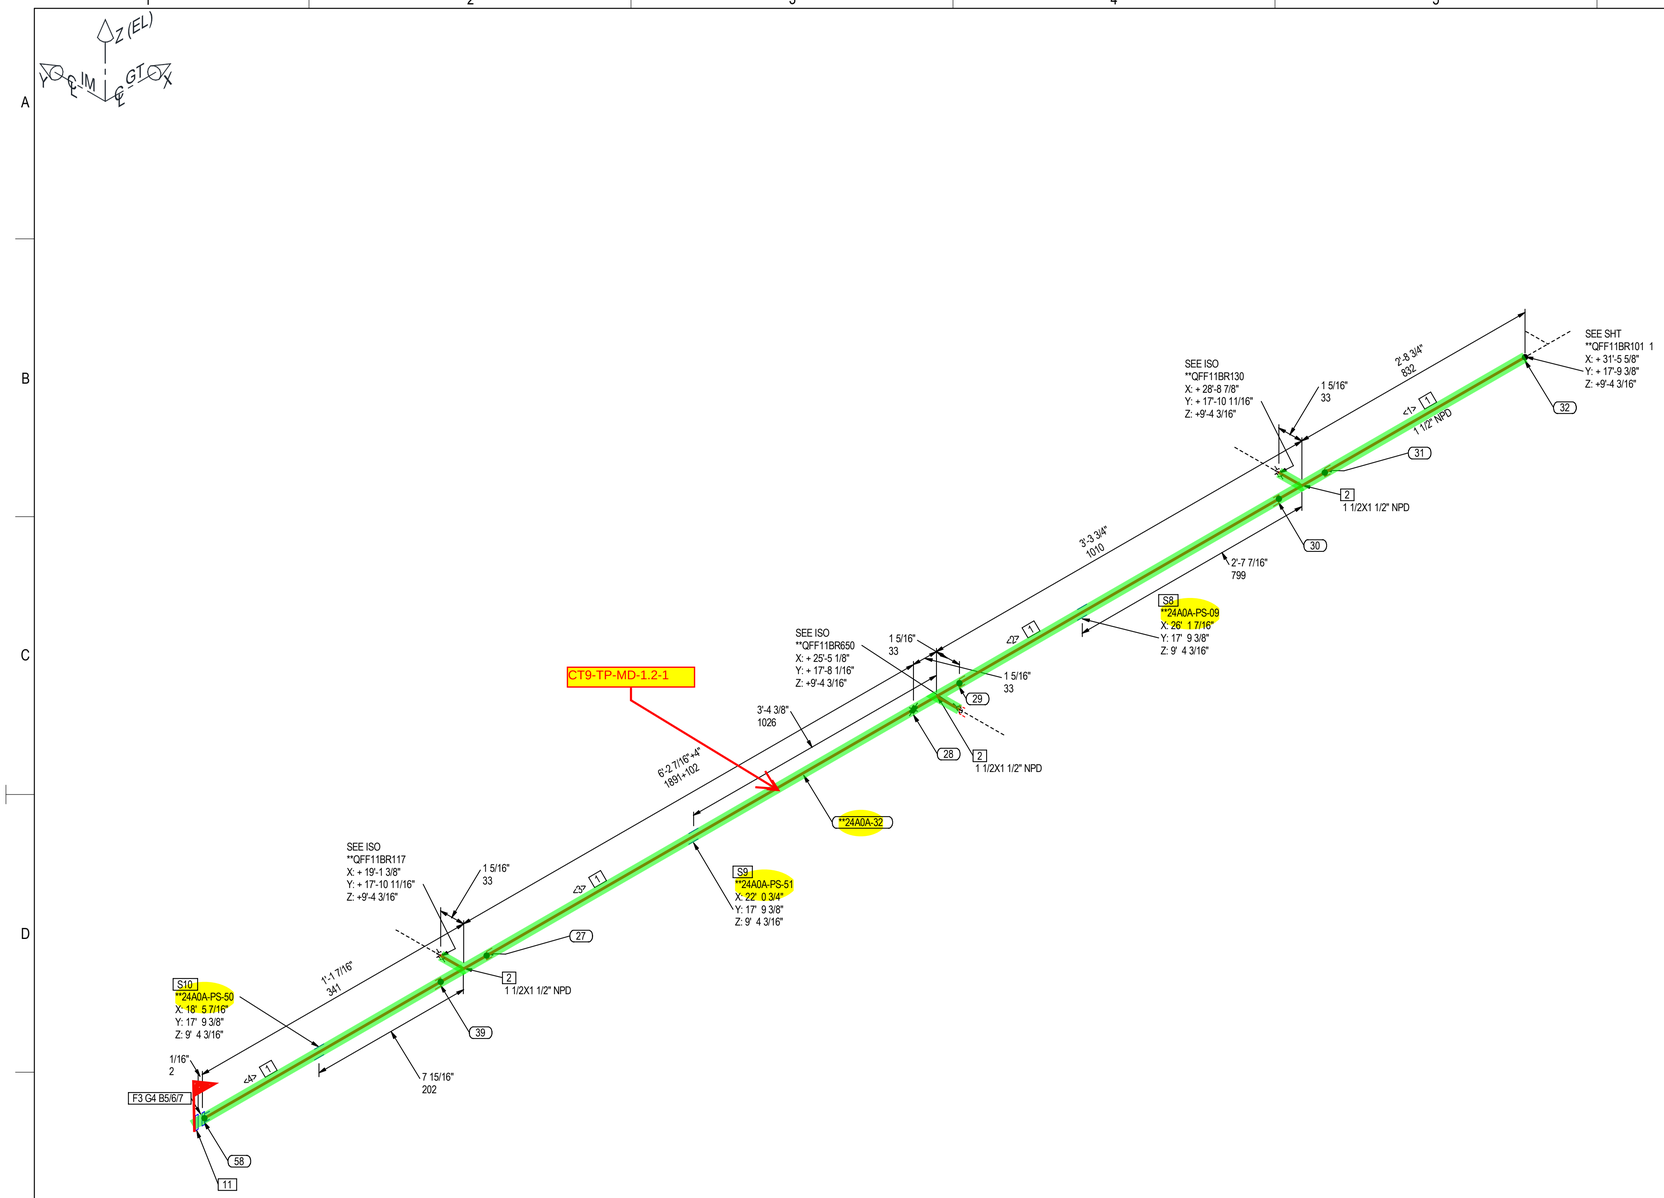

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	13.2'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
8	PIPE SUPPORT	1 1/2	**24A0A-PS-09	1
9	PIPE SUPPORT	1 1/2	**24A0A-PS-51	1
10	PIPE SUPPORT	1 1/2	**24A0A-PS-50	1

SHOP LOOSE SHIPPED MATERIALS - ERECTION AND FABRICATION

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
11	BLIND FLANGE, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MMAAAHABZZAADALO	1

SPOOLS

**24A0A-32

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	2'7 7/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	3'1 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	6'5 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	11 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX##-###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
32	SW	S	1 1/2"	1
31	SW	S	1 1/2"	1
30	SW	S	1 1/2"	1
29	SW	S	1 1/2"	1
28	SW	S	1 1/2"	1
27	SW	S	1 1/2"	1
39	SW	S	1 1/2"	1
58	SW	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION

INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		

FOR FABRICATION & ERECTION

N05-ISO-QFF-BR-AA

P&ID DRAWING NUMBER: N01-PID-QFF-00-02

M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR101		2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2


MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST



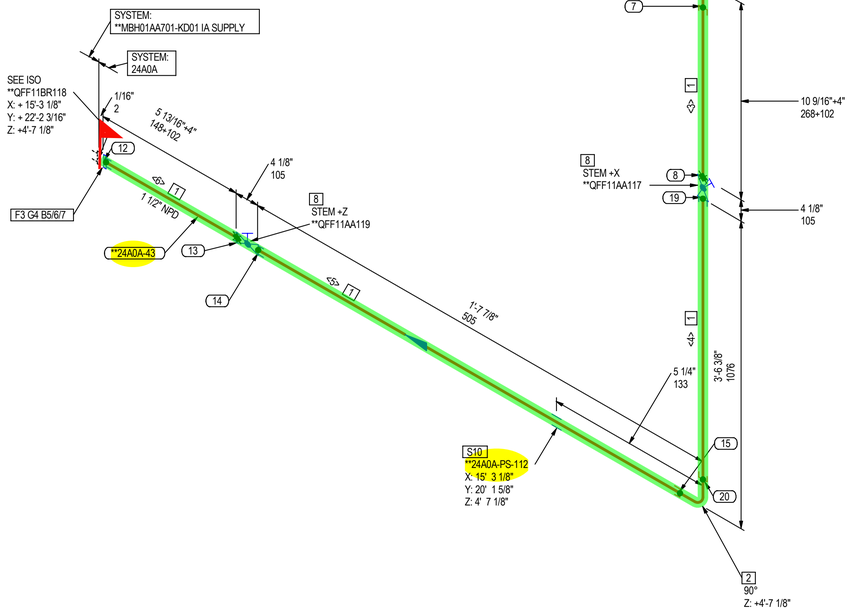

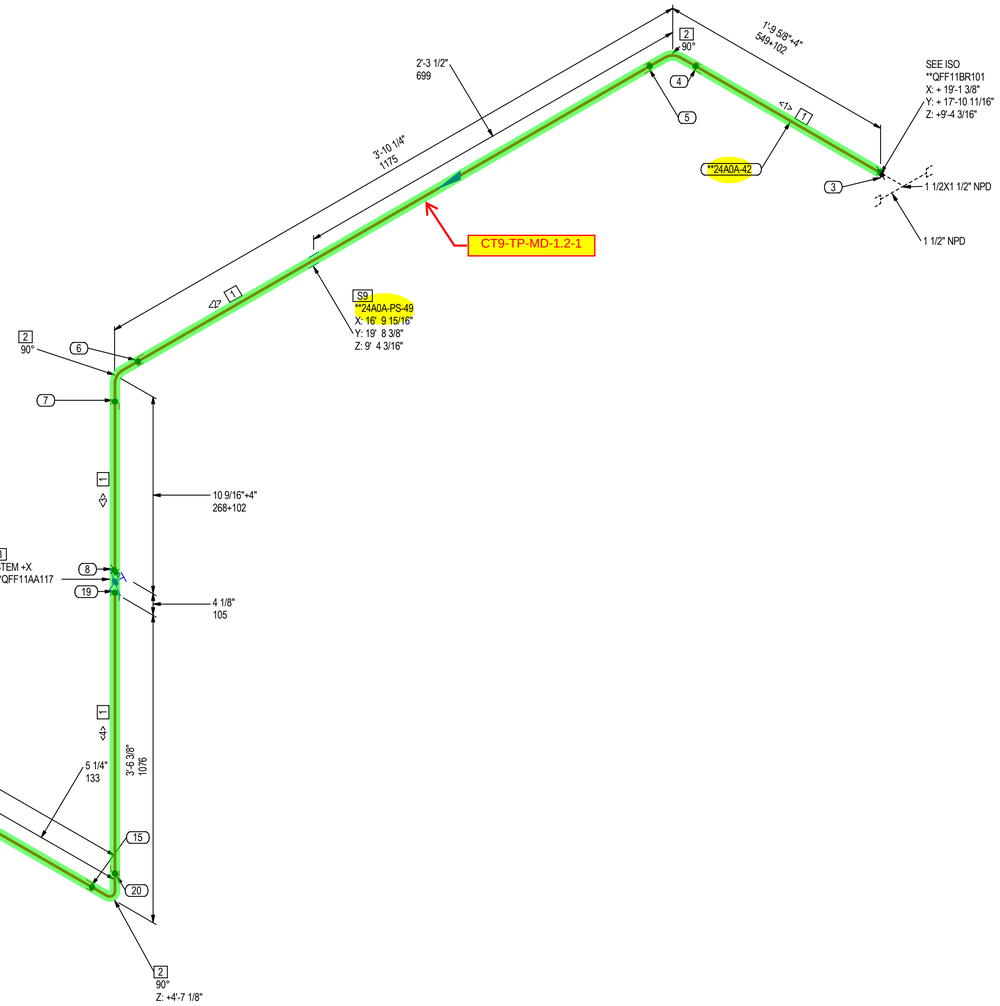

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	12.6'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	2
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-49	1
10	PIPE SUPPORT	1 1/2	**24A0A-PS-112	1

SPOOLS

**24A0A-42, **24A0A-43

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	2'0 5/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	3'7 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	1'1 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	3'5 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	1'6 9/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	9 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX##-### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
3	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1
5	SW	S	1 1/2"	1
6	SW	S	1 1/2"	1
7	SW	S	1 1/2"	1
8	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
20	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580 / 0 / 24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR117		1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

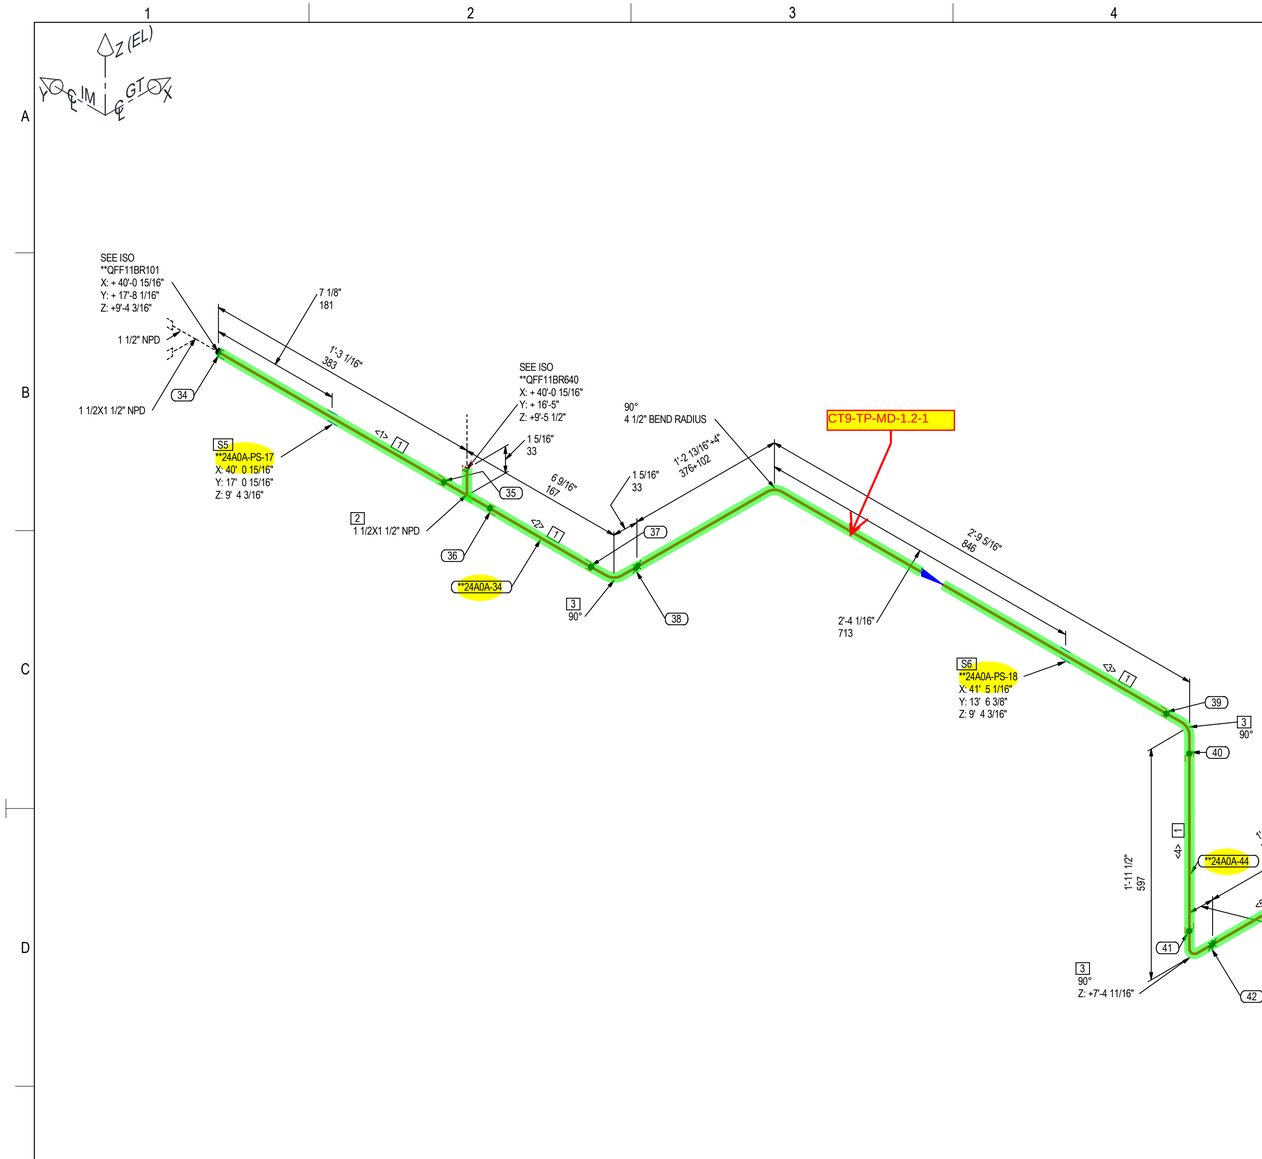

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	10.1'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	1
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	5
4	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
5	PIPE SUPPORT	1 1/2	**24A0A-PS-17	1
6	PIPE SUPPORT	1 1/2	**24A0A-PS-18	1
	SPOOLS			
	**24A0A-34, **24A0A-44, **24A0A-45			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	1'1 3/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	3 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	4'0 7/8"	1 1/2	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	1'8 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	1'3 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	5 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	11 3/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
34	SW	S	1 1/2"	1
35	SW	S	1 1/2"	1
36	SW	S	1 1/2"	1
37	SW	S	1 1/2"	1
38	SW	S	1 1/2"	1
39	SW	S	1 1/2"	1
40	SW	S	1 1/2"	1
41	SW	S	1 1/2"	1
42	SW	S	1 1/2"	1
43	SW	S	1 1/2"	1
44	SW	S	1 1/2"	1
45	SW	S	1 1/2"	1
46	SW	S	1 1/2"	1
47	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR120	1 OF 6	

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

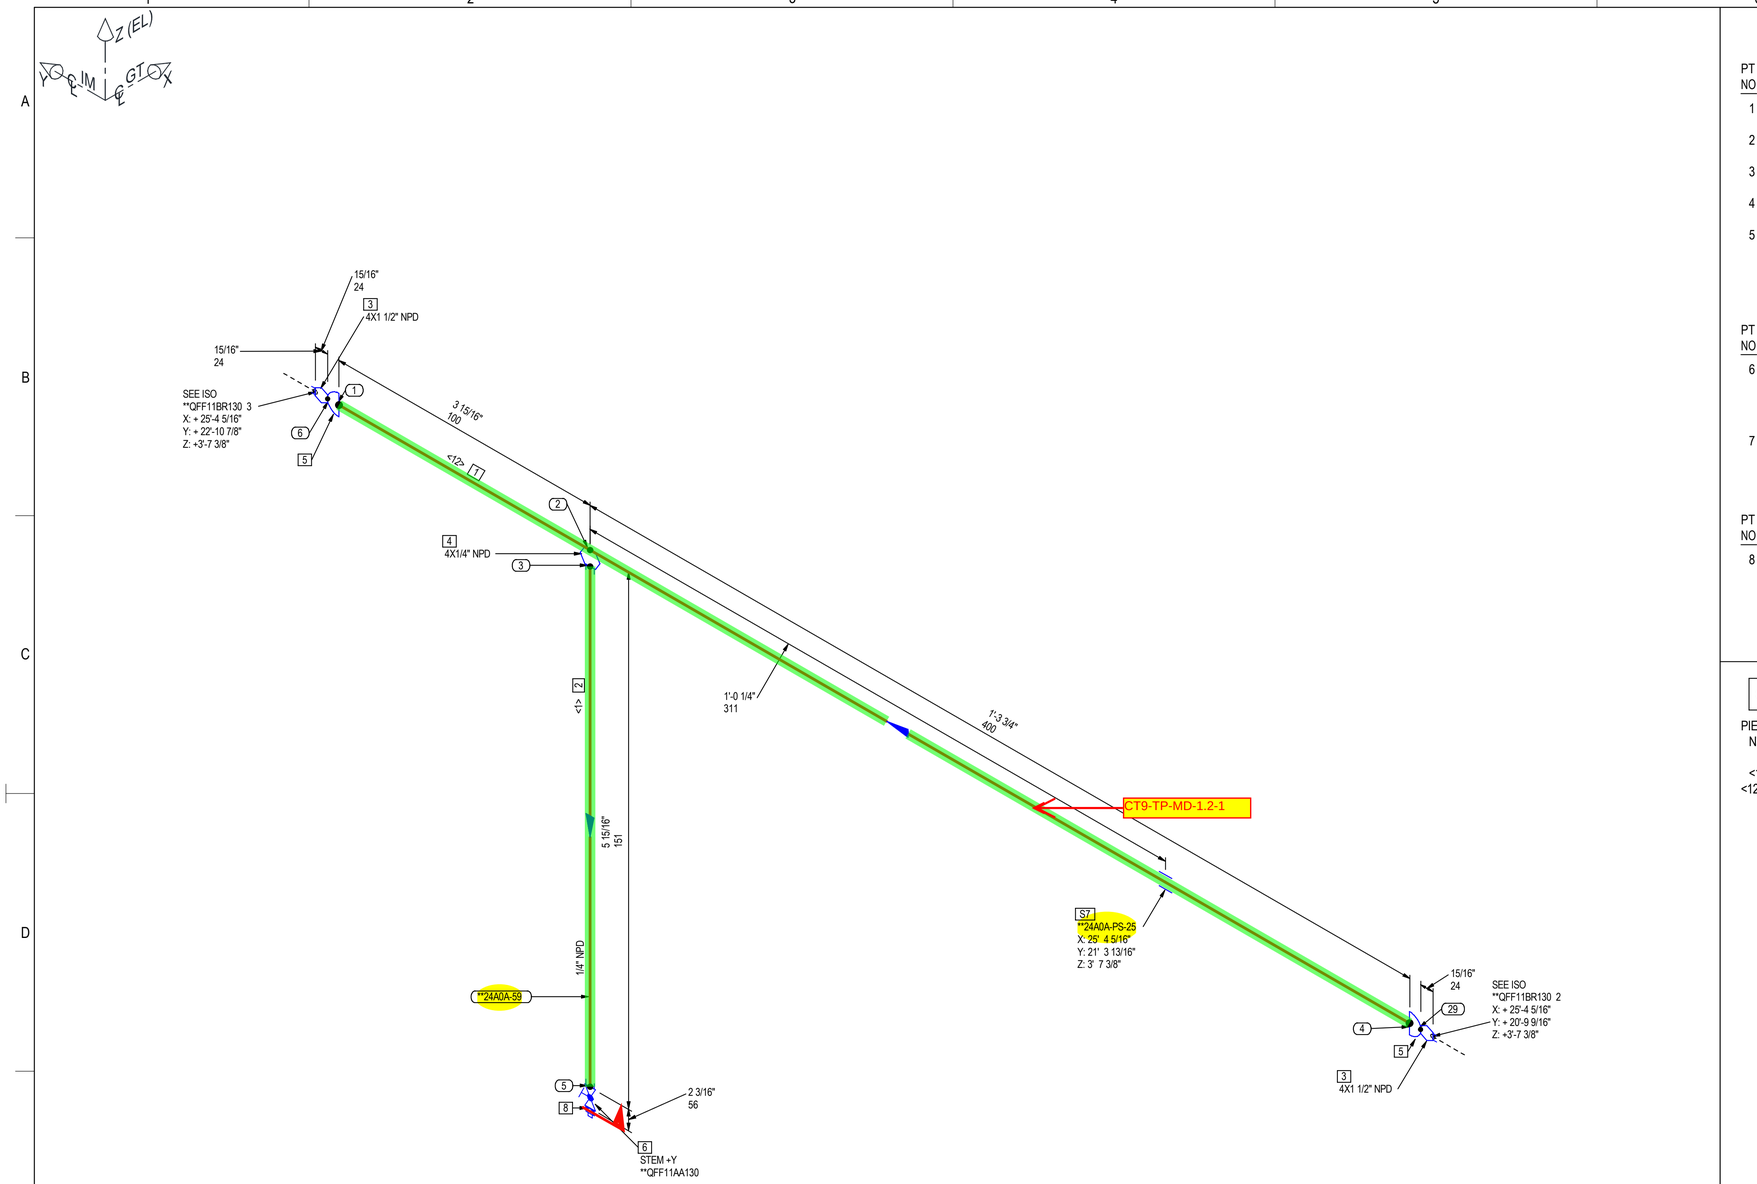

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	4	MPAAZZBOZZABBANI	1.7'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1/4	MPAAZZBPZZABBANI	0.3'
3	FLAT SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	4X1 1/2	MWACAWBVZZGKGALO	2
4	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	4X1/4	MMELAWBVZZGKGALO	1
5	CAP, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	4	MMFJZZBOZZAAEAPI	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
6	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1/4	MVALAQDHZZAATALS	1

PIPE SUPPORTS

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
7	PIPE SUPPORT	4	**24A0A-PS-25	1

SHOP LOOSE SHIPPED MATERIALS - ERECTION AND FABRICATION

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
8	PLUG, CL3000, MTE, ASME B16.11, ASTM A182-F304, HEX HEAD	1/4	MMFIAWBNZZAAGALO	1

SPOOLS

**24A0A-59

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 1/4"	1/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<12>	1'7 11/16"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
5	SW	S	1/4"	1
3	SW	S	1/4"	1
2	LET	S	1/4"	1
4	BW	S	4"	1
29	LET	S	1 1/2"	1
1	BW	S	4"	1
6	LET	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		


FOR FABRICATION & ERECTION
N05-ISO-QFF-BR-AA
P&ID DRAWING NUMBER: N01-PID-QFF-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR130		1 OF 3	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



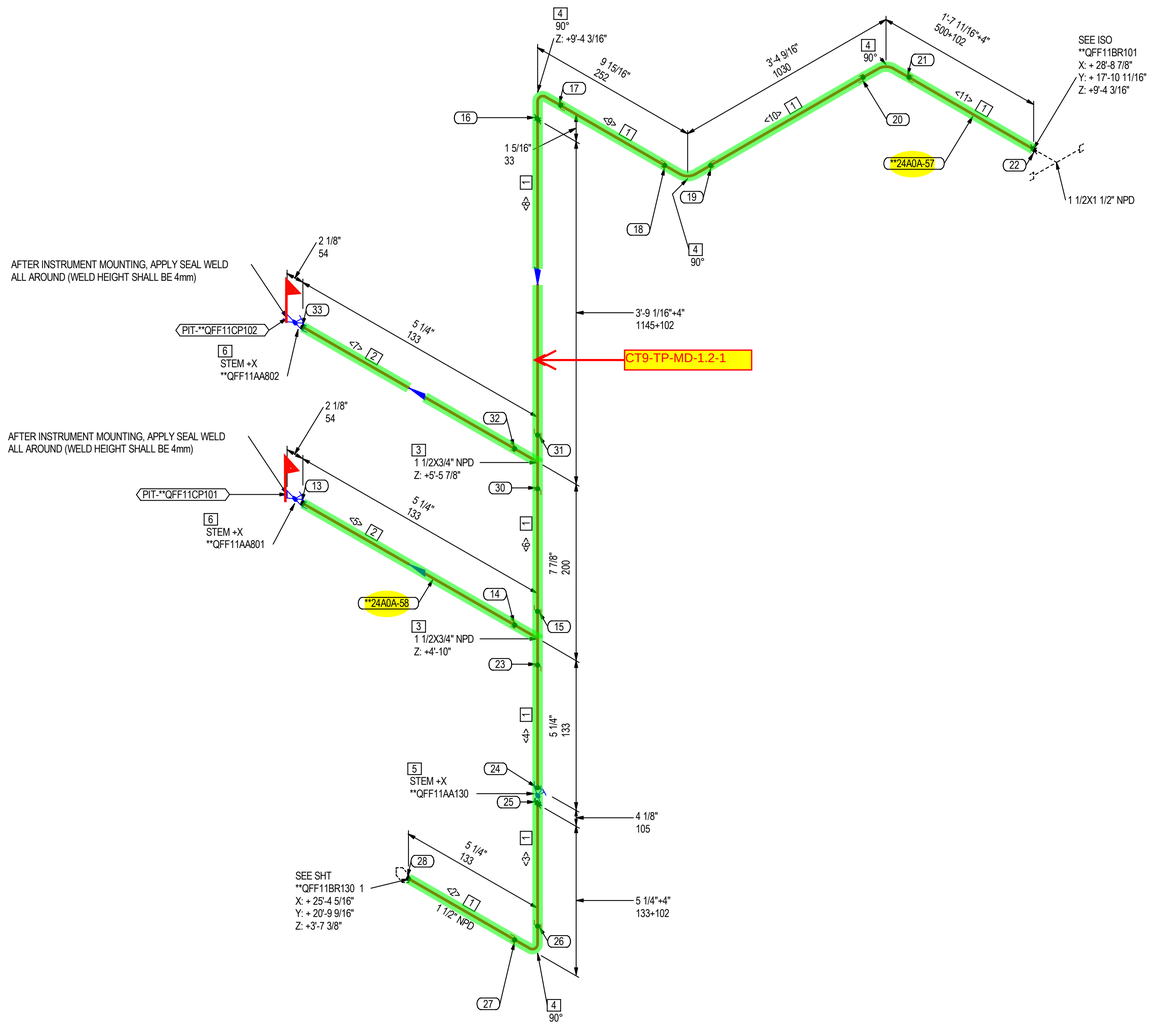

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	11.4'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	3/4	MPAAZZBPZZABBANI	0.7'
3	REDUCING TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X3/4	MMDRAWBVZZAAGALO	2
4	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	4

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1
6	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	3/4	MVALAQDHZZAATALS	2

SPOOLS

**24A0A-57, **24A0A-58

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<2>	3 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	7 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	3 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	3 15/16"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	5 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	3 15/16"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	3'11 3/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	7 5/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	3'1 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	1'10 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
28	SW	S	1 1/2"	1
27	SW	S	1 1/2"	1
26	SW	S	1 1/2"	1
25	SW	S	1 1/2"	1
24	SW	S	1 1/2"	1
23	SW	S	1 1/2"	1
14	SW	S	3/4"	1
13	SW	S	3/4"	1
15	SW	S	1 1/2"	1
30	SW	S	1 1/2"	1
32	SW	S	3/4"	1
33	SW	S	3/4"	1
31	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
17	SW	S	1 1/2"	1
18	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
20	SW	S	1 1/2"	1
21	SW	S	1 1/2"	1
22	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **QFF11BR130	PAGE NUMBER: 2 OF 3	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST



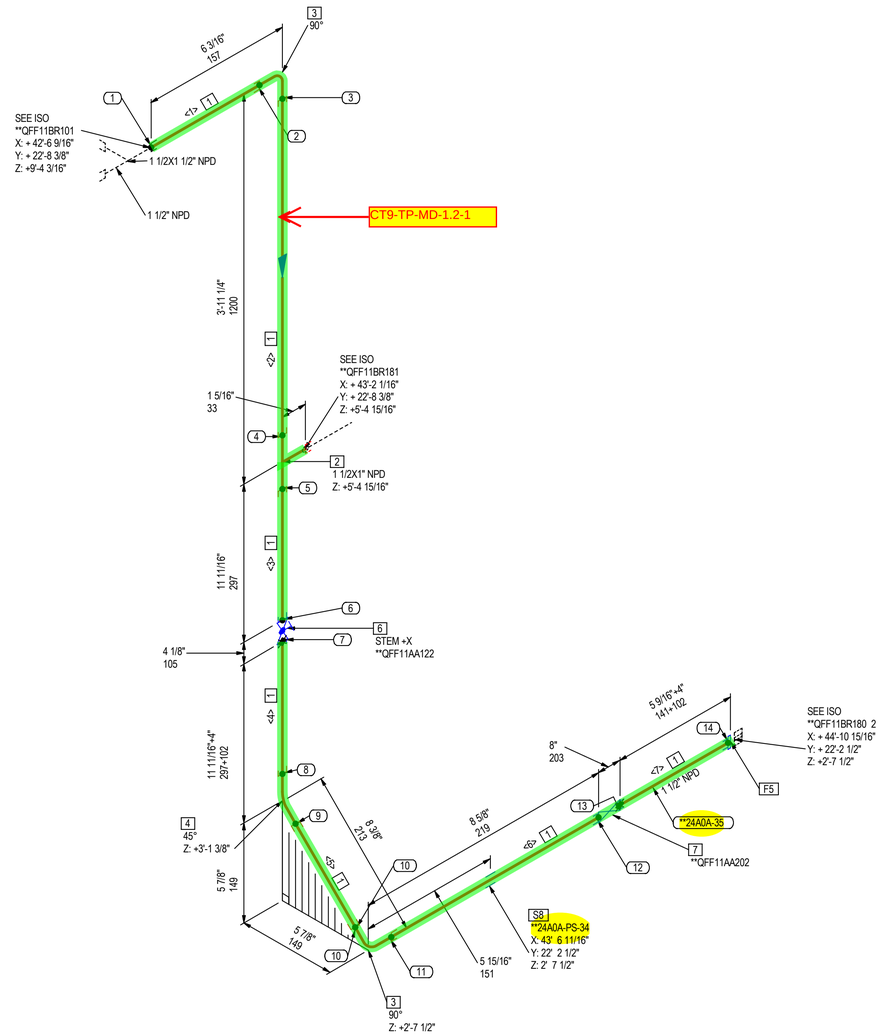

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	8.2'
2	REDUCING TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1	MMDRAWBVZZAAGALO	1
3	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	2
4	45 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMBWAWBVZZAAGALO	1
5	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
6	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1
7	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316, MODIFIED NEEDLE DISC	1 1/2	**QFF11AA202	1
	PIPE SUPPORTS			
8	PIPE SUPPORT	1 1/2	**24A0A-PS-34	1
	SPOOLS			
	**24A0A-35			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	4 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	3'8 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	10 3/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	1'2 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	6 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	7 5/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	9 1/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1 1/2"	1
2	SW	S	1 1/2"	1
3	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1
5	SW	S	1 1/2"	1
6	SW	S	1 1/2"	1
7	SW	S	1 1/2"	1
8	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD						
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **QFF11BR180	PAGE NUMBER: 1 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



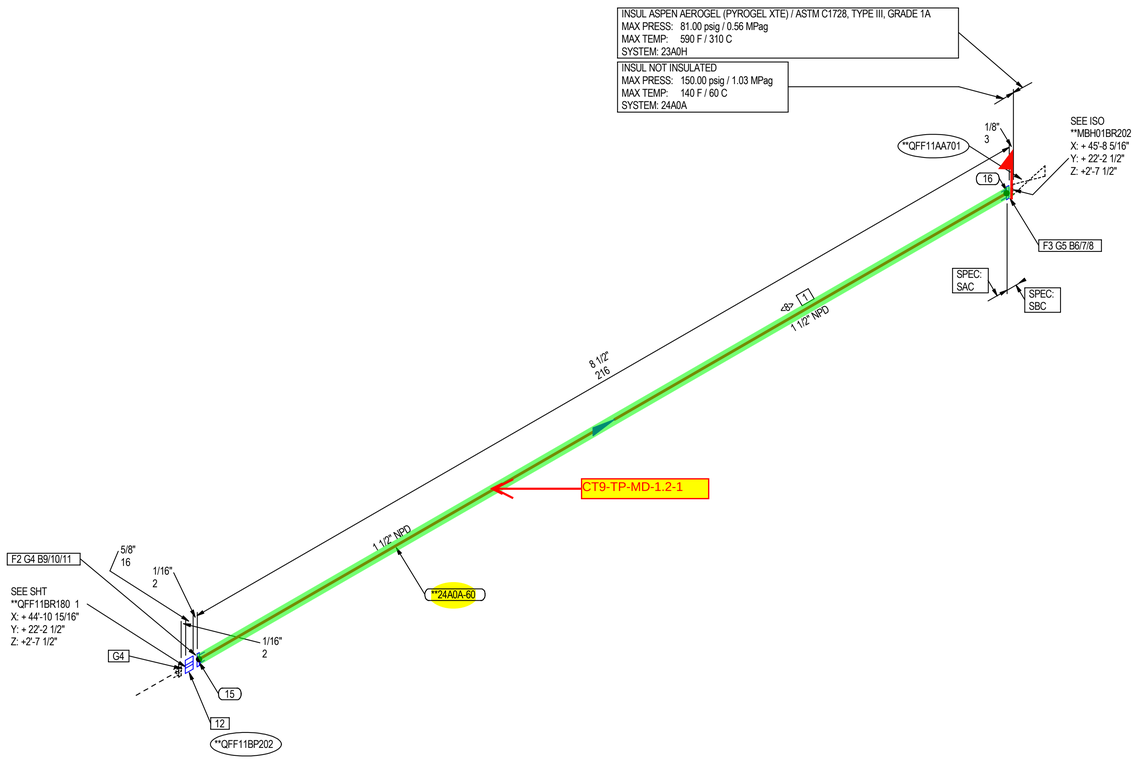

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	0.7'
2	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1
3	FLANGE SW, CL300, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAMABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	2
5	GASKET, SPIRAL WOUND, CL300, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	1 1/2	MDAMAXAAKXAJUS	1
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 10-UNC - 4.5 in. Length	3/4	MBAZZAEZZIAGBLJZ	4
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 10-UNC	3/4	MNOZZAEAAZPCJACU	8
8	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 1.2mm THK, MHPSA G1-90943, ASTM A240-304	3/4	MWQZZZZBXIBCAMDP	8
9	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 4 in. Length	1/2	MBAZZACZZIAGBLJZ	4
10	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
11	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8

INSTRUMENTS

12	ORIFICE PLATE, CL150, A240 Gr.304, **QFF11BP202	1 1/2		1

SPOOLS

**24A0A-60

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<8>	7 9/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
15	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		

FOR FABRICATION & ERECTION

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

N05-ISO-QFF-BR-AA

P&ID DRAWING NUMBER: N01-PID-QFF-00-02

M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**QFF11BR180		2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

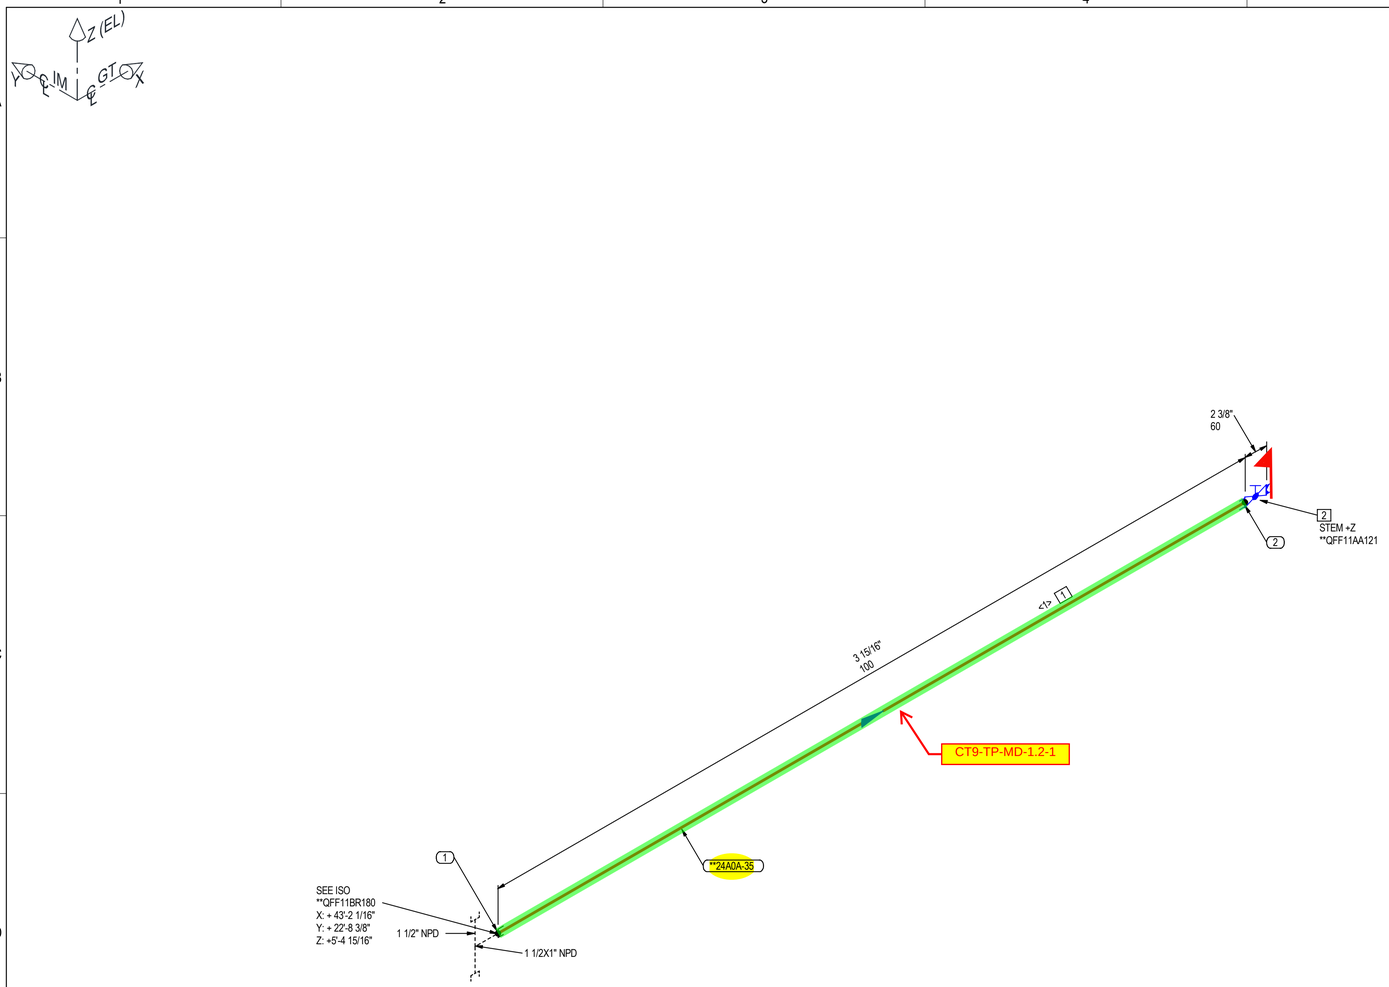

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	0.4'

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
2	GLOBE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	1	MVALAQDHZZAATALS	1

SPOOLS

**24A0A-35

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 15/16"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX##-###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **QFF11BR181	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2


MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST



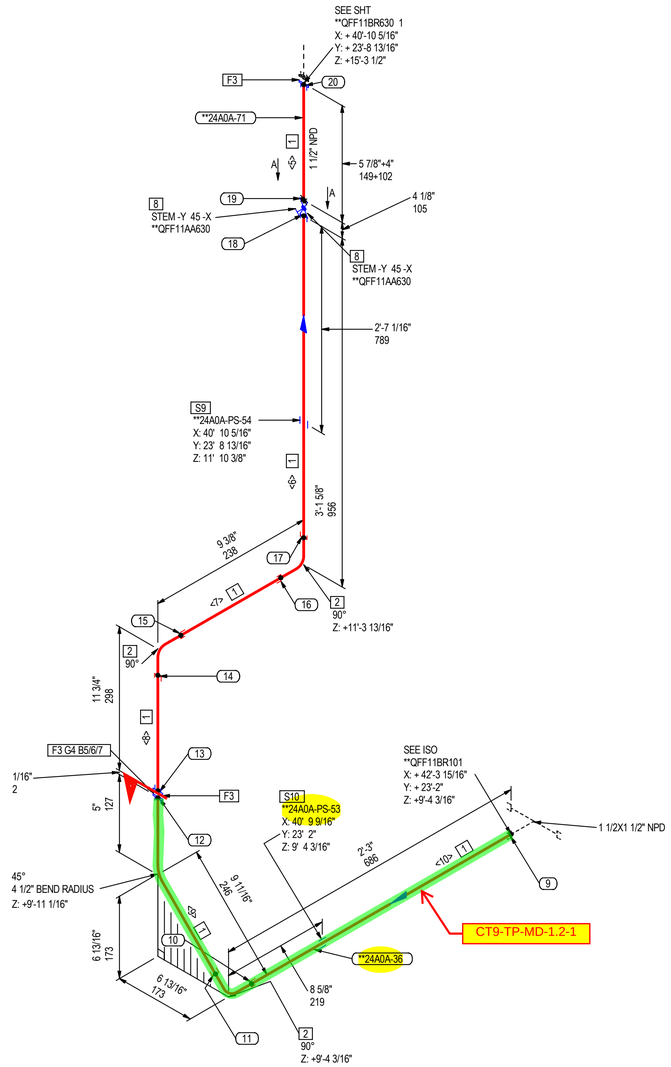

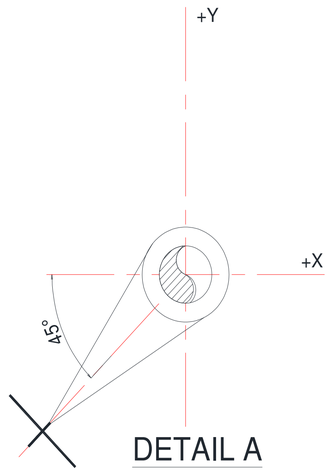

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	8.5'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-54	1
10	PIPE SUPPORT	1 1/2	**24A0A-PS-53	1
	SPOOLS			
	**24A0A-36, **24A0A-71			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	9 5/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	3'0 5/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	6 3/4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	10 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	1'0 13/16"	1 1/2	PLD BEND(1)	SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	2'1 11/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
20	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
18	SW	S	1 1/2"	1
17	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✱ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	**N05-003580**	**0**	**24A0A**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**INSTRUMENT AIR PIPING**		
APPROVED BY:	U. KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **QFF11BR630	PAGE NUMBER: 2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



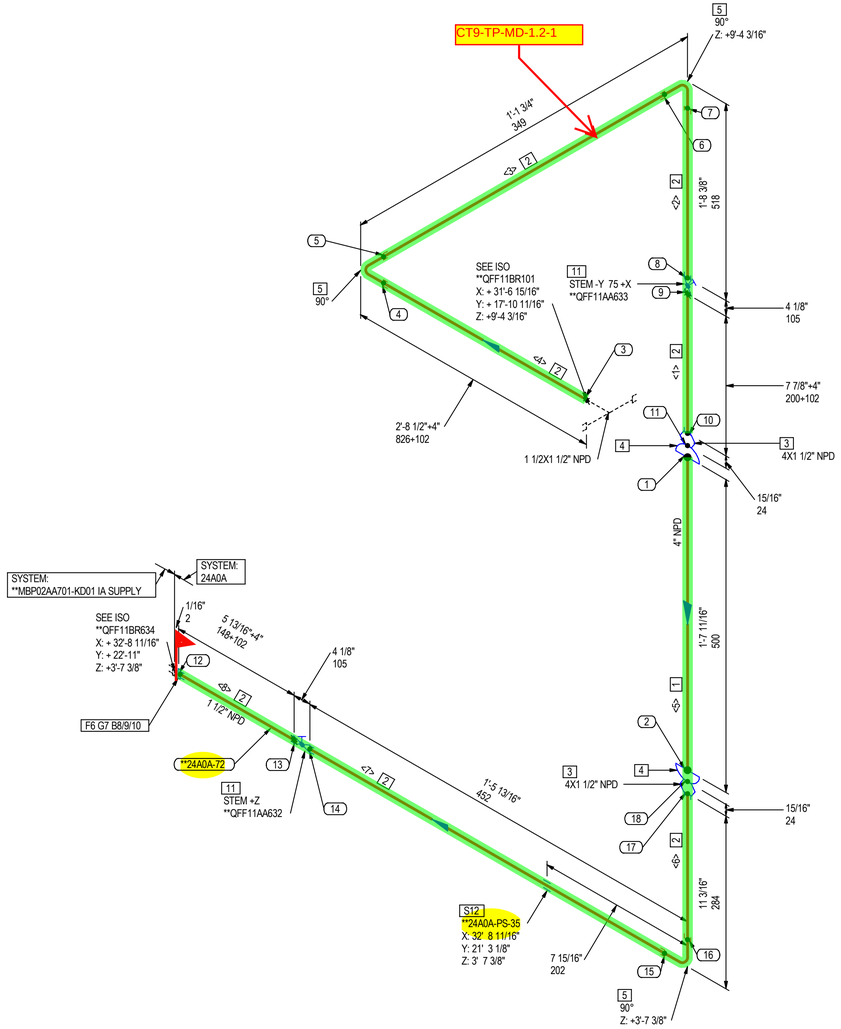

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	4	MPAAZZBOZZABBANI	1.7'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	9.5'
3	FLAT SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	4X1 1/2	MWACAWBVZZGKGALO	2
4	CAP, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	4	MMFJZZBOZZAAEAPI	2
5	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
6	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
7	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
8	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
9	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
10	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
11	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	2
	PIPE SUPPORTS			
12	PIPE SUPPORT	1 1/2	**24A0A-PS-35	1
	SPOOLS			
	**24A0A-72			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	11 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	1'7 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	11 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<4>	2'11 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	1'7 11/16"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<6>	9 7/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	1'4 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	9 1/2"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
11	LET	S	1 1/2"	1
10	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1
8	SW	S	1 1/2"	1
7	SW	S	1 1/2"	1
6	SW	S	1 1/2"	1
5	SW	S	1 1/2"	1
4	SW	S	1 1/2"	1
3	SW	S	1 1/2"	1
1	BW	S	4"	1
2	BW	S	4"	1
18	LET	S	1 1/2"	1
17	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✕ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580 / 0 / 24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02
			M501JAC GAS TURBINE
			PROJECT CODE: - / P&ID: -
			PIPELINE: **QFF11BR633 / PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING / PLANT ENGINEERING
DEPARTMENT: / SECTION:
DRAWING DISTRIBUTION LIST



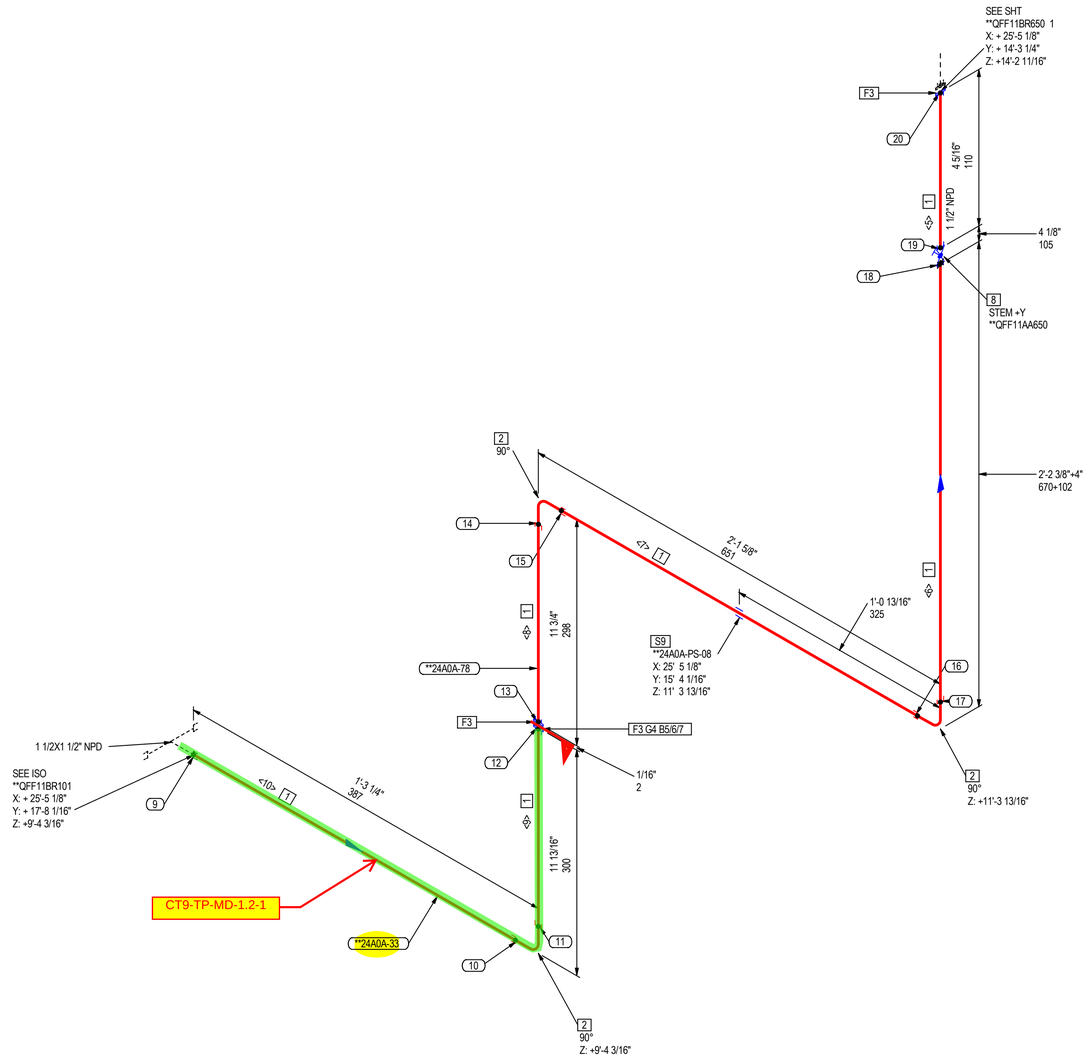

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	7.6'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2	MMCKAWBVZZAAGALO	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	1
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	4
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
8	GLOBE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	1 1/2	MVALAQBVZZAATALS	1
	PIPE SUPPORTS			
9	PIPE SUPPORT	1 1/2	**24A0A-PS-08	1
	SPOOLS			
	**24A0A-33, **24A0A-78			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	4"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<6>	2'5 1/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<7>	1'11"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<8>	10 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	1'1 15/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
20	SW	S	1 1/2"	1
19	SW	S	1 1/2"	1
18	SW	S	1 1/2"	1
17	SW	S	1 1/2"	1
16	SW	S	1 1/2"	1
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
11	SW	S	1 1/2"	1
10	SW	S	1 1/2"	1
9	SW	S	1 1/2"	1

PIPING SPEC:	SAC
FLUID CODE:	IA, INSTRUMENT AIR
MAX. PRESS.:	150.00 psig / 1.03 MPag
TEST PRESS.:	225.00 psig / 1.55 MPag
MAX. TEMP:	140 F / 60 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD


SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER


SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
PROJECT CODE:	-	P&ID:	-		
PIPELINE:		PAGE NUMBER:			
**QFF11BR650		2 OF 2			



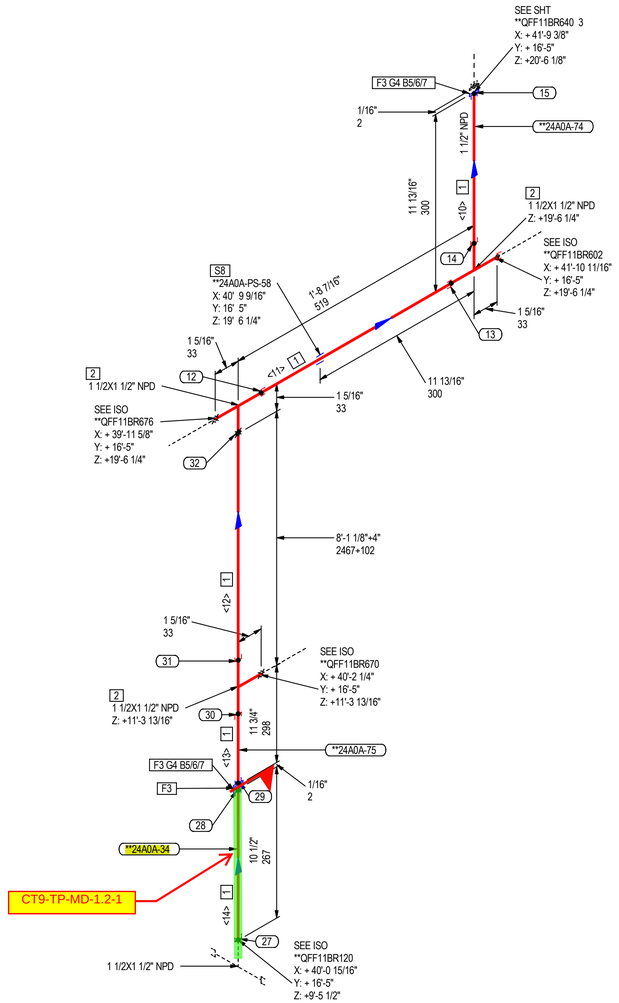

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1 1/2	MPAAZZBPZZABBANI	12.4'
2	TEE, CL3000, SWE, ASME B16.11, ASTM A182-F304	1 1/2X1 1/2	MMDJAWBVZZAAGALO	3
3	FLANGE SW, CL150, RFFE, ASME B16.5, ASTM A182-F304	1 1/2	MFABAHABZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	1 1/2	MITAHAAAALBMNUS	2
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3.5 in. Length	1/2	MBAZZACZZIAGBLJZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	16
7	WASHER, SPECIAL SHAPED LOCK, 1.5in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	16
	PIPE SUPPORTS			
8	PIPE SUPPORT	1 1/2	**24A0A-PS-58	1
	SPOOLS			
	**24A0A-34, **24A0A-74, **24A0A-75			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<10>	10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	1'5 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<12>	8'3 13/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<13>	10 1/8"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<14>	10 3/16"	1 1/2		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
15	SW	S	1 1/2"	1
14	SW	S	1 1/2"	1
13	SW	S	1 1/2"	1
12	SW	S	1 1/2"	1
32	SW	S	1 1/2"	1
31	SW	S	1 1/2"	1
30	SW	S	1 1/2"	1
29	SW	S	1 1/2"	1
28	SW	S	1 1/2"	1
27	SW	S	1 1/2"	1

PIPING SPEC:	SAC	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	IA, INSTRUMENT AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	150.00 psig / 1.03 MPag							
TEST PRESS.:	225.00 psig / 1.55 MPag							
MAX. TEMP:	140 F / 60 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
✕ FW - FIELD WELD
✱ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	D. DURAPAU	10/22/2025	N05-003580	0	24A0A
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	INSTRUMENT AIR PIPING		
APPROVED BY:	U. KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-QFF-BR-AA		
			P&ID DRAWING NUMBER: N01-PID-QFF-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QFF11BR640	4 OF 4	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING


DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

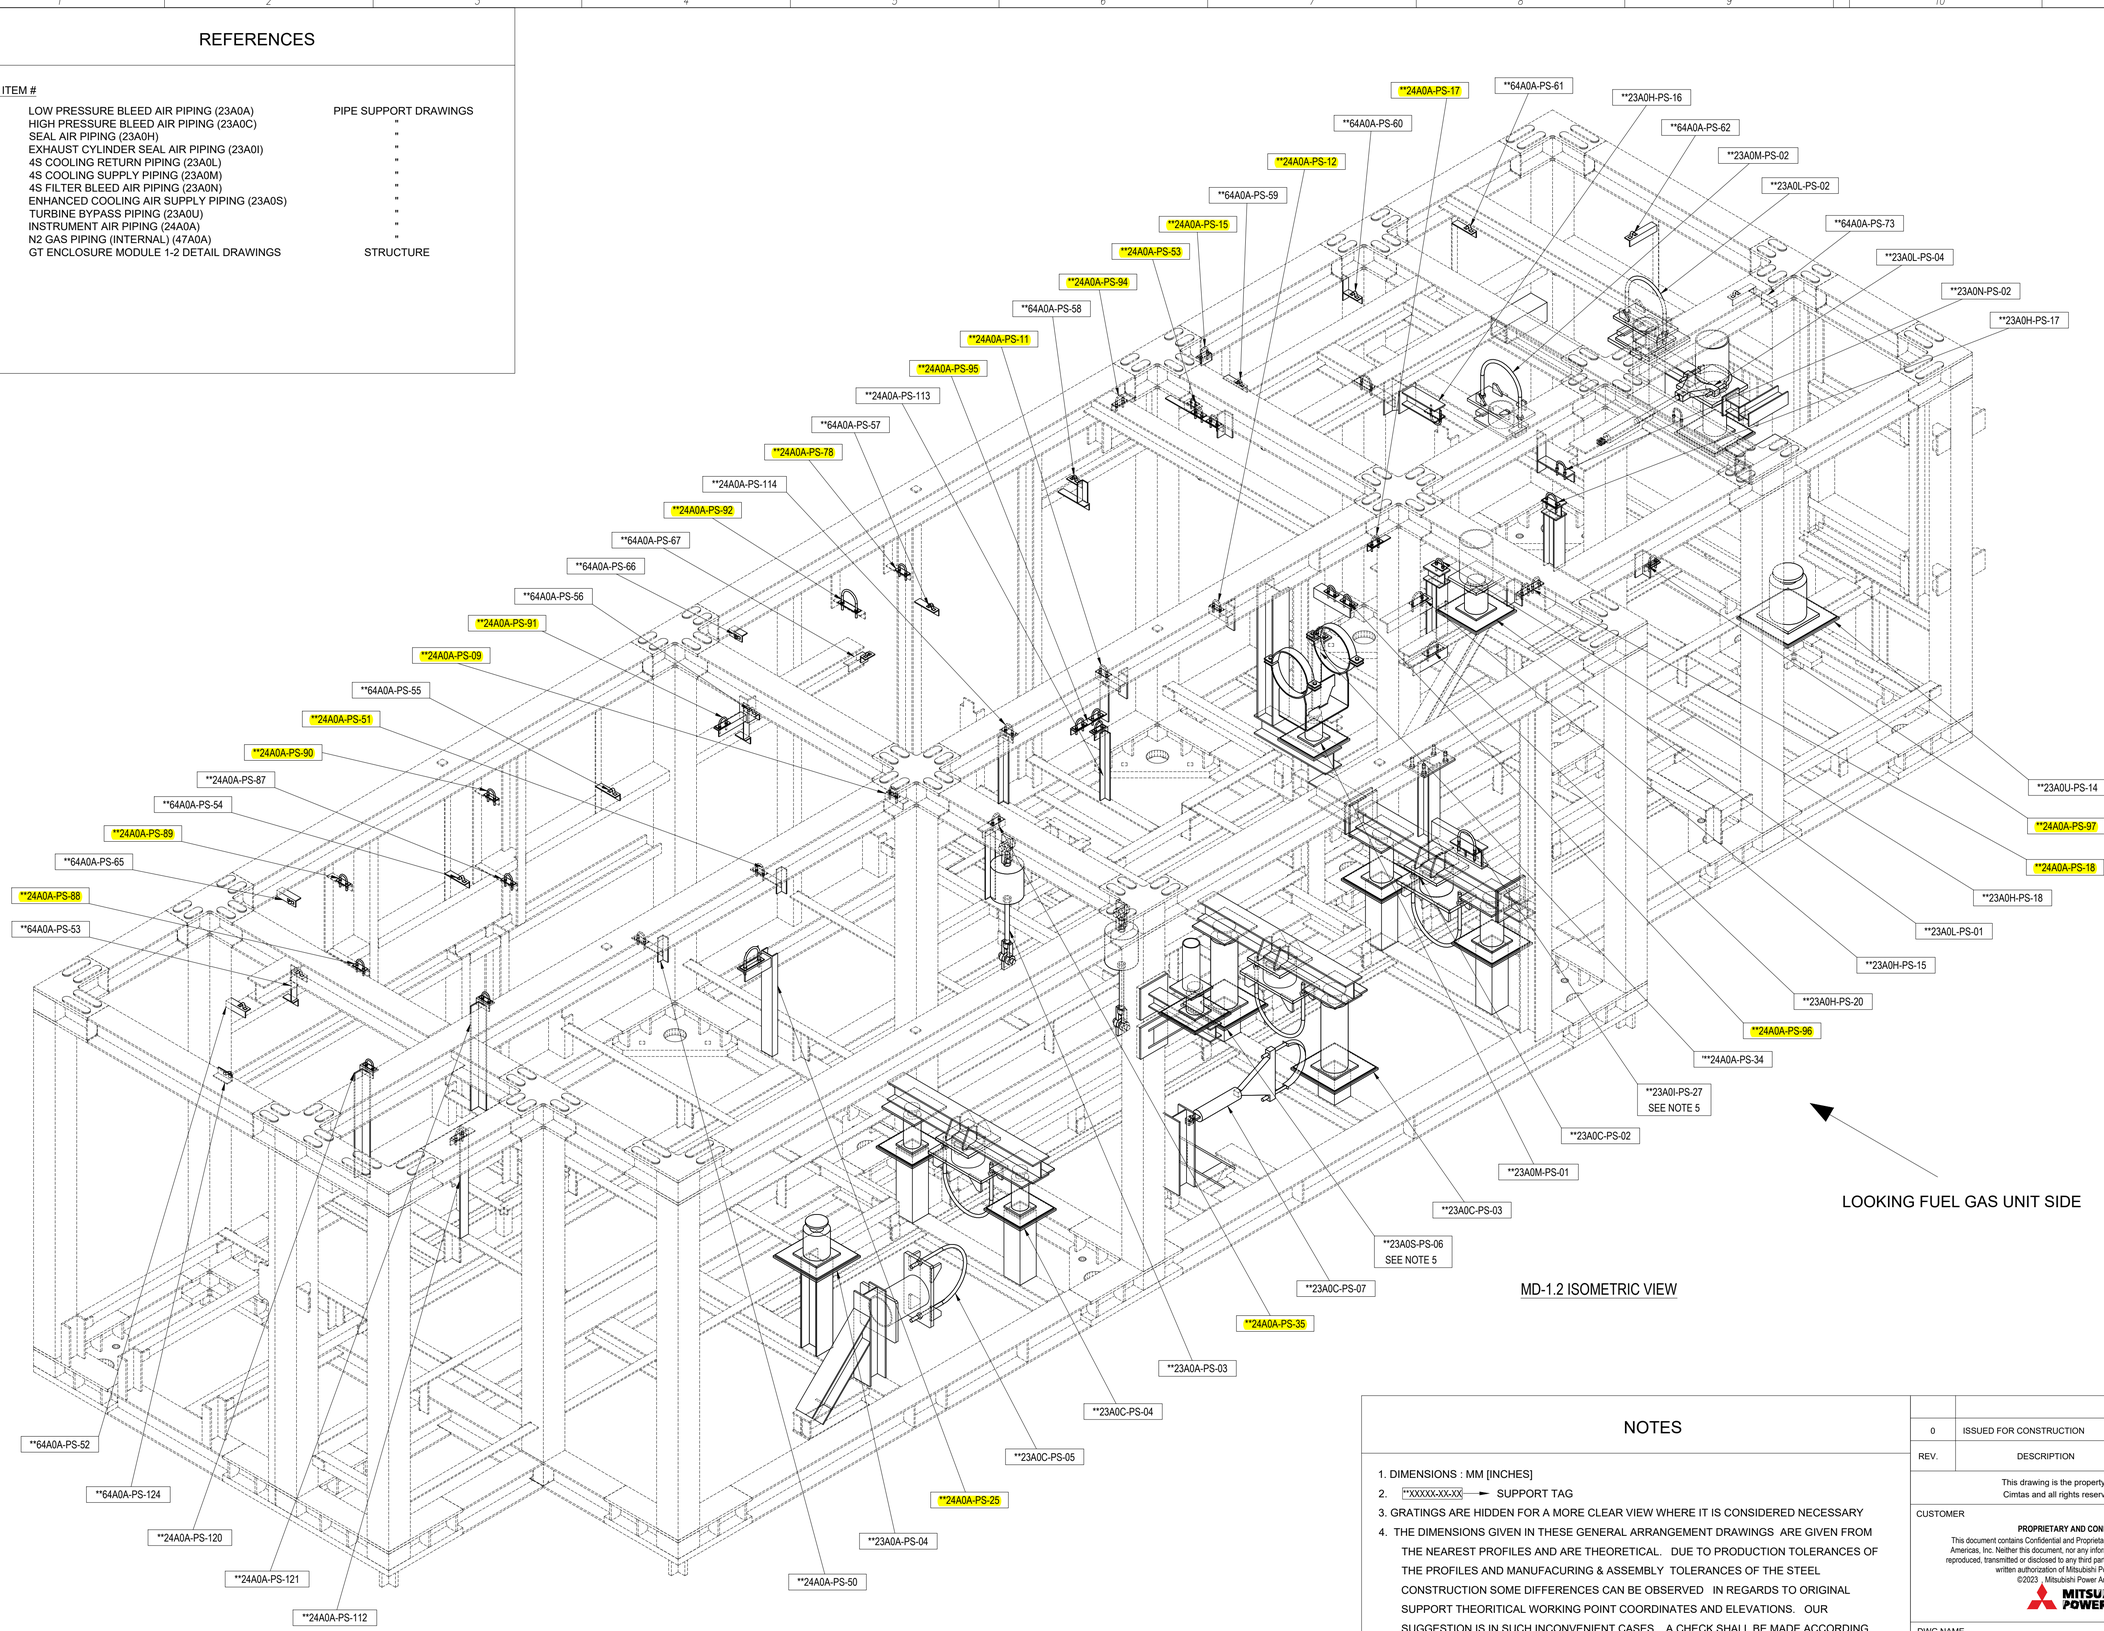

LOOKING FUEL GAS UNIT SIDE

MD-1.2 ISOMETRIC VIEW

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-03	**23A0A-6	
2	**23A0A-PS-04	**23A0A-6	
3	**23A0C-PS-02	EJ	
4	**23A0C-PS-03	**23A0C-6	
5	**23A0C-PS-04	**23A0C-6	
6	**23A0C-PS-05	**23A0C-6	
7	**23A0C-PS-07	**23A0C-6	
8	**23A0H-PS-15	**23A0H-1	
9	**23A0H-PS-16	**23A0H-15 **23A0H-27	
10	**23A0H-PS-17	**23A0H-28	
11	**23A0H-PS-18	**23A0H-27	
12	**23A0H-PS-20	**23A0H-26	
13	**23A0I-PS-27	**23A0I-4	SEE NOTE 5
14	**23A0L-PS-01	**23A0L-2	
15	**23A0L-PS-02	**23A0L-1 **23A0M-1 **23A0N-1	
16	**23A0L-PS-04	**23A0L-1	
17	**23A0M-PS-01	**23A0M-2	
18	**23A0M-PS-02	**23A0M-1	
19	**23A0N-PS-02	**23A0N-1	
20	**23A0S-PS-06	**23A0S-20	SEE NOTE 5
21	**23A0U-PS-14	**23A0U-28	
22	**24A0A-PS-09	**24A0A-33	
23	**24A0A-PS-11	**24A0A-33	
24	**24A0A-PS-112	**24A0A-43	
25	**24A0A-PS-113	AIR CHAMBER	
26	**24A0A-PS-114	AIR CHAMBER	
27	**24A0A-PS-12	**24A0A-33	
28	**24A0A-PS-120	AIR CHAMBER	
29	**24A0A-PS-121	AIR CHAMBER	
30	**24A0A-PS-15	**24A0A-36	
31	**24A0A-PS-17	**24A0A-34	
32	**24A0A-PS-18	**24A0A-19 **24A0A-44	
33	**24A0A-PS-25	**24A0A-59	
34	**24A0A-PS-34	**24A0A-35	
35	**24A0A-PS-35	**24A0A-72	
36	**24A0A-PS-50	**24A0A-32	
37	**24A0A-PS-51	**24A0A-32	
38	**24A0A-PS-53	**24A0A-34 **24A0A-36 **47A0A-1	
39	**24A0A-PS-78	**24A0A-1	
40	**24A0A-PS-87	AIR CHAMBER	
41	**24A0A-PS-88	**24A0A-2	
42	**24A0A-PS-89	**24A0A-2	
43	**24A0A-PS-90	**24A0A-2	
44	**24A0A-PS-91	**24A0A-11	
45	**24A0A-PS-92	**24A0A-1	
46	**24A0A-PS-94	**24A0A-9	
47	**24A0A-PS-95	**24A0A-21 **24A0A-6	
48	**24A0A-PS-96	**24A0A-20 **24A0A-5	
49	**24A0A-PS-97	**24A0A-19	
50	**64A0A-PS-124	FFS	
51	**64A0A-PS-52	FFS	
52	**64A0A-PS-53	FFS	
53	**64A0A-PS-54	FFS	
54	**64A0A-PS-55	FFS	
55	**64A0A-PS-56	FFS	
56	**64A0A-PS-57	FFS	
57	**64A0A-PS-58	FFS	
58	**64A0A-PS-59	FFS	
59	**64A0A-PS-60	FFS	
60	**64A0A-PS-61	FFS	
61	**64A0A-PS-62	FFS	
62	**64A0A-PS-65	FFS	
63	**64A0A-PS-66	FFS	
64	**64A0A-PS-67	FFS	
65	**64A0A-PS-73	FFS	

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 . Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/8	1/20	A1


DRAWING NO: 2E00140-CI-026-150

REV.: 0

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

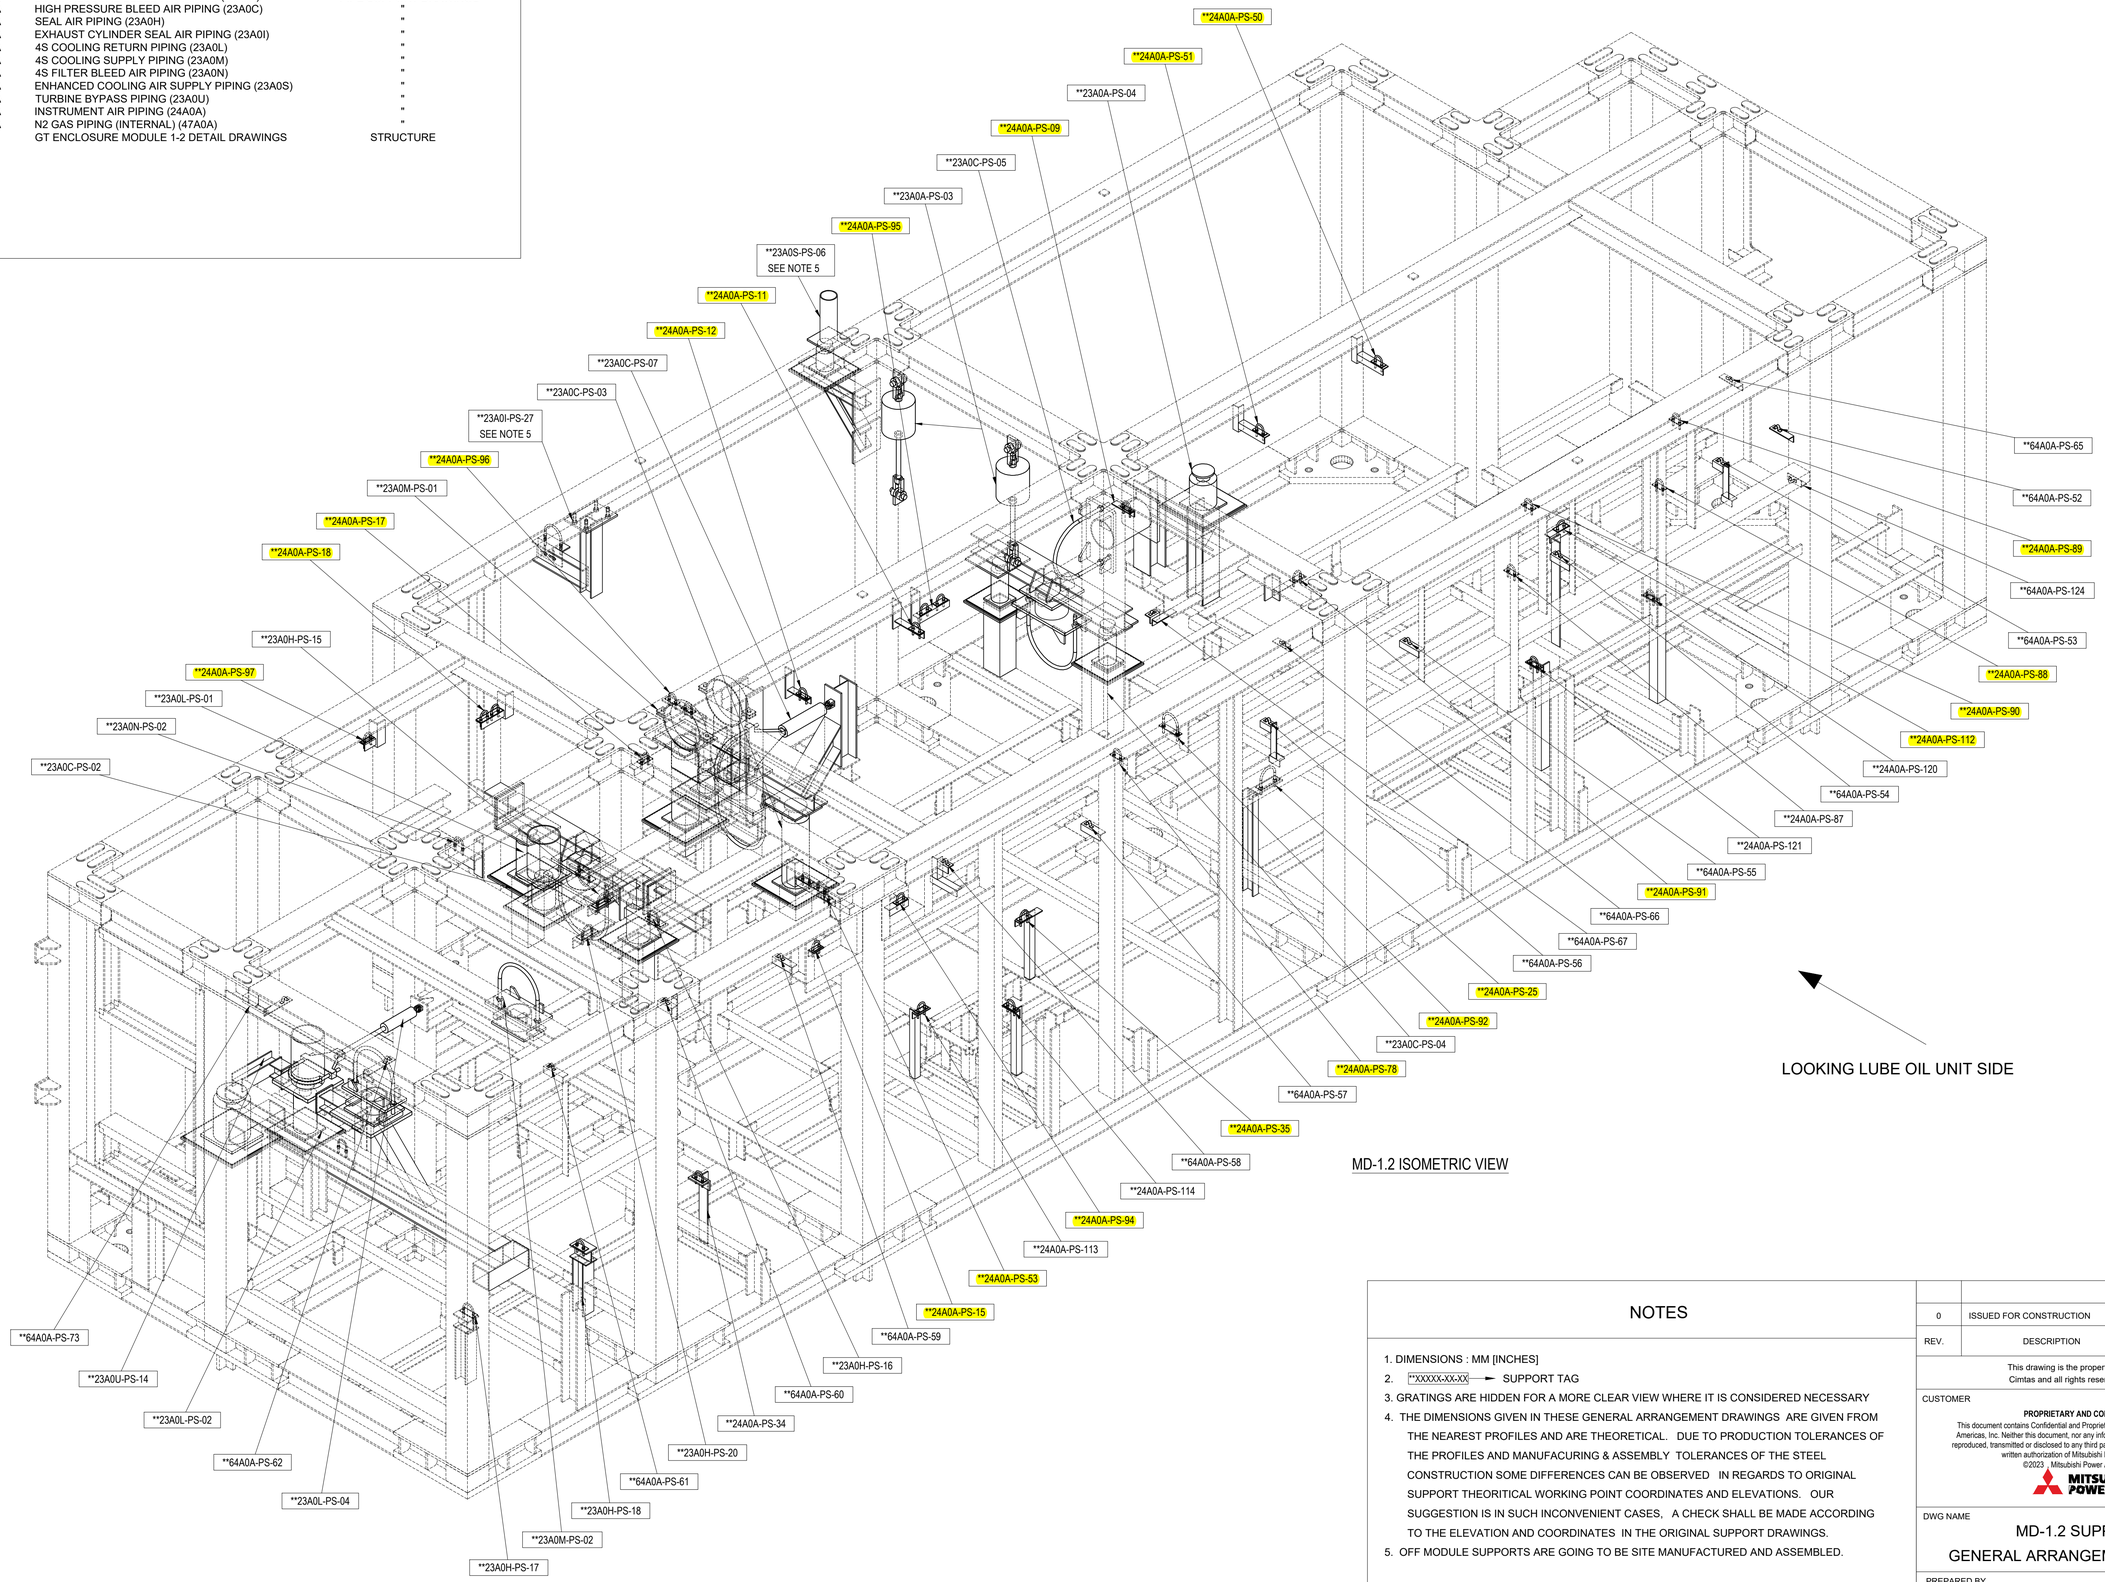

LOOKING LUBE OIL UNIT SIDE

MD-1.2 ISOMETRIC VIEW

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-03	**23A0A-6	
2	**23A0A-PS-04	**23A0A-6	
3	**23A0C-PS-02	EJ	
4	**23A0C-PS-03	**23A0C-6	
5	**23A0C-PS-04	**23A0C-6	
6	**23A0C-PS-05	**23A0C-6	
7	**23A0C-PS-07	**23A0C-6	
8	**23A0H-PS-15	**23A0H-1	
9	**23A0H-PS-16	**23A0H-15 **23A0H-27	
10	**23A0H-PS-17	**23A0H-28	
11	**23A0H-PS-18	**23A0H-27	
12	**23A0H-PS-20	**23A0H-26	
13	**23A0I-PS-27	**23A0I-4	SEE NOTE 5
14	**23A0L-PS-01	**23A0L-2	
15	**23A0L-PS-02	**23A0L-1 **23A0M-1 **23A0N-1	
16	**23A0L-PS-04	**23A0L-1	
17	**23A0M-PS-01	**23A0M-2	
18	**23A0M-PS-02	**23A0M-1	
19	**23A0N-PS-02	**23A0N-1	
20	**23A0S-PS-06	**23A0S-20	SEE NOTE 5
21	**23A0U-PS-14	**23A0U-28	
22	**24A0A-PS-09	**24A0A-33	
23	**24A0A-PS-11	**24A0A-33	
24	**24A0A-PS-112	**24A0A-43	
25	**24A0A-PS-113	AIR CHAMBER	
26	**24A0A-PS-114	AIR CHAMBER	
27	**24A0A-PS-12	**24A0A-33	
28	**24A0A-PS-120	AIR CHAMBER	
29	**24A0A-PS-121	AIR CHAMBER	
30	**24A0A-PS-15	**24A0A-36	
31	**24A0A-PS-17	**24A0A-34	
32	**24A0A-PS-18	**24A0A-19 **24A0A-44	
33	**24A0A-PS-25	**24A0A-59	
34	**24A0A-PS-34	**24A0A-35	
35	**24A0A-PS-35	**24A0A-72	
36	**24A0A-PS-50	**24A0A-32	
37	**24A0A-PS-51	**24A0A-32	
38	**24A0A-PS-53	**24A0A-34 **24A0A-36 **47A0A-1	
39	**24A0A-PS-78	**24A0A-1	
40	**24A0A-PS-87	AIR CHAMBER	
41	**24A0A-PS-88	**24A0A-2	
42	**24A0A-PS-89	**24A0A-2	
43	**24A0A-PS-90	**24A0A-2	
44	**24A0A-PS-91	**24A0A-11	
45	**24A0A-PS-92	**24A0A-1	
46	**24A0A-PS-94	**24A0A-9	
47	**24A0A-PS-95	**24A0A-21 **24A0A-6	
48	**24A0A-PS-96	**24A0A-20 **24A0A-5	
49	**24A0A-PS-97	**24A0A-19	
50	**64A0A-PS-124	FFS	
51	**64A0A-PS-52	FFS	
52	**64A0A-PS-53	FFS	
53	**64A0A-PS-54	FFS	
54	**64A0A-PS-55	FFS	
55	**64A0A-PS-56	FFS	
56	**64A0A-PS-57	FFS	
57	**64A0A-PS-58	FFS	
58	**64A0A-PS-59	FFS	
59	**64A0A-PS-60	FFS	
60	**64A0A-PS-61	FFS	
61	**64A0A-PS-62	FFS	
62	**64A0A-PS-65	FFS	
63	**64A0A-PS-66	FFS	
64	**64A0A-PS-67	FFS	
65	**64A0A-PS-73	FFS	

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX** → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	2/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

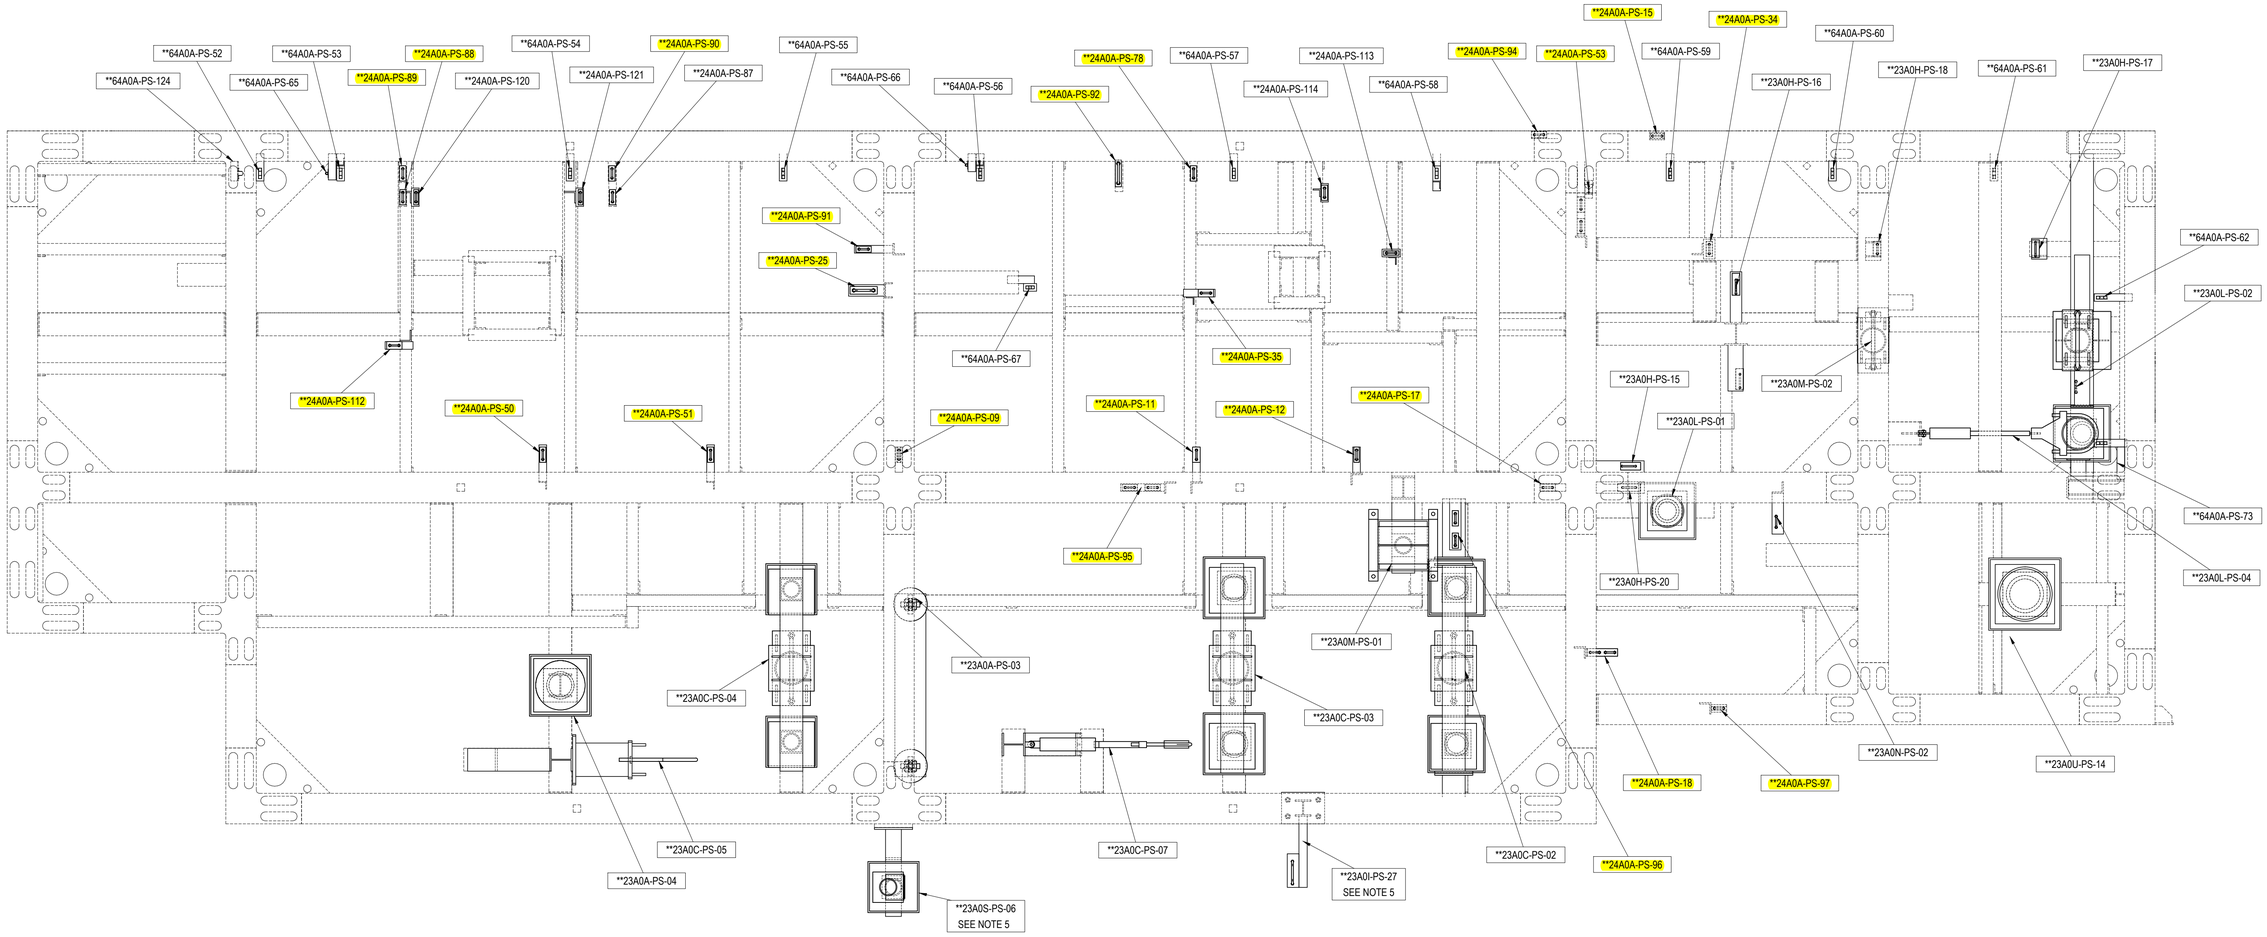

MD-1.2 PLAN VIEW

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	3/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

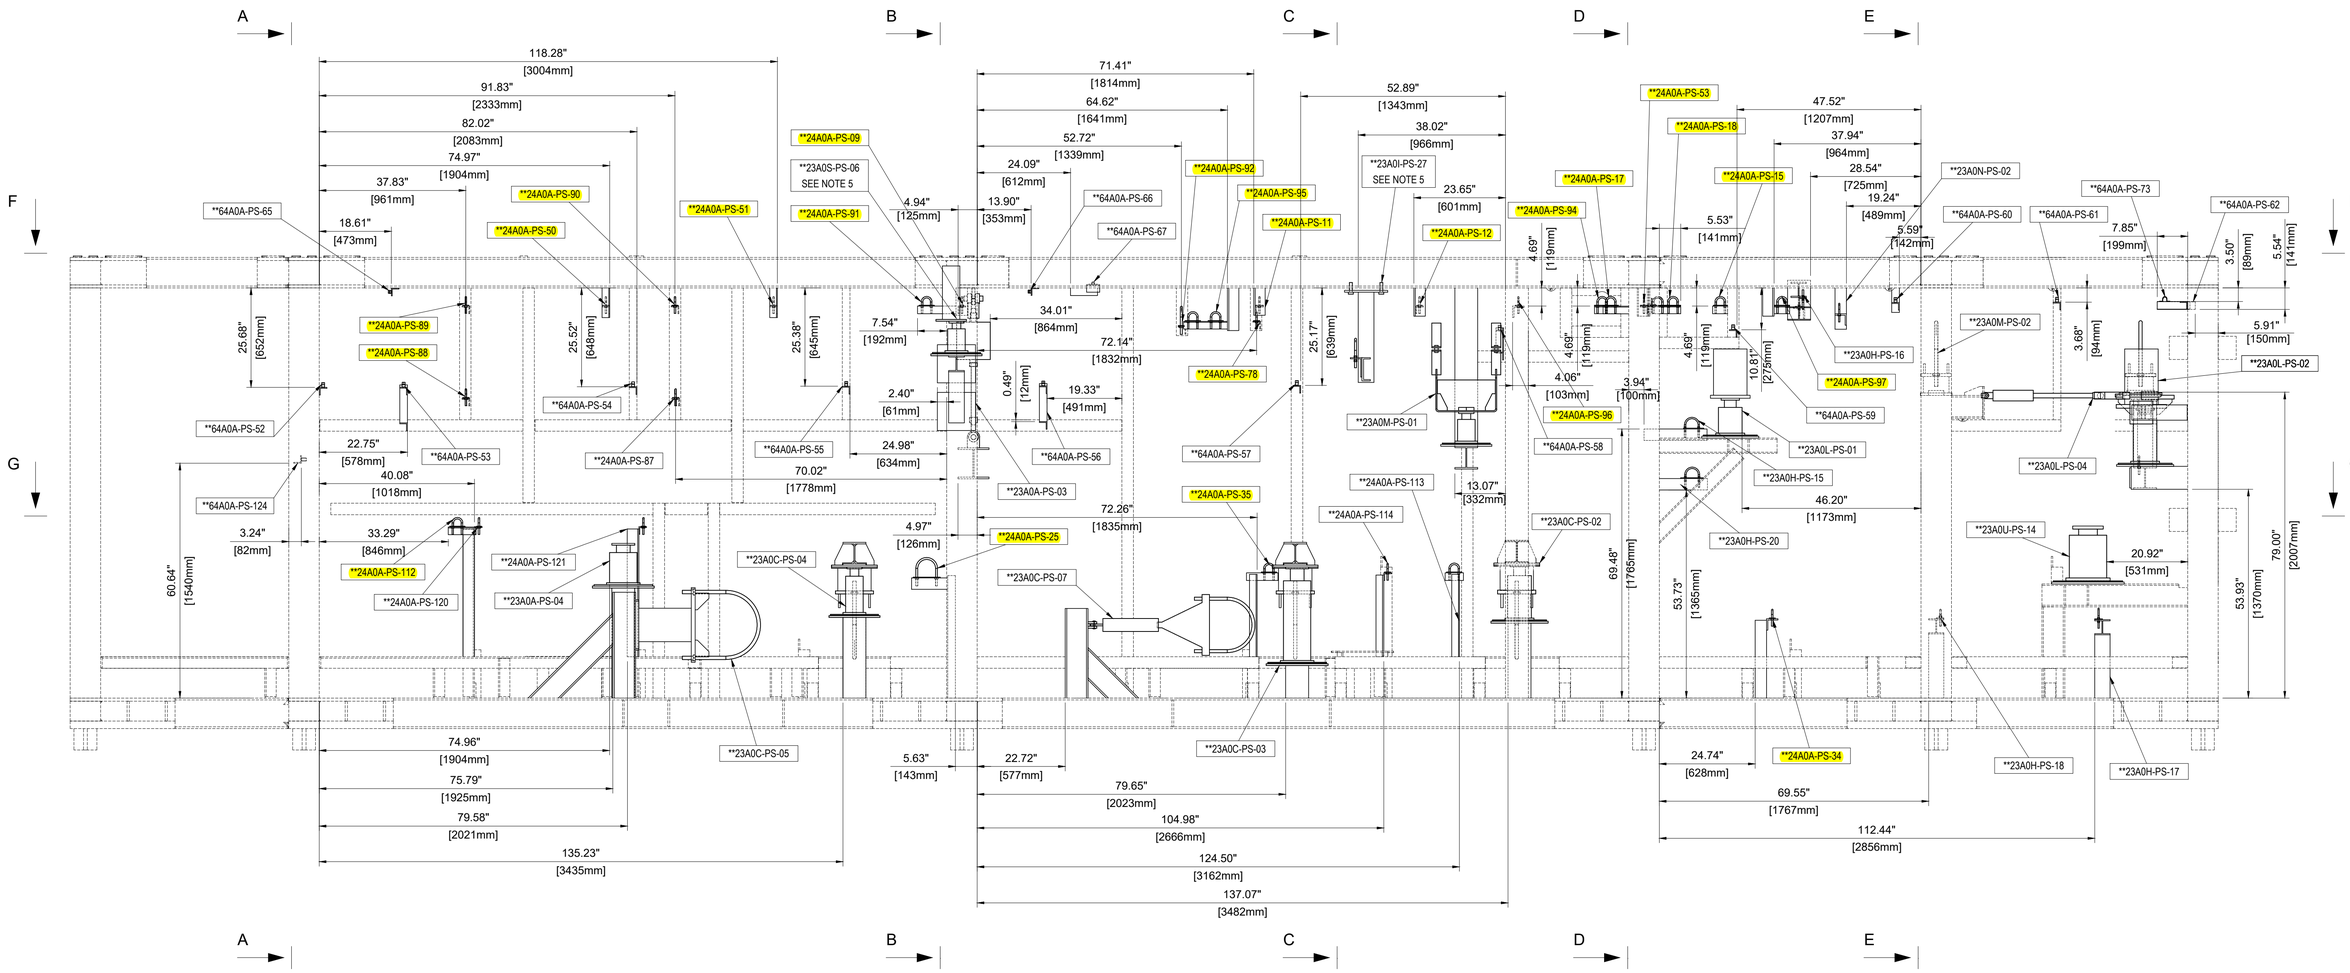

MD-1.2 LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	4/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150


REV.: 0

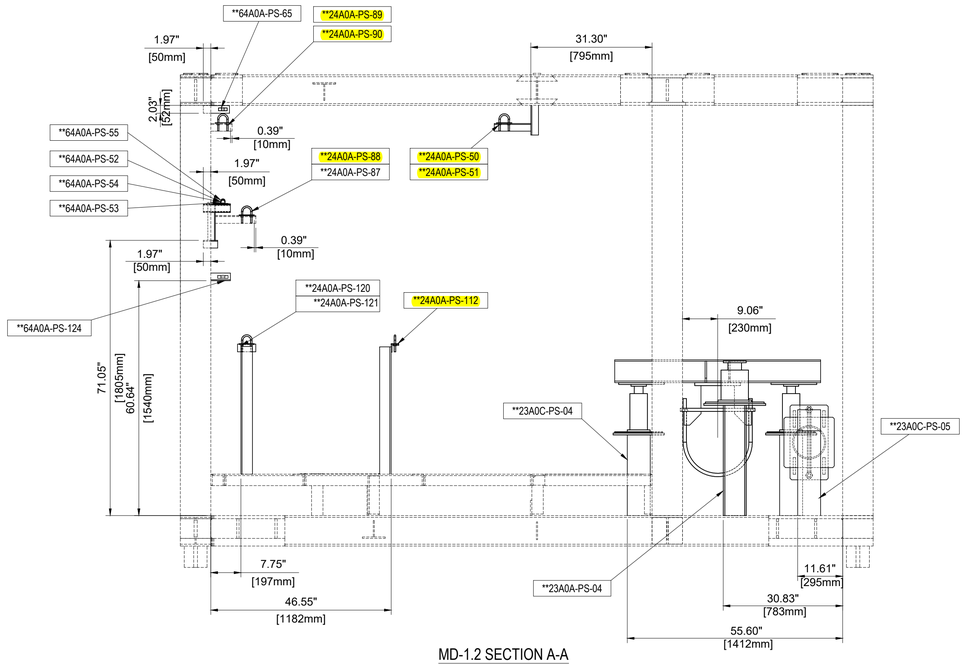

MD-1.2 SECTION A-A

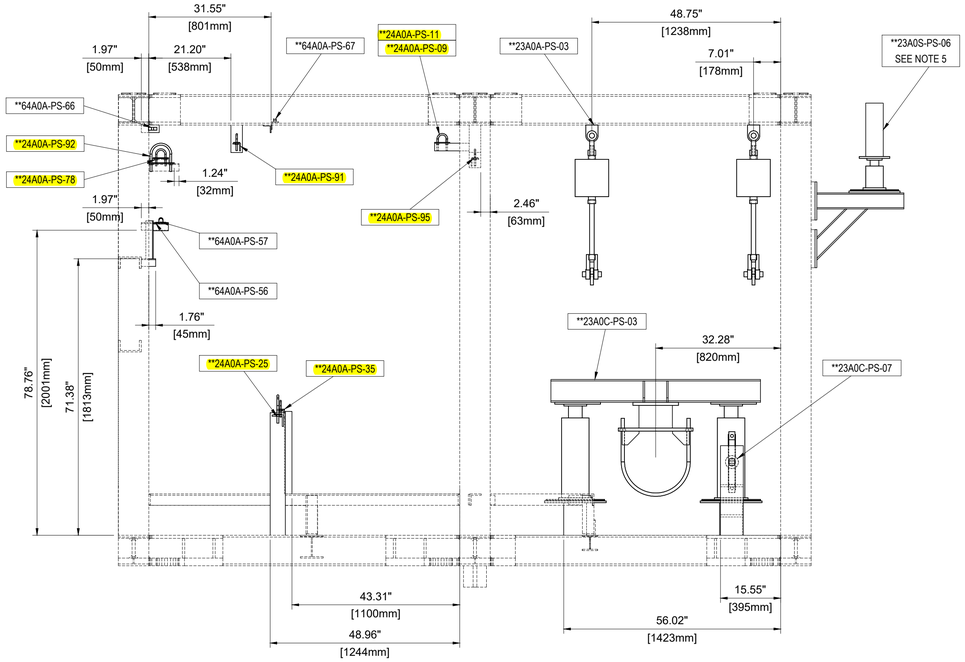

MD-1.2 SECTION B-B

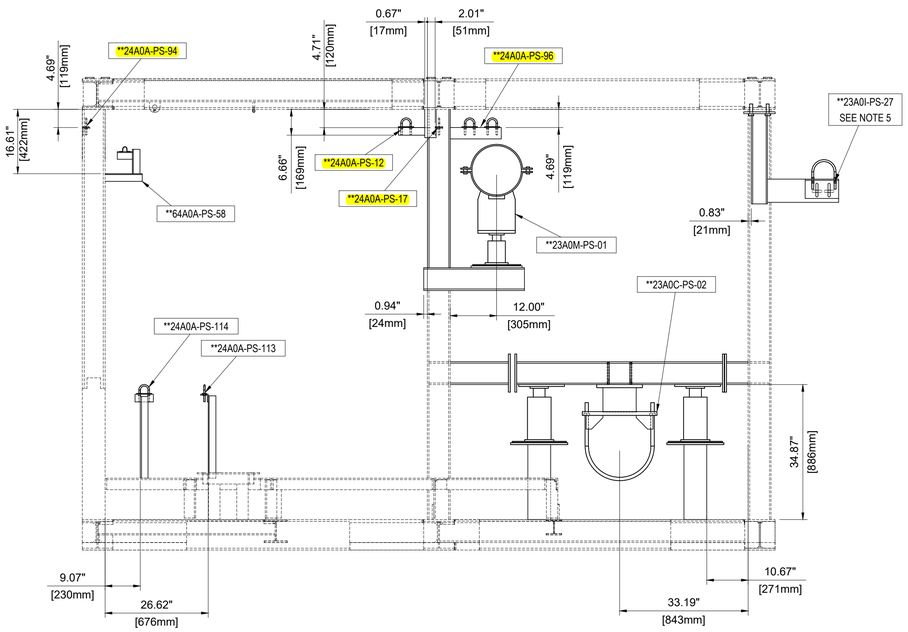

MD-1.2 SECTION C-C

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	5/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

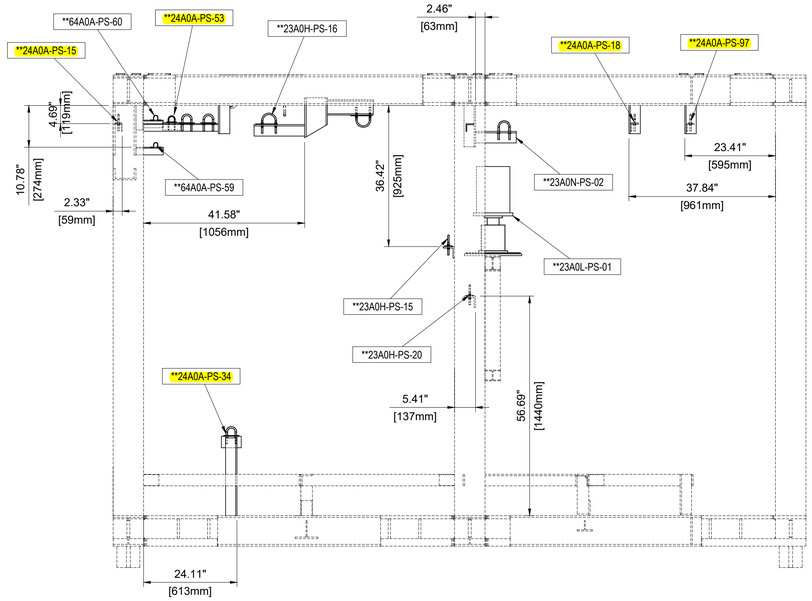

MD-1.2 SECTION D-D

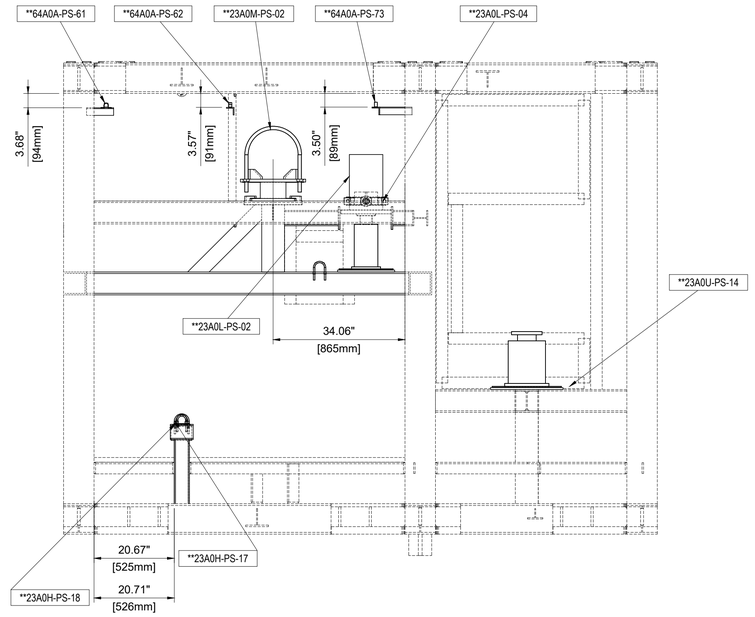

MD-1.2 SECTION E-E

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME

MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	6/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

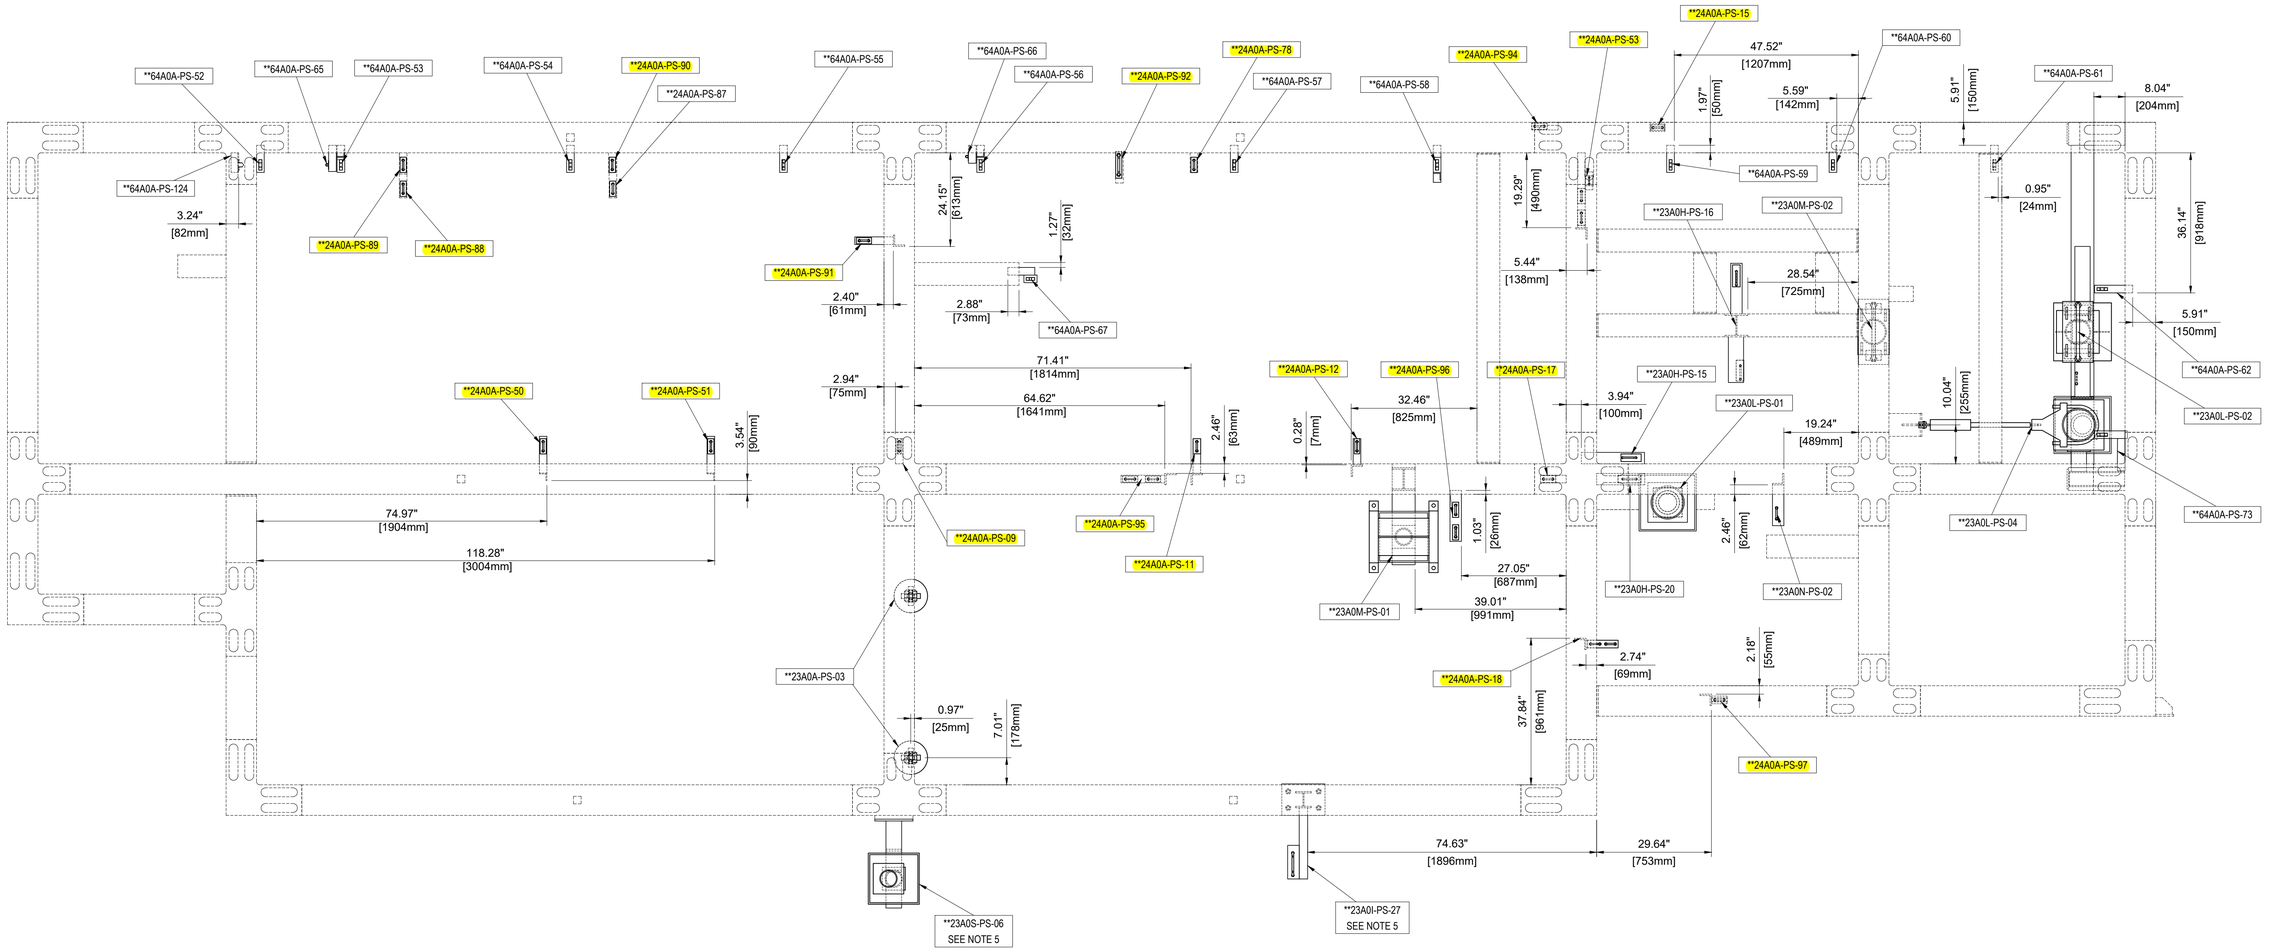

MD-1.2 SECTION F-F

REFERENCES

MDL ITEM #

N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	7/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

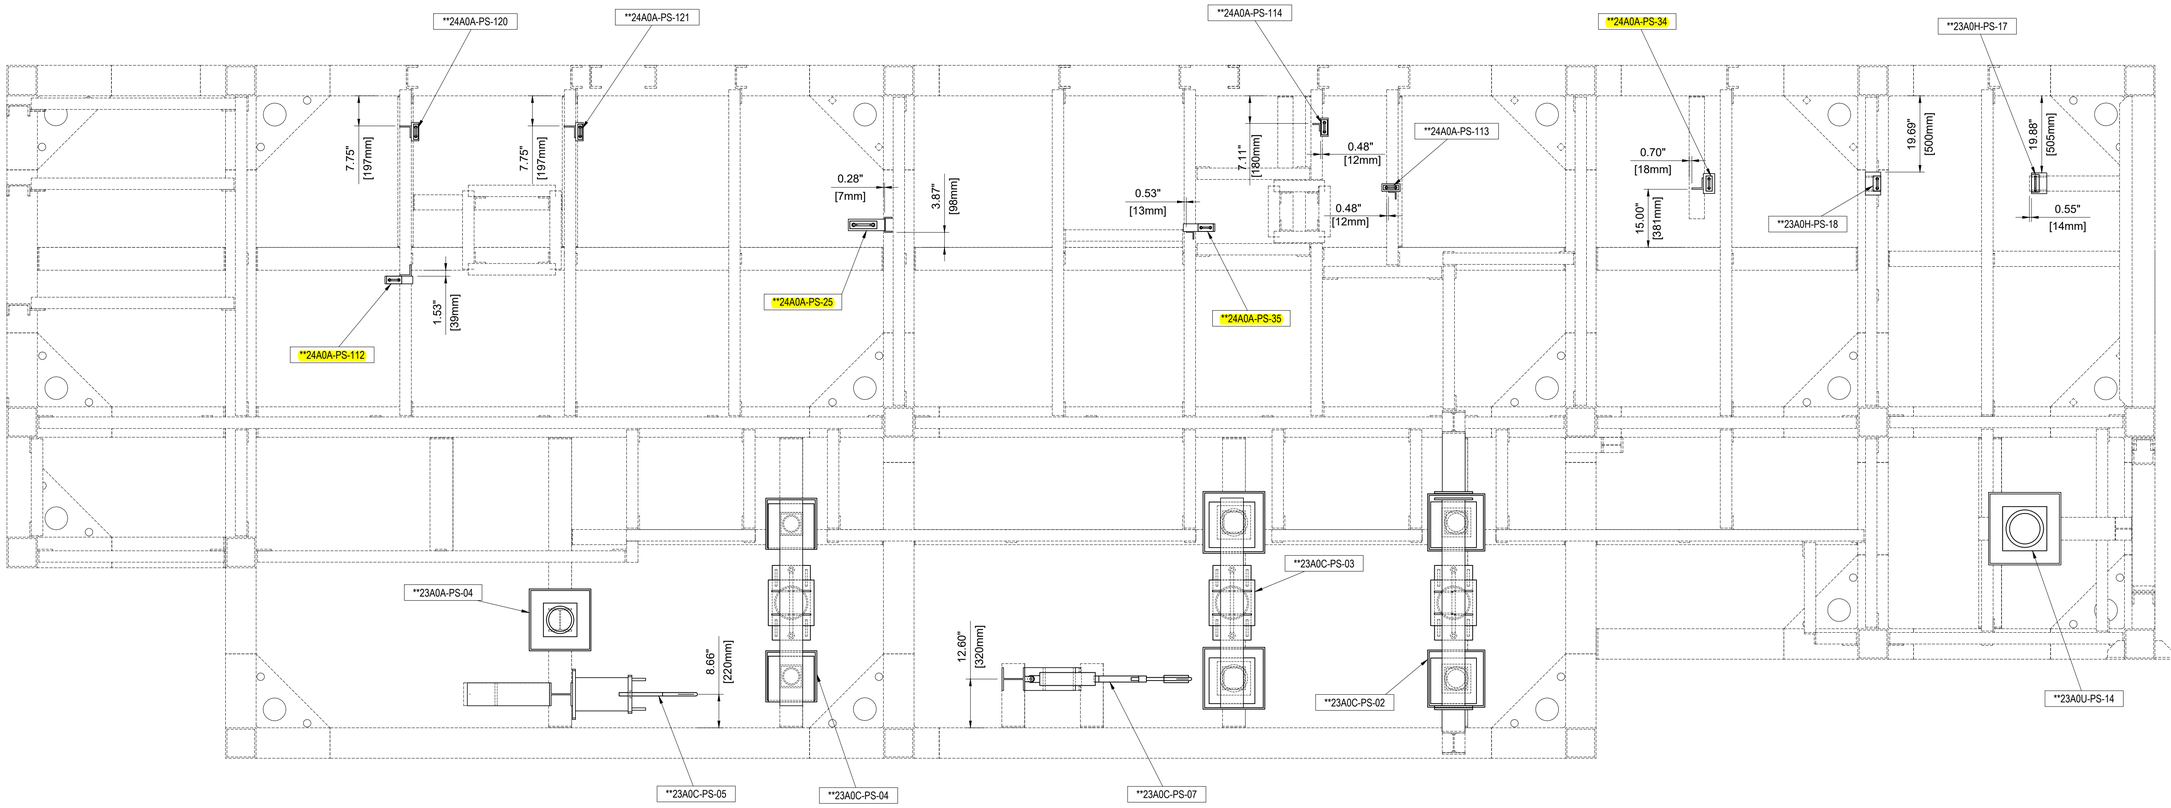

MD-1.2 SECTION G-G

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	4S COOLING SUPPLY PIPING (23A0M)	"
N/A	4S FILTER BLEED AIR PIPING (23A0N)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
37	GT ENCLOSURE MODULE 1-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	11.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-151

DWG NAME: MD-1.2 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	8/8	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR101


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

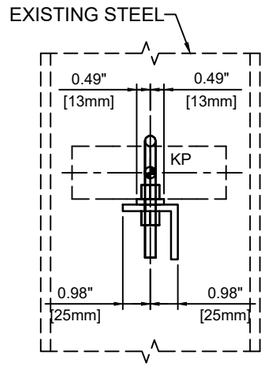


LOOKING LUBE OIL UNIT SIDE
1:5

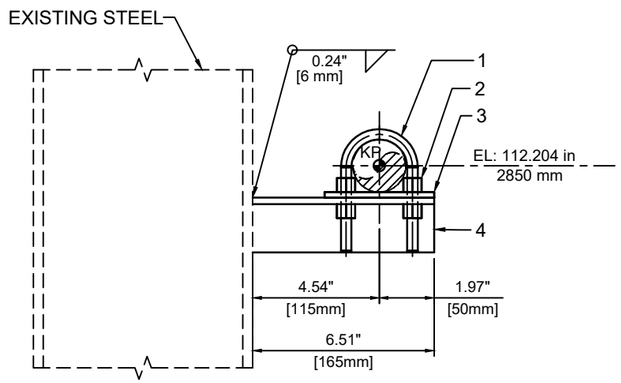


LOOKING INLET MANIFOLD SIDE
1:5

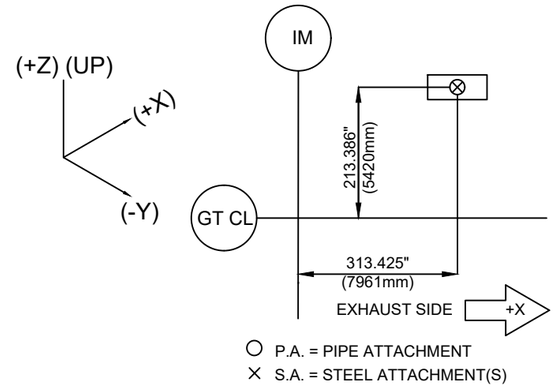




ISOMETRIC VIEW

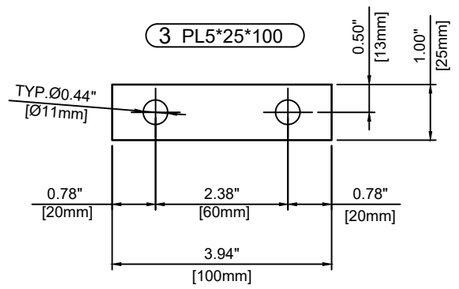

1:2.5

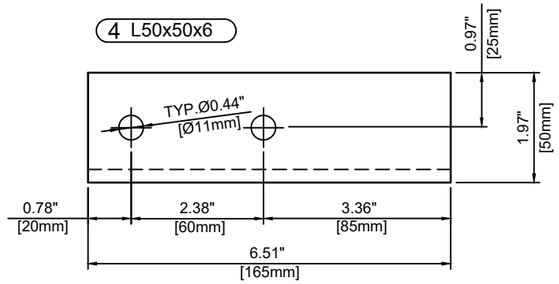

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			6.50	165	1	1.61	0.73	SS400
							TOTAL	2.29	1.04	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-09

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	NO C2
LINE NO:	**QFF11BR101
Pipe OD =	1.90 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch

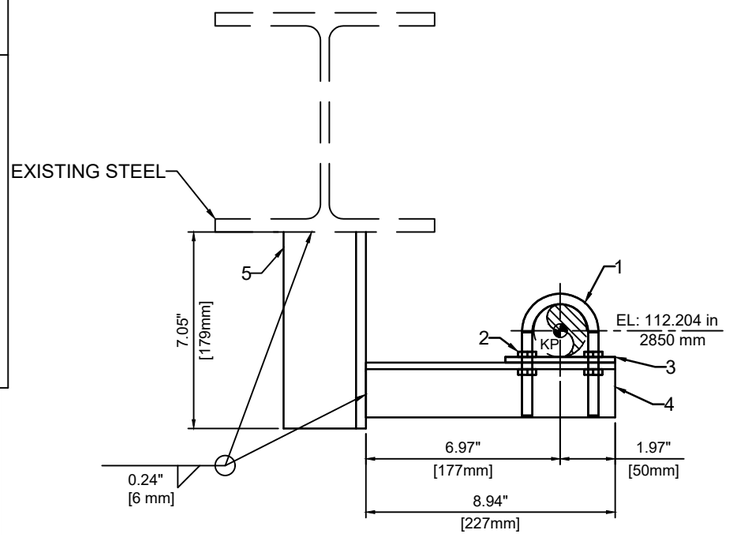


LOOKING INLET MANIFOLD SIDE
1:5

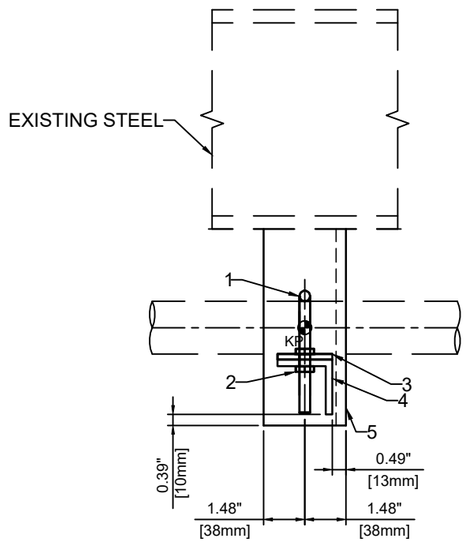


LOOKING LUBE OIL UNIT SIDE
1:5

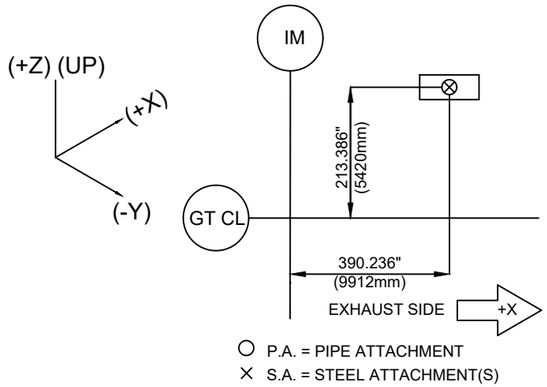




ISOMETRIC VIEW

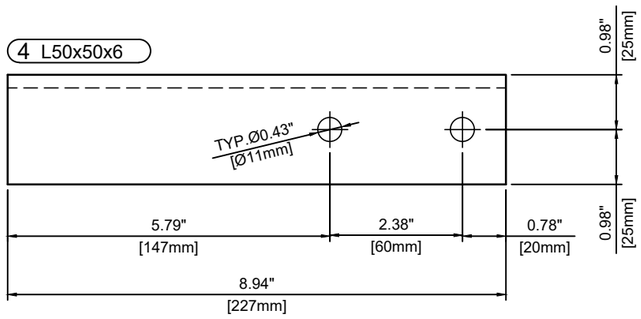

1:2.5

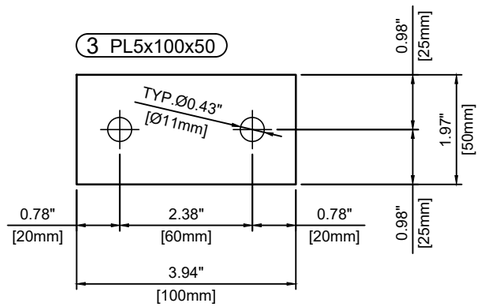

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
4	L50x50x6	JIS G 3192			8.94	227	1	2.22	1.01	SS400
5	L75x75x9	JIS G 3192			7.05	179	1	3.93	1.78	SS400
						GRAND TOTAL		7.04	3.19	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-11

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR101


Pipe OD = 1.90 inch
Pipe DesignTemp.= 140 °F
Insul= 0 inch

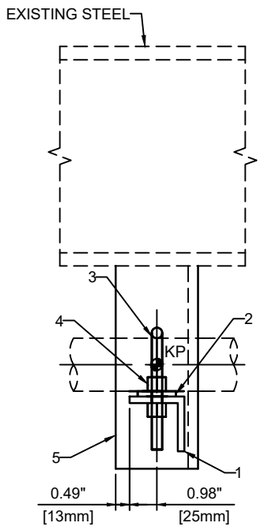


LOOKING LUBE OIL UNIT SIDE
1:5

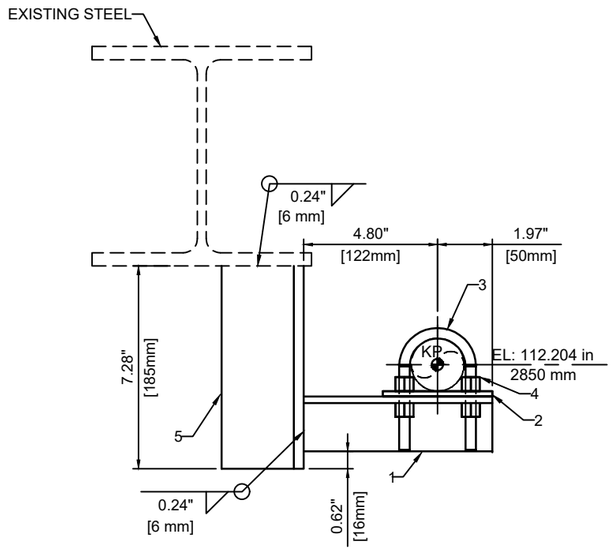



LOOKING INLET MANIFOLD SIDE
1:5

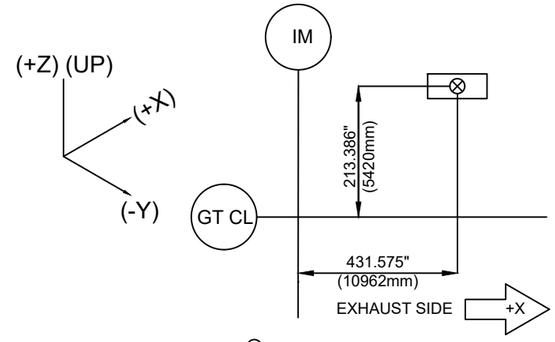



ISOMETRIC VIEW

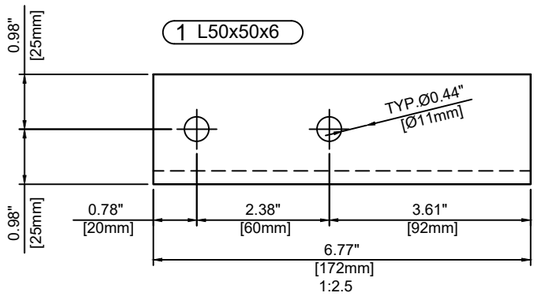

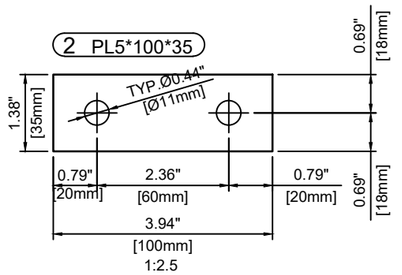

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			6.77	172	1	1.68	0.76	SS400
2	PL5		1.38	35	3.94	100	1	0.30	0.14	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
5	L75x75x9	JIS G 3192			7.28	185	1	4.06	1.84	SS400
						GRAND TOTAL		6.52	2.96	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-12

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR101


Pipe OD = 1.9 inch
Pipe DesignTemp.= 140 °F
Insul= No Ins.

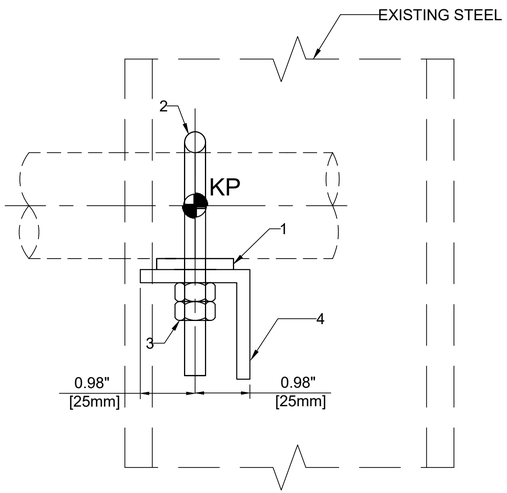


LOOKING EXHAUST SIDE
1:2.5

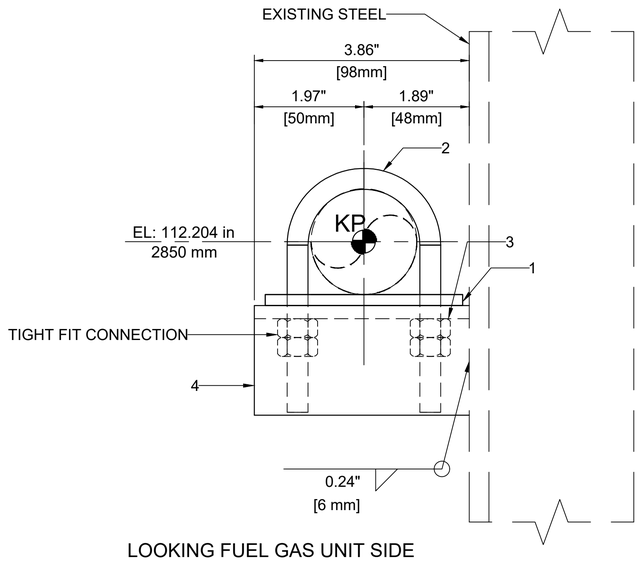


LOOKING FUEL GAS UNIT SIDE
1:2.5

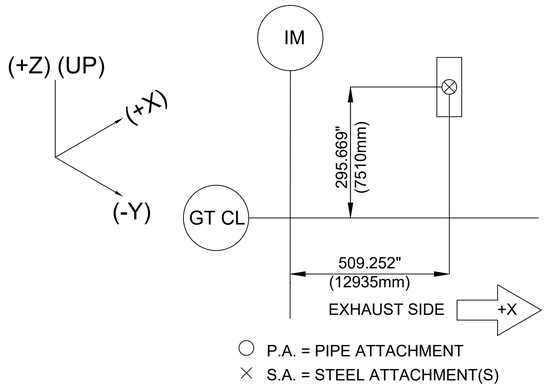




ISOMETRIC VIEW

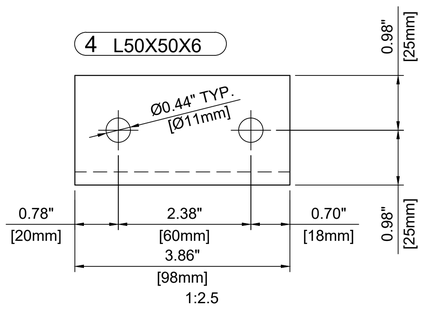

1:2.5

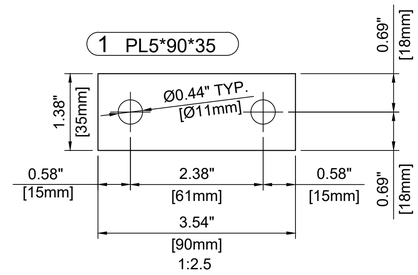

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	PL5		1.38	35	3.54	90	1	0.27	0.12	ASTM A240-304
2	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
3	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
4	L50x50x6	JIS G 3192			3.86	98	1	0.96	0.43	SS400
							TOTAL	1.70	0.77	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-15

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR120


Pipe OD = 1.9 inch
Pipe DesignTemp.= 140 °F
Insul= No Ins.




LOOKING EXHAUST SIDE
1:5

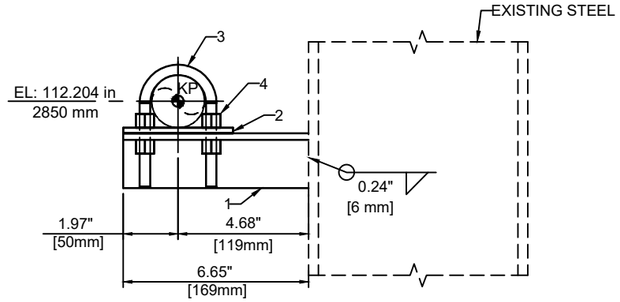



LOOKING FUEL GAS UNIT SIDE
1:5

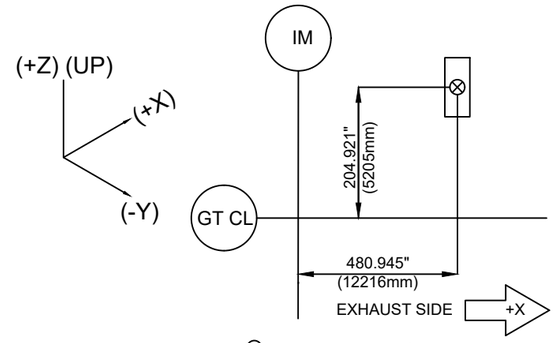



ISOMETRIC VIEW

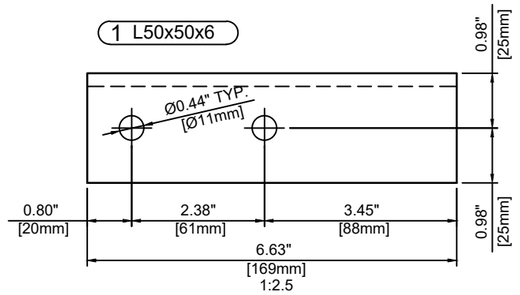



Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			6.63	169	1	1.65	0.75	SS400
2	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.10	0.04	STAINLESS STEEL
							TOTAL	2.55	1.16	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-17

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR120


Pipe OD = 1.9 inch
Pipe DesignTemp.= 140 °F
Insul= No Ins.

NODE: No C2
LINE NO: **QFF11BR019


Pipe OD = 1.9 inch
Pipe DesignTemp.= 140 °F
Insul= No Ins.

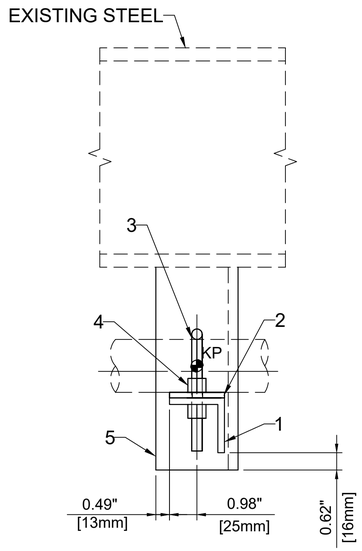

LOOKING INLET MANIFOLD SIDE
1:5

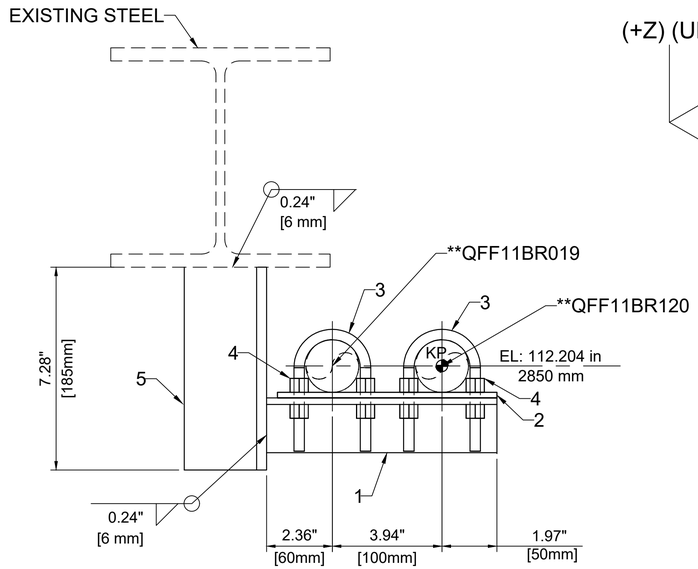


LOOKING FUEL GAS UNIT SIDE
1:5

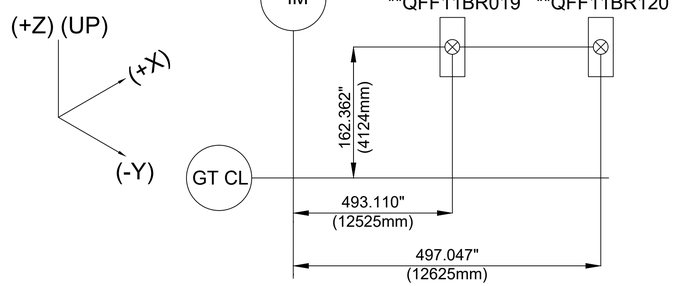


EXHAUST SIDE +X


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)



ISOMETRIC VIEW

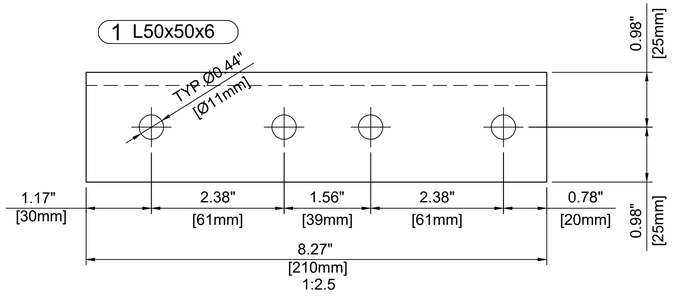

1:2.5

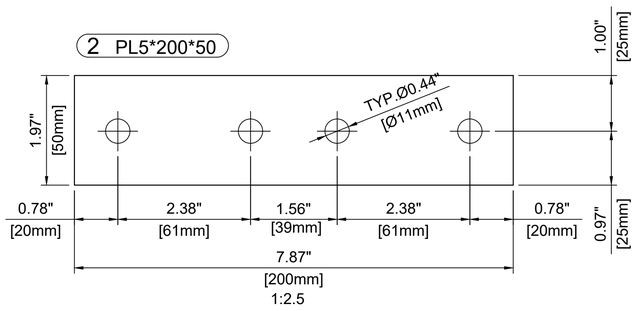

1:2.5

Item	Description	LISEGA SIZE /STANDARD	Width		Length		Qty.	Weight		Material
			in	mm	in	mm		lbf	kg	
1	L50x50x6	JIS G 3192			8.27	210	1	2.05	0.93	SS400
2	PL5		1.97	50	7.87	200	1	0.86	0.39	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					2	0.75	0.34	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						8	0.19	0.09	STAINLESS STEEL
5	L75x75x9	JIS G 3192			7.28	185	1	4.06	1.84	SS400
							TOTAL	7.92	3.59	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-18

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR130


Pipe OD =	4.50	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

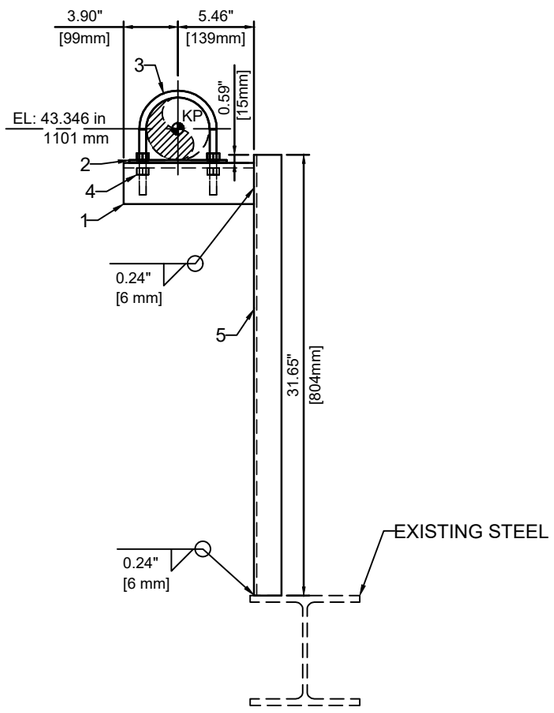


LOOKING FUEL GAS UNIT SIDE
1:10

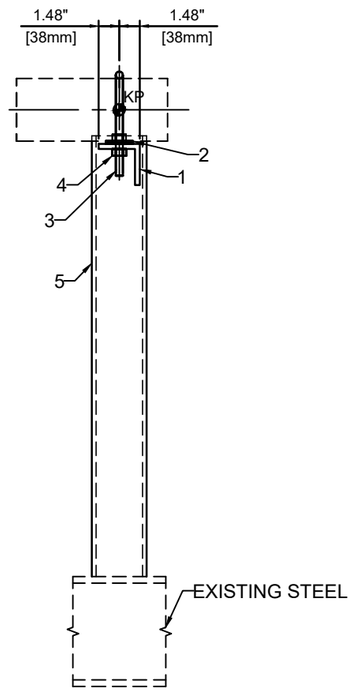


LOOKING EXHAUST SIDE
1:10

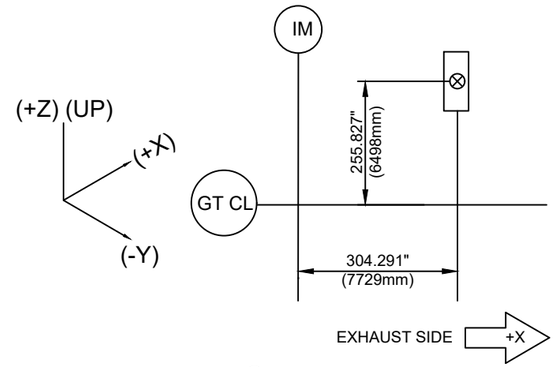




ISOMETRIC VIEW

1 L75x75x9

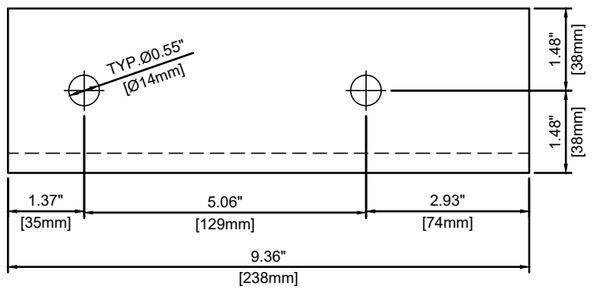

1:2.5

2 PL5*178*50

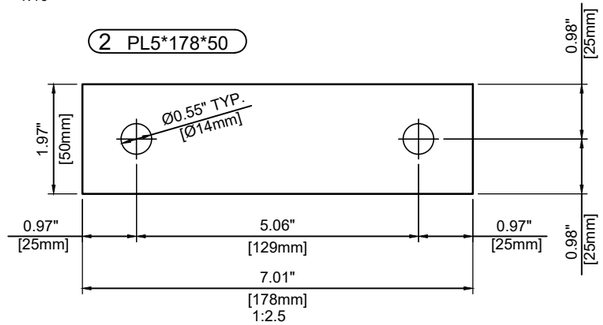

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	L75x75x9	JIS G 3192			9.36	238	1	5.22	2.37	SS400
2	PL5		1.97	50	7.01	178	1	0.77	0.35	ASTM A240-304
3	Standard U-Bolt, 4.50"	401148					1	1.03	0.47	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 1/2"						4	0.26	0.12	STAINLESS STEEL
5	C100x50x5	JIS G 3192			31.65	804	1	16.59	7.53	SS400
						GRAND TOTAL		23.87	10.83	

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-25
PAGE NUMBER:	1 OF 1

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR180


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

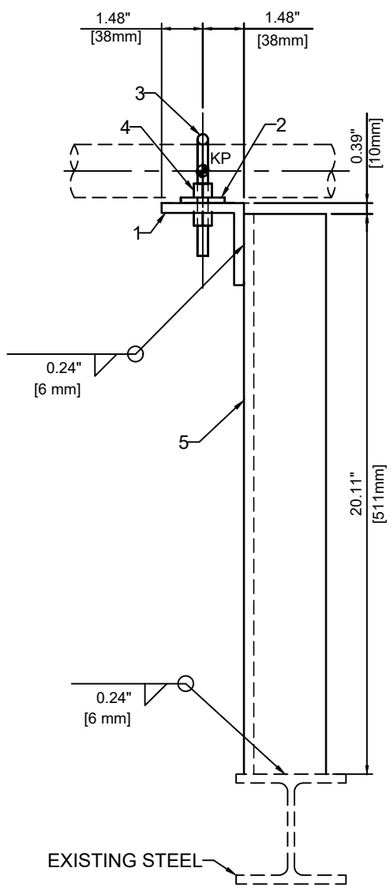


LOOKING LUBE OIL UNIT SIDE
1:5

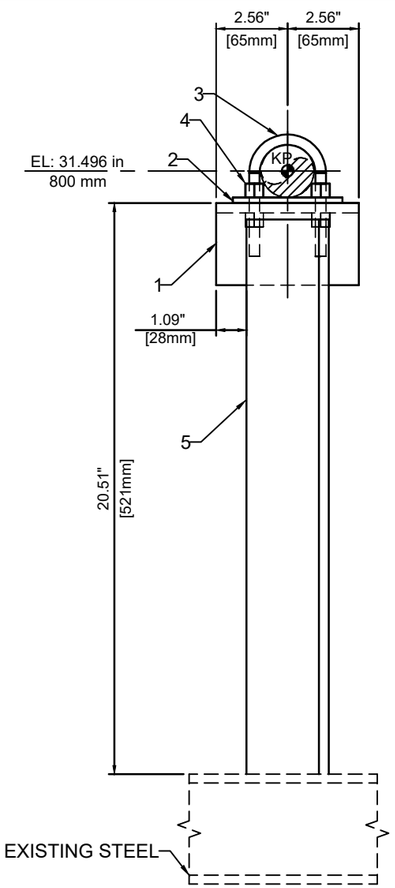


LOOKING EXHAUST SIDE
1:5

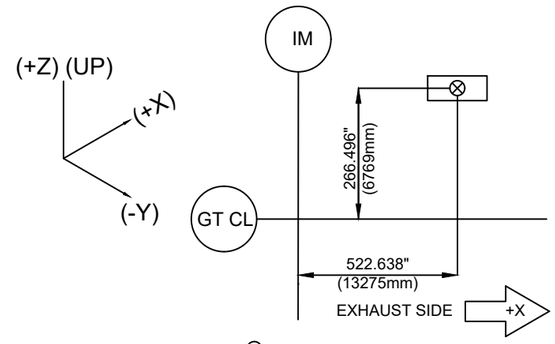


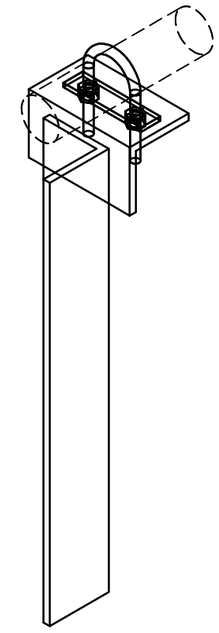

ISOMETRIC VIEW

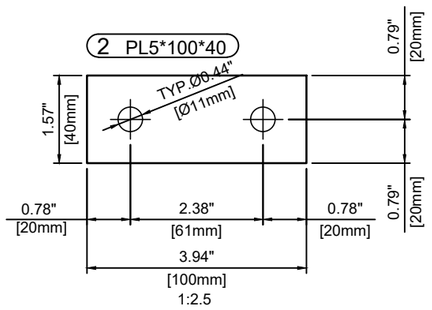

1:2.5

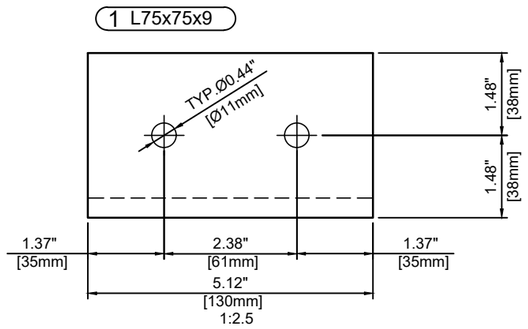

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	L75x75x9	JIS G 3192			5.12	130	1	2.85	1.29	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
5	L75x75x9	JIS G 3192			20.12	511	1	11.22	5.09	SS400
						GRAND TOTAL		14.88	6.75	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-34

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	NO C2
LINE NO:	**QFF11BR633


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch




ISOMETRIC VIEW

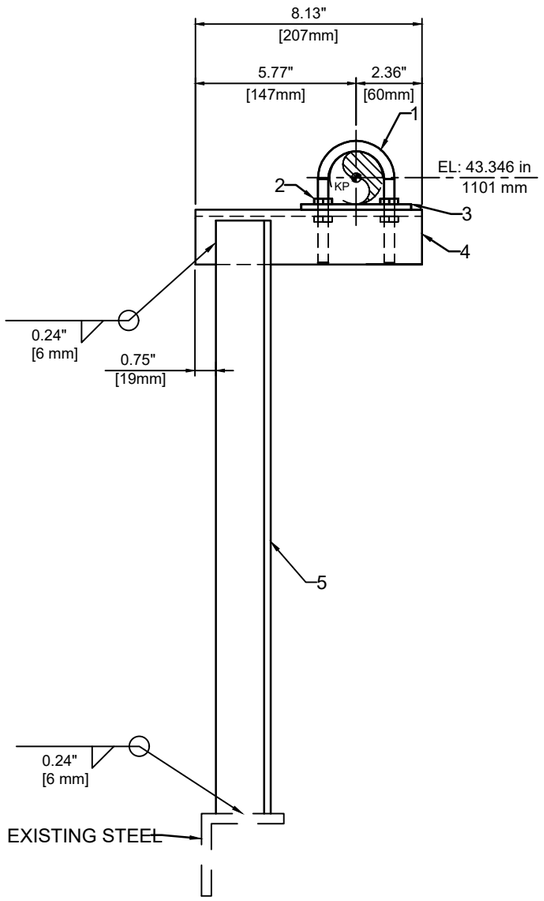


LOOKING FUEL GAS UNIT SIDE
1:5

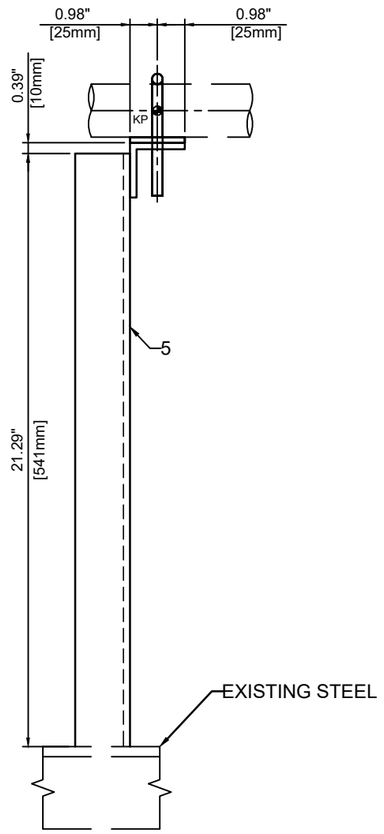


LOOKING INLET MANIFOLD SIDE
1:5

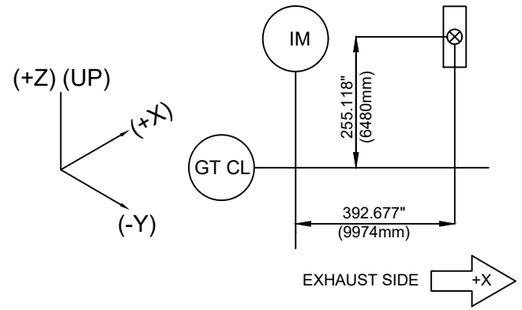

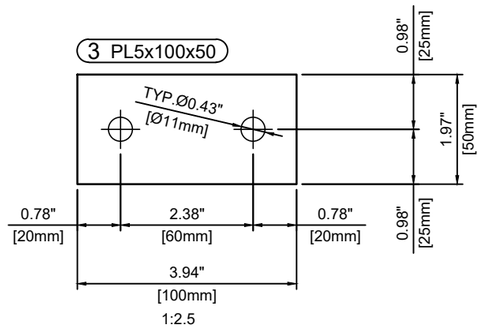

1:2.5

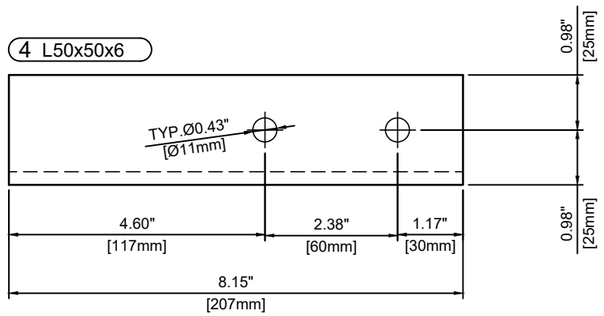

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8CI1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
4	L50x50x6	JIS G 3192			8.15	207	1	2.02	0.92	SS400
5	L50x50x6	JIS G 3192			21.29	541	1	5.28	2.40	SS400
						GRAND TOTAL		8.20	3.72	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-35
PAGE NUMBER:	1 OF 1

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR101


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

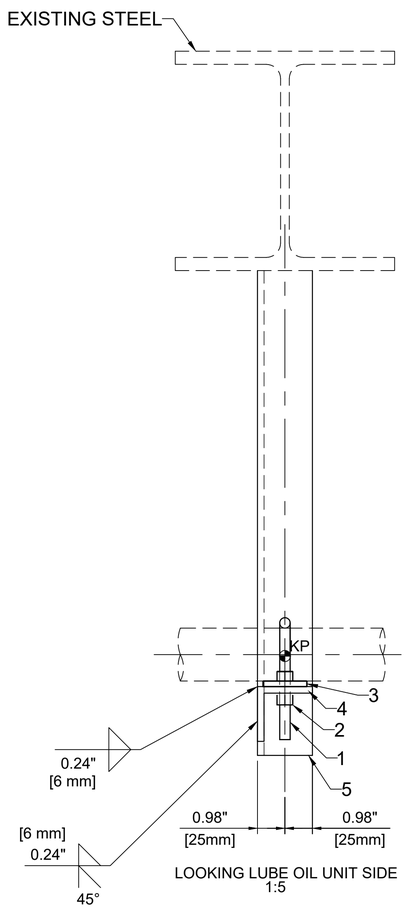



LOOKING LUBE OIL UNIT SIDE
1:5

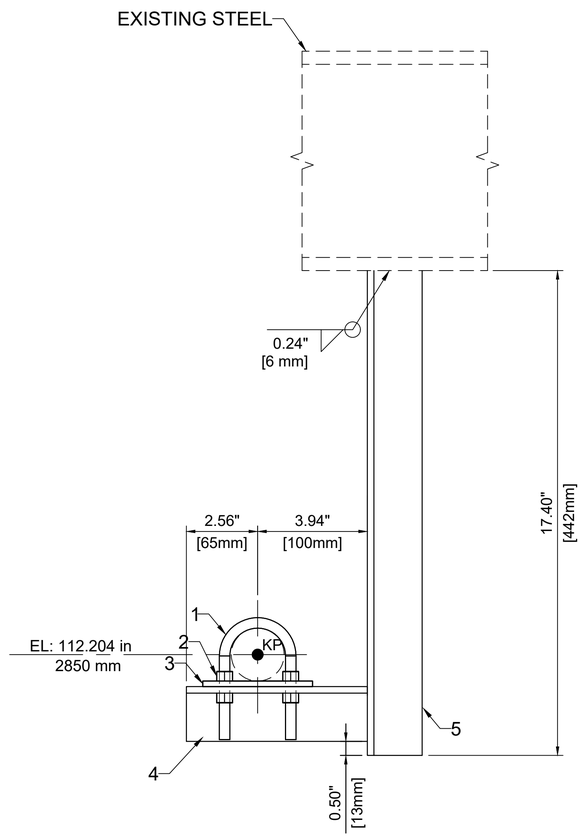

LOOKING EXHAUST SIDE
1:5

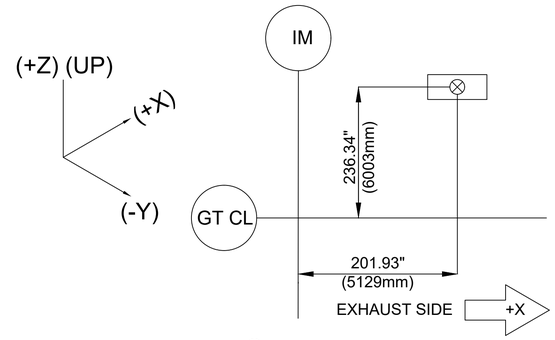

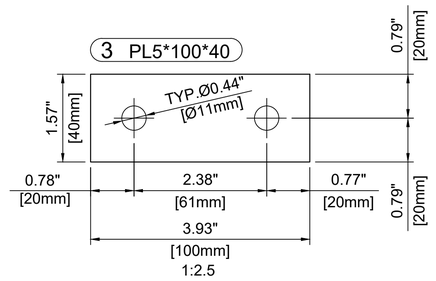

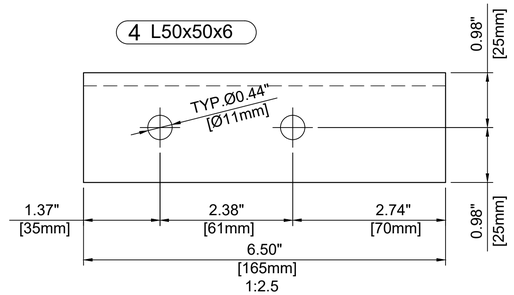

Item	Description	Lisega Size /Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
4	L50x50x6	JIS G 3192			6.50	165	1	1.61	0.73	SS400
5	L50x50x6	JIS G 3192			17.40	442	1	4.32	1.96	SS400
							GRAND TOTAL	6.74	3.06	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-49

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: No C2
LINE NO: **QFF11BR101


Pipe OD = 1.90 inch
Pipe DesignTemp.= 140 °F
Insul= 0 inch

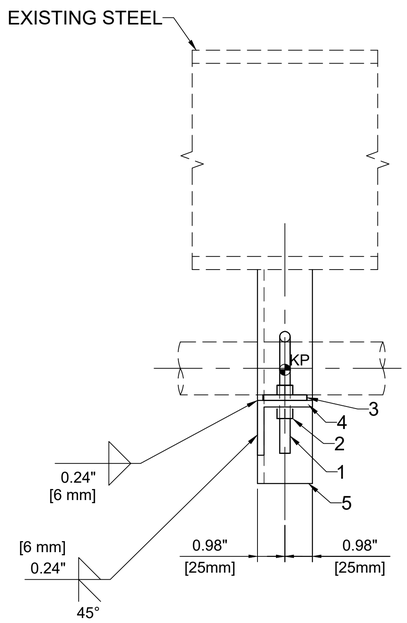


LOOKING LUBE OIL UNIT SIDE
1:5

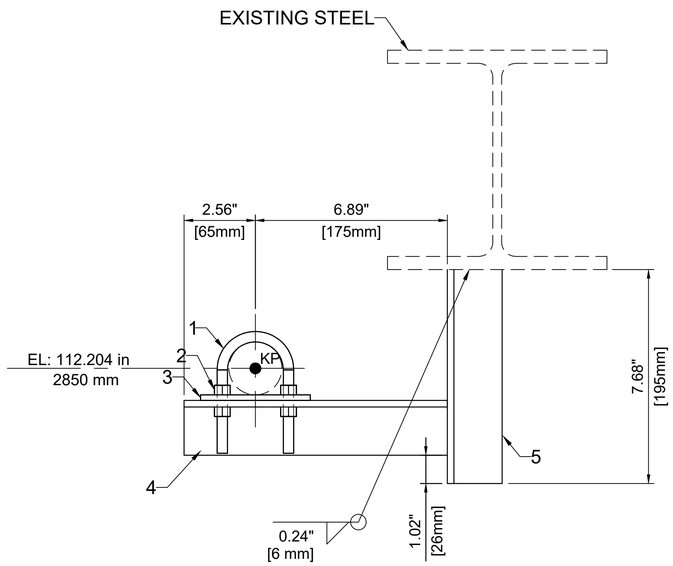


LOOKING EXHAUST SIDE
1:5

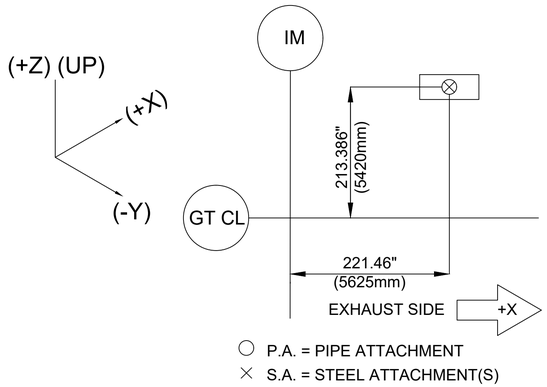


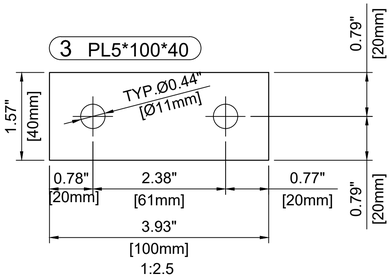

1:2.5



ISOMETRIC VIEW

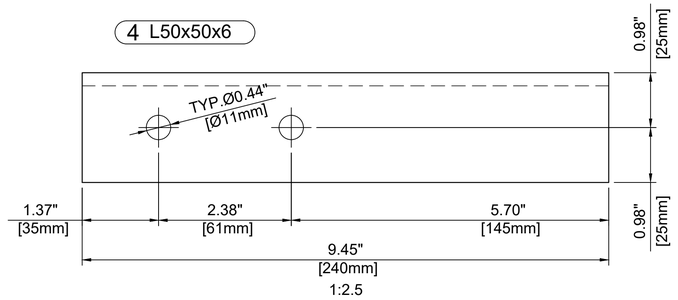

1:2.5

Item	Description	Lisega Size /Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
4	L50x50x6	JIS G 3192			9.45	240	1	2.34	1.06	SS400
5	L50x50x6	JIS G 3192			7.68	195	1	1.90	0.86	SS400
						GRAND TOTAL		5.06	2.29	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-50

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR101


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

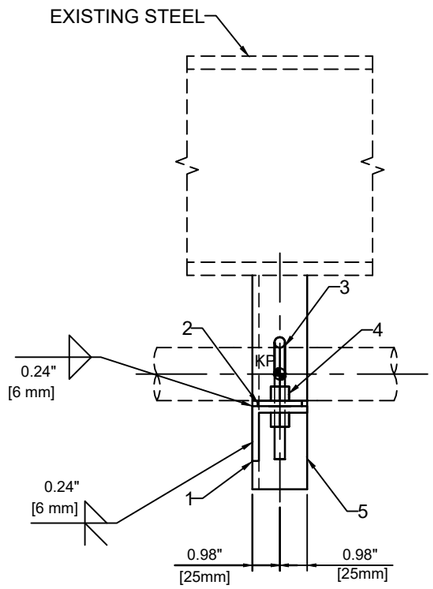


LOOKING LUBE OIL UNIT SIDE
1:5

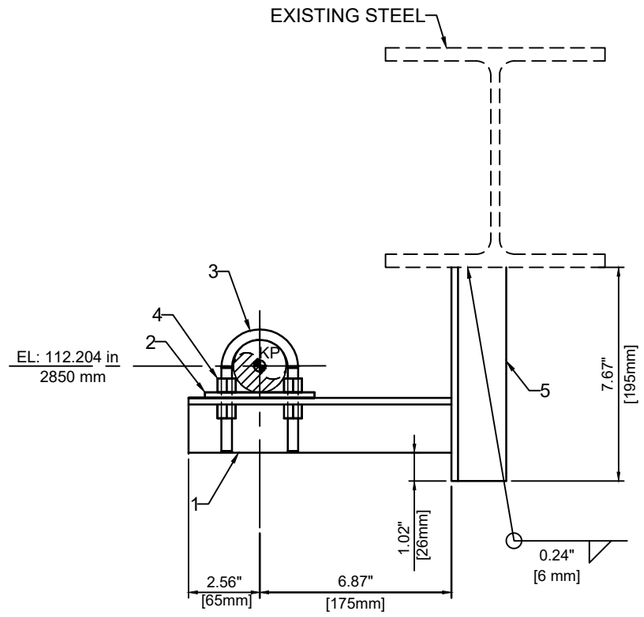


LOOKING EXHAUST SIDE
1:5

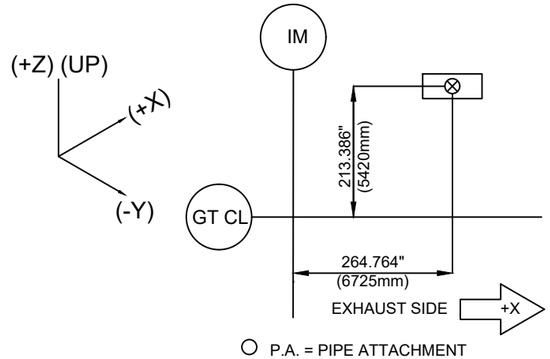


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)



ISOMETRIC VIEW

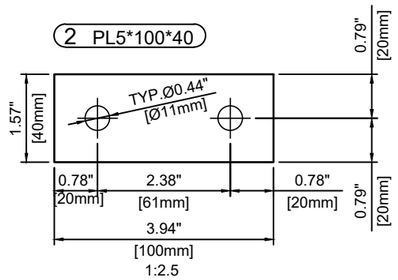

1:2.5

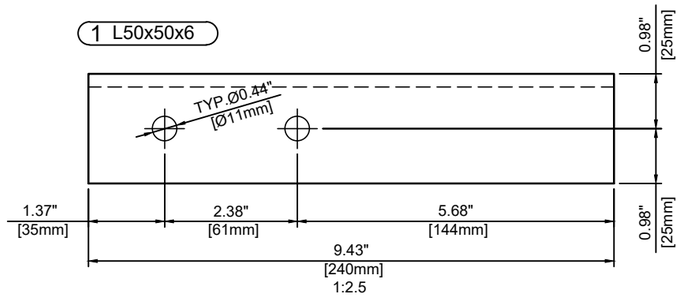

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	L50x50x6	JIS G 3192			9.45	240	1	2.34	1.06	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8CI1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
5	L50x50x6	JIS G 3192			7.68	195	1	1.90	0.86	SS400
						GRAND TOTAL		5.06	2.29	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-51

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:


DRAWING DISTRIBUTION LIST

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE:	No C2
LINE NO:	**QFF11BR630
Pipe OD =	1.9 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch
NODE:	No C2
LINE NO:	**QFF11BR101
Pipe OD =	1.9 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch
NODE:	11040
LINE NO:	**QJA05BR099
F(X) =	-5 lbs
F(Y) =	-8 lbs
F(Z) =	-17 lbs
(X)=	-0.148 inch
(Y)=	0 inch
(Z)=	0 inch
Pipe OD =	1.315 inch
Pipe DesignTemp.=	70 °F
Insul=	0 inch




ISOMETRIC VIEW

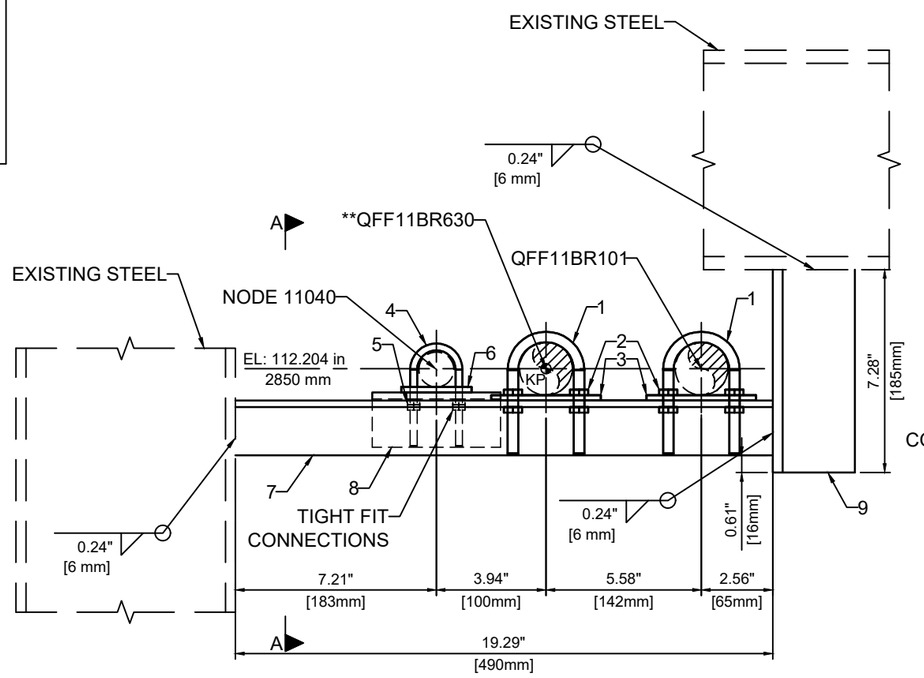


LOOKING EXHAUST SIDE
1:5

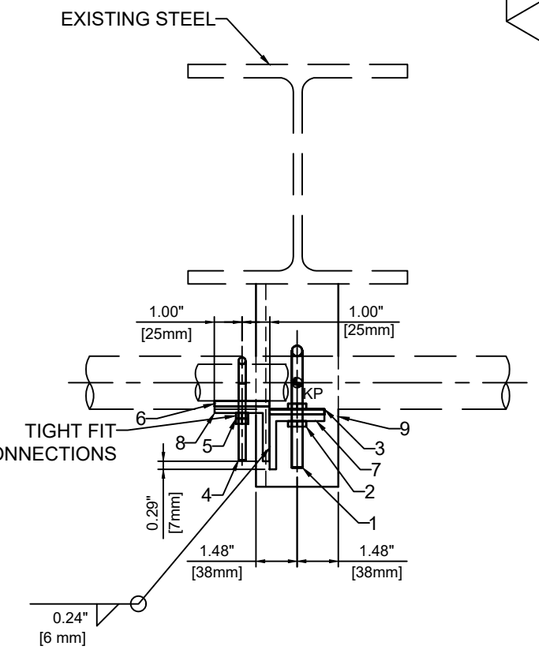

VIEW A-A
1:5

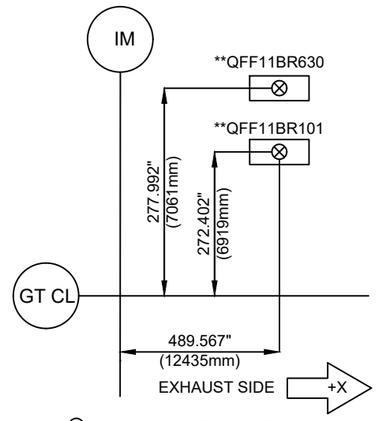

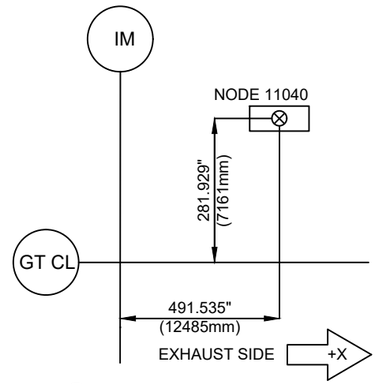

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					2	0.74	0.34	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						8	0.18	0.08	STAINLESS STEEL
3	PL5		1.97	50	3.94	100	2	0.87	0.39	ASTM A240-304
4	Standard U-Bolt, 1"	400348					1	0.13	0.06	A193GrB8Cl1
5	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	STAINLESS STEEL
6	PL5		1.97	50	2.52	64	1	0.28	0.13	ASTM A240-304
7	L50x50x6	JIS G 3192			19.29	490	1	4.79	2.17	SS400
8	L50x50x6	JIS G 3192			4.60	117	1	1.14	0.52	SS400
9	L75x75x9	JIS G 3192			7.28	185	1	3.71	1.68	SS400
						GRAND TOTAL		11.87	5.39	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-53

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


6. Ø11 mm HOLES TO BE DRILLED ON EXISTING STEEL FOR U-BOLT

NODE:	No C2
LINE NO:	**QFF11BR013


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

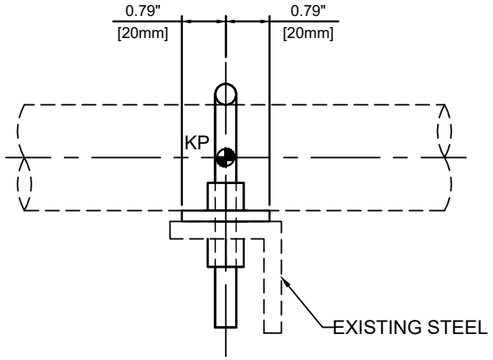


LOOKING FUEL GAS UNIT SIDE
1:2.5

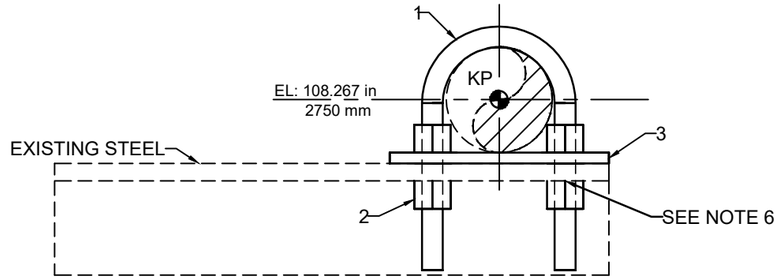


LOOKING EXHAUST SIDE
1:2.5

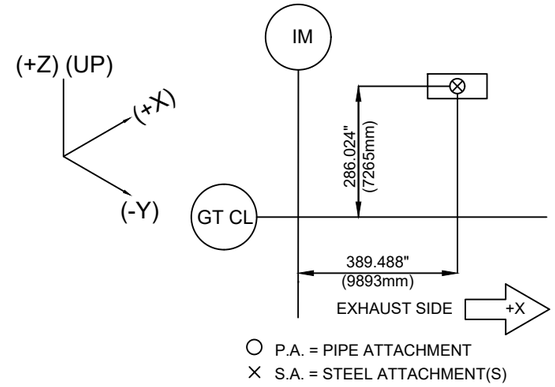



ISOMETRIC VIEW

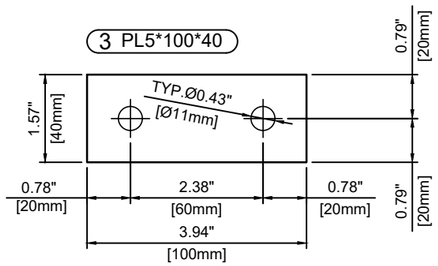

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
						GRAND TOTAL		0.81	0.37	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-78

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


6. Ø11 mm HOLES TO BE DRILLED ON EXISTING STEEL FOR U-BOLT

NODE:	No C2
LINE NO:	**QFF11BR013


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

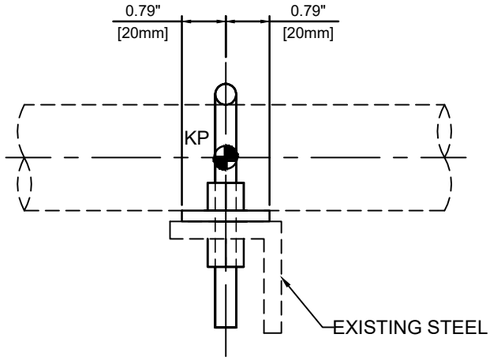


LOOKING FUEL GAS UNIT SIDE
1:2.5

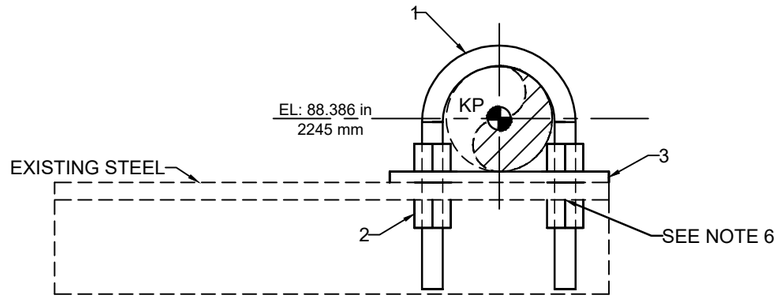

LOOKING EXHAUST SIDE
1:2.5

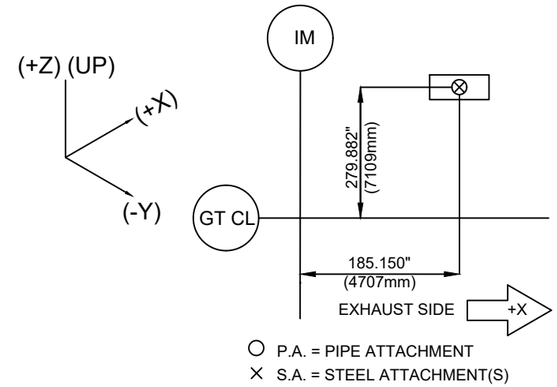

ISOMETRIC VIEW

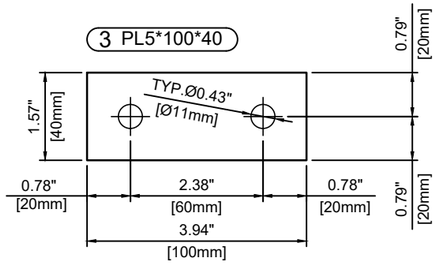

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
						GRAND TOTAL		0.81	0.37	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-88
PAGE NUMBER:	1 OF 1

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


6. Ø11 mm HOLES TO BE DRILLED ON EXISTING STEEL FOR U-BOLT

NODE:	No C2
LINE NO:	**QFF11BR013


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

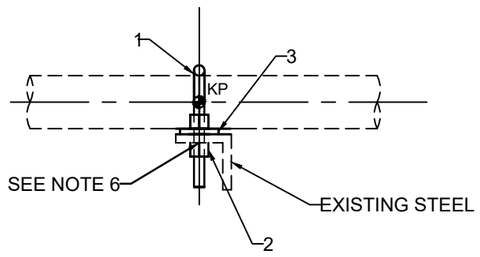


LOOKING FUEL GAS UNIT SIDE
1:5

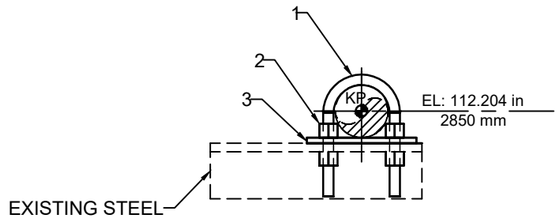


LOOKING EXHAUST SIDE
1:5

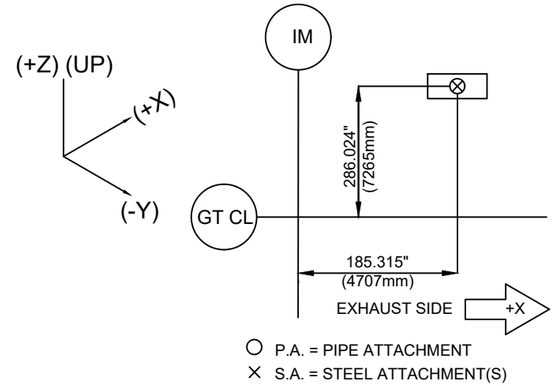



ISOMETRIC VIEW

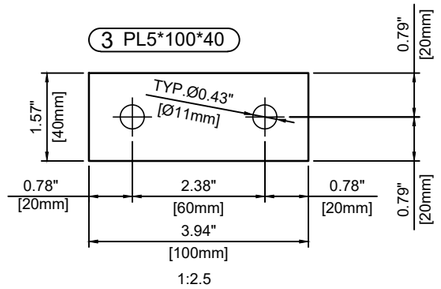

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8CI1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
						GRAND TOTAL		0.81	0.37	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-89

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


6. Ø11 mm HOLES TO BE DRILLED ON EXISTING STEEL FOR U-BOLT

NODE:	No C2
LINE NO:	**QFF11BR018


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

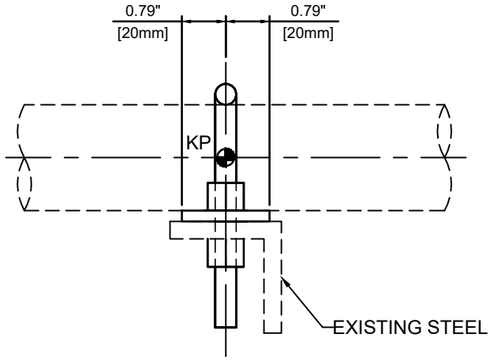


LOOKING FUEL GAS UNIT SIDE
1:2.5

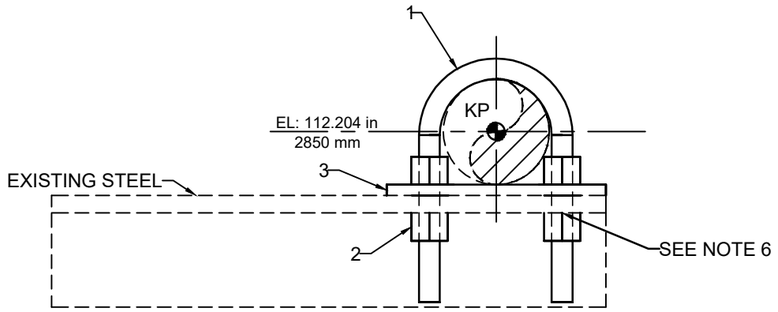


LOOKING EXHAUST SIDE
1:2.5

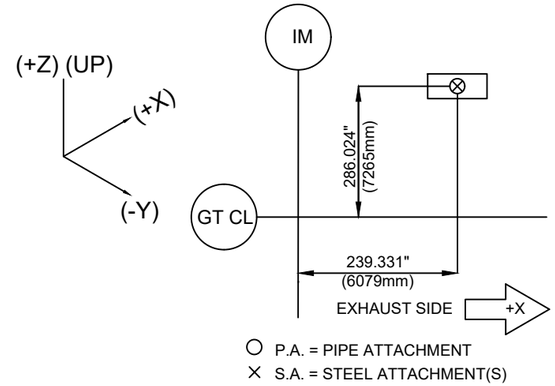



ISOMETRIC VIEW

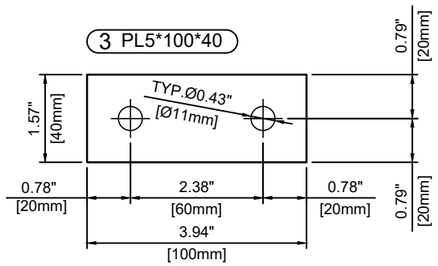

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
						GRAND TOTAL		0.81	0.37	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-90

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR017


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

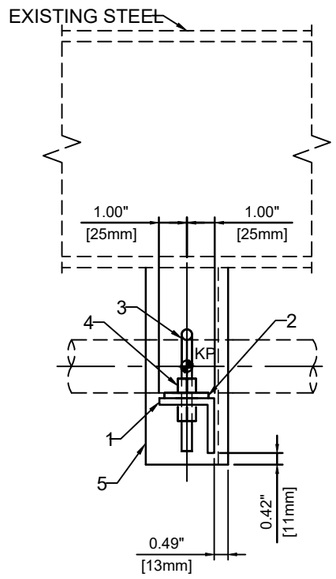


LOOKING EXHAUST SIDE
1:5

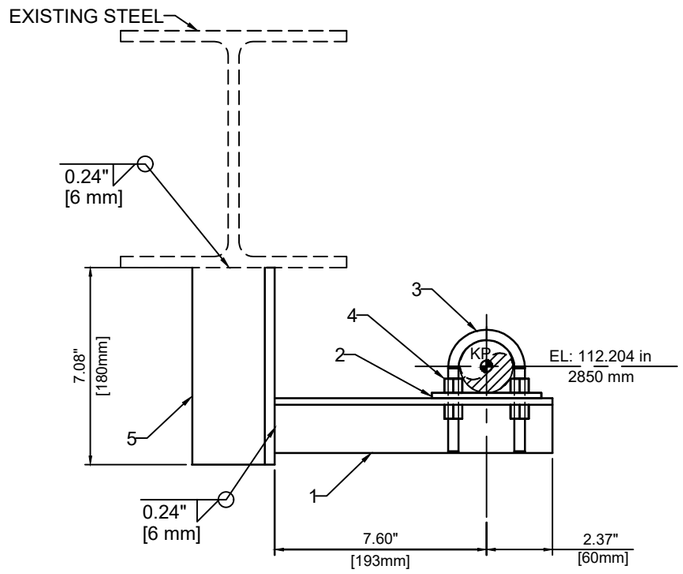



LOOKING LUBE OIL UNIT SIDE
1:5

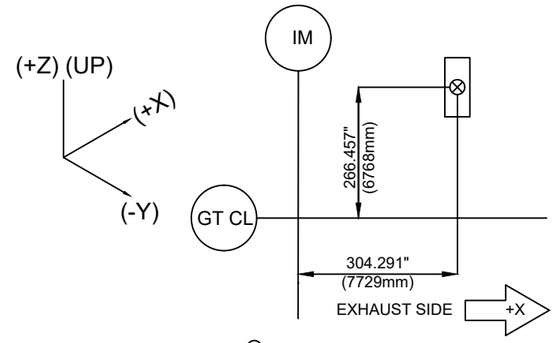



ISOMETRIC VIEW

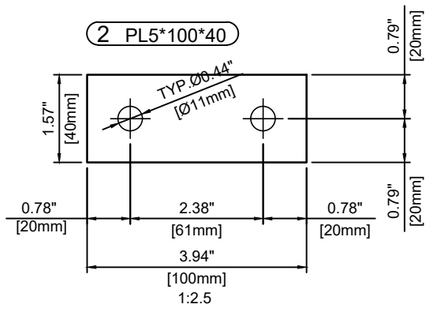

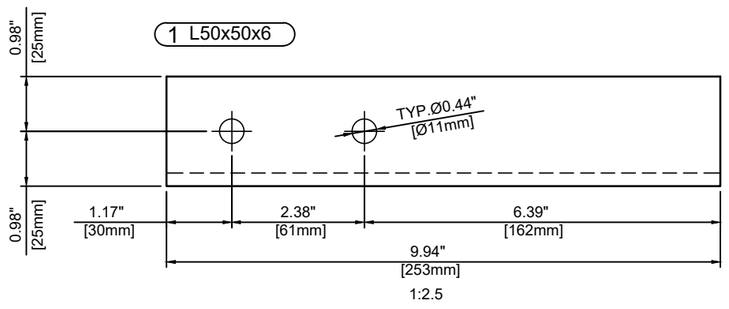

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	L50x50x6	JIS G 3192			9.94	253	1	2.47	1.12	SS400
2	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
3	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
4	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
5	L75x75x9	JIS G 3192			7.09	180	1	3.95	1.79	SS400
						GRAND TOTAL		7.23	3.28	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-91

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER


6. Ø14 mm HOLES TO BE DRILLED ON EXISTING STEEL FOR U-BOLT

NODE:	No C2
LINE NO:	**QFF11BR013


Pipe OD =	4.50	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

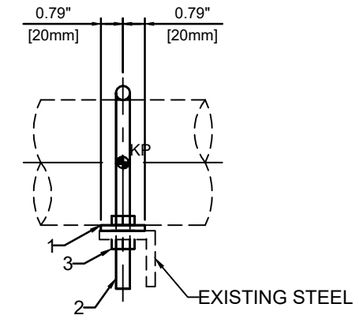


LOOKING FUEL GAS UNIT SIDE
1:5

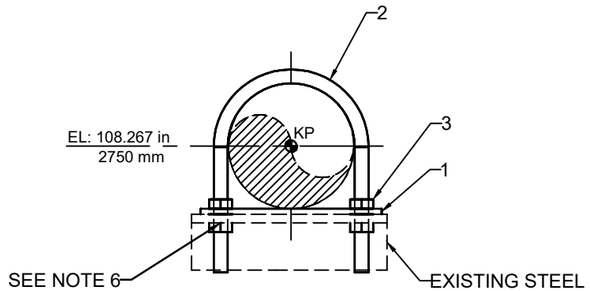


LOOKING EXHAUST SIDE
1:5

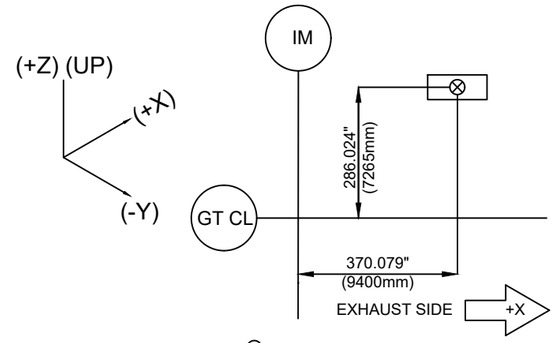



ISOMETRIC VIEW

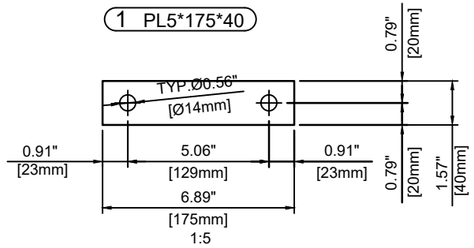

1:5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	PL5		1.57	40	6.89	175	1	0.61	0.27	ASTM A240-304
2	Standard U-Bolt, 4.50"	401148					1	1.04	0.47	A193GrB8CI1
3	Heavy Hex Nut for U-Bolt 1/2"						4	0.26	0.12	STAINLESS STEEL
						GRAND TOTAL		1.91	0.86	

MODULE NO:
MD-2.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-92

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR013


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

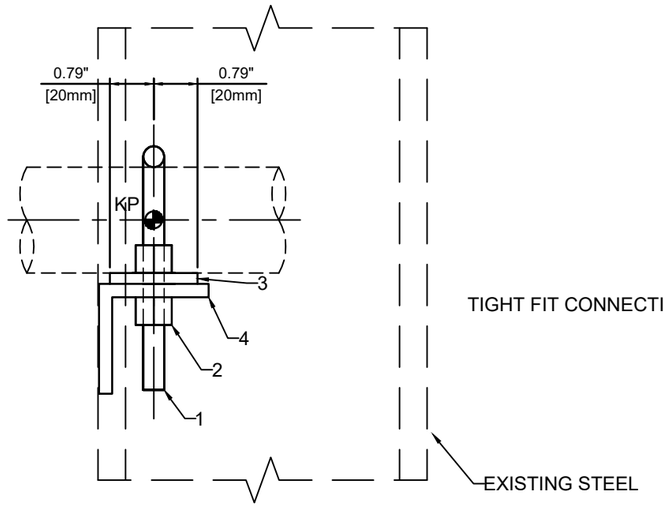


LOOKING EXHAUST SIDE
1:2.5

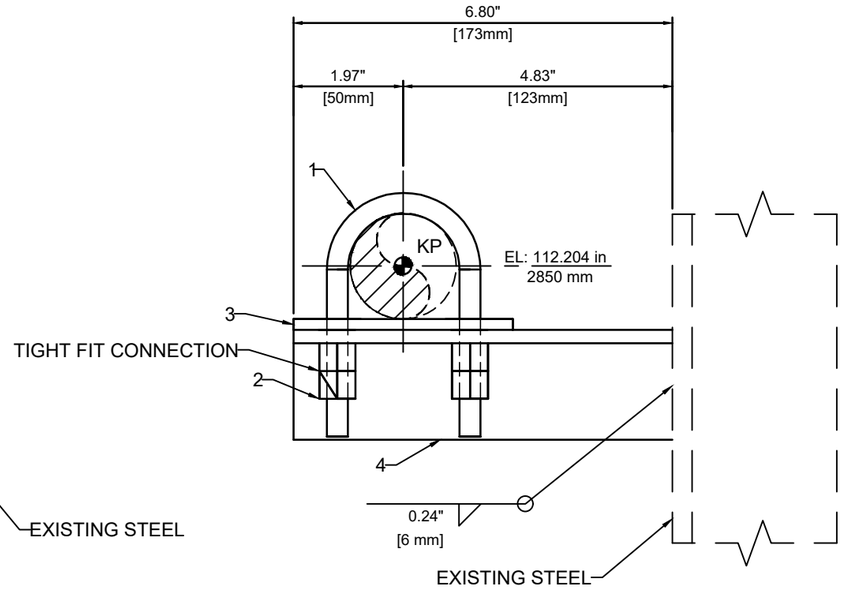



LOOKING FUEL GAS UNIT SIDE
1:2.5

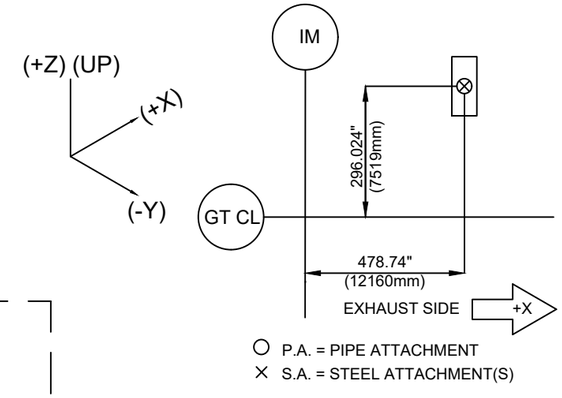



ISOMETRIC VIEW

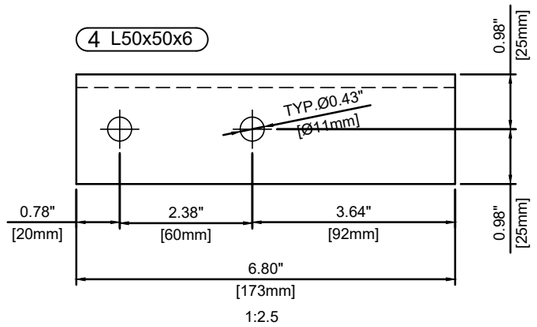

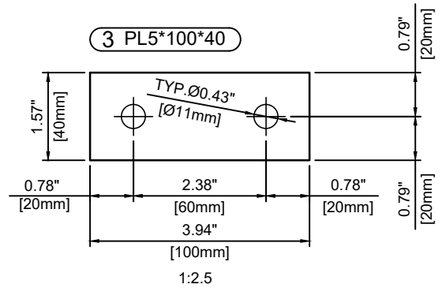

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	1	0.35	0.16	ASTM A240-304
4	L50x50x6	JIS G 3192			6.80	173	1	1.69	0.77	SS400
						GRAND TOTAL		2.50	1.13	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-94

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR016
Pipe OD =	1.90 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch


NODE:	No C2
LINE NO:	**QFF11BR019
Pipe OD =	1.90 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch

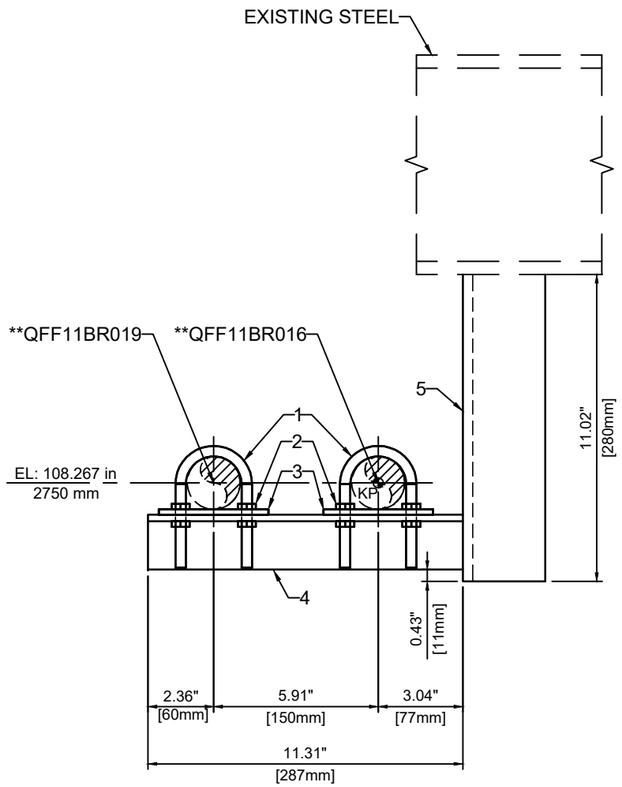


LOOKING FUEL GAS UNIT SIDE
1:5

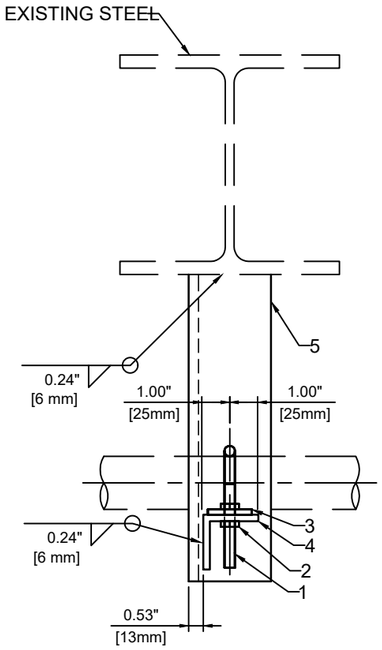


LOOKING EXHAUST SIDE
1:5

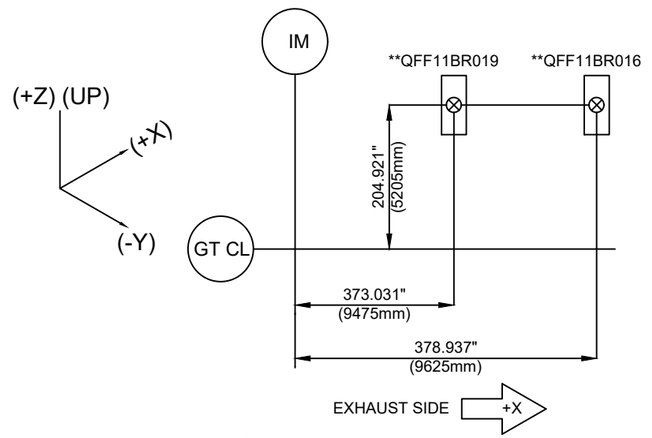




ISOMETRIC VIEW

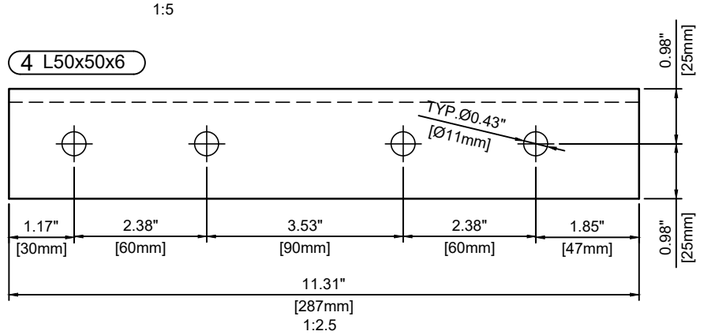

1:2.5

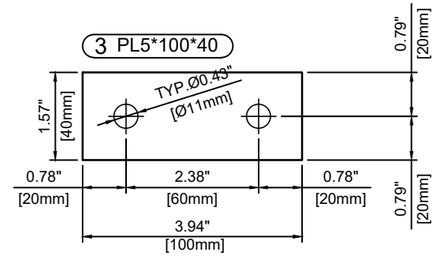

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					2	0.74	0.34	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						8	0.18	0.08	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	2	0.69	0.31	ASTM A240-304
4	L50x50x6	JIS G 3192			11.31	287	1	2.80	1.27	SS400
5	L75x75x9	JIS G 3192			11.02	280	1	6.15	2.79	SS400
						GRAND TOTAL		10.56	4.79	

MODULE NO:
MD-1.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-95

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR016
Pipe OD =	1.90 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch


NODE:	No C2
LINE NO:	**QFF11BR019
Pipe OD =	1.90 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch

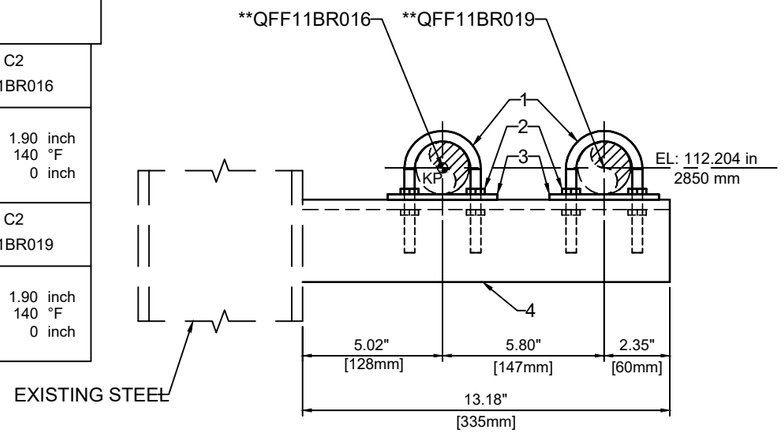


LOOKING EXHAUST SIDE
1:5

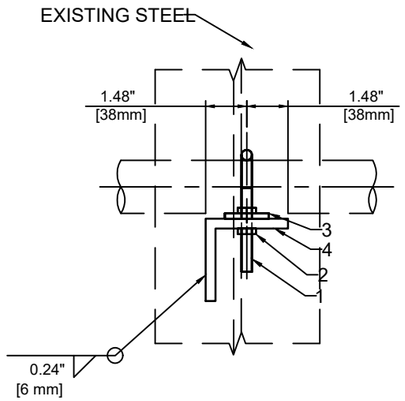


LOOKING FUEL GAS UNIT SIDE
1:5

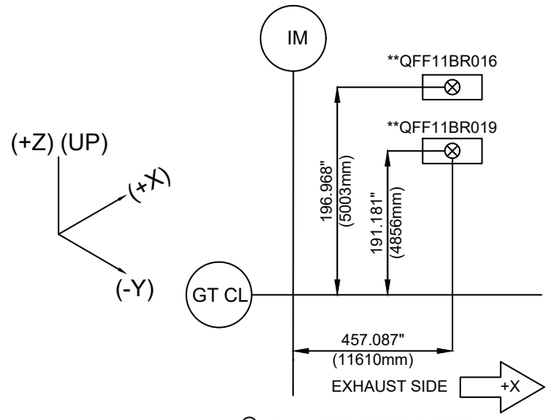



ISOMETRIC VIEW

4 L75x75x9

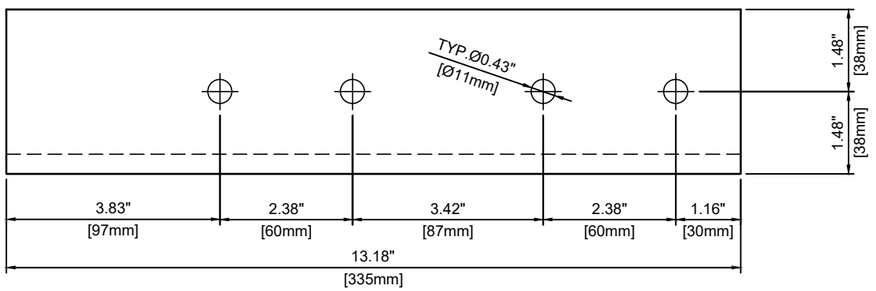

1:2.5

3 PL5*100*40

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					2	0.74	0.34	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						8	0.18	0.08	STAINLESS STEEL
3	PL5		1.57	40	3.94	100	2	0.69	0.31	ASTM A240-304
4	L75x75x9	JIS G 3192			13.19	335	1	7.36	3.34	SS400
						GRAND TOTAL		8.97	4.07	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**24A0A-PS-96

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER:	1 OF 1


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	No C2
LINE NO:	**QFF11BR019


Pipe OD =	1.90	inch
Pipe DesignTemp.=	140	°F
Insul=	0	inch

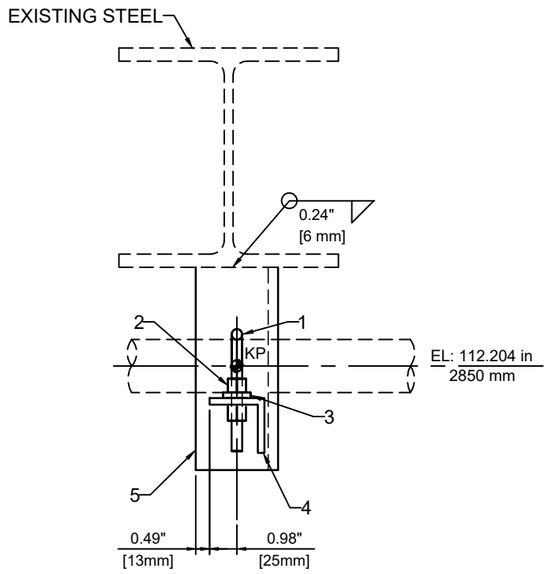


LOOKING INLET MANIFOLD SIDE
1:5

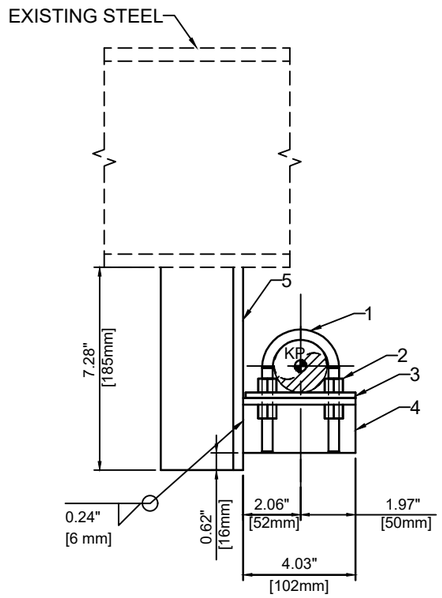


LOOKING FUEL GAS UNIT SIDE
1:5

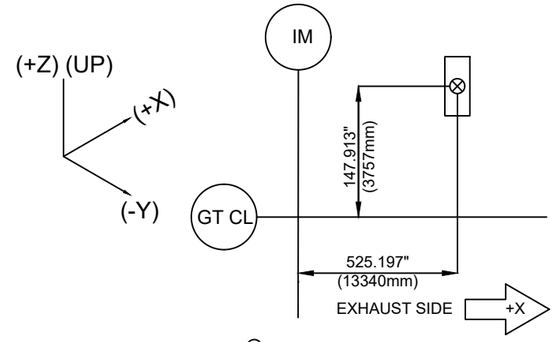


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)



ISOMETRIC VIEW

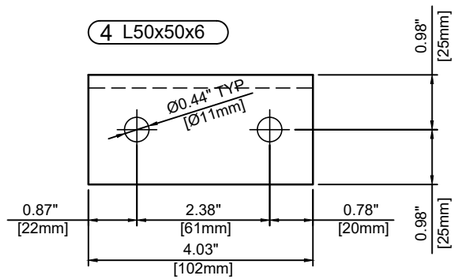

1:2.5

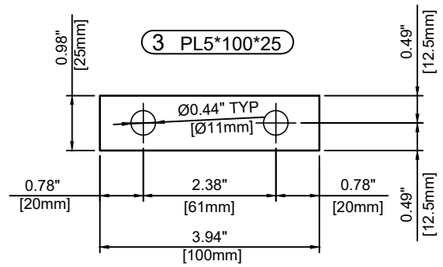

1:2.5

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8CI1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		0.98	25	3.94	100	1	0.22	0.10	ASTM A240-304
4	L50x50x6	JIS G 3192			4.02	102	1	1.00	0.45	SS400
5	L75x75x9	JIS G 3192			7.28	185	1	4.06	1.84	SS400
						GRAND TOTAL		5.74	2.60	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-97

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	NO C2
LINE NO:	**QFF11BR117


Pipe OD =	1.90 inch
Pipe DesignTemp.=	140 °F
Insul=	0 inch




ISOMETRIC VIEW

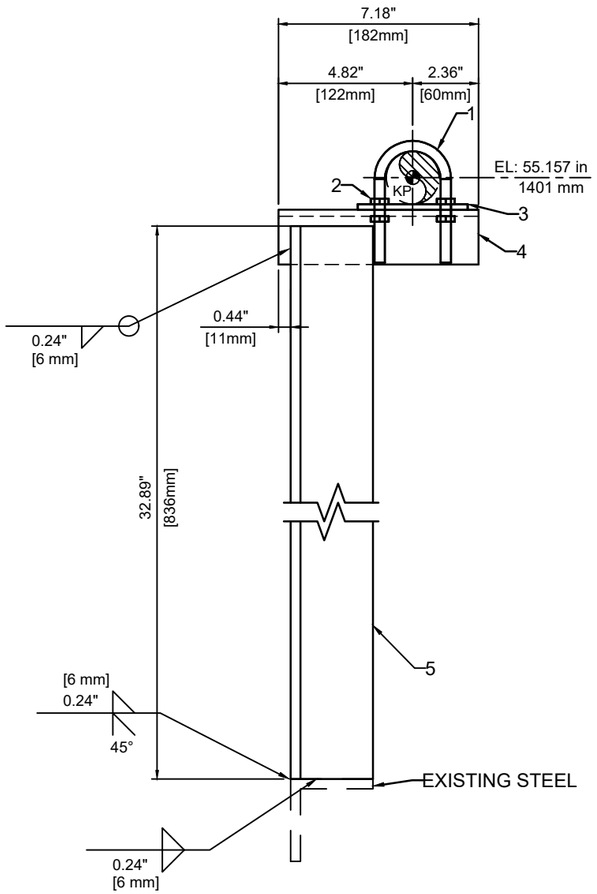


LOOKING LUBE OIL UNIT SIDE
1:5

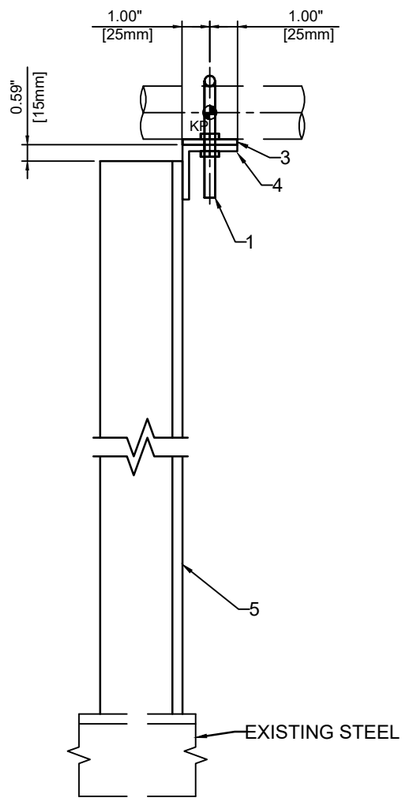


LOOKING EXHAUST SIDE
1:5

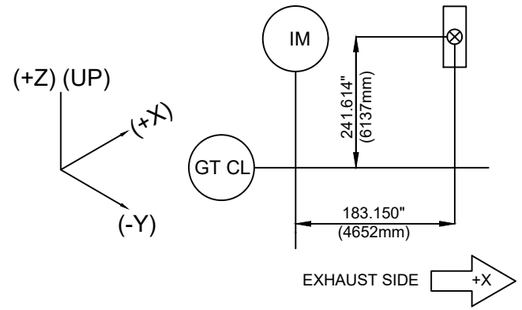

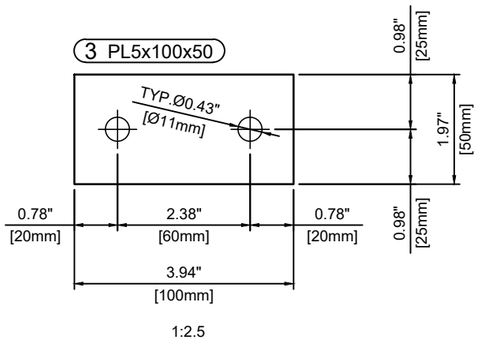

1:2.5

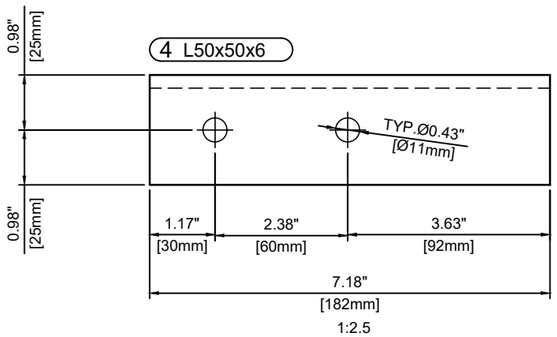

1:2.5

Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 1.90"	400548					1	0.37	0.17	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/8"						4	0.09	0.04	STAINLESS STEEL
3	PL5		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304
4	L50x50x6	JIS G 3192			7.18	182	1	1.78	0.81	SS400
5	L75x75x9	JIS G 3192			32.89	836	1	18.35	8.32	SS400
						GRAND TOTAL		21.02	9.54	

MODULE NO:
MD-1.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING

PLANT ENGINEERING

DEPARTMENT:

SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **24A0A-PS-112

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER