Experiment - 4 date: 10/03/2026

Aim:

To design, set up, and configure a LAN connecting four computers through a network switch, assign static IP addresses to all devices.

Procedure

1. Place the Devices from the device category panel in Cisco Packet Tracer.

2. Cable the devices to the switch and select available FastEthernet port.

3. Assign IP Addresses to PCs as per the IP table.


4. Configure the Switch Management IP by entering the commands

```
enable
configure terminal
interface vlan 1
ip address 1.0.1.1.5.255.0.00
no shutdown
exit.
```

5. Verify connectivity using ping by using the ping command to test connectivity to the other PC's.

6. Demonstrate data sharing by adding a server device and connecting to the switch.

7. Observe Packet Flow in Simulation Mode by sending a ping or webrequest between two devices and click play.

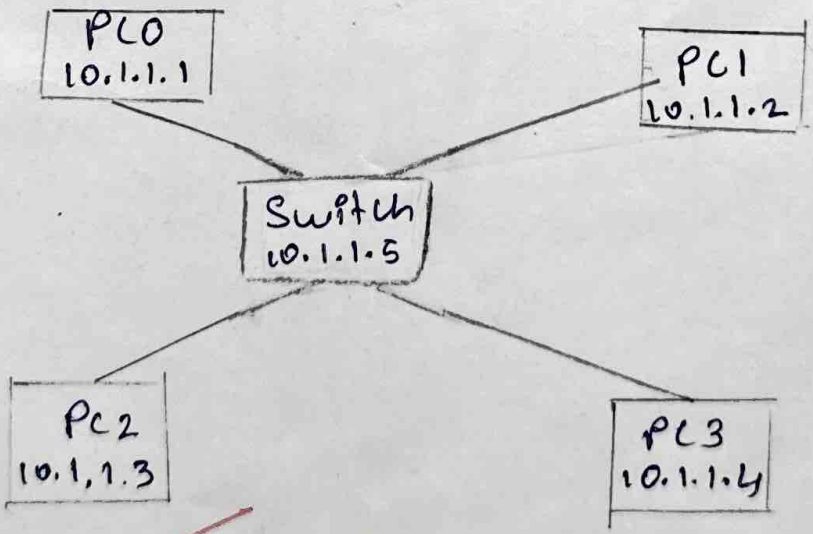


Result -

Successfully connected all four PC's to the switch in a star topology and tested ping between all devices.