
Experiment - 9

Aim -
Implementation of subnetting in cisco packet tracer simulator.

creating a network topology:
To create a network topology in packet trace, select "new" button in top.

Adding the devices:
To add a device, select the device from bottom left and drag it onto network topologys.

Subnetting:
To subnet the network address of 192.168.1.10/24 to provide enough space for atleast 5 address.

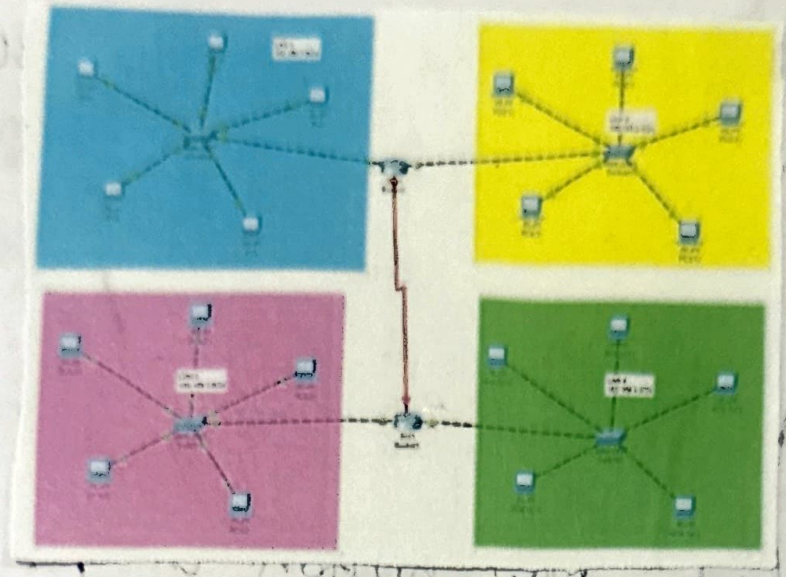

configuring the devices:

#enable

# configure terminal

# interface Fast Ethernet o/p

# i/p address.

Testing the network:

| Fire | Last Status | Source | Destination | Type | Color | Time(sec) | Periodic | Num |
|---|---|---|---|---|---|---|---|---|
| | Successful | PC4(2) | Router2 | ICMP | | 0.000 | N | 12 |
| | Successful | PC4(2) | PC2(1)(1) | ICMP | | 0.000 | N | 13 |
| | Successful | PC0 | Router0 | ICMP | | 0.000 | N | 14 |

Result:

The implementation of subnetting in cisco packet tracer simulator was executed successfully.