
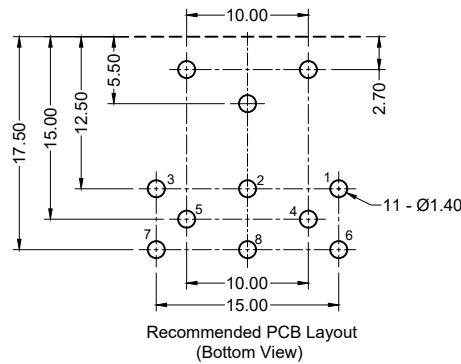
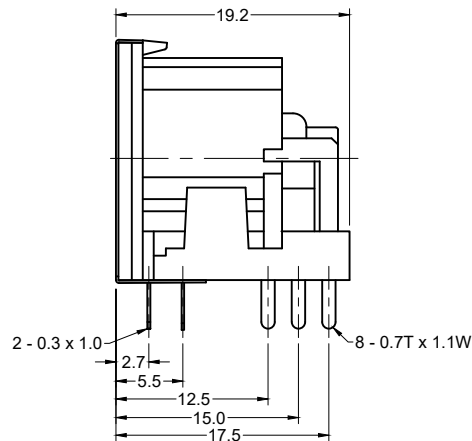


KCDX-8S-S
Shown

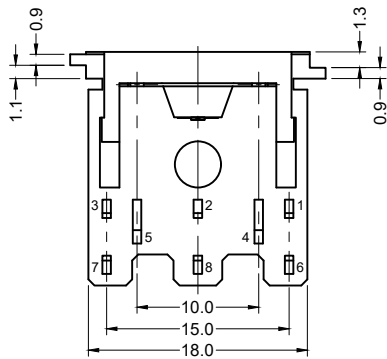

Materials and Finish

Material-PBT Thermoplastic
UL94V-0 Rated
Color: black

Contact: Brass, Matte tin plated

Shield: Phosphor Bronze, Nickel plated

Electrical Characteristics

Rated Current: 2.0 AMP DC

Rated Voltage: 24.0V DC

Insulation Resistance
100 Megohms min. at 500V DC

Contact Resistance
Before Test : 50 Milliohms max.
After Test: 100 Milliohms max.

Dielectric Withstanding Voltage
500V AC for 1 minute

Operating Temperature
-25°C to 85°C

Mechanical Characteristics

Insertion Force
0.5kg - 4.5kg

Withdrawal Force
0.5kg - 4.5kg

Durability
5000 cycles

KCDX-3S-S	KCDX-4S-S	KCDX-6S-S	KCDX-7S-S
Conn. Face	Conn. Face	Conn. Face	Conn. Face
Bottom View	Bottom View	Bottom View	Bottom View



RoHS COMPLIANT

Tolerances

X.X ± 0.3
X.XX ± 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	2/2/06	New Drawing	R. Aguirre	H. MA	R. Aguirre	01/17/06
A1	4/10/06	Release Drawing	H. MA	N/A		
A2	05/19/11	ECO #11-006	S. Vien	H. MA		
A3	06/20/13	ECO #13-043	W. Cook	P. DalCanto		
A4	08/06/18	Address Update	G. Serrato	D. Shehan		
A5	01/19/24	ECO #24-001	C. Kelleher	W. Cook		

KCDX-xS-S

X= number of contacts

Circular DIN, RoHS Compliant

Front Shielded, 10mm Tab Spacing

