



SULPA S38-75-A1

High-Capacity 4-in-1 Motor Driver (ESC)

AM32 Firmware

1. ELECTRICAL SPECIFICATIONS

MCU	AT32F421 (ARM Cortex-M4)
Firmware	AM32 Custom Pre-flashed
Continuous Current	4 x 60A
Burst Current	4 x 75A (10 Seconds)
Input Voltage	3-8S LiPo (10V - 35V DC)
PWM Frequency	8 kHz - 128 kHz (Adjustable)
Current Sensor	Analog, Scale: 91
Telemetry	Supported (TX Pad)
Supported Protocols	DSHOT600/300/150, Oneshot, Multishot, PWM
Target Applications	Heavy-Duty FPV, Cinelifters, UAVs

2. PHYSICAL DIMENSIONS

Weight	13g (Without cables)
Mounting Pattern	30.5 x 30.5mm / M3
PCB Dimensions	42.7 x 41.5mm
Operating Temp.	-40°C to +105°C


3. PACKAGE CONTENTS

- 1x S38-75-A1 4-in-1 ESC
- 1x 680uF 63V Low-ESR Capacitor
- 1x XT60-M Connector with 10cm Cable
- 5x M3 Silicone Shock-Absorbing Grommets
- 1x 28AWG 40mm SH1.0-8P Cable (Dual Socket)
- 1x 28AWG 60mm SH1.0-8P Cable (Single Socket)


CRITICAL: Capacitor Installation

Always solder the included **680uF 63V** capacitor directly to the main power pads. It absorbs massive inductive voltage spikes generated by high-power setups, preventing hardware failure and MCU resets.

PRODUCT IMAGE

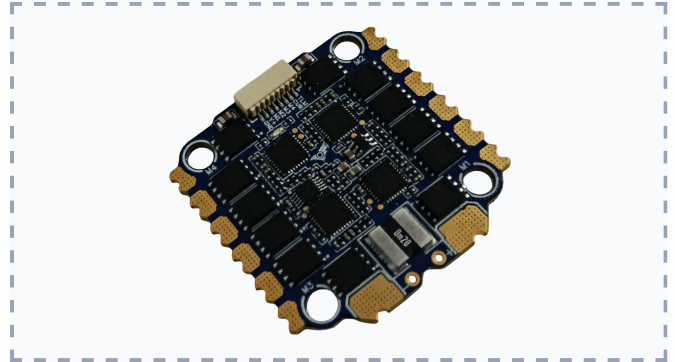

WIRING & PINOUT LAYOUT

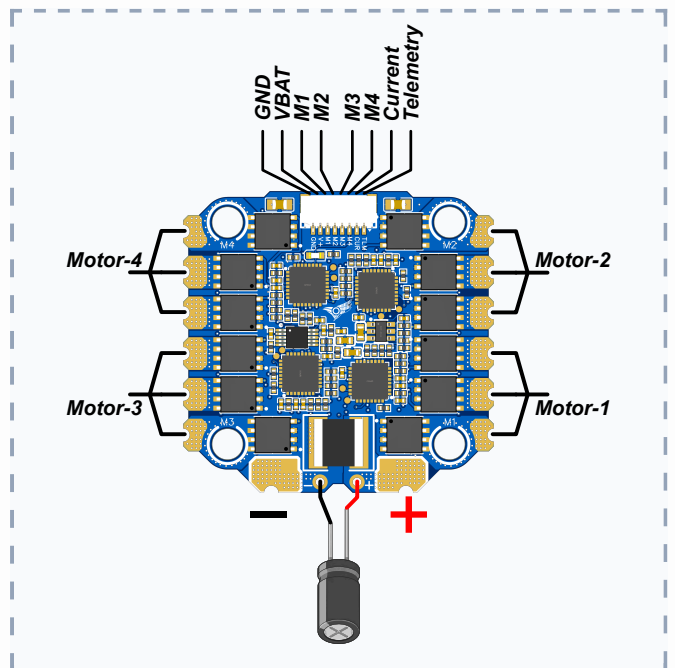

GND	Signal Ground
VBAT	Battery Voltage Output (To FC)
M1 - M4	Motor Signal Inputs (PWM/ Dshot)
CUR	Analog Current Sensor Output
TLM	ESC Telemetry Output (TX)