

Qty.	Description
1	NK 65-180/172 AA1F2S3ESBQQEOW1 Product No.: 93052617 Non-self-priming, single-stage, centrifugal pump designed according to ISO 5199 with dimensions and rated performance according to EN 733. Flanges are PN 16 with dimensions according to EN 1092-2. The pump has an axial suction port, a radial discharge port and horizontal shaft. It is of the back pull-out design enabling removal of the motor, coupling, bearing bracket and impeller without disturbing the pump housing or pipework. The unbalanced rubber bellows seal is according to DIN EN 12756. The pump is fitted with a foot-mounted, fan-cooled asynchronous motor. Pump and motor are mounted on a common base frame. The product's minimum efficiency index (MEI) is greater or equal to 0.70. This is by the Commission Regulation (EU) considered as an indicative benchmark for best-performing water pump available on the market as from 1 January 2013. Pump The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft.  Seal faces: • Rotating seal ring material: silicon carbide (SiC) • Stationary seat material: silicon carbide (SiC) This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils. The wetted parts of the shaft is made of stainless steel and has a diameter of 24 mm where the coupling is mounted. The language on the pump nameplate is Chinese. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034. The motor efficiency is classified as IE3 in accordance with IEC 60034-30-1. The motor has thermistors (PTC sensors) in the windings in accordance with DIN 44081/DIN 44082. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. Thermal switches must be connected to an external control circuit in a way which ensures that the automatic reset cannot cause accidents. The motors must be connected to a motor-protective circuit breaker according to local regulations. Further product details Cast-iron parts have high quality C3 M exterior painting to protect the product from corrosion. Technical data Controls: Frequency converter: None Pressure sensor: N

Qty.	Description
1	Liquid: Pumped liquid: Water Liquid temperature range: -25 .. 120 °C Selected liquid temperature: 50 °C Density: 988 kg/m³ Technical: Pump speed on which pump data are based: 2930 rpm Rated flow: 88.61 m³/h Pump with motor (Yes/No): Y Rated head: 34.93 m Actual impeller diameter: 172 mm Nominal impeller diameter: 180 Primary shaft seal: BQQE Code for shaft seal: BQQE Mechanical seal type: Single Curve tolerance: ISO9906:2012 2B Bearing design: Standard Materials: Type key, code for rubber components. E = EPDM, V=FKM: E Pump housing: Cast iron EN 1561 EN-GJL-250 ASTM A48-35 Impeller: Stainless steel EN 1.4308 ASTM A351 CF8 Pump house, internal coating: Painting Type key, code for materials: S3 Shaft: Steel EN 1.0503/1.4301 AISI 1045/304 Installation: Maximum ambient temperature: 40 °C Maximum operating pressure: 16 bar Pipe connection standard: EN 1092-2 Type of inlet connection: DIN Type of outlet connection: DIN Size of inlet connection: DN 80 Size of outlet connection: DN 65 Pressure rating for connection: PN 16 Coupling type: Flexible w/o spacer Base frame design: C-channel Code for base frame: 271 Grouting (Yes/No): N Electrical data:



Company name:

Created by:


Phone:

Date:

05/09/2026

Qty.	Description
1	Motor type: 160MB Rated power - P2: 15 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-400D/660-690Y V Rated current: 27,9-26,5/16,0-15,3 A Starting current: 810 % Cos phi - power factor: 0.89 Rated speed: 2930 rpm IE efficiency: IE3 91,9% IE Efficiency class: IE3 Motor efficiency at full load: 91.9 % Motor efficiency at 3/4 load: 91.9 % Motor efficiency at 1/2 load: 89.8 % Number of poles: 2 Enclosure class (IEC 34-5): IP55 (Protect. water jets/dust) Insulation class (IEC 85): F Built-in motor protection: PTC Motor No: 99546140 Bearing insulation type N-end: Steel bearing Others: Minimum efficiency index, MEI $\geq$: 0.70 Net weight: 226 kg Gross weight: 256 kg Shipping volume: 0.585 m³ Country of origin: CN Custom tariff no.: 84137000 Language on pump nameplate: CN


93052617 NK 65-180/172 AA1F2S3ESBQQEOW1 50 Hz

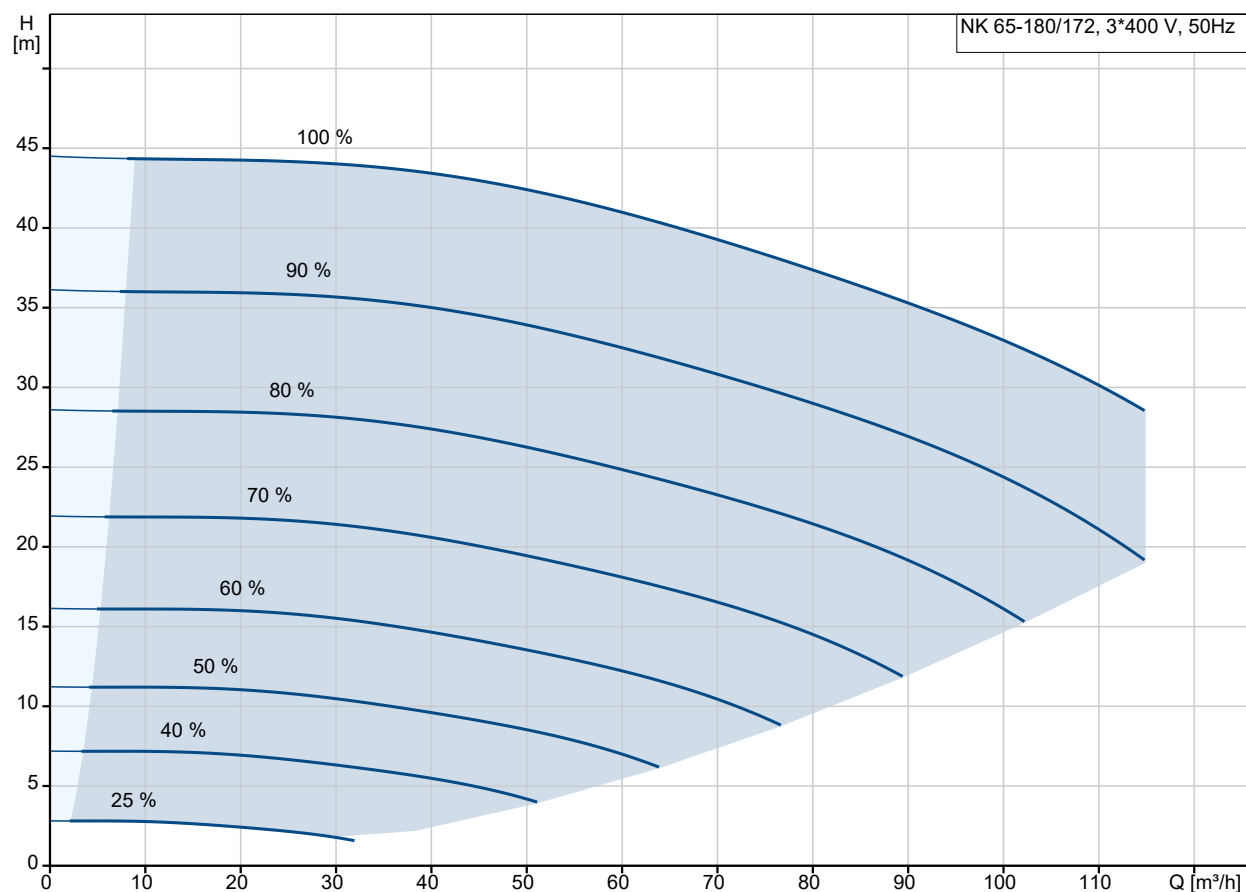


Pumped liquid = Water

Liquid temperature during operation = 50 °C




Density = 988 kg/m³

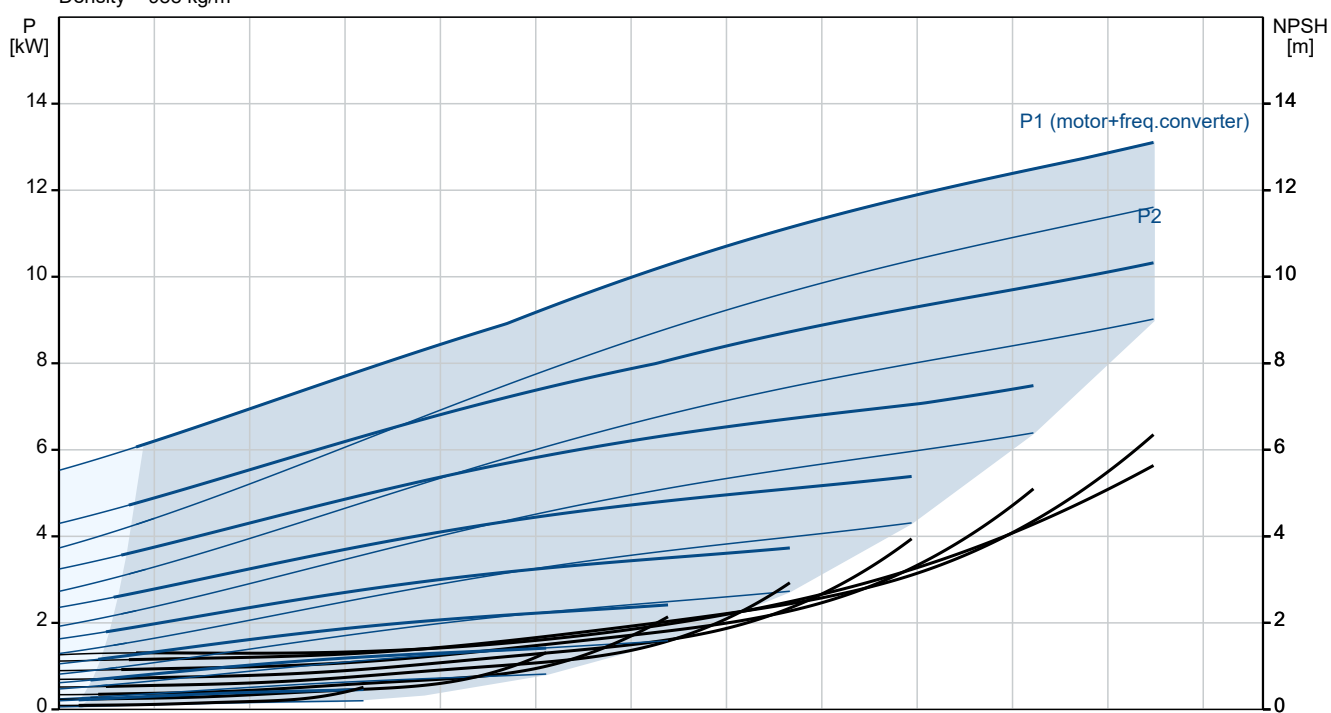

Description	Value
General information:	
Product name:	NK 65-180/172 AA1F2S3ESBQQEOW1
Product No:	93052617
EAN number:	5715467079104
Price:	AED 18680
Technical:	
Pump speed on which pump data are based:	2930 rpm
Rated flow:	88.61 m³/h
Pump with motor (Yes/No):	Y
Rated head:	34.93 m
Actual impeller diameter:	172 mm
Nominal impeller diameter:	180
Primary shaft seal:	BQQE
Shaft diameter:	24 mm
Code for shaft seal:	BQQE
Mechanical seal type:	Single
Curve tolerance:	ISO9906:2012 2B
Pump version:	A1
Pump type:	NK
Bearing design:	Standard
Materials:	
Type key, code for rubber components. E = EPDM, V=FKM:	E
Pump housing:	Cast iron
	EN 1561 EN-GJL-250
	ASTM A48-35
Impeller:	Stainless steel
	EN 1.4308
	ASTM A351 CF8
Pump house, internal coating:	Painting
Type key, code for materials:	S3
Code for rubber:	E
Shaft:	Steel
	EN 1.0503/1.4301
	AISI 1045/304
Installation:	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	16 bar
Type key, code for pipework connection:	F
Pipe connection standard:	EN 1092-2
Type of inlet connection:	DIN
Type of outlet connection:	DIN
Size of inlet connection:	DN 80
Size of outlet connection:	DN 65
Pressure rating for connection:	PN 16
Coupling type:	Flexible w/o spacer
Base frame design:	C-channel
Code for base frame:	271
Grouting (Yes/No):	N
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	50 °C
Density:	988 kg/m³

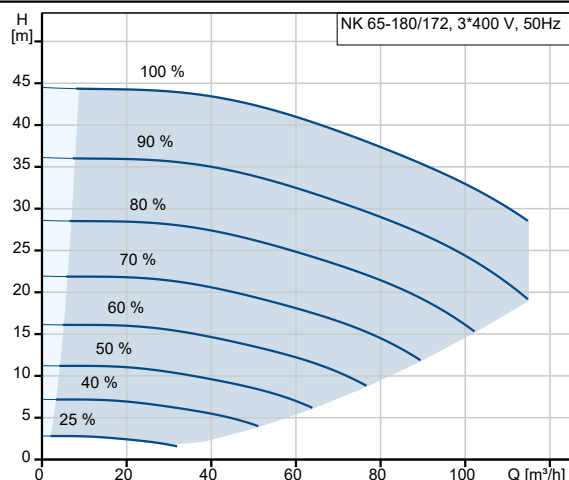


Pumped liquid = Water
Liquid temperature during operation = 50 °C
Density = 988 kg/m³

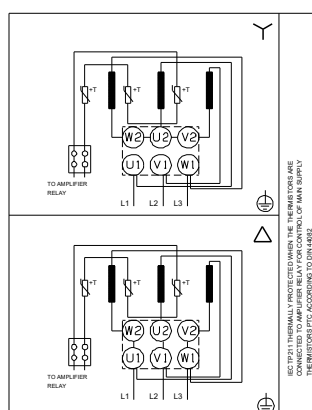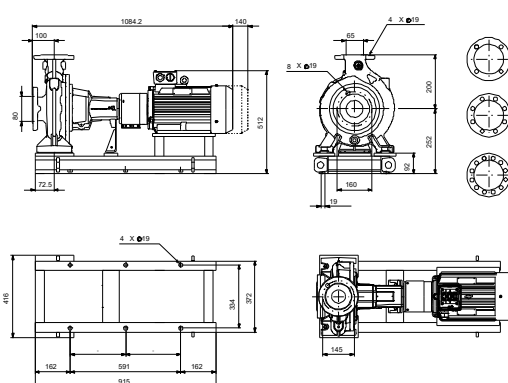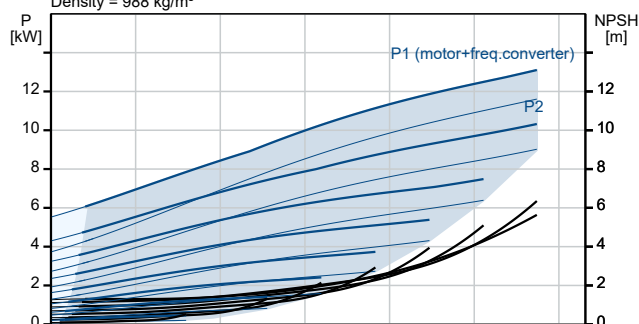

Description	Value
Electrical data:	
Motor type:	160MB
Rated power - P2:	15 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-400D/660-690Y V
Rated current:	27,9-26,5/16,0-15,3 A
Starting current:	810 %
Cos phi - power factor:	0.89
Rated speed:	2930 rpm
IE efficiency:	IE3 91,9%
IE Efficiency class:	IE3
Motor efficiency at full load:	91.9 %
Motor efficiency at 3/4 load:	91.9 %
Motor efficiency at 1/2 load:	89.8 %
Number of poles:	2
Enclosure class (IEC 34-5):	IP55 (Protect. water jets/dust)
Insulation class (IEC 85):	F
Built-in motor protection:	PTC
Motor No:	99546140
Bearing insulation type N-end:	Steel bearing
Controls:	
Frequency converter:	None
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	226 kg
Gross weight:	256 kg
Shipping volume:	0.585 m³
Country of origin:	CN
Custom tariff no.:	84137000
Language on pump nameplate:	CN

93052617 NK 65-180/172 AA1F2S3ESBQQEOW1 50 Hz

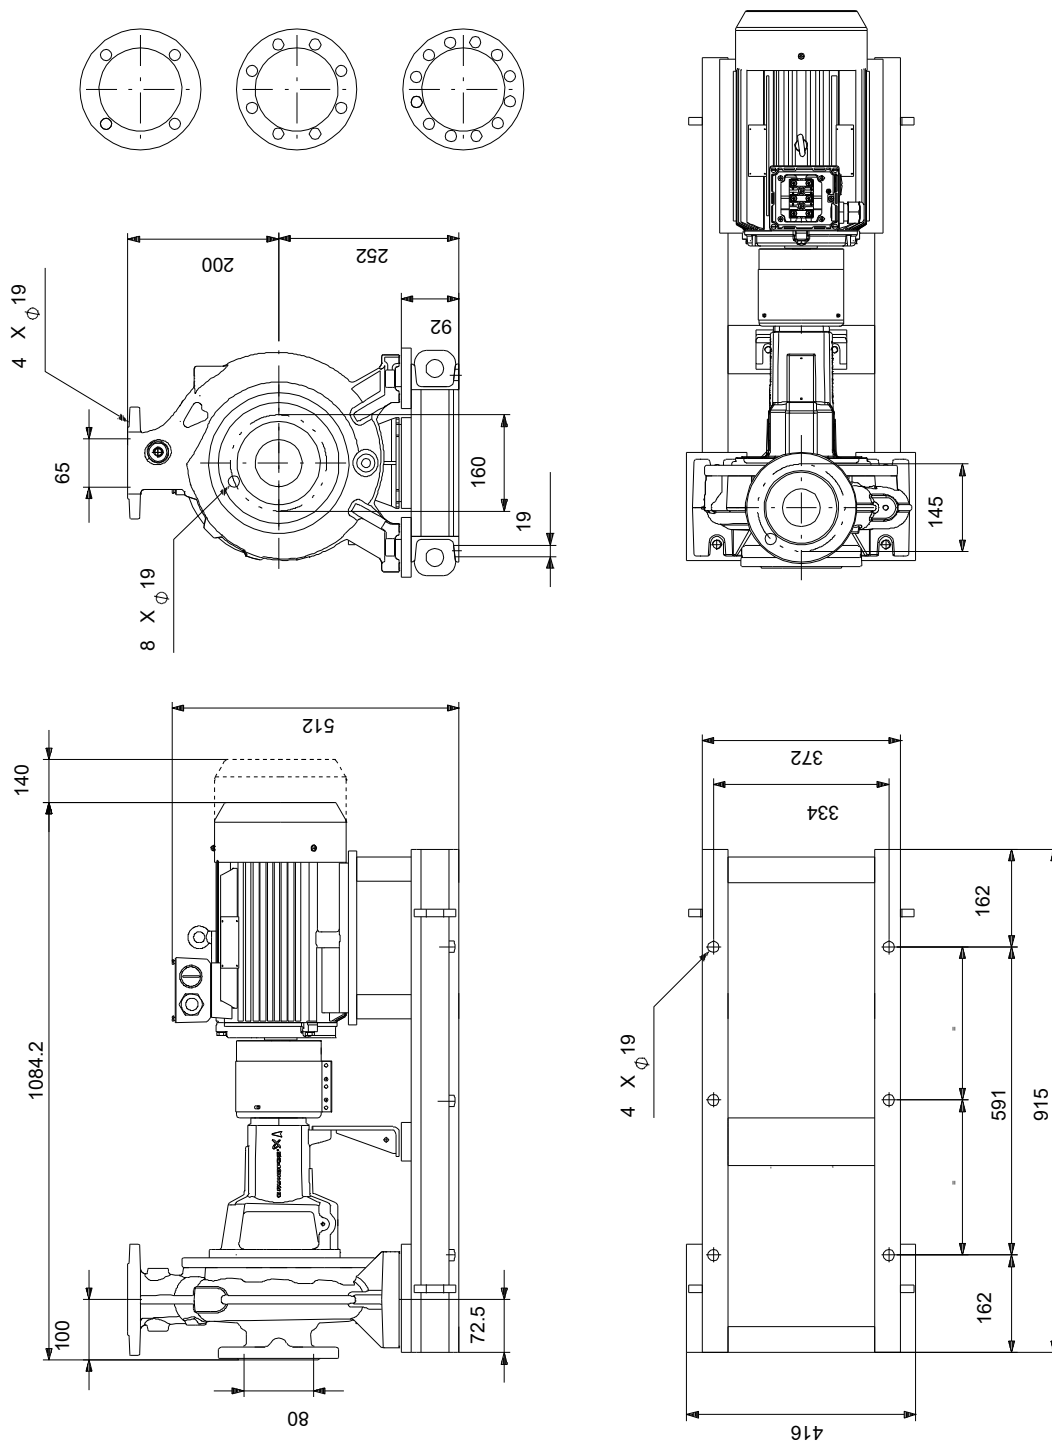

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.