


AIM : Web Security with SSL/TLS

Configure and implement secure web communication using SSL/TLS protocols, including certificate management and secure session establishment.

Objective

To configure and implement secure web communication using HTTPS (SSL/TLS concept) between a client PC and a web server in Cisco Packet Tracer.

Network Topology

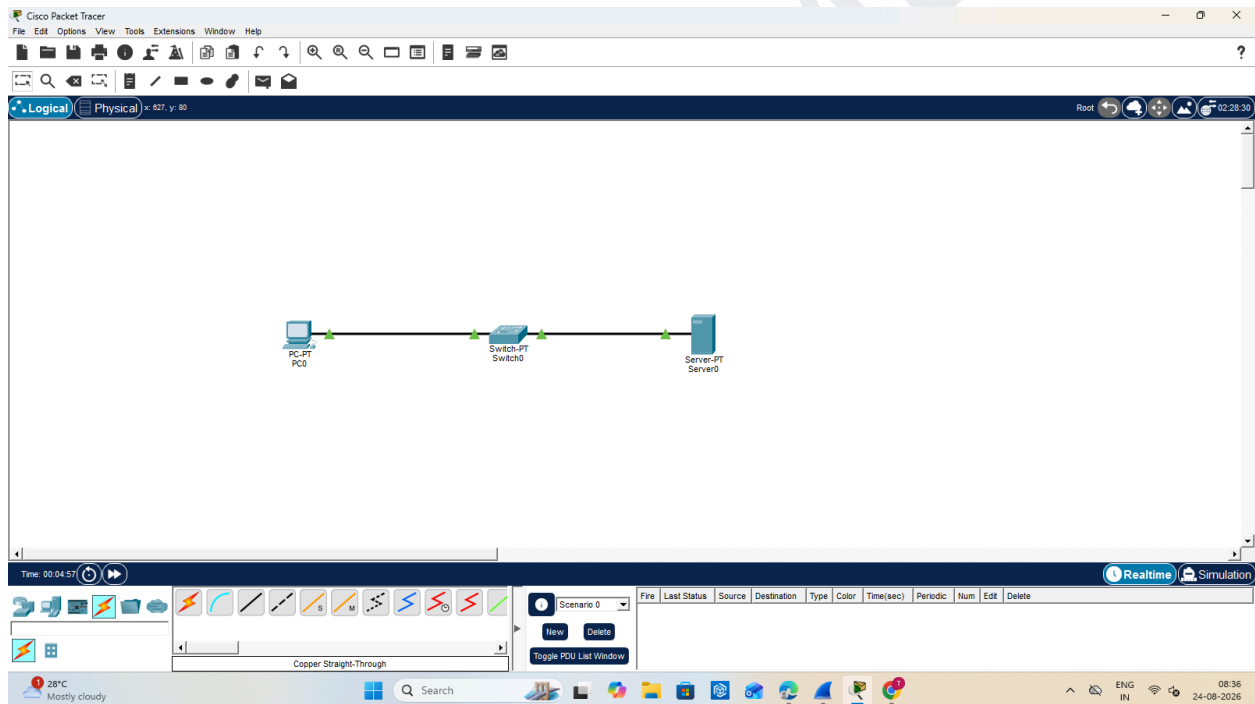

SHETH L.U.J. AND SIR M.V. COLLEGE

SUBJECT : CYBER SECURITY


Step 1: Open Cisco Packet Tracer

Step 2: Add a PC


Step 3: Add a Server

Step 4: Add a Switch

Step 5: Connect the Devices

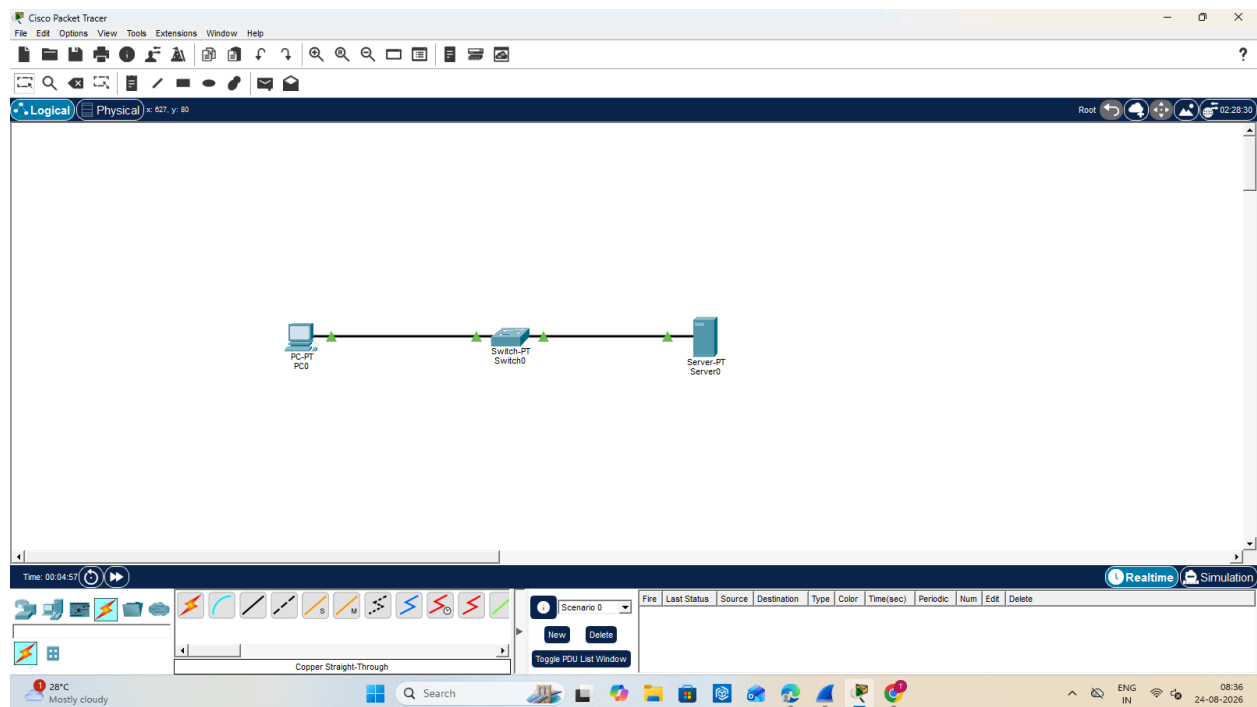

Step 6: Configure IP Address on PC

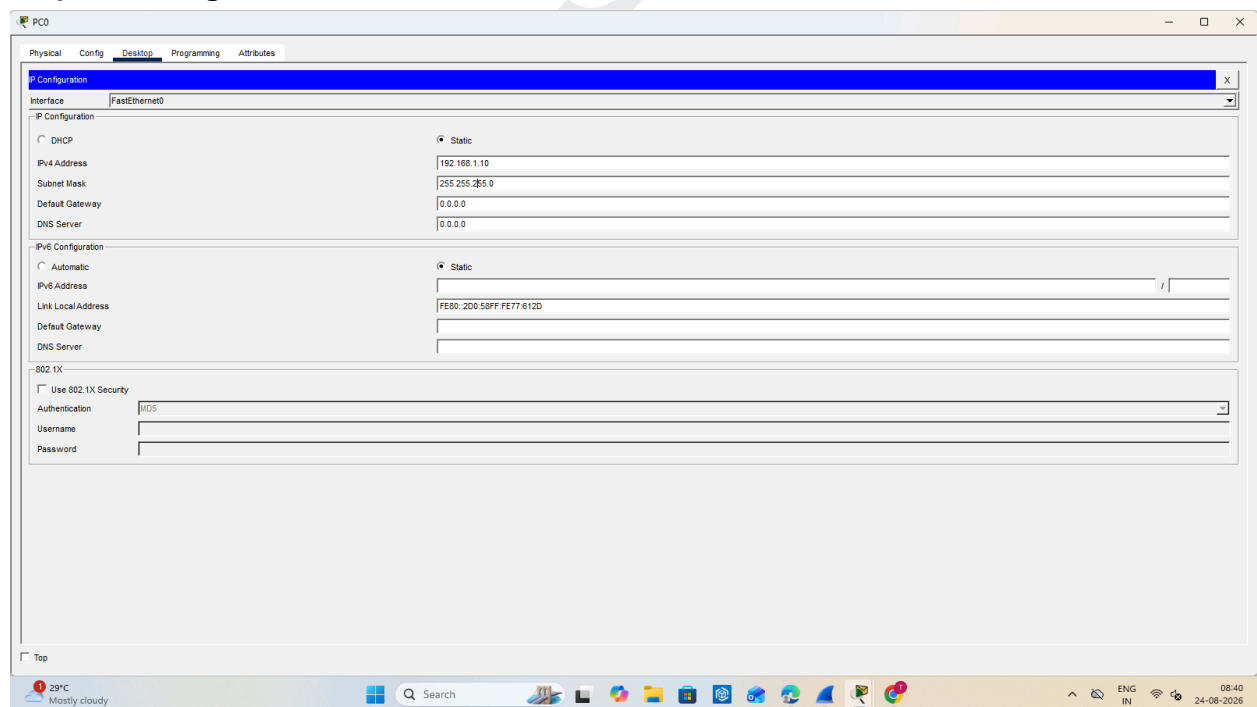


SUMEET YADAV

T125


SHETH L.U.J. AND SIR M.V. COLLEGE

SUBJECT : CYBER SECURITY

Step 7: Configure IP Address on Server

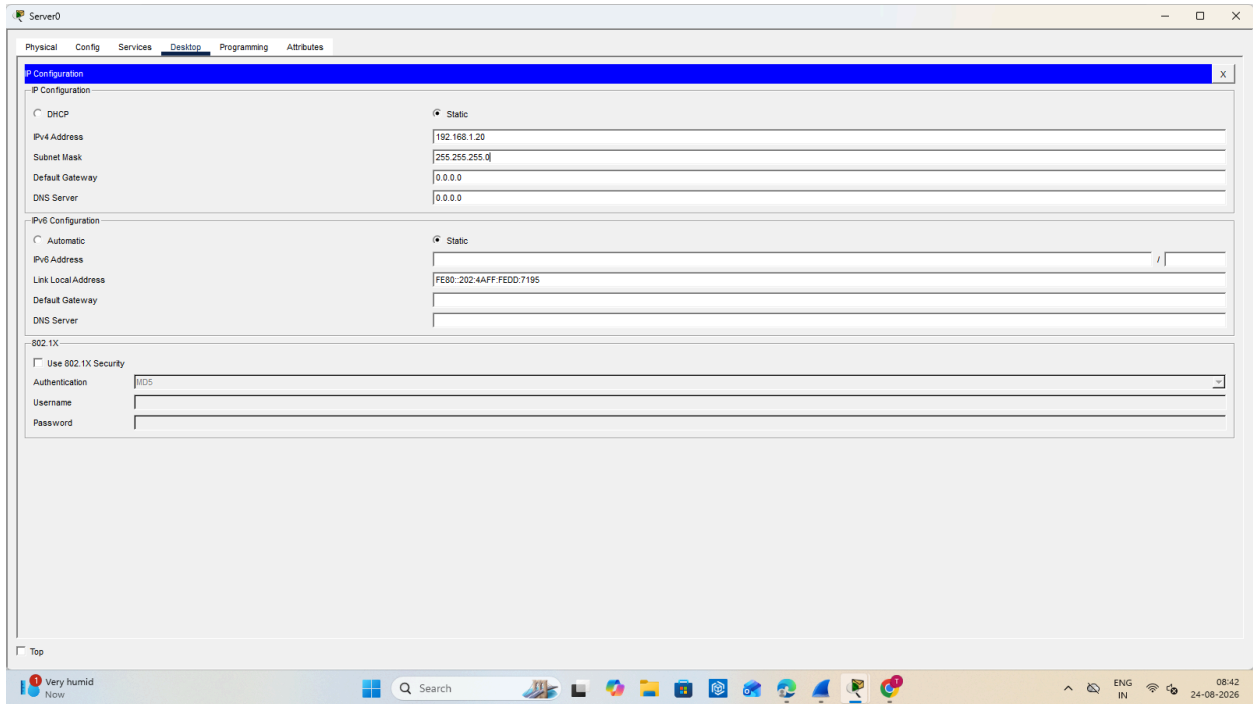

Step 8: Test Network Connectivity

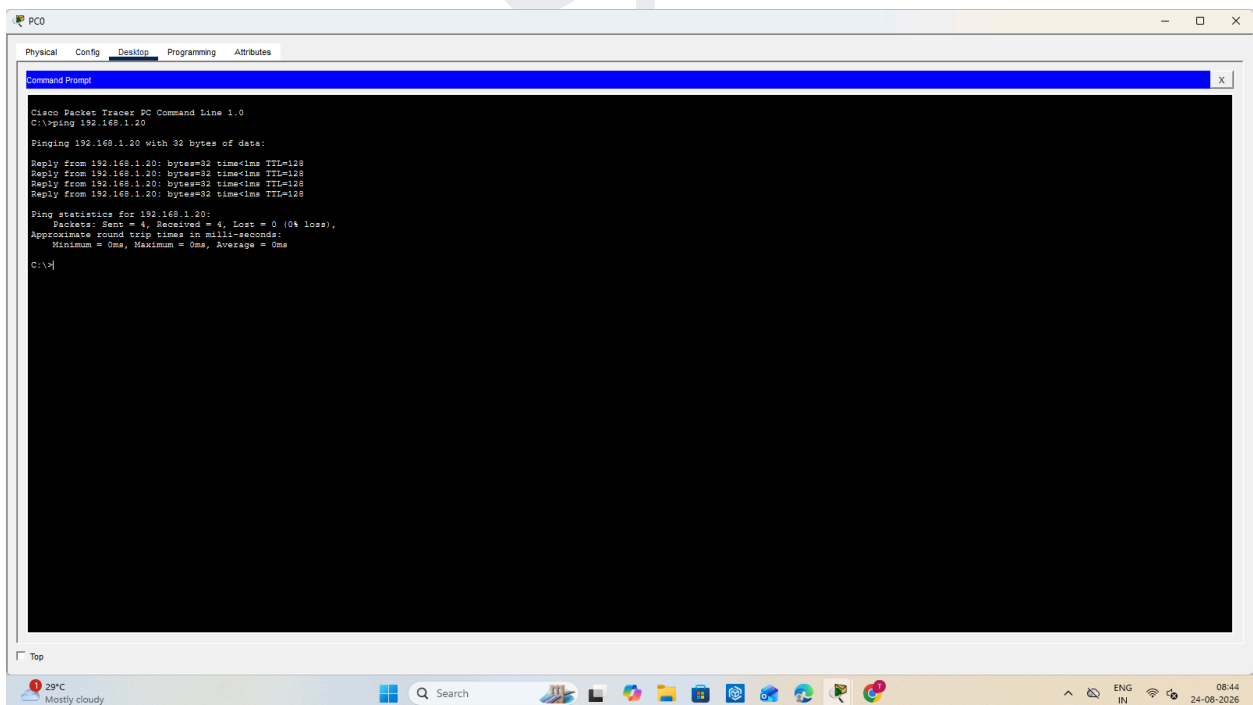


SUMEET YADAV
T125


SHETH L.U.J. AND SIR M.V. COLLEGE

SUBJECT : CYBER SECURITY

Step 9: Configure HTTP and HTTPS Service

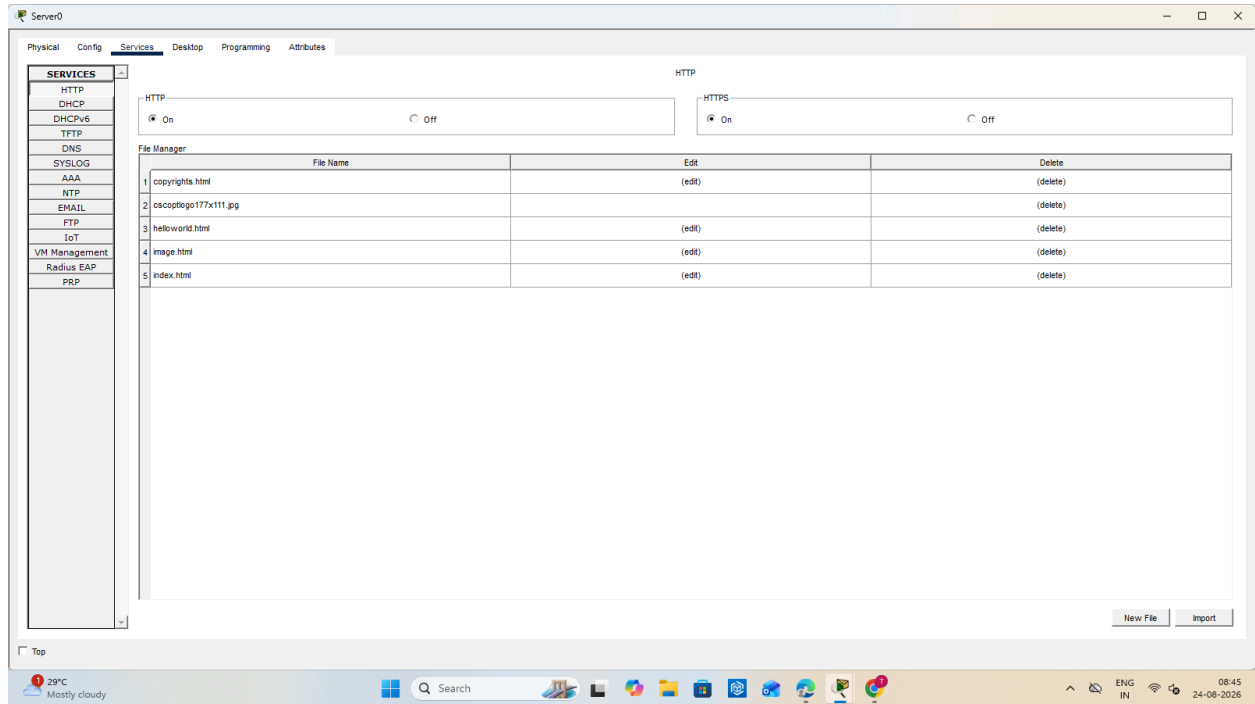


Step 10: Configure a Web Page

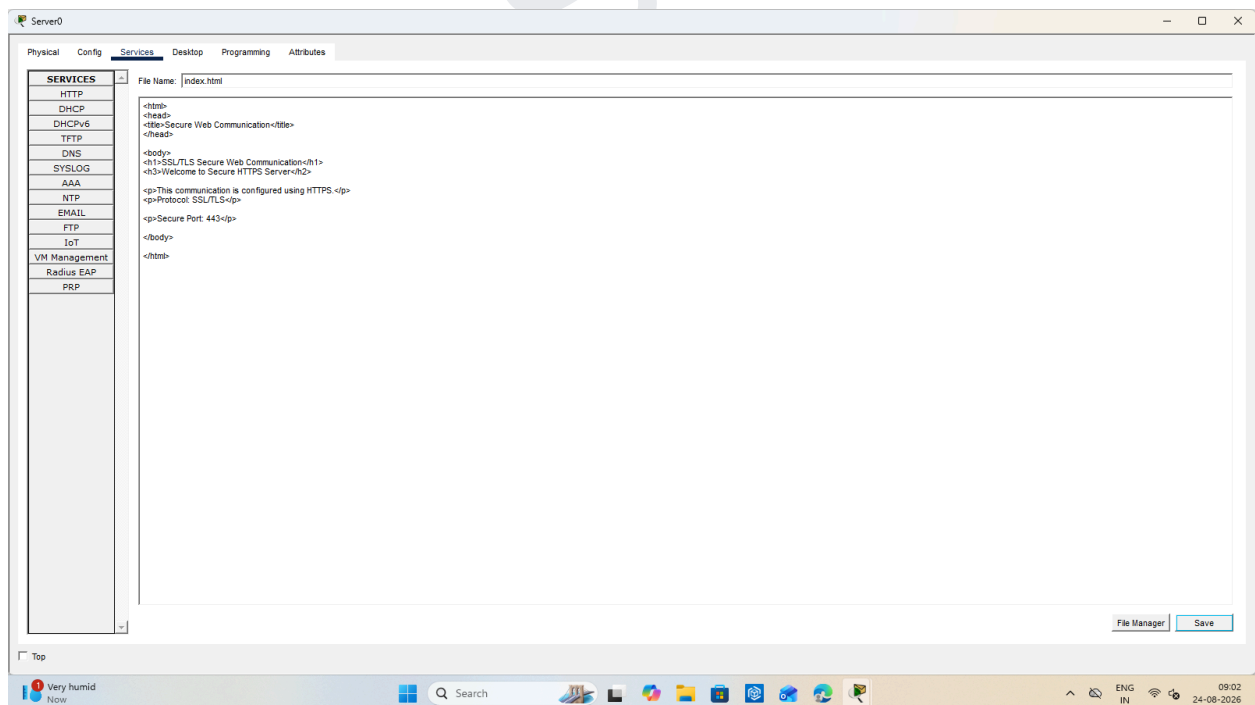


SUMEET YADAV
T125

SHETH L.U.J. AND SIR M.V. COLLEGE
SUBJECT : CYBER SECURITY

Step 11: Test Normal HTTP Communication

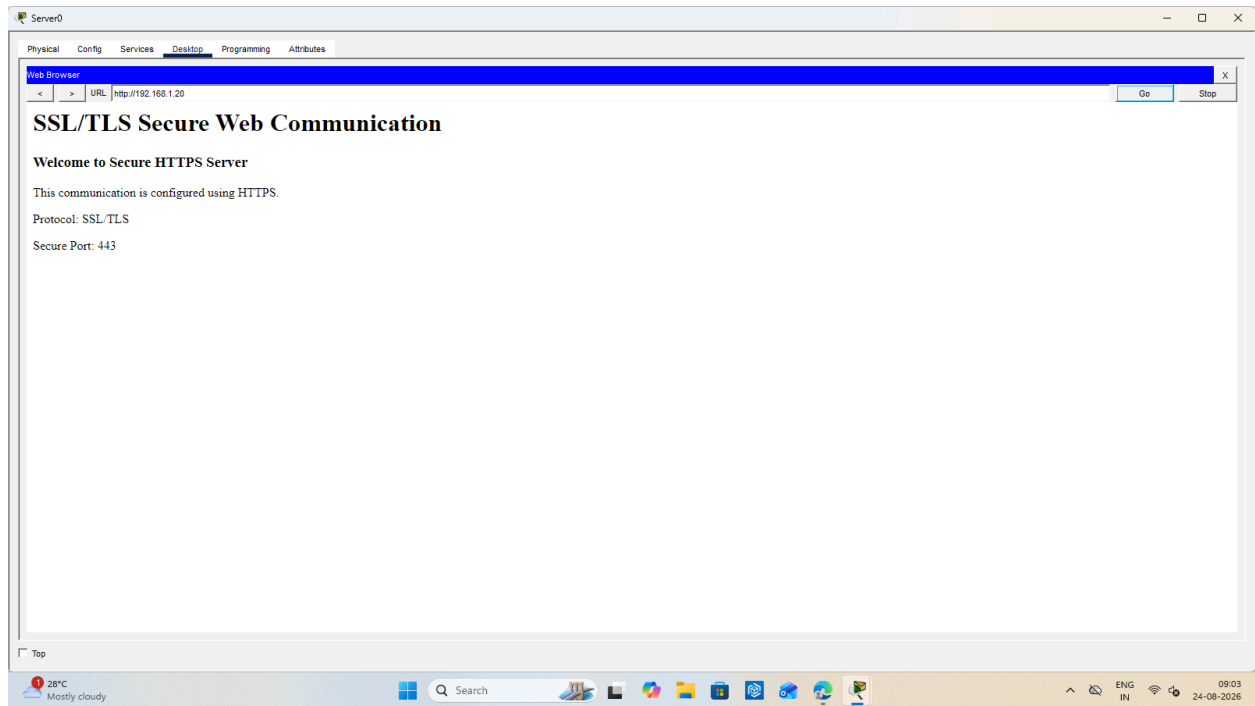

Step 13: Use Simulation Mode

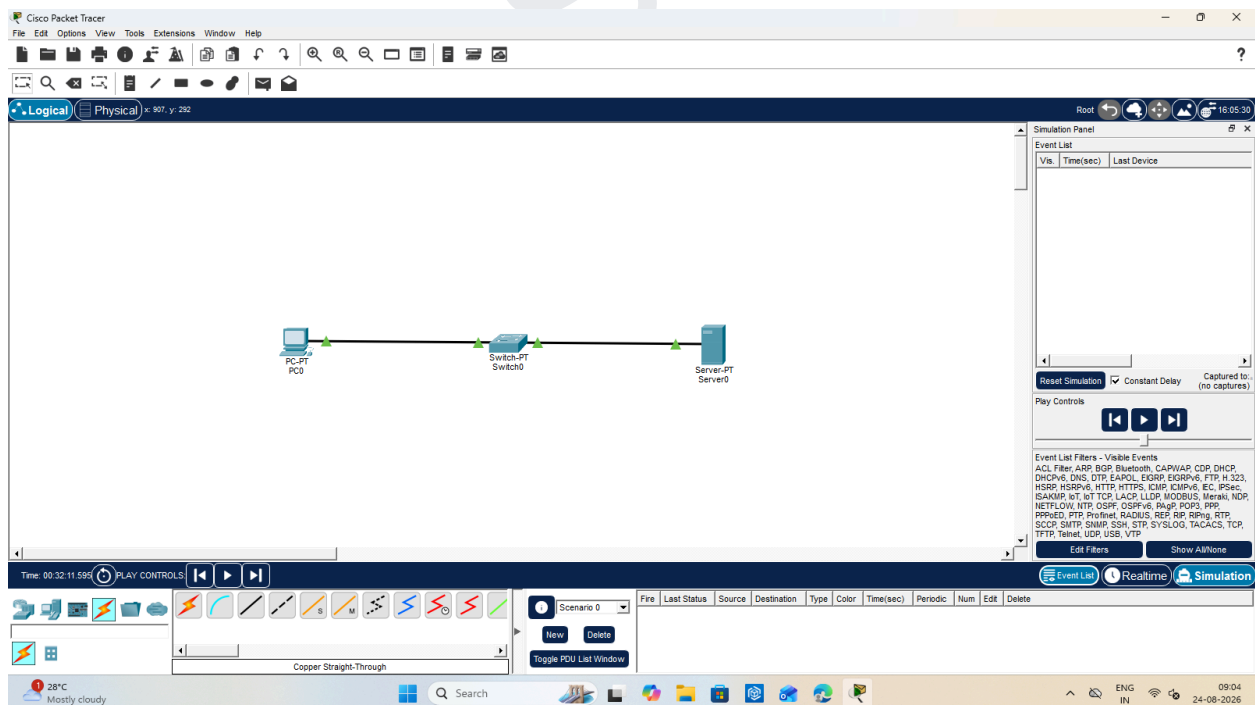

SUMEET YADAV
T125

Step 14: Observe HTTP Communication

The screenshot displays the Cisco Packet Tracer interface. The main workspace shows a network topology with a PC (PC-PT PC0) connected to a switch (Switch SW0). The Event List panel on the right is active, showing a list of events. The events are as follows:

Time(sec)	Last Device	AI Device	Type
0.000	--	Server0	TCP
0.003	--	Server0	TCP
0.003	--	Server0	TCP
0.003	--	Server0	HTTPS
0.003	--	Server0	TCP
0.003	--	Server0	HTTPS
0.003	--	Server0	HTTPS
0.003	--	Server0	TCP
0.003	--	Server0	TCP
0.003	--	Server0	TCP

The bottom status bar shows the time as 00:34:52.122 and the simulation is running. The interface also includes a menu bar, a toolbar, and a bottom status bar with system information.