




21. Batch File Execution

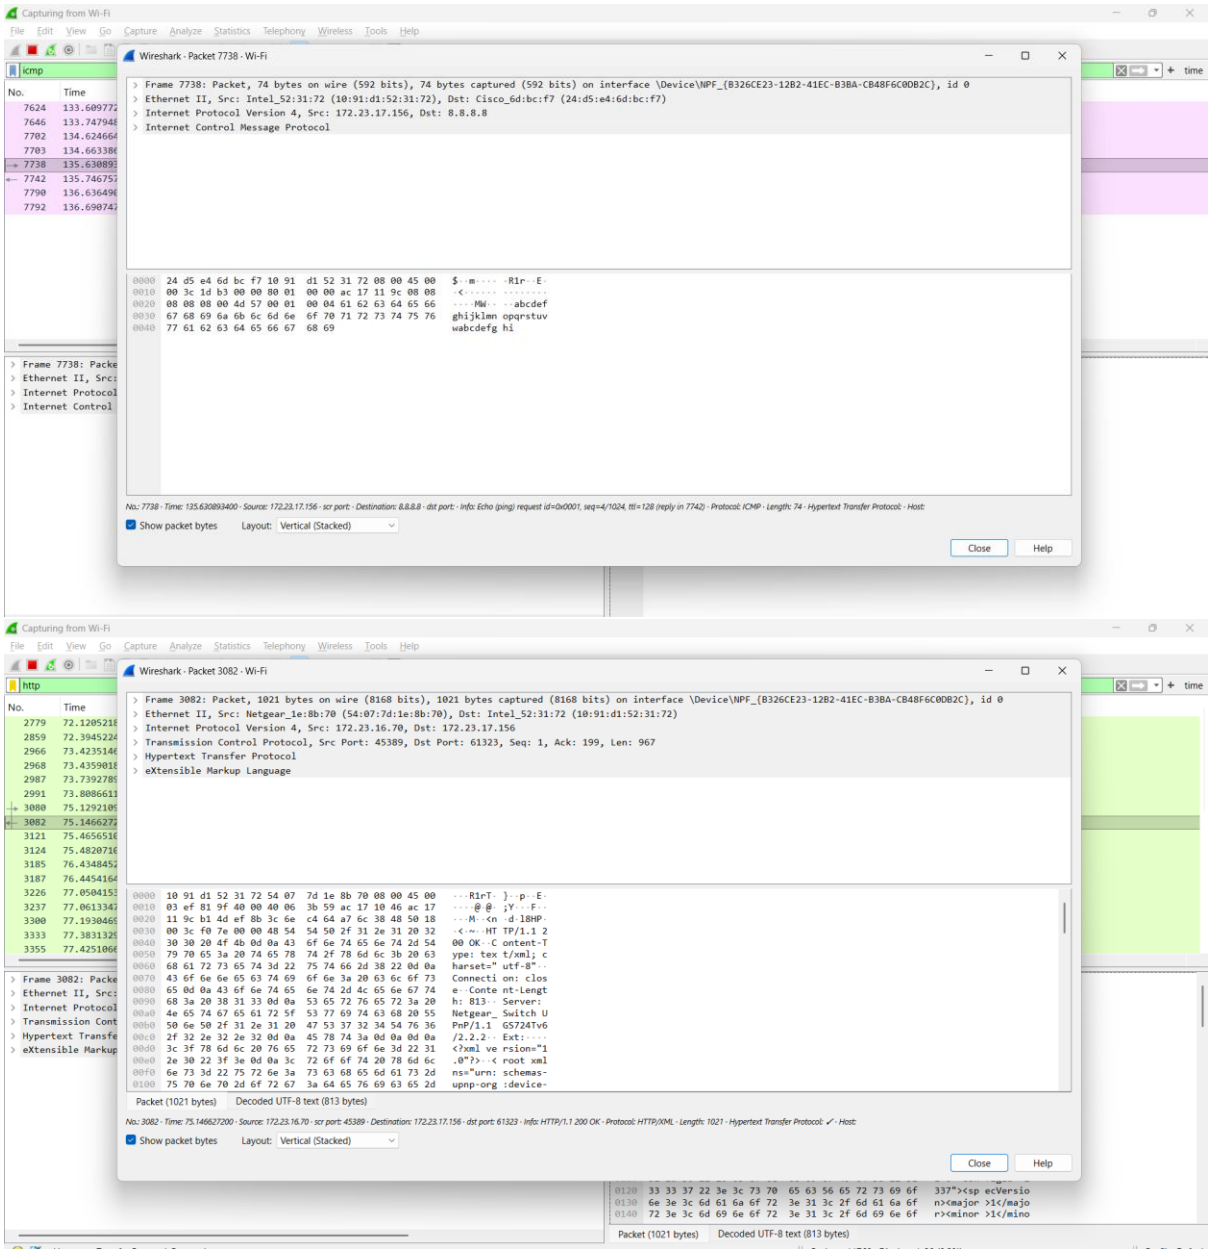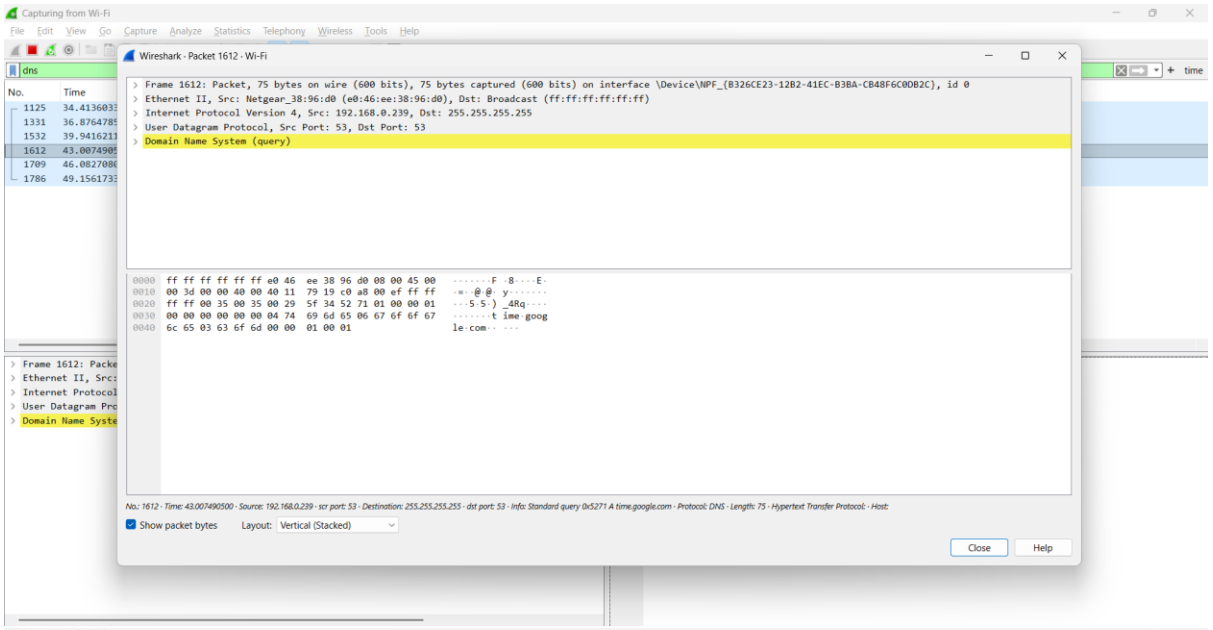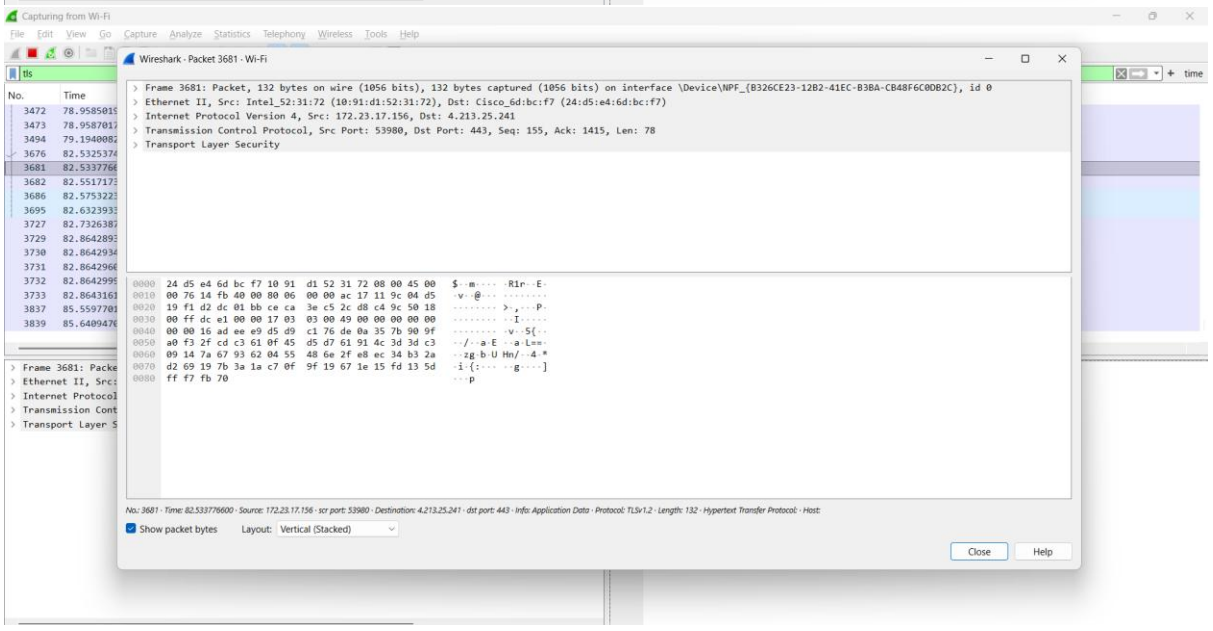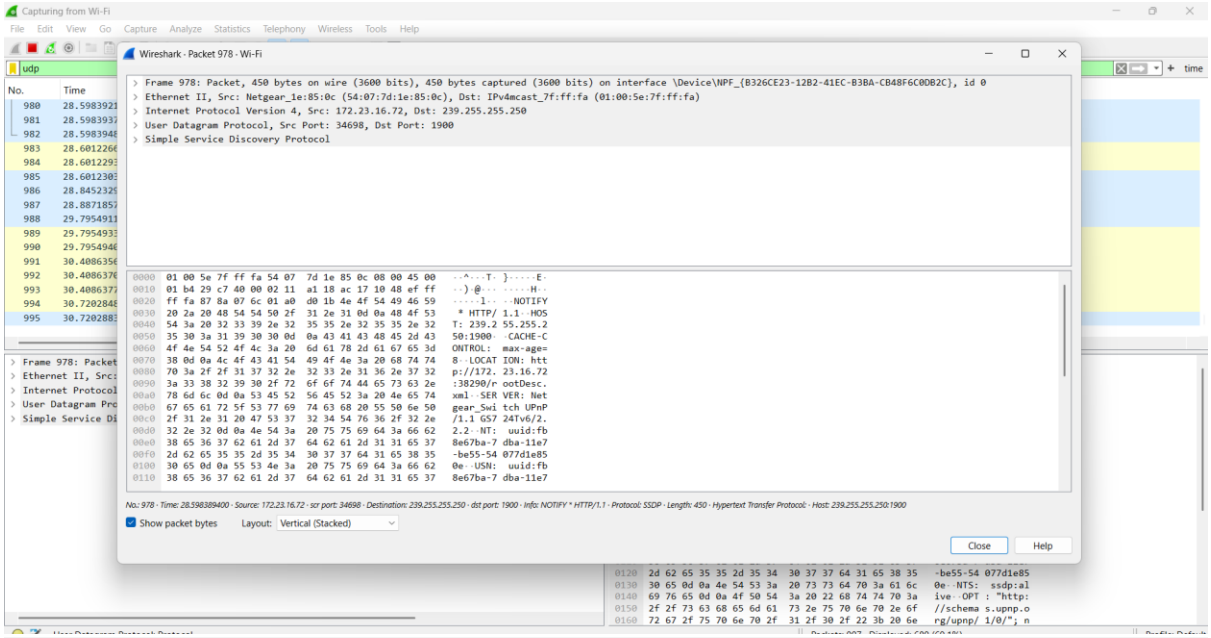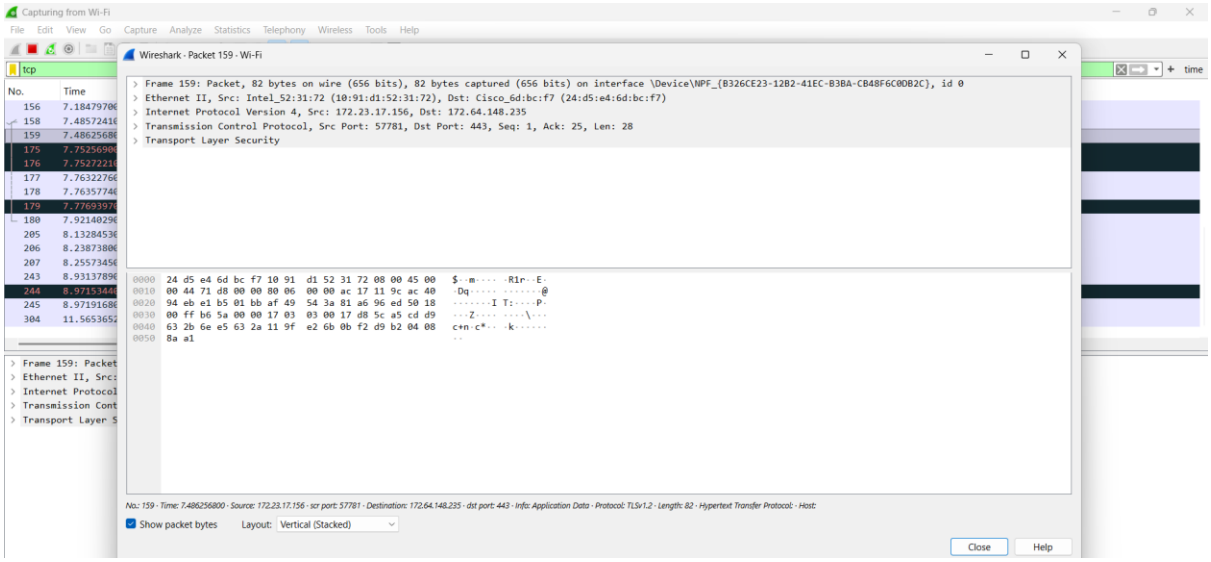


Capturing from Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
dns
No. Time
1125 34.4136033
1331 36.8764785
1532 39.9416211
1612 43.0074905
1709 46.0827086
1786 49.1561733
Wireshark · Packet 1612 · Wi-Fi
Frame 1612: Packet, 75 bytes on wire (600 bits), 75 bytes captured (600 bits) on interface \Device\NPF_{B326CE23-12B2-41EC-B3BA-CB48F6C0DB2C}, id 0
Ethernet II, Src: Netgear_38:96:d0 (e0:46:ee:38:96:d0), Dst: Broadcast (ff:ff:ff:ff:ff:ff)
Internet Protocol Version 4, Src: 192.168.0.239, Dst: 255.255.255.255
User Datagram Protocol, Src Port: 53, Dst Port: 53
Domain Name System (query)
0000 ff ff ff ff ff ff e0 46 ee 38 96 d0 08 00 45 00 ·····F ·8····E·
0010 00 3d 00 00 40 00 40 11 79 19 c0 a8 00 ef ff ff ·=··@·@· y·····
0020 ff ff 00 35 00 35 00 29 5f 34 52 71 01 00 00 01 ···5·5·) _4Rq····
0030 00 00 00 00 00 00 04 74 69 6d 65 06 67 6f 6f 67 ·······t ime·goog
0040 6c 65 03 63 6f 6d 00 00 01 00 01 le·com·· ···
Show packet bytes Layout: Vertical (Stacked)
Close Help


Capturing from Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tls
No. Time
3472 78.9585019
3473 78.9587017
3494 79.1940082
3676 82.5325374
3681 82.5337764
3682 82.5517173
3686 82.5753223
3695 82.6323933
3727 82.7326387
3729 82.8642893
3730 82.8642934
3731 82.8642966
3732 82.8642995
3733 82.8643161
3837 85.5597701
3839 85.6409476
Wireshark · Packet 3681 · Wi-Fi
Frame 3681: Packet, 132 bytes on wire (1056 bits), 132 bytes captured (1056 bits) on interface \Device\NPF_{B326CE23-12B2-41EC-B3BA-CB48F6C0DB2C}, id 0
Ethernet II, Src: Intel_52:31:72 (10:91:d1:52:31:72), Dst: Cisco_6d:bc:f7 (24:d5:e4:6d:bc:f7)
Internet Protocol Version 4, Src: 172.23.17.156, Dst: 4.213.25.241
Transmission Control Protocol, Src Port: 53980, Dst Port: 443, Seq: 155, Ack: 1415, Len: 78
Transport Layer Security
0000 24 d5 e4 6d bc f7 10 91 d1 52 31 72 08 00 45 00 $··m····· ·R1r··E·
0010 00 76 14 fb 40 00 80 06 00 00 ac 17 11 9c 04 d5 ·v··@··· ········
0020 19 f1 d2 dc 01 bb ce ca 3e c5 2c d8 c4 9c 50 18 ········ >·,···P·
0030 00 ff dc e1 00 00 17 03 03 00 49 00 00 00 00 00 ········ ··I·····
0040 00 00 16 ad ee e9 d5 d9 c1 76 de 0a 35 7b 90 9f ········ ·v··5{··
0050 a0 f3 2f cd c3 61 0f 45 d5 d7 61 91 4c 3d 3d c3 ··/··a·E ··a·L==·
0060 09 14 7a 67 93 62 04 55 48 6e 2f e8 ec 34 b3 2a ··zg·b·U Hn/··4·*
0070 d2 69 19 7b 3a 1a c7 0f 9f 19 67 1e 15 fd 13 5d ·i·{:··· ··g····]
0080 ff f7 fb 70 ···p
Show packet bytes Layout: Vertical (Stacked)
Close Help


Capturing from Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
udp
No. Time
980 28.5983921
981 28.5983937
982 28.5983948
983 28.6012266
984 28.6012293
985 28.6012303
986 28.8452325
987 28.8871857
988 29.7954911
989 29.7954933
990 29.7954946
991 30.4086356
992 30.4086376
993 30.4086377
994 30.7202848
995 30.7202883
Wireshark · Packet 978 · Wi-Fi
Frame 978: Packet, 450 bytes on wire (3600 bits), 450 bytes captured (3600 bits) on interface \Device\NPF_{B326CE23-12B2-41EC-B3BA-CB48F6C0DB2C}, id 0
Ethernet II, Src: Netgear_1e:85:0c (54:07:7d:1e:85:0c), Dst: IPv4mcast_7f:ff:fa (01:00:5e:7f:ff:fa)
Internet Protocol Version 4, Src: 172.23.16.72, Dst: 239.255.255.250
User Datagram Protocol, Src Port: 34698, Dst Port: 1900
Simple Service Discovery Protocol
0000 01 00 5e 7f ff fa 54 07 7d 1e 85 0c 08 00 45 00 ··^···T· }·····E·
0010 01 b4 29 c7 40 00 02 11 a1 18 ac 17 10 48 ef ff ··)·@··· ·····H··
0020 ff fa 87 8a 07 6c 01 a0 d0 1b 4e 4f 54 49 46 59 ·····l·· ··NOTIFY
0030 20 2a 20 48 54 54 50 2f 31 2e 31 0d 0a 48 4f 53 * HTTP/ 1.1 ··HOS
0040 54 3a 20 32 33 39 2e 32 35 35 2e 32 35 35 2e 32 T: 239.2 55.255.2
0050 35 30 3a 31 39 30 30 0d 0a 43 41 43 48 45 2d 43 50:1900· ·CACHE-C
0060 4f 4e 54 52 4f 4c 3a 20 6d 61 78 2d 61 67 65 3d ONTROL: max-age=
0070 38 0d 0a 4c 4f 43 41 54 49 4f 4e 3a 20 68 74 74 8··LOCAT ION: htt
0080 70 3a 2f 2f 31 37 32 2e 32 33 2e 31 36 2e 37 32 p://172. 23.16.72
0090 3a 33 38 32 39 30 2f 72 6f 6f 74 44 65 73 63 2e :38290/r ootDesc.
00a0 78 6d 6c 0d 0a 53 45 52 56 45 52 3a 20 4e 65 74 xml··SER VER: Net
00b0 67 65 61 72 5f 53 77 69 74 63 68 20 55 50 6e 50 gear_Swi tch UPnP
00c0 2f 31 2e 31 20 47 53 37 32 34 54 76 36 2f 32 2e /1.1 GS7 24Tv6/2.
00d0 32 2e 32 0d 0a 4e 54 3a 20 75 75 69 64 3a 66 62 2.2··NT: uuid:fb
00e0 38 65 36 37 62 61 2d 37 64 62 61 2d 31 31 65 37 8e67ba-7 dba-11e7
00f0 2d 62 65 35 35 2d 35 34 30 37 37 64 31 65 38 35 -be55-54 077d1e85
0100 30 65 0d 0a 55 53 4e 3a 20 75 75 69 64 3a 66 62 0e··USN: uuid:fb
0110 38 65 36 37 62 61 2d 37 64 62 61 2d 31 31 65 37 8e67ba-7 dba-11e7
No.: 978 · Time: 28.598389400 · Source: 172.23.16.72 · scr port: 34698 · Destination: 239.255.255.250 · dst port: 1900 · Info: NOTIFY * HTTP/1.1 · Protocol: SSDP · Length: 450 · Hypertext Transfer Protocol: · Host: 239.255.255.250:1900
Show packet bytes
Layout: Vertical (Stacked)
Close
Help


Capturing from Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp
No. Time
156 7.1847970
158 7.4857241
159 7.4862568
175 7.7525690
176 7.7527221
177 7.7632276
178 7.7635774
179 7.7769397
180 7.9214029
205 8.1328453
206 8.2387380
207 8.2557345
243 8.9313789
244 8.9715344
245 8.9719168
304 11.5653652
Wireshark · Packet 159 · Wi-Fi
Frame 159: Packet, 82 bytes on wire (656 bits), 82 bytes captured (656 bits) on interface \Device\NPF_{B326CE23-12B2-41EC-B3BA-CB48F6C0DB2C}, id 0
Ethernet II, Src: Intel_52:31:72 (10:91:d1:52:31:72), Dst: Cisco_6d:bc:f7 (24:d5:e4:6d:bc:f7)
Internet Protocol Version 4, Src: 172.23.17.156, Dst: 172.64.148.235
Transmission Control Protocol, Src Port: 57781, Dst Port: 443, Seq: 1, Ack: 25, Len: 28
Transport Layer Security
0000 24 d5 e4 6d bc f7 10 91 d1 52 31 72 08 00 45 00 $··m····· ·R1r··E·
0010 00 44 71 d8 00 00 80 06 00 00 ac 17 11 9c ac 40 ·Dq····· ·······@
0020 94 eb e1 b5 01 bb af 49 54 3a 81 a6 96 ed 50 18 ·······I T:····P·
0030 00 ff b6 5a 00 00 17 03 03 00 17 d8 5c a5 cd d9 ···Z···· ····\···
0040 63 2b 6e e5 63 2a 11 9f e2 6b 0b f2 d9 b2 04 08 c+n·c*·· ·k·····
0050 8a a1 ··
No.: 159 · Time: 7.486256800 · Source: 172.23.17.156 · scr port: 57781 · Destination: 172.64.148.235 · dst port: 443 · Info: Application Data · Protocol: TLSv1.2 · Length: 82 · Hypertext Transfer Protocol: · Host:
Show packet bytes
Layout: Vertical (Stacked)
Close
Help