



REON LED
INDUSTRIES PVT.LTD

INPUT CHARACTERISTICS

- INPUT VOLTAGE.....100-300VAC
- INPUT CURRENT.....440 MA
- INPUT POWER.....240 WATT
- POWER FACTOR.....>0.95
- FREQUENCY.....50-60Hz
- EFFICIENCY.....85 %
- THD.....<10%

250W PRO SERIES STADIUM LIGHTS

RNILP-5034

PROTECTION CHARACTERISTICS

- SURGE PROTECTION.....6KV+10KV EXTRA
- OVER VOLTAGE PROTECTION.....YES
- UNDER VOLTAGE PROTECTION.....YES
- INGRESS PROTECTION (IP).....IP65

LED AND PCB CHARACTERISTICS

- LED AVERAGE LIFE.....50,000 Hrs
- NOS. OF LED.....48 NOS
- LED LUMENS.....700L/5W
- LED CRI.....80K
- LED COLOUR TEMP.....3000K/6500K
- LED PACKAGE.....2835
- LUMENS EFFICIENCY.....700L/5W
- PCB SIZE.....148X45MMx4MODEL



ENVIRONMENT OPERATING DETAILS

- MAX. OPERATING TEMP.....10 TO 50 DEGREE
- LUMINARIES TYPE.....OUTDOOR

MECHANICAL DETAILS

- DIMENSIONS.....180X45X100MMX2gt
- FIXTURE MATERIAL.....ADC 12
- FIXTURE COATING.....POWDER COATING
- Total product weight.....3600g

KEY FEATURES



- HIGH VOLTAGE WITH STANDING CAPACITY – 440 VAC
- HIGH VOLTAGE CUTOFF AT 310 VAC
- AUTO RESTART AFTER SAFE VOLTAGE MODE
- COMPACT AND AESTHETIC DESIGN
- BETTER THERMAL MANAGEMENT
- OPTICAL LENS WITH SILICON
- GASKETS FOR INGRESS PROTECTION
- HIGH EFFICIENCY LONG LIFE LED

USAGE AND APPLICATION

- CAMPUS LIGHTING
- CONSTRUCTION SITE
- FACTORY LIGHTING
- ADVERTISE HOARDING
- SPORTS YARD
- PARKING LOT

WARRANTY – 2 YEARS

No 25/1 Appavu nagar Extension, Opp. Chennish Mahal, Thalli road, Hosur.635 109

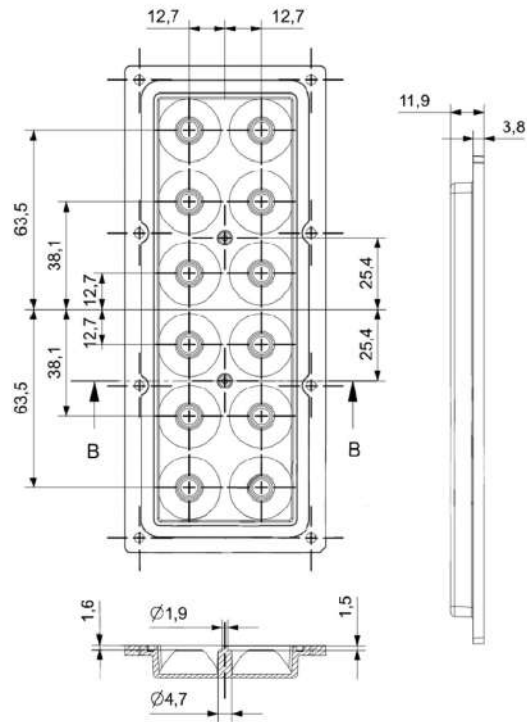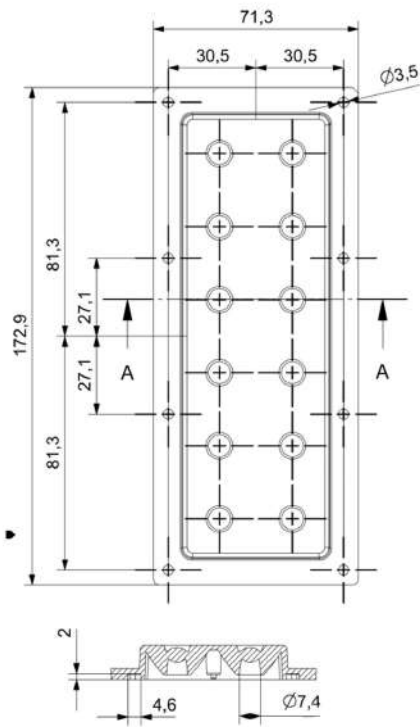

TITLE -
240W PRO LENS STADIUM LIGHTS

FIRST ISSUED	
DRAWN BY	
CHECKED BY	
APPROVED BY	

DRG NO.	RNILP-5034			
DATE	SIZE	SCALE	SHEET	
24-06-2024		N/A	SHEET 1 OF 1	

A4

