




This elegant lantern features a translucent diffuser that delivers a soft, glare-free light, creating a comfortable and inviting atmosphere. Its thoughtfully designed, robust construction ensures long-lasting performance, even in harsh weather conditions. With its enduring durability and consistent light output, this lantern maintains its initial quality throughout its lifespan, offering a reliable and stylish lighting solution for any environment.

Product Description

- Aluminium housing, integrated with extruded aluminium pipe along with pressure die cast aluminium base through supporting arms made of gravity die cast aluminium.
- Diffuser placed into the provision formed on the periphery of the bottom cover.
- Non yellowing UV stabilized translucent acrylic diffuser.
- Low power loss LED driver with 36W LED.
- Suitable for mounting on 50mm OD pipe.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : RNIPL-253081
- Available CCT : 2700K, 3000K, 4000K, 5700K

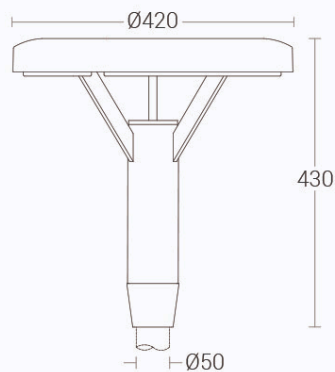

Product Benefits

- Elegance, Functionality.
- Environmental friendly, moisture proof, insect free.
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, commercial complex, Pathways in residential buildings & office complex.

Available Finish

Pure polyester powder coated

RAL 9004 Black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey