




Elegant column lighting feature, which is suitable for both modern and classic architecture. Ideal for creating orientation with exceptional visual comfort. These luminaries offer general ambient light in open spaces giving a sense of security at night-time. Clean Lines and pure form are the underlying elements in this series of column light, designed to provide rotationally symmetrical illumination, Light emission 360°.

Technical Specifications

- Luminaire is made of extruded aluminium alloy (grade 6063) with die-cast aluminium components and non corrosive SS fasteners.
- Shielded light.
- For optimum illumination, these luminaries can be supplied in different heights.
- Clear toughened glass.
- Die-cast aluminium mounting plate with an anchorage unit made out of hot dip galvanised steel for extra guarantee against corrosion.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : 90
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24754-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 6500K

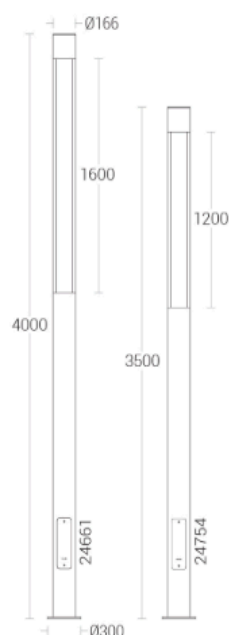

Product Benefits

- Practical . Elegant . Efficient
- Timeless modern design options.
- Easy to maintain, robust and durable construction.
- Soft diffused lighting protects pedestrians from glare and provides distinctive lighting with exceptional visual comfort.
- Sustainable LED technology offers durability and optimal light output with low power consumption

Area of Application

Suitable for Private & Public areas, Illuminating Driveways, Pathways, Building surrounds, Entrances, Squares & Gardens, Promenades

Available Finish

Pure polyester powder coated
RAL 9004 Black