



REON LED
INDUSTRIES PVT.LTD

INPUT CHARACTERISTICS

- INPUT VOLTAGE.....100-300VAC
- INPUT CURRENT.....440 MA
- INPUT POWER.....500 WATT
- POWER FACTOR.....>0.95
- FREQUENCY.....50-60Hz
- EFFICIENCY.....85 %
- THD.....<10%

500W PRO SERIES STADIUM LIGHTS

RNILP-5036

PROTECTION CHARACTERISTICS

- SURGE PROTECTION.....6KV+10KV EXTRA
- OVER VOLTAGE PROTECTION.....YES
- UNDER VOLTAGE PROTECTION.....YES
- INGRESS PROTECTION (IP).....IP65

LED AND PCB CHARACTERISTICS

- LED AVERAGE LIFE.....50,000 Hrs
- NOS. OF LED.....96 NOS
- LED LUMENS.....700L/5W
- LED CRI.....80K
- LED COLOUR TEMP.....3000K/6500K
- LED PACKAGE.....2835
- LUMENS EFFICIENCY.....700L/5W
- PCB SIZE.....148X45MMx8MODEL



ENVIRONMENT OPERATING DETAILS

- MAX. OPERATING TEMP.....10 TO 50 DEGREE
- LUMINARIES TYPE.....OUTDOOR

MECHANICAL DETAILS

- DIMENSIONS.....390X305X100MMX4g
- FIXTURE MATERIAL.....ADC 12
- FIXTURE COATING.....POWDER COATING
- Total product weight.....8300g

KEY FEATURES



- HIGH VOLTAGE WITH STANDING CAPACITY – 440 VAC
- HIGH VOLTAGE CUTOFF AT 310 VAC
- AUTO RESTART AFTER SAFE VOLTAGE MODE
- COMPACT AND AESTHETIC DESIGN
- BETTER THERMAL MANAGEMENT
- OPTICAL LENS WITH SILICON
- GASKETS FOR INGRESS PROTECTION
- HIGH EFFICIENCY LONG LIFE LED

USAGE AND APPLICATION

- CAMPUS LIGHTING
- CONSTRUCTION SITE
- FACTORY LIGHTING
- ADVERTISE HOARDING
- SPORTS YARD
- PARKING LOT

WARRANTY – 2 YEARS

No 25/1 Appavu nagar Extension, Opp. Chennish Mahal, Thalli road, Hosur.635 109

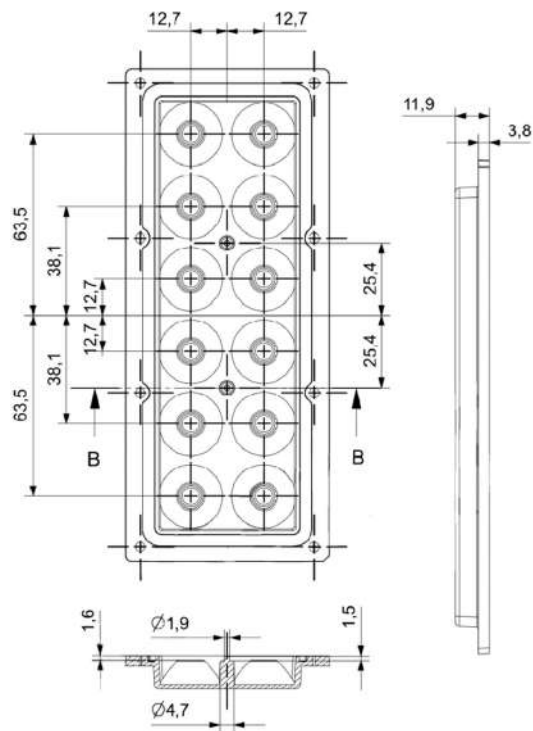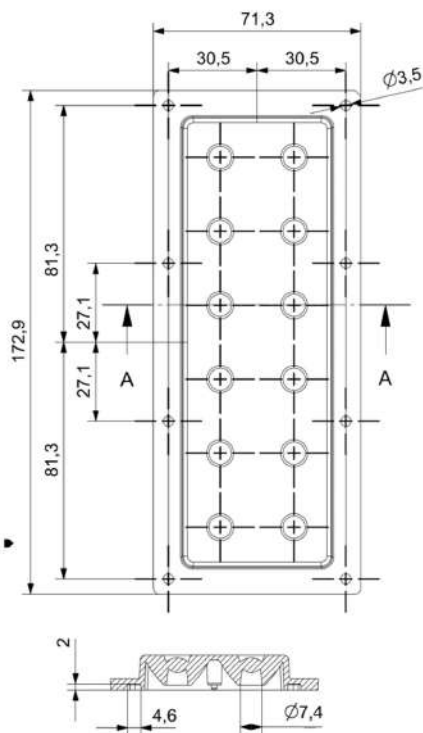

REON LED
INDUSTRIES PVT.LTD

TITLE -

500W PRO LENS STADIUM LIGHTS

FIRST ISSUED

DRAWN BY

CHECKED BY

APPROVED BY

DRG NO.

RNILP-5036

DATE

24-06-2024

SIZE

SCALE

N/A

SHEET

SHEET 1 OF 1

A4

