



aerpaw-tag

Project files for a non-canonical aerpaw deployment to power/read wilot tags and manage the aerpaw aerial drone

The drone will fly according to the plan show below

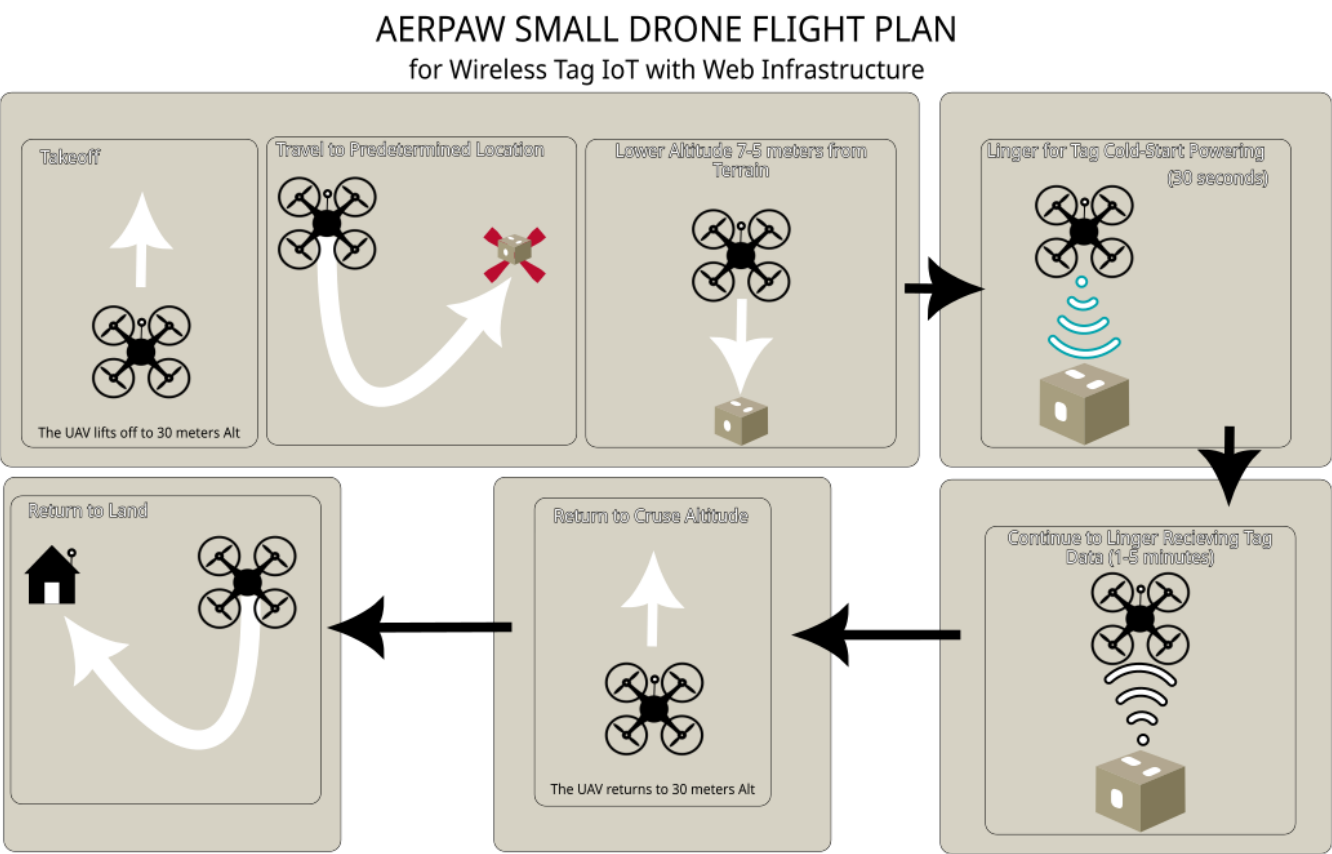


A system diagram is given below

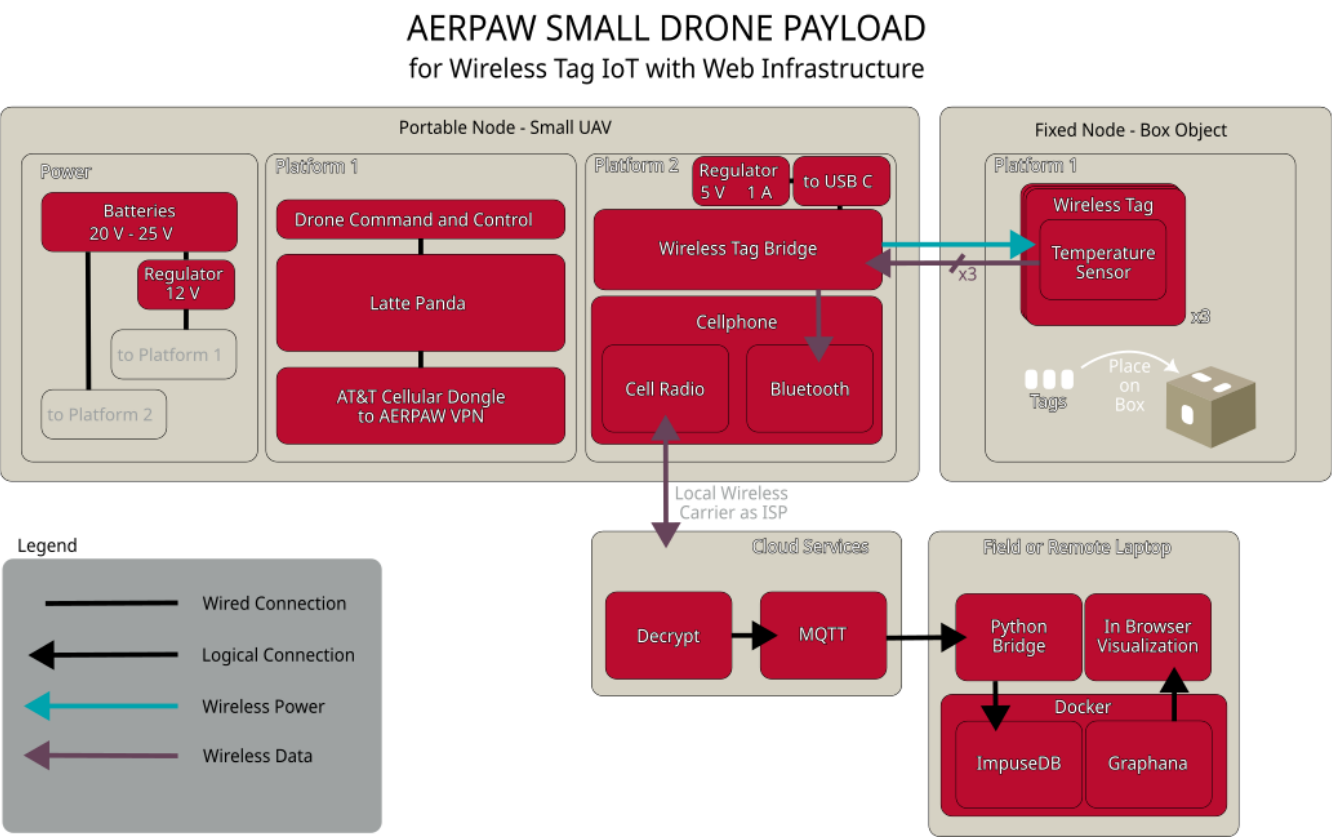


Phone payload loading instructions

Both the USB-C of the phone and the power for the buck converter should be on the same side.
Correct installation prevents erroneous phone button pressing during flight.

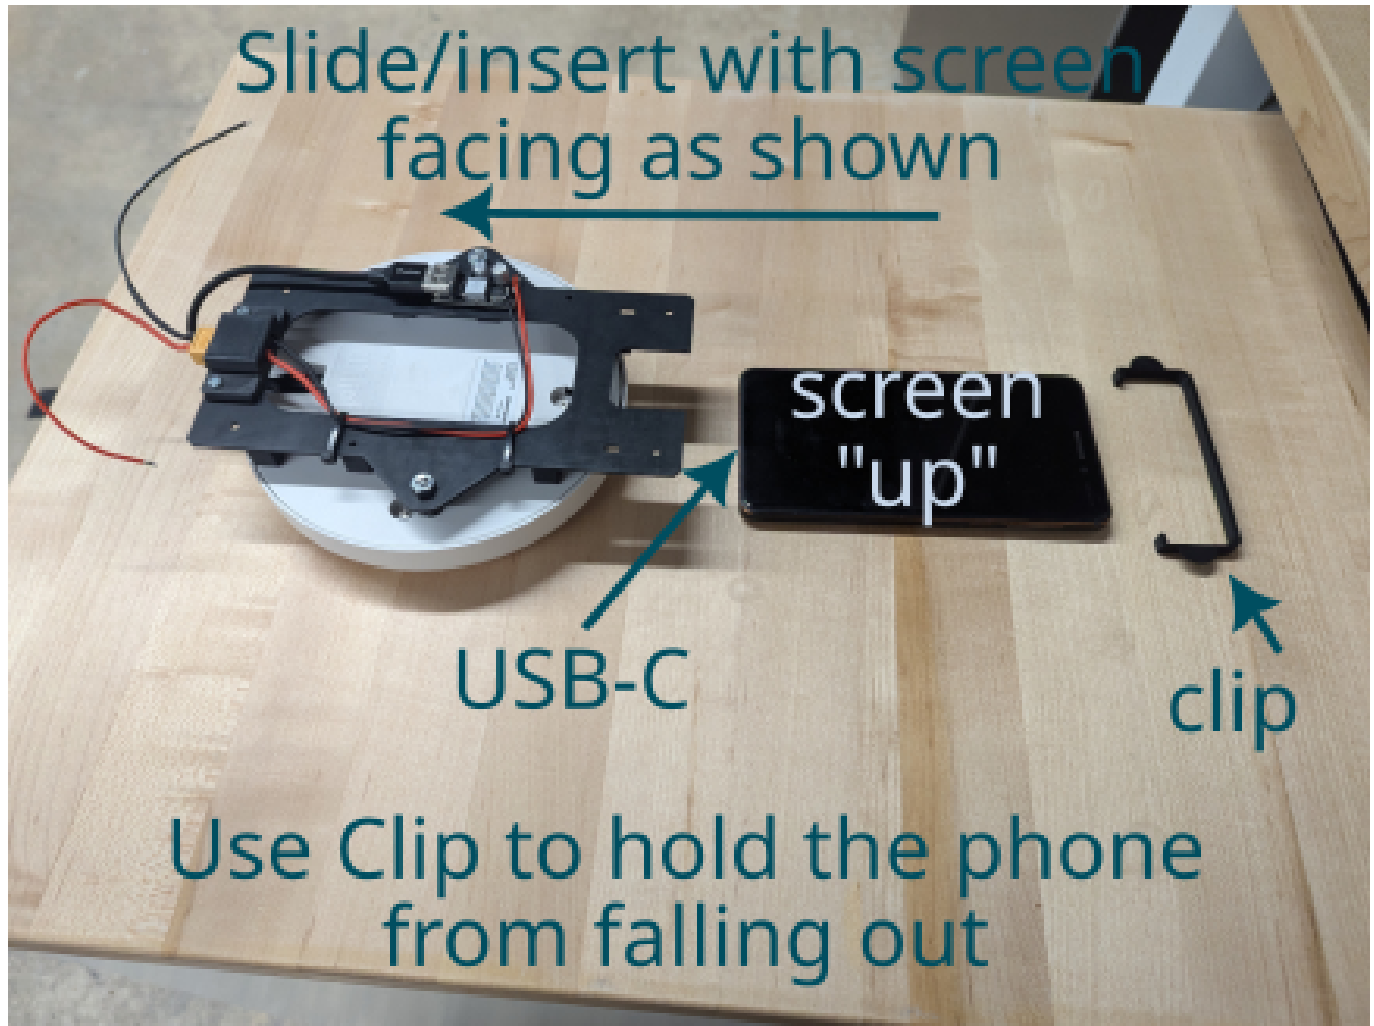


Phone gateway-bridge setup

Login with the provided credentials. The credentials are kept within the Google Keep app.

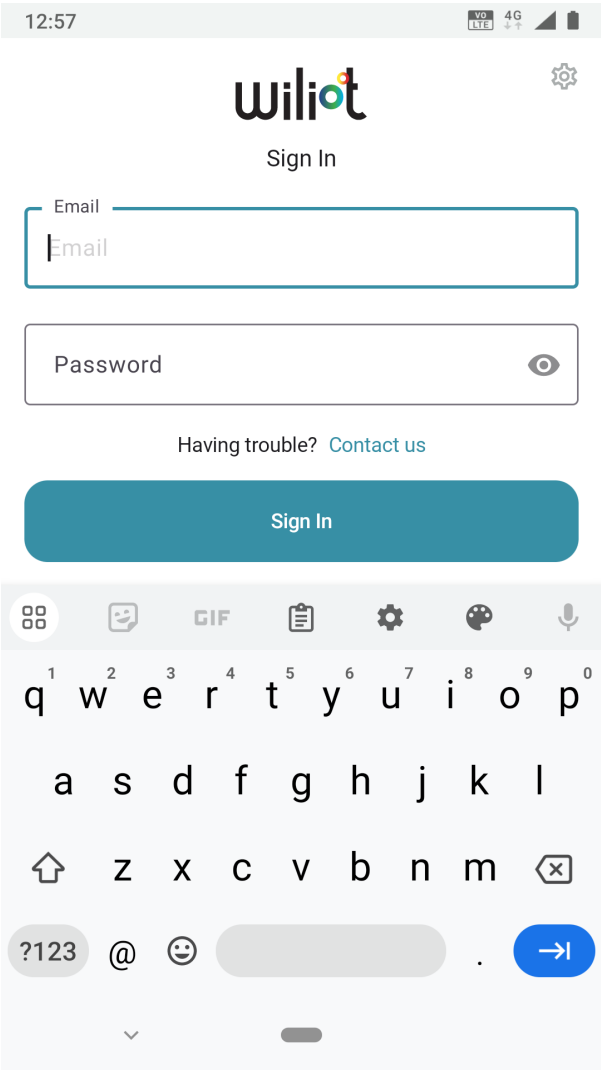

(if required) Use the gmail app to fulfill two-factor authentication.

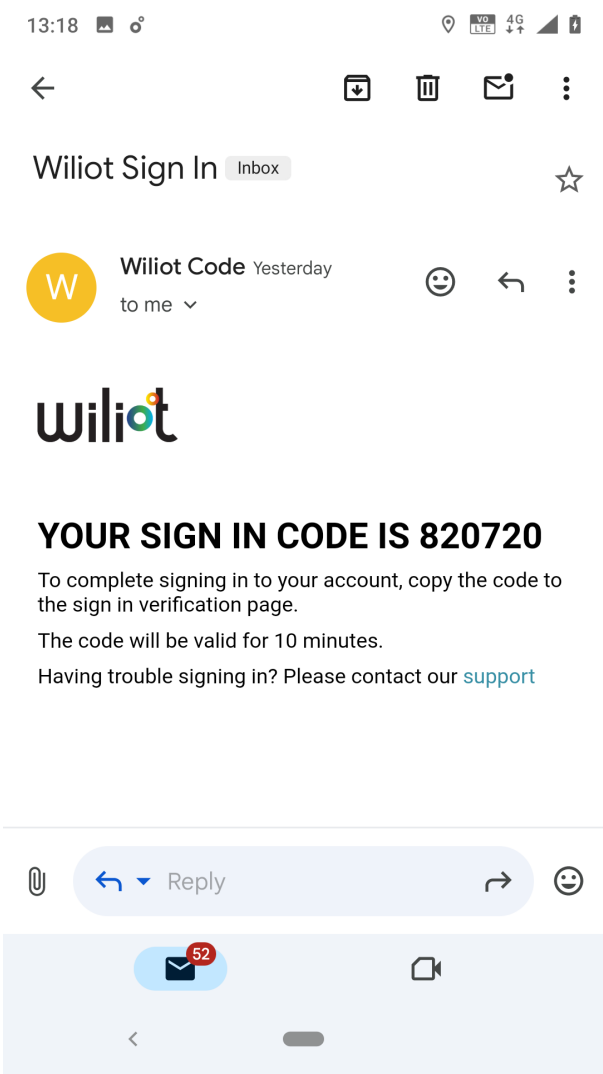

Ensure the gateway mode is turned on.

