

Perturbation-Based Epistemic Uncertainty for Failure Detection in Vision-Language-Action Models

Yousung Lee and Dongsoo Har

Abstract—Vision-Language-Action (VLA) models have shown strong performance in robotic manipulation, but reliable uncertainty quantification remains challenging, particularly under distribution shift. Unlike autoregressive policies, many modern VLA models generate continuous actions through regression or flow-based generation, where explicit predictive probabilities are unavailable. Moreover, stochastic action sampling primarily captures action-generation variability under a fixed model, while failure detection under distribution shift can benefit from capturing uncertainty in the model itself. Motivated by Bayesian perspectives on local model variations, we propose perturbation-based failure detection (PFD), a training-free framework for estimating epistemic uncertainty in VLA models through low-rank weight perturbations. Specifically, we inject random low-rank perturbations into selected transformer weight matrices and estimate epistemic uncertainty from disagreement across perturbed action predictions. Experiments on LIBERO-PRO show that PFD achieves the highest average AUROC and balanced accuracy among the evaluated methods while consistently outperforming stochastic action sampling across distribution shifts. Real-world robot experiments further demonstrate that PFD provides a competitive failure-detection signal under an unseen object shift.

I. INTRODUCTION

Vision-Language-Action (VLA) models have recently demonstrated strong generalization capabilities across robotic manipulation tasks by mapping multimodal observations and language instructions to continuous control actions [1]–[3]. However, despite their strong performance, VLA systems can fail when they encounter situations that deviate from the training distribution. This is particularly concerning in real-world robotics, where even small action errors can lead to task failures or unsafe robot behavior. Recent studies have shown that VLA models can exhibit overconfident failures under distribution shift, sometimes ignoring language instructions and relying on memorized or shortcut-like manipulation patterns [4], [5]. Such failures are problematic because the model may continue executing incorrect actions despite violating the language instruction.

Reliable uncertainty estimation is therefore critical for safe deployment and failure detection in VLA systems. However, uncertainty estimation in VLA models is fundamentally challenging. Unlike autoregressive token-based VLA models [1], [6], many recent VLA models generate actions through regression or flow-based generation [2], [3], where explicit predictive probabilities are unavailable. As a result, uncertainty estimation methods based on token-level entropy or

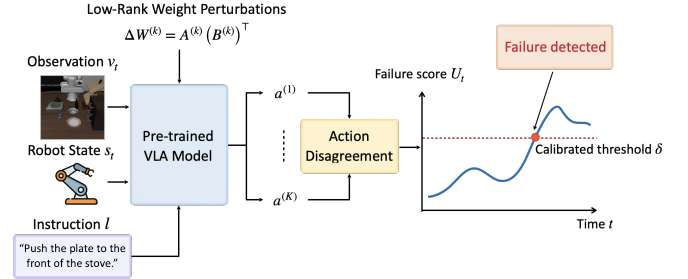


Fig. 1: Overview of the proposed PFD framework. Given the current observation, robot state, and language instruction, low-rank weight perturbations generate local parameter variations around the pretrained VLA model. Disagreement among their action predictions provides an epistemic uncertainty-based failure score U_t . A failure is detected when U_t exceeds the calibrated threshold δ .

perplexity in autoregressive VLA policies [7] are not directly applicable to these models.

From a Bayesian perspective, predictive uncertainty is commonly decomposed into aleatoric uncertainty and epistemic uncertainty. Aleatoric uncertainty captures inherent stochasticity in observations or action generation and is generally irreducible, whereas epistemic uncertainty reflects uncertainty over model parameters due to limited or insufficient training data [8]–[10]. In generative policies, stochastic sampling is a natural way to estimate uncertainty by measuring variability across multiple action samples [11]. For flow-based models such as $\pi_{0.5}$ [3], varying the initial action-generation noise enables the policy to represent multiple plausible action modes for the same observation. The resulting action variability therefore primarily reflects aleatoric uncertainty under a fixed pre-trained model. In safety-critical robotic systems, epistemic uncertainty is particularly important under distribution shift, where policies may encounter situations that are poorly represented by their training data. A reliable policy should therefore be able to recognize when it does not know how to act confidently.

A common and practical way to estimate epistemic uncertainty is through deep ensembles, which measure disagreement across multiple independently trained model instances [10]. However, their computational and storage costs can become prohibitive when scaling to large pretrained foundation models [12]. Recent work has extended this idea to flow-based VLAs by separately fine-tuning multiple VLA models and measuring disagreement in their predicted flow velocities [13]. However, such ensemble-based approaches

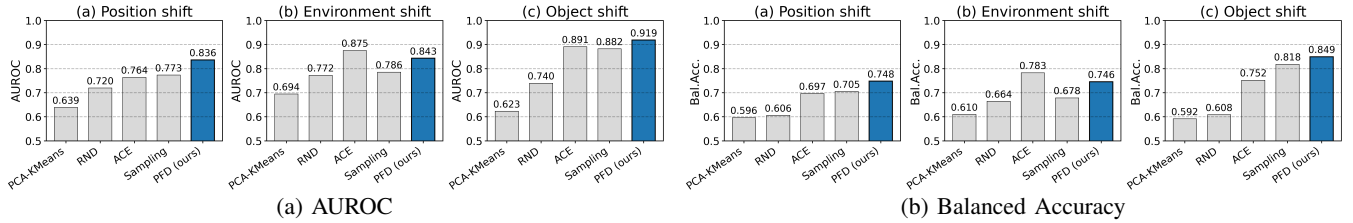


Fig. 2: Failure detection performance averaged across LIBERO-PRO suites within each distribution-shift category. PFD is highlighted in blue, while baseline methods are shown in gray.

require training and maintaining multiple sets of VLA parameters. As a more efficient alternative, post-hoc perturbation methods have been explored for epistemic uncertainty estimation, particularly in large language models [14]–[18]. Their application to continuous-action VLA models, however, remains largely unexplored.

In this work, we propose perturbation-based failure detection (PFD), a training-free framework for epistemic uncertainty estimation in pretrained VLA models. Rather than relying on stochastic action-generation variability, PFD constructs local model variations around the pretrained VLA parameters through low-rank perturbations of selected weight matrices. As shown in Fig. 1, disagreement among the resulting perturbed action predictions is used as an epistemic uncertainty signal for failure detection. Experiments on LIBERO [19] and LIBERO-PRO [4] show that PFD achieves the highest average AUROC and balanced accuracy among the evaluated methods while consistently outperforming stochastic action sampling across distribution shifts. Real-world robot experiments further demonstrate that PFD provides a competitive failure-detection signal under an unseen object shift.

II. RELATED WORK

A. Epistemic Uncertainty Quantification

Epistemic uncertainty reflects uncertainty over model parameters or model knowledge and is commonly studied through Bayesian neural networks and variational inference [8], [20], [21]. In practice, Monte Carlo dropout and deep ensembles are widely used to estimate epistemic uncertainty. Monte Carlo dropout estimates uncertainty through repeated dropout-enabled inference at test time [9], which limits its direct application to pretrained VLA models that were not trained with dropout. Deep ensembles estimate epistemic uncertainty from disagreement across independently trained models [10], [12], but maintaining and evaluating multiple models can be computationally expensive for large pretrained foundation models. To address these limitations, post-hoc perturbation methods have been explored as an efficient way to quantify uncertainty without retraining or maintaining multiple pretrained models [14]–[16]. Recent work has also used low-rank parameterizations for scalable uncertainty estimation, including rank-1 Bayesian neural networks [22], Bayesian low-rank adaptation (LoRA) [23], training-free Bayesianization of pretrained LoRA adapters [17], Bayesian low-rank parameterizations [24], and inference-time weight

perturbations within a low-rank subspace [18]. Although these approaches have been explored in neural networks and large pretrained models, their application to epistemic uncertainty estimation in continuous-action VLA policies remains largely unexplored.

B. Failure Detection in VLA Models

Reliable deployment of VLA models requires detecting failure-relevant signals during policy execution. Prior approaches such as SAFE [25] and recent VLA calibration methods [26] rely on labeled success and failure trajectories. However, collecting sufficiently large and diverse sets of failure trajectories can be costly and potentially unsafe, particularly under unseen deployment conditions. Recent work has explored failure detection through representation-based out-of-distribution (OOD) detection, action uncertainty, and temporal consistency. OOD detection approaches include PCA-KMeans, which measures distances from projected embeddings to clusters fitted on in-distribution data [27], and Random Network Distillation (RND) for detecting unfamiliar representations [11]. FIPER [11] quantifies action uncertainty using Action Conditional Entropy (ACE) over stochastic action samples generated by generative policies. Sentinel [28] monitors generative robot policies by combining temporal action consistency with VLM-based task progress assessment. Other approaches leverage token-level entropy or perplexity from autoregressive action distributions [7]. In contrast, PFD uses action disagreement induced by training-free low-rank perturbations of pretrained VLA parameters as an epistemic uncertainty signal for failure detection.

III. BACKGROUND

A. Vision-Language-Action Policy

We consider a Vision-Language-Action policy π_θ parameterized by θ . At timestep t , the policy receives a multimodal observation

$$x_t = (v_t, s_t, \ell), \quad (1)$$

where v_t denotes visual observations, s_t denotes the robot proprioceptive state, and ℓ denotes the language instruction.

Given x_t , the policy predicts a chunk of future continuous actions:

$$\mathbf{a}_{t:t+H-1} = \pi_\theta(x_t; \mathbf{z}), \quad (2)$$

where $\mathbf{z}$ denotes the action-generation noise for stochastic generative policies and is omitted for deterministic policies.

Here, H denotes the action chunk horizon, d denotes the action dimension, and $\mathbf{a}_t \in \mathbb{R}^d$ denotes a continuous robot action at timestep t .

B. Bayesian Uncertainty Decomposition

From a Bayesian perspective, model parameters $\theta \sim p(\theta | \mathcal{D})$ are treated as random variables conditioned on training data $\mathcal{D}$. Predictive uncertainty can then be decomposed into aleatoric uncertainty and epistemic uncertainty under the posterior distribution over model parameters [8], [9]:

$$\text{Var}(\mathbf{a} | x_t, \mathcal{D}) = \underbrace{\mathbb{E}_{\theta \sim p(\theta | \mathcal{D})} [\text{Var}(\mathbf{a} | x_t, \theta)]}_{\text{Aleatoric}} + \underbrace{\text{Var}_{\theta \sim p(\theta | \mathcal{D})} [\mathbb{E}(\mathbf{a} | x_t, \theta)]}_{\text{Epistemic}}. \quad (3)$$

The epistemic term reflects uncertainty over plausible model parameters under the posterior distribution. By Bayes' rule, the parameter posterior can be expressed as

$$p(\theta | \mathcal{D}) = \frac{p(\mathcal{D} | \theta)p(\theta)}{p(\mathcal{D})}, \quad p(\mathcal{D}) = \int p(\mathcal{D} | \theta)p(\theta) d\theta. \quad (4)$$

For large-scale pretrained foundation models, evaluating the marginal likelihood $p(\mathcal{D})$ requires integration over a high-dimensional parameter space, making exact posterior inference computationally intractable [12], [14]–[16]. Therefore, we focus on training-free approximations of local model variations without retraining the pretrained VLA model.

IV. METHODOLOGY

A. Low-Rank Parameter Perturbation

Following prior work on perturbation-based uncertainty estimation [14], [15], [18], we approximate local parameter variations around the pretrained parameters by directly perturbing selected weight matrices of the VLA policy. For a pretrained weight matrix $W_0 \in \mathbb{R}^{d_{\text{out}} \times d_{\text{in}}}$, a full weight matrix perturbation requires sampling and storing $O(d_{\text{out}}d_{\text{in}})$ additional perturbation parameters for each model variant. This becomes computationally expensive for large projection matrices in pretrained foundation models. We therefore construct each perturbation using a rank- r factorization, where $r \ll \min(d_{\text{out}}, d_{\text{in}})$.

The k -th low-rank weight perturbation is defined as

$$\Delta W^{(k)} = \frac{\sigma}{\sqrt{d_{\text{in}}}} A^{(k)} (B^{(k)})^\top, \quad (5)$$

where $A^{(k)} \in \mathbb{R}^{d_{\text{out}} \times r}$, $B^{(k)} \in \mathbb{R}^{d_{\text{in}} \times r}$, and σ controls the perturbation strength. For the k -th perturbation sample, the entries of the low-rank factors are independently sampled as

$$A_{ij}^{(k)}, B_{ij}^{(k)} \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, 1). \quad (6)$$

The resulting perturbed weight matrix is

$$W^{(k)} = W_0 + \Delta W^{(k)}. \quad (7)$$

Since $\Delta W^{(k)}$ is parameterized by rank- r factors, it satisfies $\text{rank}(\Delta W^{(k)}) \leq r$. The low-rank factorization reduces the perturbation parameterization from $O(d_{\text{out}}d_{\text{in}})$ to

$O(r(d_{\text{out}} + d_{\text{in}}))$, enabling efficient generation of multiple local parameter variations. Each perturbation-specific factor pair $A^{(k)}$ and $B^{(k)}$ is sampled once and kept fixed throughout the episode rather than being resampled at every timestep. This allows each perturbation sample to represent a temporally consistent local model variation.

B. Perturbation-Based Uncertainty Estimation

Applying low-rank perturbations to the selected weight matrices produces a perturbed parameter set $\theta^{(k)}$. We construct K model variants consisting of the unperturbed base policy and $K-1$ perturbed variants. For stochastic generative policies, we fix the action-generation noise $\mathbf{z}_0$ across all model variants and obtain

$$\mathbf{a}_{t:t+H-1}^{(k)} = \pi_{\theta^{(k)}}(x_t; \mathbf{z}_0). \quad (8)$$

We then quantify uncertainty as disagreement across perturbed action chunks:

$$u_t = \frac{1}{Hd} \sum_{h=0}^{H-1} \sum_{i=1}^d \text{Var}_k \left[a_{t+h,i}^{(k)} \right]. \quad (9)$$

Here, $a_{t+h,i}^{(k)}$ denotes the i -th action dimension of the predicted action at future step h under model variant k . Variance is computed across model variants and averaged over chunk steps and action dimensions. The perturbed variants are used only for uncertainty estimation, while actions predicted by the unperturbed base policy are executed in the environment.

Intuition. Local parameter variations can reveal how strongly the policy is constrained by the training data. When the policy behavior for a given observation is well constrained, nearby model variations are expected to produce consistent action predictions. In contrast, observations that are insufficiently constrained during training may lead to greater disagreement across perturbed models. Such disagreement can therefore provide a useful epistemic signal for detecting failure-prone situations.

C. Temporal Aggregation for Failure Detection

To obtain a stable uncertainty estimate for the current timestep, we aggregate recent chunk-level uncertainty scores using a temporal sliding window [11]:

$$U_t = \frac{1}{T_w} \sum_{\tau=t-T_w+1}^t u_\tau, \quad (10)$$

where T_w denotes the sliding window size. This temporal aggregation captures persistent disagreement patterns rather than transient action fluctuations during policy execution. We refer to U_t as the timestep-level failure score used for online failure detection.

V. EXPERIMENTS

A. Models and Perturbation Design

Models. We evaluate $\pi_{0.5}$ [3] in the main experiments and OpenVLA-OFT [2] in the perturbation-strength analysis. OpenVLA-OFT predicts continuous action chunks through

a deterministic regression head, whereas $\pi_{0.5}$ uses a flow-matching-based generative policy that supports stochastic action sampling. In simulation, $\pi_{0.5}$ predicts action chunks of length 10, while OpenVLA-OFT predicts action chunks of length 8. For both policies, all predicted actions in each chunk are executed before the next policy inference.

Perturbation Location. We apply low-rank weight perturbations to the MLP down-projection in all transformer layers, leaving the first layer unperturbed to preserve the initial feature representation. These weight matrices constitute the perturbation set $\mathcal{S}$ used throughout our method. In OpenVLA-OFT, the perturbations are applied to the dual vision encoder, whereas in $\pi_{0.5}$, they are applied to the VLM expert before the action expert module. This design captures uncertainty in the model’s understanding of the current situation and how such uncertainty affects downstream action predictions.

Implementation Details. We use a perturbation rank of $r = 64$, which is substantially smaller than the maximum rank $\min(d_{\text{out}}, d_{\text{in}}) = 2048$ of the perturbed MLP projection matrices in $\pi_{0.5}$. For $\pi_{0.5}$, the perturbation strength is set to $\sigma = 0.6$ and fixed across all main experiments. Unless otherwise specified, we use $K = 5$ model variants, consisting of the unperturbed base model and four low-rank perturbed variants. All experiments are conducted using a single NVIDIA GeForce RTX 3090 GPU. We analyze the sensitivity to σ in Sec. V-G.

B. Evaluation Benchmarks

LIBERO. LIBERO [19] is a language-conditioned robot manipulation benchmark comprising diverse manipulation tasks. We evaluate four commonly used suites: *Spatial*, *Object*, *Goal*, and *LIBERO-10*, which emphasize spatial relationships, object interactions, task goals, and diverse long-horizon manipulation tasks, respectively.

LIBERO-PRO. LIBERO-PRO [4] extends LIBERO with controlled distribution shifts while preserving task semantics. We consider three shift categories: *Position* shifts, which modify object placements and relative spatial arrangements; *Environment* shifts, which alter the visual scene context without changing the underlying task; and *Object* shifts, which modify non-essential object attributes such as color, texture, or size while preserving semantic identity. These shifts frequently induce failures in pretrained VLA policies despite their strong performance on standard LIBERO, making LIBERO-PRO a challenging benchmark for evaluating failure detection under distribution shift.

C. Failure Detection Baselines

We compare PFD against four baselines: two representation-based OOD detection methods, PCA-KMeans and Random Network Distillation (RND), and two action-uncertainty methods, Action Conditional Entropy (ACE) and stochastic action sampling. These baselines cover both representation-level novelty detection and action-level uncertainty, with stochastic sampling serving as the most direct counterpart to our approach. For fair comparison,

all baseline scores are processed using the same temporal aggregation and failure-detection protocol as our method.

PCA-KMeans. We adopt the PCA-KMeans baseline introduced in [27], following its use in SAFE [25]. Let e_t denote the final-layer action-token embedding averaged over the predicted action chunk. Using successful in-distribution reference embeddings, we learn a PCA projection P and fit K-means centroids $\{c_j\}$. At test time, the OOD score is the distance to the nearest centroid, $u_t^{\text{PCA}} = \min_j \|Pe_t - c_j\|_2$.

RND. We adapt the RND-OE implementation from FIPER [11] using the same embeddings e_t . The predictor is trained on successful in-distribution embeddings to match a fixed randomly initialized target network. The OOD score is the prediction error, $u_t^{\text{RND}} = \|f_{\text{pred}}(e_t) - f_{\text{target}}(e_t)\|_2$.

Sampling. For each observation, we generate K stochastic action chunks by independently sampling the initial flow-matching noise, $\mathbf{a}_{t:t+H-1}^{(k)} = \pi_\theta(x_t; \mathbf{z}^{(k)})$ with $\mathbf{z}^{(k)} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$. For direct comparison, we compute the same variance-based uncertainty score as our method over all action dimensions $(x, y, z, r_x, r_y, r_z, g)$. By construction, sampling varies action-generation noise under fixed model parameters, whereas PFD varies model parameters with fixed generation noise.

ACE. We implement ACE, originally introduced in FIPER [11], following the implementation of [13]. Using the same K stochastic action chunks, ACE obtains end-effector position trajectories (x, y, z) directly from Cartesian actions or through forward kinematics for joint-space actions. ACE then discretizes the 3D positions and averages the resulting spatial entropy over the prediction horizon.

D. Evaluation Protocol

Reference and Calibration Sets. For each LIBERO-PRO evaluation suite, we construct separate reference and calibration sets from the corresponding in-distribution LIBERO suite. For example, when evaluating LIBERO-PRO Spatial-Pos or Spatial-Env, we collect **Reference set**: 5 successful LIBERO-Spatial rollouts per task (50 rollouts total); and **Calibration set**: another 5 successful rollouts per task (50 rollouts total) for threshold calibration. The reference and calibration sets consist of disjoint rollouts.

Reference Set Usage. The reference set is used to fit PCA-KMeans and RND and to calibrate the spatial discretization used by ACE. For PCA-KMeans and RND, we use the same chunk-averaged final-layer action-token embeddings to fit the corresponding OOD detector. In contrast, PFD does not use the reference set and requires no auxiliary model fitting.

Failure Score and Threshold Calibration. For each method, let $u_{i,t}$ denote the raw uncertainty score at timestep t of rollout i . We temporally aggregate $u_{i,t}$ according to Eq. (10) using a sliding window of size $T_w = 5$, producing the timestep-level failure score $U_{i,t}$. For threshold calibration and AUROC computation, we define the rollout-level score as the maximum failure score observed during execution:

$$s_i = \max_t U_{i,t}. \quad (11)$$

TABLE I: Failure detection performance under LIBERO-PRO distribution shifts. Detection time is averaged over detected failures only. Detection-time values are parenthesized when either TPR or TNR is below 0.4 and are excluded from the average detection time. The best and second-best valid results are shown in bold and underlined, respectively. Higher is better for AUROC and balanced accuracy; lower is better for detection time.

Environment	Metric	PCA-KMeans	RND	ACE	Sampling	PFD (Ours)
<i>Position Shift</i>						
LIBERO-PRO Spatial-Pos	AUROC $\uparrow$	0.845	0.803	0.837	0.943	0.961
Success Rate: 43.8%	Bal. Acc. $\uparrow$	0.740	0.652	0.718	<u>0.886</u>	0.904
	Det. Time $\downarrow$	<u>65.70</u>	75.30	69.29	67.42	64.02
LIBERO-PRO Object-Pos	AUROC $\uparrow$	0.546	0.586	0.425	0.484	0.640
Success Rate: 21.0%	Bal. Acc. $\uparrow$	0.497	0.447	0.486	0.476	0.579
	Det. Time $\downarrow$	(59.13)	(71.23)	(38.30)	(35.04)	46.85
LIBERO-PRO Goal-Pos	AUROC $\uparrow$	0.660	0.831	0.883	0.848	0.891
Success Rate: 32.8%	Bal. Acc. $\uparrow$	0.605	0.722	0.779	0.737	0.804
	Det. Time $\downarrow$	(49.69)	59.20	<u>43.78</u>	37.69	45.27
LIBERO-PRO 10-Pos	AUROC $\uparrow$	0.504	0.659	0.911	0.819	0.852
Success Rate: 11.0%	Bal. Acc. $\uparrow$	0.544	0.603	0.803	0.721	0.705
	Det. Time $\downarrow$	(85.95)	(64.96)	47.49	<u>51.92</u>	56.75
<i>Environment Shift</i>						
LIBERO-PRO Spatial-Env	AUROC $\uparrow$	0.942	0.922	0.889	0.794	0.823
Success Rate: 42.2%	Bal. Acc. $\uparrow$	0.788	0.746	0.817	0.668	0.717
	Det. Time $\downarrow$	<u>68.08</u>	71.38	51.59	38.18	42.35
LIBERO-PRO Object-Env	AUROC $\uparrow$	0.477	0.592	0.785	0.775	0.803
Success Rate: 75.8%	Bal. Acc. $\uparrow$	0.508	0.522	0.665	0.688	0.720
	Det. Time $\downarrow$	(3.57)	(51.19)	(42.17)	41.89	40.12
LIBERO-PRO Goal-Env	AUROC $\uparrow$	0.742	0.833	0.909	0.736	0.874
Success Rate: 51.6%	Bal. Acc. $\uparrow$	0.577	0.698	0.780	0.603	0.785
	Det. Time $\downarrow$	(51.30)	48.51	35.30	<u>35.45</u>	36.40
LIBERO-PRO 10-Env	AUROC $\uparrow$	0.617	0.743	0.919	0.838	0.872
Success Rate: 70.8%	Bal. Acc. $\uparrow$	0.567	0.692	0.871	0.754	0.761
	Det. Time $\downarrow$	(75.46)	64.32	45.60	<u>51.53</u>	<u>53.95</u>
<i>Object Shift</i>						
LIBERO-PRO Spatial-Obj	AUROC $\uparrow$	0.867	0.975	0.844	0.877	0.947
Success Rate: 97.8%	Bal. Acc. $\uparrow$	0.828	0.766	0.656	0.834	0.932
	Det. Time $\downarrow$	68.18	65.91	(62.50)	53.41	70.45
LIBERO-PRO Object-Obj	AUROC $\uparrow$	0.506	0.663	0.855	0.948	0.958
Success Rate: 93.6%	Bal. Acc. $\uparrow$	0.513	0.508	0.657	0.860	0.880
	Det. Time $\downarrow$	(3.57)	(3.57)	(53.27)	45.05	49.49
LIBERO-PRO Goal-Obj	AUROC $\uparrow$	0.645	0.771	0.949	0.856	0.892
Success Rate: 84.8%	Bal. Acc. $\uparrow$	0.491	0.591	0.868	0.795	0.841
	Det. Time $\downarrow$	(86.67)	(68.89)	40.51	35.82	50.81
LIBERO-PRO 10-Obj	AUROC $\uparrow$	0.474	0.550	0.917	0.849	0.878
Success Rate: 66.6%	Bal. Acc. $\uparrow$	0.534	0.569	0.828	0.784	0.744
	Det. Time $\downarrow$	(70.64)	(74.41)	39.46	<u>43.28</u>	54.23
Average	AUROC $\uparrow$	0.652	0.744	0.844	0.814	0.866
	Bal. Acc. $\uparrow$	0.599	0.626	0.744	0.734	0.781
	Det. Time $\downarrow$	67.32	64.10	<u>46.63</u>	45.60	50.89

We then compute a constant threshold from successful in-distribution calibration rollouts:

$$\delta = Q_{0.95}(\{s_i \mid i \in \mathcal{D}_{\text{cal}}^{\text{succ}}\}), \quad (12)$$

where $Q_{0.95}$ denotes the empirical 95th percentile. We choose a constant rather than a time-varying threshold because distribution shifts can alter execution speed and task progress, making timestep-wise alignment between calibration and evaluation rollouts unreliable. The resulting threshold is transferred unchanged from the original LIBERO suite to the corresponding LIBERO-PRO suite, without using any LIBERO-PRO rollouts for threshold calibration.

E. Evaluation Metrics

We evaluate failure detection using three metrics.

AUROC. AUROC is a threshold-free metric that evaluates the overall discrimination between successful and failed rollouts. Given rollout-level scores s_i and failure labels $y_i \in$

$\{0, 1\}$, it measures the ability of the scores to separate the two outcomes across all possible thresholds. Higher values indicate better discrimination.


Balanced Accuracy. Balanced accuracy evaluates threshold-based runtime failure detection performance. A rollout is classified as a failure if $U_{i,t} > \delta$ at any timestep during execution. Balanced accuracy is defined as

$$\text{Bal. Acc.} = \frac{1}{2} (\text{TPR} + \text{TNR}). \quad (13)$$


It gives equal weight to the detection rate of failed rollouts (TPR) and the correct classification rate of successful rollouts (TNR), accounting for class imbalance. Higher values indicate better failure detection performance.

Detection Time. For a failed rollout, the normalized detection time is defined as

$$\text{DT} = 100 \cdot \frac{t_{\text{det}}}{T}, \quad t_{\text{det}} = \min \{t \mid U_t > \delta\}, \quad (14)$$

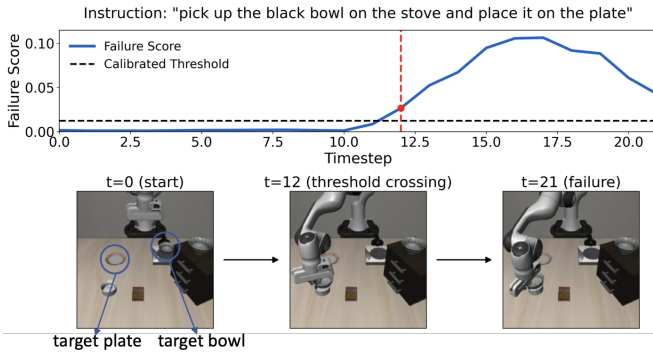

(a) Failure case: LIBERO-PRO Spatial-Pos

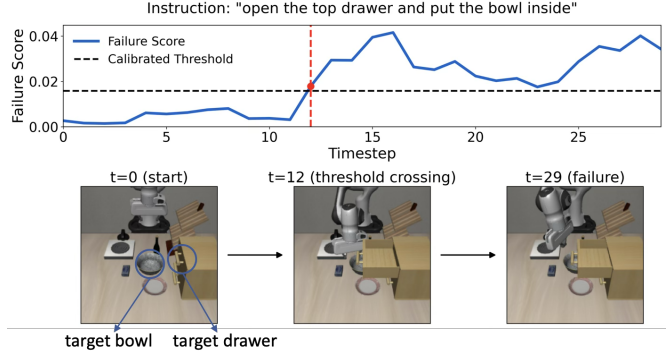

(b) Failure case: LIBERO-PRO Goal-Obj

Fig. 3: Representative failure cases from LIBERO-PRO. Blue curves show the PFD failure scores, black dashed lines denote thresholds calibrated at the 95th percentile of successful in-distribution rollouts, and red dashed lines indicate the first threshold crossing. The rollout images show observations at the start, first threshold crossing, and final failure timestep.

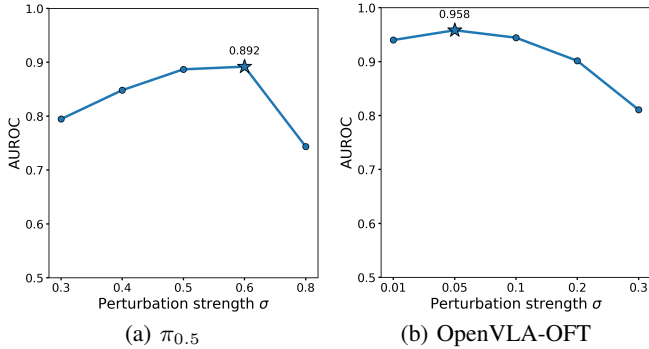


Fig. 4: Sensitivity of failure-detection AUROC to perturbation strength σ on LIBERO-10 using $K = 2$. Stars indicate the best-performing strength for each model.

where T denotes the rollout length. Lower values indicate earlier failure detection.

F. Failure Detection Results

Overall Performance. Table I shows that PFD achieves the highest average AUROC and balanced accuracy among the evaluated methods, reaching 0.866 and 0.781, respectively. Compared with stochastic action sampling, its most direct counterpart, PFD improves the averages from 0.814 to 0.866 in AUROC and from 0.734 to 0.781 in balanced accuracy, while outperforming Sampling across all 12 LIBERO-PRO suites in AUROC. The largest gain occurs on Object-Pos, from 0.484 to 0.640.

Performance across Shift Types. Fig. 2 further summarizes performance across distribution-shift categories. PFD achieves the best average performance under Position and Object shifts, while ranking second under Environment shifts. This suggests that the proposed uncertainty signal remains competitive across qualitatively different distribution shifts rather than being specialized to a single shift type.

Representation-Based OOD Baselines. Representation-based OOD baselines exhibit substantial variation across LIBERO-PRO suites. This is consistent with representation-level novelty not necessarily corresponding to task failure

TABLE II: Sensitivity to the number of model variants K . AUROC is averaged across all 12 LIBERO-PRO suites.

Method	$K = 2$	$K = 3$	$K = 4$	$K = 5$
Sampling	0.806	0.816	0.813	0.814
PFD	0.852	0.860	0.863	0.866

under distribution shift, since successful rollouts may also deviate from the in-distribution reference representations. For example, RND ranges from 0.975 on Spatial-Obj to 0.550 on 10-Obj, while PCA-KMeans ranges from 0.942 on Spatial-Env to 0.474 on 10-Obj.

Detection Time. Finally, PFD achieves an average normalized detection time of 50.89, compared with 45.60 for Sampling, while providing substantially higher balanced accuracy (0.781 vs. 0.734). Thus, PFD detects failures slightly later on average, but with more reliable detection.

G. Perturbation Parameter Analysis

Sensitivity to Perturbation Strength. We select the perturbation strength σ on in-distribution LIBERO-10 for both models, fixing the selected $\pi_{0.5}$ value across all 12 LIBERO-PRO suites in the main experiments. As shown in Fig. 4, $\pi_{0.5}$ (success rate: 95.4%) achieves its highest failure-detection AUROC of 0.892 at $\sigma = 0.6$ and remains stable over $\sigma \in [0.5, 0.6]$, whereas OpenVLA-OFT (success rate: 94.0%) achieves its highest AUROC of 0.958 at $\sigma = 0.05$ and remains stable over $\sigma \in [0.01, 0.1]$. Although the optimal σ differs between the two models, both exhibit a similar sensitivity trend. This suggests that moderate perturbations provide sufficient model diversity while remaining close to the pretrained VLA policy.

Number of Perturbation Samples. We further analyze sensitivity to the number of model variants K by averaging AUROC across all 12 LIBERO-PRO suites. As shown in Table II, PFD consistently outperforms stochastic action sampling across all evaluated values of K . Its average AUROC improves from 0.852 at $K = 2$ to 0.866 at $K = 5$, with only marginal gains from additional model variants,

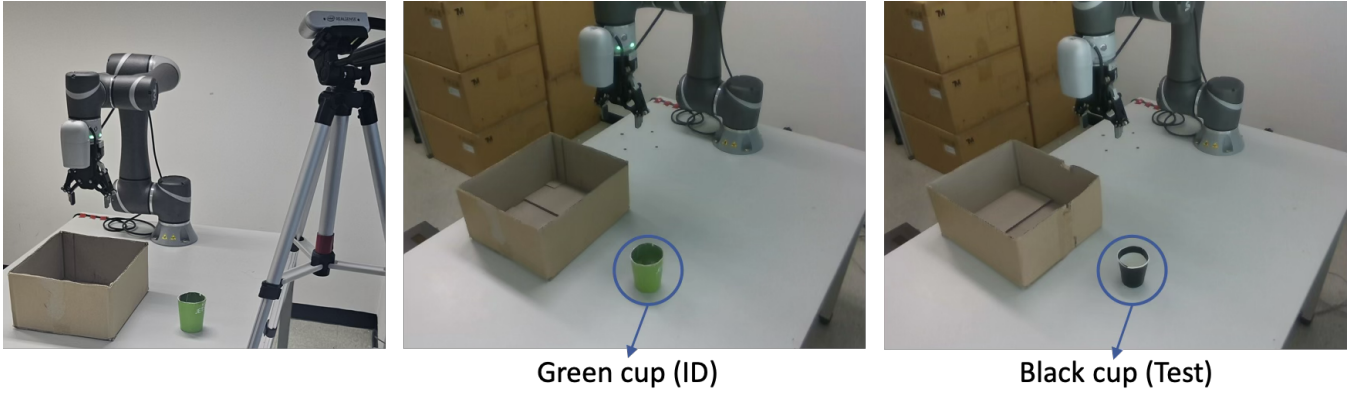


Fig. 5: Real-world setup and evaluation conditions. Left: robot workspace with the TM5-900, AG95 gripper, and fixed RealSense D435i camera. Middle: green-cup ID condition used for reference, calibration, and ablation. Right: unseen black-cup condition used for object-shift testing. Object positions are randomized within the same workspace region.

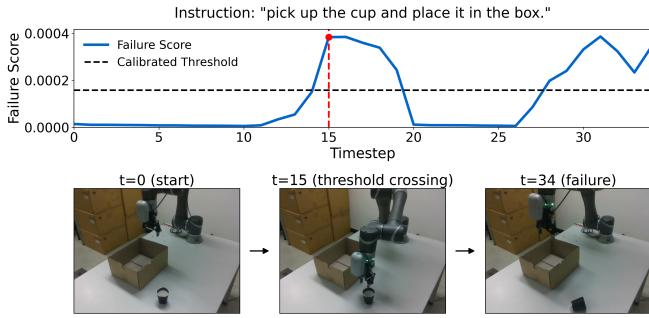


Fig. 6: Representative real-world failure under the unseen black-cup object shift. The PFD failure score crosses the calibrated threshold before the task failure. Bottom: observations at the start, first threshold crossing, and final failure.

indicating stable performance with a small K .

H. Qualitative Visualization

To complement the quantitative results in Table I, Fig. 3 shows two representative LIBERO-PRO failures detected by PFD. Under the position shift in Spatial-Pos, the policy successfully grasps the bowl but places it at the memorized original plate location rather than the shifted target (Fig. 3(a)). Under the object shift in Goal-Obj, the policy successfully opens the drawer but fails to grasp the target bowl after its visual attributes are changed (Fig. 3(b)). In both cases, the PFD failure score crosses the calibrated threshold before the task failure occurs.

I. Real-World Validation

Experimental Setup. We validate PFD using a TM5-900 robot arm equipped with an AG95 gripper and a fixed Intel RealSense D435i camera. The camera captures 640×480 RGB images, which are provided to the fine-tuned $\pi_{0.5}$ policy together with the robot state, consisting of six absolute joint angles and one gripper value. The language instruction is to “pick up the cup and place it in the box.”

Policy and Data Collection. We collect 50 demonstration episodes under the ID green-cup condition and fine-tune $\pi_{0.5}$

TABLE III: Real-world sensitivity to perturbation strength on the ablation set, which comprises 20 successful and 10 failed rollouts under the ID green-cup condition ($K = 2$).

Perturbation scale σ	AUROC
0.05	0.720
0.10	0.750
0.15	0.740
0.20	0.655
0.30	0.400

TABLE IV: Real-world failure detection under an unseen black-cup object shift with 30 successful and 20 failed rollouts. Best and second-best are shown in bold and underlined.

Method	AUROC $\uparrow$	Bal. Acc. $\uparrow$	Det. Time $\downarrow$
PCA-KMeans	0.822	0.742	44.24
RND	0.948	0.900	54.66
ACE	0.716	0.725	36.92
Sampling	0.803	0.767	47.02
PFD	<u>0.862</u>	<u>0.825</u>	51.03

for 10,000 optimization steps with an effective batch size of 16. The policy predicts 7-dimensional actions with an action chunk length of 16, and all actions in each chunk are executed before replanning. Camera observations are synchronized with the corresponding robot states at 30 Hz.

Evaluation Protocol. Following the protocol in Sec. V-D, we construct four disjoint real-world rollout sets. Both the **reference** and **calibration** sets contain 20 successful green-cup rollouts, with distinct rollouts used for baseline fitting and threshold calibration, respectively. The **ablation** set contains 30 green-cup rollouts, comprising 20 successes and 10 failures, and is used exclusively to select the perturbation strength σ . The **test** set contains 50 rollouts, comprising 30 successes and 20 failures, all collected using an unseen black cup to evaluate an object shift from the ID green-cup condition. A rollout is labeled as a failure if the task is not completed within 35 replanning steps or is terminated early for safety. All methods are evaluated offline on the same cached policy inputs.

Perturbation-Strength Ablation. We use $K = 2$ for the perturbation-strength sweep and $K = 5$ for the final

evaluation. AUROC remains stable for $\sigma \in [0.05, 0.15]$ but degrades at $\sigma \geq 0.2$. We therefore select the best-performing value, $\sigma = 0.1$, for the real-world evaluation.

Failure-Detection Results. Table IV reports failure-detection performance under the unseen black-cup object shift. RND achieves the best performance in this setting, possibly because representation-level novelty is more strongly correlated with task failure in the relatively constrained single-task setup. PFD achieves an AUROC of 0.862 and a balanced accuracy of 0.825, ranking second in both metrics and outperforming the action-level uncertainty baselines, ACE (0.716/0.725) and Sampling (0.803/0.767), respectively. Fig. 6 further shows a representative real-world failure in which the PFD score crosses the calibrated threshold before the eventual task failure. Overall, these results show that PFD remains competitive for real-world VLA failure detection.

VI. CONCLUSION

In this work, we proposed PFD, a training-free failure detection framework for pretrained VLA models that estimates epistemic uncertainty from disagreement induced by low-rank weight perturbations. Experiments on LIBERO-PRO show that PFD achieves the highest average AUROC and balanced accuracy among the evaluated methods while consistently outperforming stochastic action sampling across distribution shifts. Real-world evaluation further demonstrates competitive performance, with PFD ranking second in both AUROC and balanced accuracy. Although PFD remains effective with a small number of perturbation samples, multiple perturbed forward passes still introduce additional inference cost. Future work could reduce this overhead through more efficient uncertainty estimation or distillation-based approximations. Overall, our results suggest that perturbation-based epistemic uncertainty is a promising direction for reliable failure detection in VLA systems.

REFERENCES

- [1] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi, *et al.*, “Openvla: An open-source vision-language-action model,” *arXiv preprint arXiv:2406.09246*, 2024.
- [2] M. J. Kim, C. Finn, and P. Liang, “Fine-tuning vision-language-action models: Optimizing speed and success,” *arXiv preprint arXiv:2502.19645*, 2025.
- [3] K. Black, N. Brown, J. Darpanian, *et al.*, “ $\pi_{0.5}$: a vision-language-action model with open-world generalization,” *arXiv preprint arXiv:2504.16054*, 2025.
- [4] X. Zhou, Y. Xu, G. Tie, Y. Chen, G. Zhang, D. Chu, P. Zhou, and L. Sun, “Libero-pro: Towards robust and fair evaluation of vision-language-action models beyond memorization,” *arXiv preprint arXiv:2510.03827*, 2025.
- [5] Y. Xing, X. Luo, J. Xie, L. Gao, H. T. Shen, and J. Song, “Shortcut learning in generalist robot policies: The role of dataset diversity and fragmentation,” in *Conference on Robot Learning (CoRL)*, 2025.
- [6] A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, X. Chen, K. Choremanski, T. Ding, D. Driess, A. Dubey, C. Finn, *et al.*, “Rt-2: Vision-language-action models transfer web knowledge to robotic control,” *arXiv preprint arXiv:2307.15818*, 2023.
- [7] U. B. Karli, T. Kurumisawa, and T. Fitzgerald, “Ask before you act: Token-level uncertainty for intervention in vision-language-action models,” RSS 2025 Workshop on Out-of-Distribution Generalization in Robot Learning, 2025. [Online]. Available: <https://openreview.net/forum?id=NX0euXAv98>
- [8] A. Kendall and Y. Gal, “What uncertainties do we need in bayesian deep learning for computer vision?” in *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- [9] Y. Gal and Z. Ghahramani, “Dropout as a bayesian approximation: Representing model uncertainty in deep learning,” in *Proceedings of the 33rd International Conference on Machine Learning (ICML)*, vol. 48, 2016, pp. 1050–1059.
- [10] B. Lakshminarayanan, A. Pritzel, and C. Blundell, “Simple and scalable predictive uncertainty estimation using deep ensembles,” in *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- [11] R. Römer, A. Kobras, L. Worbis, and A. P. Schoellig, “Failure prediction at runtime for generative robot policies,” in *Advances in Neural Information Processing Systems (NeurIPS)*, 2025.
- [12] T. Papamarkou, M. Skoularidou, K. Palla, *et al.*, “Position: Bayesian deep learning is needed in the age of large-scale ai,” in *International Conference on Machine Learning (ICML)*, 2024.
- [13] R. Römer, M. Seeliger, S. Liu, B. Sturgis, M. Bagatella, D. Marta, A. Krause, and A. P. Schoellig, “Uncertainty quantification for flow-based vision-language-action models,” *arXiv preprint arXiv:2606.18043*, 2026.
- [14] H. Wang and Q. Ji, “Epistemic uncertainty quantification for pre-trained neural networks,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- [15] L. Liu, R. Pourreza, S. Panchal, A. Bhattacharyya, Y. Jian, Y. Qin, and R. Memisevic, “Enhancing hallucination detection through noise injection,” in *International Conference on Learning Representations (ICLR)*, 2026.
- [16] J. Nie, Y. Zhang, T. Liu, Y. ming Cheung, B. Han, and X. Tian, “Epistemic uncertainty for generated image detection,” in *Advances in Neural Information Processing Systems (NeurIPS)*, 2025.
- [17] H. Shi, Y. Wang, L. Han, H. Zhang, and H. Wang, “Training-free bayesianization for low-rank adapters of large language models,” in *Advances in Neural Information Processing Systems*, 2025.
- [18] T. Zhang, H. Shi, Y. Wang, H. Wang, X. He, Z. Li, H. Chen, L. Han, K. Xu, H. Zhang, D. Metaxas, and H. Wang, “Tokur: Token-level uncertainty estimation for large language model reasoning,” in *International Conference on Learning Representations*, 2026.
- [19] B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone, “LIBERO: Benchmarking knowledge transfer for lifelong robot learning,” in *Advances in Neural Information Processing Systems*, vol. 36, 2023.
- [20] C. Blundell, J. Cornebise, K. Kavukcuoglu, and D. Wierstra, “Weight uncertainty in neural networks,” in *Proceedings of the 32nd International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 37, 2015, pp. 1613–1622.
- [21] A. Graves, “Practical variational inference for neural networks,” in *Advances in Neural Information Processing Systems*, vol. 24, 2011.
- [22] M. W. Dusenberry, G. Jerfel, Y. Wen, Y.-A. Ma, J. Snoek, K. Heller, B. Lakshminarayanan, and D. Tran, “Efficient and scalable bayesian neural nets with rank-1 factors,” in *Proceedings of the 37th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 119, 2020, pp. 2782–2792.
- [23] Y. Wang, H. Shi, L. Han, D. Metaxas, and H. Wang, “BLob: Bayesian low-rank adaptation by backpropagation for large language models,” in *Advances in Neural Information Processing Systems*, 2024.
- [24] M. D. Toure and D. A. Stephens, “Singular bayesian neural networks,” in *Proceedings of the 43rd International Conference on Machine Learning*, 2026.
- [25] Q. Gu, Y. Ju, S. Sun, I. Gilitschenski, H. Nishimura, M. Itkina, and F. Shkurti, “SAFE: Multitask failure detection for vision-language-action models,” in *Advances in Neural Information Processing Systems (NeurIPS)*, 2025.
- [26] S. Francis-Meretzki, M. Mutti, Y. Romano, and A. Tamar, “Temporal difference calibration in sequential tasks: Application to vision-language-action models,” *arXiv preprint arXiv:2604.20472*, 2026.
- [27] H. Liu, Y. Zhang, V. Betala, E. Zhang, J. Liu, C. Ding, and Y. Zhu, “Multi-task interactive robot fleet learning with visual world models,” in *Proceedings of the 8th Conference on Robot Learning*, ser. Proceedings of Machine Learning Research, vol. 270, 2024, pp. 4286–4313.
- [28] C. Agia, R. Sinha, J. Yang, Z.-a. Cao, R. Antonova, M. Pavone, and J. Bohg, “Unpacking failure modes of generative policies: Runtime monitoring of consistency and progress,” in *Conference on Robot Learning*, 2024, arXiv:2410.04640. [Online]. Available: <https://arxiv.org/abs/2410.04640>