ธนัช พนมเริงไชย 673380041-0 sec2

Assignment 3

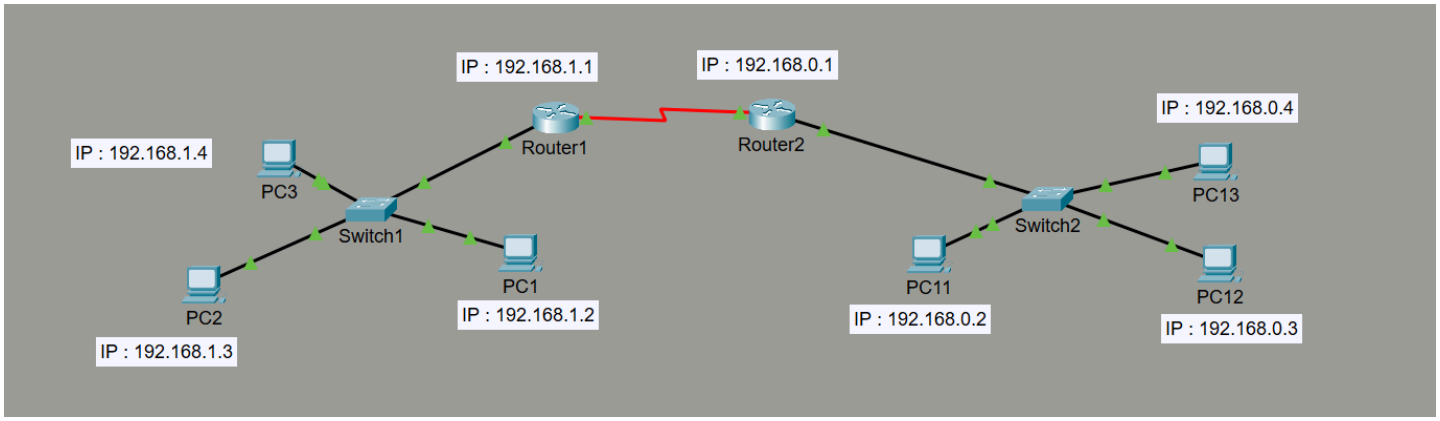

Rounter 1

```
R1#show ip interface brief
Interface              IP-Address      OK? Method
Status                 Protocol
GigabitEthernet0/0/0   192.168.1.1     YES manual
up                     up
GigabitEthernet0/0/1   unassigned      YES unset
administratively down  down
GigabitEthernet0/0/2   unassigned      YES unset
administratively down  down
Serial0/1/0            10.0.0.2        YES manual
up                     up
Serial0/1/1            unassigned      YES unset
administratively down  down
Vlan1                  unassigned      YES unset
administratively down  down
R1#
```

Copy Paste

Rounter 2

```
R2#show ip interface brief
Interface              IP-Address      OK? Method
Status                 Protocol
GigabitEthernet0/0/0   192.168.0.1     YES manual
up                     up
GigabitEthernet0/0/1   unassigned      YES unset
administratively down  down
GigabitEthernet0/0/2   unassigned      YES unset
administratively down  down
Serial0/1/0            10.0.0.1        YES manual
up                     up
Serial0/1/1            unassigned      YES unset
administratively down  down
Vlan1                  unassigned      YES unset
administratively down  down
R2#
```

Copy Paste

Switch 1

Show ip interface brief

```
S1#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
FastEthernet0/1        unassigned      YES manual up                    up
FastEthernet0/2        unassigned      YES manual up                    up
FastEthernet0/3        unassigned      YES manual up                    up
FastEthernet0/4        unassigned      YES manual up                    up
FastEthernet0/5        unassigned      YES manual down                  down
FastEthernet0/6        unassigned      YES manual down                  down
FastEthernet0/7        unassigned      YES manual down                  down
FastEthernet0/8        unassigned      YES manual down                  down
FastEthernet0/9        unassigned      YES manual down                  down
FastEthernet0/10       unassigned      YES manual down                  down
FastEthernet0/11       unassigned      YES manual down                  down
FastEthernet0/12       unassigned      YES manual down                  down
FastEthernet0/13       unassigned      YES manual down                  down
FastEthernet0/14       unassigned      YES manual down                  down
FastEthernet0/15       unassigned      YES manual down                  down
FastEthernet0/16       unassigned      YES manual down                  down
FastEthernet0/17       unassigned      YES manual down                  down
FastEthernet0/18       unassigned      YES manual down                  down
FastEthernet0/19       unassigned      YES manual down                  down
FastEthernet0/20       unassigned      YES manual down                  down
FastEthernet0/21       unassigned      YES manual down                  down
FastEthernet0/22       unassigned      YES manual down                  down
FastEthernet0/23       unassigned      YES manual down                  down
FastEthernet0/24       unassigned      YES manual down                  down
GigabitEthernet0/1     unassigned      YES manual down                  down
GigabitEthernet0/2     unassigned      YES manual down                  down
Vlan1                  192.168.1.10    YES manual up                    up
S1#
```

Copy Paste

Show mac address-table

```
S1#show mac address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0010.1109.8938    DYNAMIC     Fa0/3
   1    0010.1189.9301    DYNAMIC     Fa0/4
   1    0060.47bc.8d42    DYNAMIC     Fa0/1
   1    00e0.a37d.b4be    DYNAMIC     Fa0/2
S1#
```

Switch 2

Show ip interface brief

```
S2#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
FastEthernet0/1        unassigned      YES manual up                    up
FastEthernet0/2        unassigned      YES manual up                    up
FastEthernet0/3        unassigned      YES manual up                    up
FastEthernet0/4        unassigned      YES manual up                    up
FastEthernet0/5        unassigned      YES manual down                  down
FastEthernet0/6        unassigned      YES manual down                  down
FastEthernet0/7        unassigned      YES manual down                  down
FastEthernet0/8        unassigned      YES manual down                  down
FastEthernet0/9        unassigned      YES manual down                  down
FastEthernet0/10       unassigned      YES manual down                  down
FastEthernet0/11       unassigned      YES manual down                  down
FastEthernet0/12       unassigned      YES manual down                  down
FastEthernet0/13       unassigned      YES manual down                  down
FastEthernet0/14       unassigned      YES manual down                  down
FastEthernet0/15       unassigned      YES manual down                  down
FastEthernet0/16       unassigned      YES manual down                  down
FastEthernet0/17       unassigned      YES manual down                  down
FastEthernet0/18       unassigned      YES manual down                  down
FastEthernet0/19       unassigned      YES manual down                  down
FastEthernet0/20       unassigned      YES manual down                  down
FastEthernet0/21       unassigned      YES manual down                  down
FastEthernet0/22       unassigned      YES manual down                  down
FastEthernet0/23       unassigned      YES manual down                  down
FastEthernet0/24       unassigned      YES manual down                  down
GigabitEthernet0/1     unassigned      YES manual down                  down
GigabitEthernet0/2     unassigned      YES manual down                  down
Vlan1                  192.168.0.10    YES manual up                    up
S2#
```

Show mac address-table

```
S2#show mac address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0007.ecea.685a    DYNAMIC     Fa0/2
   1    000c.cf8e.b301    DYNAMIC     Fa0/4
   1    0090.2b30.5323    DYNAMIC     Fa0/1
   1    00e0.f999.ed28    DYNAMIC     Fa0/3
S2#
```

PC1->PC11,PC12,PC13

```
Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.4:
```

PC2->PC11,PC12,PC13

```
Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=2ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=2ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=17ms TTL=126

Ping statistics for 192.168.0.4:
```

PC3->PC11,PC12,PC13

```
Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.4:
```

PC11->PC1,PC2,PC3

```
Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>Ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\>Ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.4:
```

PC12->PC1,PC2,PC3

```
Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>Ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=14ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 14ms, Average = 4ms

C:\>Ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=17ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.4:
```

PC13->PC1,PC2,PC3

```
Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>Ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\>Ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.4:
```