

2

1

B

B

Defined By:

Pitch and Revolution

Parameters

☒ Constant pitch

☐ Variable pitch

Pitch:

0.250in

☐ Reverse direction

Revolutions:

3

Start angle:

360.0000573deg

☒ Clockwise



☐ Counterclockwise

P: 0.25in

Rev: 3

H: 0.75in

Dia: 0.5in

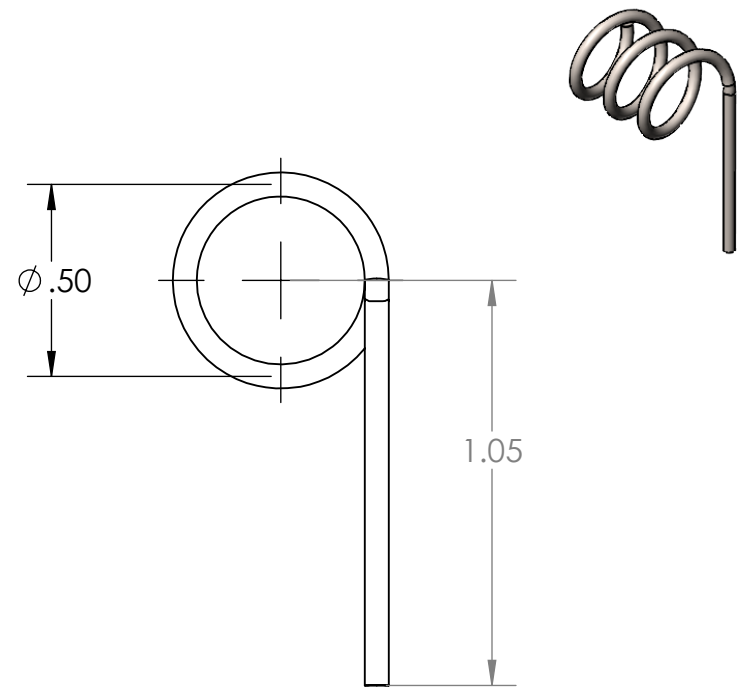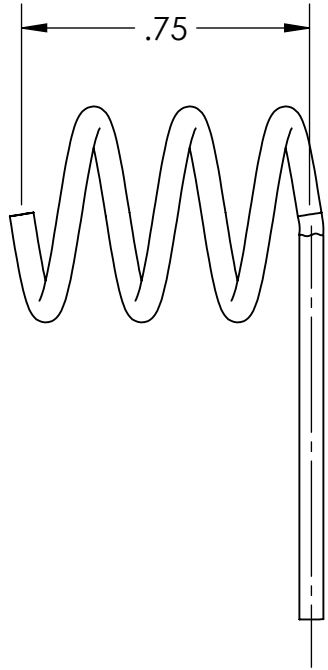

A

A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RE INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RE INC. IS PROHIBITED.

		INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y 14.5
		MATERIAL Stainless Steel (ferritic)
NEXT ASSY	USED ON	FINISH NONE
APPLICATION		DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:			
	NAME	DATE	
DRAWN	RE	5/8/2023	
CHECKED			
ENG APPR.			
MFG APPR.			
Q.A.			
COMMENTS:			

RE INC.			
TITLE: TENSION DOWEL SPRING			
SIZE A	DWG. NO. DRFT-21_YBW-10	REV -	
SCALE: 2:1	WEIGHT: 0.01	SHEET 1 OF 1	

2

1