
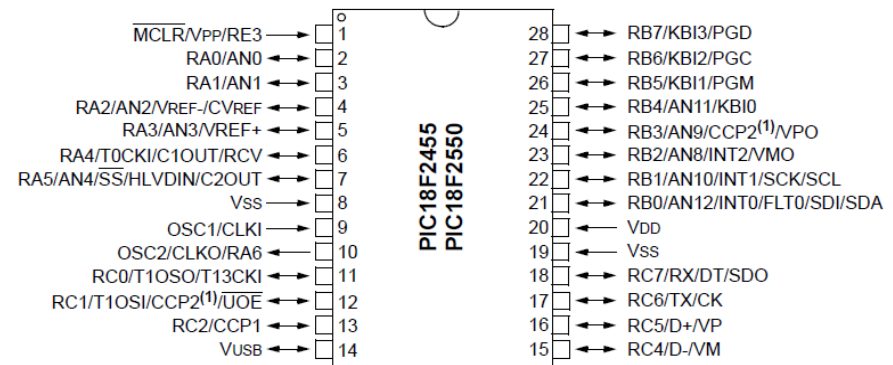


Notes ---

1. C2, C3 : 15pF~33pF, The user should test the performance of the oscillator over the expected VDD and temperature range for the application.
2. JP2 must be "OFF" when use the "External Power +5V" (SELF-POWER).
3. JP2 "ON" when use USB bus power (VCC=VBUS).
4. Bootloader Mode : SW1 "ON" (RE3=GND) when power up.
5. User Mode : SW1 "OFF" when power up.
6. LED1 : the Indicator in Bootloader Mode

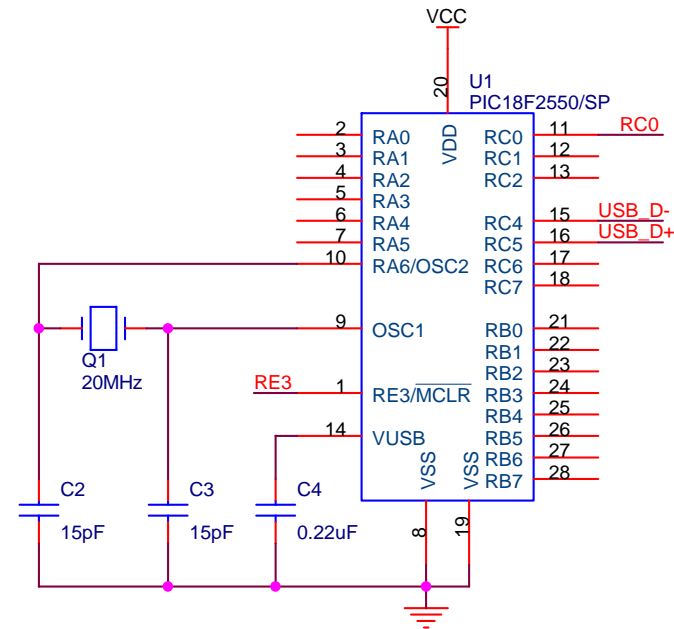

Title		
Bootloader Pic18F2550		
Size	Document Number	Rev
A	N/A	A
Date:	Sunday, January 11, 2015	Sheet 1 of 1