Top View







Front View



- Input frequency Type sensor PNP, NPN, Contact
- - สามารถตั้งค่า รอบความถี่การวัดได้ 1 วินาที 60 วินาที หรือ 1 นาที
- - สามารถตั้งค่า เชื่อมต่อ RS485 Modbus RTU
- - สามารถเรียกดูค่า Counter ผ่าน Modbus RTU ค่า Over Flow 0 4000000000
- Input Supply 220V AC

Rear View





Right View


- RS485 Modbus RTU
- - Support read holding registers 03
- Support read input registers 04
- Support preset single register 06
- Support preset multi registers 16
- Baudrate 4800 9600 19200 38400 57600
- - Parity none odd even
- - Address 1 240

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Display
Input	sensor PNP, NPN, Contact
Output	-
Memory	EEPROM with Battery
Setting	Remote
Communication	RS485 Modbus RTU

	REMARK			
	Frame		luminum	
	Color		ack	
	Protection		30	
	Model	T	GM-62127	
	APPEND			
		_"		
	Dimension	8"	600W x 300H x 100Dmm.	7
		12"		
Character Arial (Font),		(Font), White PVC Sticker		

PRIMUS CO., LTD.			
Draft by	Suphot		
Date	18.09.2019		
Revision	0		
Customer			

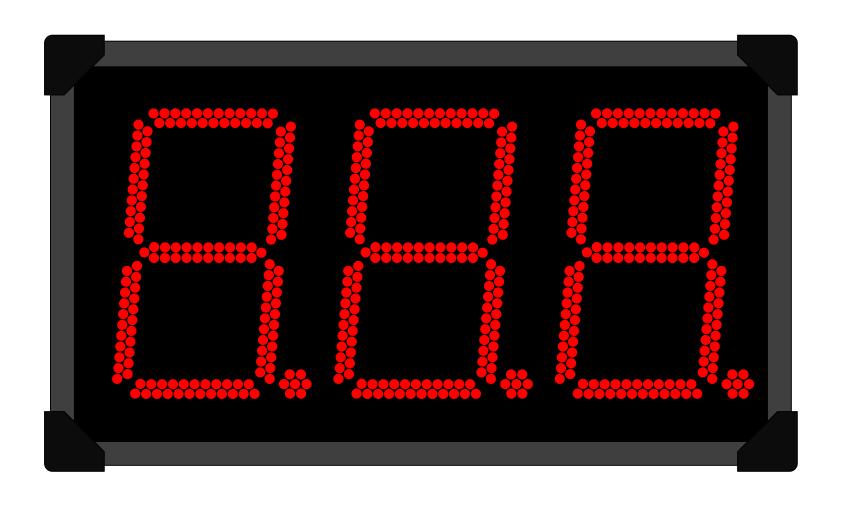

ราคาตั้ง

Segment Big Display

TGM-62127 [8"]: 18,000 บาท