



Left View

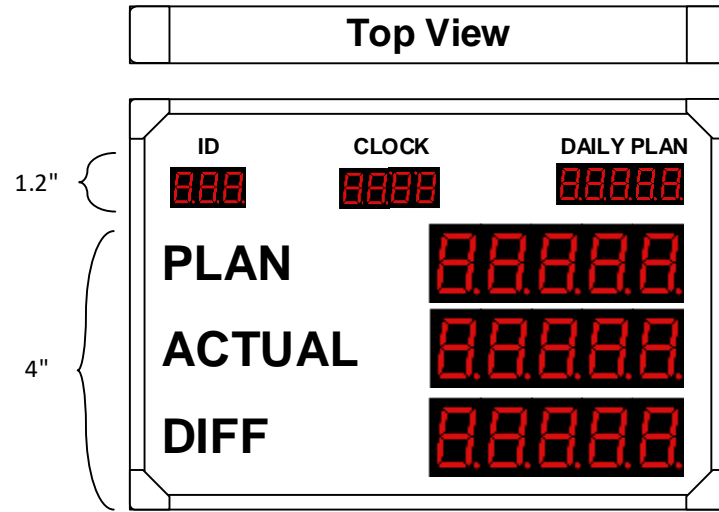

Rear View

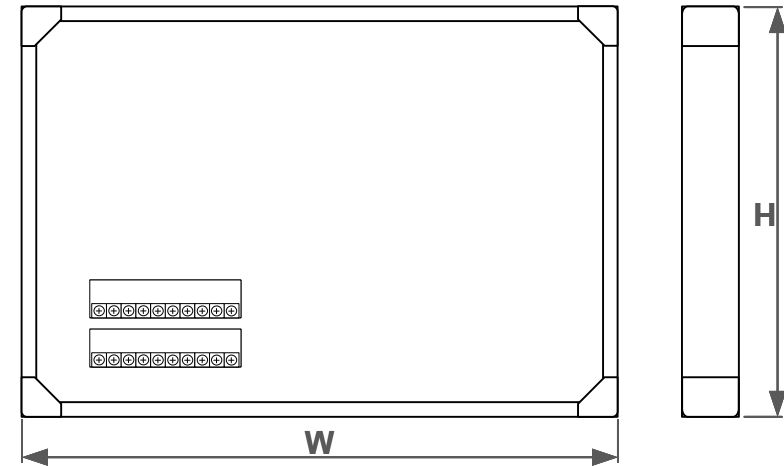

Right View

Front View

Detail :

- Display : 7 Segment
- Input : Counter Actual 3 Channel
- : Reset Actual 3 Channel
- Output : Alarm 3 Channel
- Communication : RS485 Modbus RTU
- : Baud Rate 4800,9600,19200,38400,57600
- : Parity None, Even, Odd

- ID : แสดง Address ตั้งได้ 1 - 255
- CLOCK : แสดงเวลาปัจจุบัน
- DAILY PLAN : แสดงเป้าหมายของจำนวนงาน
- PLAN : แสดงเป้าหมายจำนวนงานนับ
- : เพิ่มขึ้นทุกๆ รอบเวลา TACT TIME
- ACTUAL : Counter Input
- DIFF. : ผลต่าง ACTUAL - PLAN

การทำงาน : Alarm

- Alarm 1 ทำงานเมื่อ Actual \geq Set Point 1]
- Alarm 2 ทำงานเมื่อ Actual \geq Set Point 2]
- Alarm 3 ทำงานเมื่อ Actual \geq Plan

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment
Input	Sensor NPN,PNP/ Contact
Output	Alarm 3 Channel
Memory	EEPROM with Battery
Setting	Remote
Communication	RS485 Modbus RTU

REMARK	
Frame	Aluminum
Color	Black
Protact	IP30
Model	TGM-62083
APPEND	
Dimension	1.2"
	2.3"
	4"
Character	850W x 700H x 100D mm. ✓
Arial (Font), White PVC Sticker	

PRIMUS CO., LTD.	
Draft by	Suphot
Date	17.06.2019
Revision	0
Customer	
Approve	

ราคาตั้ง

7 Segment Big Display

TGM-62083 : 35,900 บาท