Left View

Top View

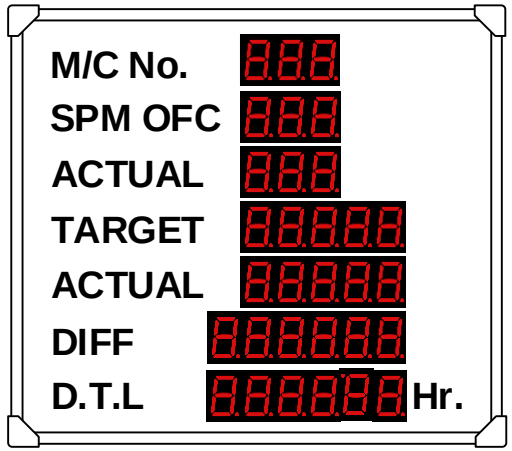

Front View

Rear View

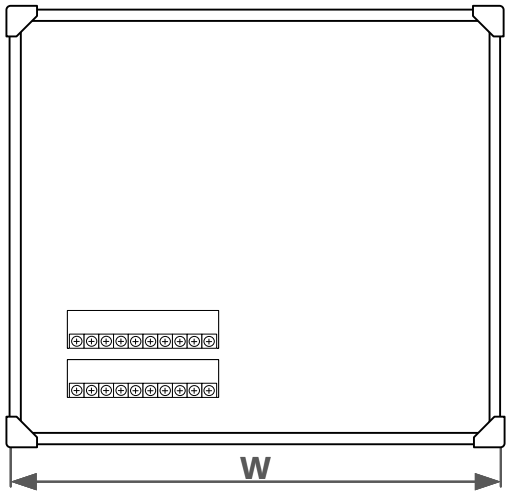

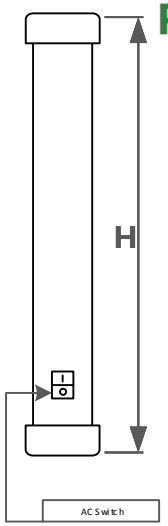

Right View

Detail :

Display	: 7 Segment 2.3"	M/C	: Setting with Remote & RS485	D.T.L : Input Contact 6 Channel		
Input	: Counter Actual 1 Channel	SPM	: Plan Steps per Minute	Machine	: ทL	Hour Counter [HH:MM]
	: Contact Control	Actual	: Steps per Minute Input	Die	: dL	Hour Counter [HH:MM]
Communication	: RS485 Modbus RTU	Target	: Setting with Remote & RS485	Mat'l	: ทL	Hour Counter [HH:MM]
	: Baud Rate 4800,9600,19200,38400,57600	Actual	: Counter Input	Q Check	: qC	Hour Counter [HH:MM]
	: Parity None, Even, Odd	Diff.	: Different Target & Actual	Die Chang	: dC	Hour Counter [HH:MM]
				Delayed Process	: dP	Hour Counter [HH:MM]

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment
Input	Sensor NPN,PNP
Output	-
Memory	EEPROM with Battery
Setting	Remote
Communication	RS485 Modbus RTU

REMARK	
Frame	Aluminum
Color	Black
Protact	IP30
Model	TGM-62008

APPEND	
Dimension : 600W x 750H x 100D mm.	
Character	Arial (Font), White PVC Sticker

PRIMUS CO., LTD.	
Draft by	Suphot
Date	22.01.2019
Revision	0
Customer	

Approve	

ราคาตั้ง

7 Segment Big Display

TGM-62008 : 36,200 บาท