
Top View



Front View

Detail: • - 7 Segment Size 4" red color

- Input Counter Sensor NPN, PNP, Contact 4 Channel

- TOTAL : แสดงผลรวม NO1 + NO2 + NO3 + NO4


- NO1 : Counter Sensor NPN, PNP, Contact 1 Channel


- NO2 : Counter Sensor NPN, PNP, Contact 1 Channel

- NO3: Counter Sensor NPN, PNP, Contact 1 Channel

- NO4 : Counter Sensor NPN, PNP, Contact 1 Channel







Right View

- RS485 Modbus RTU
- Support read holding registers 03
- Support read input registers 04
- Support preset multi registers 16
- Baudrate 4800 9600 19200 38400 57600
- Parity none odd even
- Address 1 240

Technical Specification


Power Supply	100-240 VAC, 50-60Hz	
Display	7 Segment Display	
Input	Counter Sensor NPN, PNP, Contact 4 Ch	
Output	-	
Memory	EEPROM with Battery	
Setting	Remote	
Communication	RS485 Modbus RTU	

	REMARK		
Frame	Α	Aluminum	
Color	В	Black	
Protection	ΙP	IP30	
Model	T	GM-62130	
APPEND			
	1.2"		
Dimension	2.3"	500W x 650H x 100Dmm.	
	4"	850W x 1000H x 100Dmm.	
Character Arial (Font), White PVC Sticke			

PRIMUS CO., LTD.		
Suphot		
18.09.2019		
0,1		

Approve	


Top View




Front View

- Detail: - 7 Segment Size 4" red color
 - Input Counter Sensor NPN, PNP, Contact 4 Channel
 - TOTAL : แสดงผลรวม NO1 + NO2 + NO3 + NO4
 - NO1 : Counter Sensor NPN, PNP, Contact 1 Channel
 - NO2 : Counter Sensor NPN, PNP, Contact 1 Channel
 - NO3: Counter Sensor NPN, PNP, Contact 1 Channel
 - NO4 : Counter Sensor NPN, PNP, Contact 1 Channel







Right View

- RS485 Modbus RTU
- Support read holding registers 03
- Support read input registers 04
- Support preset multi registers 16
- Baudrate 4800 9600 19200 38400 57600
- Parity none odd even
- Address 1 240

Technical Specification


Power Supply	100-240 VAC, 50-60Hz	
Display	7 Segment Display	
Input	Counter Sensor NPN, PNP, Contact 4 Ch	
Output	-	
Memory	EEPROM with Battery	
Setting	Remote	
Communication	RS485 Modbus RTU	

REMARK		REMARK	
	Frame	A	Aluminum
	Color	E	Black
	Protection		IP30
	Model	Model TGM-62130	
			APPEND
		1.2'	10
	Dimension	2.3'	
		4'	850W x 1000H x 100Dmm.₩
	Character /		al (Font), White PVC Sticker

PRIMUS CO., LTD.		
Draft by	Suphot	
Date	18.09.2019	
Revision	0	
Customer		

|--|


Top View




Front View

- **Detail:** -7 Segment Size 4" red color
 - Input Counter Sensor NPN, PNP, Contact 4 Channel
 - - TOTAL : แสดงผลรวม NO1 + NO2 + NO3 + NO4
 - - NO1 : Counter Sensor NPN, PNP, Contact 1 Channel
 - - NO2 : Counter Sensor NPN, PNP, Contact 1 Channel
 - NO3: Counter Sensor NPN, PNP, Contact 1 Channel
 - NO4 : Counter Sensor NPN, PNP, Contact 1 Channel







Right View

- RS485 Modbus RTU
- Support read holding registers 03
- Support read input registers 04
- Support preset multi registers 16
- Baudrate 4800 9600 19200 38400 57600
- Parity none odd even
- Address 1 240


Technical Specification

Power Supply	100-240 VAC, 50-60Hz	
Display	7 Segment Display	
Input	Counter Sensor NPN, PNP, Contact 4 Ch	
Output	-	
Memory	EEPROM with Battery	
Setting	Remote	
Communication	RS485 Modbus RTU	

		REMARK
Frame	A	Aluminum
Color	Е	Black
Protection	II	P30
Model	Т	ГGM-62130
		APPEND
	1.2	
Dimension	2.3"	" 500W x 650H x 100Dmm. Y
	4"	
Character	Aria	al (Font), White PVC Sticker

PRIMUS CO., LTD.		
Draft by	Suphot	
Date	18.09.2019	
Revision	1	
Customer		

|--|--|--|

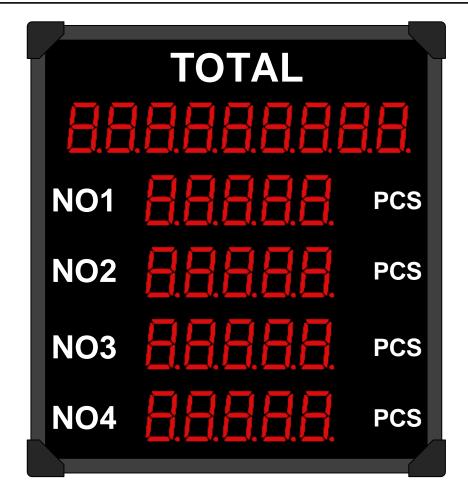

ราคาตั้ง

Segment Big Display

TGM-62130 [4"]: 57,800 บาท

TGM-62130rev1 [2.3"]: 36,900 บาท