VIAVI

Cable Id :	**Fiber Id :** Fiber 2825
Location A : LOC A	**Location B :** LOC B
Job Id :	**Technician Id :**

SmartOTDR (S/N 28162)	E100AS (S/N 28162)	Date : 04/12/2025 15:14

Test Setup							
OTDR EXPERT	1550nm	30ns	10km	64cm	20.0s	1.46800(G652 G657)	-81.0 dB
Alarms							
Thresholds				None			
Summary							
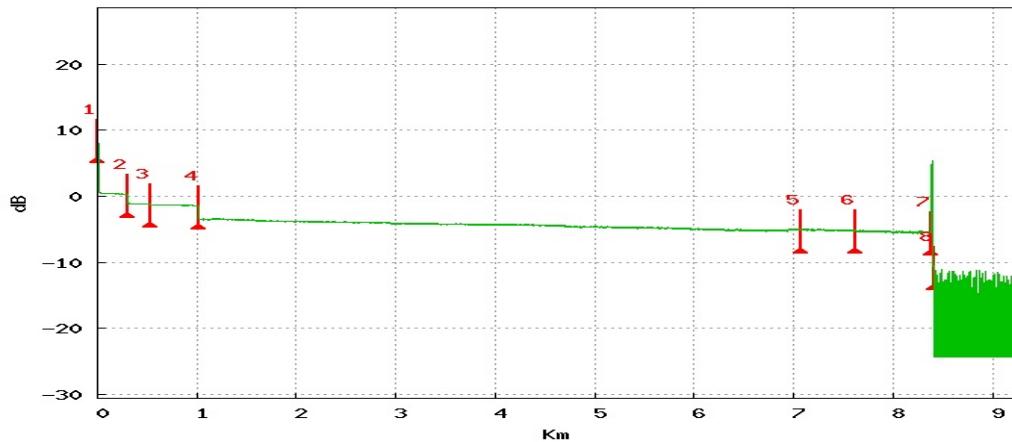
Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms
24 f 01 no dadari gp to tp.msor	1550	11.261	39.47	8.409	LOC A -> LOC B	8	

OTDR 1550nm

Event		Distance	Loss	Reflect.	Slope	Section	T. Loss
		Km	dB	dB	dB/km	Km	dB
1	⬡	0.000		-36.52		0.000	0.000
2	▬	0.299	1.440		0.381	0.299	0.115
3	▬	0.532	0.137		0.168	0.233	1.595
4	▬	1.013	2.011		1.416	0.481	1.892
5	▬	7.077	-0.197		0.294	6.065	5.672
6	▬	7.624	0.098		0.237	0.547	5.605
7	▣	8.387	5.333	-43.16	0.289	0.763	5.924
8	⬡	8.409				0.022	11.261