

VIAVI

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 3278
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)

E100AS (S/N 28162)


Date : 23/12/2025 17:45

Test Setup	1310nm	30ns	5km	64cm	20.0s	1.46750(G652 G657)	-79.0 dB
OTDR EXPERT							
Alarms					None		
Thresholds							
Summary							
Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms
24 f 08 no gajar gp to tp.sor	1310	10.518	40.00	2.928	LOC A > LOC B	6	

A : 0.000Km 1.080 dB
 B : 0.252Km -1.376 dB

A-B : 0.252Km 9.734 dB/Km

2.456 dB

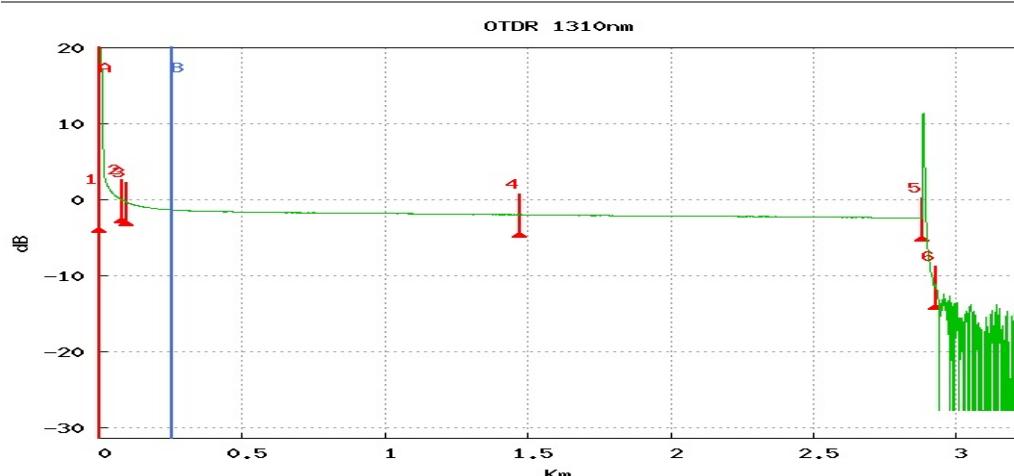

Event	Distance	Loss	Reflect.	Slope	Section	T. Loss
						dB
1	0.000	0.028	>-19.27		0.000	0.000
2	0.078	0.320			0.078	0.025
3	0.097	0.970			0.019	0.351
4	1.473	-0.091		0.542	1.376	2.068
5	2.880	2.586	-35.42	0.316	1.407	2.421
6	2.928	10.518			0.048	