VIAVI

Cable Id :	**Fiber Id :** Fiber 2838
Location A : LOC A	**Location B :** LOC B
Job Id :	**Technician Id :**

SmartOTDR (S/N 28162)	E100AS (S/N 28162)	Date : 06/12/2025 11:19

Test Setup							
OTDR EXPERT	1550nm	30ns	5km	64cm	20.0s	1.46800(G652 G657)	-81.0 dB
Alarms							
Thresholds				None			
Summary							

Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms
24 f 01 no keshlaar gp to tp.msor	1550	2.993	43.29	2.202	LOC A -> LOC B	14	
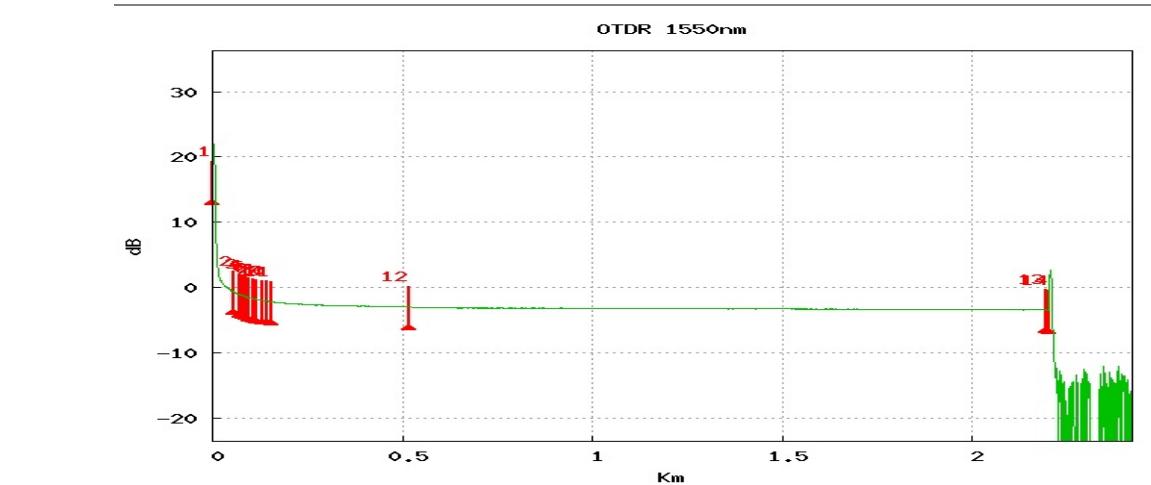
OTDR 1550nm

Event		Distance	Loss	Reflect.	Slope	Section	T. Loss
		Km	dB	dB	dB/km	Km	dB
1	▥▢▥	0.000	0.520	>-20.93		0.000	0.000
2	▬■▬	0.054	0.460			0.054	0.010
3	▬■▬	0.070	0.204			0.016	0.473
4	▬■▬	0.078	0.148			0.008	0.681
5	▬■▬	0.086	0.176			0.008	0.830
6	▬■▬	0.096	0.159			0.010	1.010
7	▬■▬	0.107	0.093			0.010	1.170
8	▬■▬	0.117	0.134			0.010	1.264
9	▬■▬	0.132	0.128			0.015	1.401
10	▬■▬	0.142	0.084			0.010	1.532
11	▬■▬	0.157	0.135			0.015	1.618
12	▬■▬	0.519	0.166			0.362	2.369
13	▬■▬	2.194	0.115		0.190	1.675	2.877
14	▬▢▥	2.202		-52.89		0.008	2.993