


VIavi

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 2792
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)		E100AS (S/N 28162)					Date : 01/12/2025 12:20		
Test Setup									
OTDR EXPERT		1550nm	30ns	5km	64cm	10.0s	1.46800(G652 G657)		-81.0 dB
Alarms									
Thresholds		None							
Summary									
Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms		
_2792_1550_OE.msor	1550	6.040	46.32	2.057	LOC A -> LOC B	26			

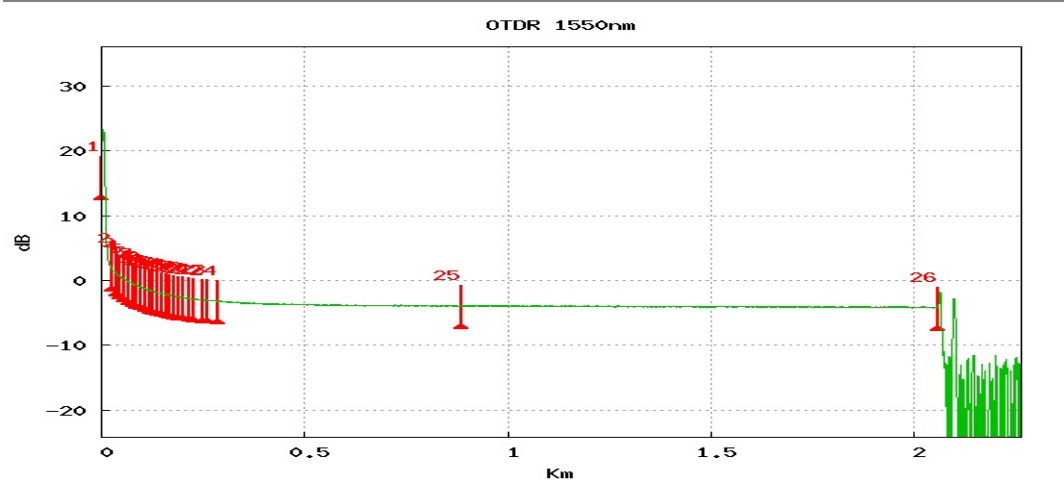

Event	Distance Km	Loss dB	Reflect. dB	Slope dB/km	Section Km	T. Loss dB
1	0.000		>-18.21		0.000	0.000
2	0.026	0.692			0.026	0.006
3	0.036	0.528			0.011	0.700
4	0.046	0.394			0.010	1.229
5	0.056	0.378			0.010	1.624
6	0.067	0.323			0.011	2.003
7	0.077	0.290			0.010	2.328
8	0.087	0.235			0.010	2.619
9	0.098	0.262			0.010	2.856
10	0.108	0.200			0.010	3.121
11	0.118	0.184			0.010	3.322
12	0.128	0.206			0.010	3.507
13	0.139	0.160			0.011	3.716
14	0.149	0.123			0.010	3.878
15	0.160	0.146			0.011	4.002
16	0.168	0.107			0.009	4.151
17	0.179	0.119			0.011	4.260
18	0.190	0.118			0.010	4.380
19	0.201	0.104			0.011	4.499
20	0.214	0.087			0.013	4.607
21	0.226	0.135			0.011	4.696
22	0.251	0.104			0.025	4.843
23	0.262	0.071			0.011	4.951
24	0.288	0.285			0.026	5.077
25	0.886	-0.103		0.936	0.598	5.922
26	2.057		-62.21	0.261	1.171	6.040