

VIAVI

Cable Id :
Location A : LOC A
Job Id :


Fiber Id : Fiber 2846
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)

E100AS (S/N 28162)

Date : 07/12/2025 10:38

Test Setup	1550nm	10ns	490m	16cm	20.0s	1.46800(G652 G657)	-81.0 dB
OTDR EXPERT							
Alarms							
Thresholds							
Summary							
Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms
_2846_1550_OE.msor	1550	3.096	48.38	0.272	LOC A > LOC B	7	

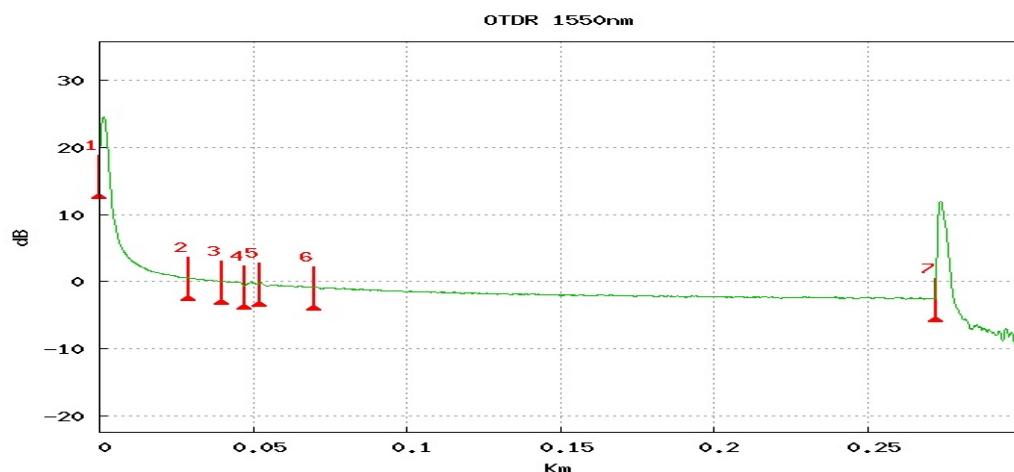

Event	Distance	Loss	Reflect.	Slope	Section	T. Loss
	Km	dB	dB	dB/km	Km	dB
1	0.000		>-20.59		0.000	0.000
2	0.029	0.416			0.029	0.006
3	0.040	0.434			0.011	0.423
4	0.047	0.032	-83.99		0.007	0.858
5	0.052	0.409			0.005	0.892
6	0.070	0.441			0.018	1.304
7	0.272		-40.75		0.202	3.096